

Improving Knowledge Graph Representation Learning by Structure Contextual Pre-training

Ganqiang Ye
Zhejiang University
Hangzhou, Zhejiang, China
yeganqiang@zju.edu.cn

Wen Zhang
Zhejiang University
Hangzhou, Zhejiang, China
wenzhang2015@zju.edu.cn

Zhen Bi
Zhejiang University
Hangzhou, Zhejiang, China
bizhen_zju@zju.edu.cn

Chi Man Wong
Alibaba Group
Hangzhou, Zhejiang, China
chiman.wcm@alibaba-inc.com

Hui Chen
Alibaba Group
Hangzhou, Zhejiang, China
weidu.ch@alibaba-inc.com

Huajun Chen*
Zhejiang University & AZFT JointLab
for Knowledge Engine
Hangzhou, Zhejiang, China
huajunsir@zju.edu.cn

ABSTRACT

Representation learning models for Knowledge Graphs (KG) have proven to be effective in encoding structural information and performing reasoning over KGs. In this paper, we propose a novel *pre-training-then-fine-tuning* framework for knowledge graph representation learning, in which a KG model is firstly pre-trained with triple classification task, followed by discriminative fine-tuning on specific downstream tasks such as entity type prediction and entity alignment. Drawing on the general ideas of learning deep contextualized word representations in typical pre-trained language models, we propose SCoP to learn pre-trained KG representations with structural and contextual triples of the target triple encoded. Experimental results demonstrate that fine-tuning SCoP not only outperforms results of baselines on a portfolio of downstream tasks but also avoids tedious task-specific model design and parameter training.

CCS CONCEPTS

• **Computing methodologies** → **Artificial intelligence**; *Knowledge representation and reasoning*.

KEYWORDS

Knowledge Graph, Pre-training, Embedding, Contextual Triple

ACM Reference Format:

Ganqiang Ye, Wen Zhang, Zhen Bi, Chi Man Wong, Hui Chen, and Huajun Chen. 2021. Improving Knowledge Graph Representation Learning by Structure Contextual Pre-training. In *The 10th International Joint Conference on Knowledge Graphs (IJCKG'21)*, December 6–8, 2021, Virtual Event, Thailand. ACM, New York, NY, USA, 5 pages. <https://doi.org/10.1145/3502223.3502244>

*Corresponding author

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

IJCKG'21, December 6–8, 2021, Virtual Event, Thailand

© 2021 Association for Computing Machinery.

ACM ISBN 978-1-4503-9565-6/21/12...\$15.00

<https://doi.org/10.1145/3502223.3502244>

1 INTRODUCTION

Knowledge Graphs (KGs) can be regarded as directed labeled graphs in which facts are represented as triples in the form of (*head entity*, *relation*, *tail entity*), abbreviated as (*h,r,t*). In recent years, KGs gain rapid development on both construction and applications, proven to be useful in artificial intelligence tasks such as semantic search [1], information extraction [4], and question answering [6].

Graph structure in KGs contains a lot of valuable information [3, 7], thus representation learning methods, embedding entities and relations into continuous vector spaces, are proposed to extract these structural features [2, 10, 16].

Various representation learning methods are specially proposed for different tasks, such as entity type prediction [17], entity alignment [19] and link prediction [8]. In our opinion, though tasks are different, KGs might be the same. Thus a general way to encode KGs is necessary. And the challenge is to make structural and contextual information into consideration, since they varies in different tasks.

Inspired by Pre-trained Language Models (PLM) such as BERT [5], which learn deep contextual representations for words and has achieved significant improvement in a variety of NLP tasks, we propose a novel knowledge graph representation learning method by Structure Contextual Pre-training (SCoP) model, to extract deep structural features and context for different knowledge graph tasks automatically. Similar to PLMs, there are two steps for using SCoP, pre-training and fine-tuning. Pre-training step enables the model to extract various deep structural contextualized information of entities and relations in knowledge graph and fine-tuning step makes the model adapt to specific downstream tasks.

With a target triple (*h, r, t*) as input, SCoP mainly includes two parts, in which contextual module generates representations for *h, r*, and *t*'s contextual triples, and aggregation module uses Transformer [15] to learn structural features with all contextual triples and fully interacted and generates a task-specific output vector.

We construct a new KG dataset, WN-all, which contains all the triple from WordNet and is suitable for KG pre-training model. We experimentally prove that SCoP is capable of doing different downstream tasks including entity type prediction, entity alignment and triple classification, and it could achieve better results in an efficient way. What's more, SCoP exhibits good prediction and classification performance and the importance of structural and contextual information in KG.

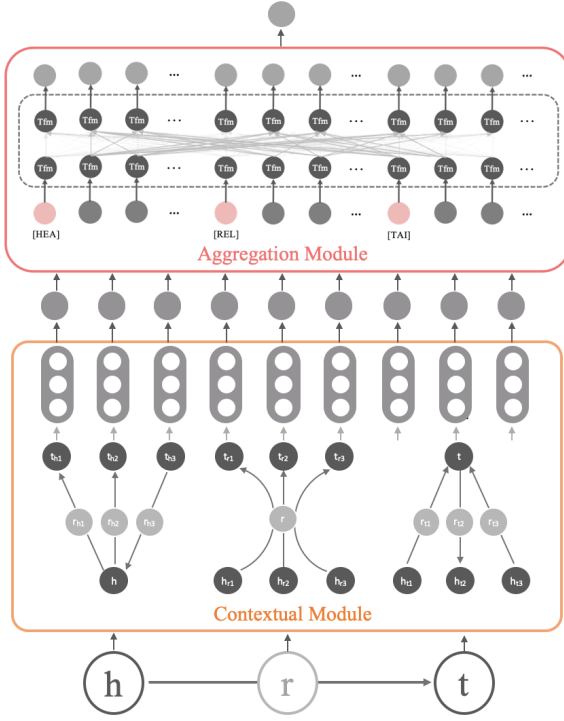


Figure 1: The structure of SCoP model. Given a target triple (h, r, t) , find its contextual triples and input them into SCoP model through two modules. Finally, we get the aggregation output representation.

2 SCOP

2.1 SCoP overview

Similar to pre-trained language model, SCoP model in this paper includes two steps: pre-training and fine-tuning. The SCoP model is based on structure contextual triples to learn the structural information of knowledge graph.

From the perspective of model structure, SCoP consists two modules that integrate and extract the deep structure information of KG. In this paper, bold characters denote vector representations, for example, \mathbf{h} is the vector representation of entity h .

2.2 Structure Contextual Triples

Given a KG $\mathcal{G} = \{\mathcal{E}, \mathcal{R}, \mathcal{T}\}$, \mathcal{E} , \mathcal{R} and \mathcal{T} are the set of entities, relations and triples respectively. And $\mathcal{T} = \{(h, r, t) | h \in \mathcal{E}, r \in \mathcal{R}, t \in \mathcal{E}\}$.

Entity contextual triples. For an entity e , contextual triples of it $C(e) \subseteq \mathcal{T}$ are triples containing e either as head or tail entity. Specifically, given an entity e , the contextual triple set of e is

$$C(e) = \{(e, r, t) | (e, r, t) \in \mathcal{T}, t \in \mathcal{E}, r \in \mathcal{R}\} \cup \{(h, r, e) | (h, r, e) \in \mathcal{T}, h \in \mathcal{E}, r \in \mathcal{R}\}$$

Relation contextual triples. Similarly, triples that contain the same relation r are the contextual triples of r . Unlike entity contextual

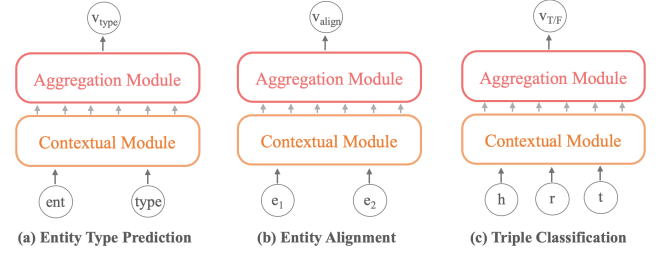


Figure 2: The structure of three model variants at the fine-tuning step, correspond to three downstream tasks.

triples, relation contextual triples are not directly adjacent. Given a relation r , $C(r)$ is

$$C(r) = \{(e_1, r, e_2) | (e_1, r, e_2) \in \mathcal{T}, e_1, e_2 \in \mathcal{E}\}$$

2.3 Two Steps: Pre-training and Fine-tuning

At the pre-training step, all parameters of the model are first trained on a general task which is triple classification in this paper, as the existence of a triple is the most widely available information in a knowledge graph.

At the fine-tuning step, we generate model variants based on the specific downstream task and the parameters in SCoP are fine-tuned with its dataset, as shown in Figure 2. This process is lightweight and fast to better results.

2.4 Two Modules

Contextual module. Given a target triple $\tau = (h, r, t)$, Contextual Module (C-Mod) first finds contextual triples of h , r and t , and then encodes each contextual triple $c = (h', r', t') \in \{C(h), C(r), C(t)\}$ into a triple representation \mathbf{c} . Thus

$$\mathbf{c} = \text{C-Mod}(\langle \mathbf{h}', \mathbf{r}', \mathbf{t}' \rangle)$$

where $\langle \mathbf{x}, \mathbf{y}, \mathbf{z} \rangle$ denotes a sequence of \mathbf{x} , \mathbf{y} and \mathbf{z} . We implement the triple module based on a single layer feed-forward neural network.

Aggregation module. Aggregation Module (A-Mod) takes contextual triple representation sequences and outputs an aggregation representation \mathbf{a} , so A-Mod can be expressed as

$$\mathbf{a} = \text{A-Mod}(\text{seq}_h, \text{seq}_r, \text{seq}_t)$$

where $\text{seq}_h, \text{seq}_r, \text{seq}_t$ are the sequence of contextual triples of h, r, t represented as follows

$$\text{seq}_x = \langle c_x^1, c_x^2, \dots, c_x^n \rangle$$

and c_x^i is the i -th contextual triples of x where x is one of h, r, t . n is the number of contextual triples.

We introduce segment vector \mathbf{s}_x into the current contextual triple sequences as Bert [5], indicating whether it belongs to head entity h , relation r or tail entity t . Besides, three types of triple token [HEA], [REL] and [TAI] are added in front of each contextual triple of h, r, t and their representations are denoted as \mathbf{k}_x . Consequently, the updated input sequence can be represented as

$$\mathbf{i} = \langle \mathbf{k}_{[\text{HEA}]}, \widehat{\text{seq}}_h, \mathbf{k}_{[\text{REL}]}, \widehat{\text{seq}}_r, \mathbf{k}_{[\text{TAI}]}, \widehat{\text{seq}}_t \rangle$$

Table 1: The results of entity type prediction task and entity alignment task. The bold number is the best one among all results while underlined number is the second best. Suffixes "-pr" and "-ft" means the pre-training and fine-tuning process respectively.

Method	Entity Type Prediction				Entity Alignment			
	MRR	Hit@1	Hit@3	Hit@10	MRR	Hit@1	Hit@3	Hit@10
TransE-pr	0.8499	83.11	86.35	87.75	0.8964	88.65	90.08	91.06
TransE-ft	0.8386	81.99	85.10	86.92	0.8943	88.63	89.76	90.89
ComplEx-pr	0.8396	80.30	86.77	89.15	0.8636	82.27	90.03	90.94
ComplEx-ft	0.7809	72.09	77.49	82.72	0.8772	84.26	89.56	90.23
RotatE-pr	0.8941	88.12	<u>90.93</u>	<u>91.62</u>	0.9066	89.78	91.34	92.20
RotatE-ft	0.8814	86.60	90.05	90.88	0.9035	89.75	90.77	91.36
SCoP-pr	<u>0.9018</u>	<u>89.73</u>	90.11	90.37	<u>0.9271</u>	<u>92.61</u>	<u>92.78</u>	<u>92.88</u>
SCoP-ft	0.9208	91.98	92.06	92.51	0.9319	93.15	93.21	93.39

Table 2: Statistics of datasets.

Dataset	# Ent	# Rel	# Train	# Dev	# Test
WN-all	116,377	26	302,074	37,759	37,759
Type-Prediction	87,875	-	72,076	8,431	8,582
Entity-Alignment	13,205	-	17,725	1,805	1,856

where $\widehat{\text{seq}}_x$ is the sequence of updated contextual triple representations \mathbf{c}_x^i . A-Mod encodes the input sequence \mathbf{i} with multi-layer bidirectional Transformer encoder, referred to the key idea of Bert.

Eventually, based on the three structure representations, \mathbf{h}_s , \mathbf{r}_s and \mathbf{t}_s , the scoring function can be written as

$$s_\tau = f(h, r, t) = \text{softmax}([\mathbf{h}_s; \mathbf{r}_s; \mathbf{t}_s] \mathbf{W}_{int} + \mathbf{b}) \mathbf{W}_{cls}$$

where $[\mathbf{x}; \mathbf{y}; \mathbf{z}]$ denotes the concatenation vector \mathbf{x} , \mathbf{y} and \mathbf{z} . $\mathbf{W}_{int} \in \mathbb{R}^{3d \times d}$ and $\mathbf{W}_{cls} \in \mathbb{R}^{d \times 2}$ are weights while $\mathbf{b} \in \mathbb{R}^d$ is a bias vector. $s_\tau \in \mathbb{R}^2$ is a 2-dimensional real vector with $s_{\tau_0} + s_{\tau_1} = 1$ after softmax function. Given the positive triple set \mathbb{D}^+ and a negative triple set \mathbb{D}^- constructed accordingly, we compute a cross-entropy loss with s_τ and triple labels:

$$\mathcal{L} = \sum_{\tau \in \mathbb{D}^+ \cup \mathbb{D}^-} (y_\tau \log(s_{\tau_0}) + (1 - y_\tau) \log(s_{\tau_1}))$$

where $y_\tau \in \{0, 1\}$ is the label of τ , and is 1 if $\tau \in \mathbb{D}^+$ while 0 if $\tau \in \mathbb{D}^-$. The negative triple set \mathbb{D}^- is simply generated by replacing head entity h or tail entity t with another random entity $e \in \mathcal{E}$ or replacing relation r with another random relation $r' \in \mathcal{R}$.

3 EXPERIMENTS

3.1 Datasets

To prove the effective of pre-training knowledge graph, we conduct experiments on the whole knowledge graph WordNet, named WN-all. We also construct two downstream datasets for fine-tuning. Detailed statistics of datasets are shown in Table 2.

3.2 Pre-training SCoP

We pre-train SCoP on WN-all via triple classification task, aiming to judge whether the triple is correct with label l . The loss is defined as $\mathcal{L} = \text{CrossEntropy}(\log(\text{softmax}(\mathbf{a})), l)$.

We fix the length of input contextual triple sequence with 256 and the length of each contextual triple of h, r, t is 84. We set the self-attention with 6 layers, 3 heads and the hidden dimension of representation vectors of 192 in Transformer in A-Mod, and learning rate of $2e^{-5}$, training batch size of 32, learning rate warm-up over the first 1,000 steps and a dropout probability of 0.1 on all layers.

3.3 Entity type prediction

Entity type prediction concentrates to complete a pair (entity, entity type) when its type is missing, which aims to verify the capability of our model for inferring missing entity type instances. Under this definition, we extract entity and its type from triples with relation *hypernym* in WN-all as the dataset for this task, shown in Table 2.

To fine-tune on entity type prediction task and its dataset, we input the structure contextual triples sequence of entity type pair τ and use the output vector $\mathbf{a}_\tau \in \mathbb{R}^d$ of A-Mod to compute the score function $s_\tau = f(\text{ent}, \text{type}) = \text{softmax}(\mathbf{a}_\tau \mathbf{W})$ and entity type classification loss: $\mathcal{L}_\tau = \text{CrossEntropy}(\log(s_\tau), l_\tau)$, where $\mathbf{W} \in \mathbb{R}^{d \times 2}$ is the classification weight and $s_\tau \in \mathbb{R}^2$ is a 2-dimensional real vector. Label $l_\tau \in \{0, 1\}$ is 1 if entity type pair τ is positive while 0 if negative. The Figure 2 (a) shows the structure of fine-tuning SCoP for entity type prediction task.

We adopt the Mean Reciprocal Rank (MRR) and percentage of triples ranked in top k (Hit@ k) where $k \in \{1, 3, 10\}$ as evaluation metrics, which are commonly adopted in previous KG works. See Section 4 for details of baseline models.

Experimental results are presented in the left part of Table 1. Compared with the results of fine-tuning stage (even rows with "-ft" suffix in table), SCoP-ft outperforms other models on all evaluation metrics, especially obtaining 3.8% prediction accuracy improvement on Hit@1 over the prior state of the art. Besides, we observe that SCoP-ft model has better performance than SCoP-pr while on the contrary, the results of other models after fine-tuning decreased. It proves that the structure contextual triples, and the structural

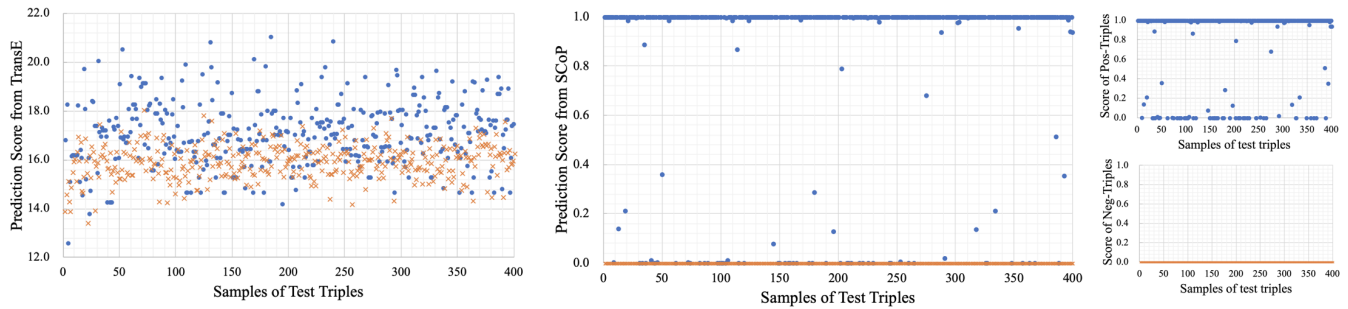


Figure 3: The prediction score distribution of TransE and SCoP. The blue dots represent positive sample predictions, while the orange crosses represent negative samples. To show the distribution of SCoP more clearly, the score of positive and negative samples is shown in the two small graphs juxtaposed on the right.

information that they represent in essence, can effectively improve the effect of entity type prediction.

3.4 Entity alignment

Entity alignment task aims to find two entities that refer to the same thing in the real world. Similarly, we generate the dataset for entity alignment consisting of two entities with the same meaning from triples with relation *_similar_to*, such as (nascent, emergent) and (sleep, slumber). Similar to the fine-tuning progress of entity type prediction, we compute the score function s_ω for alignment entity pair ω and its classification loss \mathcal{L}_ω in the same way. Figure 2 (b) shows its model structure and the right part of Table 1 shows the results.

The experimental results show that SCoP model still has the greatest advantage in Hit@1 metric, which is 93.15% and surpasses the second result by 3.3%. On the entity type prediction task, the results from pre-training step of SCoP model are not always optimal. For example, RotatE-pr has a better result with Hit@10 metric on entity type prediction task. However, those results of SCoP model outperform all other models at pre-training step on entity alignment task, let alone the overwhelming results after fine-tuning.

3.5 Triple classification and prob-distribution

We observed that the data of Hit@1, Hit@3, and Hit@10 in SCoP model are very close, and the interval between them is less than 1% while those of other models have clear gaps. Therefore, we further investigated the distribution of prediction score and the triple classification task, whose aim is to judge whether a given triple (h, r, t) is correct or not, as shown in Figure 2 (c).

From Figure 3, it is not difficult to see that the prediction scores of the positive samples and negative samples are relatively evenly distributed in the whole score space predicted by the baseline model like TransE, and most of the positive examples are in the upper part of the space while the negative in the lower part. The score distribution of ComplE and RotatE resembles TransE, so these similar figures are not repeatedly shown. However, The prediction scores of positive and negative samples in SCoP model are close to their upper and lower boundaries respectively and only a small part of the predicted values are distributed in the middle region. Figure 3 shows that structural information can bring significant gains to

triple classification tasks, and it is easier to set the margin γ to distinguish between positive and negative samples. The experiment shows that, different margins γ among {20, 40, 60, 80} percent of maximum prediction score, hardly affect the prediction accuracy of SCOP with 92.6% numerically, while that of TransE varies greatly, from 13.6% to 91.1%.

4 RELATED WORK

Knowledge Graph Embedding (KGE). With the introduction of the embedding vector into Knowledge Graph by TransE model [2], the method of KGE has made great progress. The key idea is to transform entities and relations in triple into continuous vector space. ComplEx [14] introduces complex embeddings so as to better model asymmetric relations and RotatE [13] further infers the composition pattern.

Pre-train Language Models (PLM). The PLMs have achieved excellent results in many natural language processing (NLP) tasks, such as BERT [5]. Later studies have proposed variants of BERT combined with KG, like K-BERT [11], KG-BERT [9], ERNIE [18] and KnowBERT [12], paying attention to the combination of knowledge graph and pre-trained language model. However, these methods aim at adjusting the PLM by injecting knowledge bases or their text representations. Whereas, our SCoP model mainly focuses on encoding knowledge graph instead of texts in sentences, so as to extract deep structural information to apply to various downstream tasks in knowledge graph.

5 CONCLUSION

In this work, we construct a new dataset WN-all from complete triples in WordNet and introduce SCoP, a pre-training knowledge graph representation learning method that achieves state-of-the-art results on three various knowledge graph downstream tasks on this dataset. SCoP shows good prediction and classification performance, due to its ability to capture the structural information in KG dynamically. In the future, we plan to evaluate SCoP in more scenarios and to fine-tune it in more different ways.

ACKNOWLEDGMENTS

This work is funded by national key research program 2018YFB1402800, and NSFC91846204/U19B2027.

REFERENCES

- [1] Jonathan Berant and Percy Liang. 2014. Semantic Parsing via Paraphrasing. In *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics, ACL 2014, June 22–27, 2014, Baltimore, MD, USA, Volume 1: Long Papers*. The Association for Computer Linguistics, 1415–1425. <https://doi.org/10.3115/v1/p14-1133>
- [2] Antoine Bordes, Nicolas Usunier, Alberto García-Durán, Jason Weston, and Oksana Yakhnenko. 2013. Translating Embeddings for Modeling Multi-relational Data. In *Advances in Neural Information Processing Systems 26: 27th Annual Conference on Neural Information Processing Systems 2013. Proceedings of a meeting held December 5–8, 2013, Lake Tahoe, Nevada, United States*, Christopher J. C. Burges, Léon Bottou, Zoubin Ghahramani, and Kilian Q. Weinberger (Eds.), 2787–2795. <https://proceedings.neurips.cc/paper/2013/hash/1cecc7a77928ca8133fa24680a88d2f9-Abstract.html>
- [3] Shaosheng Cao, Wei Lu, and Qionghai Xu. 2015. GraRep: Learning Graph Representations with Global Structural Information. In *Proceedings of the 24th ACM International Conference on Information and Knowledge Management, CIKM 2015, Melbourne, VIC, Australia, October 19 – 23, 2015*, James Bailey, Alistair Moffat, Charu C. Aggarwal, Maarten de Rijke, Ravi Kumar, Vanessa Murdock, Timos K. Sellis, and Jeffrey Xu Yu (Eds.). ACM, 891–900. <https://doi.org/10.1145/2806416.2806512>
- [4] Joachim Daiber, Max Jakob, Chris Hokamp, and Pablo N. Mendes. 2013. Improving efficiency and accuracy in multilingual entity extraction. In *I-SEMANTICS 2013 - 9th International Conference on Semantic Systems, ISEM '13, Graz, Austria, September 4–6, 2013*, Marta Sabou, Eva Blomqvist, Tommaso Di Noia, Harald Sack, and Tassilo Pellegrini (Eds.). ACM, 121–124. <https://doi.org/10.1145/2506182.2506198>
- [5] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2–7, 2019, Volume 1 (Long and Short Papers)*, Jill Burstein, Christy Doran, and Thamar Solorio (Eds.). Association for Computational Linguistics, 4171–4186. <https://doi.org/10.18653/v1/n19-1423>
- [6] Dennis Diefenbach, Kamal Deep Singh, and Pierre Maret. 2018. WDAqua-core1: A Question Answering service for RDF Knowledge Bases. In *Companion of the The Web Conference 2018 on The Web Conference 2018, WWW 2018, Lyon, France, April 23–27, 2018*, Pierre-Antoine Champin, Fabien Gandon, Mounia Lalmas, and Panagiotis G. Ipeirotis (Eds.). ACM, 1087–1091. <https://doi.org/10.1145/3184558.3191541>
- [7] William L. Hamilton, Rex Ying, and Jure Leskovec. 2017. Representation Learning on Graphs: Methods and Applications. *IEEE Data Eng. Bull.* 40, 3 (2017), 52–74. <http://sites.computer.org/debull/A17sept/p52.pdf>
- [8] Seyed Mehran Kazemi and David Poole. 2018. Simple Embedding for Link Prediction in Knowledge Graphs. In *Advances in Neural Information Processing Systems 31: Annual Conference on Neural Information Processing Systems 2018, NeurIPS 2018, December 3–8, 2018, Montréal, Canada*, Samy Bengio, Hanna M. Wallach, Hugo Larochelle, Kristen Grauman, Nicolò Cesa-Bianchi, and Roman Garnett (Eds.), 4289–4300. <https://proceedings.neurips.cc/paper/2018/hash/b2ab001909a8a6f04b51920306046ce5-Abstract.html>
- [9] Yuan Luo Liang Yao, Chengsheng Mao. 2019. KG-BERT: BERT for Knowledge Graph Completion. *arXiv:1909.03193* (2019).
- [10] Yankai Lin, Zhiyuan Liu, Maosong Sun, Yang Liu, and Xuan Zhu. 2015. Learning Entity and Relation Embeddings for Knowledge Graph Completion. In *Proceedings of the Twenty-Ninth AAAI Conference on Artificial Intelligence, January 25–30, 2015, Austin, Texas, USA*, Blai Bonet and Sven Koenig (Eds.). AAAI Press, 2181–2187. <http://www.aaai.org/ocs/index.php/AAAI/AAAI15/paper/view/9571>
- [11] Weijie Liu, Peng Zhou, Zhe Zhao, Zhiruo Wang, Qi Ju, Haotang Deng, and Ping Wang. 2019. K-BERT: Enabling Language Representation with Knowledge Graph. *arXiv:1909.07606* (2019).
- [12] Matthew E Peters, Mark Neumann, IV Logan, L Robert, Roy Schwartz, Vidur Joshi, Sameer Singh, and Noah A Smith. 2019. Knowledge Enhanced Contextual Word Representations. *arXiv preprint arXiv:1909.04164* (2019).
- [13] Zhiqing Sun, Zhi-Hong Deng, Jian-Yun Nie, and Jian Tang. 2019. Rotate: Knowledge graph embedding by relational rotation in complex space. *arXiv preprint arXiv:1902.10197* (2019).
- [14] Théo Trouillon, Johannes Welbl, Sebastian Riedel, Éric Gaussier, and Guillaume Bouchard. 2016. Complex embeddings for simple link prediction. International Conference on Machine Learning (ICML).
- [15] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. Attention is All you Need. In *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4–9, 2017, Long Beach, CA, USA*, Isabelle Guyon, Ulrike von Luxburg, Samy Bengio, Hanna M. Wallach, Rob Fergus, S. V. N. Vishwanathan, and Roman Garnett (Eds.), 5998–6008. <https://proceedings.neurips.cc/paper/2017/hash/3f5ee243547dee91fbd053c1c4a845aa-Abstract.html>
- [16] Zhen Wang, Jianwen Zhang, Jianlin Feng, and Zheng Chen. 2014. Knowledge Graph Embedding by Translating on Hyperplanes. In *Proceedings of the Twenty-Eighth AAAI Conference on Artificial Intelligence, July 27–31, 2014, Québec City, Québec, Canada*, Carla E. Brodley and Peter Stone (Eds.). AAAI Press, 1112–1119. <http://www.aaai.org/ocs/index.php/AAAI/AAAI14/paper/view/8531>
- [17] Yadollah Yaghoobzadeh and Hinrich Schütze. 2015. Corpus-level Fine-grained Entity Typing Using Contextual Information. In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing, EMNLP 2015, Lisbon, Portugal, September 17–21, 2015*, Lluís Màrquez, Chris Callison-Burch, Jian Su, Daniele Pighin, and Yuval Marton (Eds.). The Association for Computational Linguistics, 715–725. <https://doi.org/10.18653/v1/d15-1083>
- [18] Zhengyan Zhang, Xu Han, Zhiyuan Liu, Xin Jiang, Maosong Sun, and Qun Liu. 2019. ERNIE: Enhanced Language Representation with Informative Entities. *arXiv preprint arXiv:1905.07129* (2019).
- [19] Hao Zhu, Ruobing Xie, Zhiyuan Liu, and Maosong Sun. 2017. Iterative Entity Alignment via Joint Knowledge Embeddings. In *Proceedings of the Twenty-Sixth International Joint Conference on Artificial Intelligence, IJCAI 2017, Melbourne, Australia, August 19–25, 2017*, Carles Sierra (Ed.). ijcai.org, 4258–4264. <https://doi.org/10.24963/ijcai.2017/595>