

# Context binning, model clustering and adaptivity for data compression of genetic data

Jarek Duda

Jagiellonian University, Golebia 24, 31-007 Krakow, Poland, Email: [dudajar@gmail.com](mailto:dudajar@gmail.com)

**Abstract**—Rapid growth of genetic databases means huge savings from improvements in their data compression, what requires better inexpensive statistical models. This article proposes automatized optimizations e.g. of Markov-like models, especially context binning and model clustering. While it is popular to cut low bits of context, proposed context binning optimizes such reduction as table: `state=bin[context]` determining probability distribution, this way extracting nearly all useful information also from very large contexts, into a small number of states. Model clustering uses k-means clustering in space of general statistical models, allowing to optimize a few models (as cluster centroids) to be chosen e.g. separately for each read. There are also briefly discussed some adaptivity techniques to include data non-stationarity. This article is work in progress, to be expanded in the future.

**Keywords:** data compression, genetic data, (hidden) Markov model, k-means clustering, adaptivity, non-stationarity

## I. INTRODUCTION

We live in times of rapid growth of bioinformatics, e.g. for individual treatment of each patient based on sequencing in precision medicine approach [1]. However, sequencing data for a single person can reach terabytes, requiring huge databases - which optimizations by improved data compression techniques can lead to very large savings.

Dependencies in this type of data are relatively weak, from more sophisticated methods practically only Burrows-Wheeler transform [2] is more widely used. There are usually dominating simple techniques like entropy coding, RLE (run-length encoding: representing blocks of identical values), extending toward Markov models [3] - optimizations of which we are focused here, briefly presented in Fig. 1.

One optimization direction is toward higher order models (and exploiting additional contexts like position), where the basic difficulty is exponential size growth with order. Proposed context binning allows for its practical approximations by automatically merging similar contexts, allowing to extract nearly all useful information also from very large contexts, e.g. from  $2^l$  previous values in  $l$  table uses per symbol.

Second parallel optimization direction is varying models accordingly to local statistics. Briefly mentioned standard way is adaptation to include non-stationarity. Genetic data often has characteristic situation: of large number of reads treated as independent, what suggests using various models for different reads. While reads are too short for storing entire models, we can use philosophy of clustering - finding a few optimized models (cluster centroids), and choosing one of them e.g. with a few bits written in header of read.

The proposed approaches are inexpensive from decoder and encoder side to directly apply. However, their optimization for

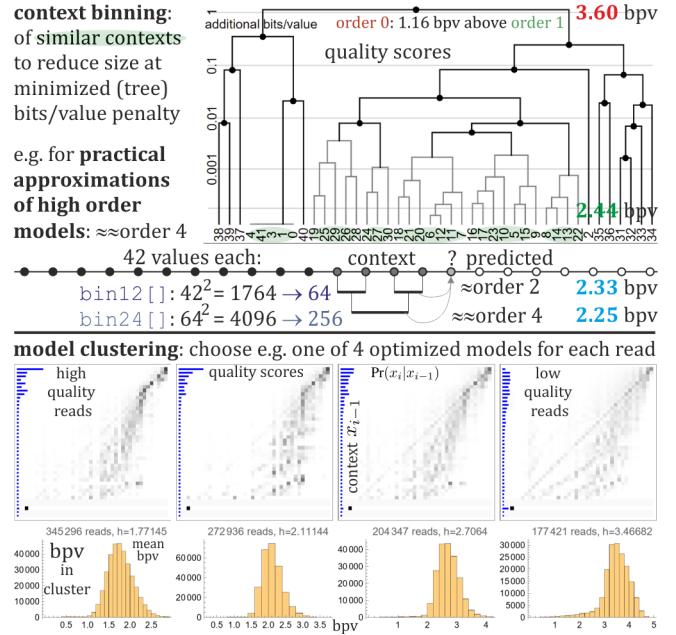


Figure 1. Two main approaches proposed in this article. **Top:** context binning automatically merging subsets of contexts into a smaller number of states `context  $\rightarrow$  state=bin[context]` determining probability distribution for the currently processed symbol. It is optimized to minimize bits/value distance from complete model distinguishing all contexts, and can allow e.g. for inexpensive approximations of high order models. **Bottom:** Model clustering - different e.g. reads can have slightly different statistics, suggesting to allow to choose one of e.g. 4 shown order 1 models (as cluster centroids), optimized with k-means clustering applied to space of models. We can e.g. see separate treatment of low and high quality reads.

actual data might be more costly - for example it could be done once e.g. for each sequencer model (like Illumina HiSeq 2000), and then used as default.

Diagrams in this article contain analysis based on publicly available data - mainly first 1 million reads (all of 101 length) from FASTQ file ERR174310 (Whole Genome Sequencing of human, Illumina HiSeq 2000) downloaded from NCBI database<sup>1</sup>. Additionally, for long subsequent base sequence, nonstationarity analysis was made for human Chromosome 1 using FASTA file from ensembl.org webpage<sup>2</sup>.

## II. CONTEXT BINNING

We would like to compress  $\{x_i\}_{i=1..N}$  sequence from size  $|\mathcal{A}| = m$  alphabet ( $x_i \in \mathcal{A}$ ), e.g.  $m = 4$  for ATCG nucleotides,  $m \sim 40$  quality scores, or some grouped symbols e.g.  $m \sim$

<sup>1</sup><https://www.ncbi.nlm.nih.gov/sra/ERR174310>

<sup>2</sup>[http://ftp.ensembl.org/pub/release-105/fasta/homo\\_sapiens/dna/](http://ftp.ensembl.org/pub/release-105/fasta/homo_sapiens/dna/)

$4 \cdot 40 = 160$  for (nucleotide, its quality score) grouped to include their statistical dependencies ( $(q_{\text{score}} \ll 2) | \text{base}$ ).

Popular natural approach is encoding symbol-by-symbol, predicting conditional distribution of the next symbol based on the previous ones:  $\Pr(x_i | x_{i-1} \dots x_1)$  and maybe some additional contexts like position. Assuming accurate entropy coding like Arithmetic Coding (AC) [4] or Asymmetric Numeral Systems (ANS) [5], symbol of probability  $p$  needs asymptotically  $\lg(1/p)$  bits ( $\lg \equiv \log_2$ ). While in prefix codes like Huffman we approximate this  $\lg(1/p)$  with a natural numbers of bits ( $p$  with natural powers of  $1/2$ ), AC/ANS asymptotically include also fractional bits.

Hence we can focus on conditional probability modelling with final evaluation as compression ratio given by:

$$\frac{1}{N} \sum_{i=1}^N \lg(1/\Pr(x_i | x_{i-1} \dots x_1)) \quad \text{bpv (bits/value)} \quad (1)$$

In order  $l$  Markov model we restrict history to  $l$  previous values (with some special treatment of first  $l$  values):  $\Pr(x_i | x_{i-1} \dots x_{i-l})$  for  $x_i \in \mathcal{A}$ ,  $i > l$ . The main difficulty is exponential growth of size of such models: requiring  $m^l$  of size  $m$  probability distributions. We can also add to context more looking relevant information, e.g. in FQZComp [3] there is also encoded position in read, number of quality score.

Let us discuss here automatic merging of multiple such contexts into a smaller number of states providing nearly the same compression ratio at much smaller computational cost.

### A. Direct context binning

Let  $C$  be a set of contexts, e.g.  $C = \mathcal{A}^l$  for order  $l$  model, each defining a probability distribution  $P_c$  for  $c \in C$ ,  $i > l$ :

$$\Pr(x_i | x_{i-1} \dots x_{i-l}) = P_c(x_i) \quad \text{for } c = (x_{i-1}, \dots, x_{i-l}) \quad (2)$$

Taking all  $l + 1$  length windows:

$$W = (x_i, x_{i-1}, \dots, x_{i-l})_{i=l+1..N}$$

$$\text{denote } [0, 1] \ni p_c = |\{w \in W : w_{2..l+1} = c\}|/|W|$$

as probability of context  $c$  ( $\sum_{c \in C} p_c = 1$ ),

$$P_c(X) = \frac{1}{|W| p_c} |\{w \in W : w_1 = x, w_{2..l+1} = c\}|$$

as probability distribution for new symbol after this context ( $\sum_{x \in \mathcal{A}} P_c(x) = 1$ ). Empty contexts  $p_c = 0$  can be handled e.g. by adding some tiny  $\epsilon > 0$  to joint distribution on  $W$ .

Now the optimized rate in bits/symbol can be written as

$$R = \sum_{c \in C} p_c H(P_c) \quad \text{bpv (bits/value)} \quad (3)$$

$$\text{for } H(P) = - \sum_{x \in \mathcal{A}} P(x) \lg(P(x))$$

being Shannon entropy after context  $c$  of probability  $p_c$ .

As context binning, we would like to merge similar contexts - replace  $C$  set of contexts with  $\bar{C}$  set of disjoint subsets of  $C = \bigsqcup_{s \in \bar{C}} s$ .

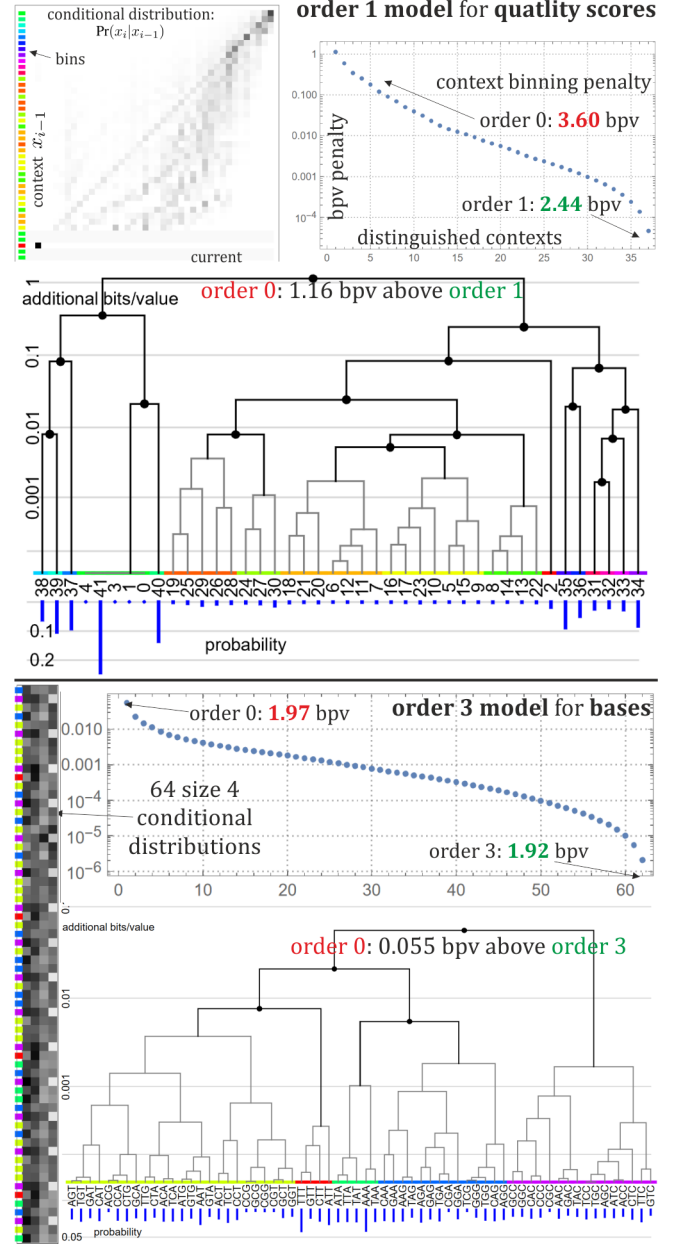


Figure 2. Context binning for order 1 model for quality scores (top) and order 3 for bases (bottom). Distinguishing all previous 42 values (64 for bases) we need 2.44 bpv (1.97 for bases) - using presented conditional distributions. Completely neglecting this context we need 1.16 bpv more: 3.60 bpv (0.055, 1.92 for bases). The top plots and trees show optimized intermediate options: starting with singletons we merge subsets of contexts leading to the smallest bpv penalty constructing the tree, then merge leaves of its subtrees into smaller contexts. Presented context binning into 17 (5 for bases, marked with colors) states was chosen not to exceed 0.01 bpv from complete context models.

Having two disjoint subsets of contexts  $s, r \subset C$ ,  $s \cap r = \emptyset$ , probability of their union and bits/value cost of their merging are:

$$p_{s \cup r} = p_s + p_r \quad P_{s \cup r} = \frac{p_s P_s + p_r P_r}{p_s + p_r}$$

$$\Delta_{s,r} = (p_s + p_r) H(P_{s \cup r}) - p_s H(P_s) - p_r H(P_r) \quad (4)$$

For optimization of such division, we can start with subsets as singletons  $s = \{c\}$  for  $c \in C$ , with  $p_s = p_c$ ,  $P_s = P_c$ . Then try to merge them in a way minimizing cost (4) as increase of

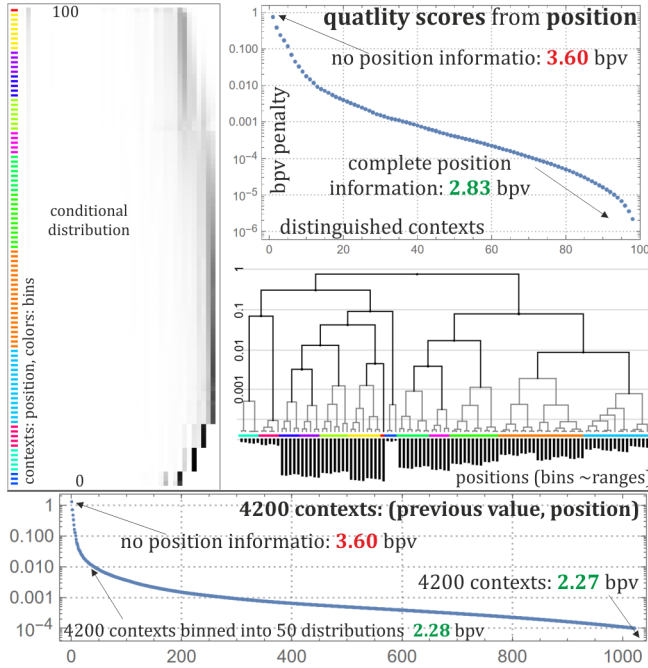


Figure 3. Using position as additional information (used by FQZComp [3]). In our case (ERR174310) it is easy to directly include as all reads have the same length (101), and we can see that indeed probability distributions strongly vary with positions here (top left). There is shown binning not to exceed 0.01 bpv penalty: in tree and colors on the left - as we could expected, the found bins turned out being ranges of positions. Bottom: combining with Markov model, using also previous value as context. We could also further nest with other contexts e.g. values in earlier positions.

bits/symbol rate for not recognizing these two subsets of contexts - e.g. in greedy way as in used here Algorithm 1.

#### Algorithm 1 Greedy search for context binning

```

nodes = {{c} : c ∈ C}           {start with leafs as singletons}
available = {True, ..., True} of length |C|   {not used yet}
initialize HEAP: insert with PUSH, POP retrieves lowest cost new node
for c ≠ c' ∈ C do
  PUSH((Δ, {c}, {c'})) using (4) cost of {c}, {c'} → {c, c'} merge
end for
for i = 1 to |C| - 1 do
  {cur.left, right} = POP           {retrieve lowest cost node candidate}
  while left or right not available do
    {cur.left, right} = POP           {skip already merged nodes}
  end while
  mark left and right as not available
  append True to available
  append cur to nodes, link left, right as its children in tree
  for all available node do
    PUSH((Δ, cur, node)) using (4) to calculate merging cost Δ
  end for
end for

```

This way we get tree of subsets of  $C$  as in example in Fig. 2, 3 - we can choose the actual context binning e.g. by starting with the root, and extending with the lowest cost neighboring nodes until reaching some threshold e.g. the number of binned contexts, total bpv distance from using entire context, bpv cost of adding new node, etc.

As there is freedom of bin enumeration, we can e.g. optimize it to be able to get denser and sparser binning from single table use: as `bin[]` and e.g. `bin[] >> 3`, this way merging 8 smaller bins into larger ones. To optimize it, we can start with finding larger number of bins. Then starting with these bins as contexts,

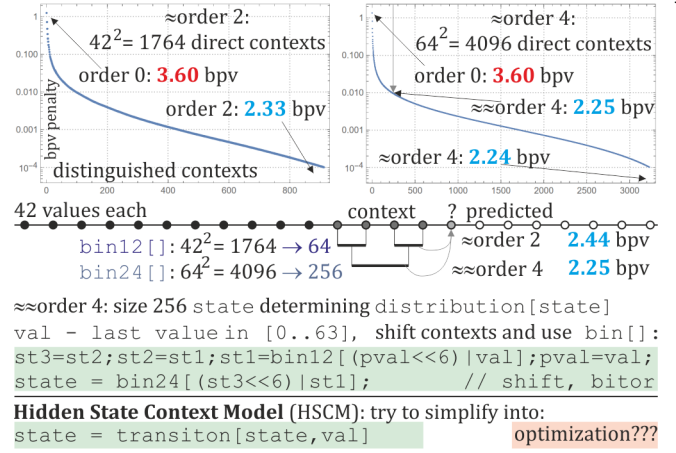


Figure 4. Nested context binning for approximation of high order models (for quality scores), e.g. order 2 with 1 table use per symbol, order 4 with 2 table uses, order 8 with 3 and so on. For example `bin12[]` here extracts crucial information from 2 neighboring values as one of 64 states, then `bin24[]` groups them further into approximated representation of order 4 context as one of 256 states - to be used to choose probability distribution for entropy coding of the current value, e.g. as modification of fast order 1 rANS. It is tempting to try to simplify this approach into single table use (HSCM), however, its optimization seems costly.

optimize for smaller number of bins - finally grouping e.g. 8 small into 1 large.

#### B. Nested context binning

Above direct context binning allows e.g. to approximately represent 2 or a few previous values with a more reasonable number of states, also combine with other contexts like positions in Fig. 3. We can e.g. modify fast order 1 rANS implementation<sup>3</sup> by adding single table use to get more valuable e.g. 1 byte context. E.g. for order 2 as `state=bin12[(pval<<6)|val]` for `pval = xi-2`, `val = xi-1`.

We can also combine multiple binnings e.g. to get approximated higher order models. Like in Fig. 4 for order 4 model: using  $\Pr(x_i | x_{i-1}, x_{i-2}, x_{i-3}, x_{i-4})$  we can first perform binning of pairs of values using `bin12[]`, then use second binning to group representations of both pair using `bin24[]`. This way we use two approximations reducing the original context size  $42^4 = 3111696$  into more reasonable e.g. 256 number of states (convenient 1 byte) determining probability distribution for  $x_i$ .

This is the simplest, least expensive way (symmetric) to combine context binnings. In practice contributions of further contexts is usually weakening - suggesting to use smaller numbers of bins for them (asymmetric) or even depending on nearer bins (hierarchical), e.g. to allow for larger orders:

- 1) Symmetric: use identical context binning for all windows of given size (as discussed) e.g. 2 and 4 in Fig. 4, what is the least expensive (reusing previous binnings): e.g.  $2^l$  order for  $l$  table uses per symbol.
- 2) Asymmetric: use separate context binnings for windows of various distance from current position - the further, the stronger reduction, e.g. `bin12near[xi-1, xi-2]` into 64 bins and `bin12far[xi-3, xi-4]` into 8 bins. To maintain the speed, the latter can be obtained

<sup>3</sup>[https://github.com/jkbonfield/rans\\_static](https://github.com/jkbonfield/rans_static)

by cutting bits from already calculated former e.g. `bin12far[]=bin12near[]>>3`, what can be optimized by bin enumeration. For example we first find large binning for near values using  $\Pr(x_i|x_{i-1}, x_{i-2})$  distribution, then on these bins perform second binning based on  $\Pr(x_i|x_{i-3}, x_{i-4})$  evaluation, finally grouping e.g. 8 small into 1 large.

- 3) Hierarchical: build tree of contexts - binning of further values depending on current nearer values, e.g. `bin12far[]` depending also on outcome of `bin12near[]` - what seems more appropriate from statistics perspective, but has much higher cost. To construct it, after building tree for near, restrict windows  $W$  to subsets corresponding to each bin, then build separate tree for each, and so on until e.g. some cost threshold.

### C. Hidden state context models (HSCM)

Figure 4 also mentions HSCM approach for state  $s_i$  determining  $\Pr(x_i = x|s_i = s)$ , to reduce the number of table uses per symbol e.g. to single transition function  $s_i = t(s_{i-1}, x_{i-1})$  (maybe with included additional contexts): `state=transition[state, val]`. This way also allowing to include very high order behavior, for example use this state to count numbers of subsequent appearances to get advantages of RLE (run-length encoding).

However, optimization of such HSCM seems very difficult due to very strong dependence of state sequence on transition function. We could try to do it (semi-)manually for given type of data, e.g. for popular symbols often appearing together (as RLE) directly define e.g. size 10 subsets of states: saying there was 1..9 or "10 or more" subsequent appearances of this symbol. Or counting numbers of changes of quality scores like in FQZComp delta [3].

For automatic optimization it seems useful to transform it into continuous optimization first: of probability distributions of states after transition  $t$  (probabilistic instead of deterministic) - allowing to use gradient optimization methods. For example using softmax parametrisation  $t, d$  of distributions:

$$(T_x)_{rs} := \Pr(s_i = s | s_{i-1} = r, x_{i-1} = x) = \exp(t_{srx})$$

$$\Pr(x_i = x | s_i = s) = \exp(d_{xs})$$

$$\text{satisfying: } \forall_{rx} \sum_s \exp(t_{srx}) = 1 \quad \forall_s \sum_x \exp(d_{xs}) = 1$$

$$(P_i)_s := \Pr(s_i = s) \quad P_{i+1} = P_i \cdot T_{x_i}$$

$$\arg \max_{td} F \quad \text{for } F = \sum_{si} (P_i)_s \ln(\Pr(x_i | s_i)) = \sum_i P_i \cdot d_{x_i} \quad (5)$$

being minus expected number of nits, here also to be summed over reads. Starting states can be chosen fixed  $P_1 = (1, 0, \dots, 0)$ , initial distributions as uniform ( $t, d = \text{const}$ ).

To get deterministic transitions ( $t_{srx} \in \{0, 1\}$ ), we can try greedy approach: after optimizing (5), find maximal transition probability, then fix it to deterministic transition  $t_{srx} = 1$ ,  $\forall_{s' \neq s} t_{s'rx} = 0$ . And so on: interleaving continuous optimization (5) with already fixed transitions, and fixing the highest probability transition, until all  $t$  are deterministic.

In FQZComp [3] context contains also delta roughly describing the number of changes of quality score - through manual optimization. With context binning, HSCM we could try to optimize it based on the data.

Anyway, this is promising direction with various optimization opportunities for both speed and compression ratio, which better understanding and optimizations require further research. Discussed model reduction should also help with overfitting, providing more universal, interchangeable models.

## III. VARYING MODELS

The second discussed optimization direction is varying of models ( $M$ , of various types) - trying to better adapt to local statistics. Standard briefly mentioned here direction is adaptivity: using evolving models:  $M_i$  for position  $i$ , with transition  $M_i \xrightarrow{x_i} M_{i+1}$  based on processed symbol  $x_i$ .

As in Fig. 5 and 6, here we will focus on proposed model clustering: optimizing some relatively small set of models  $\{M_j\}_{j=1..k}$  (as centroids of clusters) and switching between them, e.g. for each "read" - writing in its header which of  $k$  models to use (or maybe using some more complex switching mechanism).

### A. Model clustering

Sequencing data usually contains large number of reads - of lengths from dozens to thousands of nucleotides (depending on technique). The reads are supposed to be finally aligned, what would e.g. allow to encode differences from such aligned consensus sequence - allowing for large compression ratio improvements (at least for bases).

Here let us assume we have just a set of reads as in standard FASTA/FASTQ file - treated independently. As there is usually freedom of read order, we could save  $\lg(\text{number of reads})!$  bits e.g. by storing some information in their order. Each of these reads correspond to some local situation - might have different statistics.

The standard approach is using the same statistical model for each read, here it is proposed to group them into a few clusters of similar statistics and e.g. inform in each header which of these models to use. Encoder tests all and chooses the best one, decoder reads which should be used and decodes using it.

Algorithm 2 contains abstract pseudocode for standard k-means clustering algorithm [6] adopted for this application: loop interlacing assignment of all reads to the closest centroid (best model here), and optimizing centroid (model here) for all members of its current cluster, until some convergence condition.

---

#### Algorithm 2 k-means clustering of models

---

```

Initialize: choose random  $k$  reads, calculate  $M_j$  model for  $j$ -th of them
while convergence condition e.g. change below some threshold do
  for each read do
    calculate cost in bits for using each of  $k$  models for this read
    find minimal cost:  $j$ -th model, assign this read to  $R_j \subset R$  subset
  end for
  for each subset  $R_j$  do
    calculate  $M_j =$  model optimized for  $R_j$  subset of reads
  end for
end while

```

---

It interleaves evaluation of models (assigning to the best ones), and optimizing models for subsets of assigned e.g. reads

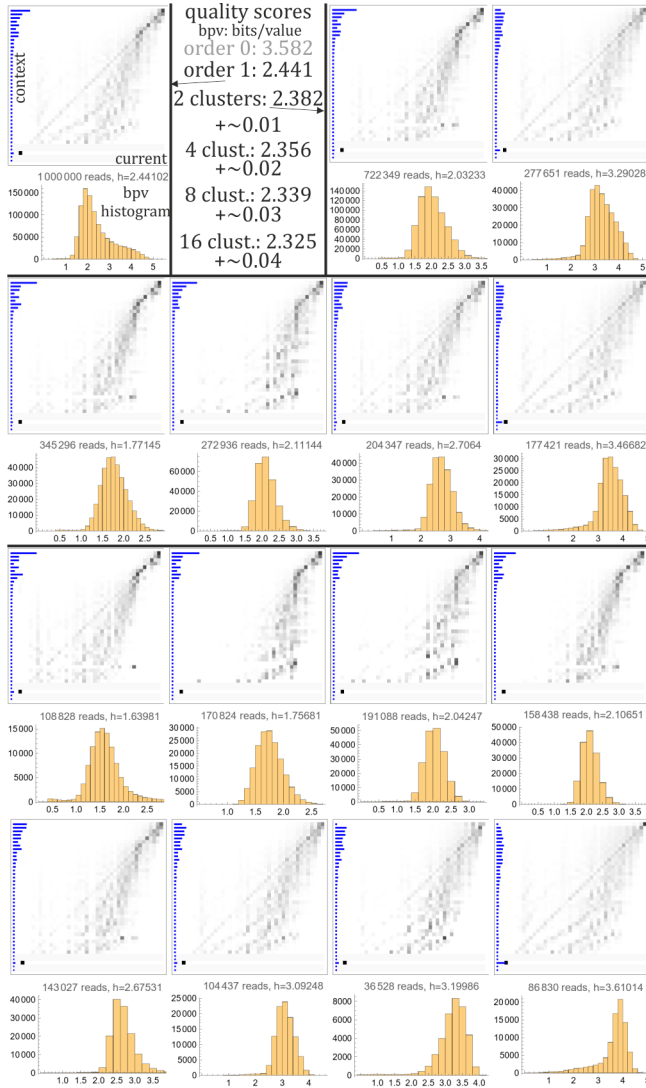


Figure 5. Model clustering of order 1 models for quality scores based on first 1 million reads of length 101 of ERR174310 - diagrams with context probabilities (blue bars), conditional distributions and bits/value histograms for 1,2,4,8 clusters found with k-means clustering, with numbers of reads for which given model leads to the smallest number of bits/value. We can observe split especially into low and high quality reads. We need to add which-model information in header of each read, which costs  $\lg(k)$  if writing directly, or a bit more if using entropy coder, leading to  $\approx 0.01 - 0.04$  additional bpv.

(preferably by some merging) - as being quite general, it can be applied also to very complex models.

For example we can fix set of distinguished contexts  $C$  e.g. as  $l$  previous values in order  $l$  model (order 1 in Fig. 5, 6), or its reduced size binned version from the previous section. Then for each read calculate conditional (or joint) distributions ( $p_c, P_c$ ), and for subsets of reads take their averages weighted with lengths.

CRAM FQZComp uses 2bit select in context as similar mechanism. Clustering e.g. k-means allows for its automatic optimization, also using 4 separate models should be faster as focusing on smaller tables than single 4x larger model.

### B. Adaptivity for non-stationary sources

More standard approach for varying models is adaptivity. There are very general and powerful machine learning ap-

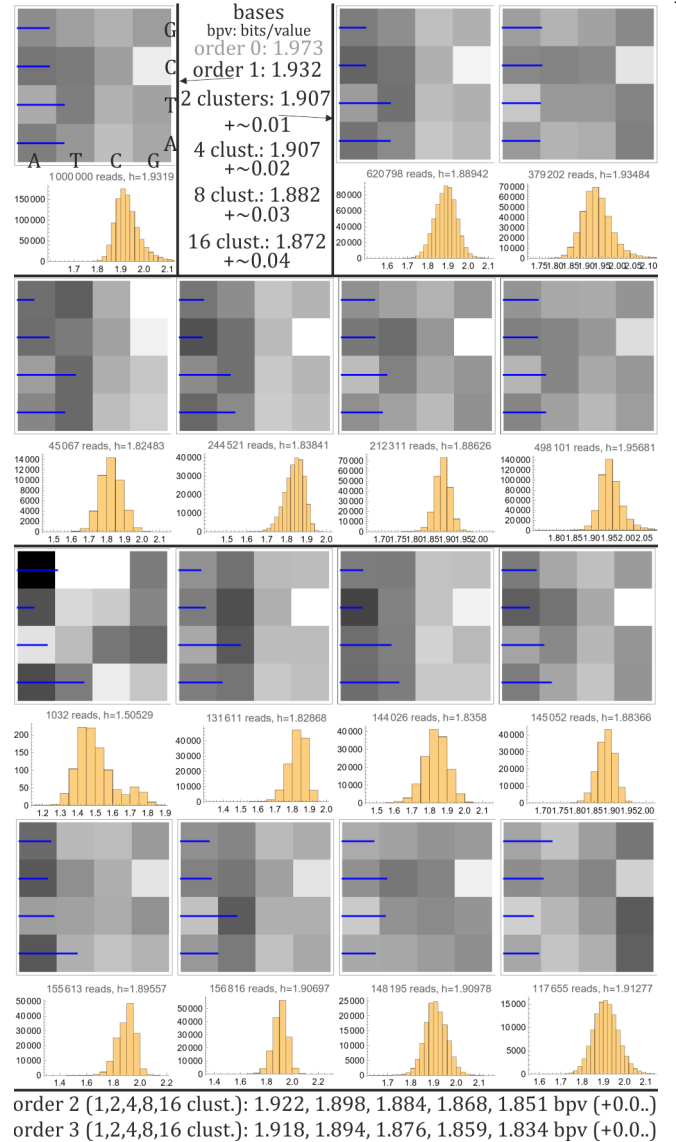


Figure 6. Model clustering of order 1 models for nucleotides (bases) for first 1 million reads of ERR174310. Additional which-model information costs  $\approx 0.01 - 0.04$  bits/value.

proaches like LSTM [7], but they are also extremely expensive - for practical data compression we should try to extract crucial behavior for inexpensive models. The basic approach is replacing averaging like  $v = \text{mean}(f(x_i))$ , with "evolving averaging" - exponential moving average (EMA):

$$v_{i+1} = \eta v_i + (1 - \eta) f(x_i) \rightarrow (1 - \eta) \sum_{d \geq 0} \eta^d f(x_{i-d}) \quad (6)$$

There is a difficult question of choosing this  $0 < \eta < 1$  forgetting rate (usually  $> 0.9$ ), intuitively describing memory length of the system:  $\propto \eta^d$  contribution of  $d$  values before. We can translate it to half-life: contributions in distance  $\mu = -1/\lg(\eta)$  weakens twice:  $\eta^\mu = 1/2$ . Top of Fig. 7 shows behavior of such optimized half-lives along human chromosome 1: it is usually  $\approx 200$ , but also with regions of shorter or longer memory.

EMA can be used in various ways, e.g. for evolution of covariance matrix in online-PCA [8] and adaptive linear regression [9], or just of center and scale parameter for general exponential

power distribution  $\rho(x) \sim \exp(-|x|^\kappa)$  family [10].

For genetic data we rather focus on discrete probability distributions, requiring EMA for "evolving frequency count". For this purpose it is convenient to work with cumulative distribution function (CDF):  $CDF_i = \sum_{j < i} \Pr(i)$ . It for example allows for started in 2015 in LZNA compressor<sup>4</sup> popular very fast SIMD implementations of adaptive rANS for up to size 16 alphabet:

$$CDF + = (\text{mixCDF} - CDF) \gg \text{rate} \quad (7)$$

where rate corresponds to  $-\lg(1 - \eta)$ , the mixCDF is CDF of recently processed block of symbols - such update literally shifts old distribution toward the new distribution.

In practice such update of entire probability distribution is usually used every symbol - what allows to be close to local (past) distribution, but is costly - it is worth to consider also sparser updates e.g. every 100 symbols, also allowing to practically update more complex models.

While the above is adaptive order 0 model, we can easily expand it into context adaptive models, e.g. higher order like in bottom of Fig. 7. For example maintaining separate  $CDF_c$  for each considered context  $c \in C$  (e.g.  $l$ -previous, binned, hidden, etc.), for each processed symbol there is recognized context  $c \in C$ , used  $CDF_c$  probability distribution, which is later updated:

$$CDF_c + = (\text{mixCDF}_c - CDF_c) \gg \text{rate} \quad (8)$$

#### IV. CONCLUSIONS AND FURTHER WORK

There were proposed especially context binning and model clustering approaches - allowing for parallel inexpensive optimizations e.g. of context based models. Additional decoding cost is low (up to a few table uses per symbol). Encoding can also remain inexpensive, especially if restricting to some globally optimized models (e.g. for each model of DNA sequencer).

This is initial version of article to be expanded in the future (also applied in real compressors), for example:

- Bases and quality scores were treated here independently, while in practice they are slightly correlated. To include their statistical dependencies for improving compression ratio, we can e.g. pack both into single value like  $(\text{qscore} \ll 2) | \text{base}$ .
- The reads were treated as independent, while in practice each base usually appears in multiple reads. To include their dependence we can e.g. first perform alignment to find consensus sequence (as looking most probable real sequence based on all the reads), then encode only differences from this consensus. Finally to encode this consensus, we can encode differences from the nearest reference sequence e.g. of humans.
- Mentioned Hidden State Context Model (HSCM) seems a promising development direction - allowing to include also far contexts in very inexpensive way (including advantages of RLE). However, it needs research for practical optimizations, approximations, maybe semi-manual.
- Discussed model clustering switches between a few models - it might be worth to develop mechanisms automatically switching between them based also on processed symbols, e.g. some adaptation with attraction to centroids.

<sup>4</sup><https://fgiesen.wordpress.com/2015/12/21/rans-in-practice/>

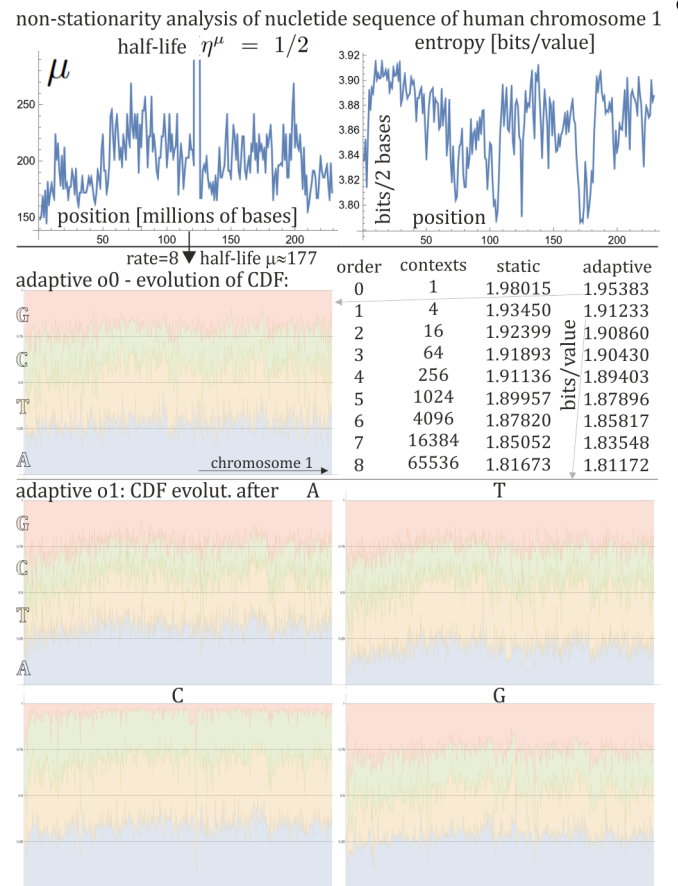


Figure 7. Top: Simple non-stationarity analysis of nucleotide sequence of human chromosome 1. Each block of 1 million bases was treated independently - there was performed search of  $\eta$  forgetting rate of exponential moving average (6) leading to the best agreement: lowest bits/value entropy. There are presented its half-lives  $\mu = -1/\lg(\eta)$  (left), and this lowest entropy per pair of neighboring bases. Bottom: evolution of probabilities (as CDF) for adaptive order 0 and order 1 models - using (8) for  $\text{rate}=8$  ( $\mu \approx 177$ ): applying and updating  $CDF_c$  distribution for the current context  $c$ . There are also written tested bvp for stationary and adaptive models of order 0-8.

#### REFERENCES

- [1] E. A. Ashley, "Towards precision medicine," *Nature Reviews Genetics*, vol. 17, no. 9, pp. 507–522, 2016.
- [2] M. Burrows and D. Wheeler, "A block-sorting lossless data compression algorithm," in *Digital SRC Research Report*. Citeseer, 1994.
- [3] J. K. Bonfield, "Cram 3.1: Advances in the cram file format," *Bioinformatics*, 2022. [Online]. Available: CRAM3.1:AdvancesintheCRAMFileFormat
- [4] J. Rissanen and G. G. Langdon, "Arithmetic coding," *IBM Journal of research and development*, vol. 23, no. 2, pp. 149–162, 1979.
- [5] J. Duda, K. Tahboub, N. J. Gadgil, and E. J. Delp, "The use of asymmetric numeral systems as an accurate replacement for Huffman coding," in *2015 Picture Coding Symposium (PCS)*. IEEE, 2015, pp. 65–69.
- [6] J. MacQueen *et al.*, "Some methods for classification and analysis of multivariate observations," in *Proceedings of the fifth Berkeley symposium on mathematical statistics and probability*, vol. 1, no. 14. Oakland, CA, USA, 1967, pp. 281–297.
- [7] F. A. Gers, N. N. Schraudolph, and J. Schmidhuber, "Learning precise timing with lstm recurrent networks," *Journal of machine learning research*, vol. 3, no. Aug, pp. 115–143, 2002.
- [8] M. K. Warmuth and D. Kuzmin, "Randomized online PCA algorithms with regret bounds that are logarithmic in the dimension," *Journal of Machine Learning Research*, vol. 9, no. Oct, pp. 2287–2320, 2008.
- [9] J. Duda, "Parametric context adaptive Laplace distribution for multimedia compression," *arXiv preprint arXiv:1906.03238*, 2019.
- [10] —, "Adaptive exponential power distribution with moving estimator for nonstationary time series," *arXiv preprint arXiv:2003.02149*, 2020.