

New results on the robust coloring problem

Delia Garijo¹

Alberto Márquez¹

Rafael Robles¹

Abstract

Many variations of the classical graph coloring model have been intensively studied due to their multiple applications; scheduling problems and aircraft assignments, for instance, motivate the *robust coloring problem*. This model gets to capture natural constraints of those optimization problems by combining the information provided by two colorings: a vertex coloring of a graph and the induced edge coloring on a subgraph of its complement; the goal is to minimize, among all proper colorings of the graph for a fixed number of colors, the number of edges in the subgraph with the endpoints of the same color. The study of the robust coloring model has been focused on the search for heuristics due to its NP-hard character when using at least three colors, but little progress has been made in other directions. We present a new approach on the problem obtaining the first collection of non heuristic results for general graphs; among them, we prove that robust coloring is the model that better approaches the partition of any system into equal or almost equal conflict-free subsystem, relating strongly this model with the well-known equitable colorings. We also show the NP-completeness of their decision problems for the unsolved case of two colors, obtain bounds on the associated robust coloring parameter, and solve a conjecture on paths that illustrates the complexity of studying this coloring model.

Keywords: Graph theory; Discrete optimization; Graph coloring

1 Introduction

Coloring problems deal with partitioning the objects of a graph into classes according to different criteria, and appear in many areas with seemingly no connection with coloring: time tabling and scheduling [3, 13, 24, 25], frequency assignment [6, 12, 20], register allocation [4], printed circuit board testing [11], pattern matching [18] or analysis of biological and archeological data [2]; see also [19] for descriptions of the first four mentioned applications.

The classical coloring problem uses proper colorings: a *k-proper coloring* is an assignment of k colors to the vertices of a graph so that no edge has both endpoints of the same color. This is an NP-hard problem for three or more colors (and polynomial for two colors), which has received a large attention in the literature, not only for its real world applications as indicated above, but also for its theoretical aspects and computational difficulty; see, for instance [5, 10].

Among the other different criteria that have been considered in coloring problems highlights that of being *equitable*, that is, partitioning the vertex set of a graph into equal or almost equal subsets. Formally, a graph is *equitable k-colorable* if it admits a k -proper coloring such that the cardinalities of any two color classes differ by at most one.

¹Dpto. Matemática Aplicada I, Universidad de Sevilla, Spain. Emails: {dgarijo, almar, rafarob}@us.es

Equitable coloring of graphs was first introduced by Meyer [16] for modeling problems in an operations research context, and has since been widely investigated due to its many practical applications in sequencing and scheduling; see for example [8] and the references therein, in particular, [9] for a specific application in scheduling. As explained in [8], this type of coloring models situations in which one desires to split a system into equal or almost equal conflict-free subsystems. However, not every system admits such a division, and other criteria are needed in order to approach as much as possible the equitable partition; here arises the *robust coloring problem* (RCP, for short) that can be stated as follows:

Let $G = (V(G), E(G))$ be an unweighted and simple graph with chromatic number $\chi(G)$. Given a subgraph H of its complement graph \overline{G} and a positive integer $k \geq \chi(G)$, find a k -proper coloring ϕ of G that minimizes, over all those k -proper colorings, the number of monochromatic edges ² in the induced coloring on H . We say that ϕ is a *k -robust coloring of (G, H)* , and $m(G, H, k)$ is such minimum.

We want to stress that the original statement of the problem introduced in [21] considers H to be a weighted graph, and the goal is to minimize the sum of the weights of the monochromatic edges. Our statement establishes all edge weights in H to be 1, as both versions are equivalent for most of the questions addressed in this work, and for those that are not, our arguments can be adapted. We will be more precise on this issue in each of the sections below, once the different problems that we approach have been described in detail.

Applications of robust coloring are summarized in [14, 21]; among them highlight applications to timetabling and scheduling problems, geographical maps, and aircraft assignment. For example, the aircraft assignment problem can be modeled as a graph coloring problem where each vertex in the graph G represents a flight route and each color represents one aircraft. There is an edge between two vertices if an aircraft cannot serve the two flight routes represented by the two vertices. If flight delays, which occur very often, are taken into account, the overlap relationship between flight routes changes, and this information is captured by the edges of a new graph H . The monochromatic edges of H represent canceled flights, and the goal is to minimize the number of flights that must be canceled when there are k aircrafts.

Related work. As it was mentioned before, the RCP was introduced in [21], where the authors also describe several applications of this coloring model, and conclude that the decision problem is NP-complete for $k \geq 3$ (which is a consequence of the NP-completeness of the classical graph coloring problem). They also present a binary programming model and outline a genetic algorithm. Due to their complexity result, most papers in the topic search for heuristics. In [23] the authors develop several meta-heuristics to solve the RCP including genetic algorithm, simulated annealing and tabu search. A column generation based solution method is presented in [22]. A study on the robust aircraft assignment is developed in [14]; the authors propose new techniques for an approximate solution of the problem, such as the partition based encoding and several meta-heuristics (local search, simulated annealing, tabu search and hybrid method). Other references in this direction are [1, 7]. Almost no progress has been made in other directions: we can only refer the reader to [15] for a theoretical study

²*Monochromatic* edges are those whose endpoints have the same color; otherwise the edges are called *bichromatic*.

on the RCP but for the specific case of paths; the authors analyze some algorithms, obtain bounds and pose several conjectures.

Our results. We present a new approach to the RCP for general graphs. In Section 2, we first study the connection between the equitable colorings and the robust colorings. As not every graph admits an equitable coloring, we prove that robust coloring is the model that better approaches the equitable partition, and any equitable coloring can be seen as a robust coloring, if it exists. The NP-complete nature of both decision problems is then established in Section 2.1 for the unsolved case of $k = 2$. Section 2.2 focuses on the modifications required by the greedy algorithm for classical graph coloring in order to guarantee an optimal solution (for some vertex ordering) when dealing with robust colorings and equitable colorings. We introduce the *robust-greedy algorithm* as the variation satisfying that property. This algorithm is fundamental in Section 3, where we first obtain an upper bound on $m(G, H, k)$ for arbitrary graphs G and subgraphs H , and then for graphs defined as α -greedy orientable (this includes trees, some series-parallel graphs and bipartite outerplanar graphs). In Section 4, we prove in the affirmative a conjecture posed by López-Bracho et al. [15] on $m(G, H, 3)$ for G and H being two paths on the same set of vertices, and extend the result to H being a vertex-disjoint union of paths. We believe that besides its own interest, the seemingly simple setting of that conjecture illustrates the complexity of dealing with robust colorings.

Throughout this paper, we assume $k < \min\{|V(G)|, \chi(G)\chi(H)\}$; otherwise it is clear that $m(G, H, k) = 0$. In addition, for short, we will omit the term proper and simply say coloring when no confusion may arise.

2 Equitable colorings as robust colorings

When a graph G has an equitable coloring, one obtains a uniform distribution of colors on the vertices, and the question is whether this decreases the number of monochromatic edges in a subgraph H of \overline{G} , but this question can not be answered for an arbitrary H as the answer would completely depend on its structure. Thus, it makes sense to study the relation between equitable colorings and robust colorings when H is the whole \overline{G} . In this section, we go further obtaining more general results by setting H as the induced subgraph in \overline{G} by a subset of vertices $S \subseteq V(G)$. We denote this graph as $\overline{G}[S]$.

Note that $H = \overline{G}$ is obtained for $S = V(G)$. Observe also that equitable colorings are defined for unweighted graphs, and so the content of this section uses in a natural way our statement of the RCP instead of the one given in [21].

Let $S \subseteq V(G)$, and consider the color classes C_1, \dots, C_k that partition $V(G)$ by a k -coloring ϕ of G . We associate a partition $P_\phi = (n_1, \dots, n_k)$ to the coloring ϕ , where $n_i = |C_i \cap S|$, and say that ϕ is *equitable over S* if P_ϕ satisfies that $|n_i - n_j| \leq 1$ for $1 \leq i, j \leq k$; with some abuse of the language, we may indistinctly say that S *admits* an equitable k -coloring.

Each pair of vertices of S in the same color class C_i determines a monochromatic edge in the induced edge coloring of $\overline{G}[S]$, and so the number of monochromatic edges induced by the partition P_ϕ in $\overline{G}[S]$, denoted by $m(P_\phi)$, is clearly

$$m(P_\phi) = \sum_{i=1}^k \binom{n_i}{2}, \tag{1}$$

which can be rewritten as

$$m(P_\phi) = \frac{1}{2} \sum_{i=1}^k (n_i^2 - n_i) = \frac{1}{2} \sum_{i=1}^k \left(\left(n_i - \frac{1}{2} \right)^2 - \frac{1}{4} \right) = -\frac{k}{8} + \frac{1}{2} d^2(P_\phi, Q),$$

where $d(P_\phi, Q)$ is the Euclidean distance between the point P_ϕ and the point $Q = (\frac{1}{2}, \dots, \frac{1}{2})$ in a k -dimensional space. Thus, $m(P_\phi)$ is minimum over all k -colorings ϕ of G if and only if $d(P_\phi, Q)$ is minimum. Hence, minimizing the number of monochromatic edges in the induced coloring of $\overline{G}[S]$ is equivalent to finding the point P_ϕ in the hyperplane $n_1 + n_2 + \dots + n_k = |S|$ that minimizes the distance to Q . Further, $d(P_\phi, Q)$ is minimum if and only if $d(P_\phi, P_{|S|,k})$ is minimum, where $P_{|S|,k} = (\frac{|S|}{k}, \dots, \frac{|S|}{k})$ is the orthogonal projection of Q onto that hyperplane.

Observe that $P_{|S|,k}$ represents the ideal uniform distribution into the k color classes. This distribution may not exist ($|S|$ might not even be divisible by k) but we have shown that the k -robust coloring is the closest to it under the Euclidean metric; this is the content of the following proposition.

Proposition 2.1. *A k -coloring ϕ of a graph G is a k -robust coloring of $(G, \overline{G}[S])$ if and only if $d(P_\phi, P_{|S|,k})$ is minimum over all k -colorings of G .*

Consider now a k -robust coloring ϕ of $(G, \overline{G}[S])$ and the partition $P_\phi = (n_1, \dots, n_k)$. Suppose that $n_i < n_j$ for some $1 \leq i, j \leq k$, and let $P = (n_1, \dots, n_i + 1, \dots, n_j - 1, \dots, n_k)$; this is a k -partition of $|S|$ that is not necessarily associated to a k -coloring but, with some abuse of notation, we set $m(P)$ as:

$$m(P) = \binom{n_i + 1}{2} + \binom{n_j - 1}{2} + \sum_{\ell \neq i, j} \binom{n_\ell}{2}.$$

By equation (1), $m(P_\phi) - m(P) = n_j - n_i - 1 \geq 0$ which implies that $m(P_\phi) \geq m(P)$. Therefore, any partition of $|S|$ satisfying that any two of its elements differ in at most one unit is a minimum of the function $m(\cdot)$ over all k -partitions of $|S|$. Thus, we have proved the following proposition, where we also give the minimum value of the function $m(\cdot)$, which is straightforward.

Proposition 2.2. *For every $k \geq \chi(G)$ it holds that:*

$$m(G, \overline{G}[S], k) \geq (k - r) \binom{s}{2} + r \binom{s + 1}{2},$$

where $s = \lfloor \frac{|S|}{k} \rfloor$ and $r = |S| - sk$. Moreover, the bound is tight if and only if S admits an equitable k -coloring.

The preceding lower bound is the number of monochromatic edges in the induced edge coloring of $\overline{G}[S]$ by an equitable k -coloring over S , if it exists. Thus, we obtain the following characterization.

Theorem 2.1. *Let $S \subseteq V(G)$ be a subset of vertices that admits an equitable k -coloring. Then, a k -coloring ϕ of G is equitable over S if and only if ϕ is a k -robust coloring of $(G, \overline{G}[S])$.*

For the case $S = V(G)$ and graphs that admit equitable colorings, Theorem 2.1 establishes that a k -coloring of G is equitable if and only if it is a k -robust coloring of (G, \overline{G}) ; this particular case can be deduced from [21, Proposition 3.1].

Remark 2.1. The argument to prove Proposition 2.2 can be used to obtain robust colorings of $(G, \overline{G}[S])$ when the graph G does not admit equitable colorings, since otherwise it may be easier to apply Theorem 2.1 to obtain them (as done for the graph in Figure 1). For example, the wheel graph W_9 with 9 vertices has no equitable colorings as there is always a color class of cardinality 1 (determined by the center vertex). For $k = 4$, we know, by the above mentioned argument, that the partition $(1, 1, 3, 3)$ can not be associated to a 4-coloring of W_9 that is a 4-robust coloring of (W_9, \overline{W}_9) , but $(1, 2, 2, 3)$ does.

2.1 Complexity results

We now turn our attention to the complexity of equitable colorings and robust colorings. As explained in [8], the problem of deciding whether a general graph has an equitable k -coloring with a given number of colors $k \geq 3$ is NP-complete. This is obtained by a straightforward reduction from graph coloring to equitable coloring by adding sufficiently many isolated vertices to the graph. It is worth noting here that the classical graph coloring decision problem is NP-complete for $k \geq 3$ colors, but polynomial for $k = 2$, see [10]. We next prove that the decision problem for equitable coloring is NP-complete even for $k = 2$.

Theorem 2.2. *To decide whether an arbitrary graph has an equitable 2-coloring is an NP-complete problem.*

Proof. Clearly the problem is in NP as one can check in polynomial time whether the cardinalities of any two color classes of a 2-coloring of a given graph differ in at most one unit. Consider now the following NP-complete problem, see [10, Section A3.2]:

PARTITION (SETS WITH EQUAL CARDINALITY)

INSTANCE: Finite set A with even cardinality and a size $s(a) \in \mathbb{Z}^+$ for each $a \in A$.

QUESTION: Is there a partition of A into two subsets A_1 and A_2 such that $|A_1| = |A_2|$ and $\sum_{a \in A_1} s(a) = \sum_{a \in A_2} s(a)$?

We next reduce PARTITION to our decision problem, thus proving the result. Let A be an instance of PARTITION. Assign a new size $s(a) + d$ to each $a \in A$, where $d = 2 + \sum_{a \in A} s(a)$. Let G be the graph consisting of $|A|$ stars $K_{1, s(a)+d}$, each associated to an element $a \in A$.

A 2-coloring of G splits A into two subsets, A_1 and A_2 , depending on the color that has the center vertex of the corresponding associated star. Since $|A|$ is even, the 2-coloring is equitable if and only if the two color classes have equal size, that is:

$$|A_1| + \sum_{a \in A_2} s(a) + |A_2|d = |A_2| + \sum_{a \in A_1} s(a) + |A_1|d. \quad (2)$$

Hence,

$$\left| |A_1| - |A_2| \right| = \frac{\left| \sum_{a \in A_2} s(a) - \sum_{a \in A_1} s(a) \right|}{d - 1} \leq \frac{\left| \sum_{a \in A} s(a) \right|}{d - 1} < 1,$$

but, as far as $\left| |A_1| - |A_2| \right|$ is a non-negative integer number, it gives $|A_1| = |A_2|$, and equation (2) yields $\sum_{a \in A_2} s(a) = \sum_{a \in A_1} s(a)$. \square

Now, consider the following problem:

ROBUST-COLORING

INSTANCE: A graph G , a subgraph H of \overline{G} , a positive integer $k \leq |V(G)|$, and an upper bound \overline{m} .

QUESTION: Does a k -coloring of G exist such that $m(G, H, k) \leq \overline{m}$?

Again, a reduction to graph coloring shows the NP-completeness of ROBUST-COLORING for $k \geq 3$ [21, Proposition 3.2], and as a consequence of Theorems 2.1 and 2.2 we prove it for $k = 2$ and every induced subgraph in \overline{G} by any subset of vertices of a graph G .

Corollary 2.1. ROBUST-COLORING is an NP-complete problem for $H = \overline{G}[S]$ and $k = 2$.

Observe that if ROBUST-COLORING is NP-complete for an unweighted H , then it is NP-complete for the same H with edge weights. Therefore, Corollary 2.1 extends to weighted $H = \overline{G}[S]$, encompassing the weighted subgraphs H considered in [21].

2.2 Robust-greedy algorithm

For the classical graph coloring, it is well-known that there always exists a vertex ordering in any graph such that the greedy algorithm gives an optimal proper coloring. However, this is not true neither for robust coloring nor equitable coloring; see Figure 1 for an example. We next introduce a variation of the greedy algorithm, called the *robust-greedy algorithm*, that captures the constraints of the robust colorings providing for some ordering the most equitable partition of the vertex set of any graph. In addition, it will lead, together with the notion of α -greedy orientable graph (defined in Section 3.1), to upper bounds on $m(G, H, k)$ for well-known families of graphs G and arbitrary subgraphs H of \overline{G} .




Figure 1: A graph G that admits 4-equitable colorings (as the one shown), none of which can be obtained by the greedy algorithm with any of the $8!$ possible vertex orderings. By Theorem 2.1, every 4-equitable coloring of G is a 4-robust coloring of (G, \overline{G}) .

As the classical greedy algorithm for graph coloring, the robust-greedy algorithm also processes the vertices of a graph G in a given ordering, and there is an ordered list of available colors. In addition, we must keep track of the number of monochromatic edges on a fixed subgraph H of \overline{G} .

ROBUST-GREEDY ALGORITHM

Each vertex v of G is given a color c of the list with the following properties:

- (a) No neighbour of v in G has assigned color c .
- (b) Among those colors that have already been used at that stage of the process, color c is the first that minimizes the number of monochromatic edges on H with v as an endpoint.

If there is no color satisfying condition (a) among those already used, c will be a new color from the ordered list. The algorithm stops when all vertices of G have been colored.

As we pointed out before, some types of questions on robust coloring cannot be approached for general subgraphs H of \overline{G} since the answer would depend on the structure of H , and it makes then sense to set $H = \overline{G}$. This happens in the following theorem.

Theorem 2.3. *There always exists a vertex ordering of a graph G such that the robust-greedy algorithm provides a k -robust coloring of (G, \overline{G}) .*

Proof. Let C_1, \dots, C_k be the color classes that partition $V(G)$ by a k -robust coloring ϕ of (G, \overline{G}) , and let $n_i = |C_i|$. Assume that the classes are ordered by increasing cardinality. Consider a vertex ordering obtained by choosing a vertex from each class C_i in a cyclic way (in increasing order) until there are no vertices left in any of the classes. This vertex ordering guarantees that the robust-greedy algorithm assigns the same colors as ϕ to the first kn_1 vertices, obtaining k color classes with the same size n_1 . It may happen that the algorithm assigns the same colors as ϕ to the remaining vertices but, if at some later stage, the robust-greedy algorithm assigns to a vertex a different color than that assigned by ϕ , we stop the algorithm and color the remaining vertices with the same colors as ϕ , obtaining a new k -coloring ψ . The associated partitions P_ϕ and P_ψ only differ in one of their elements: roughly speaking, one vertex has changed from a bigger color class to a smaller one. With the argument used to prove Proposition 2.2 in hand, one obtains that $m(P_\phi) \geq m(P_\psi)$. As ϕ is a robust coloring, we conclude that $m(P_\phi) = m(P_\psi)$. For each change of color produced by the robust-greedy algorithm, we can argue as above obtaining a sequence of k -robust colorings of (G, \overline{G}) that lead to the desired k -robust coloring generated by the algorithm. \square

The relationship between equitable colorings and robust colorings established in Theorem 2.1 leads to the analogous of Theorem 2.3 for equitable partitions of vertex sets.

Corollary 2.2. *For every equitable k -colorable graph G , there always exists a vertex ordering such that the robust-greedy algorithm provides an equitable k -coloring of its vertices.*

3 Upper bounds on $m(G, H, k)$ for arbitrary H

In this section we deal with arbitrary subgraphs H of \overline{G} ; to the best of our knowledge, we present here the best upper bounds on $m(G, H, k)$ up to date.³ We begin with a technical lemma, in which we consider two distinct colorings, one of them not necessarily proper. Thus, to avoid any confusion, the word proper will not be omitted in Lemma 3.1 and Theorem 3.1.

Lemma 3.1. *Let $t \geq 2$. For every proper t -coloring of a graph G there exists a t' -coloring of G , with $1 \leq t' \leq t$, that induces at most $|E(G)| \cdot \frac{2(t-t')}{tt'}$ monochromatic edges in G .*

Proof. The result is straightforward for $t' = 1$ as $|E(G)|$ is the number of monochromatic edges induced by any 1-coloring of G and $\frac{2(t-1)}{t} \geq 1$ for $t \geq 2$. If $t' = t$ the result establishes that there are no induced monochromatic edges, which is true for any proper t -coloring of G .

³Our results consider H to be unweighted but our arguments can be easily adapted for multigraphs and graphs with rational edge weights; in the case of real edge weights, we can approximate them (using rational weights) with the desired precision.

Assume now that $1 < t' < t$, and let ϕ be a proper t -coloring of G . Coloring ϕ induces an edge coloring of G according to the colors of the endpoints of the edges, which generates $\binom{t}{2}$ edge color classes. Thus, on average, each of these classes contains $\mu_0 = |E(G)|/\binom{t}{2}$ bichromatic edges.

Consider now a color class with smallest cardinality, say that it corresponds to color ij . We obtain a $(t-1)$ -coloring ϕ' from ϕ by identifying colors i and j . Observe that the number of monochromatic edges induced by ϕ' in G is at most μ_0 . The same argument applies to the coloring ϕ' and the value $\mu_1 = |E(G)|/\binom{t-1}{2}$. Thus, after a reduction of $t - t'$ colors, we obtain a t' -coloring of G and the corresponding values $\mu_0, \mu_1, \dots, \mu_{t-t'+1}$; this coloring induces at most the following number of monochromatic edges:

$$\mu_0 + \mu_1 + \dots + \mu_{t-t'+1} = |E(G)| \cdot \left[\frac{1}{\binom{t}{2}} + \frac{1}{\binom{t-1}{2}} + \dots + \frac{1}{\binom{t-t'+1}{2}} \right] = |E(G)| \cdot \frac{2(t-t')}{tt'}$$

□

With Lemma 3.1 in hand, we obtain an upper bound on $m(G, H, k)$, for general graphs G and arbitrary subgraphs H of \overline{G} , in terms of several parameters: the chromatic numbers of G and H , the number of edges of H , and the value k .

Theorem 3.1. *Let G be a graph with $\chi(G) = p$, and let H be a subgraph of \overline{G} with $\chi(H) = q$. For every $k \geq \max\{p, q\}$ it holds that:*

$$m(G, H, k) \leq \frac{2|E(H)|}{pq} \left[\frac{(p-r)(q-s)}{s} + \frac{r(q-s-1)}{(s+1)} \right],$$

where $s = \left\lfloor \frac{k}{p} \right\rfloor$ and $r = k - ps$.

Proof. Let ϕ be a proper p -coloring of G with color set $\{1, 2, \dots, p\}$. The induced edge coloring of H partitions $E(H)$ into the sets E_b and $E_{m,i}$, $1 \leq i \leq p$, that contain, respectively, the bichromatic edges of H and those monochromatic edges with assigned color i . Assume that the sets $E_{m,i}$ are ordered by increasing cardinality.

Let H_i be the subgraph of H with vertex set $V(G)$ and edge set $E_{m,i}$ (note that this graph might have a number of isolated vertices), and consider a proper q -coloring of H_i , which exists as $\chi(H_i) \leq q$. Since $k < \min\{|V(G)|, pq\}$ then $s < q$. Therefore, by Lemma 3.1, the number of monochromatic edges induced in H_i with $1 \leq i \leq p-r$, by an s -coloring is at most $|E_{m,i}| \cdot \frac{2(q-s)}{qs}$. Analogously, for H_i with $p-r+1 \leq i \leq p$, we obtain at most $|E_{m,i}| \cdot \frac{2(q-s-1)}{q(s+1)}$ monochromatic edges induced by an $(s+1)$ -coloring (note that $s+1 \leq q$). Hence, the total number of monochromatic edges induced in H is at most

$$\frac{2(q-s)}{qs} \sum_{i=1}^{p-r} |E_{m,i}| + \frac{2(q-s-1)}{q(s+1)} \sum_{i=p-r+1}^p |E_{m,i}|,$$

which can be rewritten as

$$\frac{2(q-s-1)}{q(s+1)} \sum_{i=1}^p |E_{m,i}| + \left[\frac{2(q-s)}{qs} - \frac{2(q-s-1)}{q(s+1)} \right] \sum_{i=1}^{p-r} |E_{m,i}|. \quad (3)$$

Let $\mu = \frac{1}{p}(\sum_{i=1}^p |E_{m,i}|)$. As $\frac{2(q-s)}{qs} > \frac{2(q-s-1)}{q(s+1)}$ and $|E_{m,i}| \leq |E_{m,j}|$ for $i \leq j$, expression (3) is at most

$$\frac{2(q-s-1)}{q(s+1)}p\mu + \left[\frac{2(q-s)}{qs} - \frac{2(q-s-1)}{q(s+1)} \right] (p-r)\mu,$$

which is

$$\frac{2\sum_{i=1}^p |E_{m,i}|}{pq} \left[\frac{(p-r)(q-s)}{s} + \frac{r(q-s-1)}{s+1} \right].$$

The result then follows as $\sum_{i=1}^p |E_{m,i}| \leq |E(H)|$. \square

Remark 3.1. For $s = \lfloor \frac{k}{p} \rfloor = 1$, which is the most frequent case (the value of k does not usually double the chromatic number of the graph), the upper bound of Theorem 3.1 is

$$m(G, H, k) \leq \frac{|E(H)|}{p} \left[(p-r) + \frac{r(q-2)}{q} \right].$$

Remark 3.2. The upper bound of Theorem 3.1 (analogously that of Remark 3.1) can be improved for a specific proper p -coloring of G ; it suffices to replace $|E(H)|$ by $\sum_{i=1}^p |E_{m,i}|$.

3.1 α -greedy orientable graphs

We now focus on graphs that satisfy a property called *α -greedy orientable*; among this type of graphs highlight: trees, series-parallel graphs with chromatic number 3, and bipartite outerplanar graphs.

To define that key property, we first fix a vertex ordering in a graph G and consider the induced orientation on its edges, i.e., vertex u is the tail and v is the head of the oriented edge (u, v) if and only if $u < v$ in the ordering. Let \vec{G} be the resulting oriented graph, and let $\Delta^-(\vec{G})$ be its maximum in-degree. Observe that the greedy algorithm applied to our vertex ordering gives a coloring of G with at most $\Delta^-(\vec{G}) + 1$ colors, and so $\chi(G) \leq \Delta^-(\vec{G}) + 1$. We say that graph G is *α -greedy orientable* for $\alpha \geq 0$ if there is an ordering of its vertices such that

$$\Delta^-(\vec{G}) = \chi(G) - 1 + \alpha.$$

Figure 2 illustrates an example.

Our interest is to find vertex orderings whose associated α is the smallest possible value; this will give interesting upper bounds on $m(G, H, k)$ as we show next.

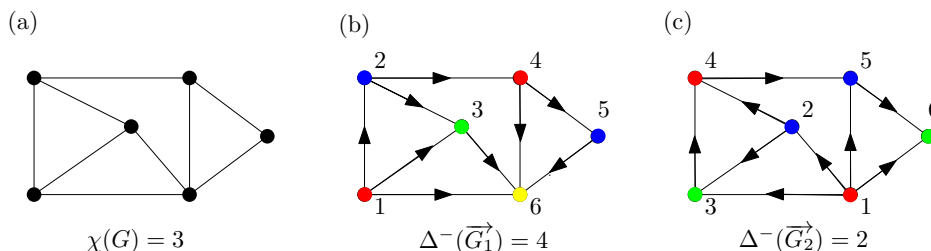


Figure 2: For the graph G in (a) we consider two vertex orderings in (b) and (c), and their respective greedy colorings. The ordering in (b) shows that G is 1-greedy orientable, and G is 0-greedy orientable with the ordering in (c).

Consider an α -greedy orientable graph G , and let $k \geq \alpha + \chi(G)$. When we apply the robust-greedy algorithm (see Section 2.2) to the vertex ordering in G associated to α , there are always $k - \Delta^-(\vec{G})$ available colors when a vertex v is processed by the algorithm, that is $k - \chi(G) + 1 - \alpha$ available colors. Further, v is assigned a color that minimizes, at that stage, the number of monochromatic edges in H with v as endpoint. This implies that at most one $(k - \chi(G) + 1 - \alpha)$ -th of the edges with v as endpoint are monochromatic. This proves the following upper bound for arbitrary subgraphs H of \vec{G} .

Theorem 3.2. *Let G be an α -greedy orientable graph, and let $k \geq \alpha + \chi(G)$. Then,*

$$m(G, H, k) \leq \frac{|E(H)|}{k - \chi(G) + 1 - \alpha}$$

for every subgraph H of \vec{G} .

The preceding theorem leads to upper bounds on $m(G, H, k)$ for well-known families of graphs, concretely, trees, series-parallel graphs with chromatic number 3, bipartite outerplanar graphs, and some ℓ -trees⁴. However, to apply it, we first need to obtain values of α for which these graphs are greedy orientable.

Proposition 3.1. *The following statements hold.*

- (i) *Trees are the unique bipartite graphs that are 0-greedy orientable.*
- (ii) *Series parallel graphs with chromatic number 3 are 0-greedy orientable.*
- (iii) *Bipartite outerplanar graphs are 1-greedy orientable.*
- (iv) *Every $(\chi(G) - 1)$ -tree is 0-greedy orientable.*

Proof. (i) For a tree T , which can be viewed as a rooted tree, it suffices to consider all edges oriented away from the root. This gives a vertex ordering satisfying that $\Delta^-(\vec{T}) = 1$ and so T is 0-greedy orientable. Now, if a bipartite graph G is 0-greedy orientable then $\Delta^-(\vec{G}) = 1$ which implies that G cannot contain a cycle as any vertex ordering in the cycle would force at least one vertex to have indegree bigger than 1.

(ii) The consecutive series-parallel reductions that transform a series-parallel graph G into K_2 gives a vertex ordering such that $\Delta^-(\vec{G}) = 2$ (by simply applying the reductions in the reverse order).

(iii) The result follows from the fact that outerplanar graphs are series-parallel. Thus, we can take the same vertex ordering as above, which gives $\Delta^-(\vec{G}) = 2$.

(iv) It is easy to check that the inductive construction of an $(\chi(G) - 1)$ -tree provides a vertex ordering in G satisfying that $\Delta^-(G) = \chi(G) - 1$. \square

As a consequence of Theorem 3.2 and Proposition 3.1, we obtain the desired upper bounds.

⁴Recall that an ℓ -tree is a graph formed by starting with a complete graph on $(\ell + 1)$ vertices and then repeatedly adding vertices in such a way that each added vertex has exactly ℓ neighbors that, together, the $\ell + 1$ vertices form a clique. Note that 1-trees are the same as unrooted trees, and 2-trees are maximal series-parallel graphs that also include the maximal outerplanar graphs.

Corollary 3.1. *Let H be any subgraph of the complement of a graph G .*

- (i) *If G is a tree then $m(G, H, k) \leq \frac{|E(H)|}{k-1}$.*
- (ii) *If G is a series-parallel graph with $\chi(G) = 3$ then $m(G, H, k) \leq \frac{|E(H)|}{k-2}$.*
- (iii) *If G is a bipartite outerplanar graph, then $m(G, H, k) \leq \frac{|E(H)|}{k-2}$ for $k > 2$.*
- (iv) *If G is an $(\chi(G) - 1)$ -tree then $m(G, H, k) \leq \frac{|E(H)|}{k-\chi(G)+1}$.*

4 Robust colorings on paths

López-Bracho et al. [15] posed the following conjecture on paths.

Conjecture 4.1. [15] *Let G and H be two paths with n edges on the same vertex set. There exists a 3-coloring of G such that the number of edges of H whose ends have the same color is at most $\lfloor \frac{n+1}{4} \rfloor$.*

They also showed that their upper bound would be tight by the construction in Figure 3(a). Theorem 4.1 below proves in the affirmative Conjecture 4.1; in fact our result is stated for the more general case of H being a vertex-disjoint union of paths. Its proof reflects the complexity of studying the RCP even in the seemingly simple setting of paths.

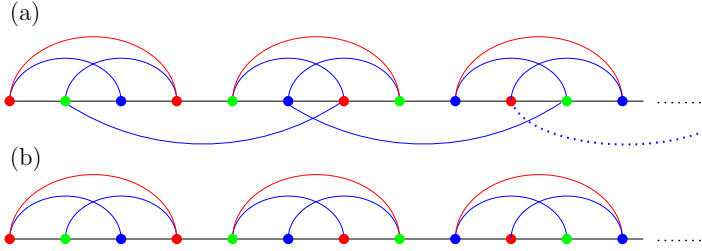


Figure 3: (a) The construction given in [15]: G is the horizontal path and the remaining edges belong to H (monochromatic edges in red, and bichromatic ones in blue), (b) G is the same horizontal path but now H is a vertex-disjoint union of paths. Both constructions attain the bound of Theorem 4.1.

Theorem 4.1. *Let G be a path on $n \geq 3$ vertices, and let $H \subseteq \overline{G}$ be a vertex-disjoint union of paths. Then,*

$$m(G, H, 3) \leq \left\lfloor \frac{|E(H)| + 1 + s}{4} \right\rfloor$$

where $s \geq 0$ is the number of edges in G that are bridges of $G \cup H$. Moreover, the bound is tight.

Proof. The case $n = 3$ is trivial as $m(G, H, 3) = 0$. It is also easy to check the bound for $n = 4$ since $m(G, H, 3) = 0$ when $G \cup H \subset K_4$, and $m(G, H, 3) = 1$ if $G \cup H \simeq K_4$. Note that we could have considered $n \geq 2$ but, for $n = 2$, the graph H would be empty.

We first prove by induction on $n > 4$ that the result holds for $s > 0$.

Let $e \in E(G)$ be a bridge of $G \cup H$. The graph $G \cup H \setminus \{e\}$ ⁵ has two connected components, say $G_1 \cup H_1$ and $G_2 \cup H_2$ satisfying that $|E(H)| = |E(H_1)| + |E(H_2)|$ and $s = s_1 + s_2 + 1$, where s_i denotes the number of edges in G_i that are bridges of $G_i \cup H_i$. Hence, $m(G, H, 3) = m(G_1, H_1, 3) + m(G_2, H_2, 3)$, and by induction we have

$$m(G, H, 3) \leq \left\lfloor \frac{|E(H_1)| + 1 + s_1}{4} \right\rfloor + \left\lfloor \frac{|E(H_2)| + 1 + s_2}{4} \right\rfloor \leq \left\lfloor \frac{|E(H_1)| + |E(H_2)| + 2 + s_1 + s_2}{4} \right\rfloor$$

which equals the desired upper bound. Note that it might happen that H_1 (or H_2) is an empty graph in which case $m(G, H, 3) = m(G_2, H_2, 3)$ (analogous for H_2).

Suppose now that $n > 4$ and $s = 0$. Let $\{u_1, \dots, u_n\}$ be the set of vertices of the path G (viewed as an horizontal path) ordered from left to right. We distinguish the following cases.

Case A: There is a vertex u_i (distinct of u_n) satisfying that there exists a unique edge $u_j u_k$ in H such that $j < i$ and $k > i$ (one endpoint of the edge is to the left and the other to the right of u_i). See Figure 4(a).

We proceed by induction on n . Let G_1 be the sub-path of G with vertices $\{u_1, \dots, u_i\}$, and G_2 that containing vertices $\{u_{i+1}, \dots, u_n\}$; that is $G = G_1 \cup G_2 \setminus \{u_i u_{i+1}\}$. Similarly, we consider the graphs H_1 and H_2 such that $H = H_1 \cup H_2 \setminus \{u_j u_k\}$. Every 3-robust coloring of (G, H) can be modified so that the edge $u_j u_k$ is bichromatic: it suffices to maintain the coloring of G_1 and change the color of u_k with other color in G_2 , if needed. Therefore, $m(G, H, 3) = m(G_1, H_1, 3) + m(G_2, H_2, 3)$, and by induction the result follows.

Case B: Vertex u_n has degree three in $G \cup H$. Refer to Figure 4(b).

Again, we use induction on n . Let $e_1, e_2 \in E(H)$ be two incident edges with u_n . Starting from u_{n-1} , from right to left, find the two first right endpoints u_k, u_j (with $j \leq k$) of edges of H , which are denoted by e_3 and e_4 ; we assume here that $|E(H)| \geq 4$ since otherwise the result is straightforward.

Let G_1 be the sub-path of G with vertex set $\{u_1, \dots, u_j\}$, and let $H_1 = H \setminus \{e_i \mid 1 \leq i \leq 4\}$. The difference between a 3-robust coloring of (G, H) and one of (G_1, H_1) relies on (at most) one edge e_i that can be monochromatic. Hence, by induction,

$$m(G, H, 3) \leq m(G_1, H_1, 3) + 1 \leq \left\lfloor \frac{|E(H_1)| + 1}{4} \right\rfloor + 1 \leq \left\lfloor \frac{|E(H)| + 5}{4} \right\rfloor = \left\lfloor \frac{|E(H)| + 1}{4} \right\rfloor$$



Figure 4: Edges of G in black, and those of H in red; (a) case A: $u_i = u_4$, $u_j = u_1$, and $u_k = u_6$; (b) case B: $u_k = u_7$ and $u_j = u_5$.

⁵We use the standard notation $\tilde{G} \setminus \{e\}$ for the graph that results from deleting an edge e in a graph \tilde{G} .

Case C: The pair (G, H) satisfies neither case A nor case B.

We present a vertex coloring procedure in which we first go from left to right assigning colors to the vertices so that as long as possible no monochromatic edge is generated in $G \cup H$. If we can color all the vertices, then $m(G, H, 3) = 0$; otherwise a *saturated* vertex u_i , $1 < i < n$, is found: a vertex is saturated if its degree in $G \cup H$ is four and, when it is first visited, three of its neighbours have already been colored with the three available colors. In this case, vertex u_i is not assigned a color, and we continue visiting vertices without coloring until the first *conditioned* vertex u_j is found: a non-colored vertex (at some stage) u_j is conditioned if there is a vertex u_t that has already been colored ($t < i$) such that $u_t u_j \in E(H)$; the edge $u_t u_j$ is said to be *semi-colored*. Observe that at this stage vertices from u_1 to u_{i-1} are colored, and those from u_i to u_n are not (including u_j). Note also that vertex u_j must exist as $s = 0$ and $u_i \neq u_n$. See Figure 5 for an example of saturated and conditioned vertices.

We next describe how to conclude the procedure in order to obtain a proper coloring of G with the property that the total number of monochromatic edges in H equals the number of saturated vertices found during the process. More concretely, when a saturated vertex is visited, there are four or five edges of H involved, we shall show that the vertices can be colored so that only one of them is monochromatic.

Suppose first that vertex u_j has two semi-colored edges e_1 and e_2 ; see Figure 5. We first assign a color to u_j so that e_1 and e_2 are bichromatic. Then, vertices from u_{j-1} to u_i are colored (from right to left) to maintain the proper coloring in G . This gives one monochromatic edge among the two edges of H incident with u_i .

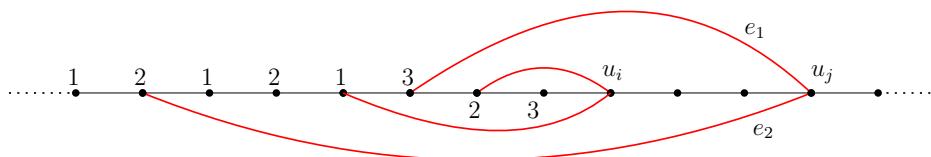


Figure 5: Edges of G in black, and edges of H in red. Vertices $\{u_1, \dots, u_{i-1}\}$ have already been colored (colors 1–3), vertex u_i is saturated, and u_j is a conditioned vertex with two semi-colored edges e_1 and e_2 .

Assume now that u_j has a unique semi-colored edge e_1 . Consider the first (from left to right) conditioned vertex among $\{u_{j+1}, \dots, u_n\}$, say u_k . This vertex must exist since otherwise edge e_1 would be the unique edge with one endpoint to the left and the other to the right of u_i (case A). We now distinguish three cases in which there will be either four or five edges of H involved: we give an ordering to color in order to obtain a unique monochromatic edge among them, and maintaining at that stage the proper coloring in G . The obtained monochromatic edge is, in every case, incident with u_i .

- (i) If u_k has two semi-colored edges e_2 and e_3 (see Figure 6(a)), we first color u_k and u_j so that edges e_i , $1 \leq i \leq 3$ are bichromatic. Then, from right to left, vertices $\{u_{k-1}, \dots, u_{j+1}\}$ and $\{u_{j-1}, \dots, u_i\}$ are properly colored.
- (ii) Suppose that vertex u_k has a unique semi-colored edge e_2 , and u_j has either degree 3 in $G \cup H$ or an incident edge e_3 with the other endpoint u_ℓ between u_i and u_j ($i < \ell < j$). Refer to Figure 6(b).

We first visit, from right to left, vertices $\{u_k, u_{k-1}, \dots, u_j\}$ assigning colors so that e_1 and e_2 are bichromatic; this can be easily done with the three available colors. Then we color, again from right to left, $\{u_{j-1}, \dots, u_i\}$ so that e_3 (if it exists) is bichromatic. This is possible since we are coloring from right to left so, when u_ℓ is visited, there will be two available colors.

- (iii) Finally, suppose that u_k has a unique semi-colored edge e_2 , and u_j has an incident edge e_3 with the other endpoint u_ℓ between u_j and u_k ($j < \ell < k$). Refer to Figure 6(c).

Vertex u_k has two available colors so that e_2 is bichromatic. We randomly assign one of them, and proceed to color from right to left vertices $\{u_{k-1}, \dots, u_j\}$ with the aim that e_1 and e_3 are bichromatic. However, it may happen that, with our assignment, e_1 and e_3 can not be both bichromatic while maintaining the proper coloring in G . In this case, we return to vertex u_k assigning the other color that was initially available, and re-coloring vertices from u_{k-1} to u_j . Finally, we color vertices from u_{j-1} to u_i .

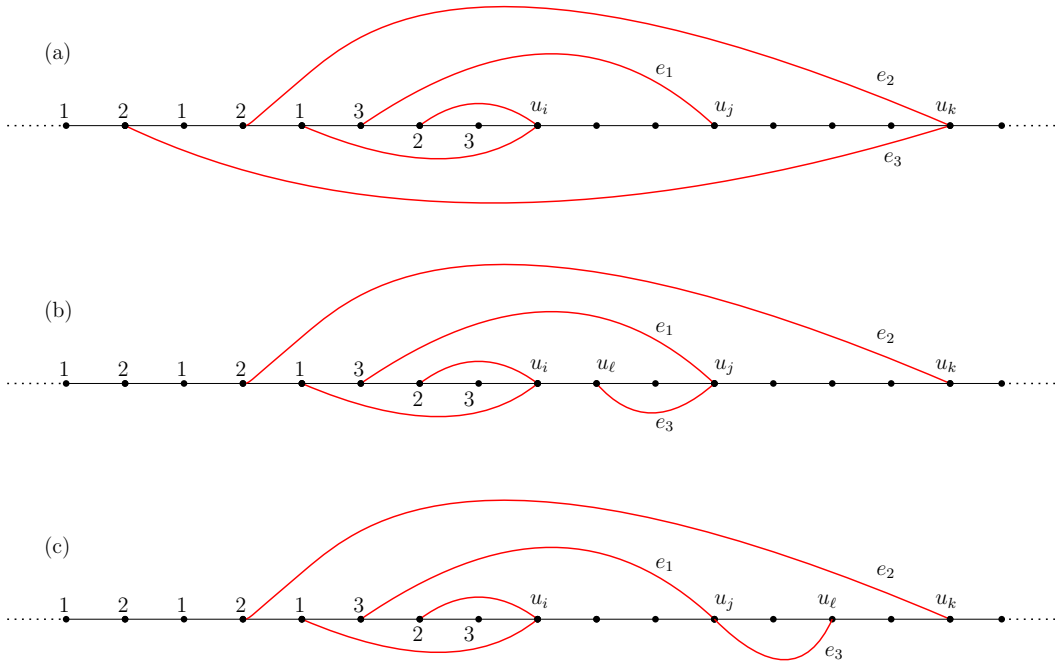


Figure 6: Edges of G in black, and edges of H in red; vertices $\{u_1, \dots, u_{i-1}\}$ have already been colored (colors 1–3): (a) case C(i), (b) case C(ii), (c) case C(iii).

We can thus conclude that, when a saturated vertex is visited, our procedure generates one monochromatic edge in H , and at least three bichromatic. Hence, $m(G, H, 3) \leq \left\lfloor \frac{|E(H)|}{4} \right\rfloor$.

Figure 3 illustrates examples where the bound is tight; in particular, Figure 3(a) shows the one given in [15] for which $s = 0$. \square

5 Concluding remarks

In this paper we have presented a new perspective on the RCP, obtaining the first collection of non heuristic results for general graphs. We have established a strong connection between this coloring model and the well-known equitable colorings. We have also obtained bounds on the parameter $m(G, H, k)$ associated to the problem, and solved a conjecture on paths that illustrates the complexity of the RCP. These are important steps on this difficult and challenging problem that leave different types of open questions for future research:

- Theorem 2.2 tells us that it is not possible to design a poly-algorithm to decide whether a given graph admits an equitable coloring, even for forests. However, it would be interesting to find a wide enough class of graphs for which such a polynomial time algorithm could be designed. The algorithm could also be applied to robust coloring by means of Theorem 2.1.
- In order to improve the upper bounds of Section 3, we think that new techniques must be developed, rather than trying to enhance them by using a similar approach to the one presented in this paper.
- The proof of Theorem 4.1 shows the complexity of studying the RCP even for paths. Thus, for a better understanding of this coloring model, it would be worth studying if the ideas of that proof could be extended to other families of graphs.

Acknowledgments. D.G. and A.M. were supported by project PID2019-104129GB-I00/AEI/ 10.13039/501100011033. A.M. was also supported by project PID2019-103900GB-I00.

References

- [1] C. Archetti, N. Bianchessi, and A. Hertz. A branch-and-price algorithm for the robust graph coloring problem. *Discrete Applied Mathematics* **165** (2014), 49–59.
- [2] J. P. Barthelemy and A. Guenoche. *Trees and Proximity Representations*. John Wiley Sons, New York, 1991.
- [3] E. K. Burke, B. McCollum, A. Meisels, S. Petrovic, and R. Qu. A graph-based hyper-heuristic for educational timetabling problems. *European Journal of Operational Research* **176**(1) (2007), 177–192.
- [4] G. J. Chaitin. Register allocation and spilling via graph coloring. In: *SIGPLAN'82 Symposium on Compiler Construction*, Boston, Mass. (1982), 98–105.
- [5] G. Chartrand and P. Zhang. *Chromatic Graph Theory*, 2nd edition, CRC Press, Taylor and Francis Group, Boca Raton, FL, USA, 2020.
- [6] M. Demange, T. Ekim, B. Ries, and C. Tanasescu. On some applications of the selective graph coloring problem. *European Journal of Operational Research* **240**(2) (2015), 307–314.

- [7] A. Dey, R. Pradhan, A. Pal, and T. Pal. The Fuzzy Robust Graph Coloring Problem. In: *Proceedings of the 3rd International Conference on Frontiers of Intelligent Computing: Theory and Applications (FICTA) 2014* pp. 805-803, 2014. Part of the Advances in Intelligent Systems and Computing book series (AISC, volume 327).
- [8] H. Furmańczyk, A. Jastrzebski, and M. Kubale. Equitable colorings of graphs. Recent theoretical results and new practical algorithms. *Archive of Control Sciences* **26** (2016), 281–295.
- [9] H. Furmańczyk. Equitable coloring of graph products. *Opuscula Mathematica* **26**(1) (2006), 31–44.
- [10] M. R. Garey and D. S. Johnson. *Computers and Intractability: A guide to the theory of NP-Completeness*. W.H. Freeman, New York, USA, 1979.
- [11] M. R. Garey, D. S. Johnson, and H. C. So. An application of graph coloring to printed circuit testing. *IEEE Transactions on Circuits and Systems*, CAS-23:591-599, 1976.
- [12] A. Gamst. Some lower bounds for a class of frequency assignment problems. *IEEE Transactions of Vehicular Technology* **35**(1) (1986), 8–14.
- [13] F.T. Leighton. A graph coloring algorithm for large scheduling problems. *Journal of Research of the National Bureau of Standards* **84** (1979), 489–506.
- [14] A. Lim and F. Wang. Robust graph coloring for uncertain supply chain management. In: *Proceedings of the 38th Annual Hawaii International Conference on System Sciences (HICSS'05)* **3** (2005), pp. 81b.
- [15] R. López-Bracho, J. Ramírez, and F. J. Zaragoza-Martínez. Algorithms for robust graph coloring on paths. In: *Proceedings of the 2nd International Conference on Electrical and Electronics Engineering*, (2005), 9–12.
- [16] W. Meyer. Equitable coloring, *American Mathematical Monthly* **80** (1973), 920-922.
- [17] R. J. Opsut and F. S. Roberts. On the fleet maintenance, mobile radio frequency, task assignment and traffic phasing problems. *G. Chartrand, Y. Alavi, D. L. Goldsmith, L. Lesniak-Foster, and D. R. Lick, editors, The Theory and Applications of Graphs*, pp. 479-492, New York, NY, 1981, John Wiley & Sons.
- [18] H. Ogawa. Labeled point pattern matching by delaunay triangulation and maximal cliques. *Pattern Recognition* **19**(1) (1986), 35-40.
- [19] P. M. Pardalos, T. Mavridou, and J. Xue. The Graph Coloring Problems: A Bibliographic Survey. *Handbook of Combinatorial Optimization*. Kluwer Academic Publishers **2** (1998), 331–395.
- [20] D.H. Smith and S. Hurley. Bounds for the frequency assignment problem. *Discrete Mathematics* **167-168** (1997), 571–582.
- [21] J. Yáñez and J. Ramírez. The robust coloring problem. *European Journal of Operational Research* **148** (2003), 546–558.

- [22] B. Yüceoğlu, G. Sahin, and S. P. M. van Hoesel. A column generation based algorithm for the robust graph coloring problem, *Discrete Applied Mathematics* **217** (2017), 340–352.
- [23] F. Wang and Z. Xu. Metaheuristics for robust graph coloring. *Journal of Heuristics* **19** (2013), 529–548.
- [24] D. de Werra. An introduction to timetabling. *European Journal of Operational Research* **19** (1985), 151-162.
- [25] D. de Werra. The combinatorics of timetabling, *European Journal of Operational Research* **96**(3) (1997), 504–513.