

SeqMapPDB: A Standalone Pipeline to Identify Representative Protein Structures and Mapping Residue Indices in Real-Time at Proteome Scale

Boshen Wang¹, Xue Lei¹, Wei Tian¹, Alan Perez-Rathke¹, Yan-Yuan Tseng², and Jie Liang^{1,*}

¹Bioinformatics Program, Center for Bioinformatics and Quantitative Biology, Richard and Loan Hill Department of Biomedical Engineering, University of Illinois at Chicago, Chicago, 60612, USA. and

²Molecular Medicine and Genetics, Wayne State University, Detroit, 48201, USA.

*To whom correspondence should be addressed.

Associate Editor: XXXXXXXX

Received on XXXXX; revised on XXXXX; accepted on XXXXX

Abstract

Motivation: 3D structures of proteins provide rich information for understanding their biochemical roles. Identifying the representative protein structures for protein sequences is essential for analysis of proteins at proteome scale. However, there are technical difficulties in identifying the representative structure of a given protein sequence and providing accurate mapping of residue indices. Existing databases of mapping between structures and sequences are usually static that are not suitable for studying proteomes with frequent gene model revisions. They often do not provide reliable and consistent representative structures that maximizes sequence coverage. Furthermore, proteins isomers are usually not properly resolved.

Results: To overcome these difficulties, we have developed a computational pipeline called SeqMapPDB to provide high-quality representative PDB structures of given sequences. It provides mapping to structures that fully cover the sequences when available, or to the set of partial non-overlapping structural domains that maximally cover the query sequence. The residue indices are also accurately mapped. SeqMapPDB also provides the flexibility for in-house processing of sequence and structure data in an efficient manner.

Availability: Our method is available at <https://bitbucket.org/lianglabuic/seqmappdb> with GNU GPL license.

Contact: jliang@uic.edu

Supplementary information: Supplementary data are available at *Bioinformatics* online.

1 Introduction

The proteomes of over 10,000 species have been deposited in the UniProt database (1). Analysis of these proteomes can identify relevant protein domains and sequence motifs to gain knowledge of the biochemical roles of the proteins (2; 3). In addition, over 167,000 proteins have their atomic coordinates of structures deposited in the Protein Data Bank (PDB), with thousands more added every year (4). As protein 3D structures can provide detailed information on catalytic residues, binding pockets, and potential allosteric sites important for biochemical functions (5; 6; 7), incorporating such information in analysis can reveal new insight into the biochemical

roles of the proteins. Therefore, an important task is to connect protein sequences to 3-D structures in an accurate and robust fashion. Although databases such as UniProt (1) and SIFTS (8) do provide PDB structures for sequences, there are a number of difficulties in identifying representative PDB structures and in providing accurate mapping of residue indices that these databases currently do not resolve.

First, mapping to a fixed sequence databases is problematic. As protein sequences are inferred from gene models, they are often updated once a refined gene model is validated (9; 10). Furthermore, proteins may have several isoforms due to alternative splicing (11). A static mapping is inadequate in these cases. These problems are further compounded by the occasional irregular index assignment some protein chains have (e.g. chain A of 6EC3 starts at index -13) (4), which requires correction to

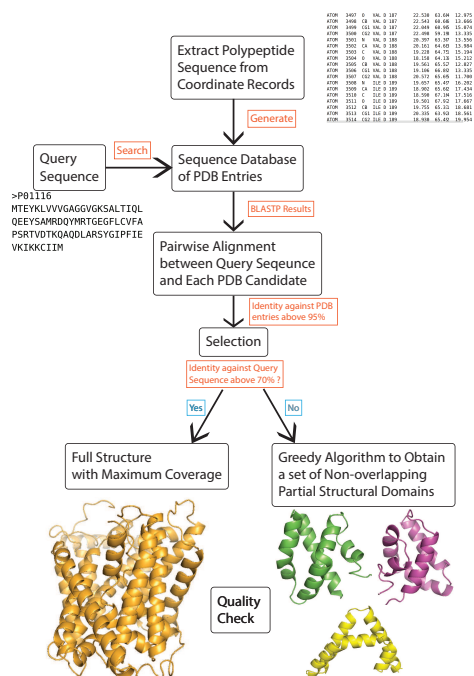


Fig. 1. Overview of SeqMapPDB Pipeline. SeqMapPDB generates a sequence database of the protein structures in the PDB using coordinate records. A query sequence is then searched against this database using BLASTP, and a set of candidate structures is then identified. SeqMapPDB then calculates the two-way identities and coverage based on ClustalW2 alignment between the query sequence and each candidate sequence. SeqMapPDB then either identify the full-length structure, or a set of non-overlapping partial structural domains with maximal coverage, with indices mapped.

the indice of the query sequences. Second, many proteins have structures resolved only for partial domains instead of the full-length sequences, likely due to experimental difficulties in resolving the structures of certain protein regions (12). A single protein sequence is often mapped to several non-overlapping structural domains and these need to be reconciled. Third, there are proteins whose structures have been resolved in multiple experimental studies, leading to redundant entries in the PDB database. It is desirable to identify the representative structures with maximum coverage. Fourth, not all structures in the PDB are of equally high quality. There are cases where only the coordinates of C_{α} exist, with information of all other atoms missing (e.g., PDB 1W25). These PDB entries with large proportion of missing atoms should be avoided.

We have developed a standalone pipeline that can retrieve non-overlapping and high-quality PDB structures for any given sequence. SeqMapPDB is efficient to be employed at proteome-wide scale and provide accurate mapping to the most current version of protein sequences and structures.

2 Methods

Overall architecture of SeqMapPDB pipeline is showing in figure: 1. We apply the SeqMapPDB pipeline to the canonical forms of sequences from the human reference proteome. Among the 20,610 proteins, 5,885 can be mapped to PDB structures, 2,617 of which have full-coverage structures, and 3,268 have partially-covered structures. 763 of the partial covered proteins have structures for at least two non-overlapping partial domains. The full task of mapping takes about 2.2 hours on a machine equipped with an Intel i9-10850K CPU, 64Gb RAM and 1Tb solid state drive.

We use the protein prosaposin (UniProt: P07602) encoded by gene PSAP as an example to demonstrate that non-redundant set of structures

can be selected via SeqMapPDB pipeline. Prosaposin consists of 524 amino acids, but there are no structures that cover its full sequence. Its sequence can be mapped to four individual non-overlapping structural domains. SeqMapPDB maps prosaposin to the structures of 2D0B chain A (covering the segment of residues 60–140), 4V2O chain C (residues 184–272), 1M12 chain A (residues 311–403), and 3BQQ chain A (residues 405–484). Overall, 64.7% of residues in prosaposin can be mapped to structures. In contrast, the database SIFTS returns 33 PDB chains for prosaposin, with many entries mapped redundantly to the same segment (8).

Among 763 proteins that have multiple non-overlapping partial structural domains, the mapped structural domains cover from 0.7% for long proteins (e.g. 5JDE chain A for protein *titin*) to 69.9% (e.g. *HLA-DRA*) of the full protein sequences, with the median coverage of 20.6% per structural domain.

3 Conclusion

We have developed a standalone pipeline SeqMapPDB that can accurately map protein sequences to high-quality protein structures in the PDB database. It can be efficiently deployed to select representative structures for batch processing a large number of query sequences. Furthermore, SeqMapPDB provides the flexibility enabling users to obtain mapping between in-house databases of sequences and structures.

Funding

This work is supported by National Institutes of Health (NIH) grants R35 GM127084.

References

- [1] Consortium, U. UniProt: a worldwide hub of protein knowledge. *Nucleic Acids Research*. **47**, D506-D515 (2019)
- [2] Mistry, J., Chuguransky, S., Williams, L., Qureshi, M., Salazar, G., Sonnhammer, E., Tosatto, S., Paladini, L., Raj, S., Richardson, L. & Others Pfam: The protein families database in 2021. *Nucleic Acids Research*. **49**, D412-D419 (2021)
- [3] Miller, M., Jensen, L., Diella, F., Jørgensen, C., Tinti, M., Li, L., Hsiung, M., Parker, S., Bordeaux, J., Sicheritz-Ponten, T. & Others Linear motif atlas for phosphorylation-dependent signaling. *Science Signaling*. **1**, ra2-ra2 (2008)
- [4] Armstrong, D., Berrisford, J., Conroy, M., Gutmanas, A., Anyango, S., Choudhary, P., Clark, A., Dana, J., Deshpande, M., Dunlop, R. & Others PDBE: improved findability of macromolecular structure data in the PDB. *Nucleic Acids Research*. **48**, D335-D343 (2020)
- [5] Tian, W., Chen, C., Lei, X., Zhao, J. & Liang, J. CASTp 3.0: computed atlas of surface topography of proteins. *Nucleic Acids Research*. **46**, W363-W367 (2018)
- [6] Tseng, Y., Dundas, J. & Liang, J. Predicting protein function and binding profile via matching of local evolutionary and geometric surface patterns. *Journal Of Molecular Biology*. **387**, 451-464 (2009)
- [7] Dundas, J., Adamian, L. & Liang, J. Structural signatures of enzyme binding pockets from order-independent surface alignment: a study of metalloendopeptidase and NAD binding proteins. *Journal Of Molecular Biology*. **406**, 713-729 (2011)
- [8] Dana, J., Gutmanas, A., Tyagi, N., Qi, G., O'Donovan, C., Martin, M. & Velankar, S. SIFTS: updated Structure Integration with Function, Taxonomy and Sequences resource allows 40-fold increase in coverage of structure-based annotations for proteins. *Nucleic Acids Research*. **47**, D482-D489 (2019)
- [9] Stanke, M. & Waack, S. Gene prediction with a hidden Markov model and a new intron submodel. *Bioinformatics*. **19**, ii215-ii225 (2003)
- [10] Walther, T. & Mann, M. Mass spectrometry-based proteomics in cell biology. *Journal Of Cell Biology*. **190**, 491-500 (2010)
- [11] Kelemen, O., Convertini, P., Zhang, Z., Wen, Y., Shen, M., Falaleeva, M. & Stamm, S. Function of alternative splicing. *Gene*. **514**, 1-30 (2013)
- [12] Khafizov, K., Madrid-Aliste, C., Almo, S. & Fiser, A. Trends in structural coverage of the protein universe and the impact of the Protein Structure Initiative. *Proceedings Of The National Academy Of Sciences*. **111**, 3733-3738 (2014)