

Generating Posets with Interfaces

Olavi Äikäs¹, Uli Fahrenberg², Christian Johansen³, and Krzysztof Ziemiański⁴

¹École polytechnique, Palaiseau, France*

²EPITA Research and Development Laboratory (LRDE), France[†]

³Norwegian University of Science and Technology (NTNU), Norway

⁴University of Warsaw, Poland

March 8, 2022

Abstract

We generate and count isomorphism classes of gluing-parallel posets with interfaces (iposets) on up to eight points, and on up to ten points with interfaces removed. In order to do so, we introduce a new class of iposets with full interfaces and show that considering these is sufficient. We also describe the software (written in Julia) that we have used for our exploration and define a new incomplete isomorphism invariant which may be computed in polynomial time yet identifies only very few pairs of non-isomorphic iposets.

1 Introduction

In concurrency theory, partially ordered sets (posets) are used to model executions of programs which exhibit both sequentiality and concurrency of events [Win77, Pra86, Vog92]. Series-parallel posets have been investigated due to their algebraic malleability—they are freely generated by serial and parallel composition [Gra81, Gis88]—and form a model of concurrent Kleene algebra [HMSW11]. Interval orders are another class of posets that arise naturally in the semantics of Petri nets [Vog92, JK93, JY17], higher-dimensional automata [vG06a, FJSZ21b], and distributed systems [Lam78]. Series-parallel posets and interval orders are incomparable.

This paper continues work begun in [FJST20] to consolidate series-parallel posets and interval orders. To this end, we have equipped posets with interfaces and extended the serial composition to an operation which glues posets along their interfaces. We have investigated the algebraic structure of the so-defined gluing-parallel posets, which encompass both series-parallel posets and interval orders, in [FJST20, FJSZ21c]. Here we concern ourselves with the combinatorial properties of this class.

*Bachelor internship at École polytechnique in 2021; no current affiliation

[†]Most of this work conducted while author employed at École polytechnique

An iposet is a poset with interfaces. We generate (and count) all isomorphism classes of iposets and of gluing-parallel iposets on up to 8 points, and of gluing-parallel posets (with interfaces removed) on up to 10 points. In order to do so, we introduce a new subclass of iposets with full interfaces and then generate all isomorphism classes of such “*Winkowski*” iposets on up to 8 points and of gluing-parallel Winkowski iposets on up to 9 points.

We have found eleven forbidden substructures for gluing-parallel (i)posets, five on 6 points, one on 8 points, and five other on 10 points. We currently do not know whether there are any forbidden substructures on 11 points or more.

To conduct our exploration we have written software in Julia, using the `LightGraphs` package. We use a recursive algorithm to generate iposets and Julia’s built-in threading support for parallelization. For isomorphism checking we use a new incomplete invariant which may be computed in linear time yet identifies only relatively few pairs of non-isomorphic (i)posets. We also detail the software and process used to find forbidden substructures. Our software and generated data are freely available; McKay’s similarly freely available data has been of great help in our work.

After a preliminary Section 2 on posets we introduce interfaces in Section 3. Section 4 then reports on our software and Section 5 on forbidden substructures. Before we then can examine Winkowski iposets in Section 7 we need to concern ourselves with discrete iposets in Section 6.

We expose the numbers of non-isomorphic (i)posets in various classes throughout the paper. Table 1 shows the numbers of posets, series-parallel posets, interval orders, the union of the latter two classes, and series-parallel interval orders. Table 2 counts iposets and gluing-parallel (i)posets, Table 4 shows the numbers of some subclasses of discrete iposets, and Table 5 exposes the numbers of Winkowski and gluing-parallel Winkowski iposets. The appendix contains the counts of iposets and gluing-parallel iposets, and of their Winkowski subclasses, split by the numbers of sources and targets.

The main contributions of this paper are, especially when compared to [FJSZ21c], the exposition of the new subclass of Winkowski iposets and the showcase of Julia as a programming language for combinatorial exploration. Further, we believe that our new incomplete isomorphism invariant may be useful also in other contexts, but this remains to be explored.

2 Posets

A poset $(P, <)$ is a finite set P equipped with an irreflexive transitive binary relation $<$ (asymmetry of $<$ follows). We use Hasse diagrams to visualize posets, but put greater elements to the right of smaller ones. Posets are equipped with a serial and a parallel composition. They are based on the disjoint union (coproduct) of sets, which we write $X \sqcup Y = \{(x, 1) \mid x \in X\} \cup \{(y, 2) \mid y \in Y\}$.

Definition 1 Let $(P_1, <_1)$ and $(P_2, <_2)$ be posets.

1. The *parallel composition* $P_1 \otimes P_2$ is the coproduct with $P_1 \sqcup P_2$ as carrier set and order defined as

$$(p, i) < (q, j) \Leftrightarrow i = j \wedge p <_i q, \quad i, j \in \{1, 2\}.$$

2. The *serial composition* $P_1 \triangleright P_2$ is the ordinal sum, which again has the disjoint union as carrier set, but order defined as

$$(p, i) < (q, j) \Leftrightarrow (i = j \wedge p <_i q) \vee i < j, \quad i, j \in \{1, 2\}. \quad \square$$

A poset is *series-parallel* (an *sp-poset*) if it is either empty or can be obtained from the singleton poset by finitely many serial and parallel compositions. It is well known [VTL82, Gra81] that a poset is series-parallel if and only if it does not contain the induced subposet

$$\mathbf{N} = \begin{array}{ccc} \circ & \longrightarrow & \circ \\ & \searrow & \nearrow \\ \circ & \longrightarrow & \circ \end{array}.$$

Further, generation of sp-posets is free: they form the free algebra in the variety of double monoids.

An *interval order* [Fis70] is a relational structure $(P, <)$ with $<$ irreflexive such that $w < y$ and $x < z$ imply $w < z$ or $x < y$, for all $w, x, y, z \in P$. Transitivity of $<$ follows, and interval orders are therefore posets. Interval orders are precisely those posets that do not contain the induced subposet

$$2+2 = \begin{array}{ccc} \circ & \longrightarrow & \circ \\ \circ & \longrightarrow & \circ \end{array}.$$

Concurrency theory employs both sp-posets and interval orders (and their labeled variants), the former for their algebraic malleability and the latter because the precedence order of events in distributed systems typically is an interval order. We are interested in classes of posets which retain the pleasurable algebraic properties of sp-posets but include interval orders.

Posets $(P_1, <_1)$ and $(P_2, <_2)$ are isomorphic if there is a bijection $f : P_1 \rightarrow P_2$ such that for all $x, y \in P_1$, $x <_1 y \Leftrightarrow f(x) <_2 f(y)$. It is well-known (and easy to see, given that posets are isomorphic if and only if their Hasse diagrams are) that the poset isomorphism problem is just as hard as graph isomorphism. State of the art is Brinkmann and McKay [BM02] which reports generating isomorphism classes of posets on up to sixteen points.

Also *counting* posets up to isomorphism is difficult and has been achieved up to sixteen points. On the other hand, both sp-posets and interval orders admit generating functions, so counting these is trivial. Table 1 shows the numbers of posets, sp-posets and interval orders on n points up to isomorphism for $n \leq 11$, as well as the numbers of posets which are sp-or-interval and those which are series-parallel compositions of interval orders.

3 Posets with Interfaces

Let $[n] = \{1, \dots, n\}$ for $n \geq 1$ and $[0] = \emptyset$. We write P^{\min} for the set of minimal and P^{\max} for the set of maximal elements of poset P .

Definition 2 A *poset with interfaces* (*iposet*) is a poset P together with two injective functions

$$[n] \xrightarrow{s} P \xleftarrow{t} [m]$$

such that the images $s([n]) \subseteq P^{\min}$ and $t([m]) \subseteq P^{\max}$. □

Table 1: Different types of posets on n points: all posets; sp-posets; interval orders; sp or interval; sp-interval orders.

n	$P(n)$	$SP(n)$	$IO(n)$	$SP+IO(n)$	$SPIO(n)$
0	1	1	1	1	1
1	1	1	1	1	1
2	2	2	2	2	2
3	5	5	5	5	5
4	16	15	15	16	16
5	63	48	53	59	59
6	318	167	217	252	253
7	2045	602	1014	1187	1203
8	16.999	2256	5335	6161	6327
9	183.231	8660	31.240	35.038	36.449
10	2.567.284	33.958	201.608	218.770	229.660
11	46.749.427	135.292	1.422.074		
EIS	112	3430	22493		

An iposet as above is denoted $(s, P, t) : n \rightarrow m$. We let iPos be the set of iposets and define the identity iposets $\text{id}_n = (\text{id}_{[n]}, [n], \text{id}_{[n]}) : n \rightarrow n$ for $n \geq 0$. For notational convenience we also define *source* and *target* functions $\text{src}, \text{tgt} : \text{iPos} \rightarrow \mathbb{N}$ which map $P : n \rightarrow m$ to $\text{src}(P) = n$ and $\text{tgt}(P) = m$. Any *poset* P is an iposet with trivial interfaces, $\text{src}(P) = \text{tgt}(P) = 0$.

Iposets $(s_1, P_1, t_1) : n_1 \rightarrow m_1$ and $(s_2, P_2, t_2) : n_2 \rightarrow m_2$ are *isomorphic* if there is a poset isomorphism $f : P_1 \rightarrow P_2$ such that $f \circ s_1 = s_2$ and $f \circ t_1 = t_2$; this implies $n_1 = n_2$ and $m_1 = m_2$. The mappings src and tgt are invariant under isomorphisms.

We extend the serial and parallel compositions to iposets. Below, $\phi_{n,m} : [n+m] \rightarrow [n] \otimes [m]$ are the isomorphisms given by

$$\phi_{n,m}(i) = \begin{cases} (i, 1) & \text{if } i \leq n, \\ (i - n, 2) & \text{if } i > n, \end{cases}$$

and $(P_1 \sqcup P_2)_{/t_1 \equiv s_2}$ denotes the quotient of the disjoint union obtained by identifying $(t_1(k), 1)$ with $(s_2(k), 2)$ for every $k \in [m]$.

Definition 3 Let $(s_1, P_1, t_1) : n_1 \rightarrow m_1$ and $(s_2, P_2, t_2) : n_2 \rightarrow m_2$ be iposets.

1. Their *parallel composition* is the iposet $(s, P_1 \otimes P_2, t) : n_1 + n_2 \rightarrow m_1 + m_2$ with $s = (s_1 \otimes s_2) \circ \phi_{n_1, n_2}$ and $t = (t_1 \otimes t_2) \circ \phi_{m_1, m_2}$.
2. For $m_1 = m_2$, their *gluing composition* is the iposet $(s_1, P_1 \triangleright P_2, t_2) : n_1 \rightarrow m_2$ with carrier set $(P_1 \sqcup P_2)_{/t_1 \equiv s_2}$ and order defined as

$$(p, i) < (q, j) \Leftrightarrow (i = j \wedge p <_i q) \vee (i < j \wedge p \notin t_1[m_1] \wedge q \notin s_2[n_2]). \quad \square$$

Thus $P_1 \triangleright P_2$ is defined precisely if $\text{tgt}(P_1) = \text{src}(P_2)$, and in that case, $\text{src}(P_1 \triangleright P_2) = \text{src}(P_1)$ and $\text{tgt}(P_1 \triangleright P_2) = \text{tgt}(P_2)$. Isomorphism classes of iposets form the morphisms in a category with objects the natural numbers and gluing as composition, or equivalently, a *local partial lr-semigroup* [CFJ⁺21, FJSZ21a]. For the parallel composition, $\text{src}(P_1 \otimes P_2) = \text{src}(P_1) \otimes \text{src}(P_2)$ and $\text{tgt}(P_1 \otimes P_2) = \text{tgt}(P_1) \otimes \text{tgt}(P_2)$, extending iPos to a *partial interchange monoid* [CDS20].

Remark 1 (Interchange) The equation $(P_1 \otimes P_2) \triangleright (Q_1 \otimes Q_2) = (P_1 \triangleright Q_1) \otimes (P_2 \triangleright Q_2)$ does *not* hold in general, not even up to isomorphism [FJSZ21c]; but see Lemma 4 below for a special case. \square

A composition $P = P_1 \triangleright P_2$ or $P = P_1 \otimes P_2$ is *trivial* if $P = P_1$ or $P = P_2$ as posets; see also Lemma 3 below. As before, we are interested in iposets and posets which can be obtained from elementary iposets by finitely many (nontrivial) gluing and parallel compositions. Let

$$\mathcal{S} = \{[0] \rightarrow [1] \leftarrow [0], \quad [0] \rightarrow [1] \leftarrow [1], \quad [1] \rightarrow [1] \leftarrow [0], \quad [1] \rightarrow [1] \leftarrow [1]\}$$

be the set of iposets on the singleton poset (the source and target maps are uniquely determined by their type here).

Definition 4 An iposet is *gluing-parallel* (a *gp-iposet*) if it is empty or can be obtained from elements of \mathcal{S} by finitely many applications of \triangleright and \otimes . \square

We are interested in generating and counting iposets and gp-iposets up to isomorphism, but also in doing so for gluing-parallel *posets*: those posets which are gp-as-iposets. The following property defines a class in-between iposets and gp-iposets.

Definition 5 Iposet $(s, P, t) : n \rightarrow m$ is *interface consistent* if $s^{-1}(x) < s^{-1}(y) \Leftrightarrow t^{-1}(x) < t^{-1}(y)$ for all $x, y \in s([n]) \cap t([m])$. \square

Here $<$ is the (implicit) natural ordering on $[n]$ and $[m]$. It is clear that gluing and parallel compositions of interface consistent iposets are again interface consistent, hence any gp-iposet is interface consistent. Table 2 shows the numbers of posets, sp-posets and gp-posets up to isomorphism, as well as of iposets, interface consistent iposets, and gp-iposets. In the appendix, Tables A.1 to A.6 show the numbers of the three classes of iposets split by the numbers of their sources and targets.

4 Software

Before we continue with our exploration, we describe the software we have used to generate most numbers in the tables contained in this paper and to explore the structural properties of (i)posets.¹ This started as a piece of Python code written to confirm or disprove some

¹Our software is available at <https://github.com/ulifahrenberg/pomsetproject/tree/main/code/20220303/>, and the data at <https://github.com/ulifahrenberg/pomsetproject/tree/main/data/>.

Table 2: Different types of posets and iposets on n points: all posets; sp-posets; gp-posets; iposets; interface consistent iposets; gp-iposets

n	$P(n)$	$SP(n)$	$GP(n)$	$IP(n)$	$ICl(n)$	$GPI(n)$
0	1	1	1	1	1	1
1	1	1	1	4	4	4
2	2	2	2	17	16	16
3	5	5	5	86	74	74
4	16	15	16	532	420	419
5	63	48	63	4068	3030	2980
6	318	167	313	38.933	28.495	26.566
7	2045	602	1903	474.822	355.263	289.279
8	16.999	2256	13.943	7.558.620	5.937.237	3.726.311
9	183.231	8660	120.442			
10	2.567.284	33.958	1.206.459			
11	46.749.427	135.292				
EIS	112	3430	345673	331158		331159

conjectures, but did not allow us to compute the $GP(n)$ and $GPI(n)$ sequences beyond $n = 6$. During the BSc internship of the first author of this paper, it was converted to Julia, using the LightGraphs package [FBS⁺21]. This conversion, and major improvements in candidate generation and isomorphism checking (see below), allowed us to generate all gp-posets on $n = 9$ points and all gp-iposets on $n = 7$ points. Afterwards we managed to compute $GP(10)$ and $GPI(8)$ using massively parallelized computations.²

Let G_n denote the set of isomorphism classes of gp-iposets on n points for $n \geq 0$ and

$$G_n(k, \ell) = \{P \in G_n \mid \text{src}(P) = k, \text{tgt}(P) = \ell\}$$

for $k, \ell \in \{0, \dots, n\}$. That is, $G_n(k, \ell)$ is the set of iposets on n points with k points in the starting interface and ℓ in the terminating interface. Then $G_n = \bigcup_{k, \ell} G_n(k, \ell)$, $GPI(n) = |G_n|$, and $GP(n) = |G_n(0, 0)|$. Our algorithm for generating G_n is recursive and based on the following property, where we have extended \triangleright and \otimes to sets of iposets the usual way.

Lemma 1 For all $n > 1$ and $0 \leq k, \ell \leq n$,

$$G_n(k, \ell) = \bigcup_{\substack{1 \leq p, q < n \\ m = p + q - n \\ 0 \leq m < p \\ 0 \leq m < q}} G_p(k, m) \triangleright G_q(m, \ell) \cup \bigcup_{\substack{p + q = n \\ p, q \geq 1 \\ k_1 + k_2 = k \\ \ell_1 + \ell_2 = \ell}} G_p(k_1, \ell_1) \otimes G_q(k_2, \ell_2). \quad \square$$

² We have used several ARM based servers running Linux with processor from High Silicon, model Hi1616, 64 cores, 256 GiB memory, 36 TiB of local disk, provided by the University of Oslo HPC services <https://www.uio.no/english/services/it/research/hpc/>.

Listing 1: Julia function (parts) to compute $G_n(k, \ell)$.

```

1 function gpclosure(n, k, l, iposets, filled, locks)
2     #Return memoized if exists
3     if filled[k, l, n]
4         return (x[1] for x in vcat(iposets[:, k, l, n]...))
5     end
6     #If opposites exist, return opposites
7     if filled[l, k, n]
8         return (reverse(x[1]) for x in vcat(iposets[:, l, k, n]...))
9     end
10    #Otherwise, generate recursively
11    lock(locks[end, k, l, n])
12    #First, the gluings
13    Threads.@threads for p in 1:(n-1)
14        Threads.@threads for q in 1:(n-1)
15            m = p + q - n
16            if m < 0 || m ≥ p || m ≥ q || k > p || l > q
17                continue
18            end
19            for P in gpclosure(p, k, m, iposets, filled, locks)
20                for Q in gpclosure(q, m, l, iposets, filled, locks)
21                    R = glue(P, Q)
22                    neR = ne(R) #number of edges
23                    pushuptoiso!(iposets[neR, k, l, n], ip, locks[neR, k, l, n])
24                end
25            end
26        end
27    end
28    #Now, the parallel compositions
29    ...
30    filled[k, l, n] = true
31    unlock(locks[end, k, l, n])
32    return (x[1] for x in vcat(iposets[:, k, l, n]...))
33 end

```

PROOF By definition, $R \in G_n(k, \ell)$ if and only if R is a gluing or parallel composition of smaller gp-iposets. If $R = P \triangleright Q$, then $P \in G_p(k, m)$ and $Q \in G_q(m, \ell)$ for some $p, q < n$, and we can assume $p, q \geq 1$ because otherwise the composition would be trivial. The number of points of $P \triangleright Q$ is $p + q - m$, hence $m = p + q - n$, and $m < p, q$ because we can assume that both P and Q have at least one non-interface point; otherwise composition would again be trivial.

If $R = P \otimes Q$, then $P \in G_p(k_1, \ell_1)$ and $Q \in G_q(k_2, \ell_2)$ for some $p + q = n$, and we can again assume $p, q \geq 1$, and $k_1 + k_2 = k$ and $\ell_1 + \ell_2 = \ell$ by definition of \otimes . We have shown that $G_n(k, \ell)$ is included in the expression on the right-hand side; the reverse inclusion is trivial. ■

Listing 1 shows part of the recursive Julia function which implements the above algorithm. The multi-dimensional array `iposets` is used for memoization and initiated with the four singletons in \mathcal{S} , `filled` is used to denote which parts of `iposets` have been computed, and `locks` is used for locking. The heart of the procedure is the call to `pushuptoiso!` in line 23 which checks whether `iposets` already contains an element isomorphic to `ip` and, if not, pushes it into the array.

Due to the multi-threaded implementation and tight locking, we were able to generate

G_7 in about 4 minutes on a standard laptop. Generating G_8 took altogether 300 hours in a distributed computation to generate each $G_8(k, \ell)$ separately on four different computers: two standard laptops and two Norwegian supercomputers. For generating iposets and analyzing forbidden substructures we have benefited greatly from Brendan McKay's poset collections.³

Deciding whether iposets are isomorphic is just as difficult as for posets. Brinkmann and McKay [BM02] develop an algorithm to compute canonical representations: mappings f from posets to labeled posets so that $f(P) = f(P')$ precisely if P and P' are isomorphic. It is clear that if any such algorithm were to run in polynomial time, then poset isomorphism, and thus also graph isomorphism, would be in P.

Canonical representations are complete isomorphism invariants. In our software we are instead using an *incomplete* isomorphism invariant inspired by bisimulation [Mil89] which can be computed in polynomial time. For digraph G and a point x of G , denote by $\text{ideg}(x)$ and $\text{odeg}(x)$ the in- and out-degrees of x in G .

Definition 6 An *in-out bisimulation* between digraphs $G_1 = (V_1, E_1)$ and $G_2 = (V_2, E_2)$ is a relation $R \subseteq V_1 \times V_2$ such that

- for all $(x_1, x_2) \in R$, $\text{ideg}(x_1) = \text{ideg}(x_2)$ and $\text{odeg}(x_1) = \text{odeg}(x_2)$;
- for all $(x_1, x_2) \in R$ and $(x_1, y_1) \in E_1$, there exists $(x_2, y_2) \in E_2$ with $(y_1, y_2) \in R$;
- for all $(x_1, x_2) \in R$ and $(x_2, y_2) \in E_2$, there exists $(x_1, y_1) \in E_1$ with $(y_1, y_2) \in R$. \square

Note that this is the same as a standard bisimulation [Mil89] between the transition systems (without initial state) given by enriching digraphs with propositions stating each vertex's in- and out-degree. Digraphs are said to be in-out-bisimilar if there exists an in-out-bisimulation joining them.

Definition 7 Let P be a poset. The functions $\text{ihash}, \text{ohash} : P \rightarrow \mathbb{N}$ are the least fixed points to the equations

$$\text{ihash}(x) = \text{ideg}(x) + |P| \sum_{y < x} \text{ihash}(y), \quad \text{ohash}(x) = \text{odeg}(x) + |P| \sum_{x < y} \text{ohash}(y). \quad \square$$

By acyclicity these hashes are well defined, and they may be computed in linear time. A *hash isomorphism* between posets P and Q is a bijection $f : P \rightarrow Q$ such that

$$(\text{ihash}(f(x)), \text{ohash}(f(x))) = (\text{ihash}(x), \text{ohash}(x))$$

for all $x \in P$.

Lemma 2 Let P and Q be posets.

1. If P and Q are isomorphic, then they are hash isomorphic.
2. If P and Q are hash isomorphic, then they are in-out-bisimilar. \square

³See <http://users.cecs.anu.edu.au/~bdm/data/digraphs.html>.



Figure 1: The two pairs of non-isomorphic posets on 6 points which are hash isomorphic.

PROOF If $f : P \rightarrow Q$ is an isomorphism, then it is also a hash isomorphism. If f is a hash isomorphism, then the relation defined by f is an in-out-bisimulation. ■

Checking for existence of a hash isomorphism can be done in polynomial time, for example by sorting the hashes.

Example 1 Hash isomorphisms are complete for posets on up to 5 points: if $|P|, |Q| \leq 5$, then P and Q are isomorphic if and only if they are hash isomorphic. On 6 points, there are two pairs of non-isomorphic posets which are hash isomorphic, depicted in Figure 1. Proportionally to the number of *all* pairs of non-isomorphic posets, the number of “false positives” grows rather slowly, see Table 3. Hence it appears that hash isomorphism is a rather tight invariant which allows one to avoid most of the costly isomorphism checks. □

Listing 2 shows our Julia code for checking whether two posets are isomorphic. The hashes are precomputed, so the function `isomorphic` takes two posets `P` and `Q` as arguments as well as their hashes, `pv` and `qv` of type `Vpprof` for “vertex profile”. After checking whether there is a hash isomorphism, the hashes are used to constrain possible isomorphisms: only bijections `pos_isom` which are hash isomorphisms are given to the isomorphism checker `isomorphic(P, Q, pos_isom)`. Table 3 also shows the averages for how many bijections are checked whether they are isomorphisms.

5 Forbidden Substructures

Recall that an induced subposet $(Q, <_Q)$ of a poset $(P, <_P)$ is a subset $Q \subseteq P$ with the order $<_Q$ the restriction of $<_P$ to Q . We have shown in [FJSZ21c] that gluing-parallel posets are closed under induced subposets: if Q is an induced subposet of a gp-poset P ,

Table 3: Numbers of pairs of non-isomorphic but hash isomorphic posets on n points; their proportion as part of all pairs of non-isomorphic posets; average numbers of bijections checked for isomorphism.

n	NIHI(n)	NIHI(n)/ $P(n)^2$	nperm(n)
5	0	0	0
6	2	$2 \cdot 10^{-6}$	$8 \cdot 10^{-6}$
7	45	$1 \cdot 10^{-6}$	$6 \cdot 10^{-6}$
8	928	$3 \cdot 10^{-7}$	$2 \cdot 10^{-6}$
9	20443	$6 \cdot 10^{-8}$	$4 \cdot 10^{-7}$

Listing 2: Julia function to check poset isomorphism.


```

1 function isomorphic(P::Poset, pv::Vprof, Q::Poset, qv::Vprof)
2     #Start with the easy stuff
3     P == Q && return true
4     n = nv(P) #number of points
5     (n != nv(Q) || ne(P) != ne(Q)) && return false
6     #Check for hash isomorphism
7     used = zeros(Bool, n)
8     @inbounds for i in 1:n
9         found = false
10        for j in 1:n
11            if pv[i] == qv[j] && !used[j]
12                used[j] = true; found = true
13                break
14            end
15        end
16        !found && return false
17    end
18    #Collect all hash isomorphisms, mapping points to their possible images
19    targets = Array{Array{Int}}(undef, n)
20    targets .= [[]]
21    @inbounds for v in 1:n
22        for u in 1:n
23            pv[v] == qv[u] && push!(targets[v], u)
24        end
25    end
26    #Check all target permutations if they are isos
27    for pos_isom in Iterators.product(targets...)
28        if bijective(pos_isom) && isomorphic(P, Q, pos_isom)
29            return true
30        end
31    end
32    return false
33 end

```

then also Q is gluing-parallel. This begs the question whether gp-posets admit a finite set of forbidden substructures: a set \mathcal{F} of posets which are incomparable under the induced-subposet relation and such that any poset is gluing-parallel if and only if it contains none of the structures in \mathcal{F} as induced subposets.

Proposition 1 ([FJST20]) *The following posets are contained in \mathcal{F} :*

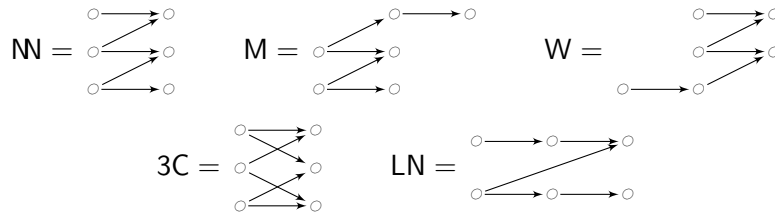

Listing 3 shows our implementation of the semi-algorithm to find forbidden substructures. These are collected in the array `fsubs` and printed out as they are found. The function `posetsnotgp` returns the posets on n points which are not gluing-parallel, using the function `diffuptoiso` (not shown) which computes the difference between two (i)poset arrays up to isomorphism. The function `nosubs` returns all elements of `posets`

Listing 3: Julia code to find forbidden substructures.

```

1  function findforbiddensubs()
2      n = 5
3      fsubs = Array{Poset}(undef, 0)
4      while true
5          n += 1
6          pngs = posetsnotgp(n)
7          newfsubs = nosubs(pngs, fsubs)
8          if !isempty(newfsubs)
9              println("Found new forbidden substructure(s) on $n points:")
10             for s in newfsubs
11                 println(string(s))
12             end
13             append!(fsubs, newfsubs)
14         end
15     end
16     return fsubs
17 end
18 function posetsnotgp(n)
19     ps = posets(n)
20     gps = [ip.poset for ip in gpiposets(n, 0, 0)]
21     return diffuptoiso(ps, gps)
22 end
23 function nosubs(posets, subs)
24     res = Array{Poset}(undef, 0)
25     for p in posets
26         hasnosub = true
27         for s in subs
28             sg, _ = subgraph(p, s)
29             if sg
30                 hasnosub = false
31                 break
32             end
33         end
34         hasnosub && push!(res, p)
35     end
36     return res
37 end

```

which have no induced subposet isomorphic to any element of `subs`; this latter check is carried out in `subgraph` which we also do not show here. Using McKay's files of posets and our own precomputed files of iposets, `findforbiddensubs` finds the forbidden substructures of Proposition 1 almost immediately. After a few seconds it finds another forbidden substructure on 8 points (see below), and after an hour it verifies that there are no new forbidden substructures on 9 points.

Proposition 2 ([FJSZ21c]) *When restricting to posets on at most 10 points, \mathcal{F} contains precisely the five posets of Proposition 1 and the six posets in Figure 2. \square*

In order to find the forbidden substructures on 10 points in Figure 2, we used another, distributed algorithm which took about two weeks to run. We generated 45 separate files containing the gp-iposets on 10 points obtained from gluing elements of $G_n(0, k)$ and $G_m(k, 0)$ for $n \in \{1, \dots, 9\}$ and $m \in \{10 - n, \dots, 9\}$ (thus $k = 10 - n - m$), each reduced up to isomorphism, and one file containing all gp-iposets on 10 points obtained as parallel compositions of smaller gp-iposets. Then we took `posets10.txt`, removed posets contain-

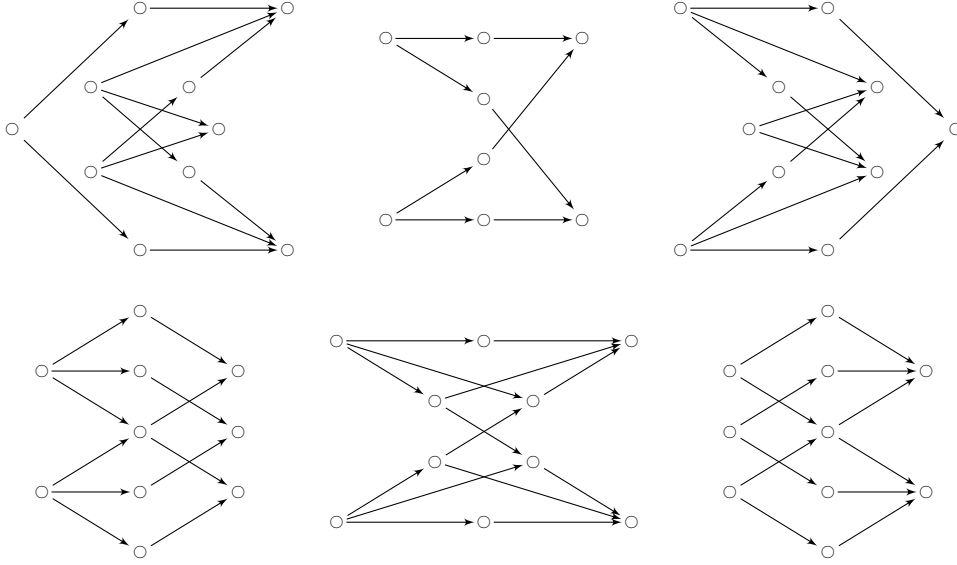


Figure 2: Additional forbidden substructures for gp-posets.

ing one of our forbidden substructures on 6 or 8 points, and then successively filtered it through these 46 files, using `diffuptoiso`.

Whether there are further forbidden substructures (on 11 points or more), and whether \mathcal{F} is a finite set, remains open.

6 Discrete Iposets

This section explores the “fine structure” of iposets. An iposet $(s, P, t) : n \rightarrow m$ is *discrete* if P is, it is a *starter* if, additionally, $t : [m] \rightarrow P$ is bijective, and a *terminator* if $s : [n] \rightarrow P$ is bijective. Any discrete iposet is the gluing of a starter with a terminator and is gluing-parallel if and only if it is interface consistent. The following is clear.

Lemma 3 *A gluing $P = P_1 \triangleright P_2$ is trivial if and only if P_1 is a starter or P_2 is a terminator.* ■

The next proposition shows numbers of some classes of discrete iposets, see also Table 4.

Proposition 3 *Let $n \geq 0$. Up to isomorphism,*

1. *there are 2^n gp-starters and 2^n gp-terminators on n points;*
2. *there are $\sum_{k=0}^n \frac{n!}{k!}$ starters and $\sum_{k=0}^n \frac{n!}{k!}$ terminators on n points;*
3. *there are $\sum_{s,t=0}^n \sum_{u=\max(0,s+t-n)}^{\min(s,t)} \binom{s}{u} \binom{t}{u}$ gp-discrete iposets on n points;*
4. *there are $\sum_{s,t=0}^n \sum_{u=\max(0,s+t-n)}^{\min(s,t)} \binom{s}{u} \binom{t}{u} u!$ discrete iposets on n points.* □

Table 4: Numbers of discrete iposets, gp-discrete iposets, starters, and gp-starters on n points. (Numbers of terminators and gp-terminators are the same as in the two last columns.)

n	$D(n)$	$GPD(n)$	$S(n)$	$GPS(n)$
0	1	1	1	1
1	4	4	2	2
2	13	12	5	4
3	45	33	16	8
4	184	88	65	16
5	913	232	326	32
6	5428	609	1957	64
7	37.764	1596	13.700	128
8	300.969	4180	109.601	256
9	2.702.152	10.945	986.410	512
10	26.977.189	28.656	9.864.101	1024
EIS		27941	522	79

The third term above can be simplified by

$$\sum_{s,t=0}^n \sum_{u=\max(0,s+t-n)}^{\min(s,t)} \binom{s}{u} \binom{t}{u} = \sum_{i=0}^n \binom{n+2+i}{n-i},$$

using a version of Vandermonde's identity; we are not aware of any such simplification for the last term.

PROOF

1. For any $k \in \{0, \dots, n\}$, there are $\binom{n}{k}$ non-isomorphic interface consistent starters on n points with k of them in the starting interface.
2. Similarly, there are $\binom{n}{k}k!$ non-isomorphic starters on n points with k points in the starting interface when not requiring interface consistency.
3. Let $s, t, u \in \{0, \dots, n\}$ and consider the number of non-isomorphic interface consistent discrete iposets on n points with s points in the starting, t points in the terminating, and u points in both interfaces, then necessarily $s + t - n \leq u \leq \min(s, t)$. The points not in both interfaces only give rise to one isomorphism class, the points in the overlap may be chosen in $\binom{s}{u} \binom{t}{u}$ non-isomorphic ways, and their order is unique by interface consistency.
4. The argument is the same as above; but the missing interface consistency requirement adds a factor $u!$. ■

A discrete iposet $(s, P, t) : n \rightarrow n$ is a *symmetry* if it is both a starter and a terminator, that is, s and t are both bijective. All points of P are in the starting and terminating interfaces, but the permutation $t^{-1} \circ s : [n] \rightarrow [n]$ is not necessarily an identity. It is clear that there are precisely $n!$ non-isomorphic symmetries on n points, and that any discrete iposet P may be written $P \cong \sigma \triangleright Q \cong R \triangleright \tau$ for symmetries σ, τ and Q and R interface consistent.

We finish this section by a special case of the interchange property relating parallel and gluing compositions, cf. Remark 1.

Lemma 4 ([FJSZ21c]) *Let P_1, P_2, Q_1, Q_2 be iposets such that $\text{tgt}(P_1) = \text{src}(Q_1)$ and $\text{tgt}(P_2) = \text{src}(Q_2)$. Then $(P_1 \otimes P_2) \triangleright (Q_1 \otimes Q_2) = (P_1 \triangleright Q_1) \otimes (P_2 \triangleright Q_2)$ if and only if $P_1 \triangleright Q_1$ or $P_2 \triangleright Q_2$ is discrete.* \square

7 Iposets with Full Interfaces

We now introduce a class of iposets where *all* minimal and/or maximal points are in the interfaces; we name these after Winkowski [Win77] who, to the best of our knowledge, was the first to consider posets with interfaces, and who only considered such full-interface iposets.

Definition 8 An iposet $(s, P, t) : n \rightarrow m$ is *left Winkowski* if $s([n]) = P^{\min}$, *right Winkowski* if $t([m]) = P^{\max}$, and *Winkowski* if it is both left and right Winkowski. \square

Note that starters are precisely discrete right Winkowskis, terminators are precisely discrete left Winkowskis, and symmetries are precisely the discrete Winkowskis.

Lemma 5 *Let $P = P_1 \triangleright P_2$ nontrivially.*

- *P is left Winkowski if and only if P_1 is;*
- *P is right Winkowski if and only if P_2 is;*
- *P is Winkowski if and only if P_1 is left Winkowski and P_2 is right Winkowski.* \square

PROOF We show that $P^{\min} = P_1^{\min}$ and $P^{\max} = P_2^{\max}$; the lemma then follows. By non-triviality there must be $x \in P_1$ which is not in the target interface. Now $P_1^{\min} \subseteq P^{\min}$ by definition of \triangleright , so assume $y \in P^{\min} \setminus P_1^{\min}$. Then $y \notin P_1$, which implies $x < y$ in contradiction to $y \in P^{\min}$. (Note that non-triviality of $P = P_1 \triangleright P_2$ is necessary here: if P_1 is a starter, we may have $y \notin P_1$ but still $y \in P^{\min}$.) The proof for $P^{\max} = P_2^{\max}$ is symmetric. \blacksquare

For parallel compositions, it is clear that $P_1 \otimes P_2$ is (left/right) Winkowski if and only if P_1 and P_2 are. Our immediate interest in Winkowski iposets is to speed up generation of gp-iposets by only considering gp-Winkowskis. It is clear that any iposet has a decomposition $P = S \triangleright W \triangleright T$ into a starter S , a Winkowski W and a terminator T ; by the next lemma, this also holds in the gluing-parallel case.

Lemma 6 *Any gp-iposet P has a decomposition $P = S \triangleright W \triangleright T$ into a starter S , a Winkowski W and a terminator T which are all gluing-parallel.* \square

PROOF Let $n = |P|$ be the number of points in P . If $n \leq 1$, then the claim is trivially true as all iposets on 0 or 1 points are gluing-parallel. Let $n \geq 2$, assume that the claim is true for all iposets with fewer than n points, and let P be gluing-parallel.

If $P = P_1 \triangleright P_2$ nontrivially with P_1 and P_2 gluing-parallel, then by the induction hypothesis, $P_1 = S_1 \triangleright W_1 \triangleright T_1$ and $P_2 = S_2 \triangleright W_2 \triangleright T_2$ for S_1, S_2 gp-starters, W_1, W_2 gp-Winkowski, and T_1, T_2 gp-terminators. Now $P = P_1 \triangleright P_2 = S_1 \triangleright (W_1 \triangleright T_1 \triangleright S_2 \triangleright W_2) \triangleright T_2$, and $W_1 \triangleright T_1 \triangleright S_2 \triangleright W_2$ is gluing-parallel because all four components are, and is Winkowski because W_1 and W_2 are.

If $P = P_1 \otimes P_2$ nontrivially with P_1 and P_2 gluing-parallel, then by the induction hypothesis, $P_1 = S_1 \triangleright W_1 \triangleright T_1$ and $P_2 = S_2 \triangleright W_2 \triangleright T_2$ for S_1, S_2 gp-starters, W_1, W_2 gp-Winkowskis, and T_1, T_2 gp-terminators. Now

$$P = P_1 \otimes P_2 = (S_1 \triangleright W_1 \triangleright T_1) \otimes (S_2 \triangleright W_2 \triangleright T_2) = (S_1 \otimes S_2) \triangleright (W_1 \otimes W_2) \triangleright (T_1 \otimes T_2)$$

by Lemma 4, $S_1 \otimes S_2$ is a gp-starter, $W_1 \otimes W_2$ is gp-Winkowski, and $T_1 \otimes T_2$ is a gp-terminator. \blacksquare

For generating gluing-parallel iposets it is thus sufficient to generate gp-Winkowskis, gp-starters and gp-terminators. The next lemma entails that also in the recursions these are the only classes we need to consider.

Lemma 7 *For P a gluing-parallel Winkowski iposet, the following are exhaustive:*

1. $P = \text{id}_0$ or $P = \text{id}_1$;
2. $P = P_1 \otimes P_2$ nontrivially for P_1 and P_2 gp-Winkowski;
3. $P = P_1 \triangleright P_2$ nontrivially for P_1 gp-Winkowski or a gp-terminator and P_2 gp-Winkowski or a gp-starter. \square

PROOF The first two cases are clear. Otherwise, $P = P_1 \triangleright P_2$ nontrivially for P_1 and P_2 gluing-parallel. By Lemma 5, P_1 is left Winkowski and P_2 right Winkowski, and by Lemma 6 we can decompose $P_1 = W_1 \triangleright T_1$ and $P_2 = S_2 \triangleright W_2$ into gp-starters, gp-Winkowskis and gp-terminators. Then $P = W_1 \triangleright T_1 \triangleright S_2 \triangleright W_2$. There are four cases to consider:

1. If both W_1 and W_2 are identities, then neither T_1 nor S_2 are (by non-triviality of $P = P_1 \triangleright P_2$), hence $P = T_1 \triangleright S_2$ nontrivially.
2. If W_1 is an identity, but W_2 is not, then also T_1 is not an identity. Now if S_2 is an identity, then $P = T_1 \triangleright W_2$ nontrivially; otherwise, $T_1 \triangleright S_2$ is Winkowski by Lemma 5 and $P = (S_1 \triangleright T_2) \triangleright W_2$.
3. The case of W_2 being an identity but not W_1 is symmetric.

Table 5: Different types of (i)posets on n points: posets; iposets; gp-iposets; Winkowski iposets; interface consistent Winkowskis; gp-Winkowskis

n	$P(n)$	$IP(n)$	$GPI(n)$	$WIP(n)$	$ICW(n)$	$GPWI(n)$
0	1	1	1	1	1	1
1	1	4	4	1	1	1
2	2	17	16	3	2	2
3	5	86	74	13	8	8
4	16	532	419	75	43	42
5	63	4068	2980	555	311	284
6	318	38.933	26.566	5230	3018	2430
7	2045	474.822	289.279	63.343	39.196	25.417
8	16.999	7.558.620	3.726.311	1.005.871	682.362	314.859
9	183.231					4.509.670
EIS	112	331158	331159			

4. If neither W_1 nor W_2 are identities, but $T_1 \triangleright S_2$ is, then $P = W_1 \triangleright W_2$ nontrivially. If also $T_1 \triangleright S_2$ is not an identity, then $T_1 \triangleright S_2 \triangleright W_2$ is Winkowski by Lemma 5 and $P = W_1 \triangleright (T_1 \triangleright S_2 \triangleright W_2)$ nontrivially. ■

Denoting by G_n^W , G_n^S and G_n^T the subsets of G_n consisting of Winkowskis, starters, respectively terminators, we have thus shown the following refinement of Lemma 1.

Lemma 8 For all $n > 1$ and $0 \leq k, \ell \leq n$,

$$G_n^W(k, \ell) = \bigcup_{\substack{1 \leq p, q < n \\ m = p + q - n \\ 0 \leq m < p \\ 0 \leq m < q}} (G_p^W(k, m) \cup G_p^T(k, m)) \triangleright (G_q^W(m, \ell) \cup G_q^S(m, \ell)) \cup \bigcup_{\substack{p+q=n \\ p, q \geq 1 \\ k_1+k_2=k \\ \ell_1+\ell_2=\ell}} G_p^W(k_1, \ell_1) \otimes G_q^W(k_2, \ell_2). \quad \blacksquare$$

Note that in order to find forbidden substructures, it is not enough to generate $G_n^W(0, 0)$ as was the case for general iposets; indeed $G_n^W(0, 0) = \emptyset$ for $n \geq 1$, given that the number of interfaces for Winkowski iposets is a structural property determined by the underlying posets. Generating G_7^W took about 4 seconds and G_8^W ca. 12 minutes on a standard laptop (compare this with the 4 minutes for G_7 and 300 hours for G_8). Generating G_9^W took 79 hours on one of the machines mentioned in footnote 2. Table 5 shows the numbers of Winkowskis and gp-Winkowskis on n points up to isomorphism, and Tables A.7 to A.13 in the appendix show the split into sources and targets.

References

- [BM02] Gunnar Brinkmann and Brendan D. McKay. Posets on up to 16 points. *Order*, 19(2):147–179, 2002.

- [CDS20] James Cranch, Simon Doherty, and Georg Struth. Convolution and concurrency. <https://arxiv.org/abs/2002.02321>, 2020.
- [CFJ⁺21] Cameron Calk, Uli Fahrenberg, Christian Johansen, Georg Struth, and Krzysztof Ziemiański. ℓr -Multisemigroups, modal quantales and the origin of locality. In Uli Fahrenberg, Mai Gehrke, Luigi Santocanale, and Michael Winter, editors, *RAMiCS*, volume 13027 of *Lect. Notes Comput. Sci.*, pages 90–107. Springer-Verlag, 2021.
- [FBS⁺21] James Fairbanks, Mathieu Besançon, Simon Schölly, Júlio Hoffman, Nick Eubank, and Stefan Karpinski. Juliagraphs/graphs.jl: an optimized graphs package for the julia programming language, 2021. <https://github.com/JuliaGraphs/Graphs.jl/>.
- [Fis70] Peter C. Fishburn. Intransitive indifference with unequal indifference intervals. *Journal of Mathematical Psychology*, 7(1):144–149, 1970.
- [FJST20] Uli Fahrenberg, Christian Johansen, Georg Struth, and Ratan Bahadur Thapa. Generating posets beyond N. In Uli Fahrenberg, Peter Jipsen, and Michael Winter, editors, *RAMiCS*, volume 12062 of *Lect. Notes Comput. Sci.*, pages 82–99, Heidelberg, 2020. Springer-Verlag.
- [FJSZ21a] Uli Fahrenberg, Christian Johansen, Georg Struth, and Krzysztof Ziemiański. ℓr -Multisemigroups and modal convolution algebras. <https://arxiv.org/abs/2105.00188>, 2021.
- [FJSZ21b] Uli Fahrenberg, Christian Johansen, Georg Struth, and Krzysztof Ziemiański. Languages of higher-dimensional automata. *Math. Struct. Comput. Sci.*, 31(5):575–613, 2021.
- [FJSZ21c] Uli Fahrenberg, Christian Johansen, Georg Struth, and Krzysztof Ziemiański. Posets with interfaces for concurrent Kleene algebra. <https://arxiv.org/abs/2106.10895>, 2021.
- [Gis88] Jay L. Gischer. The equational theory of pomsets. *Theoretical Computer Science*, 61:199–224, 1988.
- [Gra81] J. Grabowski. On partial languages. *Fundamentae Informatica*, 4(2):427, 1981.
- [HMSW11] Tony Hoare, Bernhard Möller, Georg Struth, and Ian Wehrman. Concurrent Kleene algebra and its foundations. *Journal of Logic and Algebraic Programming*, 80(6):266–296, 2011.
- [JK93] Ryszard Janicki and Maciej Koutny. Structure of concurrency. *Theoretical Computer Science*, 112(1):5–52, 1993.
- [JY17] Ryszard Janicki and Xiang Yin. Modeling concurrency with interval traces. *Information and Computation*, 253:78–108, 2017.

- [Lam78] Leslie Lamport. Time, clocks, and the ordering of events in a distributed system. *Commun. ACM*, 21(7):558–565, 1978.
- [Mil89] Robin Milner. *Communication and Concurrency*. Prentice Hall, Upper Saddle River, 1989.
- [Pra86] Vaughan R. Pratt. Modeling concurrency with partial orders. *J. Parallel Programming*, 15(1):33–71, 1986.
- [vG06a] Rob J. van Glabbeek. On the expressiveness of higher dimensional automata. *Theoretical Computer Science*, 356(3):265–290, 2006. See also [vG06b].
- [vG06b] Rob J. van Glabbeek. Erratum to “On the expressiveness of higher dimensional automata” [vG06a]. *Theoretical Computer Science*, 368(1-2):168–194, 2006.
- [Vog92] Walter Vogler. *Modular Construction and Partial Order Semantics of Petri Nets*, volume 625 of *Lecture Notes in Computer Science*. Springer, 1992.
- [VTL82] Jacobo Valdes, Robert Endre Tarjan, and Eugene L. Lawler. The recognition of series parallel digraphs. *SIAM Journal on Computing*, 11(2):298–313, 1982.
- [Win77] Józef Winkowski. An algebraic characterization of the behaviour of non-sequential systems. *Information Processing Letters*, 6(4):105–109, 1977.

Table A.1: Numbers of iposets on 1, 2 and 3 points split by number of sources and targets.

IP(1)	0	1		IP(2)	0	1	2		ICI(2)	0	1	2
0	1	1		0	2	2	1		0	2	2	1
1		1		1		3	2		1		3	2
				2			2		2			1

IP(3)	0	1	2	3		ICI(3)	0	1	2	3
0	5	6	4	1		0	5	6	4	1
1		9	8	3		1		9	8	3
2			10	6		2			9	3
3				6		3				1

Table A.2: Numbers of iposets on 4 points split by number of sources and targets.

IP(4)	0	1	2	3	4		ICI(4)	0	1	2	3	4
0	16	22	19	8	1		0	16	22	19	8	1
1		36	37	20	4		1		36	37	20	4
2			48	36	12		2			46	30	6
3				42	24		3				19	4
4					24		4					1

GPI(4)	0	1	2	3	4
0	16	22	19	8	1
1		36	37	20	4
2			45	30	6
3				19	4
4					1

Table A.3: Numbers of iposets on 5 points split by number of sources and targets.

IP(5)	0	1	2	3	4	5		ICI(5)	0	1	2	3	4	5
0	63	101	106	63	16	1		0	63	101	106	63	16	1
1		180	214	148	48	5		1		180	214	148	48	5
2			295	250	112	20		2			290	232	88	10
3				282	192	60		3				209	80	10
4					216	120		4					33	5
5						120		5						1

GPI(5)	0	1	2	3	4	5
0	63	101	106	62	16	1
1		180	214	146	48	5
2			281	220	88	10
3				198	80	10
4					33	5
5						1

Table A.4: Numbers of iposets on 6 points split by number of sources and targets.

IP(6)	0	1	2	3	4	5	6
0	318	576	720	552	217	32	1
1		1131	1536	1303	589	112	6
2			2305	2221	1212	320	30
3				2549	1812	720	120
4					1872	1200	360
5						1320	720
6							720

ICI(6)	0	1	2	3	4	5	6
0	318	576	720	552	217	32	1
1		1131	1536	1303	589	112	6
2			2289	2155	1098	240	15
3				2245	1242	280	20
4					690	170	15
5						51	6
6							1

GPI(6)	0	1	2	3	4	5	6
0	313	565	703	523	205	32	1
1		1104	1493	1235	561	112	6
2			2146	1931	993	240	15
3				1911	1092	280	20
4					644	170	15
5						51	6
6							1

Table A.5: Numbers of iposets on 7 points split by number of sources and targets.

IP(7)	0	1	2	3	4	5	6	7
0	2045	4162	6026	5692	3074	771	64	1
1		8945	13756	13925	8210	2352	256	7
2			22664	24956	16465	5654	864	42
3				30610	23572	10440	2400	210
4					22880	14400	5280	840
5						14040	8640	2520
6							9360	5040
7								5040

ICI(7)	0	1	2	3	4	5	6	7
0	2045	4162	6026	5692	3074	771	64	1
1		8945	13756	13925	8210	2352	256	7
2			22601	24653	15829	5024	624	21
3				29054	20072	6760	880	35
4					14489	4870	700	35
5						1777	312	21
6							73	7
7								1

GPI(7)	0	1	2	3	4	5	6	7
0	1903	3813	5423	4878	2563	680	64	1
1		8056	12179	11811	6865	2110	256	7
2			19129	19567	12305	4246	624	21
3				21295	14420	5433	880	35
4					10439	4112	700	35
5						1647	312	21
6							73	7
7								1

Table A.6: Numbers of iposets on 8 points split by number of sources and targets.

IP(8)	0	1	2	3	4	5	6	7	8
0	16999	38280	63088	70946	49255	18152	2809	128	1
1		89699	154451	182680	134680	53651	9451	576	8
2			279685	350957	278197	122505	25810	2240	56
3				472927	410905	207923	56322	7392	336
4					406232	253640	96600	20160	1680
5						218200	126120	43680	6720
6							118080	70560	20160
7								75600	40320
8									40320

ICI(8)	0	1	2	3	4	5	6	7	8
0	16999	38280	63088	70946	49255	18152	2809	128	1
1		89699	154451	182680	134680	53651	9451	576	8
2			279367	349229	273877	116985	22555	1568	28
3				463000	384873	173073	34857	2576	56
4					334532	152970	30605	2520	70
5						68080	14711	1484	56
6							3854	518	28
7								99	8
8									1

GPI(8)	0	1	2	3	4	5	6	7	8
0	13943	30333	48089	50187	32790	12348	2251	128	1
1		68571	113701	125539	88295	36791	7789	576	8
2			193330	221192	164078	73774	17438	1568	28
3				263828	206161	98655	25233	2576	56
4					169476	85192	22937	2520	70
5						44362	12173	1484	56
6							3559	518	28
7								99	8
8									1

Table A.7: Numbers of Winkowski iposets on 1, 2 and 3 points split by number of sources and targets.

WIP(1)	0	1	WIP(2)	0	1	2	GPWI(2)	0	1	2
0	0	0	0	0	0	0	0	0	0	0
1		1	1		1	0	1		1	0
			2			2	2			1

WIP(3)	0	1	2	3	GPWI(3)	0	1	2	3
0	0	0	0	0	0	0	0	0	0
1		1	1	0	1		1	1	0
2			4	0	2			4	0
3				6	3				1

Table A.8: Numbers of Winkowski iposets on 4 points split by number of sources and targets.

WIP(4)	0	1	2	3	4	GPWI(4)	0	1	2	3	4
0	0	0	0	0	0	0	0	0	0	0	0
1		2	3	1	0	1		2	3	1	0
2			11	6	0	2			10	6	0
3				18	0	3				9	0
4					24	4					1

Table A.9: Numbers of Winkowski iposets on 5 points split by number of sources and targets.

WIP(5)	0	1	2	3	4	5	GPWI(5)	0	1	2	3	4	5
0	0	0	0	0	0	0	0	0	0	0	0	0	0
1		5	11	7	1	0	1		5	11	7	1	0
2			41	43	8	0	2			39	36	8	0
3				81	36	0	3				61	18	0
4					96	0	4					16	0
5						120	5						1

Table A.10: Numbers of Winkowski iposets on 6 points split by number of sources and targets.

WIP(6)	0	1	2	3	4	5	6
0	0	0	0	0	0	0	0
1		16	47	47	15	1	0
2			200	285	135	10	0
3				598	408	60	0
4					600	240	0
5						600	0
6							720

GPWI(6)	0	1	2	3	4	5	6
0	0	0	0	0	0	0	0
1		16	47	46	15	1	0
2			190	238	102	10	0
3				406	256	30	0
4					222	40	0
5						25	0
6							1

Table A.11: Numbers of Winkowski iposets on 7 points split by number of sources and targets.

WIP(7)	0	1	2	3	4	5	6	7
0	0	0	0	0	0	0	0	0
1		63	243	343	185	31	1	0
2			1203	2198	1609	391	12	0
3				5323	5185	1605	90	0
4					6808	3720	480	0
5						4800	1800	0
6							4320	0
7								5040

GPWI(7)	0	1	2	3	4	5	6	7
0	0	0	0	0	0	0	0	0
1		63	239	318	173	31	1	0
2			1096	1727	1129	260	12	0
3				3284	2699	838	45	0
4					2864	1112	80	0
5						595	75	0
6							36	0
7								1

Table A.12: Numbers of Winkowski iposets on 8 points split by number of sources and targets.

WIP(8)	0	1	2	3	4	5	6	7	8
0	0	0	0	0	0	0	0	0	0
1		318	1533	2891	2319	707	63	1	0
2			8895	20195	20222	8333	1099	14	0
3				56783	71835	37396	5688	126	0
4					112751	72140	17580	840	0
5						74000	35400	4200	0
6							42120	15120	0
7								35280	0
8									40320

GPWI(8)	0	1	2	3	4	5	6	7	8
0	0	0	0	0	0	0	0	0	0
1		313	1432	2413	1856	616	63	1	0
2			7402	13942	12152	4736	626	14	0
3				29702	30062	14150	2433	63	0
4					36058	20366	4230	140	0
5						13812	3507	175	0
6							1316	126	0
7								49	0
8									1

Table A.13: Numbers of gp-Winkowski iposets on 9 points split by number of sources and targets.

GPWI(9)	0	1	2	3	4	5	6	7	8	9
0	0	0	0	0	0	0	0	0	0	0
1		1903	10109	20397	20173	9935	2123	127	1	0
2			57949	126041	135862	74501	18507	1456	16	0
3				298002	355788	221772	65086	6585	84	0
4					478218	340355	115612	13988	224	0
5						276343	108612	15337	350	0
6							49569	8960	336	0
7								2555	196	0
8									64	0
9										1