

Logics for Epistemic Actions: Completeness, Decidability, Expressivity

Alexandru Baltag
ILLC, University of Amsterdam
1090 GE Amsterdam
Netherlands
TheAlexandruBaltag@gmail.com

Lawrence S. Moss
Mathematics Department
Indiana University
Bloomington, IN 47405-7106 USA
lmoss@indiana.edu

Sławomir Solecki
Mathematics Department
Cornell University
Ithaca, New York 14853 USA
ss3777@cornell.edu

This paper was intended to be the “journal” version of our 1998 paper “The logic of common knowledge, public announcements, and private suspicions.” It was mainly written in 2004, with a few bibliographic additions coming a few years later.

Abstract

We consider dynamic versions of epistemic logic as formulated in [1]. That paper proposed a family of logical languages $\mathcal{L}(\Sigma)$ parameterized by *action signatures*. In addition to $\mathcal{L}(\Sigma)$, we consider two fragments $\mathcal{L}_0(\Sigma)$ and $\mathcal{L}_1(\Sigma)$ of it. We review the syntax and semantics of these languages $\mathcal{L}_0(\Sigma)$, $\mathcal{L}_1(\Sigma)$, and $\mathcal{L}(\Sigma)$, as well as the sound proof systems for the validities in them. It was shown in [13] that validity in $\mathcal{L}(\Sigma)$ is Π_1^1 -complete, so there are no recursively axiomatized complete logical systems for it. On the positive side, this paper proves the strong completeness of the axiomatization of $\mathcal{L}_0(\Sigma)$ and the weak completeness of $\mathcal{L}_1(\Sigma)$. The work involve a detour into term rewriting theory. And since at the heart of the argument is modal filtration, it gives the finite model property and hence decidability. We also give a translation of $\mathcal{L}_1(\Sigma)$ into PDL, hence we obtain a second proof of the decidability of $\mathcal{L}_1(\Sigma)$. The paper closes with some results on expressive power. These are mostly concerned with comparing $\mathcal{L}_1(\Sigma)$ with modal logic together with transitive closure operators. We also answer a natural question about the languages we get by varying the action signature. In particular, we prove that a logical language with operators for private announcements is more expressive than one for public announcements.

Contents

1	Introduction	3
2	Definitions	6
2.1	State models and propositions	6
2.2	Updates	7
2.3	Action models and program models	9
2.4	The update product	9
2.5	Updates induced by program models	9
2.6	Operations on program models	10
2.7	Action signatures	11
2.8	Bisimulation-based notions of equivalence	12
3	The languages $\mathcal{L}(\Sigma)$	16
3.1	The syntax and semantics of $\mathcal{L}(\Sigma)$	16
3.2	Examples	17
3.3	Basic properties	20
4	The logical system for validity of $\mathcal{L}(\Sigma)$ sentences	21
4.1	Soundness of the axioms	21
5	The Action Rule	26
5.1	The canonical action model Ω	26
5.2	The main result about Ω	27
5.3	Soundness of the Action Rule	28
5.4	Syntactic Facts	30
6	Completeness theorems	35
6.1	Proofs of the main facts on normal forms and the well-order $<$	36
6.2	Strong completeness for $\mathcal{L}_0(\Sigma)$	47
6.3	Weak completeness for $\mathcal{L}_1(\Sigma)$	47
6.4	Extensions to the completeness theorem	50
7	Results on expressive power	52
7.1	Translation of $\mathcal{L}_1(\Sigma)$ into PDL	52
7.2	$\mathcal{L}_1(\Sigma_{\text{pub}})$ is more expressive than \mathcal{L}_1	53
7.3	$\mathcal{L}_1(\Sigma_{\text{pri}})$ is more expressive than $\mathcal{L}_1(\Sigma_{\text{pub}})$	56
7.4	$\mathcal{L}(\Sigma_{\text{pub}})$ lacks the finite model property	59
	References	61

1 Introduction

One of the goals of *dynamic epistemic logic* is to construct logical languages which allow one to represent a variety of possible types of changes affecting the information states of agents in a multi-agent setting. One wants (formal) logical systems with primitive operations corresponding to (informal) notions such as *public announcement*, *completely private announcement*, *private announcement to one agent with suspicion by another*, etc. And then after the logics are formulated, one would ideally want technical tools to use in their study and application.

The full formulation of such logics is somewhat of a complicated story. In the first place, one needs a reasonable syntax. On the semantic side, there is an unusual feature in that the truth of a sentence at a point in one model often depends on the truth of a related sentence in a *different* model. In effect, the kinds of actions we are interested in give rise to functions, or relations more generally, on the class of all possible models.

There have been some proposals on logical systems for dynamic epistemic logic beginning with the work of Plaza [14], Gerbrandy [9, 10], and Gerbrandy and Groeneveld [11]. These papers formulated logical systems for the informal notions of public announcement and completely private announcement. They left open the matter of axiomatizing the logics in the presence of common knowledge operators. (Without the common knowledge operators, the systems are seen to be variants on standard multi-model logic.) And they also left open the question of the decidability of these systems. Our work began with complete axiomatizations for these systems and for more general systems. Our results were presented in [2]. As it happens, the logics which we constructed in [2] did not have the friendliest syntax. The first two authors pursued this matter for some time and eventually came to the proposals in [1]. The logical systems for the validities of the ultimate languages are certainly related to those in [2]. But due to the different formulation of the overall syntax and semantics, all of the work on soundness and completeness had to be completely reworked. The main purpose of the present paper is to present these results. Secondarily, we present some technical results on the systems such as results on expressive power.

Contents of this paper: a high level view This paper is a long technical development, and for this reason we did not include a full-scale motivation of the logical systems themselves. For a great deal of motivational material, one should see [2]. Section 2 formulates all of the definitions needed in the paper. The presentation is based closely on the work in [1], so readers familiar with that paper may use Section 2 as a review. Other readers of this paper could take the logical systems here to simply be extensions of propositional dynamic logic which allow one to make “transitions from model to model” in addition to transitions “inside a given model.” In addition, Section 2.8 is new in this paper.

The logical languages studied in this paper are presented in Section 3. Section 3.2 presents some examples of the semantics, chosen to foreshadow work in Section 7 on expressive power. The logical system is presented in Section 4, along with a soundness result for most of the system. One especially significant inference rule, called the *Action Rule* is studied in Section 5. The completeness theorem for the logic comes in Section 6. The final section deals with questions of expressive power, and it may be read after Section 4.

Two aspects of our overall machinery are worth pointing out. The first is the use of the *canonical action model*. This is a semantic object built from syntactic objects (sequences of

simple actions, terms in our language $\mathcal{L}(\Sigma)$). We would like to think that the use of the canonical model makes for a more elegant presentation than one would otherwise have.

The second feature is a *term rewriting system* for dealing with assertions in the language. The semantic equivalences in dynamic epistemic logic are sufficiently complicated that the ‘sub-sentence’ relation is not the most natural or useful one for many purposes. Instead, one needs to handcraft various ordering relations for use in inductive proofs, or in defining translations. For just one example, in the logic of public announcements one has an *announcement-knowledge axiom* in a form such as

$$[!\varphi]\Box\psi \leftrightarrow (\varphi \rightarrow \Box[!\varphi]\psi). \quad (1.1)$$

This is for a logic with just one agent, and in this discussion we are forgetting about common knowledge. To prove that the logic has a translation t back to ordinary modal logic, one wants to use the equivalence in (1.1) above as the key step in the translation, defining $([\varphi]\Box\psi)^t$ to be $\varphi^t \rightarrow (\Box[!\varphi]\psi)^t$. But then one needs to have some reason to say that both φ and (more critically) $\Box[!\varphi]\psi$ are of *lower complexity* than the original formula $[\varphi]\Box\psi$. There are several ways to make this precise. One is to directly assign an element of some well-founded set to each formula and then use this as a measure of complexity. This is done in [6], and the well-founded set is the natural numbers. Our treatment is different, mainly because it goes via term rewriting. In effect, one takes the well-founded set to be the sentences themselves, with the order given by substitution using laws such as (1.1), but oriented in a specified direction (left-to-right, for example). Then the fact that we have a well-founded relation is a result one proves about oriented sets of laws (term rewriting systems). In our case, we use an interpretation constructed by hand.

Our term rewriting system is presented and studied in Section 6.1. It actually deals not with $\mathcal{L}(\Sigma)$ but with a different language called $\mathcal{L}_1(\Sigma)$. An important by-product of our completeness proof via rewriting is a Normal Form Theorem for $\mathcal{L}_1(\Sigma)$. This is an interesting result in itself, and it does not follow from other completeness proofs such as those in [6], or in the paper [6], which we discuss next. In order to use the rewriting system, one needs to know that substitution of “equivalent” objects preserves “equivalence” and that the proof system itself is strong enough to reduce sentences to normal form. Unfortunately, this “obvious” point takes a great deal of work. The details are all in this paper, and to our knowledge no other source presents complete proofs on these matters.

Comparison with some other work The first version of this paper is our 1998 conference publication [2]. We ourselves had several versions of this paper issued as technical reports or posted on web sites, and so in some sense the results here are *public* but not *published*. In the past ten years, the subject of dynamic epistemic logic has taken off in a serious way. It sees several papers a year. But it seems fair to say that the overall topics of investigation are not the logical systems presented in the any of the original papers but rather are adaptations of the logics to settings involving probability, belief revision, quantum information, and the like. Still, the work reported here has been the subject of several existing publications. And so it makes sense for us to make the case that the results in this paper are still relevant and do not follow from previously published results.

The book *Dynamic Epistemic Logic* by Hans van Ditmarsch, Wiebe van der Hoek, and Barteld Kooi [6] is a textbook presentation containing some of the content of this paper and [1],

with additional material on model checking, belief revision, and other topics. Section 6.4 presents the syntax of what it calls *action model logic* and writes as $\mathcal{L}_{KC\otimes}^{\text{act}}(A, P)$. At first glance, the syntax of $\mathcal{L}_{KC\otimes}^{\text{act}}(A, P)$ seems fairly close to the language $\mathcal{L}(\Sigma)$ presented in [1] and reviewed in Section 3 of this paper. A relatively small difference concerns the *action models* in $\mathcal{L}_{KC\otimes}^{\text{act}}(A, P)$. (In general, action models are like Kripke models together with a “precondition” function mapping worlds to sentences.) These are required to have the property that each agent’s accessibility relation is an equivalence relation; our treatment is more general and hence can present logics for epistemic actions such as “cheating” in games. But the main difference is that our language $\mathcal{L}(\Sigma)$ uses what everyone would take to be a bona fide syntax: sentences and program expressions are linearly ordered strings of symbols. In contrast, the syntax of $\mathcal{L}_{KC\otimes}^{\text{act}}(A, P)$ employs action models *directly*. Structured but unordered objects occur inside of sentences. In a different context, it would be like studying formal language and their connection to automata by studying something that was like a regular expression but allowed finite automata to directly occur inside some syntactic object.

We have no objection ourselves to this move. In fact, this was the presentation we chose in our first version [2] of this paper. But over the years we have found quite a lot of resistance to this presentation on the grounds that one is “mixing syntax and semantics.” Again, we do not assert this objection, but we *address* it by employing the large technical machinery that we see in [1] and also Sections 2 and 3. (We are keenly aware of the irony of our being criticized for “mixing syntax and semantics” in the ten-year-old publication [2], and after we “un-mixed” them in [1], we find others making the same natural move.)

We would also like to mention the paper “Logics of Communication and Change”, van Benthem, van Eijck and Kooi [4]. This paper presents completeness theorem for a logical system in the same family as ours. But as it happens, the paper studies a different system. To see the differences, it is worthwhile to note that the source of much of the work in this area concerns assertions of common knowledge following an action of some sort. In our setting, these would be written $[\alpha]\Box^*\varphi$. It turns out that there is no equivalence of the form (1.1) for assertions like this. This leads us to our Action Rule, an inference rule allowing the derivation of sentences of the kind under discussion. The idea in [4] is to start with propositional dynamic logic, called E-PDL in the paper (‘E’ for ‘epistemic’). Then one adds modalities corresponding to update models $[U, e]$; this modality would be like our $[\alpha]$, but in [4] as in [2] and [6], this U is an action model rather than a bona fide syntactic object. Then one proves that the addition can be translated away. This very interesting and suggestive result is not available in our setting. The paper [4] notes that “Indeed, reduction axioms are not available, as the logic with epistemic updates is more expressive than the logic without them. We think this is an infelicity of design.” This is somewhat debatable, since the additional expressive power in E-PDL is not something in wide use. “We have found no practical use for these [complex combinations of agent accessibility relations] at present, but they are the price that we cheerfully pay for having a language living in expressive harmony with its dynamic superstructure . . .” It also holds that “it’s completeness theorem [from [2]] is correspondingly mess.” This extra “mess” is due partly to the strictly “syntactic syntax”, partly to the explicit rewriting work (taken for granted in [4]), and partly to the noted “disharmony”. It is not known whether E-PDL is actually stronger than the logical systems in this paper. If it is, then this would show that the completeness result here is definitely not a special case of that in [4]. But again, the matter is open at this time: one cannot derive our result from [4] since the systems are *prima facie* different.

2 Definitions

This section provides all of our definitions. It is short on motivation, and we have situated the examples in Section 3.2, following all the definitions. See also Sections 1 and 2 of [1] for the motivation from epistemic logic and for a more leisurely presentation.

2.1 State models and propositions

We fix a set AtSen of *atomic sentences* and also a set \mathcal{A} of *agents*. All of our definitions are relative to these sets.

A *state model* is a triple $\mathbf{S} = (S, \mathcal{A}_{\mathbf{S}}, \|\cdot\|_{\mathbf{S}})$ consisting of a set S of “states”; a family $\mathcal{A}_{\mathbf{S}}$ of binary accessibility relations $\mathcal{A}_{\mathbf{S}} \subseteq S \times S$, one for each agent $A \in \mathcal{A}$; and a “valuation” (or a “truth” map) $\|\cdot\|_{\mathbf{S}} : \text{AtSen} \rightarrow \mathcal{P}(S)$, assigning to each atomic sentence p a set $\|p\|_{\mathbf{S}}$ of states. These are exactly Kripke models generalized by having one accessibility relation for each agent. We use the terminology of state models because there are other kinds of models, *action models* and *program models*, in our study. When dealing with a single fixed state model \mathbf{S} , we often drop the subscript \mathbf{S} from all the notation.

Definition Let SMod be the collection of all state models. An *epistemic proposition* is an operation φ defined on SMod such that for all $\mathbf{S} \in \text{SMod}$, $\varphi_{\mathbf{S}} \subseteq S$.

The collection of epistemic propositions is closed in various ways.

1. For each atomic sentence p we have an atomic proposition \mathbf{p} with $\mathbf{p}_{\mathbf{S}} = \|p\|_{\mathbf{S}}$.
2. If φ is an epistemic proposition, then so is $\neg\varphi$, where $(\neg\varphi)_{\mathbf{S}} = S \setminus \varphi_{\mathbf{S}}$.
3. If C is a set or class of epistemic propositions, then $\bigwedge C$ is an epistemic proposition, where

$$(\bigwedge C)_{\mathbf{S}} = \bigcap \{\varphi_{\mathbf{S}} : \varphi \in C\}.$$

4. Taking C above to be empty, we have an “*always true*” epistemic proposition \mathbf{tr} , with $\mathbf{tr}_{\mathbf{S}} = S$.
5. We also may take C in part 3 to be a two-element set $\{\varphi, \psi\}$; here we write $\varphi \wedge \psi$ instead of $\bigwedge\{\varphi, \psi\}$. We see that if φ and ψ are epistemic propositions, then so is $\varphi \wedge \psi$, with $(\varphi \wedge \psi)_{\mathbf{S}} = \varphi_{\mathbf{S}} \cap \psi_{\mathbf{S}}$.

6. If φ is an epistemic proposition and $A \in \mathcal{A}$, then $\Box_A \varphi$ is an epistemic proposition, with

$$(\Box_A \varphi)_{\mathbf{S}} = \{s \in S : \text{if } s \xrightarrow{A} t, \text{ then } t \in \varphi_{\mathbf{S}}\}. \quad (2.2)$$

7. If φ is an epistemic proposition and $\mathcal{B} \subseteq \mathcal{A}$, then $\Box_{\mathcal{B}}^* \varphi$ is an epistemic proposition, with

$$(\Box_{\mathcal{B}}^* \varphi)_{\mathbf{S}} = \{s \in S : \text{if } s \xrightarrow{\mathcal{B}^*} t, \text{ then } t \in \varphi_{\mathbf{S}}\}.$$

Here $s \xrightarrow{\mathcal{B}^*} t$ iff there is a sequence

$$s = u_0 \xrightarrow{A_1} u_1 \xrightarrow{A_2} \dots \xrightarrow{A_n} u_{n+1} = t$$

where $A_1, \dots, A_n \in \mathcal{B}$. In other words, there is a sequence of arrows labelled with agents from the set \mathcal{B} taking s to t . We allow $n = 0$ here, so $\xrightarrow{\mathcal{B}^*}$ includes the identity relation on S .

Syntactic and semantic notions It will be important for us to make a sharp distinction between syntactic and semantic notions. We have already begun to do this, speaking of atomic *sentences* and atomic *propositions*. The difference for us is that atomic sentences are entirely syntactic objects: we won't treat an atomic sentence p as anything except an unanalyzed mathematical object. On the other hand, this atomic sentence p also has associated with it the atomic proposition \mathbf{p} . As defined in point 1, \mathbf{p} will be a function whose domain is the (proper class of) state models, and it is defined by

$$\mathbf{p}_{\mathbf{S}} = \{s \in S : s \in \llbracket p \rrbracket_{\mathbf{S}}\}. \quad (2.3)$$

This difference may seem pedantic at first, and surely there are times when it is sensible to blur it. But for various reasons that will hopefully become clear, we need to insist on it.

Up until now, the only syntactic objects have been the atomic sentences $p \in \text{AtSen}$. But we can build the collections of *finitary* and *infinitary sentences* by the same definitions that we have seen, and then the work of the past section is the *semantics* of our logical languages. For example, we have sentences $p \wedge q$, $\Box_A \neg p$, and $\Box_B^* q$. These then have corresponding epistemic propositions as their semantics: $\mathbf{p} \wedge \mathbf{q}$, $\Box_A \neg \mathbf{p}$, and $\Box_B^* \mathbf{q}$, respectively. Note that the latter is a properly infinitary proposition (and so $\Box_B^* q$ is a properly infinitary sentence); it abbreviates an infinite conjunction.

2.2 Updates

A *transition relation* between state models \mathbf{S} and \mathbf{T} is a relation between the sets S and T ; i.e., a subset of $S \times T$. An *update* \mathbf{r} is a pair of operations

$$\mathbf{r} = (\mathbf{S} \mapsto \mathbf{S}(\mathbf{r}), \mathbf{S} \mapsto \mathbf{r}_{\mathbf{S}}),$$

where for each $\mathbf{S} \in \text{SMod}$, $\mathbf{r}_{\mathbf{S}} : \mathbf{S} \rightarrow \mathbf{S}(\mathbf{r})$ is a transition relation. We call $\mathbf{S} \mapsto \mathbf{S}(\mathbf{r})$ the *update map*, and $\mathbf{S} \mapsto \mathbf{r}_{\mathbf{S}}$ the *update relation*.

We continue our general discussion by noting that the collection of updates is closed in various ways.

1. **Skip**: there is an update called ‘‘Skip’’ and denoted $\mathbf{1}$, with $\mathbf{S}(\mathbf{1}) = \mathbf{S}$, and $\mathbf{1}_{\mathbf{S}}$ is the identity relation on \mathbf{S} .
2. *Sequential Composition*: if \mathbf{r} and \mathbf{s} are epistemic updates, then their composition $\mathbf{r}; \mathbf{s}$ is again an epistemic update, where $\mathbf{S}(\mathbf{r}; \mathbf{s}) = \mathbf{S}(\mathbf{r})(\mathbf{s})$, and $(\mathbf{r}; \mathbf{s})_{\mathbf{S}} = \mathbf{r}_{\mathbf{S}}; \mathbf{s}_{\mathbf{S}(\mathbf{r})}$. Here, we use on the right side the usual composition $;$ of relations.¹
3. *Union* (or *Non-deterministic choice*): If X is any set of epistemic updates, then the union $\bigsqcup X$ is an epistemic update, defined as follows. For each \mathbf{S} , the set of states of the model $\mathbf{S}(\bigsqcup X)$ is the *disjoint union* of all the sets of states in each model $\mathbf{S}(\mathbf{r})$ for $\mathbf{r} \in X$:

$$\{(s, \mathbf{r}) : \mathbf{r} \in X \text{ and } s \in \mathbf{S}(\mathbf{r})\}.$$

¹We are writing relational composition in left-to-right order in this paper.

Similarly, each accessibility relation $\overset{\Delta}{\rightarrow}$ is defined as the disjoint union of the corresponding accessibility relations in each model:

$$(t, \mathbf{r}) \overset{\Delta}{\rightarrow} (u, \mathbf{s}) \quad \text{iff} \quad \text{if } \mathbf{r} = \mathbf{s} \text{ and } t \overset{\Delta}{\rightarrow} u \text{ in } \mathbf{S}(\mathbf{r}).$$

The valuation $\|p\|_{\mathbf{S}(\sqcup X)}$ in $\mathbf{S}(\sqcup X)$ is the disjoint union of the valuations in each state model:

$$\|p\|_{\mathbf{S}(\sqcup X)} = \{(s, \mathbf{r}) : \mathbf{r} \in X \text{ and } s \in \|p\|_{\mathbf{S}(\mathbf{r})}\}.$$

Finally, the update relation $(\sqcup X)_{\mathbf{S}}$ between \mathbf{S} and $\mathbf{S}(\sqcup X)$ is the union of all the update relations $\mathbf{r}_{\mathbf{S}}$:

$$t (\sqcup X)_{\mathbf{S}} (u, \mathbf{r}) \quad \text{iff} \quad t \mathbf{r}_{\mathbf{S}} u.$$

4. Special case: *binary union*. The (disjoint) union of two epistemic updates \mathbf{r} and \mathbf{s} is an update $\mathbf{r} \sqcup \mathbf{s}$, given by $\mathbf{r} \sqcup \mathbf{s} = \sqcup\{\mathbf{r}, \mathbf{s}\}$.
5. Another special case: *Kleene star (iteration)*. We have the operation of Kleene star on updates:

$$\mathbf{r}^* = \sqcup\{\mathbf{1}, \mathbf{r}, \mathbf{r} \cdot \mathbf{r}, \dots, \mathbf{r}^n, \dots\}$$

where \mathbf{r}^n is recursively defined by $\mathbf{r}^0 = \mathbf{1}$, $\mathbf{r}^{n+1} = \mathbf{r}^n \cdot \mathbf{r}$.

6. Crash: We can also take $X = \emptyset$ in part 3. This gives an update called ‘‘Crash’’ and denoted $\mathbf{0}$ such that $\mathbf{S}(\mathbf{0})$ is the empty model for each \mathbf{S} , and $\mathbf{0}_{\mathbf{S}}$ is the empty relation.

The operations $\mathbf{r}; \mathbf{s}$, $\mathbf{r} \sqcup \mathbf{s}$ and \mathbf{r}^* are the natural analogues of the operations of union of relations, relational composition and iteration, and of the regular operations on programs in PDL. The intended meanings are: for $\mathbf{r}; \mathbf{s}$, sequential composition (*do r, then do s*); for $\mathbf{r} \sqcup \mathbf{s}$, non-deterministic choice (*do either r or s*); for \mathbf{r}^* , iteration (*repeat r some finite number of times*).

Standard updates An update \mathbf{a} is *standard* if for all state models \mathbf{S} , $(\mathbf{a}_{\mathbf{S}})^{-1}$ is a partial function. (The relation $(\mathbf{a}_{\mathbf{S}})^{-1}$ the inverse of the update relation; it is a subset of $\mathbf{S}(\mathbf{a}) \times \mathbf{S}$.)

Proposition 2.1 *The update $\mathbf{1}$ is standard. The composition of standard updates is standard, as is any union of standard updates.*

Updates Determine Dynamic Modalities If φ is an epistemic proposition and \mathbf{r} an update, then $[\mathbf{r}]\varphi$ is an epistemic proposition defined by

$$([\mathbf{r}]\varphi)_{\mathbf{S}} = \{s \in S : \text{for all } t \text{ such that } s \mathbf{r}_{\mathbf{S}} t, t \in \varphi_{\mathbf{S}(\mathbf{r})}\}. \quad (2.4)$$

We should compare (2.4) and (2.2). The point is that we may treat updates in a similar manner to other box-like modalities; the structure given by an update allows us to do this.

We also define the dual proposition $\langle \mathbf{r} \rangle \varphi$ by

$$(\langle \mathbf{r} \rangle \varphi)_{\mathbf{S}} = \{s \in S : \text{for some } t \text{ such that } s \mathbf{r}_{\mathbf{S}} t, t \in \varphi_{\mathbf{S}(\mathbf{r})}\}.$$

2.3 Action models and program models

Let Φ be the collection of all epistemic propositions. An (*epistemic*) *action model* is a triple $\Sigma = (\Sigma, \overset{\Delta}{\rightarrow}, \text{pre})$, where Σ is a set of *simple actions*, $\overset{\Delta}{\rightarrow}$ is an \mathcal{A} -indexed family of binary relations on Σ , and $\text{pre} : \Sigma \rightarrow \Phi$.

To model non-deterministic actions and non-simple actions (whose appearances to agents are not uniform on states), we define *epistemic program models*. In effect, this means that we decompose complex actions (‘programs’) into “simple” ones: they correspond to sets of simple, deterministic actions from a given action model.

A *program model* is defined as a pair $\pi = (\Sigma, \Gamma)$ consisting of an action model Σ and a set $\Gamma \subseteq \Sigma$ of *designated simple actions*. Each of the simple actions $\gamma \in \Gamma$ may be thought of as a possible “deterministic resolution” of the non-deterministic action π . As announced above, the intuition about the map called pre is that an action is executable in a given state only if all its preconditions hold at that state. We often spell out an epistemic program model as $(\Sigma, \overset{\Delta}{\rightarrow}, \text{pre}, \Gamma)$ rather than $((\Sigma, \overset{\Delta}{\rightarrow}, \text{pre}), \Gamma)$. Also, we usually drop the word “epistemic” and just refer to these as *program models*.

2.4 The update product

Given a state model $\mathbf{S} = (S, \overset{\Delta}{\rightarrow}_{\mathbf{S}}, \|\cdot\|_{\mathbf{S}})$ and an action model $\Sigma = (\Sigma, \overset{\Delta}{\rightarrow}, \text{pre})$, we define their *update product* to be the state model

$$\mathbf{S} \otimes \Sigma = (S \otimes \Sigma, \overset{\Delta}{\rightarrow}, \|\cdot\|_{\mathbf{S} \otimes \Sigma}),$$

given by the following: the new states are pairs of old states s and simple actions σ which are “consistent”, in the sense that all preconditions of the action σ “hold” at the state s

$$S \otimes \Sigma = \{(s, \sigma) \in S \times \Sigma : s \in \text{pre}(\sigma)\mathbf{S}\}. \quad (2.5)$$

The new accessibility relations are taken to be the “products” of the corresponding accessibility relations in the two frames; i.e., for $(s, \sigma), (s', \sigma') \in \mathbf{S} \otimes \Sigma$ we put

$$(s, \sigma) \overset{\Delta}{\rightarrow} (s', \sigma') \quad \text{iff} \quad s \overset{\Delta}{\rightarrow} s' \text{ and } \sigma \overset{\Delta}{\rightarrow} \sigma', \quad (2.6)$$

and the new valuation map $\|\cdot\|_{\mathbf{S} \otimes \Sigma} : \text{AtSen} \rightarrow \mathcal{P}(S \otimes \Sigma)$ is essentially given by the old valuation:

$$\|p\|_{\mathbf{S} \otimes \Sigma} = \{(s, \sigma) \in S \otimes \Sigma : s \in \|p\|_{\mathbf{S}}\}. \quad (2.7)$$

2.5 Updates induced by program models

Recall that we defined updates in Section 2.2. And above, in Section 2.3, we defined epistemic *program models*. Note that there is a big difference: the updates are pairs of operations on the class of all state models, and the program models are typically finite structures. We think of *program models* as capturing specific mechanisms, or algorithms, for inducing updates. This connection is made precise in the following definition.

Definition Let (Σ, Γ) be a program model. We define an update which we also denote (Σ, Γ) as follows:

1. $\mathbf{S}(\Sigma, \Gamma) = \mathbf{S} \otimes \Sigma$.
2. $s(\Sigma, \Gamma)_{\mathbf{S}}(t, \sigma)$ iff $s = t$ and $\sigma \in \Gamma$.

We call this *the update induced by* (Σ, Γ) .

Note that updates of the form (Σ, Γ) have the property that for all state models \mathbf{S} , the inverse of the update relation $(\Sigma, \Gamma)_{\mathbf{S}}$ is a partial function. That is, these updates are standard.

2.6 Operations on program models

1 and 0 We define program models **1** and **0** as follows: **1** is a one-action set $\{\sigma\}$ with $\sigma \xrightarrow{A} \sigma$ for all A , $\text{PRE}(\sigma) = \mathbf{tr}$, and with distinguished set $\{\sigma\}$. The point here is that the update induced by this program model is exactly the update **1** from Section 2.2. We purposely use the same notation. Similarly, we let **0** be the empty program model. Then its induced update is what we called **0** in Section 2.2.

Sequential Composition In all settings involving “actions” in some sense or other, sequential composition is a natural operation. In our setting, we would like to define a composition operation on program models, corresponding to the sequential composition of updates. Here is the relevant definition.

Let $\Sigma = (\Sigma, \xrightarrow{\quad}, \text{pre}_{\Sigma}, \Gamma_{\Sigma})$ and $\Delta = (\Delta, \xrightarrow{\quad}, \text{pre}_{\Delta}, \Gamma_{\Delta})$ be program models. We define the *composition*

$$\Sigma; \Delta = (\Sigma \times \Delta, \xrightarrow{\quad}, \text{pre}_{\Sigma; \Delta}, \Gamma_{\Sigma; \Delta})$$

to be the following program model:

1. $\Sigma \times \Delta$ is the cartesian product of the sets Σ and Δ .
2. $\xrightarrow{\quad}$ in the composition $\Sigma; \Delta$ is the family of product relations, in the natural way:

$$(\sigma, \delta) \xrightarrow{\quad} (\sigma', \delta') \quad \text{iff} \quad \sigma \xrightarrow{\quad} \sigma' \quad \text{and} \quad \delta \xrightarrow{\quad} \delta'.$$

3. $\text{pre}_{\Sigma; \Delta}(\sigma, \delta) = \langle (\Sigma, \sigma) \rangle \text{pre}_{\Delta}(\delta)$.
4. $\Gamma_{\Sigma; \Delta} = \Gamma_{\Sigma} \times \Gamma_{\Delta}$.

In the definition of pre , (Σ, σ) is an abbreviation for the induced update $(\Sigma, \{\sigma\})$ as defined in Section 2.5.

Unions If $\Sigma = (\Sigma, \xrightarrow{\quad}, \text{pre}_{\Sigma}, \Gamma_{\Sigma})$ and $\Delta = (\Delta, \xrightarrow{\quad}, \text{pre}_{\Delta}, \Gamma_{\Delta})$, we take $\Sigma \sqcup \Delta$ to be the disjoint union of the models, with union of the distinguished actions. The intended meaning is the *non-deterministic choice* between the programs represented by Σ and Δ . Here is the definition in more detail, generalized to arbitrary (possibly infinite) disjoint unions: let $\{\Sigma_i\}_{i \in I}$ be a family of program models, with $\Sigma_i = (\Sigma_i, \xrightarrow{\quad}, \text{pre}_i, \Gamma_i)$; we define their (*disjoint*) *union*

$$\bigsqcup_{i \in I} \Sigma_i = \left(\bigsqcup_{i \in I} \Sigma_i, \xrightarrow{\quad}, \text{pre}, \Gamma \right)$$

to be the model given by:

1. $\sqcup_{i \in I} \Sigma_i$ is $\bigcup_{i \in I} (\Sigma_i \times \{i\})$, the disjoint union of the sets Σ_i .
2. $(\sigma, i) \xrightarrow{A} (\tau, j)$ iff $i = j$ and $\sigma \xrightarrow{A} i \tau$.
3. $\text{pre}(\sigma, i) = \text{pre}_i(\sigma)$.
4. $\Gamma = \bigcup_{i \in I} (\Gamma_i \times \{i\})$.

Iteration Finally, we define an iteration operation by $\Sigma^* = \sqcup\{\Sigma^n : n \in N\}$. Here $\Sigma^0 = \mathbf{1}$, and $\Sigma^{n+1} = \Sigma^n; \Sigma$.

Our definition of the operations on program models are faithful to the corresponding operations on updates from Section 2.2.

Proposition 2.2 ([1]) *The update induced by a composition of program models is isomorphic to the composition of the induced updates. Similarly for sums and iteration, mutatis mutandis.*

Since we shall not use this result, we omit the proof.

2.7 Action signatures

Definition An *action signature* is a structure

$$\Sigma = (\Sigma, \xrightarrow{A}, (\sigma_1, \sigma_2, \dots, \sigma_n))$$

where $\Sigma = (\Sigma, \xrightarrow{A})$ is a finite Kripke frame, and $\sigma_1, \sigma_2, \dots, \sigma_n$ is an enumeration of Σ in a list without repetitions. We call the elements of Σ *action types*. When we deal with an action signature, our notation for the action types usually includes a subscript (even though this is occasionally redundant); thus the action types come with a number that indicates their position in the fixed enumeration of the action signature.

An action signature Σ together with an assignment of epistemic propositions to the action types in Σ gives us a full-fledged action model. And this is the exact sense in which an *action signature* is an abstraction of the notion of *action model*. We shall use action signatures in constructing logical languages.

Signature-based program models Let Σ be an action signature, let n be the number of action types in Σ , let $\Gamma \subseteq \Sigma$, and let $\vec{\psi} = \psi_1, \dots, \psi_n$ be a list of epistemic propositions. We obtain a program model $(\Sigma, \Gamma, \vec{\psi})$ in the following way:

1. The set of simple actions is Σ , and the accessibility relations are those given by the action signature.
2. For $j = 1, \dots, n$, $\text{pre}(\sigma_j) = \psi_j$.
3. The set of distinguished actions is Γ .

In the special case that Γ is the singleton set $\{\sigma_i\}$, we write the resulting signature-based program model as $(\Sigma, \sigma_i, \vec{\psi})$.

Finally, recall from Section 2.5 that every signature-based program model induces an update.

To summarize: *every action signature, set of distinguished action types in it, and tuple of epistemic propositions gives a program model in a canonical way. Every program model induces a standard update.*

2.8 Bisimulation-based notions of equivalence

In this section, we discuss natural notions of equivalence for some of the definitions which we have already seen. We begin by recalling the most important notion of equivalence for state models, *bisimulation*.

Definition Let \mathbf{S} and \mathbf{T} be state models. A *bisimulation* between \mathbf{S} and \mathbf{T} is a relation $R \subseteq S \times T$ such that whenever $s R t$, the following three properties hold:

1. $s \in \llbracket p \rrbracket_{\mathbf{S}}$ iff $t \in \llbracket p \rrbracket_{\mathbf{T}}$ for all atomic sentences p .
2. For $A \in \mathcal{A}$ and s' such that $s \xrightarrow{A} s'$, there is some t' such that $t \xrightarrow{A} t'$ and $s' R t'$.
3. For $A \in \mathcal{A}$ and t' such that $t \xrightarrow{A} t'$, there is some s' such that $s \xrightarrow{A} s'$ and $s' R t'$.

R is a *total bisimulation* if it is a bisimulation and in addition: for all $s \in S$ there is some $t \in T$ such that $s R t$; and vice-versa.

Proposition 2.3 *If there is a bisimulation R such that $s R t$, then s and t agree on all sentences φ in infinitary modal logic: $s \in \llbracket \varphi \rrbracket_{\mathbf{S}}$ iff $t \in \llbracket \varphi \rrbracket_{\mathbf{T}}$.*

Recall that \mathbf{SMod} is the class of all state models. We have spoken of states as the elements of state models, but we also use the term *states* to refer to the pairs (\mathbf{S}, s) with $\mathbf{S} \in \mathbf{SMod}$ and $s \in S$. The class of all states is itself a state model, except that its collection of states is a proper class rather than a set. Still, it makes sense to talk about bisimulation relations on the class of all states. The largest such is given by

$$(\mathbf{S}, s) \equiv (\mathbf{T}, t) \quad \text{iff} \quad \text{there is a bisimulation } R \text{ between } \mathbf{S} \text{ and } \mathbf{T} \text{ such that } s R t.$$

This relation \equiv is indeed an equivalence relation.

When \mathbf{S} and \mathbf{T} are clear from the context, we write $s \equiv t$ instead of $(\mathbf{S}, s) \equiv (\mathbf{T}, t)$.

Equivalence and preservation by bisimulation Since we are discussing notions of equivalence here, it makes sense to also think about epistemic propositions. Two propositions φ and ψ are equal if they are the same operation on \mathbf{SMod} . That is, for all \mathbf{S} , $\varphi_{\mathbf{S}} = \psi_{\mathbf{S}}$. Later we shall introduce syntactically defined languages and also proof systems to go with them; in due course we shall see other interesting notions of equivalence.

Moving towards a connection of propositions with bisimulation. we say that a proposition φ is *preserved by bisimulations* if whenever $(\mathbf{S}, s) \equiv (\mathbf{T}, t)$, then $s \in \varphi_{\mathbf{S}}$ iff $t \in \varphi_{\mathbf{T}}$.

Proposition 2.4 ([1]) *The propositions which are preserved by bisimulation include \mathbf{tr} and the atomic propositions \mathbf{p} , and they are closed under all of the (infinitary) operations on propositions from Section 2.1.*

Equivalence of updates We continue our discussion of equivalence with the relevant notion for updates.

Definition Updates \mathbf{a} and \mathbf{b} are *equivalent* if for all state models \mathbf{S} and \mathbf{T} and all total bisimulations R between \mathbf{S} and \mathbf{T} , $(\mathbf{a}_{\mathbf{S}})^{-1}; R; \mathbf{b}_{\mathbf{T}}$ is a total bisimulation between $\mathbf{S}(\mathbf{a})$ and $\mathbf{T}(\mathbf{b})$. We write $\mathbf{a} \sim \mathbf{b}$ for this relation.

Proposition 2.5 *Let $\mathbf{a} \sim \mathbf{b}$ and $\mathbf{c} \sim \mathbf{d}$. Then $\mathbf{a}; \mathbf{c} \sim \mathbf{b}; \mathbf{d}$, and also $\mathbf{a} \sqcup \mathbf{c} \sim \mathbf{b} \sqcup \mathbf{d}$.*

Proof Fix \mathbf{S} , \mathbf{T} and R . Then

$$\begin{aligned} (\mathbf{a}; \mathbf{c})_{\mathbf{S}}^{-1}; R; (\mathbf{b}; \mathbf{d})_{\mathbf{T}} &= (\mathbf{a}_{\mathbf{S}}; \mathbf{c}_{\mathbf{S}(\mathbf{a})})^{-1}; R; (\mathbf{b}_{\mathbf{T}}; \mathbf{d}_{\mathbf{T}(\mathbf{b})}) \\ &= (\mathbf{c}_{\mathbf{S}(\mathbf{a})})^{-1}; (\mathbf{a}_{\mathbf{S}})^{-1}; R; \mathbf{b}_{\mathbf{T}}; \mathbf{d}_{\mathbf{T}(\mathbf{b})} \end{aligned}$$

Since $(\mathbf{a}_{\mathbf{S}})^{-1}; R; \mathbf{b}_{\mathbf{T}}$ is a total bisimulation between $\mathbf{S}(\mathbf{a})$ and $\mathbf{T}(\mathbf{b})$, we have the first assertion.

For the second, note that $(\mathbf{a} \sqcup \mathbf{c})_{\mathbf{S}}^{-1}; R; (\mathbf{b} \sqcup \mathbf{d})_{\mathbf{T}}$ is the disjoint union of the total bisimulations $(\mathbf{a}_{\mathbf{S}})^{-1}; R; \mathbf{b}_{\mathbf{T}}$ and $(\mathbf{c}_{\mathbf{S}})^{-1}; R; \mathbf{d}_{\mathbf{T}}$. \dashv

Proposition 2.6 *Let \mathbf{a} and \mathbf{b} be standard updates. If φ is preserved by bisimulations and $\mathbf{a} \sim \mathbf{b}$, then $[\mathbf{a}]\varphi = [\mathbf{b}]\varphi$, and also $\langle \mathbf{a} \rangle \varphi = \langle \mathbf{b} \rangle \varphi$.*

Proof We check the first assertion only. Fix \mathbf{S} , and let $s \in S$ be such that that $s \in ([\mathbf{a}]\varphi)_{\mathbf{S}}$. Let $t \in \mathbf{S}(\mathbf{b})$ be such that $s \mathbf{b}_{\mathbf{S}} t$. We must show that $t \in \varphi_{\mathbf{S}(\mathbf{b})}$.

The identity relation $I_{\mathbf{S}}$ is a total bisimulation on \mathbf{S} . Let $R = (\mathbf{a}_{\mathbf{S}})^{-1}; I_{\mathbf{S}}; \mathbf{b}_{\mathbf{S}}$. The definition of action equivalence \sim implies that R is a total bisimulation between $\mathbf{S}(\mathbf{a})$ and $\mathbf{S}(\mathbf{b})$. Let $u \in \mathbf{S}(\mathbf{a})$ be such that $u R t$. Thus there is some $s' \in S$ such that $u (\mathbf{a}_{\mathbf{S}})^{-1} s' \mathbf{b}_{\mathbf{S}} t$. Since $(\mathbf{a}_{\mathbf{S}})^{-1}$ is a partial function, we have $s' = s$. Thus $s \mathbf{a}_{\mathbf{S}} u$. Since $s \in ([\mathbf{a}]\varphi)_{\mathbf{S}}$, we have $u \in \varphi_{\mathbf{S}(\mathbf{a})}$. And as φ is preserved by the bisimulation R , we have the desired conclusion: $t \in \varphi_{\mathbf{S}(\mathbf{b})}$. \dashv

Proposition 2.7 *Let \mathbf{a} and \mathbf{b} be standard. If $\mathbf{a} \sim \mathbf{b}$, then \mathbf{a} and \mathbf{b} have the same domain. That is, for all state models \mathbf{S} , $\text{dom}(\mathbf{a}_{\mathbf{S}}) = \text{dom}(\mathbf{b}_{\mathbf{S}})$.*

Proof The domains are $(\langle \mathbf{a} \rangle \mathbf{tr})_{\mathbf{S}}$ and $(\langle \mathbf{b} \rangle \mathbf{tr})_{\mathbf{S}}$. So the result follows from Proposition 2.6 and the fact that \mathbf{tr} is preserved by bisimulations. \dashv

Definition An update \mathbf{r} *preserves bisimulations* if the following two conditions hold:

1. If $s \mathbf{r}_{\mathbf{S}} s'$ and $(\mathbf{S}, s) \equiv (\mathbf{T}, t)$, then there is some t' such that $t \mathbf{r}_{\mathbf{T}} t'$ and $(\mathbf{S}(\mathbf{r}), s') \equiv (\mathbf{T}(\mathbf{r}), t')$.
2. If $t \mathbf{r}_{\mathbf{T}} t'$ and $(\mathbf{S}, s) \equiv (\mathbf{T}, t)$, then there is some s' such that $s \mathbf{r}_{\mathbf{S}} s'$ and $(\mathbf{S}(\mathbf{r}), s') \equiv (\mathbf{T}(\mathbf{r}), t')$.

An action model Σ *preserves bisimulations* if $\text{pre}(\sigma)$ is preserved under bisimulations for all $\sigma \in \Sigma$.

Proposition 2.8 ([1]) *Concerning bisimulation preservation:*

1. *The bisimulation preserving updates are closed under composition and (infinitary) unions.*
2. *If φ is preserved by bisimulations and \mathbf{r} preserves bisimulations, then $[\mathbf{r}]\varphi$ is preserved by bisimulations.*

Proposition 2.9 ([1]) *Let Σ be a bisimulation-preserving action model. Let $\Gamma \subseteq \Sigma$ be arbitrary. Then the update induced by (Σ, Γ) preserves bisimulation.*

Definition Let $\Sigma = (\Sigma, \xrightarrow{\cdot}, \text{pre})$ and $\Delta = (\Delta, \xrightarrow{\cdot}, \text{pre})$ be action models. As this notation indicates, we shall not introduce additional notation to differentiate the arrows and the pre functions on these action models. A *bisimulation* between Σ and Δ is a relation $R \subseteq \Sigma \times \Delta$ such that whenever $\sigma R \delta$, the following three properties hold:

1. $\text{pre}(\sigma) = \text{pre}(\delta)$.
2. For $A \in \mathcal{A}$ and σ' such that $\sigma \xrightarrow{A} \sigma'$, there is some δ' such that $\delta \xrightarrow{A} \delta'$ and $\sigma' R \delta'$.
3. For $A \in \mathcal{A}$ and δ' such that $\delta \xrightarrow{A} \delta'$, there is some σ' such that $\sigma \xrightarrow{A} \sigma'$ and $\sigma' R \delta'$.

We write $\sigma \sim \delta$ if there is a bisimulation R between Σ and Δ such that $\sigma R \delta$.

Let $\pi = (\Sigma, \Gamma)$ and $\rho = (\Delta, B)$ be program models. We write $\pi \sim \rho$ if there is a bisimulation between Σ and Δ such that the following hold:

1. Each $\sigma \in \Gamma$ belongs to the domain of R , and each $\delta \in B$ belongs to the image of R .
2. If $\sigma \in \Gamma$ and $\sigma R \delta$, then $\delta \in B$.
3. If $\delta \in B$ and $\sigma R \delta$, then $\sigma \in \Gamma$.

We write $\pi \sim \rho$ in this case.

Proposition 2.10 *Equivalent bisimulation-preserving program models induce equivalent updates.*

Proof Suppose that R is a bisimulation showing that $(\Sigma, \Gamma) \sim (\Delta, B)$. To check that the induced updates are equivalent, let \mathbf{S} and \mathbf{T} be state models, and let R' be a total bisimulation between them. We check that $((\Sigma, \Gamma)_{\mathbf{S}})^{-1}; R'; (\Delta, B)_{\mathbf{T}}$ is a total bisimulation between $\mathbf{S}(\Sigma, \Gamma)$ and $\mathbf{T}(\Delta, B)$. To save on some notation, call this relation Q .

We verify the bisimulation properties of Q . Let $(s, \sigma) Q (t, \delta)$. Recall that the updates induced by program models are standard. Hence we have

$$(s, \sigma) ((\Sigma, \Gamma)_{\mathbf{S}})^{-1} s R' t (\Delta, B)_{\mathbf{T}} (t, \delta).$$

It is clear from this that (s, σ) and (t, δ) satisfy the same atomic sentences. Suppose next that $(s', \sigma') \in \mathbf{S}(\Sigma, \Gamma)$ and $(s, \sigma) \xrightarrow{A} (s', \sigma')$. Note that since $(s', \sigma') \in \mathbf{S}(\Sigma, \Gamma)$, we also have $\sigma' \in \Gamma$.

Let t' be such that $t \xrightarrow{\Delta} t'$ and $s' R' t'$. Let δ' be such that $\delta \xrightarrow{\Delta} \delta'$ and $\sigma' R \delta'$. We have $\delta' \in B$ by one of the conditions in the definition of equivalence. Thus

$$(s', \sigma') ((\Sigma, \Gamma)_{\mathbf{S}})^{-1} s' R' t' (\Delta, B)_{\mathbf{T}} (t', \delta').$$

And $(t, \delta) \xrightarrow{\Delta} (t', \delta')$. This shows the second bisimulation condition, and the third is similar.

For the totality of Q , let $(s, \sigma) \in S \otimes \Sigma$. Let $t \in T$ and $\delta \in B$ be such that $s R' t$ and $\sigma R \delta$. Then $(t, \delta) \in T \otimes \Delta$ since $\text{pre}(\sigma) = \text{pre}(\delta)$, and since this proposition is preserved by bisimulations. We have $(s, \sigma) Q (t, \delta)$ because

$$(s, \sigma) ((\Sigma, \Gamma)_{\mathbf{S}})^{-1} s R' t (\Delta, B)_{\mathbf{T}} (t, \delta).$$

This completes the verification that Q is a total bisimulation. +

sentences φ	true	p_i	$\neg\varphi$	$\varphi \wedge \psi$	$\Box_A \varphi$	$\Box_{\mathcal{B}}^* \varphi$	$[\pi]\varphi$
programs π	skip	crash	$\sigma_i \psi_1 \cdots \psi_n$	$\pi \sqcup \rho$	$\pi; \rho$	π^*	
$\llbracket \text{true} \rrbracket$	=	tr		$\llbracket \text{skip} \rrbracket$	=	1	
$\llbracket p \rrbracket$	=	p		$\llbracket \text{crash} \rrbracket$	=	0	
$\llbracket \varphi \wedge \psi \rrbracket$	=	$\llbracket \varphi \rrbracket \wedge \llbracket \psi \rrbracket$		$\llbracket \sigma_i \psi_1 \cdots \psi_n \rrbracket$	=	$(\Sigma, \sigma_i, \llbracket \psi_1 \rrbracket \cdots \llbracket \psi_n \rrbracket)$	
$\llbracket \neg\varphi \rrbracket$	=	$\neg \llbracket \varphi \rrbracket$		$\llbracket \pi; \rho \rrbracket$	=	$\llbracket \pi \rrbracket; \llbracket \rho \rrbracket$	
$\llbracket \Box_A \varphi \rrbracket$	=	$\Box_A \llbracket \varphi \rrbracket$		$\llbracket \pi \sqcup \rho \rrbracket$	=	$\llbracket \pi \rrbracket \sqcup \llbracket \rho \rrbracket$	
$\llbracket \Box_{\mathcal{B}}^* \varphi \rrbracket$	=	$\Box_{\mathcal{B}}^* \llbracket \varphi \rrbracket$		$\llbracket \pi^* \rrbracket$	=	$\llbracket \pi \rrbracket^*$	
$\llbracket [\pi]\varphi \rrbracket$	=	$\llbracket [\pi] \rrbracket \llbracket \varphi \rrbracket$					

For $\mathcal{L}_1(\Sigma)$, we drop the π^* construct. For $\mathcal{L}_0(\Sigma)$, we drop the π^* and $\Box_{\mathcal{B}}^*$ constructs.

Figure 1: The language $\mathcal{L}(\Sigma)$ and its semantics, and the fragments $\mathcal{L}_0(\Sigma)$, and $\mathcal{L}_1(\Sigma)$.

3 The languages $\mathcal{L}(\Sigma)$

At this point, we have enough general definitions to present the syntax and semantics of the language $\mathcal{L}(\Sigma)$. Most of the remaining parts of this paper study these languages.

3.1 The syntax and semantics of $\mathcal{L}(\Sigma)$

Fix a action signature Σ . We present in Figure 1 a logical language $\mathcal{L}(\Sigma)$ which we study in the remainder of this paper. Actually, we have three languages there, the full language $\mathcal{L}(\Sigma)$ and the smaller fragments $\mathcal{L}_0(\Sigma)$ and $\mathcal{L}_1(\Sigma)$.

The number n which figures into the syntax is the number of action types in Σ . In the programs of the form $\sigma\psi_1 \cdots \psi_n$ we have *sentences* $\vec{\psi}$ rather than *epistemic propositions* (which we had written using boldface letters ψ_1, \dots, ψ_n in Section 2.2). Also, the signature Σ figures into the semantics exactly in those programs $\sigma\psi_1 \cdots \psi_n$; in those we require that $\sigma \in \Sigma$.

The second thing to note is that, as in *PDL*, we have two sorts of syntactic objects: sentences and programs. We call programs of the form $\sigma\psi_1 \cdots \psi_n$ *basic actions*. Note that they might not be “atomic” in the sense that the sentences ψ_j might themselves contain programs.

We use the following standard abbreviations: **false** = $\neg \text{true}$, $\varphi \vee \psi = \neg(\neg\varphi \wedge \neg\psi)$, $\varphi \rightarrow \psi = \neg(\varphi \wedge \neg\psi)$, $\Diamond_A \varphi = \neg \Box_A \neg\varphi$, $\Diamond_{\mathcal{B}}^* \varphi = \neg \Box_{\mathcal{B}}^* \neg\varphi$, and $\langle \pi \rangle \varphi = \neg [\pi] \neg\varphi$.

The semantics defines two operations by simultaneous recursion on $\mathcal{L}(\Sigma)$:

1. $\varphi \mapsto \llbracket \varphi \rrbracket$, taking the sentences of $\mathcal{L}(\Sigma)$ into epistemic propositions; and
2. $\pi \mapsto \llbracket \pi \rrbracket$, taking the programs of $\mathcal{L}(\Sigma)$ into program models (and hence into induced updates).

The formal definition is given in Figure 1. The first map $\varphi \mapsto \llbracket \varphi \rrbracket$ might be called the *truth map* for the language. When we began our study of state models, we started with a “valuation” (or a “truth” map) $\|\cdot\|_{\mathcal{S}} : \text{AtSen} \rightarrow \mathcal{P}(S)$, assigning to each atomic sentence p a set $\|p\|_{\mathcal{S}}$ of states. The truth map here extends this to sentences and actions of $\mathcal{L}(\Sigma)$. The overall definition is by simultaneous recursion on the $\mathcal{L}(\Sigma)$. We employ the standard device of speaking of the

definition in terms of a temporal metaphor. That is, we think of the definition of the semantics of a sentence or action as coming “after” the definitions of its subsentences and subactions.

With one key exception, the operations on the right-hand sides are immediate applications of our general definitions of the closure conditions on epistemic propositions from Section 2.1 and the operations on program models from Section 2.6. A good example to explain this is the clause for the semantics of sentences $[\pi]\varphi$. Assuming that we have a program model $\llbracket\pi\rrbracket$, we get an induced update in Section 2.5 which we again denote $\llbracket\pi\rrbracket$. We also have an epistemic proposition $\llbracket\varphi\rrbracket$. We can therefore form the epistemic proposition $\llbracket\llbracket\pi\rrbracket\rrbracket\llbracket\varphi\rrbracket$ (see equation (2.4) in Section 2.2). Note that we have overloaded the square bracket notation; this is intentional, and we have done the same with other notation as well.

Similarly, the semantics of *skip* and *crash* are the program models **1** and **0** of Section 2.6.

We also discuss the definition of the semantics for basic actions $\sigma_i\vec{\psi}$. For this, recall that we have a general definition of a signature-based program model $(\Sigma, \Gamma, \psi_1, \dots, \psi_n)$, where $\Gamma \subseteq \Sigma$ and the ψ 's are any epistemic propositions. What we have in the semantics of $\sigma_i\vec{\psi}$ is the special case of this where Γ is the singleton $\{\sigma_i\}$ and ψ_i is $\llbracket\psi_i\rrbracket$, a proposition which we already have defined when we come to define $\llbracket\sigma_i\vec{\psi}\rrbracket$.

3.2 Examples

In this section, we provide examples of the concepts from Sections 2.1–3.1. These examples are chosen with an eye towards one of the inexpressivity results in Sections 7.2 and 7.3 near the end of the paper. So we know that they may appear artificial. Still, we trust that having a suitably detailed example may help the reader.

In these examples, our set AtSen of atomic sentences is a two-element set $\{p, q\}$, and the set \mathcal{A} of agents is the two-element set $\{A, B\}$.

First, here is a family of state models C_n for even positive numbers n . C_n is a cycle of $5n$ points a_1, \dots, a_{5n} arranged as follows:

$$a_1 \xleftrightarrow{A} a_2 \xleftrightarrow{B} a_3 \quad \dots \quad a_{5n-1} \xleftrightarrow{A} a_{5n} \xleftrightarrow{B} a_1$$

Since n is even, for $1 \leq i \leq 5$, the connection is $a_{in-1} \xrightarrow{A} a_{in} \xrightarrow{B} a_{in+1}$. (We are taking subscripts modulo $5n$ here.) We also specify that p is true at all points except a_1 and a_{2n+1} , and q is true *only* at a_{4n+1} .

Let Σ_{pub} be the action signature given by $\Sigma = \{Pub\}$, $Pub \xrightarrow{A} Pub$, and $Pub \xrightarrow{B} Pub$. This action signature is one of the most important in the applications since it is used in the representation of *public announcements*.

Then we have $\mathcal{L}(\Sigma_{\text{pub}})$ and its sublanguages $\mathcal{L}_0(\Sigma_{\text{pub}})$ and $\mathcal{L}_1(\Sigma_{\text{pub}})$. One example of a sentence of $\mathcal{L}_1(\Sigma_{\text{pub}})$ is $\langle Pub p \rangle \diamond_{A,B}^* q$. (Without abbreviations, this would be $\neg[Pub p] \square_{A,B}^* \neg q$.) The point of this first example is to calculate $\llbracket \langle Pub p \rangle \diamond_{A,B}^* q \rrbracket_{C_n}$. This takes a few steps.

The definitions tell us that $\llbracket p \rrbracket = \mathbf{p}$, and so

$$\llbracket p \rrbracket_{C_n} = \mathbf{p}_{C_n} = \llbracket p \rrbracket_{C_n} = \{a_i : i \neq 1, 2n + 1\}.$$

We have a signature-based program model $(\Sigma_{\text{pub}}, Pub, \mathbf{p})$. (In more detail, Σ_{pub} is an action signature, our distinguished set $\Gamma \subseteq \Sigma$ is $\{Pub\}$ and $\text{PRE}(Pub)$ is the the proposition \mathbf{p} .) We

can take the update product of this with C_n to get the model $C_n \otimes (\Sigma_{\text{pub}}, \text{Pub}, \mathbf{p})$. The universe of this model is

$$\{(a_i, \text{Pub}) : 1 \leq i \leq 5n \ \& \ i \neq 1 \ \& \ i \neq 2n + 1\}.$$

The accessibilities are given by

$$\begin{aligned} (a_2, \text{Pub}) &\xleftrightarrow{B} (a_3, \text{Pub}) \xleftrightarrow{A} \dots & (a_{2n-1}, \text{Pub}) &\xleftrightarrow{A} (a_{2n}, \text{Pub}) \\ (a_{2n+1}, \text{Pub}) &\xleftrightarrow{A} (a_{2n+2}, \text{Pub}) \xleftrightarrow{B} \dots & (a_{5n-1}, \text{Pub}) &\xleftrightarrow{A} (a_{5n}, \text{Pub}) \end{aligned}$$

In this model p is true at all points, and q is true only at (a_{4n+1}, Pub) . The update relation $(\Sigma_{\text{pub}}, \text{Pub}, \mathbf{p})_{C_n}$ is

$$\{(a_i, (a_i, \text{Pub})) : 1 \leq i \leq 5n \ \& \ i \neq 1 \ \& \ i \neq 2n + 1\}.$$

The intuition is that when we relativize the model to p (that is, we update the model with a public announcement of p), a_1 and a_{2n+1} disappear. The cycle breaks into two disconnected components.

To save on notation, let us write D_n for the model $C_n \otimes (\Sigma_{\text{pub}}, \text{Pub}, \mathbf{p})$. It follows that

$$\llbracket q \rrbracket_{D_n} = \llbracket \mathbf{q} \rrbracket_{D_n} = \{(a_{4n+1}, \text{Pub})\},$$

and therefore that

$$\llbracket \diamond_{A,B}^* q \rrbracket_{D_n} = (\diamond_{A,B}^* \mathbf{q})_{D_n} = \{(a_i, \text{Pub}) : 2n + 1 \leq i \leq 5n\}.$$

It now follows that

$$\begin{aligned} \llbracket \langle \text{Pub } p \rangle \diamond_{A,B}^* q \rrbracket_{C_n} &= \{a_i : (a_i, \text{Pub}) \in D_n \ \& \ (a_i, \text{Pub}) \in \llbracket \diamond_{A,B}^* q \rrbracket_{D_n}\} \\ &= \{a_i : 2n + 2 \leq i \leq 5n\} \end{aligned}$$

Later, we are going to be especially interested in the points a_{n+1} and a_{3n+1} . The analysis above shows that a_{n+1} does not belong to $\llbracket \langle \text{Pub } p \rangle \diamond_{A,B}^* q \rrbracket_{C_n}$, but a_{3n+1} does belong to it. The intuition is that after we relativize the original cycle to p by deleting a_1 and a_{2n+1} , there is no path from a_{n+1} to a_{4n+1} . But even after we make the deletion, there is a path from a_{3n+1} to a_{4n+1} , and this is why a_{3n+1} satisfies the sentence $\langle \text{Pub } p \rangle \diamond_{A,B}^* q$.

A second example We next consider a different example based on another action signature. This is the action signature Pri^A of *completely private announcements to A*. It concerns two agents, A and B , and it has $\Sigma = \{\text{Pri}^A, \text{skip}\}$. The fixed enumeration here is that Pri^A comes first and skip comes second. We also have $\text{Pri}^A \xrightarrow{A} \text{Pri}^A$, $\text{Pri}^A \xrightarrow{B} \text{skip}$, $\text{skip} \xrightarrow{A} \text{skip}$, and $\text{skip} \xrightarrow{B} \text{skip}$.

$\mathcal{L}_1(\Sigma_{\text{pri}})$ contains the sentence $\langle \text{Pri}^A p \text{ true} \rangle \diamond_A^* \diamond_B \neg p$. We show in Section 7.3 that this sentence is not expressible in $\mathcal{L}_1(\Sigma_{\text{pub}})$, even by a set of sentences. We take this to be a formal confirmation that a logical system with private announcements is more powerful than a system with only public announcements.

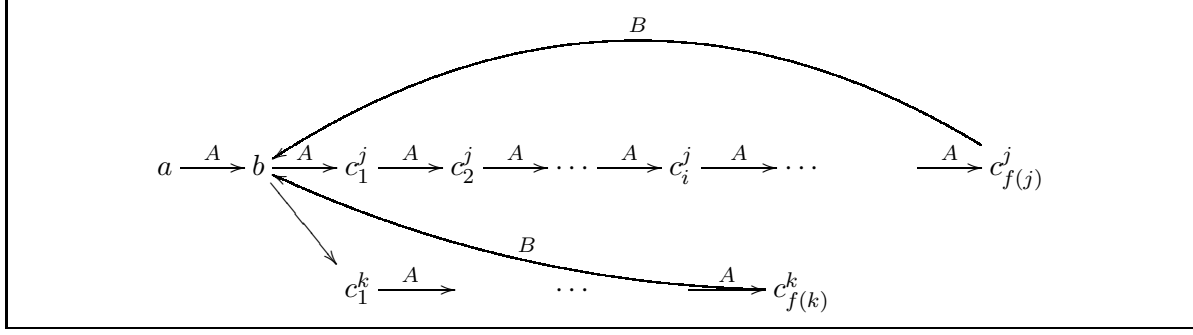


Figure 2: The model \mathbf{S}_f for J a two-element set $\{j, k\}$, omitting the reflexive arrows.

Let N^+ be the set $\{1, 2, \dots\}$ of non-zero natural numbers. We shall construct models \mathbf{S}_f , where $J \subseteq N^+$ and $f : J \rightarrow N^+$. (Note that we leave the domain J out of the notation \mathbf{S}_f .) We also construct models $\mathbf{T}_{f,j}$ where $J \subseteq N^+$, $f : J \rightarrow N^+$, and $j \in J$. The models \mathbf{S}_f and $\mathbf{T}_{f,j}$ have the same state set:

$$\{a, b\} \cup \{c_k^i : i \in J \text{ and } 1 \leq k \leq f(i)\}.$$

The atomic proposition p is true at all points except b . The arrows in \mathbf{S}_f are given by

1. $x \xrightarrow{A} x$ for all x .
2. $a \xrightarrow{A} b$.
3. $b \xrightarrow{A} c_1^i$ for all $i \in J$.
4. $c_k^i \xrightarrow{A} b$ for all $i \in J$ and $1 \leq k \leq f(i)$.
5. $c_{f(i)}^i \xrightarrow{B} b$ for all $i \in J$.

$\mathbf{T}_{f,j}$ has all these arrows and exactly one more:

$$a \xrightarrow{A} c_1^j.$$

The model \mathbf{S}_f are shown in Figure 2. Note that we only show the case when $J = \{j, k\}$; the general case is of course similar. We did not show the reflexive \xrightarrow{A} relations. And we remind the reader that $\mathbf{T}_{f,j}$ has one more arrow.

We shall need to calculate $\mathbf{S}_f \otimes (\Sigma_{\text{pri}}, \text{Pri}^A, \mathbf{p}, \mathbf{tr})$. We need the same thing for the models $\mathbf{T}_{f,j}$. To save on notation, we call the updated models $\hat{\mathbf{S}}_f$ and $\hat{\mathbf{T}}_{f,j}$. Finally, we need the update relations between \mathbf{S}_f and $\hat{\mathbf{S}}_f$ and between $\mathbf{T}_{f,j}$ and $\hat{\mathbf{T}}_{f,j}$.

Here are some facts about the structure of $\hat{\mathbf{S}}_f$:

1. $(a, \text{Pri}^A) \xrightarrow{A} (a, \text{Pri}^A)$.
2. $(a, \text{Pri}^A) \xrightarrow{A} (b, \text{Pri}^A)$ does not hold in $\hat{\mathbf{S}}_f$.
3. The only \xrightarrow{A} -successor of (a, Pri^A) is itself.

4. $(x, skip) \xrightarrow{A} (y, skip)$ whenever $x \xrightarrow{A} x$ in \mathbf{S}_f ; similarly for $(x, skip) \xrightarrow{B} (y, skip)$.
5. $c_k^i \xrightarrow{A} c_{k+1}^i$ for all $i \in J$ and $1 \leq k < f(i)$.

The structure of $\hat{\mathbf{T}}_{f,j}$ differs from $\hat{\mathbf{S}}_f$. Since $a \xrightarrow{A} c_1^j$ in $\mathbf{T}_{f,j}$, we have a path in $\hat{\mathbf{T}}_{f,j}$:

$$(a, Pri^A) \xrightarrow{A} (c_1^j, Pri^A) \xrightarrow{A} \dots \xrightarrow{A} (c_{f(j)}^j, Pri^A) \xrightarrow{B} (b, skip).$$

Once again, \mathbf{S}_f contains no path from (a, Pri^A) to any other point, in particular, no path to $(b, skip)$.

The update relation between \mathbf{S}_f and $\hat{\mathbf{S}}_f$ is $\{(x, (x, Pri^A)) : x \neq b\}$. And from this, we see that

$$\begin{aligned} \llbracket \langle Pri^A p, \text{true} \rangle \diamond_A^* \diamond_B \neg p \rrbracket_{\mathbf{S}_f} &= \{x : (x, Pri^A) \in \llbracket \diamond_A^* \diamond_B \neg p \rrbracket_{\hat{\mathbf{S}}_f}\} \\ &= \{c_k^i : i \in J \text{ and } 1 \leq k \leq f(i)\} \end{aligned}$$

In particular, $a \notin \llbracket \langle Pri^A p, \text{true} \rangle \diamond_A^* \diamond_B \neg p \rrbracket_{\mathbf{S}_f}$.

The update relation between $\mathbf{T}_{f,j}$ and $\hat{\mathbf{T}}_{f,j}$ is the same, and this time

$$\begin{aligned} \llbracket \langle Pri^A p, \text{true} \rangle \diamond_A^* \diamond_B \neg p \rrbracket_{\mathbf{T}_{f,j}} &= \{x : (x, Pri^A) \in \llbracket \diamond_A^* \diamond_B \neg p \rrbracket_{\hat{\mathbf{T}}_{f,j}}\} \\ &= \{x : x \neq b\} \end{aligned}$$

And this time, $a \in \llbracket \langle Pri^A p, \text{true} \rangle \diamond_A^* \diamond_B \neg p \rrbracket_{\mathbf{S}_f}$.

In Section 7.3, we shall use these models to prove that our sentence $\langle Pri^A p, \text{true} \rangle \diamond_A^* \diamond_B \neg p$ is not expressible by any sentence or even any set of sentences using public announcements only. The proof does not use any of our other results, and the reader may turn to it at this point.

3.3 Basic properties

Proposition 3.1 *Let φ be a sentence of $\mathcal{L}(\Sigma)$, and let α be an action of $\mathcal{L}(\Sigma)$. Then*

1. $\llbracket \varphi \rrbracket$ is preserved by bisimulation.
2. $\llbracket \alpha \rrbracket$ is standard and preserves bisimulation.

Proof By induction on $\mathcal{L}(\Sigma)$. For true and the atomic sentences p_i , we use Proposition 2.4. The same result takes care of the induction steps for all the sentential operators except $[\pi]\varphi$. For this, we use Proposition 2.8 part 2, and also the induction hypothesis. Turning to the programs, the standardness comes from Proposition 2.1 and the observation that signature-based program models induce standard updates. The assertion that the interpretation of programs of $\mathcal{L}(\Sigma)$ preserve bisimulation comes from Proposition 2.8 part 1; for the programs $\sigma_i \vec{\psi}$ we use Proposition 2.9 and the induction hypothesis. \dashv

In what follows, we shall use Proposition 3.1 without mentioning it.

4 The logical system for validity of $\mathcal{L}(\Sigma)$ sentences

We write $\models \varphi$ to mean that for all state models \mathbf{S} and all $s \in S$, $s \in \llbracket \varphi \rrbracket_{\mathbf{S}}$. In this case, we say that φ is *valid*.

Sublanguages We are of course interested in the full languages $\mathcal{L}(\Sigma)$. As have already been mentioned, the satisfiability problems for these languages are in general not recursively axiomatizable. (See [13] for details on this.) This is one of the reasons we also consider sublanguages $\mathcal{L}_0(\Sigma)$ and $\mathcal{L}_1(\Sigma)$: $\mathcal{L}_1(\Sigma)$ is the fragment without the action iteration construct π^* ; $\mathcal{L}_0(\Sigma)$ is the fragment without π^* and $\square_{\mathcal{B}}^*$. It turns out that $\mathcal{L}_0(\Sigma)$ is the easiest to study: it is of the same expressive power as ordinary multi-modal logic. The main completeness result of the paper is a *sound and complete* proof system for the validities in $\mathcal{L}_1(\Sigma)$.

In Figure 3 below we present a logic for $\mathcal{L}(\Sigma)$. We write $\vdash \varphi$ if φ can be obtained from the axioms of the system using its inference rules. We often omit the turnstile \vdash when it is clear from the context.

Logics generated by families of signatures Given a family \mathcal{S} of action signatures, we would like to combine all the logics $\{\mathcal{L}(\Sigma)\}_{\Sigma \in \mathcal{S}}$ into a single logic. Let us assume the signatures $\Sigma \in \mathcal{S}$ are mutually disjoint (otherwise, just choose mutually disjoint copies of these signatures). We define *the logic $\mathcal{L}(\mathcal{S})$ generated by the family \mathcal{S}* in the following way: the syntax is defined by taking the same definition we had in Figure 1 for the syntax of $\mathcal{L}(\Sigma)$, but in which on the side of the programs we take instead as *basic actions* all expressions of the form

$$\sigma_i \psi_1 \cdots \psi_n$$

where $\sigma \in \Sigma$, for some signature $\Sigma \in \mathcal{S}$, and n is the length of the listing of non-trivial action types of Σ . The semantics is again given by the same definition as in Figure 1, but in which the clause about $\sigma \psi_1 \cdots \psi_n$ refers to the appropriate signature: for every $\Sigma \in \mathcal{S}$, every $\sigma \in \Sigma$, if n is the length of the listing of Σ , then

$$\llbracket \sigma_i \psi_1 \cdots \psi_n \rrbracket = (\Sigma, \sigma, \llbracket \psi_1 \rrbracket, \dots, \llbracket \psi_n \rrbracket).$$

4.1 Soundness of the axioms

In this section, we check the soundness of the axioms of the system. The basic axioms are all routine, and so we omit the details on them.

Proposition 4.1 *The Atomic Permanence Axiom $[\sigma_i \vec{\psi}]p \leftrightarrow (\psi_i \rightarrow p)$ is sound.*

Proof Recall from Section 2.7 how $[\sigma_i \vec{\psi}]$ works; call this update \mathbf{r} . Fix a state model \mathbf{S} . The following are equivalent:

1. $s \in \llbracket [\sigma_i \vec{\psi}]p \rrbracket_{\mathbf{S}}$.
2. $s \in (\llbracket \mathbf{r} \rrbracket p)_{\mathbf{S}}$.
3. If $s \mathbf{r} s$, then $t \in p_{\mathbf{S}(\mathbf{r})}$.

Basic Axioms	
All sentential validities	
($[\pi]$ -normality)	$\vdash [\pi](\varphi \rightarrow \psi) \rightarrow ([\pi]\varphi \rightarrow [\pi]\psi)$
(\Box_A -normality)	$\vdash \Box_A(\varphi \rightarrow \psi) \rightarrow (\Box_A\varphi \rightarrow \Box_A\psi)$
* ($\Box_{\mathcal{C}}^*$ -normality)	$\vdash \Box_{\mathcal{C}}^*(\varphi \rightarrow \psi) \rightarrow (\Box_{\mathcal{C}}^*\varphi \rightarrow \Box_{\mathcal{C}}^*\psi)$
Action Axioms	
(Atomic Permanence)	$\vdash [\sigma_i\vec{\psi}]p \leftrightarrow (\psi_i \rightarrow p)$
(Partial Functionality)	$\vdash [\sigma_i\vec{\psi}]\neg\chi \leftrightarrow (\psi_i \rightarrow \neg[\sigma_i\vec{\psi}]\chi)$
(Action-Knowledge)	$\vdash [\sigma_i\vec{\psi}]\Box_A\varphi \leftrightarrow (\psi_i \rightarrow \bigwedge\{\Box_A[\sigma_j\vec{\psi}]\varphi : \sigma_i \xrightarrow{A} \sigma_j \text{ in } \Sigma\})$
** Action Mix Axiom	$\vdash [\pi^*]\varphi \rightarrow \varphi \wedge [\pi][\pi^*]\varphi$
* Epistemic Mix Axiom	$\vdash \Box_{\mathcal{C}}^*\varphi \rightarrow \varphi \wedge \bigwedge\{\Box_A\Box_{\mathcal{C}}^*\varphi : A \in \mathcal{C}\}$
Skip Axiom	$\vdash [skip]\varphi \leftrightarrow \varphi$
Crash Axiom	$\vdash [crash]false$
Composition Axiom	$\vdash [\pi][\rho]\varphi \leftrightarrow [\pi; \rho]\varphi$
Choice Axiom	$\vdash [\pi \sqcup \rho]\varphi \leftrightarrow [\pi]\varphi \wedge [\rho]\varphi$
<hr/>	
Modal Rules	
(Modus Ponens)	From $\vdash \varphi$ and $\vdash \varphi \rightarrow \psi$, infer $\vdash \psi$
($[\pi]$ -necessitation)	From $\vdash \psi$, infer $\vdash [\pi]\psi$
(\Box_A -necessitation)	From $\vdash \varphi$, infer $\vdash \Box_A\varphi$
* ($\Box_{\mathcal{C}}^*$ -necessitation)	From $\vdash \varphi$, infer $\vdash \Box_{\mathcal{C}}^*\varphi$
** Program Induction Rule	From $\vdash \chi \rightarrow \psi \wedge [\pi]\chi$, infer $\vdash \chi \rightarrow [\pi^*]\psi$
* Action Rule	
Let ψ be a sentence, let α be a simple action, and let \mathcal{C} be a set of agents. Let there be sentences χ_β for all β such that $\alpha \rightarrow_{\mathcal{C}}^* \beta$ (including α itself), and such that	
1. $\vdash \chi_\beta \rightarrow [\beta]\psi$;	
2. if $A \in \mathcal{C}$ and $\beta \xrightarrow{A} \gamma$, then $\vdash (\chi_\beta \wedge \text{PRE}(\beta)) \rightarrow \Box_A\chi_\gamma$.	
From these assumptions, infer $\vdash \chi_\alpha \rightarrow [\alpha]\Box_{\mathcal{C}}^*\psi$.	

Figure 3: The logical system for $\mathcal{L}(\Sigma)$. For $\mathcal{L}_1(\Sigma)$, we drop the ** axioms and rule; for $\mathcal{L}_0(\Sigma)$, we also drop the * axioms and rules. The definition of PRE in the Action Rule is given in Section 5.1.

4. If $(s, \sigma_i) \in \mathbf{S}(\mathbf{r})$, then $(s, \sigma_i) \in \mathbf{p}_{\mathbf{S}(\mathbf{r})}$.
5. If $s \in \llbracket \psi_i \rrbracket_{\mathbf{S}}$, then $s \in \llbracket p \rrbracket_{\mathbf{S}} = \mathbf{p}_{\mathbf{S}}$.
6. $s \in \llbracket \psi_i \rightarrow p \rrbracket_{\mathbf{S}}$.

Most of the individual equivalences are easy, and we only comment on $(3) \iff (4)$ and $(4) \iff (5)$. the definition of the update $\mathbf{r} = (\mathbf{\Sigma}, \sigma_i)$ implies that $\mathbf{S}(\mathbf{r}) = \mathbf{S} \otimes \mathbf{\Sigma}$. And $\mathbf{r}_{\mathbf{S}}$ has the property that everything which $s \in S$ is related to by $\mathbf{r}_{\mathbf{S}}$ is of the form (s, σ_i) , where σ_i is from the statement of this axiom and $(s, \sigma_i) \in \mathbf{S}(\mathbf{r})$. These points imply the equivalence $(3) \iff (4)$. For $(4) \iff (5)$ note that $(s, \sigma_i) \in \mathbf{S}(\mathbf{r})$ iff $s \in \text{pre}(\sigma_i)_{\mathbf{S}} = \llbracket \psi_i \rrbracket_{\mathbf{S}}$; also the definition of the update product in equation (2.7) implies that $(s, \sigma_i) \in \mathbf{p}_{\mathbf{S}(\mathbf{r})}$ iff $s \in \llbracket p \rrbracket_{\mathbf{S}}$. \dashv

Proposition 4.2 *The Partial Functionality Axiom $[\sigma_i \vec{\psi}] \neg \chi \leftrightarrow (\psi_i \rightarrow \neg[\sigma_i \vec{\psi}] \chi)$ is sound.*

Proof Again, let $\mathbf{r} = \llbracket \sigma_i \vec{\psi} \rrbracket$. Also, let $\chi = \llbracket \chi \rrbracket$. Fix a state model \mathbf{S} . The following are equivalent:

1. $s \in \llbracket [\sigma_i \vec{\psi}] \neg \chi \rrbracket_{\mathbf{S}}$.
2. $s \in (\llbracket \mathbf{r} \rrbracket \neg \chi)_{\mathbf{S}}$.
3. If $s \mathbf{r}_{\mathbf{S}} t$, then $t \in \neg \chi_{\mathbf{S}(\mathbf{r})}$.
4. If $s \mathbf{r}_{\mathbf{S}} t$, then $t \notin \chi_{\mathbf{S}(\mathbf{r})}$.
5. If $s \in \llbracket \psi_i \rrbracket_{\mathbf{S}}$, then $(s, \sigma_i) \notin (\llbracket \mathbf{r} \rrbracket \chi)_{\mathbf{S}}$.
6. If $s \in \llbracket \psi_i \rrbracket_{\mathbf{S}}$, then $s \notin \neg \chi_{\mathbf{S}(\mathbf{r})}$.
7. If $s \in \llbracket \psi_i \rrbracket_{\mathbf{S}}$, then $s \in (\neg \llbracket \mathbf{r} \rrbracket \chi)_{\mathbf{S}}$.
8. $s \in \llbracket \psi_i \rightarrow \neg \llbracket \mathbf{r} \rrbracket \chi \rrbracket_{\mathbf{S}}$.

The crucial equivalence here is $(6) \implies (5)$. The reason this holds is that in the action model for $\sigma_i \vec{\psi}$, there is just one distinguished world. So for each fixed $s \in S$, there is at most one t such that $s \mathbf{r}_{\mathbf{S}} t$; i.e., (s, σ_i) . \dashv

Proposition 4.3 *The Action-Knowledge Axiom*

$$[\sigma_i \vec{\psi}] \Box_A \varphi \leftrightarrow (\psi_i \rightarrow \bigwedge \{ \Box_A [\sigma_j \vec{\psi}] \varphi : \sigma_i \xrightarrow{A} \sigma_j \text{ in } \mathbf{\Sigma} \})$$

is sound.

Proof Again let $\mathbf{r} = \llbracket \sigma_i \vec{\psi} \rrbracket$. Fix a state model \mathbf{S} . The following are equivalent:

1. $s \in \llbracket [\sigma_i \vec{\psi}] \Box_A \varphi \rrbracket_{\mathbf{S}}$.
2. $s \in [\mathbf{r}] \llbracket \Box_A \varphi \rrbracket_{\mathbf{S}}$.
3. If $s \mathbf{r}_{\mathbf{S}} u$, then $u \in \llbracket \Box_A \varphi \rrbracket_{\mathbf{S}(\mathbf{r})}$.
4. If $s \in \llbracket \psi_i \rrbracket_{\mathbf{S}}$, then $(s, \sigma_i) \in \llbracket \Box_A \varphi \rrbracket_{\mathbf{S}(\mathbf{r})}$.
5. If $(s, \sigma_i) \in \mathbf{S}(\mathbf{r})$, then for all (t, σ_j) such that $(t, \sigma_j) \in \mathbf{S}(\mathbf{r})$, $s \xrightarrow{A} t$ and $\sigma_i \xrightarrow{A} \sigma_j$, we have $(t, \sigma_j) \in \llbracket \varphi \rrbracket_{\mathbf{S}(\mathbf{r})}$.
6. If $(s, \sigma_i) \in \mathbf{S}(\mathbf{r})$, then for all t and all σ_j such that $s \xrightarrow{A} t$ and $\sigma_i \xrightarrow{A} \sigma_j$: if $(t, \sigma_j) \in \mathbf{S}(\mathbf{r})$, then $(t, \sigma_j) \in \llbracket \varphi \rrbracket_{\mathbf{S}(\mathbf{r})}$.
7. If $(s, \sigma_i) \in \mathbf{S}(\mathbf{r})$, then for all t and σ_j such that $s \xrightarrow{A} t$ and $\sigma_i \xrightarrow{A} \sigma_j$: $t \in \llbracket [\sigma_j \vec{\psi}] \varphi \rrbracket_{\mathbf{S}}$.
8. If $s \in \llbracket \psi_i \rrbracket_{\mathbf{S}}$, then for all σ_j such that $\sigma_i \xrightarrow{A} \sigma_j$, $s \in \llbracket \Box_A [\sigma_j \vec{\psi}] \varphi \rrbracket_{\mathbf{S}}$.
9. $s \in \llbracket \psi_i \rightarrow \bigwedge \{ \Box_A [\sigma_j \vec{\psi}] \varphi : \sigma_i \xrightarrow{A} \sigma_j \} \rrbracket_{\mathbf{S}}$.

+

Proposition 4.4 *The Action Mix Axiom $[\pi^*] \varphi \rightarrow \varphi \wedge [\pi][\pi^*] \varphi$ is sound. The Program Induction Rule is also sound: from $\vdash \chi \rightarrow \psi \wedge [\pi] \chi$, infer $\vdash \chi \rightarrow [\pi^*] \psi$.*

Proof These are standard.

+

Proposition 4.5 *The Skip Axiom $[\text{skip}] \varphi \leftrightarrow \varphi$ is sound.*

Proof Fix a state model \mathbf{S} . Recall that the semantics of *skip* is the update $\mathbf{1}$. So the following are equivalent:

1. $s \in \llbracket [\text{skip}] \varphi \rrbracket_{\mathbf{S}}$.
2. If $s \mathbf{1}_{\mathbf{S}} t$, then $t \in \llbracket \varphi \rrbracket_{\mathbf{S}(\mathbf{1})}$.
3. $s \in \llbracket \varphi \rrbracket_{\mathbf{S}}$.

+

Proposition 4.6 *The Crash Axiom $[\text{crash}] \text{false}$ is sound.*

Proof Recall that $\llbracket \text{crash} \rrbracket = \mathbf{0}$, the update such that $\mathbf{S}(\mathbf{0})$ is the empty model, and $\mathbf{0}_{\mathbf{S}}$ is the empty relation. Working through the definitions, $[\text{crash}] \text{false}$ is easily seen to hold vacuously.

+

Proposition 4.7 *The Composition Axiom $[\pi; \rho] \varphi \leftrightarrow [\pi][\rho] \varphi$ is sound.*

Proof Write \mathbf{r} for $\llbracket \pi \rrbracket$ and \mathbf{b} for $\llbracket \rho \rrbracket$. Fix a state model \mathbf{S} . The following are equivalent:

1. $s \in \llbracket [\pi; \rho] \varphi \rrbracket_{\mathbf{S}}$.
2. If $s \llbracket [\pi; \rho] \rrbracket_{\mathbf{S}} u$, then $u \in \llbracket \varphi \rrbracket_{\mathbf{S}(\mathbf{r}; \mathbf{b})}$.
3. If $s \llbracket (\mathbf{r}; \mathbf{b}) \rrbracket_{\mathbf{S}} u$, then $u \in \llbracket \varphi \rrbracket_{\mathbf{S}(\mathbf{r}; \mathbf{b})}$.
4. If $s \mathbf{r}_{\mathbf{S}} t$ and $t \mathbf{b}_{\mathbf{S}(\mathbf{r})} u$, then $u \in \llbracket \varphi \rrbracket_{\mathbf{S}(\mathbf{r}; \mathbf{b})}$.
5. If $s \mathbf{r}_{\mathbf{S}} t$, then $t \in \llbracket [\rho] \varphi \rrbracket_{\mathbf{S}(\mathbf{r})}$.
6. $s \in \llbracket [\pi][\rho] \varphi \rrbracket_{\mathbf{S}}$.

The equivalence of (3) and (4) is by the definition of relational composition. The remaining equivalences are from the semantic definitions. The equivalence of (4) and (5) is by the fact that $\mathbf{S}(\mathbf{r}; \mathbf{b}) = \mathbf{S}(\mathbf{r})(\mathbf{b})$. \dashv

Proposition 4.8 *The Choice Axiom $[\pi \sqcup \rho] \varphi \leftrightarrow [\pi] \varphi \wedge [\rho] \varphi$ is sound.*

Proof Fix a state model \mathbf{S} ; we drop \mathbf{S} from the notation in the rest of this proof. Write γ for $\pi \sqcup \rho$, \mathbf{r} for $\llbracket [\pi] \rrbracket$, \mathbf{b} for $\llbracket [\rho] \rrbracket$, and \mathbf{c} for $\llbracket [\gamma] \rrbracket$. Then the following are equivalent:

1. $s \in \llbracket [\pi \sqcup \rho] \varphi \rrbracket_{\mathbf{S}}$.
2. If $s \mathbf{c} u$, then $u \in \llbracket \varphi \rrbracket_{\mathbf{S}(\mathbf{c})}$.
3. If $s \mathbf{r} t$, then $t \in \llbracket \varphi \rrbracket_{\mathbf{S}(\mathbf{c})}$; and if $s \mathbf{b} t'$, then $t' \in \llbracket \varphi \rrbracket_{\mathbf{S}(\mathbf{c})}$.
4. If $s \mathbf{r} t$, then $t \in \llbracket \varphi \rrbracket_{\mathbf{S}(\mathbf{r})}$; and if $s \mathbf{b} t'$, then $t' \in \llbracket \varphi \rrbracket_{\mathbf{S}(\mathbf{b})}$.
5. $s \in \llbracket [\pi] \varphi \rrbracket_{\mathbf{S}}$ and $s \in \llbracket [\rho] \varphi \rrbracket_{\mathbf{S}}$.
6. $s \in \llbracket [\pi] \varphi \wedge [\rho] \varphi \rrbracket_{\mathbf{S}}$.

The equivalence (2) \iff (3) comes from the fact that each of the u such that $s \mathbf{c} u$ is either (a) an element t of $\mathbf{S}(\mathbf{r})$ related to s by \mathbf{r} , or else (b) an element t' of $\mathbf{S}(\mathbf{b})$ related to s by \mathbf{b} . This is by the definition of $\mathbf{r} \sqcup \mathbf{b}$.

We show the equivalence (3) \iff (4) by considering the cases (a) and (b) noted just above. We use the fact that the natural injections of $\mathbf{S}(\mathbf{r})$ and $\mathbf{S}(\mathbf{b})$ in $\mathbf{S}(\mathbf{c})$ are bisimulations, and also the fact that $\llbracket \varphi \rrbracket$ is preserved by bisimulations (see Proposition 3.1). \dashv

5 The Action Rule

Recall that our logical system is listed in Figure 3 above. We have shown the soundness of all of the axioms and rules, except for the Action Rule. But before we can even define the operation PRE that figures into the Action Rule, we need to discuss a structure that comes up in our work, the *canonical action model* Ω . And even after we define Ω , there is a fair amount of work to do before we can prove the soundness of the Action Rule.

5.1 The canonical action model Ω

Recall that we defined action models and program models in Sections 2.3. At this point, we define the *canonical action model* Ω .

Definition A *basic action* is a program of the form $\sigma\vec{\psi}$. A *simple action* of $\mathcal{L}(\Sigma)$ is a program in which neither the program sum operation \sqcup nor the iteration operation π^* occur. We use letters like α and β to denote simple actions *only*.

The canonical action model Ω We define a program model Ω in several steps. The actions of the model Ω (that is, the elements of its carrier set) are the simple actions of the language $\mathcal{L}(\Sigma)$ (as defined just above). For all A , the accessibility relation $\overset{A}{\rightarrow}$ is the smallest relation such that

1. $skip \overset{A}{\rightarrow} skip$.
2. $\sigma_i\vec{\varphi} \overset{A}{\rightarrow} \sigma_j\vec{\psi}$ iff $\sigma_i \overset{A}{\rightarrow} \sigma_j$ in Σ and $\vec{\varphi} = \vec{\psi}$.
3. If $\alpha \overset{A}{\rightarrow} \alpha'$ and $\beta \overset{A}{\rightarrow} \beta'$, then $\alpha; \beta \overset{A}{\rightarrow} \alpha'; \beta'$.

Proposition 5.1 *As a frame, Ω is locally finite: for each simple α , there are only finitely many β such that $\alpha \overset{A^*}{\rightarrow} \beta$.*

Proof By induction on α ; we use heavily the fact that the accessibility relations on Ω are the smallest family with their defining property. For the simple action expressions $\sigma\vec{\psi}$, we use the assumption that the action model Σ underlying all our definitions is finite. (Taking it to be locally finite would also be sufficient.) –

Next, we define $\text{PRE} : \Omega \rightarrow \mathcal{L}_1(\Sigma)$ by recursion so that

$$\begin{aligned} \text{PRE}(skip) &= \text{true} \\ \text{PRE}(crash) &= \text{false} \\ \text{PRE}(\sigma_i\vec{\psi}) &= \psi_i \\ \text{PRE}(\alpha; \beta) &= \langle \alpha \rangle \text{PRE}(\beta) \end{aligned}$$

This function PRE is not the function pre which is part of the structure of an epistemic action model. However, there is a connection: We are in the midst of defining the epistemic action model Ω , and its pre function is defined in terms of PRE.

Another point: the clause in the definition of PRE could read $\text{PRE}(\alpha; \beta) = \text{PRE}(\alpha) \wedge [\alpha]\text{PRE}(\beta)$. This is equivalent to what we have above. It is sometimes tempting to think that

the definition should be $\text{PRE}(\alpha; \beta) = \text{PRE}(\alpha) \wedge \langle \alpha \rangle \text{PRE}(\beta)$. But in this, the first conjunct is redundant: $\langle \alpha \rangle \text{PRE}(\beta)$ implies $\text{PRE}(\alpha)$.

We set

$$\text{pre}(\sigma) = \llbracket \text{PRE}(\sigma) \rrbracket.$$

This simple action model Ω is the *canonical epistemic action model*; it plays the same role in our work as the canonical model in modal logic.

Remark The structure $(\Omega, \xrightarrow{A}, \text{PRE})$ is entirely syntactic. It is *not* an action model. This contrasts with the canonical action model $\Omega = (\Omega, \xrightarrow{A}, \text{pre})$; the last component of this structure is semantic. The syntactic structure $(\Omega, \xrightarrow{A}, \text{PRE})$ is the one which is actually used in the statement of the Action Rule of the logical system. We emphasize this point to allay any suspicion that our logical system is formulated in terms of semantic concepts.

This is also perhaps a good place to remind the reader that neither PRE nor pre is a first-class symbol in $\mathcal{L}(\Sigma)$; it is only a defined symbol. In Section 6 below we shall introduce another language called $\mathcal{L}_1^+(\Sigma)$. In that language, PRE will be a first-class function symbol.

5.2 The main result about Ω

Definition For any $\alpha \in \Omega$, let $\hat{\alpha}$ be the program model $(\Omega, \{\alpha\})$. As in Section 2.5, we use the same notation $\hat{\alpha}$ to denote induced *update*. (However, it will be important to distinguish the two uses, and so we speak of the program model $\hat{\alpha}$ and also the update $\hat{\alpha}$.)

Theorem 5.2 *Let $\alpha \in \Omega$. Then there is a signature-based program model $(\Delta, \delta_i, \vec{\psi})$ such that*

1. *As updates, $\llbracket \alpha \rrbracket \sim (\Delta, \delta_i, \vec{\psi})$.*
2. *As propositions, $\text{pre}(\alpha) = \psi_i$.*
3. *As program models, $(\Delta, \delta_i, \vec{\psi}) \sim \hat{\alpha}$.*

In particular, as updates, $\llbracket \alpha \rrbracket \sim \hat{\alpha}$.

Proof By induction on α . For *skip*, we take $(\Delta, \delta_i, \vec{\psi})$ to be $\mathbf{1}$ from Section 2.6. Our semantics of *skip* is exactly the first point above, and the second follows from the definition of PRE earlier in this section. The last point comes from the fact that the only arrows from *skip* in Ω are $\text{skip} \xrightarrow{A} \text{skip}$ for all A .

For *crash*, we define $(\Delta, \delta_i, \vec{\psi})$ to be $\mathbf{0}$, the empty program model. This is not exactly what we want here. Instead, consider a one-action set $\{\sigma\}$ with no A -arrows for any agent A , $\text{PRE}(\sigma) = \mathbf{False}$. This gives a signature-based action model whose induced update is equivalent to *crash*. Our definition of PRE is that $\text{PRE}(\text{crash}) = \mathbf{false}$. And *crash* is not the source of any arrows in Ω .

We next consider an action $\sigma_i \vec{\psi}$. We take Δ to be Σ , the action signature with which we are working in this lemma. We also take δ_i to be σ_i . And for each j in the fixed enumeration of Σ , we take $\psi_j = \llbracket \psi_j \rrbracket$. Then the result follows from the definitions of the semantics of $\mathcal{L}(\Sigma)$ and of

PRE. The bisimulation relating $(\Sigma, \sigma_i, \vec{\psi})$ and $(\Omega, \sigma_i \vec{\psi})$ is the relation $\{(\sigma_j, \sigma_j \vec{\psi}) : 1 \leq j \leq n\}$. Here n is the number of elements in Σ .

Finally, assume our result for α and β . Let $(\Delta, \delta_i, \vec{\psi})$ and $(\Delta', \delta'_i, \vec{\psi}')$ satisfy our lemma for α and β . Then by Proposition 2.5,

$$\llbracket \alpha; \beta \rrbracket \sim (\Delta, \delta_i, \vec{\psi}); (\Delta', \delta'_i, \vec{\psi}'). \quad (5.2)$$

This is not quite what we want, since on the right we do not have a signature-based program model. Let the enumeration of Δ be $\delta_1, \dots, \delta_n$, and let the enumeration of Δ' be $\delta'_1, \dots, \delta'_m$. Let

$$f : \{1, \dots, nm\} \rightarrow \{1, \dots, n\} \times \{1, \dots, m\}$$

be a bijection. Let g and h be such that $f = g \times h$. Let $\Delta'' = \Delta \times \Delta'$, and enumerate this set by $\delta''_k = (\delta_{g(k)}, \delta'_{h(k)})$. For $1 \leq k \leq nm$, let

$$\chi_k = \langle (\Delta, \delta_{g(k)}, \vec{\psi}) \rangle \text{pre}(\delta'_{h(k)}).$$

Let k^* be such that $f(k^*) = (i, i')$. For our lemma, we consider $(\Delta'', \delta''_{k^*}, \vec{\chi})$. There is an obvious bisimulation between this model and the update on the right of equation (5.2) above. For the second assertion of our lemma,

$$\begin{aligned} \text{pre}(\alpha; \beta) &= \llbracket \langle \alpha \rangle \text{PRE}(\beta) \rrbracket \\ &= \langle \llbracket \alpha \rrbracket \rrbracket \text{PRE}(\beta) \rrbracket \\ &= \langle (\Delta, \delta_i, \vec{\psi}_i) \rangle \psi'_j \quad (*) \\ &= \chi_{k^*} \end{aligned}$$

In the equivalence marked (*), we used Proposition 2.6.

We turn to the last part. Let R and S be bisimulations showing $(\Delta, \delta_i, \vec{\psi}) \sim (\Omega, \alpha)$ and $(\Delta', \delta_j, \vec{\psi}') \sim (\Omega, \beta)$. Then the following bisimulation, called T , shows that $(\Delta'', \delta''_{k^*}, \vec{\chi}) \sim (\Omega, \alpha; \beta)$:

$$(\delta_c, \delta'_d) T \rho; \eta \quad \text{iff} \quad \delta_c R \rho \text{ and } \delta'_d S \eta.$$

This completes our induction. In the last point of this result, the assertion that $\llbracket \alpha \rrbracket \sim \hat{\alpha}$, we use Proposition 2.10 and parts (1) and (3) of the present result. \dashv

5.3 Soundness of the Action Rule

As we have mentioned, the Action Rule is the main rule in the system for $\mathcal{L}_1(\Sigma)$ that goes beyond the rules of $\mathcal{L}_0(\Sigma)$. It is an induction rule which in the setting of epistemic logic allows us to prove that common knowledge obtains after various actions. Here again is our statement of the Action Rule:

Let α be a simple action. Let ψ be a sentence, and let \mathcal{C} be a set of agents. Let there be sentences χ_β for all β such that $\alpha \rightarrow_{\mathcal{C}}^* \beta$ (including α itself), and such that

1. $\vdash \chi_\beta \rightarrow [\beta]\psi$.
2. If $A \in \mathcal{C}$ and $\beta \triangleleft \gamma$, then $\vdash (\chi_\beta \wedge \text{PRE}(\beta)) \rightarrow \square_{AX}\gamma$.

From these assumptions, infer $\vdash \chi_\alpha \rightarrow [\alpha] \square_{\mathcal{C}}^* \psi$.

Remark We use $\rightarrow_{\mathcal{C}}^*$ as an abbreviation for the reflexive and transitive closure of the relation $\bigcup_{A \in \mathcal{C}} \xrightarrow{A}$. Recall from Proposition 5.1 that there are only finitely many β such that $\alpha \rightarrow_{\mathcal{C}}^* \beta$. So even though the Action Rule might look like it takes infinitely many premises, it really only takes finitely many.

Remark It is possible to drop the Composition Axiom in favor of a more involved version of the Action Rule. The point is we shall later introduce normal forms for sentences, and using the Composition Axiom will greatly simplify these normal forms. Moreover, adding the Composition Axiom leads to shorter proofs. The Action Rule here is geared towards those normal forms. So if we were to drop the Composition Axiom, we would need a stronger, more complicated, formulation of the Action Rule, one which involved *sequences* of actions. It is not terribly difficult to formulate such a rule, and completeness can be obtained by an elaboration of the work which we shall do.

Lemma 5.3 $s \in \llbracket \langle \alpha \rangle \diamond_{\mathcal{C}}^* \varphi \rrbracket_{\mathbf{S}}$ iff there is a sequence of states from \mathcal{S}

$$s = s_0 \xrightarrow{A_1} s_1 \xrightarrow{A_2} \cdots \xrightarrow{A_{k-1}} s_{k-1} \xrightarrow{A_k} s_k$$

where $k \geq 0$, and also a sequence of actions of the same length k ,

$$\alpha = \alpha_0 \xrightarrow{A_1} \alpha_1 \xrightarrow{A_2} \cdots \xrightarrow{A_{k-1}} \alpha_{k-1} \xrightarrow{A_k} \alpha_k$$

such that $A_i \in \mathcal{C}$ and $s_i \in \text{pre}(\alpha_i)_{\mathbf{S}}$ for all $0 \leq i < k$, and $s_k \in \llbracket \langle \alpha_k \rangle \varphi \rrbracket_{\mathbf{S}}$.

Remark The case $k = 0$ just says that $s \in \llbracket \langle \alpha \rangle \diamond_{\mathcal{C}}^* \varphi \rrbracket_{\mathbf{S}}$ is implied by $s \in \llbracket \langle \alpha \rangle \varphi \rrbracket_{\mathbf{S}}$.

Proof The following are equivalent:

1. $s \in \llbracket \langle \alpha \rangle \diamond_{\mathcal{C}}^* \varphi \rrbracket_{\mathbf{S}}$.
2. $s \in (\llbracket \langle \alpha \rangle \rrbracket \llbracket \diamond_{\mathcal{C}}^* \varphi \rrbracket)_{\mathbf{S}}$.
3. $s \in (\llbracket \hat{\alpha} \rrbracket \llbracket \diamond_{\mathcal{C}}^* \varphi \rrbracket)_{\mathbf{S}}$.
4. $s \in \text{pre}(\alpha)_{\mathbf{S}}$, and $(s, \alpha) \in \llbracket \diamond_{\mathcal{C}}^* \varphi \rrbracket_{\mathbf{S} \otimes \Omega}$.
5. $s \in \text{pre}(\alpha)_{\mathbf{S}}$, and for some $k \geq 0$ there is a sequence in $\mathbf{S} \otimes \Omega$,

$$(s, \alpha) = t_0 \xrightarrow{A_1} t_1 \xrightarrow{A_2} \cdots \xrightarrow{A_{k-1}} t_{k-1} \xrightarrow{A_k} t_k$$

such that $A_i \in \mathcal{C}$ and $t_k \in \llbracket \varphi \rrbracket_{\mathbf{S} \otimes \Omega}$.

6. There are sequences of $s = s_0, \dots, s_k$ and $\alpha_0, \dots, \alpha_k$ as in the statement of this lemma.

The first equivalence is by the semantics of $\mathcal{L}(\Sigma)$. The equivalence (2) \iff (3) uses the equality $\llbracket \alpha \rrbracket = \hat{\alpha}$ which we saw in the concluding statement of Theorem 5.2 in Section 5.2, and also Proposition 2.6. Equivalence (3) \iff (4) uses our overall definitions and the structure of Ω as an action model. (4) \iff (5) is just the semantics of $\diamond_{\mathcal{C}}^*$. Finally, the equivalence (5) \iff (6) again uses the conclusion of Theorem 5.2. That is, for all i , $(s_i, \alpha) \in \mathbf{S} \otimes \Omega$ iff $s_i \in \text{pre}(\alpha_i)_{\mathbf{S}}$. \dashv

Proposition 5.4 *The Action Rule is sound.*

Proof Assume that $s \in \llbracket \chi_\alpha \rrbracket_{\mathbf{S}}$ but also $s \in \llbracket \langle \alpha \rangle \diamond_{\mathcal{C}}^* \neg \psi \rrbracket_{\mathbf{S}}$. According to Lemma 5.3, there is a labeled sequence of states from S

$$s = s_0 \rightarrow_{A_1} s_1 \rightarrow_{A_2} \cdots \rightarrow_{A_{k-1}} s_{k-1} \rightarrow_{A_k} s_k$$

where $k \geq 0$ and each $A_i \in \mathcal{C}$, and also a sequence of actions of length k , with the same labels,

$$\alpha = \alpha_0 \rightarrow_{A_1} \alpha_1 \rightarrow_{A_2} \cdots \rightarrow_{A_{k-1}} \alpha_{k-1} \rightarrow_{A_k} \alpha_k$$

such that $s_i \in \text{pre}(\alpha_i)_{\mathbf{S}}$ for all $0 \leq i < k$, and $s_k \in \llbracket \langle \alpha_k \rangle \neg \psi \rrbracket_{\mathbf{S}}$. If $k = 0$, we would have $s \in \llbracket \langle \alpha \rangle \neg \psi \rrbracket_{\mathbf{S}}$. But one of the assumptions in the statement of the Action Rule is that $\vdash \chi_\alpha \rightarrow [\alpha]\psi$. So we would have $s \in \llbracket [\alpha]\psi \rrbracket_{\mathbf{S}}$. This would be a contradiction.

Now we argue the case $k > 0$. We show by induction on $1 \leq i \leq k$ that $s_i \in \llbracket \chi_{\alpha_i} \rrbracket_{\mathbf{S}}$. The case $i = 0$ is the opening assumptions of this proof. Assume that $s_i \in \llbracket \chi_{\alpha_i} \rrbracket_{\mathbf{S}}$. By hypothesis, $s_i \in \text{pre}(\alpha_i)_{\mathbf{S}}$. In view of the second assumption in the Action Rule, $s_i \in \llbracket \square_{A_{i+1}} \chi_{\alpha_{i+1}} \rrbracket_{\mathbf{S}}$. Hence $s_{i+1} \in \llbracket \chi_{\alpha_{i+1}} \rrbracket_{\mathbf{S}}$. This completes our induction.

In particular, $s_k \in \llbracket \chi_{\alpha_k} \rrbracket_{\mathbf{S}}$. Using again the first assumption in the Action Rule, we have $s_k \in \llbracket [\alpha_k]\psi \rrbracket_{\mathbf{S}}$. This is a contradiction. \dashv

5.4 Syntactic Facts

At this point, we have presented the semantic facts which we need concerning $\mathcal{L}_1(\Sigma)$. These include the soundness of the logical system for validity. To prove completeness, we also need some syntactic facts. We could have presented this section earlier, but since it leans on the Action Rule, we have delayed it until establishing the soundness of that rule had been established.

In this section, α, β , etc. denote simple actions in $\mathcal{L}_1(\Sigma)$.

A stronger form of the Action-Knowledge Axiom At this point, we establish a stronger form of the Action-Knowledge Axiom. In Figure 3 in Section 4, this axiom was stated only for basic actions. The strengthenings here is to *simple* actions, that is, to compositions of basic actions, *skip*, and *crash*.

Lemma 5.5 *The Action-Knowledge Axiom is provable for all simple actions α :*

$$\vdash [\alpha]\square_A\varphi \leftrightarrow (\text{PRE}(\alpha) \rightarrow \bigwedge \{ \square_A[\beta]\varphi : \alpha \xrightarrow{A} \beta \text{ in } \Omega \}) \quad (5.3)$$

Proof By induction on α . If α is *skip*, $\text{PRE}(\alpha) = \text{true}$, the only β with $\alpha \xrightarrow{A} \beta$ is *skip*, and equivalence (5.3) reads:

$$\vdash [\text{skip}]\square_A\varphi \leftrightarrow (\text{true} \rightarrow \square_A[\text{skip}]\varphi)$$

And this is an easy consequence of propositional reasoning, the Skip Axiom, and \square_A -necessitation. If α is *crash*, $\text{PRE}(\alpha) = \text{false}$, and there are no β such that $\alpha \xrightarrow{A} \beta$. Equivalence (5.3) then reads:

$$\vdash [\text{crash}]\square_A\varphi \leftrightarrow (\text{false} \rightarrow \text{true}).$$

By the Crash Axiom and modal reasoning, $\vdash [\text{crash}] \Box_A \varphi$; and so the assertion just above holds.

If α is of the form $\sigma_i \vec{\psi}$, then we simply have the Action-Knowledge Axiom in the form we know it.

So assume our lemma for α' and α ; we prove it for $\alpha'; \alpha$. We show that

$$\vdash [\alpha'; \alpha] \Box_A \varphi \leftrightarrow (\text{PRE}(\alpha'; \alpha) \rightarrow \bigwedge \{ \Box_A [\beta'; \beta] \varphi : \alpha' \triangleq \beta'; \beta \text{ in } \Omega \}) \quad (5.4)$$

We start with the equivalence in (5.3), use $[\alpha']$ -necessitation and normality, and get

$$\vdash [\alpha'] [\alpha] \Box_A \varphi \leftrightarrow ([\alpha'] \text{PRE}(\alpha) \rightarrow \bigwedge \{ [\alpha'] \Box_A [\beta] \varphi : \alpha \triangleq \beta \text{ in } \Omega \}) \quad (5.5)$$

By the induction hypothesis on α' and several uses of the Composition Axiom, we have that for all β ,

$$\vdash [\alpha'] \Box_A [\beta] \varphi \leftrightarrow (\text{PRE}(\alpha') \rightarrow \bigwedge \{ \Box_A [\beta'; \beta] \varphi : \alpha' \triangleq \beta' \text{ in } \Omega \}).$$

The Composition Axiom and (5.5) lead to the provable equivalence of $[\alpha'; \alpha] \Box_A \varphi$ and

$$[\alpha'] \text{PRE}(\alpha) \rightarrow (\text{PRE}(\alpha') \rightarrow \bigwedge \{ \Box_A [\beta'; \beta] \varphi : \alpha \triangleq \beta \text{ and } \alpha' \triangleq \beta' \text{ in } \Omega \}).$$

But $\vdash \text{PRE}(\alpha'; \alpha) \leftrightarrow \text{PRE}(\alpha') \wedge [\alpha'] \text{PRE}(\alpha)$. In addition, we have a general fact $\alpha'; \alpha \triangleq \beta'; \beta$ iff $\alpha' \triangleq \beta'$ and $\alpha \triangleq \beta$. Using these observations and some propositional reasoning, we get (5.4), as desired. \dashv

Remark There are no sound versions of the Action-Knowledge Axiom for actions containing \sqcup . For example let \mathcal{A} be a singleton, hence omitted from the notation. Consider $\Sigma = \{\sigma, \tau\}$ this as an action signature with the enumeration σ, τ , and with (say) the arrows $\sigma \rightarrow \tau$ and $\tau \rightarrow \sigma$. Note that by Atomic Permanence $[\sigma pq]r$ is equivalent to $p \rightarrow r$, $[\tau pq]r$ is equivalent to $q \rightarrow r$, by Action-Knowledge and Atomic Permanence $[\sigma pq] \Box r$ is equivalent to $p \rightarrow \Box(q \rightarrow r)$, and $[\tau pq] \Box r$ is equivalent to $q \rightarrow \Box(p \rightarrow r)$, Consider also the sentence $[(\sigma pq) \sqcup (\tau pq)] \Box r$. By the Choice Axiom, it is equivalent to

$$(p \rightarrow \Box(q \rightarrow r)) \wedge (q \rightarrow \Box(p \rightarrow r)). \quad (5.6)$$

Now we did not define $\text{PRE}((\sigma pq) \sqcup (\tau pq))$, but the most reasonable choice is $p \vee q$. And we did not define the accessibility structure of actions containing \sqcup , but in this case the most likely choice is to have $(\sigma pq) \sqcup (\tau pq)$ relate to itself and nothing else. But then when we write out the right-hand side of the equivalence (5.3), we get

$$(p \vee q) \rightarrow (\Box(p \rightarrow r) \wedge \Box(q \rightarrow r)).$$

Clearly this is not equivalent to (5.6). Even if one were to change $\text{PRE}((\sigma pq) \sqcup (\tau pq))$ to, say true, or to $p \wedge q$, we still would not have an equivalence: (5.6) is stronger.

A stronger form of the Partial Functionality Axiom We shall also need the following result, a version of the Partial Functionality Axiom:

Lemma 5.6 $\vdash \langle \alpha \rangle \varphi \leftrightarrow \text{PRE}(\alpha) \wedge [\alpha] \varphi$.

Proof This is an induction, much like the proof of Lemma 5.5 above. \dashv

Syntactic bisimulation Our next set of results pertains to a syntactic notion of action equivalence, one with a bisimulation-like flavor.

Definition A *syntactic bisimulation* is a relation R on the set Ω of simple actions of $\mathcal{L}(\Sigma)$ with the following property: if $\alpha R \beta$, then

1. $\vdash \text{PRE}(\alpha) \leftrightarrow \text{PRE}(\beta)$.
2. For all α' and A such that $\alpha \xrightarrow{A} \alpha'$, there is some β' such that $\beta \xrightarrow{A} \beta'$ and $\alpha' R \beta'$.
3. For all β' and A such that $\beta \xrightarrow{A} \beta'$, there is some α' such that $\alpha \xrightarrow{A} \alpha'$ and $\alpha' R \beta'$.

We say that α and β are *provably equivalent* if there is some syntactic bisimulation relating them. We write $\alpha \equiv \beta$ in this case.

For sentences, we write $\varphi \equiv \psi$ and say that φ and ψ are *equivalent* if $\vdash \varphi \leftrightarrow \psi$.

Lemma 5.7 $\vdash \langle \alpha \rangle \text{true} \leftrightarrow \text{PRE}(\alpha)$.

Proof By induction on α . For $\alpha = \text{skip}$ and $\alpha = \text{crash}$, we use the Skip Axiom and the Crash Axiom, respectively. Here is the argument for α of the form $\sigma_i \vec{\psi}$. First, by necessitation we have $\vdash [\sigma_i \vec{\psi}] \text{true}$. And by this and Partial Functionality, $\vdash [\sigma_i \vec{\psi}] \neg \text{true} \leftrightarrow \neg \psi_i$. So $\vdash \neg [\sigma_i \vec{\psi}] \neg \text{true} \leftrightarrow \psi_i$. That is, $\vdash \langle \sigma_i \vec{\psi} \rangle \text{true} \leftrightarrow \psi_i$.

Finally, assume the result for β . Then by normality and necessitation, $\vdash \langle \alpha \rangle \langle \beta \rangle \text{true} \leftrightarrow \langle \alpha \rangle \text{PRE}(\beta)$. So $\vdash \langle \alpha \rangle \langle \beta \rangle \text{true} \leftrightarrow \text{PRE}(\alpha; \beta)$. We conclude by showing as a general fact that $\vdash \langle \alpha \rangle \langle \beta \rangle \varphi \leftrightarrow \langle \alpha; \beta \rangle \varphi$. For this, the Composition Axiom tells us that $\vdash [\alpha][\beta] \neg \varphi \leftrightarrow [\alpha; \beta] \neg \varphi$. So $\vdash \neg [\alpha] \neg [\beta] \neg \varphi \leftrightarrow \neg [\alpha; \beta] \neg \varphi$. Thus $\vdash \langle \alpha \rangle \langle \beta \rangle \varphi \leftrightarrow \langle \alpha; \beta \rangle \varphi$, as desired. \dashv

Lemma 5.8 *The following monoid-type laws hold:*

1. $\vdash \text{PRE}(\alpha; \text{skip}) \leftrightarrow \text{PRE}(\alpha) \leftrightarrow \text{PRE}(\text{skip}; \alpha)$.
2. $\vdash \text{PRE}(\alpha; (\beta; \gamma)) \leftrightarrow \text{PRE}((\alpha; \beta); \gamma)$.

Proof We use the definitions to calculate

$$\begin{aligned} \text{PRE}(\alpha; \text{skip}) &= \langle \alpha \rangle \text{true} \\ \text{PRE}(\text{skip}; \alpha) &= \langle \text{skip} \rangle \text{PRE}(\alpha). \end{aligned}$$

We obtain a formal proof using Lemma 5.7 and the Skip Axiom. Turning to the second law,

$$\begin{aligned} \text{PRE}(\alpha; (\beta; \gamma)) &= \langle \alpha \rangle \text{PRE}(\beta; \gamma) \\ &= \langle \alpha \rangle \langle \beta \rangle \text{PRE}(\gamma) \\ &\equiv \langle \alpha; \beta \rangle \text{PRE}(\gamma) \\ &= \text{PRE}((\alpha; \beta); \gamma). \end{aligned}$$

The equivalence above which mentions \equiv uses the Composition Axiom. \dashv

Lemma 5.9 *Concerning the syntactic equivalence \equiv on Ω :*

1. *The relation \equiv is an equivalence relation.*
2. *If $\varphi_1 \equiv \psi_1, \dots, \varphi_n \equiv \psi_n$, then $\sigma_i \vec{\varphi} \equiv \sigma_i \vec{\psi}$.*
3. *$\alpha; \text{skip} \equiv \alpha \equiv \text{skip}; \alpha$.*
4. *$\alpha; (\beta; \gamma) \equiv (\alpha; \beta); \gamma$.*
5. *If $\alpha \equiv \alpha'$ and $\beta \equiv \beta'$, then $\alpha; \beta \equiv \alpha'; \beta'$.*

Proof The first part is routine. Part (2) uses the bisimulation consisting of all pairs $(\sigma_j \vec{\varphi}, \sigma_j \vec{\psi})$ such that $1 \leq j \leq n$ and for all i , $\varphi_i \equiv \psi_i$. Lemma 5.8 is used in parts (3) and (4). The rest of argument for part (3) is easy and we omit it. For part (4), we take R to be the set of pairs

$$(\alpha'; (\beta'; \gamma'), (\alpha'; \beta'); \gamma')$$

such that for some sequence w of \rightarrow_A with $A \in \mathcal{A}^*$, α' is reachable from α via w , and similarly for β' and γ' (via the same w). Part (5) is similar. \dashv

Lemma 5.10 *For all $A \in \mathcal{C}$ and all β such that $\alpha \rightarrow_A \beta$,*

1. $\vdash [\alpha] \Box_{\mathcal{C}}^* \psi \rightarrow [\alpha] \psi$.
2. $\vdash [\alpha] \Box_{\mathcal{C}}^* \psi \wedge \text{PRE}(\alpha) \rightarrow \Box_A [\beta] \Box_{\mathcal{C}}^* \psi$.

Proof Part (1) follows from the Epistemic Mix Axiom and modal reasoning. For part (2), we start with a consequence of the Epistemic Mix Axiom: $\vdash \Box_{\mathcal{C}}^* \psi \rightarrow \Box_A \Box_{\mathcal{C}}^* \psi$. Then by modal reasoning, $\vdash [\alpha] \Box_{\mathcal{C}}^* \psi \rightarrow [\alpha] \Box_A \Box_{\mathcal{C}}^* \psi$. By the Action-Knowledge Axiom in the generalized form of Lemma 5.5, we have $\vdash [\alpha] \Box_{\mathcal{C}}^* \psi \wedge \text{PRE}(\alpha) \rightarrow \Box_A [\beta] \Box_{\mathcal{C}}^* \psi$. \dashv

We present next our main result on syntactic equivalence of actions. It is a syntactic version of Proposition 2.6.

Lemma 5.11 *Let α and β be simple actions. If $\alpha \equiv \beta$, then for all φ , $\vdash [\alpha] \varphi \leftrightarrow [\beta] \varphi$.*

Proof By induction on φ . Fix a syntactic bisimulation R relating α and β . For $\varphi = \text{true}$ or an atomic sentence p_i , our result is easy. The induction steps for \neg and \wedge are trivial. The step for \Box_A is not hard, and so we omit it.

We next check the result for sentences $[\gamma] \varphi$. We need to see that

$$\vdash [\alpha] [\gamma] \varphi \leftrightarrow [\alpha'] [\gamma] \varphi.$$

For this, it is sufficient by the Composition Axiom to show that $\vdash [\alpha; \gamma] \varphi \leftrightarrow [\alpha'; \gamma] \varphi$. By Lemma 5.9, parts (1) and (5), $\alpha; \gamma \equiv \alpha'; \gamma$. So we are done by the induction hypothesis.

This leaves the step for sentences of the form $\Box_{\mathcal{B}}^* \varphi$, assuming the result for φ . We use the Action Rule to show that $\vdash [\alpha] \Box_{\mathcal{C}}^* \varphi \rightarrow [\beta] \Box_{\mathcal{C}}^* \varphi$. We need a functional witness to R ; that is, a map $\beta' \mapsto \alpha'$ for all β' such that $\beta \xrightarrow{\mathcal{A}^*} \beta'$, such that $\alpha' R \beta'$ for all these actions. Further, let $\chi_{\beta'}$ be $[\alpha'] \Box_{\mathcal{C}}^* \varphi$. We need to show that for all $A \in \mathcal{C}$ and all $\beta' \xrightarrow{A} \beta''$,

a. $\vdash [\alpha']\Box_{\mathcal{C}}^*\varphi \rightarrow [\beta']\varphi$; and

b. If $\beta' \xrightarrow{A} \beta''$, then $\vdash [\alpha']\Box_{\mathcal{C}}^*\varphi \wedge \text{PRE}(\beta') \rightarrow \Box_A[\alpha'']\Box_{\mathcal{C}}^*\varphi$.

For (a), we know from Lemma 5.10, that $\vdash [\alpha']\Box_{\mathcal{C}}^*\varphi \rightarrow [\alpha']\varphi$. By induction hypothesis on φ , $\vdash [\alpha']\varphi \leftrightarrow [\beta']\varphi$. And this implies (a). For (b), Lemma 5.10 tells us that under the assumptions,

$$\vdash [\alpha']\Box_{\mathcal{C}}^*\varphi \wedge \text{PRE}(\alpha') \rightarrow \Box_A[\alpha'']\Box_{\mathcal{C}}^*\varphi.$$

The fact that R is a syntactic bisimulation tells us that $\vdash \text{PRE}(\alpha') \leftrightarrow \text{PRE}(\beta')$. This implies (b).

This completes the induction on φ . +

Lemma 5.11 will be used in several places to come.

6 Completeness theorems

In this section, we prove the completeness of our logical systems for $\mathcal{L}_0(\Sigma)$ and $\mathcal{L}_1(\Sigma)$. (See Figure 1 for these.) Recall that the difference between the two languages is that the second has the common-knowledge propositional operators $\Box_{\mathcal{B}}^*$ while the first does not. This difference makes the bigger system much more expressive, and more difficult to study. As it happens, the extension of $\mathcal{L}_1(\Sigma)$ to the full logic $\mathcal{L}(\Sigma)$, the extension via the action iteration operation π^* , leads to a logical language whose validity problem is complete Π_1^1 . So there cannot be a recursively axiomatized logical system for the validities of $\mathcal{L}(\Sigma)$. Returning to the smaller $\mathcal{L}_1(\Sigma)$, even here the common knowledge operators $\Box_{\mathcal{B}}^*$ give a logical system which is not compact. So we cannot have a *strongly* complete logic for it; that is, we cannot axiomatize the notion of validity under hypotheses $T \models \varphi$. The best one can hope for is weak completeness: $\vdash \varphi$ if and only if $\models \varphi$. We prove this in Theorem 6.24. As a result of some preliminary results aimed toward that result, we establish the strong completeness of our axiomatization of the weaker logic $\mathcal{L}_0(\Sigma)$. The work there is easier because it relies on a translation into modal logic.

In a later section, we show that in contrast to our translation results for $\mathcal{L}_0(\Sigma)$, the larger language $\mathcal{L}_1(\Sigma)$ cannot be translated into \mathcal{L} or even to $\mathcal{L}(\Box^*)$ (modal logic with extra modalities $\Box_{\mathcal{B}}^*$). So completeness results for $\mathcal{L}_1(\Sigma)$ cannot simply be based on translation.

The ideas Our completeness proofs are somewhat involved, and it might help the reader to have a preview of some of the ideas before we get started. For, $\mathcal{L}_0(\Sigma)$, the leading idea is that we can translate the logic back to ordinary modal logic. Then we get completeness by taking any logical system for modal logic and adding whatever principles are needed in order to make the translation. This idea is simple enough, and after looking at a few examples one can see how the translation of $\mathcal{L}_0(\Sigma)$ to modal logic should go. But the formal definition of the translation is complicated. Our definition goes via a *term rewriting system* related to the axioms of the logic, and in particular we'll need to do prove the *termination* of our system. It would have been nice to use some off-the-shelf results of term rewriting theory to get the termination of our system, but this does not seem to be possible. In any case, we prove termination by establishing a *decreasing interpretation* of the system; that is, rewriting a sentence leads to a decrease in an order $<$ that we study at length. Our interpretation is exponential rather than polynomial, and it was found by hand.

When we turn to $\mathcal{L}_1(\Sigma)$, our model is the filtration proof of the completeness of PDL due to Kozen and Parikh [12]. We need to use the Action Rule rather than an Induction Rule, but modulo this difference, the work is similar. We also need to use some of the details on the ordering $<$ mentioned above. That is, even if one were interested in the completeness theorem of $\mathcal{L}_0(\Sigma)$ alone, our proof would still involve the general rewriting apparatus.

Definition Let \mathcal{NF} be the smallest set of ground sentences and actions in $\mathcal{L}_1(\Sigma)$ with the following properties:

1. Each atomic p belongs to \mathcal{NF} .
2. If $\varphi, \psi \in \mathcal{NF}$, then also $\neg\varphi$, $\varphi \wedge \psi$, $\Box_A\varphi$, and $\Box_{\mathcal{C}}^*\varphi$ belong to \mathcal{NF} .
3. If $\alpha \in \mathcal{NF}$, $\varphi \in \mathcal{NF}$, and $\mathcal{C} \subseteq \mathcal{A}$, then $[\alpha]\Box_{\mathcal{C}}^*\varphi$ belongs to \mathcal{NF} .

4. If $k \geq 0$, if $\vec{\psi}^1, \dots, \vec{\psi}^k$ is a sequence of sequences of length $n(\Sigma)$ of elements of \mathcal{NF} , and if $\sigma_1, \dots, \sigma_k \in \Sigma$,

$$(\dots((\sigma_1 \vec{\psi}^1; \sigma_2 \vec{\psi}^2) \dots \sigma_k \vec{\psi}^k)) \quad (6.2)$$

is an action term in \mathcal{NF} .

Lemma 6.1 *There is a function $nf : \mathcal{L}_1(\Sigma) \rightarrow \mathcal{NF}$ such that for all φ , $\vdash \varphi \leftrightarrow nf(\varphi)$. Moreover, if $\varphi \in \mathcal{L}_0(\Sigma)$, then $nf(\varphi)$ is a purely modal sentence (it contains no actions).*

Lemma 6.2 *There is a well-order $<$ on $\mathcal{L}_1(\Sigma)$ such that for all φ and α :*

1. $nf(\varphi) \leq \varphi$.
2. $\text{PRE}(\alpha) < [\alpha]\varphi$.
3. If $\alpha \xrightarrow{A} \beta$, then $[\beta]\varphi < \neg[\beta]\varphi < [\alpha]\Box_{\mathcal{C}}^*\varphi$.

Lemma 6.3 *For every φ there is a finite set $f(\varphi) \subseteq \mathcal{NF}$ such that*

1. $f(\varphi)$ is closed under subsentences.
2. If $[\gamma]\Box_{\mathcal{C}}^*\chi \in f(\varphi)$, $\gamma \rightarrow_{\mathcal{C}}^* \delta$, and $A \in \mathcal{C}$, then $f(\varphi)$ also contains $\Box_A[\delta]\Box_{\mathcal{C}}^*\chi$, $[\delta]\Box_{\mathcal{C}}^*\chi$, $nf(\text{PRE}(\delta))$, and $nf([\delta]\chi)$.

The proofs of these will appear in Section 6.1 just below. The proofs are technical, and so the reader not interested in those details might wish to omit the next section on a first reading of this paper. We shall use Lemmas 6.1- 6.3 in the work on completeness below, but neither the details of the proofs nor the other results of Section 6.1 will be used in the rest of this paper.

6.1 Proofs of the main facts on normal forms and the well-order $<$

We turn to the proofs of Lemmas 6.1- 6.3 just above. Our proofs are complicated and circuitous, so there might be shorter arguments. For example, we don't know of any proofs that avoid term rewriting theory. For the record, here are some of the reasons why we feel that the study of our system is complicated:

1. The original statement of axioms such as the Action-Knowledge Axiom is in terms of actions of the form $[\sigma_i \vec{\psi}]$.
2. On the other hand, the Action Rule is best stated in terms of actions which are compositions of the actions $[\sigma_i \vec{\psi}]$. In a term-rewriting setting, this point and the previous one work against each other. Our work will be to work with the versions of the axioms that are generalized to the case of all simple actions.
3. Again mentioning term rewriting, we'll need to pick an orientation for the Composition Axiom. This will either be $[\alpha][\beta]\varphi \rightsquigarrow [\alpha; \beta]\varphi$, or $[\alpha; \beta]\varphi \rightsquigarrow [\alpha][\beta]\varphi$.² Both alternatives lead to difficulties at various points. We chose the first alternative, and for this reason, we'll need a formulation of the Action-Knowledge Axiom as an infinite scheme.

²Another possibility which we did not explore is to consider rewriting modulo the identity $[\alpha; \beta]\varphi = [\alpha][\beta]\varphi$.

sentences φ	p_i	$\neg\varphi$	$\varphi \wedge \psi$	$\varphi \rightarrow \psi$	$\Box_A\varphi$	$\Box_B^*\varphi$	$[\alpha]\varphi$	$\text{PRE}(\alpha)$
actions α	$\sigma\psi_1, \dots, \psi_n$	$\alpha; \beta$						

Figure 4: The language $\mathcal{L}_1^+(\Sigma)$

4. Our language has the program union operator \sqcup , but because the axioms are not in general sound for sums, we need to reformulate things to avoid \sqcup . This is not difficult, but it would have been nice to avoid it.

It is convenient to replace $\mathcal{L}_1(\Sigma)$ by a slightly different language which we call $\mathcal{L}_1^+(\Sigma)$. This new language is shown in Figure 4. For the purposes of this section, we stress the formulation of this as an algebra for a two-sorted signature. Starting with some fixed action signature Σ , we construct a two-sorted signature $\Delta = \Delta(\Sigma)$ of terms, obtained in the following way. Let n be the number of simple actions in Σ .

1. Δ has two sorts: s (for sentences) and a (for actions).
2. Each $p \in \text{AtSen}$ is a constant symbol of sort s .
3. \neg , \Box_A , and \Box_B^* are function symbols of type $s \rightarrow s$.
4. \wedge and \rightarrow are binary function symbols of type $s \times s \rightarrow s$.
5. Each $\sigma \in \Sigma$ is a function symbol of sort $s^n \rightarrow a$.
6. $;$ is function symbols of sort $a \times a \rightarrow a$.
7. app is a binary symbol of type $a \times s \rightarrow s$.
8. PRE is a function symbol of sort $a \rightarrow s$.

The most important addition here is that we have PRE as a first-class part of the syntax; previously it had been an abbreviation. We also add the implication symbol \rightarrow , but this is only for convenience. Obviously, \rightarrow may be dropped from the system. On the other hand, we dropped \sqcup (as we mentioned, some axioms are not sound as equations in general if we have \sqcup). We might as well drop $skip$ as well, since it, too, can be translated away.

Incidentally, the fact that PRE is not a symbol of $\mathcal{L}_1(\Sigma)$ makes the issue of translating between $\mathcal{L}_1(\Sigma)$ and $\mathcal{L}_1^+(\Sigma)$ delicate. The reader might wish to formulate a careful translation in order to appreciate some of the features of our ordering $<$ which we shall introduce in due course.

We adopt the usual notational conventions that \wedge , \leftrightarrow , and $;$, are used as infix symbols. We continue our practice of writing $\sigma_i \vec{\psi}$ for what technically would be $\sigma_1(\psi_1, \dots, \psi_n)$. Also, we write $[\alpha]\psi$ instead of $app(\alpha, \psi)$.

When dealing with $\mathcal{L}_1^+(\Sigma)$, we let α, β , etc., range over terms of sort a , and φ, ψ, χ , etc., range over terms of sort s . Finally, we use letters like t and u for terms of either sort (so as to shorten many of our statements). We also will need to adjoin new variables to our signature in

order to formulate the notion of *substitution* that leads to a *term rewriting system*. For this, we let X_a and X_s be sets of new symbols. In order to simplify our notation, we'll use letters like x , y , and z to range over *both* of these sets. That is, we will not notationally distinguish the two sorts of variables. The context will always make it clear what the sort of any given variable is.

Let $\mathcal{L}_1^+(\Sigma, X)$ be the terms built from our signature which now may contain the variables from X . Examples of such terms may be found in Figure 5.

Lemma 6.4 *Let φ be a sentence of $\mathcal{L}_1(\Sigma)$. Then there is some $\varphi^\dagger \in \mathcal{L}_1(\Sigma)$ which does not contain \sqcup , crash or skip such that $\vdash \varphi \leftrightarrow \varphi^\dagger$.*

Proof (J. Sack) We define $\varphi \mapsto \varphi^\dagger$ as follows:

$$\begin{array}{llll}
\text{true}^\dagger & = & \text{true} & ([\text{skip}]\varphi)^\dagger = \varphi^\dagger \\
p_i^\dagger & = & p_i & ([\text{crash}]\varphi)^\dagger = \text{true} \\
(\neg\varphi)^\dagger & = & \neg\varphi^\dagger & ([\sigma_i\psi_1 \cdots \psi_n]\varphi)^\dagger = [\sigma_i\psi_1^\dagger \cdots \psi_n^\dagger]\varphi^\dagger \\
(\varphi \wedge \psi)^\dagger & = & \varphi^\dagger \wedge \psi^\dagger & ([\pi \sqcup \rho]\varphi)^\dagger = ([\pi]\varphi)^\dagger \wedge ([\rho]\varphi)^\dagger \\
(\square_A\varphi)^\dagger & = & \square_A\varphi^\dagger & ([\pi; \rho]\varphi)^\dagger = ([\pi][\rho]\varphi)^\dagger \\
(\square_B^*\varphi)^\dagger & = & \square_B^*\varphi^\dagger &
\end{array}$$

The definition is by recursion on the number k of composition symbols ($;$) in φ . For a fixed k , we then use recursion on the total number of symbols. The overall recursion allows us to define This allows us to define $([\pi; \rho]\varphi)^\dagger$ to be $([\pi][\rho]\varphi)^\dagger$. And the 'inside' recursion on the number of symbols allows us to define $([\pi \sqcup \rho]\varphi)^\dagger$ in terms of $([\pi]\varphi)^\dagger$ and $([\rho]\varphi)^\dagger$.

We indicate two of the verifications that our definition works. Here are the details for the line involving $([\sigma_i\psi_1 \cdots \psi_n]\varphi)^\dagger$. Assuming the relevant induction hypotheses, we see that $\sigma_i\psi_1 \cdots \psi_n \equiv \sigma_i\psi_1^\dagger \cdots \psi_n^\dagger$ (see Lemma 5.9, part 2). And then by Lemma 5.11,

$$[\sigma_i\psi_1 \cdots \psi_n]\varphi \equiv [\sigma_i\psi_1^\dagger \cdots \psi_n^\dagger]\varphi.$$

Using necessitation, we also have equivalence to $[\sigma_i\psi_1^\dagger \cdots \psi_n^\dagger]\varphi^\dagger$.

Some of the other cases use necessitation in this way also. In all cases, the verifications are similar. ←

Remark In the remainder of this paper, we shall assume that sentences and actions of $\mathcal{L}_1(\Sigma)$ do not contain \sqcup , *crash* or *skip*. We also regard them as *ground terms* of $\mathcal{L}_1^+(\Sigma)$: these are terms without variables.

Incidentally, the proof of Lemma 6.4 shows that $;$ is also eliminable. However, we shall *not* assume that $;$ is not found in our sentences. In fact, the rewriting system \mathcal{R} that we present shortly will introduce compositions.

The rewriting system \mathcal{R} and its interpretation We recall here the general notion of term rewriting as it applies to $\mathcal{L}_1^+(\Sigma, X)$. Consider a *rewrite rule* (r) of the form $l \rightsquigarrow r$, where l and r are elements of $\mathcal{L}_1^+(\Sigma, X)$. This (r) generates a relation of *immediate rewriting* on $\mathcal{L}_1^+(\Sigma, X)$: we say that t_1 *rewrites to* t_2 *via* (r) if there is a term u with exactly one occurrence of a variable x (of either sort) and a substitution σ such that $u(x \leftarrow l^\sigma) = t_1$ and $v(x \leftarrow r^\sigma) = t_2$. That is, t_1

(r1)	$x \rightarrow y$	\rightsquigarrow	$\neg(x \wedge \neg y)$
(r2)	$\text{PRE}(\sigma_i y_1 \cdots y_n)$	\rightsquigarrow	y_i
(r3)	$\text{PRE}(x; y)$	\rightsquigarrow	$\text{PRE}(x) \wedge [x]\text{PRE}(y)$
(r4)	$[x]p$	\rightsquigarrow	$\text{PRE}(x) \rightarrow p$
(r5)	$[x]\neg y$	\rightsquigarrow	$\text{PRE}(x) \rightarrow \neg[x]y$
(r6)	$[x](y \wedge z)$	\rightsquigarrow	$[x]y \wedge [x]z$
(r7 $_{\alpha}$)	$[\alpha]\square_A x$	\rightsquigarrow	$\text{PRE}(\alpha) \rightarrow \bigwedge\{\square_A[\beta]x : \alpha \xrightarrow{A} \beta\}$
(r8)	$[x][y]z$	\rightsquigarrow	$[x; y]z$
(r9)	$x; (y; z)$	\rightsquigarrow	$(x; y); z$

Figure 5: The rewrite system \mathcal{R}

and t_2 result from u by substituting l and r in for x ; however, we need not use l and r literally, but we could as well take a substitution instance of them. We would write $t_1 \xrightarrow{r} t_2$ for this.

Given a set \mathcal{R} of rewrite rules, we write $t_1 \xrightarrow{\mathcal{R}} t_2$ if for some $r \in \mathcal{R}$, $t_1 \xrightarrow{r} t_2$. We naturally consider the transitive closure $\xrightarrow{\mathcal{R}^*}$ of $\xrightarrow{\mathcal{R}}$. We say that t_1 *rewrites to* t_2 *via* \mathcal{R} if they stand in this relation $\xrightarrow{\mathcal{R}^*}$.

We are mostly interested in the rewriting of ground terms. But we need the notion of variables to formulate this, and this is the only reason for introducing variables.

The rewriting system \mathcal{R} . Now that we have made this preliminary discussion, we consider the term rewriting system \mathcal{R} shown in Figure 5. We have numbered the rules, and we use this numbering in the sequel.

Remark (r7 $_{\alpha}$) is an infinite scheme, and in it, α is a term of action sort. But α need not be an action variable. (Indeed, the scheme is only interesting when α is a composition of actions of the form $\sigma_i \vec{\psi}$.) The right side of (r7 $_{\alpha}$) depends on α , and this is why we use a scheme rather than a single rule. We need to explain what it means. First, the action terms of $\mathcal{L}_1^+(\Sigma, X)$ carry the structure of a frame by taking for each A the smallest relation \xrightarrow{A} such that the following two conditions hold:

1. If $i \xrightarrow{A} j$ in Σ , then $\sigma_i \vec{\psi} \xrightarrow{A} \sigma_j \vec{\psi}$.
2. if $\alpha \xrightarrow{A} \alpha'$ and $\beta \xrightarrow{A} \beta'$, then $\alpha; \beta \xrightarrow{A} \alpha'; \beta'$.

Moreover, we use the notation $\bigwedge\{\square_A[\beta]\varphi : \alpha \xrightarrow{A} \beta\}$ to stand for some fixed, but arbitrary, rendering of the conjunction as a nested list of binary conjuncts. The order will not matter, but we shall need an estimate of how many conjuncts there are.

We have a length function ℓ on action terms: $\ell(x) = 0$ for variables x , $\ell(\sigma_i \vec{\psi}) = 1$, and $\ell(\alpha; \beta) = \ell(\alpha) + \ell(\beta)$. For each α , the number of β such that $\alpha \xrightarrow{A} \beta$ is at most $n^{\ell(\alpha)}$, where n is the size of Σ . This is easy to check by induction on $\ell(\alpha)$.

Also on (r7 $_{\alpha}$): one is tempted to replace this infinite scheme by the finite one

$$(r10) \quad [\sigma_i \vec{\psi}]\square_A \varphi \rightsquigarrow \psi_i \rightarrow \bigwedge\{\square_A[\sigma_j \vec{\psi}]\varphi : i \xrightarrow{A} j\}$$

If one did this, one would have to reverse (r8) to read

$$(r11) \quad [\alpha; \beta]\varphi \rightsquigarrow [\alpha][\beta]\varphi$$

$\llbracket p_i \rrbracket$	$=$	3	$\llbracket \square_{\mathcal{B}}^* \rrbracket(a)$	$=$	$a + 1$
$\llbracket \neg \rrbracket(a)$	$=$	$a + 1$	$\llbracket app \rrbracket(a, b)$	$=$	a^b
$\llbracket \wedge \rrbracket(a, b)$	$=$	$a + b$	$\llbracket PRE \rrbracket(a)$	$=$	a
$\llbracket \rightarrow \rrbracket(a, b)$	$=$	$a + b + 3$	$\llbracket \sigma_i \rrbracket(a_1, \dots, a_n)$	$=$	$a_1 + \dots + a_n + 1$
$\llbracket \square_A \rrbracket(a)$	$=$	$a + 2$	$\llbracket ; \rrbracket(a, b)$	$=$	a^{b+1}

Figure 6: The interpretation

The reason is that (r10) above only allows us to reduce expressions $[\alpha]\square_A\varphi$ when α is of the form $\sigma_i\vec{\psi}$. The problem is that the normal forms of (r1)–(r6) + (r9) + (r10) + (r11) would include terms like

$$[\sigma_1\vec{\psi}^1][\sigma_2\vec{\psi}^2] \dots [\sigma_k\vec{\psi}^k]\square_C^*\varphi,$$

and these are not suitable for use in connection with the Action Rule. We will show about our system (r1) – (r9) that its normal forms includes terms like

$$[(\dots(\sigma_1\vec{\psi}^1; \sigma_2\vec{\psi}^2) \dots \sigma_k\vec{\psi}^k)]\square_C^*\varphi.$$

Again, this is mainly due to our choice in the direction of (r8).

Our interpretation An *interpretation* of a signature Δ is a Δ -*algebra*. This is a *carrier set* for the sentences, a carrier set for the actions, and for each n -ary function symbol f of Δ a function of the appropriate sort. In our setting, both carrier sets will be $N_{\geq 3}$, the set of natural numbers which are at least 3. We shall use a, b , etc., to range over $N_{\geq 3}$ in this section. Our interpretation shown in Figure 6. By recursion on terms $t(x_1, \dots, x_k)$, we build an interpretation³

$$\llbracket t \rrbracket(a_1, \dots, a_k) : (N_{\geq 3})^k \rightarrow N_{\geq 3}.$$

The interpretation of each function symbol is strictly monotone in each argument. (For example, we check this for $\llbracket ; \rrbracket$. For fixed n and m , we consider the functions $\lambda a.n^{a+2}$ and $\lambda a.a^{m+2}$. Then if $a < b$, $n^{a+2} < n^{b+2}$ and $a^{m+2} < b^{m+2}$.) So by induction, each $\llbracket t \rrbracket(a_1, \dots, a_k)$ is strictly monotone as a function in each argument.

Lemma 6.5 *Let $n = |\Sigma|$. For all action terms α , and all maps ι of variables to $N_{\geq 3}$. $\llbracket \alpha \rrbracket(\iota(x_1), \dots, \iota(x_n)) > n^{\ell(\alpha)}$.*

Proof By induction on α . If α is a variable x , then $\ell(\alpha) = 0$. So $\llbracket \alpha \rrbracket(\iota(x)) = \iota(x) \geq 3 > 1 = n^{\ell(\alpha)}$. If α is a term of the form $\sigma_i\vec{\psi}$, then $\ell(\alpha) = 1$, and

$$\begin{aligned} \llbracket \sigma_i\psi_1 \dots \psi_n \rrbracket(\iota(x_1), \dots, \iota(x_n)) &= \llbracket \psi_1 \rrbracket(\iota(x_1), \dots, \iota(x_n)) + \dots + \llbracket \psi_n \rrbracket(\iota(x_1), \dots, \iota(x_n)) \\ &> 3n \\ &> n^{\ell(\alpha)} \end{aligned}$$

³We use the same symbol $\llbracket \rrbracket$ for our interpretation as we used for the valuation in a state model in Section 2.1. Since our use of interpretations is confined to this section of the paper, we feel that the confusion due to overloading the symbol $\llbracket \rrbracket$ should be minimal.

Now assume our lemma for α and β .

$$\begin{aligned}
\llbracket \alpha; \beta \rrbracket(\iota(x_1), \dots, \iota(x_n)) &= (\llbracket \alpha \rrbracket(\iota(x_1), \dots, \iota(x_n)))\llbracket \beta \rrbracket(\iota(x_1), \dots, \iota(x_n))+1 \\
&> n^{\ell(\alpha); (n^{\ell(\beta)+1})} \\
&> n^{\ell(\alpha)+\ell(\beta)} \quad \text{see below} \\
&= n^{\ell(\alpha; \beta)}
\end{aligned}$$

In asserting that $\ell(\alpha); n^{\ell(\beta)} > \ell(\alpha) + \ell(\beta)$, we assume that $n > 1$. If $n = 1$, then our lemma is trivial. \dashv

Proposition 6.6 *If α is an action term of $\mathcal{L}_1^+(\Sigma)$ and $\alpha \triangleq \beta$, then $\llbracket \alpha \rrbracket$ and $\llbracket \beta \rrbracket$ are the same function. In particular, if α and β are ground action terms, then $\llbracket \alpha \rrbracket = \llbracket \beta \rrbracket$.*

Proof By induction on α . The point is that the interpretation of the actions $\sigma_i \vec{\psi}$ does not use the number i in any way. The rest follows by an easy induction. \dashv

The following proposition is a technical but elementary result on exponentiation. It will be used in Lemma 6.8 below. One might notice that if we replace 3 by 2 in the statement, then some of the parts are no longer true. This is the reason why our overall interpretation uses $N_{\geq 3}$ rather than N or $N_{\geq 2}$.

Proposition 6.7 *Let $a, b, c \geq 3$.*

1. $2a^b > a + 4$.
2. $a^{b+c} > a^b + a^c$.
3. $a^2 > a + 5$.
4. $a^{b+1} > 3a + 3$.
5. $a^b > (a + 1)(b + 1)$.

Lemma 6.8 *For each of (r1) - (r9), the interpretation of the left side of the rule is strictly larger than the right side on all tuples of arguments in $N_{\geq 3}$.*

Proof We remind the reader that letters a, b, c , etc., denote elements of $N_{\geq 3}$. We use Proposition 6.7 without explicit mention.

$$(r1) \llbracket x \rightarrow y \rrbracket(a, b) = a + b + 3 > a + b + 2 = \llbracket \neg(x \wedge \neg y) \rrbracket(a, b).$$

$$(r2) \llbracket \text{PRE}(\sigma_i \vec{y}) \rrbracket(a_1, \dots, a_n) = \llbracket \sigma_i \vec{y} \rrbracket(a_1, \dots, a_n) \geq a_i + 1 > \llbracket y_i \rrbracket(a_1, \dots, a_n).$$

(r3)

$$\begin{aligned}
\llbracket \text{PRE}(x; y) \rrbracket(a, b) &= a^{b+1} \\
&> a + a^b \\
&= \llbracket \text{PRE}(x) \rrbracket(a, b) + \llbracket [x] \text{PRE}(y) \rrbracket(a, b) \\
&= \llbracket \text{PRE}(x) \wedge [x] \text{PRE}(y) \rrbracket(a, b)
\end{aligned}$$

$$(r4) \llbracket [x]p \rrbracket(a) = a^2 > a + 5 = \llbracket \text{PRE}(x) \rightarrow p \rrbracket(a).$$

$$\begin{aligned}
\text{(r5)} \quad \llbracket [x]\neg y \rrbracket(a, b) &= a^{b+1} \\
&\geq a^b + 2a^b \\
&> a + a^b + 4 \\
&= a + \llbracket [x]y \rrbracket(a, b) + 4 \\
&= \llbracket \text{PRE}(x) \rightarrow \neg[x]y \rrbracket(a, b)
\end{aligned}$$

$$\text{(r6)} \quad \llbracket [x](y \wedge z) \rrbracket(a, b, c) = a^{b+c} > a^b + a^c = \llbracket [x]y \wedge [x]z \rrbracket(a, b, c).$$

(r7 $_{\alpha}$) Let y_1, \dots, y_n be the free variables of α . Fix $c_1, \dots, c_n \in N_{\geq 3}$. Let $a = \llbracket \alpha \rrbracket(c_1, \dots, c_n)$, and let $b \in N_{\geq 3}$ be arbitrary. Then

$$\begin{aligned}
\llbracket [\alpha] \Box_A x \rrbracket(c_1, \dots, c_n, b) &= a^{b+2} \\
&> a^{b+1} + a^{b+1} \\
&> a^{b+1} + 3a + 3 \\
&= a + a(2 + a^b) + 3 \\
&> a + n^{\ell(\alpha)}(2 + a^b) + 3 \\
&\geq \llbracket \text{PRE}(\alpha) \rightarrow \bigwedge \{ \Box_A [\beta] x : \alpha \triangleleft \beta \} \rrbracket(c_1, \dots, c_n, b)
\end{aligned}$$

Notice that we used Proposition 6.6 and our observation that the size of the conjunction on the right side of (r7 $_{\alpha}$) is at most $n^{\ell(\alpha)}$.

$$\text{(r8)} \quad \llbracket [x][y]z \rrbracket(a, b, c) = a^{b^c} > a^{(b+1)^c} = (a^{b+1})^c = \llbracket [x]; y; z \rrbracket(a, b, c).$$

$$\text{(r9)} \quad \llbracket [x]; (y; z) \rrbracket(a, b, c) = a^{b^{c+1}+1} > a^{(b+1)(c+1)} = (a^{b+1})^{c+1} = \llbracket (x; y); z \rrbracket(a, b, c). \quad \dashv$$

Definition Let φ and ψ be sentences in $\mathcal{L}_1(\Sigma)$. We regard each as ground terms in $\mathcal{L}_1^+(\Sigma)$. We write $\varphi > \psi$ if $\llbracket \varphi \rrbracket > \llbracket \psi \rrbracket$, where our interpretation is the one in Figure 6. We write $\varphi < \psi$ if $\varphi \leq \psi$ to mean the obvious things.

Theorem 6.9 \mathcal{R} is terminating: there are no infinite sequences

$$t_1 \xrightarrow{\mathcal{R}} t_2 \xrightarrow{\mathcal{R}} \dots \xrightarrow{\mathcal{R}} t_n \xrightarrow{\mathcal{R}} t_{n+1} \dots$$

Proof We recall a standard argument. Assume we had a counterexample, an infinite sequence of rewrites. We may assume without loss of generality that each t_i is a ground term. Recall Lemma 6.8 and our observation that each $\llbracket t \rrbracket(x_1, \dots, x_k)$ is strictly monotone as a function in each argument. From this it follows that $\llbracket t_1 \rrbracket > \llbracket t_2 \rrbracket > \dots$, and these are all numbers. So we have a contradiction. \dashv

Normal forms We remind the reader that we have formulated the notions of equivalences of simple actions and also equivalence of sentences of $\mathcal{L}_1(\Sigma)$ in Section 5.4. We consider now a translation $\text{trans} : \mathcal{L}_1^+(\Sigma) \rightarrow \mathcal{L}_1(\Sigma)$. The definition is by recursion on the well-order $<$. We take trans to be a homomorphism for all symbols except PRE. For this, we require the following:

$$\begin{aligned}
\text{trans}(\text{PRE}(\sigma\psi_1, \dots, \psi_n)) &= \text{trans}(\psi_i) \\
\text{trans}(\text{PRE}(\alpha; \beta)) &= \langle \text{trans}(\alpha) \rangle \text{trans}(\text{PRE}(\beta)) \\
&= \neg[\text{trans}(\alpha)]\neg\text{trans}(\text{PRE}(\beta))
\end{aligned}$$

The reason we need recursion on $<$ is that $\text{trans}(\text{PRE}(\beta))$ figures in $\text{trans}(\text{PRE}(\alpha; \beta))$. So we need to know that $\text{PRE}(\beta) < \text{PRE}(\alpha; \beta)$. Of course, we don't really need the specific $<$ that we constructed for this; for this minor point we might as well define $\varphi < \psi$ iff φ has fewer symbols than ψ .

Lemma 6.10 *For all action terms α , $\text{trans}(\text{PRE}(\alpha)) = \text{PRE}(\text{trans}(\alpha))$.*

Proof By induction on $<$. The important thing again is that when we write $\text{PRE}(\text{trans}(\alpha))$ we are using PRE here as a defined symbol. Its recursion equations match the definition of trans . \dashv

Lemma 6.11 *Let α be a ground action term of $\mathcal{L}_1^+(\Sigma)$. Then*

$$\{\text{trans}(\beta) : \alpha \xrightarrow{A} \beta \text{ in } \mathcal{L}_1^+(\Sigma)\} = \{\beta : \text{trans}(\alpha) \xrightarrow{A} \beta \text{ in } \mathcal{L}_1(\Sigma)\}.$$

Proof By induction on α . \dashv

Lemma 6.12 *If t_1 and t_2 are ground terms of $\mathcal{L}_1^+(\Sigma)$ such that $t_1 \xrightarrow{R} t_2$, then $\text{trans}(t_1) \equiv \text{trans}(t_2)$.*

Proof Let u be a term with exactly one free variable x , and let σ be such that for some i , $t_1 = u(x \leftarrow l^\sigma)$ and $t_2 = u(x \leftarrow r^\sigma)$. We argue by induction on u . If u is just x , then we examine the rules of the system. All of them pertain to sentences except for (r9), and in the case of (r9) we use Lemma 5.9, part (4). The arguments for the other rules use Lemma 6.10, and we'll give the details for two of them (r3) and (r7).

For (r3),

$$\begin{aligned} \text{trans}(\text{PRE}(\alpha; \beta)) &\equiv \langle \text{trans}(\alpha) \rangle \text{trans}(\text{PRE}(\beta)) && \text{definition of trans} \\ &\equiv \text{PRE}(\text{trans}(\alpha)) \wedge [\text{trans}(\alpha) \text{trans}(\text{PRE}(\beta))] && \text{by Lemma 5.6} \\ &\equiv \text{trans}(\text{PRE}(\alpha)) \wedge [\text{trans}(\alpha)] \text{trans}(\text{PRE}(\beta)) && \text{using Lemma 6.10} \\ &\equiv \text{trans}(\text{PRE}(\alpha) \wedge [\alpha] \text{PRE}(\beta)) \end{aligned}$$

The infinite scheme (r7 $_\alpha$) is repeated below:

$$(r7_\alpha) \quad [\alpha] \square_A x \quad \rightsquigarrow \quad \text{PRE}(\alpha) \rightarrow \bigwedge \{ \square_A [\beta] x : \alpha \xrightarrow{A} \beta \}.$$

Recall that α might have variables. What we need to check here is that ground instances of (r7 $_\alpha$) have equivalent translations. So take a ground sentence of the form $[\alpha] \square_A \varphi$. Its translation is $[\text{trans}(\alpha)] \square_A (\text{trans}(\varphi))$. Using the Action-Knowledge Axiom and Lemmas 6.11 and 6.10:

$$\begin{aligned} [\text{trans}(\alpha)] \square_A (\text{trans}(\varphi)) &\equiv \text{PRE}(\text{trans}(\alpha)) \rightarrow \square_A \bigwedge \{ [\beta] \text{trans}(\varphi) : \text{trans}(\alpha) \xrightarrow{A} \beta \} \\ &\equiv \text{trans}(\text{PRE}(\alpha)) \rightarrow \bigwedge \{ \square_A [\text{trans}(\beta)] \text{trans}(\varphi) : \alpha \xrightarrow{A} \beta \} \\ &\equiv \text{trans} \left(\text{PRE}(\alpha) \rightarrow \bigwedge \{ \square_A [\beta] \varphi : \alpha \xrightarrow{A} \beta \} \right) \end{aligned}$$

This settles all of the cases in this lemma when u is a variable by itself. In the general case, we need a fact about substitutions. Let t be any term of $\mathcal{L}^+(\Sigma, X)$. Let σ and τ be two ground substitutions (these are substitutions all of whose values contain no variables). such that $\text{trans}(\sigma(x))$ and $\text{trans}(\tau(x))$ equivalent (actions or sentences) for all variables x . Then $\text{trans}(t^\sigma)$ and $\text{trans}(t^\tau)$ are again equivalent. The argument here is an easy induction on terms of $\mathcal{L}^+(\Sigma, X)$. It amounts to several facts which we have seen before: \equiv is a congruence for all of the syntactic operations on sentences, and also for those on programs (see Lemma 5.9); equivalent actions have equivalent preconditions (by definition); and if $\alpha \equiv \beta$, then $[\alpha]\varphi \equiv [\beta]\varphi$ (Lemma 5.11). \dashv

A *normal form* in a rewriting system is a term which cannot be rewritten in the system. In a terminating system such as our \mathcal{R} , one may define a normal form for a term by rewriting as much as possible in some fixed way (for example, by always rewriting in the leftmost possible way). We shall need some information on the normal forms of \mathcal{R} , and we shall turn to this shortly.

We defined a set $\mathcal{NF} \subseteq \mathcal{L}_1(\Sigma)$ in Section 6. \mathcal{NF} is the smallest set containing the atomic propositions and closed under all the boolean and modal operators; with the property that if α and φ belong to \mathcal{NF} , then so does $[\alpha]\square_{\mathcal{C}}^*\varphi$ for all $\mathcal{C} \subseteq \mathcal{A}$; and finally that the actions in \mathcal{NF} are closed under composition in the specific way set out in (6.2).

Lemma 6.13 *A ground term $t \in \mathcal{L}_1^+(\Sigma)$ is a normal form of \mathcal{R} iff $t \in \mathcal{NF}$. In particular, PRE and \rightarrow do not occur in normal forms.*

Proof An induction on $\mathcal{NF} \subseteq \mathcal{L}_1(\Sigma)$ shows that all sentences in \mathcal{NF} are ground terms of $\mathcal{L}_1^+(\Sigma)$ and are moreover normal forms of the rewriting system \mathcal{R} : no rules of \mathcal{R} can apply at any point. Going the other way, we show by induction on $\mathcal{L}_1^+(\Sigma)$ that if t is a (ground) normal form, then (regarding t as a sentence or action in $\mathcal{L}_1(\Sigma)$) $\varphi \in \mathcal{NF}$. The base case and the induction steps for \neg , \wedge , \square_A , and \square_B^* are all easy. Suppose our result holds for φ , and consider a normal form $[\alpha]\varphi$. Then α must be an action of the form $[\sigma_i\vec{\psi}]$ with all ψ_j in normal form; if not, some rule would apply to α and hence to $[\alpha]\varphi$. We are left to consider an action α . By induction hypothesis, the subsentences of α , too, are normal forms and hence belong to \mathcal{NF} . We claim that α must be of the right-branching form in equation (6.2). This is because all of the other possibilities are reducible in the system using (r9). \dashv

Lemma 6.14 *A sentence $\varphi \in \mathcal{L}_0(\Sigma)$ is a normal form of \mathcal{R} iff φ is a modal sentence (that is, if φ contains no actions).*

Proof By the easy part of Lemma 6.13, the modal sentences are normal forms. In the more significant direction, one first checks by induction on rewrite sequences that if $\varphi \in \mathcal{L}_0(\Sigma)$ and φ' is reachable from φ by a finite number of rewrites in \mathcal{R} , then \square^* does not appear in φ' . So every normal form of φ is a purely modal sentence. It follows that if φ were a normal form to begin with, then φ would be a modal sentence. \dashv

Corollary 6.15 *For every $\varphi \in \mathcal{L}_1(\Sigma)$ there is a normal form $\text{nf}(\varphi)$ such that $\vdash \varphi \leftrightarrow \text{nf}(\varphi)$. Moreover, $\text{nf}(\varphi) \leq \varphi$.*

Proof Regard φ as a term in $\mathcal{L}_1^+(\Sigma)$. Let

$$\varphi = \varphi_1 \quad \rightsquigarrow \quad \varphi_2 \quad \rightsquigarrow \quad \dots \rightsquigarrow \varphi_n = nf(\varphi)$$

be some sequence of rewrites which leads to a normal form of φ .⁴ By Lemma 6.12, $\vdash \mathbf{trans}(\varphi) \leftrightarrow \mathbf{trans}(nf(\varphi))$. But neither φ nor $nf(\varphi)$ contain \mathbf{PRE} or \rightarrow , so they are literally equal to their translations. Thus $\vdash \varphi \leftrightarrow nf(\varphi)$, just as desired. \dashv

Lemma 6.16 *For all φ and α of $\mathcal{L}_1^+(\Sigma)$:*

1. $\mathbf{PRE}(\alpha) < [\alpha]\varphi$.
2. If $\alpha \triangleq \beta$, then $[\beta]\varphi < \neg[\beta]\varphi < [\alpha]\square_{\mathcal{C}}^*\varphi$.
3. If $[\alpha]\square_{\mathcal{C}}^*\psi$ is a normal form sentence and $\alpha \triangleq \beta$, then $\square_A[\beta]\square_{\mathcal{C}}^*\psi$ and $[\beta]\square_{\mathcal{C}}^*\psi$ are again normal forms.
4. Every subterm of a normal form is a normal form.
5. If α is a normal form action and $\alpha \triangleq \beta$, then β is a normal form action as well.

Proof Part (1) is an easy calculation. In part (2) we use the fact that $\llbracket \alpha \rrbracket$ and $\llbracket \beta \rrbracket$ are the same number, by Proposition 6.6. We use the fact here (and here only) that $\llbracket \square^* \rrbracket(a) = a + 1$ rather than $\llbracket \square^* \rrbracket(a) = a$. The remaining parts are also easy using the characterization of normal forms of Lemma 6.13. \dashv

The function $f(\varphi)$ The last piece of business in this section is to define the function $f(\varphi)$ from Lemma 6.3 and then to prove the required properties.

Definition For t an action or a sentence, let $s(t)$ be the set of subsentences of t , including t itself (if t is a sentence). This includes all sentences occurring in actions which occur in φ and their subsentences. We define a function $f : \mathcal{NF} \rightarrow \mathcal{P}(\mathcal{NF})$ by recursion on the wellfounded relation $<$ as follows:

$$\begin{aligned}
f(p) &= \{p\} \\
f(\neg\varphi) &= f(\varphi) \cup \{\neg\varphi\} \\
f(\varphi \wedge \psi) &= f(\varphi) \cup f(\psi) \cup \{\varphi \wedge \psi\} \\
f(\square_A\varphi) &= f(\varphi) \cup \{\square_A\varphi\} \\
f(\square_{\mathcal{B}}^*\varphi) &= f(\varphi) \cup \{\square_{\mathcal{B}}^*\varphi\} \cup \{\square_A\square_{\mathcal{B}}^*\varphi : A \in \mathcal{B}\} \\
f([\alpha]\square_{\mathcal{C}}^*\varphi) &= \bigcup \{s(\square_A[\beta]\square_{\mathcal{C}}^*\varphi) : \alpha \rightarrow_{\mathcal{C}}^* \beta \ \& \ A \in \mathcal{C}\} \\
&\quad \cup \bigcup \{f(\psi) : (\exists\beta)\alpha \rightarrow_{\mathcal{C}}^* \beta \ \& \ \psi \in s(\beta)\} \\
&\quad \cup \bigcup \{f(nf(\mathbf{PRE}(\beta))) : \alpha \rightarrow_{\mathcal{C}}^* \beta\} \\
&\quad \cup f(\square_{\mathcal{C}}^*\varphi) \\
&\quad \cup \bigcup \{f(nf([\beta]\varphi)) : \alpha \rightarrow_{\mathcal{C}}^* \beta\}
\end{aligned}$$

The definition makes sense because the calls to f on the right-hand sides are all $<$ the arguments on the left-hand sides; see Lemma 6.16.)

⁴It does not matter which sequence or which normal form is chosen.

Lemma 6.17 For all $\varphi \in \mathcal{NF}$:

1. $\varphi \in f(\varphi)$.
2. $f(\varphi)$ is a finite set of normal form sentences.
3. If $\psi \in f(\varphi)$, then $s(\psi) \subseteq f(\varphi)$.
4. If $\psi \in f(\varphi)$, then $f(\psi) \subseteq f(\varphi)$.
5. If $[\gamma]\Box_{\mathcal{C}}^*\chi \in f(\varphi)$, $\gamma \rightarrow_{\mathcal{C}}^* \delta$, and $A \in \mathcal{C}$, then $f(\varphi)$ also contains $\Box_A[\delta]\Box_{\mathcal{C}}^*\chi$, $[\delta]\Box_{\mathcal{C}}^*\chi$, $nf(\text{PRE}(\delta))$, and $nf([\delta]\chi)$.

Proof Part (1) is by cases on φ . The only interesting case is for $[\alpha]\Box_{\mathcal{C}}^*\varphi$, and this is a subsentence of $\Box_A[\alpha]\Box_{\mathcal{C}}^*\varphi$ for any $A \in \mathcal{C}$.

All of other the parts are by induction on φ in the well-order $<$. For part (2), we use Lemma 6.16.

In part (3), we argue by induction on normal forms.

The result is immediate when φ is an atomic sentence p , and the induction steps for \neg , \wedge , and \Box_A are easy. For $\Box_{\mathcal{B}}^*\varphi$, note that since $\varphi < \Box_{\mathcal{B}}^*\varphi$, our induction hypothesis implies the result for φ ; we verify it for $\Box_{\mathcal{B}}^*\varphi$. When ψ is $\Box_{\mathcal{B}}^*\varphi$, then

$$s(\psi) = s(\varphi) \cup \{\Box_{\mathcal{B}}^*\varphi\} \subseteq f(\varphi) \cup \{\Box_{\mathcal{B}}^*\varphi\} \subseteq f(\Box_{\mathcal{B}}^*\varphi).$$

And then, when ψ is $\Box_A\Box_{\mathcal{B}}^*\varphi$ for some $A \in \mathcal{B}$, we have

$$s(\psi) = s(\Box_{\mathcal{B}}^*\varphi) \cup \{\Box_A\Box_{\mathcal{B}}^*\varphi\} \subseteq f(\Box_{\mathcal{B}}^*\varphi).$$

To complete part (3), we consider $[\alpha]\Box_{\mathcal{C}}^*\varphi$. If there is some $\chi < [\alpha]\Box_{\mathcal{C}}^*\varphi$ such that $\psi \in f(\chi)$ and $f(\chi) \subseteq f([\alpha]\Box_{\mathcal{C}}^*\varphi)$, then we argue as follows: by induction hypothesis, $s(\psi) \subseteq f(\chi)$; and by hypothesis $f(\chi) \subseteq f([\alpha]\Box_{\mathcal{C}}^*\varphi)$. This covers all of the cases except for ψ a subsentence of $\Box_A[\beta]\Box_{\mathcal{C}}^*\varphi$. And here $s(\psi) \subseteq s(\Box_A[\beta]\Box_{\mathcal{C}}^*\varphi) \subseteq f([\alpha]\Box_{\mathcal{C}}^*\varphi)$.

In part (4), we again argue by induction on normal forms. The result is immediate when φ is an atomic sentence p . The induction steps for \neg , \wedge , and \Box_A are easy. For $\Box_{\mathcal{B}}^*\varphi$, note that since $\varphi < \Box_{\mathcal{B}}^*\varphi$, our induction hypothesis implies the result for φ ; we verify it for $\Box_{\mathcal{B}}^*\varphi$. The only interesting case is when ψ is $\Box_A\Box_{\mathcal{B}}^*\varphi$ for some $A \in \mathcal{B}$. And in this case

$$f(\psi) = f(\Box_{\mathcal{B}}^*\varphi) \cup \{\Box_A\Box_{\mathcal{B}}^*\varphi\} \subseteq f(\Box_{\mathcal{B}}^*\varphi).$$

To complete part (4), we consider $[\alpha]\Box_{\mathcal{C}}^*\varphi$. If there is some $\chi < [\alpha]\Box_{\mathcal{C}}^*\varphi$ such that $\psi \in f(\chi)$ and $f(\chi) \subseteq f([\alpha]\Box_{\mathcal{C}}^*\varphi)$, then we are easily done by the induction hypothesis. This covers all of the cases except for ψ of the form $[\beta]\Box_{\mathcal{C}}^*\varphi$ or of the form $\Box_A[\beta]\Box_{\mathcal{C}}^*\varphi$. (If ψ is a subsentence of some β , then $f(\psi) \subseteq f([\alpha]\Box_{\mathcal{C}}^*\varphi)$ directly. If ψ is a subsentence of $\Box_{\mathcal{C}}^*\varphi$, then by induction hypothesis, $f(\psi) \subseteq f(\Box_{\mathcal{C}}^*\varphi)$; and directly, $f(\Box_{\mathcal{C}}^*\varphi) \subseteq f([\alpha]\Box_{\mathcal{C}}^*\varphi)$.) For $[\beta]\Box_{\mathcal{C}}^*\varphi$, we use the transitivity of $\rightarrow_{\mathcal{C}}^*$ to check that $f([\beta]\Box_{\mathcal{C}}^*\varphi) \subseteq f([\alpha]\Box_{\mathcal{C}}^*\varphi)$. And now the case of $\Box_A[\beta]\Box_{\mathcal{C}}^*\varphi$ follows:

$$f(\Box_A[\beta]\Box_{\mathcal{C}}^*\varphi) = f([\beta]\Box_{\mathcal{C}}^*\varphi) \cup \{\Box_A[\beta]\Box_{\mathcal{C}}^*\varphi\} \subseteq f([\alpha]\Box_{\mathcal{C}}^*\varphi).$$

For part (5), assume that $[\gamma]\Box_{\mathcal{C}}^*\chi \in f(\varphi)$. By part (2), $[\gamma]\Box_{\mathcal{C}}^*\chi$ is a normal form. The definition of f implies that $\Box_A[\delta]\Box_{\mathcal{C}}^*\chi$, $[\delta]\Box_{\mathcal{C}}^*\chi$, $nf(\text{PRE}(\delta))$, and $nf([\delta]\chi)$ all belong to $f([\gamma]\Box_{\mathcal{C}}^*\chi)$, and then part (4) tells us that $f([\gamma]\Box_{\mathcal{C}}^*\chi) \subseteq f(\varphi)$. \dashv

Summary The purpose of this section was to prove Lemmas 6.1-6.3 in Section 6. Lemma 6.1 is Corollary 6.15. Lemma 6.2 comes from Corollary 6.15 and Lemma 6.16. Lemma 6.3 is contained in Lemma 6.17.

6.2 Strong completeness for $\mathcal{L}_0(\Sigma)$

Recall that in the languages $\mathcal{L}_0(\Sigma)$, we do not have the common knowledge operators $\Box_{\mathcal{B}}^*$ or the action iterations π^* . At this point, we can put together several results from our previous work to obtain a completeness theorem for languages of the form $\mathcal{L}_0(\Sigma)$. The overall ideas are: (1) we need a logical system which is strong enough to translate each sentence of $\mathcal{L}_0(\Sigma)$ to a normal form; (2) this normal form will be a purely modal sentence; and (3) the system should be at least as strong as multimodal K .

Proposition 6.18 *Every sentence φ of $\mathcal{L}_0(\Sigma)$ is provably equivalent to a sentence φ^* in which there are no occurrences of \sqcup , *crash*, $;$, or *skip*.*

Theorem 6.19 *The logical system for $\mathcal{L}_0(\Sigma)$ is strongly complete: For all sets $T \subseteq \mathcal{L}_0(\Sigma)$, $T \vdash \varphi$ iff $T \models \varphi$.*

Proof The soundness half being easy, we only need to show that if $T \models \varphi$, then $T \vdash \varphi$.

First, we may assume that the symbols \sqcup , *crash*, $;$, and *skip* do not occur in T or φ . Thus, we may work with $\mathcal{L}_0(\Sigma) \cap \mathcal{L}_1^+(\Sigma)$. In particular, we have normal forms.

Next, for each χ of $\mathcal{L}_0(\Sigma)$, $\vdash \chi \leftrightarrow nf(\chi)$. As a result, $T \vdash nf(\chi)$ for all $\chi \in T$.

Finally, write $nf(T)$ for $\{nf(\chi) : \chi \in T\}$. By soundness, $nf(T) \models nf(\varphi)$. Since our system extends the standard complete proof system of modal logic, $nf(T) \vdash nf(\varphi)$. So $T \vdash nf(\varphi)$. As we know $\vdash \varphi \leftrightarrow nf(\varphi)$. So we have our desired conclusion: $T \vdash \varphi$. \dashv

6.3 Weak completeness for $\mathcal{L}_1(\Sigma)$

The proof of completeness and decidability of $\mathcal{L}_1(\Sigma)$ is based on the filtration argument for completeness of PDL due to Kozen and Parikh [12]. We show that every consistent φ has a finite model, and that the size of the model is recursive in φ . As in the last section, we depend on the results of Lemmas 6.1- 6.3.

The set $\Delta = \Delta(\varphi)$ Fix a sentence φ . We set $\Delta = f(\varphi)$ (i.e., we drop φ from the notation). This set Δ is the version for our logic of the Fischer-Ladner closure of φ , originating in [8]. Let $\Delta = \{\psi_1, \dots, \psi_n\}$. Given a maximal consistent set U of $\mathcal{L}_1(\Sigma)$, let

$$U^* = \pm \psi_1 \wedge \dots \wedge \pm \psi_n,$$

where the signs are taken in accordance with membership in U . That is, if $\psi_i \in U$, then ψ_i is a conjunct of U^* ; but if $\psi_i \notin U$, then $\neg\psi_i$ is a conjunct.

Two (standard) observations are in order. Notice that if $U^* \neq V^*$, then $U^* \wedge V^*$ is inconsistent. Also, for all $\psi \in \Delta$,

$$\vdash \psi \leftrightarrow \bigvee \{W^* : W \text{ is maximal consistent and } \psi \in W\}. \quad (6.3)$$

and

$$\vdash \neg\psi \leftrightarrow \bigvee \{W^* : W \text{ is maximal consistent and } \neg\psi \in W\}. \quad (6.4)$$

(The reason is that ψ is equivalent to the disjunction of *all* complete conjunctions which contain it. However, some of those complete conjunctions are inconsistent and these can be dropped from the big disjunction. The others are consistent and hence can be extended to maximal consistent sets.)

Definition We consider maximal consistent sets U in the logic for $\mathcal{L}_1(\Sigma)$. Let $U \equiv V$ iff $U^* = V^*$ (iff $U \cap \Delta = V \cap \Delta$). The *filtration* \mathcal{F} is the model whose worlds are the equivalence classes $[U]$ in this relation. Furthermore, we set

$$[U] \triangleq [V] \text{ in } \mathcal{F} \quad \text{iff} \quad \text{whenever } \Box_A \psi \in U \cap \Delta, \text{ then also } \psi \in V. \quad (6.5)$$

We complete the specification of a state model with the valuation:

$$\|p\|_{\mathcal{F}} = \{[U] : p \in U \cap \Delta\}. \quad (6.6)$$

The definitions in equations (6.6) and (6.5) are independent of the choice of representatives: we use part (1) of Lemma 6.3 to see that if $\Box_A \chi \in \Delta$, then also $\chi \in \Delta$.

Proposition 6.20 *If $U^* \wedge \diamond_A V^*$ is consistent, then $[U] \rightarrow_A [V]$.*

Proof Assume $\Box_A \psi \in U \cap \Delta$ and toward a contradiction that $\psi \notin V$. Since $\psi \in \Delta$ and $\neg\psi \in V$, we have $\vdash V^* \rightarrow \neg\psi$. Thus, $\vdash \diamond_A V^* \rightarrow \diamond_A \neg\psi$, and so $\vdash U^* \wedge \diamond_A V^* \rightarrow \Box_A \psi \wedge \diamond_A \neg\psi$. Hence $U^* \wedge \diamond_A V^*$ is inconsistent. \dashv

Definition Let $\langle \alpha \rangle \diamond_{\mathcal{C}}^* \psi$ be a normal form. A *good path from $[V_0]$ for $\langle \alpha \rangle \diamond_{\mathcal{C}}^* \psi$* is a path in \mathcal{F}

$$[V_0] \rightarrow_{A_1} [V_1] \rightarrow_{A_2} \cdots \rightarrow_{A_{k-1}} [V_{k-1}] \rightarrow_{A_k} [V_k] \quad (6.7)$$

such that $k \geq 0$, each $A_i \in \mathcal{C}$, and such that there exist actions

$$\alpha = \alpha_0 \rightarrow_{A_1} \alpha_1 \rightarrow_{A_2} \cdots \rightarrow_{A_{k-1}} \alpha_{k-1} \rightarrow_{A_k} \alpha_k$$

such that $\text{PRE}(\alpha_i) \in V_i$ for all $0 \leq i \leq k$, and $\langle \alpha_k \rangle \psi \in V_k$.

The idea behind a good path comes from considering Lemma 5.3 in \mathcal{F} . Of course, the special case of that result would require that $\langle \mathcal{F}, [V_i] \rangle \models \text{PRE}(\alpha_i)$ rather than $\text{PRE}(\alpha_i) \in V_i$, and similarly for $\langle \alpha_k \rangle \psi$ and V_k . The exact formulation above was made in order that the Truth Lemma will go through for sentences of the form $\langle \alpha \rangle \diamond_{\mathcal{C}}^* \psi$ (see the final paragraphs of the proof of Lemma 6.23).

Lemma 6.21 *Let $[\alpha] \Box_{\mathcal{C}}^* \psi \in \Delta$. If there is a good path from $[V_0]$ for $\langle \alpha \rangle \diamond_{\mathcal{C}}^* \neg\psi$, then $\langle \alpha \rangle \diamond_{\mathcal{C}}^* \neg\psi \in V_0$.*

Proof By induction on the length k of the path. If $k = 0$, then $\langle \alpha \rangle \neg\psi \in V_0$. If $\langle \alpha \rangle \diamond_{\mathcal{C}}^* \neg\psi \notin V_0$,

then $[\alpha]\Box_C^*\psi \in V_0$. By Lemma 6.3, part (2), we have $nf([\alpha]\psi) \in V_0$. This is a contradiction.

Assume the result for k , and suppose that there is a good path from $[V_0]$ for $\langle\alpha\rangle\Diamond_C^*\neg\psi$ of length $k+1$. We adopt the notation from (6.7) for this good path. Then there is a good path of length k from $[V_1]$ for $\langle\alpha_1\rangle\Diamond_C^*\neg\psi$. Also, $[\alpha_1]\Box_C^*\psi \in \Delta$, by Lemma 6.3, part (2). By induction hypothesis, $\langle\alpha_1\rangle\Diamond_C^*\neg\psi \in V_1$.

If $\langle\alpha\rangle\Diamond_C^*\neg\psi \notin V_0$, then $[\alpha]\Box_C^*\psi \in V_0$. V_0 contains $[\alpha]\Box_C^*\psi \wedge nf(\text{PRE}(\alpha)) \rightarrow \Box_A[\alpha_1]\Box_C^*\psi$. (That is, this sentence is valid by Lemma 5.10, part (2). Hence it belongs to every maximal consistent set.) So V_0 contains $\Box_A[\alpha_1]\Box_C^*\psi$. This sentence belongs to Δ by Lemma 6.3, part (2). Now by definition of $\xrightarrow{\Delta}$ in \mathcal{F} , we see that $[\alpha_1]\Box_C^*\psi \in V_1$. This is a contradiction to our observation at the end of the previous paragraph. \dashv

Lemma 6.22 *If $V_0^* \wedge \langle\alpha\rangle\Diamond_C^*\psi$ is consistent, then there is a good path from $[V_0]$ for $\langle\alpha\rangle\Diamond_C^*\psi$.*

Proof For each β such that $\alpha \rightarrow_C^* \beta$, let S_β be the (finite) set of all $[W] \in \mathcal{F}$ such that there is *no* good path from $[W]$ for $\langle\beta\rangle\Diamond_C^*\psi$. We need to see that $[V_0] \notin S_\alpha$; suppose toward a contradiction that $[V_0] \in S_\alpha$. Let

$$\chi_\beta = \bigvee\{W^* : W \in S_\beta\}.$$

Note that $\neg\chi_\beta$ is logically equivalent to $\bigvee\{X^* : [X] \in \mathcal{F} \text{ and } X \notin S_\beta\}$. Since we assumed $[V_0] \in S_\alpha$, we have $\vdash V_0^* \rightarrow \chi_\alpha$.

We first claim for β such that $\alpha \rightarrow_C^* \beta$, $\chi_\beta \wedge \langle\beta\rangle\psi$ is inconsistent. Otherwise, there would be $[W] \in S_\beta$ such that $\chi_\beta \wedge \langle\beta\rangle\psi \in W$. Note that by the Partial Functionality Axiom, $\vdash \langle\beta\rangle\psi \rightarrow \text{PRE}(\beta)$. But then the one-point path $[W]$ is a good path from $[W]$ for $\langle\beta\rangle\Diamond_C^*\psi$. Thus $[W] \notin S_\beta$, and this is a contradiction. So indeed, $\chi_\beta \wedge \langle\beta\rangle\psi$ is inconsistent. Therefore, $\vdash \chi_\beta \rightarrow [\beta]\neg\psi$.

We next show that for all $A \in \mathcal{C}$ and all β such that $\beta \rightarrow_A \gamma$, $\chi_\beta \wedge \text{PRE}(\beta) \wedge \Diamond_A\neg\chi_\gamma$ is inconsistent. Otherwise, there would be $[W] \in S_\beta$ with χ_β , $\text{PRE}(\beta)$, and $\Diamond_A\neg\chi_\gamma$ in it. Then $\bigvee\{\Diamond_A X^* : X \notin S_\gamma\}$, being equivalent to $\Diamond_A\neg\chi_\gamma$, would belong to W . It follows that $\Diamond_A X^* \in W$ for some $[X] \notin S_\gamma$. By Proposition 6.20, $[W] \rightarrow_A [X]$. Since $[X] \notin S_\gamma$, there is a good path from $[X]$ for $\langle\gamma\rangle\Diamond_C^*\psi$. But since $\beta \rightarrow_A \gamma$ and W contains $\text{PRE}(\beta)$, we also have a good path from $[W]$ for $\langle\beta\rangle\Diamond_C^*\psi$. This again contradicts $[W] \in S_\beta$. As a result, for all relevant A , β , and γ , $\vdash \chi_\beta \wedge \text{PRE}(\beta) \rightarrow \Box_A\chi_\gamma$.

By the Action Rule, $\vdash \chi_\alpha \rightarrow [\alpha]\Box_C^*\neg\psi$. Now $\vdash V_0^* \rightarrow \chi_\alpha$. So $\vdash V_0^* \rightarrow [\alpha]\Box_C^*\neg\psi$. This contradicts the assumption with which we began this proof. \dashv

Lemma 6.23 (Truth Lemma) *Consider a sentence φ , and also the set $\Delta = f(\varphi)$. For all $\chi \in \Delta$ and $[U] \in \mathcal{F}$: $\chi \in U$ iff $\langle\mathcal{F}, [U]\rangle \models \chi$.*

Proof We argue by induction on the wellfounded $<$ that if $\chi \in \Delta$, then: $\chi \in U$ iff $\langle\mathcal{F}, [U]\rangle \models \chi$. The case of χ atomic is trivial. Now assume this Truth Lemma for sentences $< \chi$. Recall that $\Delta \subseteq \mathcal{NF}$, our set of normal forms (see Section 6.1). We argue by cases on χ .

The cases that χ is either a negation or conjunction are trivial.

Suppose next that $\chi \equiv \Box_A\psi$. Suppose $\Box_A\psi \in U$; we show $\langle\mathcal{F}, [U]\rangle \models \Box_A\psi$. Let $[V]$ be such that $[U] \xrightarrow{\Delta} [V]$. Then by definition of $\xrightarrow{\Delta}$, $\psi \in V$. The induction hypothesis applies to ψ , since

$\psi < \Box_A \psi$, and since $\psi \in \Delta$ by Lemma 6.3, part (1). So by induction hypothesis, $\langle \mathcal{F}, [V] \rangle \models \psi$. This gives half of our equivalence. Conversely, suppose that $\langle \mathcal{F}, [U] \rangle \models \Box_A \psi$. Suppose towards a contradiction that $\Diamond_A \neg \psi \in U$. So $U^* \wedge \Diamond_A \neg \psi$ is consistent. We use equation (6.4) and the fact that \Diamond_A distributes over disjunctions to see that $U^* \wedge \Diamond_A \neg \psi$ is logically equivalent to $\bigvee (U^* \wedge \Diamond_A V^*)$, where the disjunction is taken over all V which contain $\neg \psi$. Since $U^* \wedge \Diamond_A \neg \psi$ is consistent, one of the disjuncts $U^* \wedge \Diamond_A V^*$ must be consistent. The induction hypothesis again applies, and we use it to see that $\langle \mathcal{F}, [V] \rangle \models \neg \psi$. By Proposition 6.20, $[U] \triangleq [V]$. We conclude that $\langle \mathcal{F}, [U] \rangle \models \Diamond_A \neg \psi$, and this is a contradiction.

For χ of the form $\Box_{\mathcal{C}}^* \psi$, we use the standard argument for PDL (see Kozen and Parikh [12]). This is based on lemmas that parallel Lemmas 6.21 and 6.22. The work is somewhat easier than what we do below for sentences of the form $[\alpha] \Box_{\mathcal{C}}^* \psi$, and so we omit these details.

We conclude with the case when χ is a normal form sentence of the form $[\alpha] \Box_{\mathcal{C}}^* \psi \in \Delta$. Assume that $[\alpha] \Box_{\mathcal{C}}^* \psi \in \Delta$. First, suppose that $[\alpha] \Box_{\mathcal{C}}^* \psi \notin U$. Then by Lemma 6.22, there is a good path from $[U]$ for $\langle \alpha \rangle \Diamond_{\mathcal{C}}^* \neg \psi$. We want to apply Lemma 5.3 in \mathcal{F} to assert that $\langle \mathcal{F}, [U] \rangle \models \langle \alpha \rangle \Diamond_{\mathcal{C}}^* \neg \psi$. Let k be the length of the good path. For $i \leq k$, $\text{PRE}(\alpha_i) \in U_i$. Now each $nf(\text{PRE}(\alpha_i))$ belongs to Δ by Lemma 6.3, part (2), and is $< [\alpha] \Box_{\mathcal{C}}^* \psi$. So by induction hypothesis, $\langle \mathcal{F}, [U_i] \rangle \models nf(\text{PRE}(\alpha_i))$. By soundness, $\langle \mathcal{F}, [U_i] \rangle \models \text{PRE}(\alpha_i)$. We also need to check that $\langle \mathcal{F}, [U_k] \rangle \models \langle \alpha_k \rangle \neg \psi$. For this, recall from Lemma 6.2 that Δ contains $nf(\neg[\alpha_k] \psi) \leq \neg[\alpha_k] \psi < [\alpha] \Box_{\mathcal{C}}^* \psi$. Since the path is good, U_k contains $\langle \alpha_k \rangle \neg \psi$; thus it contains $\neg[\alpha_k] \psi$; and finally it contains $nf(\neg[\alpha_k] \psi)$. By induction hypothesis, $\langle \mathcal{F}, [U_k] \rangle \models nf(\neg[\alpha_k] \psi)$. By soundness, $\langle \mathcal{F}, [U_k] \rangle \models \neg[\alpha_k] \psi$. Thus $\langle \mathcal{F}, [U_k] \rangle \models \langle \alpha_k \rangle \neg \psi$. Now it does follow from Lemma 5.3 that $\langle \mathcal{F}, [U] \rangle \models \langle \alpha \rangle \Diamond_{\mathcal{C}}^* \neg \psi$.

Going the other way, suppose that $\langle \mathcal{F}, [U] \rangle \models \langle \alpha \rangle \Diamond_{\mathcal{C}}^* \neg \psi$. By Lemma 5.3, we get a path in \mathcal{F} witnessing this. The argument of the previous paragraph shows that this path is a good path from $[U]$ for $\langle \alpha \rangle \Diamond_{\mathcal{C}}^* \neg \psi$. By Lemma 6.21, U contains $\langle \alpha \rangle \Diamond_{\mathcal{C}}^* \neg \psi$. This completes the proof. \dashv

Theorem 6.24 (Completeness) *For all φ , $\vdash \varphi$ iff $\models \varphi$. Moreover, this relation is decidable.*

Proof By Lemma 6.1, $\vdash \varphi \leftrightarrow nf(\varphi)$. Let φ be consistent. By the Truth Lemma, $nf(\varphi)$ holds at some world in the filtration \mathcal{F} . So $nf(\varphi)$ has a model; thus φ has one, too. This establishes completeness. For decidability, note that the size of the filtration is computable in the size of the original φ . (Another proof of decidability: we show in Section 7.1 that $\mathcal{L}_1(\Sigma)$ can be translated into propositional dynamic logic (PDL) fairly directly, and that logic is decidable. Neither argument gives a good estimate of the complexity.) \dashv

6.4 Extensions to the completeness theorem

We briefly mention extensions of the Completeness Theorem 6.24.

First, consider the case of S5 (or K45) actions. We change our logical system by restricting to these S5 actions, and we add the S5 axioms to our logical system. We interpret this new system on S5 models. It is easy to check that applying an S5 action to an S5 model gives another S5 model. Further, the S5 actions are closed under composition. Finally, if α is an S5 action and $\alpha \rightarrow_A \beta$, then β also is an S5 action. These easily imply the soundness of the new axioms. For completeness, we need only check that if we assume the S5 axioms, then the

filtration \mathcal{F} from the previous section has the property that each \xrightarrow{A} is an equivalence relation. This is a standard exercise in modal logic (see, e.g., Fagin et al [7], Theorem 3.3.1).

Second, we also have completeness not only for the languages $\mathcal{L}_1(\Sigma)$, but also for the languages in [1] that are constructed from *families* SS of action signatures. This construction is most significant in the case when SS is an infinite set of signatures; for example, SS might contain a copy of every finite signature. In that setting, the language $\mathcal{L}(SS)$ would not be the language of any finite signature. But for the (weak) completeness result of this section, the advantage of the extended definition is lost. The point is that for single sentences, we may restrict attention to a finite subset of SS . And for finite sets SS , $\mathcal{L}(SS)$ is literally the language of the coproduct signature

$$\oplus\{\Sigma : \Sigma \in SS\}.$$

We already have completeness for such languages.

Our final extension concerns the move from actions as we have been working them to actions which change the truth values of atomic sentences. If we make this move, then the axiom of Atomic Permanence is no longer sound. However, it is easy to formulate the relevant axioms. For example, if we have an action α which effects the change $p := p \wedge \neg q$, then we would take an axiom $[\alpha]p \leftrightarrow (\text{PRE}(\alpha) \rightarrow p \wedge \neg q)$. Having made these changes, all of the rest of the work we have done goes through. In this way, we get a completeness theorem for this logic.⁵

Endnotes Special cases of Theorem 6.19 for some of the target logics are due to Plaza [14], Gerbrandy [9, 10], and Gerbrandy and Groeneveld [11]. The proofs in these sources also go via translation to modal logic.

⁵from larry: I think we need more on this point

7 Results on expressive power

In this section, we study a number of expressive power issues related to our logics. The four subsections are for the most part independent.

7.1 Translation of $\mathcal{L}_1(\Sigma)$ into PDL

In this section Σ is an arbitrary action signature. In Section 6.1, we saw normal forms for $\mathcal{L}_0(\Sigma)$ and $\mathcal{L}_1(\Sigma)$. We showed in that section that every sentence in $\mathcal{L}_1(\Sigma)$ is provably equivalent to its normal form, and the normal forms of sentences of $\mathcal{L}_0(\Sigma)$ are exactly the purely modal sentences. This proves that in terms of expressive power, $\mathcal{L}_0(\Sigma)$ is equivalent to \mathcal{L}_0 , ordinary modal logic.

Further, we can show that $\mathcal{L}_1(\Sigma)$ and indeed the full language $\mathcal{L}(\Sigma)$ is a sublogic of \mathcal{L}_0^ω , the extension of modal logic with countable boolean conjunction and disjunction. The idea is contained in the following clauses:

$$\begin{aligned} (\Box_{\mathcal{B}}^* \varphi)^t &= \bigwedge_{\langle A_1, \dots, A_n \rangle \in \mathcal{B}^*} (\Box_{A_1} \cdots \Box_{A_n} \varphi)^t \\ ([\alpha] \Box_{\mathcal{B}}^* \psi)^t &= \bigwedge_{\langle A_1, \dots, A_n \rangle \in \mathcal{B}^*} ([\alpha] \Box_{A_1} \cdots \Box_{A_n} \psi)^t \\ ([\pi]^* \varphi)^t &= \bigwedge_n ([\pi]^n \varphi)^t \end{aligned}$$

It is natural to ask whether there are any finite logics which have been previously studied and into which our logics can be embedded. One possibility is the Modal Iteration Calculus (*MIC*) introduced in Dawar, Grädel, and Kreutzer [5]. The full language $\mathcal{L}(\Sigma_{\text{pub}})$ is a sublanguage of *MIC*, see [13] for details. It is likely that this result extends to all other finite action signatures. In another direction, we ask whether the fragments $\mathcal{L}_1(\Sigma)$ are sublogics of previously-studied systems.

Theorem 7.1 *Every sentence of $\mathcal{L}_1(\Sigma)$ is equivalent to a sentence of PDL.*

Proof (Sketch) We argue by induction on the wellorder $<$ introduced and studied in Section 6.1. It is sufficient to show that each sentence in the set \mathcal{NF} of normal forms of $\mathcal{L}_1(\Sigma)$ is equivalent to a sentence of PDL. (The normal forms were introduced in Section 6.1, and the reader may wish to look back at Lemma 6.13.) We just give the main induction step.

Suppose that $[\alpha] \Box_{\mathcal{C}}^* \varphi$ is a normal form sentence. Our induction hypothesis implies that each $\psi < [\alpha] \Box_{\mathcal{C}}^* \varphi$ is equivalent to some PDL sentence ψ' . We shall show that $\langle \alpha \rangle \Diamond_{\mathcal{C}}^*$ is itself equivalent to some PDL sentence; hence also $[\alpha] \Box_{\mathcal{C}}^* \varphi$ has this property. For this, we use the semantic equivalent given in Lemma 5.3. Recall first that there are only finitely many β such that $\alpha \xrightarrow{*} \beta$. Let X be the (finite) set of all such β such that $\alpha \xrightarrow{\mathcal{C}} \beta$. That is, the actions β reachable from α by a path labeled by agents in the set \mathcal{C} . We consider X as a sub-action structure of Ω .

We consider $\mathcal{C} \cup X$, and we assume that this union is disjoint. We consider the set $(\mathcal{C} \cup X)^*$ of all finite words on this set. We are interested in finite \mathcal{C} -labeled paths through X beginning at α and ending at an arbitrary element of X . At this point, we shall develop our proof only by example.

Suppose that $\mathcal{C} = \{A, B\}$ and that $X = \{\alpha, \beta\}$, with $\alpha \xrightarrow{A} \alpha$, $\alpha \xrightarrow{B} \beta$, and $\beta \xrightarrow{A} \alpha$. Then one of the paths of interest would be

$$\alpha \quad A \quad \alpha \quad B \quad \beta \quad A \quad \alpha$$

(Note that this corresponds to $\alpha \xrightarrow{A} \alpha \xrightarrow{B} \beta \xrightarrow{A} \alpha$.) We are only interested in paths that respect the structure of Ω . By Kleene's Theorem, the set P of finite paths of this type beginning at our fixed action α is a regular language on $\mathcal{C} \cup X$. In our example, P is given by the regular expression

$$((\alpha(A\alpha)^*(B\beta A))^*(\epsilon + B\beta)).$$

With each such regular expression we associate a PDL program that represents it. In our example, we would have

$$(?PRE'(\alpha); ((\langle A \rangle; ?PRE'(\alpha))^*; (\langle B \rangle; ?PRE'(\beta); \langle A \rangle))^*; (?true + \langle B \rangle; ?PRE'(\beta))).$$

(The notation $PRE'(\gamma)$ means the PDL translation of $PRE(\gamma)$; such a PDL sentence exists since $PRE(\gamma) < [\alpha] \square_{\mathcal{C}}^* \varphi$.) Again, this is a PDL program $\pi = \pi(X, \alpha)$ whose denotation $\llbracket \pi \rrbracket_{\mathbf{S}}$ in a state model \mathbf{S} is the set of pairs (s, t) of states such that there is a path

$$s = s_0 \quad \rightarrow_{A_1} \quad s_1 \quad \rightarrow_{A_2} \quad \cdots \quad \rightarrow_{A_{k-1}} \quad s_{k-1} \quad \rightarrow_{A_k} \quad s_k$$

and also a sequence of actions of the same length k ,

$$\alpha = \alpha_0 \quad \rightarrow_{A_1} \quad \alpha_1 \quad \rightarrow_{A_2} \quad \cdots \quad \rightarrow_{A_{k-1}} \quad \alpha_{k-1} \quad \rightarrow_{A_k} \quad \alpha_k$$

such that each $A_i \in \mathcal{C}$, each $s_i \in \llbracket PRE(\alpha_i) \rrbracket_{\mathbf{S}}$ for all $0 \leq i \leq k$, and finally such that $s_k = t$. Consider now the PDL sentence $\langle \pi \rangle (\langle \alpha_k \rangle \varphi)'$. (As above, $(\langle \alpha_k \rangle \varphi)'$ means the PDL translation of $\langle \alpha_k \rangle \varphi$. This exists because $[\alpha_k] \varphi < [\alpha] \square_{\mathcal{C}}^* \varphi$; see Lemma 6.13.) A state s satisfies $\langle \pi \rangle (\langle \alpha_k \rangle \varphi)'$ in \mathbf{S} iff there is some $(s, t) \in \llbracket \pi \rrbracket_{\mathbf{S}}$ such that $t \in \llbracket \langle \alpha_k \rangle \varphi \rrbracket_{\mathbf{S}}$. Putting together our description of $\llbracket \pi \rrbracket_{\mathbf{S}}$ with this, we see that $(s, t) \in \llbracket \pi \rrbracket_{\mathbf{S}}$ iff $s \in \llbracket \langle \alpha \rangle \diamond_{\mathcal{C}}^* \rrbracket_{\mathbf{S}}$; see Lemma 5.3. \dashv

At this point, we know that $\mathcal{L}_1(\Sigma)$ is a sublogic of PDL. So it is interesting to ask whether this extends to the full logic $\mathcal{L}(\Sigma)$; recall that this last language has the operation of *program* iteration π^* . It turns out that $\mathcal{L}(\Sigma)$ lacks the finite model property even when Σ is as simple as the signature of public announcements and indeed when the only sentenced announced publically and repeatedly is $\diamond true$ (see Section 7.4 below). Since PDL has the finite model property, we see that $\mathcal{L}(\Sigma)$ is not a sublogic of PDL. In fact, it also shows that $\mathcal{L}(\Sigma)$ is not even a sublogic of the modal mu-calculus.

7.2 $\mathcal{L}_1(\Sigma_{\text{pub}})$ is more expressive than \mathcal{L}_1

Recall that \mathcal{L}_1 in this paper is multi-agent modal logic together with the common-knowledge operators $\square_{\mathcal{B}}^*$ for sets of agents. Our main result here is that \mathcal{L}_1 is strictly weaker than $\mathcal{L}_1(\Sigma_{\text{pub}})$, the logic obtained by adding public announcements to \mathcal{L}_1 .

We define a *rank* $|\varphi|$ on sentences from $\mathcal{L}_1(\Sigma_{\text{pri}})$. Let $|p| = 0$ for p atomic, $|\neg\varphi| = |\varphi|$, $|\varphi \wedge \psi| = \max(|\varphi|, |\psi|)$, $|\diamond_A \varphi| = 1 + |\varphi|$, for all $A \in \mathcal{A}$, and $|\diamond_{\mathcal{B}}^* \varphi| = 1 + |\varphi|$ for all $\mathcal{B} \subseteq \mathcal{A}$.

Games for \mathcal{L}_1 The main technique in the proof is an adaptation of Fraisse-Ehrenfeucht games to the setting of modal logic. Let (\mathbf{S}, s) and (\mathbf{T}, t) be states; i.e., model-world pairs. By recursion on the natural number n we define a game $G_n((\mathbf{S}, s), (\mathbf{T}, t))$. For $n = 0$, II immediately wins if the following holds: for all $p \in \text{AtSen}$, $(\mathbf{S}, s) \models p$ iff $(\mathbf{T}, t) \models p$. And if s and t differ on some atomic sentence, I immediately wins. Continuing, here is how we define $G_{n+1}((\mathbf{S}, s), (\mathbf{T}, t))$.

As in the case of the G_0 games, we first check if s and t differ on some atomic sentence. If they do, then I immediately wins. Otherwise, the play continues. Now I can make two types of moves.

1. A \diamond_A -move: I has a choice of playing from \mathbf{S} or from \mathbf{T} , and also some agent A . If I chooses \mathbf{S} , then I continues by choosing some s' such that $s \xrightarrow{A} s'$ in \mathbf{S} . Then II replies with some $t' \in T$ such that $t \xrightarrow{A} t'$. Of course, if I had chosen in \mathbf{T} , then II would have chosen in S . Either way, points s' and t' are determined, and the two players then play $G_n((\mathbf{S}, s'), (\mathbf{T}, t'))$.
2. A $\diamond_{\mathcal{B}}^*$ -move: I plays by selecting \mathbf{S} (or \mathbf{T} , but we ignore this symmetric case below), and some set \mathcal{B} of agents, and then I continues by playing some s' (say) reachable from s in the reflexive-transitive closure $\xrightarrow{\mathcal{B}^*}$ of $\xrightarrow{\mathcal{B}}$; II responds with a point t' in the other model, \mathbf{T} , which is similarly related to t .

We write $(\mathbf{S}, s) \sim_n (\mathbf{T}, t)$ if II has a winning strategy in the game $G_n((\mathbf{S}, s), (\mathbf{T}, t))$. It is easy to check that by induction on m that if $(\mathbf{S}, s) \sim_n (\mathbf{T}, t)$ and $m < n$, then $(\mathbf{S}, s) \sim_m (\mathbf{T}, t)$.

Proposition 7.2 *If $(\mathbf{S}, s) \sim_n (\mathbf{T}, t)$, then for all φ with $|\varphi| \leq n$, $(\mathbf{S}, s) \models \varphi$ iff $(\mathbf{T}, t) \models \varphi$.*

The proof is standard, except perhaps for the easy extra step for \diamond^* moves.

We have two results that show that public announcements add expressive power to \mathcal{L}_1 . The first is for one agent on arbitrary models, and the second is for two agents on equivalence relations.

In the first result, let \mathcal{A} be a singleton $\{A\}$. We drop the A from the notation.

Theorem 7.3 *The $\mathcal{L}_1(\Sigma_{pub})$ sentence $\langle Pub p \rangle \diamond^* q$ is not expressible in \mathcal{L}_1 , even by a set of sentences.*

Proof Fix a number n . We first show that $\langle Pub p \rangle \diamond^* q$ is not expressible by any single sentence of \mathcal{L}_1 of rank n . Let A_n be the cycle

$$a_0 \rightarrow a_1 \rightarrow \cdots \rightarrow a_{n+2} \rightarrow a_{n+3} \rightarrow \cdots a_{2n+4} = a_0.$$

We set p true everywhere except a_{n+2} and q true only at a_0 .

Announcing p means that we delete a_{n+2} . So $A_n(Pub p)$ splits into two disjoint pieces. this means that in $A_n(Pub p)$, a_1 does not satisfy $\diamond^* q$. But a_{n+3} does satisfy it.

We show that a_1 and a_{n+3} agree on all sentences of \mathcal{L}_1 of rank $\leq n$. For this, we show that II has a winning strategy in the n -round game on between (A_n, a_{n+1}) and (A_n, a_{n+3}) . Then we appeal to Proposition 7.2. II 's strategy is as follows: if I ever makes a \diamond^* move, II should make a move on the other side to the exact same point. (Recall that A_n is a cycle.) Thereafter, II should mimic I 's moves exactly. Since the play will end with the same point in the two structures, II wins. But if I never makes a \diamond^* move, the play will consist of n \diamond -moves. II should simply make the same moves in the appropriate structures. Since a_{n+2} is $n + 1$ steps from a_1 , and $a_0 = a_{2n+4}$ is $n + 1$ steps from a_{n+3} , II will win the play in this case.

So at this point we conclude that for all n , $\langle Pub\ p \rangle \diamond^* q$ is not expressible by any single sentence of \mathcal{L}_1 of rank n . We conclude by extending this to show that $\langle Pub\ p \rangle \diamond^* q$ is not expressible by any *set* of sentences of \mathcal{L}_1 . Suppose towards a contradiction that $\langle Pub\ p \rangle \diamond^* q$ were equivalent to the set $T \subseteq \mathcal{L}_1$. Consider the following models \mathcal{A} and \mathcal{B} : $\mathcal{A} = \oplus_{n \geq 0} (A_n, a_1^n)$; i.e., take the disjoint union of the models $\oplus A_n$, and then identify all points a_1^n . We also rename the common a_1^n point to be a , and we take this as the distinguished point. So we consider (\mathcal{A}, a) . Similarly, let $\mathcal{B} = \oplus_{n \geq 0} (A_n, a_{n+3}^n)$. For clarity we'll rename each point a_j^m to be b_j^m . And we write b for the distinguished point of \mathcal{B} . The construction insures that $(\mathcal{A}, a) \models \neg \langle Pub\ p \rangle \diamond^* q$ and $(\mathcal{B}, b) \models \langle Pub\ p \rangle \diamond^* q$.

By definition of T , $(\mathcal{B}, b) \models \varphi$ for all $\varphi \in T$. Let $\varphi \in T$ be such that $(\mathcal{A}, a) \models \neg \varphi$. Let $m = |\varphi|$. Let

$$\mathcal{C} = \oplus(\{(A_n, a_1^n) : n \neq m\} \cup \{(A_m, a_{m+3}^m)\}).$$

Notice that we switched exactly one of the identified points. Just as before, we'll rename the points of \mathcal{C} and call the overall distinguished point c . It is easy to check that $(\mathcal{C}, c) \models \langle Pub\ p \rangle \diamond^* q$. And since this sentence is equivalent to T , we also have $(\mathcal{C}, c) \models \varphi$. But we now show that (\mathcal{A}, a) and (\mathcal{C}, c) agree on all sentences of rank $\leq m$. This implies that $(\mathcal{A}, a) \models \varphi$, giving the needed contradiction.

Here is a winning strategy for II in the m -round game between (\mathcal{A}, a) and (\mathcal{C}, c) . If I opens with anything besides c_{m+3}^m or a_1^m , II should play the corresponding point on the other side and thereafter play in the obvious way. If I opens with c_{m+3}^m , II should play with a_1^m and thereafter play with basically the same strategy as in the first part of this theorem; similarly, if I opens with a_1^m , II should reply c_{m+3}^m and thereafter play via the strategy in the first part of this proof, where we dealt with single sentences. \dashv

Partition models Often in epistemic logic one is concerned with models in which every accessibility relation \triangleleft is an equivalence relation. We can obtain a version of Theorem 7.3 which shows that even on this smaller class of models, public announcements add expressive power to \mathcal{L}_1 . However, we must use two agents: with one agent and an equivalence relation $\Box^* \varphi$ is equivalent to $\Box \varphi$. Thus every sentence in $\mathcal{L}_1(\Sigma_{pub})$ on one-agent equivalence relations is equivalent to a purely modal sentence.

Theorem 7.4 *The $\mathcal{L}_1(\Sigma_{pub})$ sentence $\langle Pub\ p \rangle \diamond_{A,B}^* q$ is not expressible by any set of sentences of \mathcal{L}_1 , even on the class of models in which \triangleleft_A and \triangleleft_B are equivalence relations.*

Proof We fix a number N and first show that $\langle Pub\ p \rangle \diamond^* q$ is not expressible by any single sentence of \mathcal{L}_1 of rank N . Let n be the smallest even number strictly larger than N . Let C_n be as defined in Section 3.2 above. Note that C_n does have the property that \triangleleft_A and \triangleleft_B are equivalence relations. In addition, $(\triangleleft_A)^*$ is the same relation as \triangleleft_A . So $\Box_A^* \varphi$ is equivalent to $\Box_A \varphi$ (and similarly for B). Finally, $(\triangleleft_A \cup \triangleleft_B)^*$ is the universal relation. So if any point whatsoever satisfies a sentence $\Box_{A,B}^* \varphi$, then all points satisfy it.

The analysis of Section 3.2 shows that the points a_{n+1} and a_{3n+1} differ on our sentence $\langle Pub\ p \rangle \diamond_{A,B}^* q$.

We continue by showing that II has a winning strategy in the n -round game on C_n from a_{n+1} and a_{3n+1} . If I ever makes a \diamond^* move, then II should move to the same point and

thereafter mimic I perfectly. Thus we may assume that I never makes any \diamond^* moves. In this case, I will never move either point to a_1 , a_{2n+1} , or a_{4n+1} . In other words, all points in the play will satisfy $p \wedge \neg q$. So as long as I plays \diamond -moves, II can follow arbitrarily. Once again, since the game goes for n rounds, this will be a winning strategy.

At this point we know that $\langle Pub \ p \rangle \diamond^* q$ is not expressible by any single sentence of \mathcal{L}_1 of rank $n > N$. We use the same idea as in Theorem 7.3 to show that $\langle Pub \ p \rangle \diamond^* q$ is not expressible by any set of sentences of \mathcal{L}_1 . In fact, virtually the same proof goes through. \dashv

7.3 $\mathcal{L}_1(\Sigma_{pri})$ is more expressive than $\mathcal{L}_1(\Sigma_{pub})$

It is natural to assume that *privacy* adds expressive power to logics of communication. The result of this section is the first result we know that establishes this. In it, we assume that our set of agents is the doubleton $\{A, B\}$.

Theorem 7.5 *The $\mathcal{L}_1(\Sigma_{pri})$ -sentence $\chi = \langle Pri^A \ p, true \rangle \diamond_A^* \diamond_B \neg p$ cannot be expressed by any set T of sentences of $\mathcal{L}_1(\Sigma_{pub})$.*

We shall use the models \mathbf{S}_f and $\mathbf{T}_{f,j}$ from Section 3.2. It would be good to keep the picture in mind while reading the results to follow.

Lemma 7.6 *For all $x \in \mathbf{S}_f$ other than a , $(\mathbf{S}_f, x) \equiv (\mathbf{T}_{f,j}, x)$. That is, there is a bisimulation between \mathbf{S}_f and $\mathbf{T}_{f,j}$ relating x to itself.*

Proof The point is that a is not the target of any arrows in either structure. So we consider the set of all pairs of points other than a . This relation is a bisimulation between \mathbf{S}_f and $\mathbf{T}_{f,j}$ relating each $x \neq a$ to itself. \dashv

Lemma 7.7 *Let χ be the sentence $\langle Pri^A \ p, true \rangle \diamond_A^* \diamond_B \neg p$. Then for all f and j , $(\mathbf{S}_f, a) \models \neg \chi$ but $(\mathbf{T}_{f,j}, b) \models \chi$.*

Proof This point was mentioned in Section 3.2, but we review the matter for the reader. In the updated structure $\mathbf{S}_f \otimes (Pri^A \ p, true)$, the only arrow from (a, Pri) is the self-loop $(a, Pri) \xrightarrow{A} (a, Pri)$. So the updated structure does not satisfy $\diamond_A^* \diamond_B \neg p$, and the original \mathbf{S}_f does not satisfy our χ . But in $\mathbf{T}_{f,j} \otimes (Pri^A \ p, true)$ we have

$$(a, Pri^A) \xrightarrow{A} (c_1^j, Pri) \xrightarrow{A} \dots \xrightarrow{A} (c_{f(j)}^j, Pri^A) \xrightarrow{B} (b, skip).$$

So we see that $(\mathbf{T}_{f,j}, a) \models \chi$. \dashv

We define a function $|\varphi|$ on $\mathcal{L}(\Sigma_{pub})$: $|p| = 0$ for p atomic, $|\neg \varphi| = |\varphi|$, $|\varphi \wedge \psi| = \max(|\varphi|, |\psi|)$, $|\diamond_A \varphi| = 1 + |\varphi|$, $|\diamond_B \varphi| = 1$, $|\diamond_B^* \varphi| = |\varphi|$ for all $\mathcal{B} \subseteq \mathcal{A}$, and $|\langle Pub \ \varphi \rangle \psi| = \max(|\varphi|, |\psi|)$.

Lemma 7.8 *Let $J \subseteq N^+$, $f : J \rightarrow N^+$, and $j \in J$. Let $\varphi \in \mathcal{L}(\Sigma_{pub})$, and let $1 \leq k \leq f(j)$. If $f(j) - k \geq |\varphi|$, then*

$$(\mathbf{S}_f, a) \models \varphi \quad \text{iff} \quad (\mathbf{S}_f, c_k^j) \models \varphi \quad \text{iff} \quad (\mathbf{T}_{f,j}, a) \models \varphi.$$

Proof By induction on φ . The base step for atomic p and the induction steps for the boolean connectives are all trivial.

The induction step for $\diamond_A\varphi$ Assume that $f(j) - k \geq |\diamond_A\varphi|$. We prove the needed equivalences in a cycle.

Assume first that $(\mathbf{S}_f, a) \models \diamond_A\varphi$. Since $a \xrightarrow{A} a$ and $a \xrightarrow{A} b$ in \mathbf{S}_f , there are two cases. If a itself satisfies φ in A , then the reflexive arrow on c_k^j shows that $(\mathbf{S}_f, c_k^j) \models \diamond_A\varphi$. And if $(\mathbf{S}_f, b) \models \varphi$, then clearly $(\mathbf{S}_f, c_k^j) \models \diamond\varphi$ via $c_k^j \xrightarrow{A} b$.

Second, assume that $(\mathbf{S}_f, c_k^j) \models \diamond_A\varphi$. We shall not go into details on the subcases parallel to what we saw in the previous paragraph. The only subcase worth mentioning is where $(\mathbf{S}_f, c_{k+1}^j) \models \varphi$. Note here that $f(j) - (k+1) \geq |\diamond_A\varphi| - 1 = |\varphi|$. In particular, we have $k+1 \leq f(j)$. And so by our induction hypothesis, $(\mathbf{T}_{f,j}, a) \models \varphi$. Thus $(\mathbf{T}_{f,j}, a) \models \diamond_A\varphi$.

Finally, assume that $(\mathbf{T}_{f,j}, a) \models \diamond_A\varphi$. Remembering that $a \xrightarrow{A} c_1^j$ in B , the important subcase is where $(\mathbf{T}_{f,j}, c_1^j) \models \varphi$. By Lemma 7.6, $(\mathbf{S}_f, c_1^j) \models \varphi$. Also, $f(j) - 1 \geq f(j) - (k+1) \geq |\varphi|$. So by the induction hypothesis, $(\mathbf{S}_f, a) \models \varphi$. And then $(\mathbf{S}_f, a) \models \diamond_A\varphi$.

The induction step for $\diamond_B\varphi$ Recall that $|\diamond_B\varphi| = 1$. Since we assume $f(j) - k \geq 1$, we have $k < f(j)$. In particular, $(\mathbf{S}_f, c_k^j) \not\models \diamond_B\varphi$. All three needed statements are automatically false, so all three are equivalent.

The induction step for $\diamond_B^*\varphi$ Assume $f(j) - k > |\diamond_B^*\varphi| = |\varphi|$. We again have a cycle of equivalences. Before we turn to them, we remind the reader that with two agents, \mathcal{B} can be $\{A\}$, $\{B\}$ or $\{A, B\}$ here. Note that \xrightarrow{B} is already transitive, so all the work for $\diamond_B^*\varphi$ has been done above already. Also, \xrightarrow{B} is a subrelation of \xrightarrow{A} in \mathbf{S}_f , and \xrightarrow{B} is a subrelation of $\xrightarrow{A^*}$ in \mathbf{S}_f . Thus we only need to work with $\mathcal{B} = \{A\}$ in this induction step.

Assume first that $(\mathbf{S}_f, a) \models \diamond_A^*\varphi$. There are a number of cases. If $(\mathbf{S}_f, a) \models \varphi$, then by induction hypothesis, $(\mathbf{S}_f, c_k^j) \models \varphi$. So $(\mathbf{S}_f, c_k^j) \models \diamond_A^*\varphi$. The other case is where $a \xrightarrow{A} x$ and $x \models \varphi$. Note in this case that $c_k^j \xrightarrow{A} x$ as well: all non-null paths from a go through b , and $c^j \xrightarrow{A} b$. Thus in this case we have $(\mathbf{S}_f, c_k^j) \models \diamond_A^*\varphi$.

Next, assume that $(\mathbf{S}_f, c_k^j) \models \diamond_A^*\varphi$. Let x be such that $c_k^j \xrightarrow{A^*} x$ and $(\mathbf{S}_f, x) \models \varphi$. Clearly $x \neq a$. By the bisimulation noted in Lemma 7.6, $(\mathbf{T}_{f,j}, x) \models \varphi$. Also, $b \xrightarrow{A^*} c_k^j \xrightarrow{A^*} x$. So $(\mathbf{T}_{f,j}, a) \models \diamond_A^*\varphi$.

Suppose finally that $(\mathbf{T}_{f,j}, a) \models \diamond_A^*\varphi$. If $(\mathbf{T}_{f,j}, a) \models \varphi$, then by induction hypothesis we have $(\mathbf{S}_f, a) \models \varphi$. So in this case $(\mathbf{S}_f, a) \models \diamond_A^*\varphi$ as well. The other case is where $(\mathbf{T}_{f,j}, x) \models \varphi$ for some $x \neq a$. By bisimulation again, $(\mathbf{S}_f, x) \models \varphi$. And in \mathbf{S}_f , $a \xrightarrow{A^*} x$. Thus $(\mathbf{S}_f, a) \models \diamond_A^*\varphi$, as desired.

The induction step for $[Pub \varphi]\psi$ Assume that $f(j) - k > |[Pub \varphi]\psi| = \max(|\varphi|, |\psi|)$. We remind the reader of the definitions and of some of the notation used in Section 3.2. Let

$$\hat{\mathbf{S}}_f = \mathbf{S}_f \otimes (\Sigma_{\text{pri}}, Pri^A, \mathbf{p}, \mathbf{tr}),$$

and let $\hat{\mathbf{T}}_{f,j}$ be defined similarly. In this notation,

$$[[[Pub \varphi]\psi]]_{\mathbf{S}_f} = \{x \in S_f : \text{if } x \in [[\varphi]]_{\mathbf{S}_f}, \text{ then } (x, Pri^A) \in [[\psi]]_{\hat{\mathbf{S}}_f}\} \quad (7.8)$$

A similar equation holds for $\mathbf{T}_{f,j}$.

Case I: $(\mathbf{S}_f, a) \not\models \varphi$. Since $f(j) - k \geq |[Pub \ \varphi]\psi| \geq |\varphi|$, we have by induction hypothesis that $(\mathbf{S}_f, c_k^j) \not\models \varphi$, and $(\mathbf{T}_{f,j}, a) \not\models \varphi$. So automatically all of the model-world pairs satisfy our sentence $[Pub \ \varphi]\psi$.

Case II: $(\mathbf{S}_f, a) \models \varphi$ and $(\mathbf{S}_f, b) \not\models \varphi$. Then by induction hypothesis, $(\mathbf{S}_f, c_k^j) \models \varphi$, and $(\mathbf{T}_{f,j}, a) \models \varphi$, and by Lemma 7.6, $(\mathbf{T}_{f,j}, b) \not\models \varphi$. $\hat{\mathbf{S}}_f$ and $\hat{\mathbf{T}}_{f,j}$ are isomorphic to submodels of \mathbf{S}_f and $\mathbf{T}_{f,j}$ which do not contain b . Each point satisfies p and has no \xrightarrow{E} -successors, and every point has a \xrightarrow{A} -successor (itself). Thus both model-world pairs are bisimilar to the one-point model satisfying p . So we are easily done in this case.

Case III: $(\mathbf{S}_f, a) \models \varphi$, $(\mathbf{S}_f, b) \models \varphi$, and for some k such that $1 \leq k \leq f(j)$, $(\mathbf{S}_f, c_k^j) \not\models \varphi$. Let l be least with this property. By induction hypothesis, we have $l > f(j) - |\varphi| \geq k$. So we see that $c_1^j, c_2^j, \dots, c_k^j, \dots, c_{l-1}^j$ all satisfy φ , but c_l^j does not. We claim that

$$(\hat{\mathbf{S}}_f, (a, Pri^A)) \equiv (\hat{\mathbf{S}}_f, (c_l^j, Pri^A)) \equiv (\hat{\mathbf{T}}_{f,j}, (a, Pri^A)) \quad (7.9)$$

The bisimulation showing the first of these two assertions is the identity, together with the set of pairs

$$\{((a, Pri^A), (c_l^j, Pri^A)) : (c_l^j, Pri^A) \in \hat{\mathbf{S}}_f\}.$$

The bisimulation showing $(\hat{\mathbf{S}}_f, (c_l^j, Pri^A)) \equiv (\hat{\mathbf{T}}_{f,j}, (a, Pri^A))$ adds some further pairs:

$$\{((c_l^j, Pri^A), (c_m^j, Pri^A)) : (c_l^j, Pri^A), c_m^j \in \hat{\mathbf{S}}_f\}.$$

In view of the bisimulations in the equivalence (7.9) and the semantics in (7.8), the equivalence in this case is now immediate.

Case IV: $(\mathbf{S}_f, a) \models \varphi$, $(\mathbf{S}_f, b) \models \varphi$, and for all k such that $1 \leq k \leq f(j)$, $(\mathbf{S}_f, c_k^j) \models \varphi$. Let

$$I = \{i \in J : (\mathbf{S}_f, c_{f(i)}^j) \models \varphi\}.$$

For $i \in J$, let

$$g(i) = \max\{k : c_{f(i)-k+1}^j, \dots, c_{f(i)}^j \in \llbracket \varphi \rrbracket_{\mathbf{S}_f}\}.$$

Note that $j \in J$ and $g(j) = f(j)$. For other $i \in J$, though, $g(i)$ might well be less than $f(i)$. Also, the key point is that all \xrightarrow{A} -relations out of $\{c_1^j, \dots, c_{f(i)-k}^j\} \cap \llbracket \varphi \rrbracket_{\mathbf{S}_f}$ either land in this same set, or at b .

We claim that $(\hat{\mathbf{S}}_f, a) \equiv (\mathbf{S}_g, a)$, $(\hat{\mathbf{S}}_f, c_k^j) \equiv (\mathbf{S}_g, c_k^j)$, and $(\hat{\mathbf{T}}_{f,j}, a) \equiv (\mathbf{T}_{g,j}, a)$. In all three of these points, we use the same bisimulation relation R : let $(a, Pub) R a$, $(b, Pub) R b$,

$$(c_k^j, Pub) R c_{k-f(i)+g(i)}^j$$

for $i \in J$ and $f(i) - g(i) + 1 \leq k \leq f(i)$, and $(c_k^j, 0) R a$ otherwise.

This verifies our claim. Recall that $f(j) - k \geq |[Pub \ \varphi]\psi| \geq |\psi|$. We apply our induction hypothesis to (J, j, g) , ψ and k . We see that

$$(\mathbf{S}_g, a) \models \varphi \quad \text{iff} \quad (\mathbf{S}_g, c_k^j) \models \varphi \quad \text{iff} \quad (\mathbf{T}_{g,j}, a) \models \varphi.$$

In view of the bisimulation and the semantics of $[Pub \ \varphi]\psi$ detailed in (7.8), we see that

$$(\mathbf{S}_f, a) \models [Pub \ \varphi]\psi \quad \text{iff} \quad (\mathbf{S}_f, c_k^j) \models [Pub \ \varphi]\psi \quad \text{iff} \quad (\mathbf{T}_{f,j}, a) \models [Pub \ \varphi]\psi.$$

This concludes the proof of Lemma 7.8. ←

Proof of Theorem 7.5. Suppose towards a contradiction that χ were equivalent to the set

$T \subseteq \mathcal{L}_1(\Sigma_{\text{pub}})$. Let f be the identity function on N^+ . By Lemma 7.7, (\mathbf{S}_f, a) does not satisfy all of the sentences in T . Let $\varphi \in T$ be such that $(\mathbf{S}_f, a) \models \neg\varphi$. Let $j = |\neg\varphi| + 1$, so that $f(j) - 1 \geq |\neg\varphi|$. By Lemma 7.8, $(\mathbf{T}_{f,j}, a) \models \neg\varphi$. But again by Lemma 7.7, $(\mathbf{T}_{f,j}, a)$ satisfies all sentences in T . This is a contradiction. \dashv

7.4 $\mathcal{L}(\Sigma_{\text{pub}})$ lacks the finite model property

We conclude with a result on *iterating* epistemic actions. We gave a semantics of sentences of the form $[\alpha^*]\varphi$ earlier in the paper. The ability to iterate actions is useful in algorithms and even in informal presentations of scenarios. As it happens, the iteration operation on actions makes our systems quite expressive, so much so that the finite model property fails for $\mathcal{L}_1(\Sigma)$ as soon as Σ contains public announcements.

Proposition 7.9 $[Pub \diamond \text{true}]^* \diamond \square \text{false}$ is satisfiable, but not in any finite model.

Proof A state s in a model \mathbf{S} is called an *end state* if s has no successors. For each model \mathbf{S} , let \mathbf{S}' be the same model, except with the end states removed. \mathbf{S}' is isomorphic to what we have written earlier as $\mathbf{S} \otimes (Pub \diamond \text{true})$, that is, the result of publically announcing that some world is possible. So we see that our sentence $[Pub \diamond \text{true}]^* \diamond \square \text{false}$ holds of s just in case the following holds for all n :

1. $s \in \mathbf{S}^{(n)}$, the n -fold application of the derivative operation to \mathbf{S} .
2. s has some child which is an end node (and hence t would not belong to $\mathbf{S}^{(n+1)}$).

It is clear that any model of $[Pub \diamond \text{true}]^* \diamond \square \text{false}$ must be infinite, since the sets $S^{(n+1)} \setminus S^{(n)}$ are pairwise disjoint and nonempty.

There are well-known models of $[Pub \diamond \text{true}]^* \diamond \square \text{false}$. One would be the set of decreasing sequences of natural numbers, with $s \rightarrow t$ iff t is a one-point extension of s . The end nodes are the sequences that end in 0. For each n , $\mathbf{S}^{(n)}$ is the submodel consisting of the sequences which end in n . \dashv

This has several dramatic consequences for this work. First, it means that the logics cannot be translated into the modal mu-calculus, since that logic is known to have the finite model property. More importantly, we have the following extension of this result:

Theorem 7.10 (Miller and Moss [13]) Concerning $\mathcal{L}(\Sigma_{\text{pub}})$:

1. $\{\varphi : \varphi \text{ is satisfiable}\}$ is Σ_1^1 -complete.
2. $\{\varphi : \varphi \text{ is satisfiable on a finite (tree) model}\}$ is Σ_1^0 -complete.

Indeed, these even hold when $\mathcal{L}(\Sigma_{\text{pub}})$ is replaced by small fragments, such as the fragment built from $[Pub \diamond \text{true}]$, \diamond^* , \diamond , and boolean connectives (yet without atomic sentences); or, the fragment built from arbitrary iterated relativizations and modal logic (without \diamond^*). These negative results go via reduction from domino problems.

The upshot is that logics which allow for arbitrary finite iterations of epistemic actions are not going to be axiomatizable.

We feel that our results on expressive power are just a sample of what could be done in this area. We did not investigate the next natural questions: Do announcements with suspicious outsiders extend the expressive power of modal logic with all secure private announcements and common knowledge operators? And then do announcements with common knowledge of suspicion add further expressive power?

References

- [1] Alexandru Baltag and Lawrence S. Moss, Logics for epistemic programs, *Synthese* 139 (2004), issue 2, 165–224.
- [2] Alexandru Baltag, Lawrence S. Moss, and Sławomir Solecki, The logic of common knowledge, public announcements, and private suspicions, *Proceedings of TARK-VII (Theoretical Aspects of Rationality and Knowledge)*, 1998.
- [3] Alexandru Baltag, Hans van Ditmarsch, and Lawrence S. Moss, Epistemic Logic and Information Update, in P. Adriaans and J. van Benthem (eds.), *Handbook of the Philosophy of Information*, Elsevier, 2008, 369–463.
- [4] Johan van Benthem, Jan van Eijck and Barteld Kooi. Logics of Communication and Change. *Information and Computation*. 204(11): 1620–1662, 2006.
- [5] Anuj Dawar, Erich Grädel, and Stephan Kreutzer, Inflationary fixed points in modal logic, *ACM Transactions on Computational Logic*, 5(2) (2004), 282–315.
- [6] Hans van Ditmarsch, Wiebe van der Hoek, and Barteld Kooi, **Dynamic Epistemic Logic**, Synthese Library vol. 337, Springer, 2007.
- [7] Ronald Fagin, Joseph Y. Halpern, Yoram Moses, and Moshe Y. Vardi, **Reasoning About Knowledge**, MIT Press, 1996.
- [8] Michael J. Fischer and Richard E. Ladner, Propositional modal logic of programs. *J. Comput. System Sci.* 18 (1979), no. 2, 194–211.
- [9] Jelle Gerbrandy, Dynamic epistemic logic, in Lawrence S. Moss, et al (eds.) **Logic, Language, and Information, vol. 2**, CSLI Publications, Stanford University 1999.
- [10] Jelle Gerbrandy, *Bisimulations on Planet Kripke*, Ph.D. dissertation, University of Amsterdam, 1999.
- [11] Jelle Gerbrandy and Willem Groeneveld, Reasoning about information change, *Journal of Logic, Language, and Information* **6** (1997) 147–169.
- [12] D. Kozen and R. Parikh, An elementary proof of the completeness of PDL, *Theoretical Computer Science* (1981) 113–118.
- [13] Joseph S. Miller and Lawrence S. Moss, The undecidability of iterated modal relativization, *Studia Logica* 79 no. 3, 373–407, 2005.
- [14] Jan Plaza, Logics of public communications, *Proceedings, 4th International Symposium on Methodologies for Intelligent Systems*, 1989.