

# METL - a modern ETL pipeline with a dynamic mapping matrix

Christian Haase\*, Timo Röseler<sup>+</sup>, Mattias Seidel<sup>+</sup>

<sup>+</sup> EOS Technological Solutions, Hamburg, Germany

\* Otto Business Intelligence, Hamburg, Germany

haase.mail@web.de

t.roeseler@eos-ts.com

m.seidel@eos-ts.com

Preprint

## Abstract

Canonical data models (CDM) have gained traction as a pattern for data integration in streaming pipelines that extract, transform and load data (ETL). CDMs are in particular useful for integrating microservice systems. (Villaça et al., 2020; Oliveira et al., 2019) However, the transformation to a CDM is complex. (Lemcke et al., 2012) In this paper, we present a new solution for the transformation that is based on a new type of dynamic mapping matrix (DMM). The DMM has been implemented into a mapping app called Message ETL (METL). METL is the key part of a new ETL streaming pipeline at EOS. EOS is part of the Otto-Group, the second-largest e-commerce provider in Europe.

For the solution, we draw on research into matrix partitioning (Quinn, 2004) and dynamic networks (Haase et al., 2021). We conceptualize the schemata that describe the data in the messages in the pipeline as sub-graphs of a dynamic network. All attributes of the extracting schema can be mapped to the attributes of the CDM schema. We define a mapping function for these connections in the network. It has a parameter that can either be 0 or 1. All parameters form a large matrix. There are three problems, namely the sparsity of the matrix, the adaptations of the matrix to changes in the network and time efficiency. We solve these three problems by block-partitioning and compacting the matrix. In this process, we derive permutation matrices as a generalized pattern. We show that they can be used for automated updates of the matrix, for parallel computation in near real-time and efficient compacting. The permutation matrices form the dynamic mapping matrix.

## 1 Introduction

The modernization of ETL pipelines is a central aspect of the transformation of enterprise systems

in the age of cloud computing and machine learning (ML). (Biswas et al., 2020) The push for modernization has been caused by the increased velocity, variety and volume of big data and the new demands of systems that leverage ML. (McCarthy et al., 2019) Furthermore, the rise of cloud-based systems offers new capabilities for storage in data lakes and improved possibilities for data analysis. The modernization process often encompasses the improvement of two types of ETL pipelines.

Traditional ETL-pipelines dating back to the 1990s connect a central database with a data warehouse (DW). They are based on batch-processing and load the data into the DW once a day. They form a by-product of the databases.

Current ETL streaming pipelines, however, are at the centre of the enterprise architecture. They extract data from various sources, for example with Change Data Capture (CDC), and forward it in near real-time to a multitude of consumers, such as ML systems. Modern ETL streaming pipelines are often implemented with Kafka-streams and CDC-connectors such as Debezium.

However, these new pipelines have also experienced new problems. With the increased number of connected distributed systems, the need has arisen to provide standardized data exchange formats. Such problems are in particular pressing for large microservice systems in ETL pipelines. Thus, many enterprises have begun adding data integration to their streaming ETL pipelines.

The canonical (or common) data model is a design pattern in enterprise architecture that offers such an integration. It was originally invented to integrate systems in a service-oriented architecture (SOA). (Forrester, 2010) In recent years, the pattern has gained renewed attention for large enterprise microservice systems (Villaça et al., 2020) and for distributed cloud systems (Microsoft, 10.03.2022). A custom CDM provides a

bespoke alternative to the established commercial Kafka-streams platforms that also offer solutions for such scenarios.

While the CDM pattern offers many benefits, it also presents significant challenges and is difficult to implement. (Lemcke et al., 2012) Most mapping systems simply label large data packages with metadata, even in big data scenarios, such as railway systems. (Suleykin and Panfilov, 2020)

A CDM, however, requires that every single attribute of the extraction schema is handled. In order to use a CDM efficiently in modern streaming ETL pipelines with near real-time requirements, more research and best practice examples are needed, in particular for the integration of microservice systems into such pipelines.

We present such a pioneering study on the integration of a microservices system with a CDM into a streaming pipeline at EOS. EOS is part of the Otto-Group and has specialized in financial services.

In the first part of this paper, we present the architecture of the pipeline and the mapping system which we have designed. The new pipeline extracts data from a microservice system called FX, transforms it to the CDM and forwards it. We show, that the CDM can provide great benefits for such a system, but that the high number of versioned schemata increases the complexity for the mapping which in turn can slow the pipeline down. We estimate that the mapping matrix, that contains the parameters for the mapping between any two attributes of these schemata, can expand to up to 1.000.000.000 elements.

In the second part of the paper, we show that the mapping app for the CDM is best conceptualized as a dynamic network encompassing two schema sub-graphs. All attributes of these two schemata can be connected. The dynamism is induced to the system by the changes in the schemata trees which enforce updates to the large parameter matrix.

In the third part of the paper, we present a new optimal solution for managing the matrix and for processing mappings with the matrix in near real-time. More precisely, we present a new type of dynamic mapping matrix (DMM). The DMM is derived in the following way: first, we create finite matrix states of the dynamic association matrix. Second, these static matrices are partitioned into  $m \times n$  blocks. Third, the blocks are reduced and generalized to square blocks. We can block-

partition the matrix because we are only working on one Kafka message with a block of attributes at a time.

The main pattern that is found by this structural and value-based generalisation process is a square permutation matrix. This generalized pattern relates to a 1:1 attributes mapping between two blocks of attributes, which correspond to one incoming and one outgoing Kafka message. The pattern enables parallel processing down to single atomic mapping operations in near real-time, automated updates of the matrix and the development of a new pattern based compacting algorithm. Finally, we compact the pattern to a dense form without the zeros. We can delete the 0s because we only need to execute mappings with a 1 parameter. The densely saved permutation matrices form the dynamic mapping matrix.

In the fourth and fifth part, we explain the implementation of the new app and the streaming pipeline and evaluate the performance of the new CDM mapping app in the pipeline.

## 2 Related research

For the solution, we draw on research into dynamic networks (Haase et al., 2021; Rosetti and Cazabet, 2018), distributed systems, microservices, enterprise architecture, ETL pipelines, Kafka-streams, mapping systems and into calculations with very large matrices. (Quinn, 2004)

Very large matrices play a role in many industrial, scientific and machine learning applications. Since matrix vector multiplications already consist of simple additions and multiplications, it is difficult to optimize them further. If a matrix grows in size, so does the number of required operations for matrix vector multiplication.

The main approach for speeding up calculations with very large matrices is to partition them and to process the single parts in parallel. Such strategies are often developed in relation to static matrices, these are matrices that do not change their size or their values. There is less research on how to conduct such strategies in relation to dynamic matrices, which expand or shrink in size and undergo value updates.

## 3 Architecture of the new streaming ETL pipeline with a CDM

The FX-system at EOS is a modern distributed microservice system that deals with financial oper-

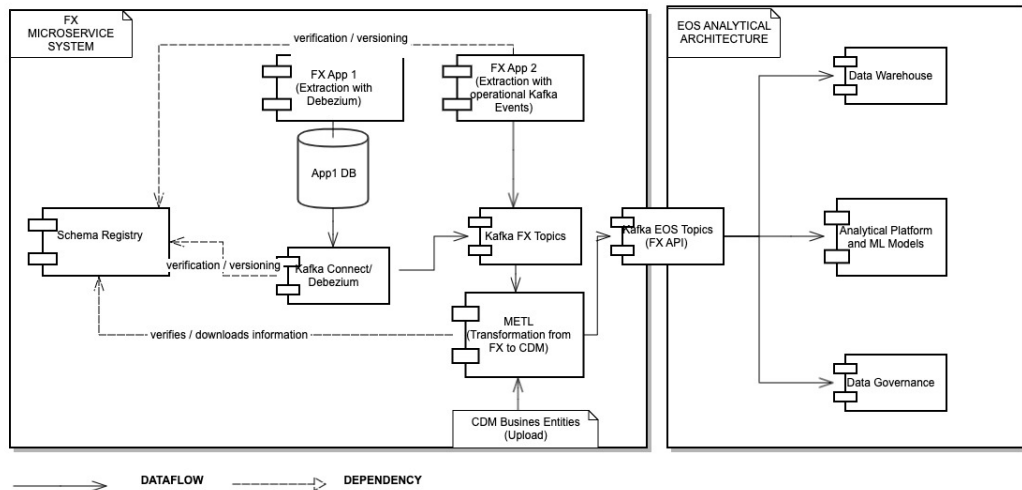


Figure 1: Architecture of the modern streaming ETL pipeline that extracts data from more than 80 microservices, transforms it to a CDM with the app METL and then pushes the data via Kafka-streams to the data warehouse and machine learning systems. The main problem of the architecture is the high number of schemata versions that are needed to integrate the microservice system to the pipeline. These versions cause the mapping matrix in METL to grow beyond manageable size. The new dynamic mapping matrix inside METL solves this problem and enables a constant flow of data in the pipeline in near real-time.

ations and is driven by machine learning models that predict the next best action. One of these models predicts, for example, an optimal monthly rate for debt repayments.

### 3.1 Challenges of the existing enterprise architecture

The modernization of the ETL pipelines at EOS has been caused by a number of issues that the previous pipelines and APIs have exhibited:

- (1) The previous ETL pipeline between FX and the DW has not been flexible enough to reduce the high change rate of the data structures to a more stable form for sharing.
- (2) The ML models have been trained with data from a different system forwarded by a second ETL pipeline, which has led to skewed predictions for FX data.
- (3) Furthermore, the old pipelines have not been fast enough for near real-time scenarios.

EOS decided to overcome these challenges with a new combined ETL pipeline that contains a CDM. The task of the CDM is to filter out technical data from the microservices, condense partially duplicated data, reduce the high number of data structure changes to a more stable schema, offer more

precise and unified descriptions of the business content of the data for the DW and the ML models and introduce more general data types for sharing. (Forrester, 2010)

The new planned ETL pipeline shall have the potential for future near real-time cases. It is based on Kafka-streams. It rests on five new pillars:

- (1) Debezium connectors to the microservice databases that extract data in near real-time (Mohrling, 2022) ,
- (2) an Apicurio registry for the extracting schema which enforces rules for schema versioning and schema evolution,
- (3) a CDM for the outgoing messages that offers data integration,
- (4) a new mapping app called Message ETL (METL) that maps extracted data to the CDM and offers adaptations to version changes as well as the possibility for new initial loads and error management procedures,
- (5) a streaming API that hides the complexity of the distributed microservice system to the distributed enterprise systems.

The architecture of the new ETL streaming pipeline with the microservice METL is shown in

```

1- {
2-   "schemaId": 24,
3-   "payload": {
4-     "before": null,
5-     "after": {
6-       "id": 32201,
7-       "value": 10.00,
8-       "currency": "EUR",
9-       "time": 1634052484031131,
10-      "comment": null
11-    }
12-  },
13-   "source": {
14-     "connector": "postgresql",
15-     "db": "payments",
16-     "table": "incoming"
17-   }
18- }

```

Copy >  
< Copy  
 Diff

```

1- {
2-   "type": "struct",
3-   "fields": [
4-     {
5-       "type": "struct",
6-       "fields": [
7-         {
8-           "type": "int64",
9-           "optional": false,
10-          "field": "id"
11-        },
12-        {
13-          "type": "int32",
14-          "optional": false,
15-          "name": "io.debezium.time.Date",
16-          "version": 1,
17-          "field": "time"
18-        }
19-      ]
20-    }
21-  ]
22- }

```

Figure 2: Left: example of a schematized Kafka-message. It transmits data that has been extracted by Debezium. Right: example of a (shortened) originating JSON-schema with a version that describes the content of the message.

figure 1. The key component in the pipeline is METL which conducts the mapping to the CDM before the data is pushed to the enterprise analytics system via Kafka-streams. The METL-Kafka-API in this pipeline aims to provide a well described stream of CDM data in the fastest time possible with minimal interruptions and clearly defined version update paths and error procedures.

Note that CDMs in microservices constitute a major architectural change towards the older SOA-architecture. CDMs used to be located between large systems. For the microservice-based ETL pipeline, the CDM has been moved into the system as an API.

### 3.2 Versioned schemata and the complexity of the mapping

As outlined above, one of the main aims of the new mapping app METL is to provide a better way of dealing with the frequent changes of data structures that occur inside the microservice system. Such changes are in particular noticeable on database level, from where the new ETL pipeline extracts data for so-called CDC events.

Such a CDC event is shown in our message in figure 2. It consists of a "before" state of a data-row and a "after" state of a row in the database table. In the shown example, the "before" payload is empty. This means that the row has been created newly in the database. In addition to the "before":"after" CDC event that is shown in figure 2, there are further CDC-event types, such as changed metadata-events or deletion notifications.

The extraction of CDC events from the databases

of a microservice system in near real-time enables advanced use cases for predictions from machine learning systems. However, it requires a very flexible CDM mapping system that can deal with frequent version updates. Each new column, deleted column, added table, deleted table, renamed column, or changed type in any database of any of the microservices, requires namely a new version of an extracting schema.

However, even if one does not use CDC on database level for the extraction, one still needs to deal with a high number of versions. The first ETL pipeline of the FX system that extracted data from Kafka-APIs and not from the databases, also experienced a large amount of data structure changes. Further, the mapping system also needs to be able to deal with the version updates of the CDM. Schemata of a CDM are called business entities. The focus on business content underlines the idea to filter out technical details in a CDM mapping. While the business entities are more stable than the extracting schemata, they also undergo changes.

### 3.3 Streaming ETL with Kafka-based streams

The data in the streaming pipeline is forwarded by messages that are associated with versioned schemata. The message that is shown in the example in figure 2 is related to a versioned extracting schema by a unique global id. Messages that contain data with the mapped CDM schemata look very similar. They also contain described attributes and link to a versioned schema.

The CDM schema, however, differs from the

extracting schema by offering more generalized types and better descriptions. Thus, for example, where the extraction schema on the right of figure 2 contains the type "int32", the CDM schema contains the type "integer". Furthermore, there are additional fields in the CDM schema for detailed short descriptions of the data, which are absent in the extracting schema shown in figure 2.

The mapping process from one message with the extracting schema to one message with the CDM schema, changes the describing schema of the data object that is contained in the message, but not the data object itself. The described data objects are called the payload of the message. The payload of the incoming message consists of pairs of schema attributes and data objects, such as "time":"1634052484031131". The payload of the outgoing message consists again of several pairs of attributes and objects. These attributes have exactly the same immutable object, thus, for example, "Time of the payment":"1634052484031131".

The best metaphor for understanding the system is from transport networks related to a large shipping terminal. The mapping app that we need to design constitutes the harbour. The pipeline is the water flow. The Kafka-messages are the ships that dock to the harbour and contain a sealed load that consists of containers, i.e. the abstract data objects. These containers are labelled with a schema. The containers are taken out of the incoming ship and are relabelled and are then put into new ships that carry them to their destinations.

The mapping matrix in this network system constitutes the logic of the system. It determines the full reloading and relabelling process of the containers. This matrix needs to be adapted constantly to deal with version updates that pose the core problem for our system.

### 3.4 Semi-automated workflows in the ETL pipeline

In order to solve this problem, the overall ETL system, including the schema and CDM workflows, offers two main strategies for version updates, forward and backward compatibility. One allows the deletions of attributes, the other one additions. For the extracting schemata at EOS, only additions are allowed. If an attribute is deleted, the user needs to access the registry, provide a new version and then add new mapping rules to METL.

The update process for the extracting schemata is semi-automated due to the high number of changes. If the registry detects a change of attributes in the data schema of a microservice database, it enforces an update process to a new version. Such update paths are defined by many schema-systems, and exist for example also for the widely used Avro-schema (Confluent, 2022).

There is numerous research in initializing and updating business entities and CDMs. (Dietrich and Lemcke, 2011; Dietrich et al., 2013b,a) In the EOS case, the data owners of the FX system took the opportunity to integrate their domain knowledge to the CDM and, therefore, update the business entities manually.

The mapping app METL inherits this semi-automated version update workflow from the schema registry and the CDM process. The version updates directly affect the mapping matrix of METL. For any new schema or CDM version, it expands and needs new values for the new matrix elements. For any deleted schema or CDM version, it shrinks and needs a deletion procedure.

For the mapping app workflow, one thus needs to define which updates of the external data-structures can be conducted in an automated manner and which ones require user intervention. In general, it can be said that the mapping app requires the inverse of automation and user intervention than the schema registry. While the registry requires the user to approve a deletion, such deletions can be conducted in the matrix in an automated manner. While the registry automates additions as "non-breaking", the mapping app needs to determine new values for new parts of the matrix which may require user approval.

### 3.5 The mapping system as a distributed system

The described elaborate version update processes with user intervention and automated procedure in the registry, the CDM and the mapping app shall prevent technical and content-based mapping errors which can occur if an outdated mapping definition is used that contains an attribute that has been deleted or a new mapping relationship is established in an automated manner that needs double-checking by a data owner.

However, there is namely a third source of possible complications that stems from the context of the implementation and the ETL pipeline. A map-

ping system that maps changing data structures in a pipeline is namely a distributed system and distributed systems produce problems of their own. They can be out of sync for example. It is for example possible that a new schema version has been pulled from the registry for a Kafka-message, but that this version is not known to METL yet.

Given the complexity of keeping a distributed mapping system in sync across the pipeline, it is good practice to have additional error-management procedures in place as well as options to set back Kafka-offsets and start new initial loads.

One needs to keep these fall-back options in mind when reading the paper. We conceptualize the system with state  $i$ . Each core element of this system, from the Kafka-messages to the schemata and the mapping matrix inherits this state  $i$ . This does not mean that all elements can acquire a new state  $i+1$  instantly. They need to be updated separately to a new state  $i+1$  for the system to be in sync with an overall state again. In the implementation, we are thus checking at several points if the system is in sync and throw an error if this is not the case.

### 3.6 Conclusion

In this section, we have analysed the architecture and the challenges of constructing a mapping app as a distributed system in the new ETL pipeline. Furthermore, we have shown that version updates form a central part of the system and the greatest challenge for implementing a CDM into a microservice system.

## 4 Designing the basic mapping system

After we have explored the architecture in the previous section, we are developing a baseline mapping system in this section that can transform schematized Kafka-messages in a streaming ETL pipeline to a CDM and send out resulting Kafka-messages. This baseline system consists of two trees of the CDM schemata and the extracting schemata and the matrix that defines the parameters for mappings between the attributes of the two trees.

In order to make the development process easier to understand, we design the baseline system first as a static network system whose elements do not change. We then explain how one can make such a standard system dynamic with new methods.

### 4.1 Defining the system as a network

The main data structure of our distributed system is a dynamic network. A network is a graph and a graph is a pair  $G = (V, E)$  with  $V$  a set of vertices and  $E$  a set of edges. In relation to networks, one often speaks of nodes and links instead of vertices and edges. Networks are often used to conceptualize real-live processes, such as data or traffic flows. Graphs are used for discussing more abstract concepts in mathematics.

The CDM tree and the tree of the extracting schema are two sub-graphs of the network. Each of the leafs of these trees can be connected to all other leafs of the other tree. For each of these connections, we define a parameter for a mapping function. These parameters form the  $m \times n$  mapping matrix  ${}^iM$ .

The extracting schema tree  ${}^iD$  defines the domain of the mapping and has a top-level node  ${}^id$ . The CDM tree  ${}^iR$  defines the range of the mappings and consists of a top-level node  ${}^ir$ . These root-nodes have child-nodes in the form of the business entities and the schemata. These are versioned. The versions define the attributes associated with the business entity or the schema.

We describe a path in such a sub-graph of the network with a simplified edge notation. Instead of defining a path as  ${}^ir.be_1.be_1.v_1$  etc., we simply write  ${}^ir.be_1.v_1.c_1$  (range.business-entity.version.cdm-attribute) or  ${}^id.s_o.v_v.a_p$  (domain.schema.version.attribute).  $c_q$  and  $a_p$  are the attributes that we map.

A mapping is defined as an operation that associates each element of a given set, called the domain, with one or more elements of a second set, called the range. In our case, the domain and the range are constituted by the trees and additional child-attributes of incoming and outgoing Kafka-messages that add to these trees.

In order for the Kafka message attributes to be related to a schema tree, both need to have the same state  $i$ . Once a Kafka-message is linked to the mapping network, it adds two child-nodes to the domain tree which contain values that are then used by the mapping function. The data object contained in one of the child nodes is then transferred and relabelled through the full network to the outgoing Kafka-messages.

The child nodes of the associated attributes that are necessary for the mapping process are always present in any Kafka-message, even if they are

not explicitly visible due to omitted "null" values. These two child nodes are the data object  $ad_p$  and the number of data objects  $nad_p$ . Since any abstract object can only be present or not in any message, as shown above in 2, the number of abstract data objects per attribute is  $nad_p \in \{0, 1\}$ . The same two children are present in any outgoing Kafka-messages  $MOut_w^r$ , for which,  $ncd_q \in \{0, 1\}$ .

Figure 2 shows a Kafka-message and its JSON schema. It contains, for example an attribute with data object "time" : "1634052484031131". We translate the information from the message as follows: Given  $p=1$ , then  $a_1$  is "time",  $ad_1$  is "1634052484031131" and  $nad_p$  is 1.

## 4.2 Defining a single attribute mapping

For every single mapping between any attributes of an extracting schema and a CDM schema, we define a **mapping element**  ${}^i m_{qp}$  that defines the parameter of a mapping function. The value of this element can change across the states  $i$ . It can either be 0 or 1,  ${}^i m_{qp} \in \{0, 1\}$ .

The key mapping function is  $c_q.ncd_q \leftarrow {}^i m_{qp} * a_p.nad_p$ . It takes its arguments from the value of the mapping element  ${}^i m_{qp}$  and from the children of the associated attributes  $a_p$  and  $c_q$ , more precisely from the number of data objects  $nad_p$  and  $ncd_q$  that are connected with the attribute.

The mapping function works on the child nodes of  $a_p$  and  $c_q$  that are only present once we connect at least one incoming and one outgoing Kafka message with the state  $i$  to this network.

If the result of the function is  $ncd_1 = 1$ , then the data object from the incoming Kafka-message is attached to the attribute  $c_q$  as a child element  $cd_q$  in the outgoing Kafka-message.

In order to avoid problems that may emerge from the invisible "null" problem of the JSON schemata that we use for the Kafka-messages, we omit optional attributes from Kafka-messages. We, thus, define that all  $a_p$  of any given  ${}^i D_v^o$  are also present in  ${}^i MIN_v^o$ .

Since a "null" object is equivalent to saying that 0 data objects are present in the message, we formalize

$$\begin{aligned} ad_p = "null" &\leftrightarrow nad_p = 0, \\ nad_p \neq "null" &\leftrightarrow nad_p = 1, \\ cd_q = "null" &\leftrightarrow ncd_q = 0, \\ cd_q \neq "null" &\leftrightarrow ncd_q = 1 \end{aligned}$$

## 4.3 Defining the mapping matrix

In order to work with the large number of mapping parameters for all associations between all attributes, we aggregate the elements to a matrix  ${}^i M$  and define blocks within this matrix for partitioning it to manageable size.

All  ${}^i m_{qp}$  for one given state  $i$  form the mxn matrix  ${}^i M$ . The sets  ${}^i \mathcal{A}$  and  ${}^i \mathcal{C}$  define the size of this matrix with  ${}^i m = |{}^i \mathcal{A}|$  and  ${}^i n = |{}^i \mathcal{C}|$ .

The matrix is block-scoped by the hierarchies of nodes inherent in the trees. This block-scoped association matrix is shown in figure 3.

### 4.3.1 Names of matrix blocks

For the definition of various blocks in this matrix, we need a naming scheme.

- SINGLE ELEMENT
- ${}^i m_{qp}$  - element of the Matrix  ${}^i M$
- SINGLE MATRIX BLOCKS AND SETS OF ELEMENTS
- MB - mxn block of matrix elements related to one schema-version and one CDM-schema-version
- SB - nxn square block of matrix elements - sub-matrix of MB
- NB - nxn null block of matrix elements - sub-matrix of MB
- PM - nxn permutation matrix - sub-matrix of MB
- D - densely saved block, 1s only
- SUPER-SETS OF MATRIX BLOCKS
- $\mathcal{R}$  - Row super-block of matrix blocks
- $\mathcal{C}$  - Column super-block of matrix blocks
- $\mathcal{V}$  - version super-block of any of the above matrix blocks for one extracting schema and one CDM schema and one CDM schema version
- $\mathcal{U}$  - set with unique elements, i.e.  $\mathcal{VUSB}$  - version super-block of unique square matrix blocks
- SUPER-SETS OF SUPER-SETS

	${}^i d.s_1$	${}^i d.s_1$	${}^i d.s_1$	${}^i d.s_1$	${}^i d.s_1$	${}^i d.s_2$
	$v_1.a_1$	$v_1.a_2$	$v_1.a_3$	$v_2.a_4 \equiv v_1.a_1$	$v_2.a_5 \equiv v_1.a_3$	$v_1.a_6$
${}^i r.be_1.v_1.c_1$	${}^i m_{11}$	${}^i m_{12}$	...	...	...	${}^i m_{1i_n}$
${}^i r.be_1.v_1.c_2$	${}^i m_{21}$	...	...	...	...	...
${}^i r.be_1.v_2.c_3$	...	...	...	...	...	...
${}^i r.be_1.v_2.c_4$	${}^i m_{i_m 1}$	...	...	...	...	...

Figure 3: The mapping system consists of a network and the  ${}^i m \times {}^i n$  mapping matrix  ${}^i M$ . It provides the values for the mapping between any two schema-attributes in the domain and range sub-graphs of the network. The matrix is block-scoped due to the hierarchical block-structure of the schema-trees. Blocks that associate the attributes per parent node (gray/orange, pink/orange) are highlighted as well as version-blocks that group attributes related to one schema (magenta/lime, white/lime). The paths are described with a short-notation in the form of node1.node2.node3. Elements with the state index  $i$  can change values (or children nodes), elements without  $i$  cannot. The equivalence sign  $\equiv$  indicates that the same attributes have been assigned multiple times to different parent-nodes within one schema super-block.

- ${}^i \mathfrak{PM}$  - super-set of all permutation matrices. It contains the column-, row- and version-block-sets of all permutation matrices.
- ${}^i \mathfrak{SB}$  - super-set of all super-blocks of unique square block matrices; contains also all column-, row- and version-block-sets.
- ${}^i \mathfrak{NB}$  - super-set of all square null blocks; contains also all column-, row- and version-sets row sets.
- ${}^i \mathfrak{MB}$  - super-set of all all  $MB$ ; contains also all column-, row- and version-block-sets.

### 4.3.2 The block-scoped mapping matrix

The main approach of dealing with the very large sparse matrix, is to block-partition it. For this, we need to group the elements  ${}^i m_{qp}$  of  ${}^i M$  first into  $m \times n$  **blocks of mapping elements**  ${}^i_{ov} MB_{rw}$ . Such blocks are indicated by triple lines in figure 3. Such a block contains all possible associative elements in relation to one  ${}^i D_v^o$  and one  ${}^i R_w^r$  for one given state  $i$ . This block can be used to map the attributes of one incoming Kafka-message to the attributes of an outgoing Kafka-message. It is the basic building block of our system.

Further, we define square sub-matrices of  ${}^i_{ov} MB_{rw}$ , namely the  $n \times n$  special null matrix block  ${}^i_{ov} NB_{rw}$  for the compacting algorithm and the main  $n \times n$  permutation matrix block  ${}^i_{ov} PM_{rw}$ . Both form a  $n \times n$  square matrix block  ${}^i_{ov} SB_{rw}$ . The permutation matrices are the key elements of our dynamic system that enable parallel computation and automated updates.

In addition, we need several super-sets in relation to the columns, rows and version blocks of the

matrix. These super- blocks are defined for all types of the above mentioned matrix blocks. For example,  ${}^i_o \mathfrak{VMB}_{rw}$  contains all  ${}^i_{ov} MB_{rw}$  for one extracting schema  $o$  one business entity  $r$  and one version  $w$ . The version blocks are block-colored with interleaved magenta and white blocks in the matrix visualization in 3.

In addition, we need several super-sets of super-sets. All version blocks of matrix blocks  $MB$  of the matrix  ${}^i M$  are, for example, contained in the set  ${}^i \mathfrak{MB}$ .

### 4.4 The basic mapping algorithm

Based on these definitions, we can define the initial sequential mapping algorithm for one incoming Kafka message in Algorithm 1. It uses a column block of mapping blocks to map one incoming message  ${}^i MIn_v^o$  to  ${}^i n {}^i MOut_w^r$ . At the end of the paper, we replace this sequential algorithm with an optimized parallel algorithm.

### 4.5 Defining state change

We now can define more precisely, how the system changes from one state to another in relation to externally induced updates of the schemata. We define three triggers:

- (1) The values of mapping elements  ${}^i m_{qp}$  are changed by the user.
- (2) A version is added to the extraction schema or a version is deleted. This induces changes to the set of the schema attributes and requires changes in the number and possibly also the values of the elements  ${}^i m_{qp}$ .



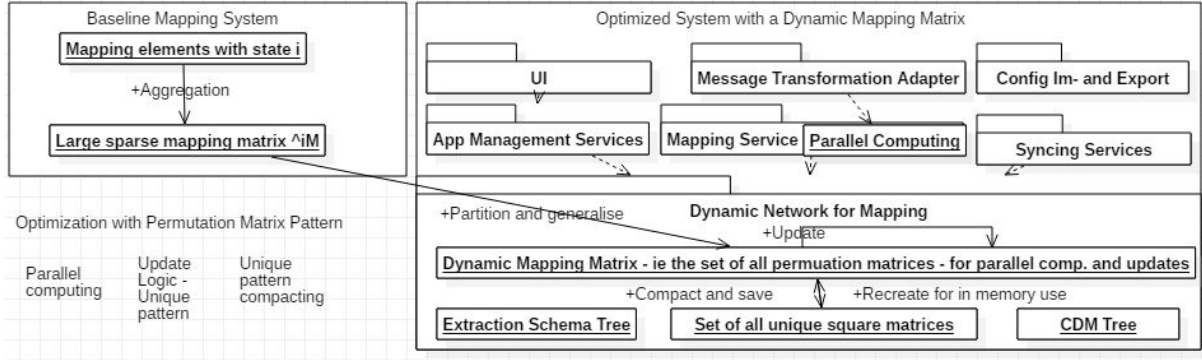


Figure 4: Development of the DMM system: first, a baseline mapping system is established with the mapping matrix  ${}^iM$ . For the initial algorithm, a simple block partitioned form of the matrix is used. Second, these blocks are then generalized to permutation matrices. This set of permutation matrices forms the dynamic mapping matrix for parallel computation and matrix updates. Third, this set of permutation matrices is further generalized to the set of all unique square matrices for compact saving in a database.

---

**Algorithm 1** Mapping one  ${}^iMIn_v^o$  to  ${}^iMOut_w^r$

---

```

1: procedure MAP( ${}^iMIn_v^o$ )
2:   get  ${}^iCMB_v^o$  from  ${}^iM\mathcal{B}$  that matches the
   indices of the incoming message
3:   for  $\forall_{ov} {}^iMB_{rw} \in {}^iCMB_v^o$  do
4:      ${}^iMOut_w^r \leftarrow$  create message with
     pairs of all CDM-schema version at-
     tributes and "null" objects. Number of
     objects is implicit.  $\{\{{}^i r.be_r.v_w.c_1 =$ 
     "labelCDM1",  ${}^i r.be_r.v_w.c_1.cd_1 =$ 
     "null",  ${}^i r.be_r.v_w.c_1.ncd_1 = 0\} \dots\}$ 
5:     for  $\forall {}^i m_{qp}$  from  ${}^i_{ov}MB_{rw}$  with
      ${}^i m_{qp} = 1$  do
6:        ${}^i r.be_r.v_w.c_q.ncd_q \leftarrow {}^i m_{qp} * {}^i$ 
        $d.s_o.v_v.a_p.nad_p$ 
7:       if  $ncd_q = 1$  then
8:         replace "null"
         object  $\{{}^i r.be_r.v_w.c_1 =$ 
         "labelCDM1",  ${}^i r.be_r.v_w.c_1.cd_1 =$ 
         "null",  ${}^i r.be_r.v_w.c_1.ncd_1 = 0\}$  in  ${}^iMOut_w^r$ 
         with
9:          $\{{}^i r.be_r.v_w.c_1 =$ 
         "labelCDM1",  ${}^i r.be_r.v_w.c_1.cd_1 =$ 
          ${}^i d.s_o.v_v.a_1.ad_1, {}^i r.be_r.v_w.c_1.ncd_1 = 1\}$ 
10:        end if
11:      end for
12:      Send  ${}^iMOut_w^r$ 
13:    end for
14: end procedure

```

---

- (3) A version is added to the CDM schema or a version is deleted. This induces changes to the set of all CDM attributes and requires

changes in the number and possibly also the values of the elements  ${}^i m_{qp}$ .

From this description, the main challenge of the mapping system becomes clearer. The size and the values of the mapping matrix need to be adapted to the external schema versions by transitioning  ${}^iM$  to  ${}^{i+1}M$ . However, what is the size  ${}^iM$  and how many do we need to change in response to external updates? There are more than 10.000 data-attributes in total in all databases and Kafka-events of FX. The CDM has more than 1.000 attributes. We estimate that after some time of usage, there will be at least 10 versions of any schema that need to be managed in parallel. In order to conduct a mapping of all possible incoming Kafka message to the outgoing ones, one needs up to 1.000.000.000 associative elements  ${}^i m_{qp}$  for any given state  $i$ . Thus for our  $m \times n$  matrix  ${}^iM$   $m \times n \approx 1.000.000.000$ .

We further estimate that any schema version consists of 10 attributes. Thus, each time a new version is added to a database and a schema needs to be changed or each time a CDM-version is added, up to 100.000 elements  ${}^i m_{qp}$  need to be added, deleted or updated in the transition from  ${}^iM$  to  ${}^{i+1}M$ . Such a very large number is difficult to handle. The diff-set is virtually impossible to update for a user without an automated procedure. We, thus, need to optimize our system significantly.

#### 4.6 Conclusion

The most important achievement of the simple block-mapping system is that it can be used to

transform one single Kafka-message from the stream to up to  $i_{n'}$  outgoing Kafka-messages with ease. However, overall such a basic system has major flaws for our use case:

- (1) it can only work on one single incoming Kafka-message at a time and can only map this one message to  $i_n$  outgoing ones in a sequential manner. No conception for parallel computation has been developed that is vital to conduct the mappings in near real-time;
- (2) it cannot deal with new externally induced schema versions and updates to all associative elements;
- (3) the space complexity of the sparse matrix and matrix blocks is very high, which in turn affects the processing speed.

## 5 Optimizing the system with a dynamic mapping matrix

### 5.0.1 Optimization with pattern generalisation

The main strategy for optimizing the baseline system consists in the partitioning of the  $m \times n$  mapping matrix  $iM$  into  $m \times n$  blocks  $MB$  as shown in figure 3 and to generalize them further into square matrix blocks  $SB$  with specific value patterns, namely sub-matrices in the form of  $n \times n$  permutation matrices  $PM$  and special  $n \times n$  null matrix blocks  $NB$ .

The permutation matrices are at the core of the optimization strategy. They form the basis for parallel computation and automated updates and also play a role in our compacting algorithm. In this section, we will develop the optimized system as shown in figure 4. The permutation matrix block is called  $i_{ov}PM_{rw}$ . These square sub-matrices of the rectangular block matrices are colored green/brown and blue/brown in figure 5.

The DMM system is realised by two new data sets, first the set  $i\mathfrak{PM}$  of all permutation matrices that is used for parallel computation and matrix updates, and, second, the set  $i\mathfrak{UB}$  that is the set of all unique square matrices. It is used for compact storage and includes special null-blocks for compacting.

Both are super-super-sets.  $i\mathfrak{PM}$  contains the sets  $iCPM$ ,  $iRPM$  and  $iVPM$ . These contain all single row, column and version blocks

$iCPM_v^o$ ,  $iVPM_{rw}$  and  $iRPM_w^r$ . These contain the single permutation matrices, which in turn contain blocks of single associative elements  $i_{m_{qp}}$ .  $i\mathfrak{UB}$  contains the collection of all version blocks  $i\mathfrak{UB}$ , which contains all  $i\mathcal{VUSB}_{rw}$ . It is used for compact storage. We visualize these matrix blocks in figure 3.

### 5.1 Improving matrix updates with permutation matrices

We have three optimisation goals, namely time-, update- and space-efficiency (in this order). Update efficiency relates to the ability of the mapping system to manage the frequent changes of the mapping matrix that occur when new versions of the extracting schemata or the CDM schemata are added to the system or when older versions are deleted.

In the given case of the CDM mapping at EOS, we will see that two core characteristics of the mapping matrix are relevant for solving the update problem. First, the mapping system has a basic rule, namely that it allows only 1:1 attribute mappings between a block of extracting schema attributes and a block of CDM attributes. This means that there can be only one 1 per row and column. If the  $m \times n$  block contains at least one 1, it includes a  $k \times k$  square sub-matrix in the form of a permutation matrix. The basic rule, thus, shapes the permutation matrix of mappings and vice versa. It follows:

1:1 mapping of attributes in a  $m \times n$  block of attributes with at least one 1  $\leftrightarrow$  a  $k \times k$  permutation sub-matrix of the  $m \times n$  block exists

#### 5.1.1 Equivalences among attributes

We only have two choices for applying values to newly created rectangular  $m \times n$  version blocks: firstly, we can replace the null values in a larger  $m \times n$  null block with a square  $k \times k$  permutation matrix for which  $k \leq n$  and  $k \leq m$ . Second, the newly created null block remains a null block. We can replace the values of the rectangular null block only under one condition with a permutation matrix, namely when the new version block maps equivalent attributes to the version block of the older version. This is often the case because attributes of one schema are duplicated across schema versions in the update process. If we have a version 1 with attributes  $a_1$  and  $a_2$  and we add  $a_3$ , then version 2 consists of  $a_1$ ,  $a_2$  and  $a_3$ . This duplication is one of the main reasons for the very

	$s_1.v_1$	$s_1.v_1$	$s_1.v_1$	$s_1.v_2$	$s_1.v_2$	$s_2.v_1$
	$a_1$	$a_2$	$a_3$	$a_4 \equiv a_1$	$a_5 \equiv a_3$	$a_6$
$be_1.v_2.c_3$	1	0	0	1	0	0
$be_1.v_2.c_4$	0	0	1	0	1	0
$be_2.v_1.c_5$	0	0	0	0	0	1
$be_3.v_1.c_6$	0	1	0	0	0	0
$be_3.v_1.c_7$	1	0	0	0	0	0

Figure 5: Creating the Dynamic Mapping Matrix  ${}^i\mathfrak{M}$  from  ${}^iM$  and compacting it to  ${}^i\mathfrak{U}\mathfrak{B}$ : First, the matrix  ${}^iM$  is partitioned into  $m \times n$  version-blocks that contain parameters for mapping the attributes of multiple versions of one schema (magenta/white) and one business entity version (lime/orange). Second, within these version-blocks, single  $m \times n$  block-matrices are identified (with triple line borders). These are sized down to square  $k \times k$  matrices by sub-matrix formation. This process results in two types of square matrices, namely permutation matrices (green/brown and blue/brown) and special null-blocks (green/yellow and blue/yellow). The permutation matrices are saved to  ${}^{i+1}\mathfrak{M}$  for parallel computation and version updates. This is the dynamic mapping matrix. Finally, these square blocks are compacted by determining unique ones for a sequential updating process. The unique ones for the update process are colored green/brown. They form the set  ${}^{i+1}\mathfrak{U}\mathfrak{B}$ . For the detailed algorithms, see the algorithm 2 and 4.

quick and large expansion of the mapping matrix in a microservice system with a CDM. However, it also provides the basis for the solution.

Thus, if we want to create a mapping block for a new version for a given extracting schema, we can add a new rectangular null matrix-block  ${}^i_{ov}MB_{rw}$  to the version-block  ${}^iVM_{B_{rw}}$  that correlates to a new version of an extracting schema. Or we add a new matrix block  ${}^i_{ov}MB_{rw}$  to a version-block  ${}^iVM_{B_r}$  that corresponds to a new business entity version.

Then we can copy the square block pattern values from the previous version, if one exists. Since we are operating on a matrix, we can do this operation for all blocks with row- and column operations. In doing so, we might create new permutation matrices, namely smaller ones, as we may not be able to allocate all columns or rows to equivalent attribute-columns or rows. In such case, we only copy the columns or row with the equivalent values. In this case, we save the newly created permutation matrix. This last step in the newly created permutation matrix case is currently conducted in a semi-automated manner, but the feature is scheduled for full automation.

After such an update process, we also need to clean up. We set the rule that we only want to map any version of an extracting schema to one business entity version. This rule means that we need to delete old version blocks of rows after an update operation from the matrix. In technical terms: an update event of a tree triggers a chain of up-

date processes of the matrix. The longest chain relates to the addition of a CDM version  $w+1$ . This requires three steps: expand the matrix with null blocks for  $w+1$ , replace the values of the null blocks with the permutation matrix values of  $w$ , delete the old blocks of  $w$ .

In order to conceptualize the matrix updates for the schema changes in more detail, we need to define which steps we can automate and which steps require user intervention.

### 5.1.2 The user must provide initial values

There is one main case that requires an initialisation of the values, namely when a new extracting schema or a business entity is added to the system. Currently, this is done via the upload of a CSV file. We cannot use the above mentioned procedure for this case.

### 5.1.3 Semi-automated workflow

There are several cases for semi-automated workflows. The main case has been described above: a new version is added to an existing schema, which contains a deleted mapped field. Subsequently, columns are added and new values are automatically copied from the previous version, which result in new permutation matrices. We want the user to be able to inspect these new mapping blocks and to change them if necessary.

### 5.1.4 Automated updates

Finally, there are several cases where we can apply the automated update procedure without any user

		$s_1v_1$	$s_1v_1$	$s_1v_1$	$s_1v_2$	$s_1v_2$	$s_1v_2$	$s_1v_3$
		$a_1$	$a_2$	$a_3$	$a_4 \equiv a_1$	$a_5$	$a_6 \equiv a_2$	$a_7 \equiv a_4$
$s_1.v_1$	$c_1$	1	0	0	1	0	0	1
$s_1.v_1$	$c_2$	0	0	1	0	0	1	0
$s_1.v_2$	$c_3 \equiv c_1$	1	0	0	1	0	0	1
$s_1.v_2$	$c_4 \equiv c_2$	0	0	1	0	0	1	0
$s_2v_1$	$c_6$	0	1	0	0	0	0	0
$s_2v_1$	$c_7$	1	0	0	0	0	0	0

Figure 6: Using  ${}^i\mathfrak{PM}$  to create  ${}^{i+1}\mathfrak{PM}$  and compacting it to  ${}^{i+1}\mathcal{UB}$ : Given an external event, namely either (1) the addition of a new business entity version  $s_1.v_2$  or (2) the addition of a new extracting schema version  $s_1.v_3$ . For each event the automated update is triggered. The algorithm 3 works on blocks. For better visualization, we show the operations on the full matrix. For event (1), the DMM system creates the new rows  $c_3$  and  $c_4$  with null values in the matrix. It then copies the values of the permutation matrices of the first two rows  $c_1$  and  $c_2$  to the rows  $c_3$  and  $c_4$ , which are equivalent to  $c_1$  and  $c_2$ . It then deletes the old business version rows  $c_1$  and  $c_2$  (red). For event (2), it creates a new zero column. It then copies the permutation matrices of the most recent version  $s_1v_2$  to the new version. It duplicates the values of the column block  $\mathcal{CMB}_{12}$  to  $\mathcal{CMB}_{13}$  thereby assigning the 1s to the equivalent attributes. Finally, in the case of any of the two events, the compacting algorithm is run on the matrix for saving to  ${}^{i+1}\mathcal{UB}$ . The resulting blue and green squares are shown in the matrix. PS: Currently, users are informed that a new unique permutation matrix (the single green 1 from event 2) was created and are asked to confirm. It is planned to use this feature in a fully automated way in the future.

intervention. This is mostly the case when internal technical details are deleted or changed from the microservice system that are not mapped to the CDM and thus are fully covered by the previous permutation matrix pattern that maps mainly content data.

In sum, it can be said that the suggested method of re-using the values of the permutation matrices from the most recent version, is applicable to most update cases of the matrix and thus should form the core of the DMM system. It needs to be paralleled by an API for initial uploads and an User Interface for user validation.

## 5.2 Parallel computation with permutation matrices

The permutation matrices are not only important for the update process, but, above all, for parallel computing and time efficiency in the near real-time ETL pipeline. Permutation matrices are consisting of linear independent rows and columns. They, thus, can be deconstructed further to single mapping elements for parallel computation. Our hierarchical block-partitioning of the matrix, thus, extends down through the last single atomic mapping element.

Each permutation matrix within one column of the mapping matrix defines a single mapping within this larger mapping process. We call such a sin-

gle block-mapping in our system an independent block mapping path. The great advantage of defining these independent block mapping paths in the DMM system consists in the ability to use them for parallel computing.

The full DMM system, thus, enables three-fold parallel computation, namely on the single attribute level, the block level of the Kafka-messages and the system level, as multiple Kafka-message can be processed in parallel within one configuration state  $i$  of the system. This is optimal.

## 5.3 Compacting matrix blocks

The DMM system is derived from a baseline system with a very large sparse matrix. There are various compacting strategies in place.

There are several steps of null-compacting. The first one relates to identifying and deleting all null blocks from the matrix. We do this, because we are only interested in the permutation matrices. This probably compacts the matrix by 95%.

Second, we can form a dense version of these permutation matrices by saving only those mapping elements that have the value 1. To denote such a structure, we add a D before the elements that are compacted, such as  $DPM$  and a D before the sets of these compacted elements, such as  ${}^i\mathfrak{PM}$ .

In order to optimise the space efficiency further

for storage in the DB, we compact the permutation matrices to unique ones using pattern generalisation. This compacting, however, only works, if deal with the null-blocks in a more advanced way. We define a null-block for the space-optimization as the **special square 1x1 null block**  ${}^i_{ov}NB_{rw}$ . It contains just one single element (or even 0 elements in dense form). These 1x1 square sub-matrices of the rectangular block matrices are the single green 0s or a single red 0s in figure 5. They "stop" the permutation matrix duplication in a horizontal manner for the de-compacting algorithm. We save these null-blocks in a dense form. The **dense null-block**  ${}^i_{ov}DNB_{rw}$  is a special case among the dense blocks, because it is empty. This is realised in our implementation with the help of a hierarchical structure, in which we save blocks with their indices as the top level object and the mapping elements as associated lower level elements. A block without mapping elements is a special null block.

We do not save another block, namely the **non-saved special null block**. This peculiar block only exists tucked away in the compacting algorithm of the  ${}^i\mathcal{UB}$ . Since the  ${}^i\mathcal{UB}$  is used to reconstruct a matrix based on an algorithm that replaces values in a null matrix, we can omit some special null blocks from this set. The non-save special null block enables us to compact a very large null matrix to null elements. This is an optimal compacting result.

Although the set  ${}^i\mathcal{UB}$  is more strongly compacted than  ${}^i\mathcal{PM}$  and provides very strong null compacting, the size of both sets  ${}^i\mathcal{PM}$  and  ${}^i\mathcal{UB}$  grows in the worst case in the same linear way in relation to the number of realised mappings. The space complexity for the execution of one single mapping to  ${}^i n'$  outgoing message with the DMM is thus  $O(n)$ .

Most compacting strategies for sparse matrices, and there are several other ones, thus need to be applied with the data content in mind to find an optimal solution that optimises the space efficiency for an average use case. In our case, as explained, we have found a very good solution. The space efficiency of the dense sets of unique square matrices and permutation matrices that we use for the implementation is near optimal.

## 5.4 Design alternative

We have chosen the set  ${}^i\mathcal{PM}$  as the centre of the DMM system because it contains the permutation matrices, which enable parallel computation. Further, the set is easy to update to a next state, which is our second most important goal. It is also well compacted.

However, there are contenders to  ${}^i\mathcal{PM}$  for the central role as "the dynamic mapping matrix" in the system, namely  ${}^iM$  and  ${}^i\mathcal{UB}$ . We have excluded  ${}^iM$  because it is too large and cannot be used for parallel computation.  ${}^i\mathcal{UB}$  can also be used. One can run the automated updates with regard to this set. This requires, however, a de-compacting and compacting for every update step. This is costly. The advantage of this set-up is that  ${}^{i+1}\mathcal{UB}$  is immediately available from the database. Further, the set helps to determine unique new permutation matrices about which we want to inform the user.

If one conducts the update operation on  ${}^i\mathcal{PM}$ , one only needs to execute the compacting step for saving the new version to the database, where  ${}^{i+1}\mathcal{UB}$  is stored. We have thus chosen  ${}^i\mathcal{PM}$  as the centre of the system, but we use  ${}^i\mathcal{UB}$  in a secondary role as it is required for user information and compacting. The following algorithms are designed to work with  ${}^i\mathcal{PM}$  for computing and automated updates.  ${}^{i+1}\mathcal{UB}$  is used for user information in updates and compacting.

## 5.5 Creating and updating the DMM

### 5.5.1 Transforming ${}^iM$ to ${}^i\mathcal{PM}$ and ${}^i\mathcal{NB}$

In order to design the optimized DMM system, we need to create the sets  ${}^i\mathcal{PM}$ ,  ${}^i\mathcal{NB}$ ,  ${}^i\mathcal{UB}$ . There are different ways to initialize them and then to update them further. It is possible, for example, to use the User Interface or a CSV upload as mentioned above.

However, there is also a third way. We can namely define the transformations from  ${}^iM$  to  ${}^i\mathcal{PM}$ . The algorithm, uses the matrix blocks  $\neq 0$  for deriving the permutation matrix sub-matrices. These are stored in the appropriate set. The algorithm is shown algorithm 2.

---

**Algorithm 2** Partition and generalise  ${}^iM$  to  ${}^i\mathfrak{PM}$ 

---

```
1: procedure TRANSFORM( ${}^iM$ )
2:    ${}^i\mathfrak{PM} = \{\}$ 
3:   for  ${}^i_{ov}MB_{rw} \in {}^iM$  do
4:     if  $maxn_{ov}^i MB_{rw} \neq 0$  then
5:        $nxn_{ov}^i PM_{rw} \leftarrow {}^i_{ov} MB_{rw}$ 
6:     end if
7:      ${}^i\mathfrak{PM} \cup {}^i_{ov} \mathcal{PM}_{rw}$ 
8:   end for
9:   return  ${}^i\mathfrak{PM}$ 
10: end procedure
```

---

### 5.5.2 Updating ${}^i\mathfrak{PM}$ to create ${}^{i+1}\mathfrak{PM}$

The set  ${}^i\mathfrak{PM}$  can be updated by a user in a simple manner by adding, updating or deleting a permutation matrix block. However, for the automated updates to  ${}^{i+1}\mathfrak{PM}$  in response to changes in  ${}^iR$  and  ${}^iD$ , we need an updating algorithm.

The updating algorithm 3 works on the rows and columns of the association matrix  ${}^{i+1}M$ . We first need to understand the operations on the matrix, so that we can then translate them into a specific transformations of  ${}^i\mathfrak{PM}$ :

For a block-wise column or row deletion in the matrix that is triggered by a version deletion in a schema, we simply delete the blocks of columns or rows from  ${}^i\mathfrak{PM}$  that associate these attributes to others. We derive  ${}^{i+1}\mathfrak{PM}$ . We then run the compacting algorithm which saves to  ${}^{i+1}\mathcal{GB}$ .

Given a column expansion of the matrix that is triggered by an addition of a new version  $v+1$  to an extracting schema  $o$ . We create the new columns in the matrix with null values. We then copy those columns of the block-column of version  $v$  of schema  $o$  to the single columns of  $v+1$  which are associating equivalent attributes. We derive  ${}^{i+1}\mathfrak{PM}$ . We then run the compacting algorithm which saves to  ${}^{i+1}\mathcal{GB}$ . We may have created a new unique permutation matrix. The algorithm for the row expansion works in the same manner as the one for the column expansion.

For the overall algorithm 3 to work on  ${}^i\mathfrak{PM}$ , we need to have different responses for different cases as discussed above. The algorithm 3 is automatically triggered when the schemata change. We have observed that this update algorithm only needs to run a few times a day. Each incoming data-event can thus be resolved very fast by accessing  ${}^iCPM_v^o$ . We only need to recalculate  ${}^i\mathfrak{PM}$ , once there is an update to any of the trees of the network.

---

**Algorithm 3** Update  ${}^i\mathfrak{PM}$  to  ${}^{i+1}\mathfrak{PM}$  in response to changes in  ${}^iR$  and  ${}^iD$  and compact to  ${}^{i+1}\mathcal{GB}$ 

---

```
1: procedure AUTO-UPDATE( ${}^i\mathfrak{PM}$ , change
   type,  ${}^iD$ ,  ${}^iR$ ,  ${}^{i+1}D$ ,  ${}^{i+1}R$ )
2:   switch change-type of  ${}^iD$  or  ${}^iR$  do
3:     case deleted schema  $o$  with version  $v$ 
       from  ${}^iD$ 
4:       determine  ${}^iCPM_v^o$  that relates to
       deleted  $o$  and  $v$  from  ${}^iD$ 
5:        ${}^{i+1}\mathfrak{PM} \leftarrow {}^i\mathfrak{PM}$  minus  ${}^iCPM_v^o$ 
6:     case deleted CDM schema  $r$  with ver-
       sion  $w$  from  ${}^iR$ 
7:       determine  ${}^iRPM_w^r$  that relates to
       deleted  $r$  and  $w$  from  ${}^iR$ 
8:        ${}^{i+1}\mathfrak{PM} \leftarrow {}^i\mathfrak{PM}$  minus  ${}^iRPM_w^r$ 
9:     case added schema  $o$  with version  $v$  in
        ${}^{i+1}D$ 
10:      determine  ${}^{i+1}CPM_v^o$  that relates
       to added  $o$  and  $v$  to  ${}^{i+1}D$ 
11:       ${}^{i+1}CPM_v^o \leftarrow \{\text{create NBs in}$ 
        ${}^{i+1}CPM_v^o$  that correspond in size to existing
       PMs in  ${}^iCPM_v^o$ ; copy columns of PMs from
        ${}^iCPM_{v-1}^o$  to NBs that associate equivalent at-
       tributes to corresponding columns in  $v$ . Delete
       0 rows and columns from these blocks if a new
       smaller PMs was created.  $\}$ 
12:       ${}^{i+1}\mathfrak{PM} \leftarrow {}^i\mathfrak{PM}$  plus  ${}^{i+1}CPM_v^o$ 
13:     case added CDM schema  $r$  with ver-
       sion  $w$  in  ${}^{i+1}R$ 
14:      determine  ${}^{i+1}\nabla RPM_w^r$  that relates
       to added  $r$  and  $w$  to  ${}^{i+1}R$ 
15:       ${}^{i+1}RPM_w^r \leftarrow \{\text{create NBs in}$ 
        ${}^{i+1}RPM_w^r$  that correspond in size to existing
       PMs in  ${}^iRPM_w^r$ ; copy rows of PMs from
        ${}^iRPM_{w-1}^r$  to NBs that associate equivalent
       attributes to corresponding rows in  $w$ . Delete
       0 rows and columns from these blocks if a new
       smaller PMs was created.  $\}$ 
16:       ${}^{i+1}\mathfrak{PM} \leftarrow {}^i\mathfrak{PM}$  plus  ${}^{i+1}RPM_w^r$ 
       minus  ${}^iRPM_{w-1}^r$ 
       end switch
17:      ${}^{i+1}\mathcal{GB} \leftarrow$  compacting algorithm on
        ${}^{i+1}\mathfrak{PM}$ 
18:     if  ${}^{i+1}\mathcal{GB}$  contains new permutation ma-
       trices, inform user
19:     return  ${}^{i+1}\mathfrak{PM}$ ,  ${}^{i+1}\mathcal{GB}$ 
20: end procedure
```

---

### 5.5.3 Compacting ${}^i\mathcal{PM}$ to ${}^i\mathcal{GB}$ and decomposing ${}^i\mathcal{GB}$

For the implementation,  ${}^i\mathcal{PM}$  is kept in memory. We do not persist it in the database. For this purpose, we use the more strongly compacted set  ${}^i\mathcal{GB}$ , which we also use to alarm the user of a newly created unique permutation matrix. From this set, we can also recreate  ${}^iM$ . From  ${}^iM$ , we can then create  ${}^i\mathcal{PM}$  with the algorithm 2.

We thus need two further algorithms for managing  ${}^i\mathcal{GB}$  in the system. Algorithm 4 transforms the set  ${}^i\mathcal{PM}$  to  ${}^i\mathcal{GB}$ . For this operation, it also needs the corresponding set of the null-blocks  ${}^i\mathcal{NB}$ , which is obtained as the diff-set between  ${}^iM$  and  ${}^i\mathcal{PM}$ . The reverse algorithm is algorithm 5. As explained above, the compacting and decomposing algorithms use sequential pattern generalisation to reduce the permutation matrices and null blocks to unique ones.

---

#### Algorithm 4 Compacting ${}^i\mathcal{PM}$ and ${}^i\mathcal{NB}$ to ${}^i\mathcal{GB}$

---

```

1: procedure COMPACT( ${}^i\mathcal{PM}$ ,  ${}^i\mathcal{NB}$ )
2:    ${}^i\mathcal{GB} = \{\}$ 
3:   for  $\forall {}^i\mathcal{VMB}_{rw} \in {}^i\mathcal{MB}$  do
4:     select  ${}^i\mathcal{VPM}_{rw} \in {}^i\mathcal{PM}$  and
 ${}^i\mathcal{VNB}_{rw} \in {}^i\mathcal{NB}$  with the indices o,v,w of
 ${}^i\mathcal{VMB}_{rw}$ 
5:      ${}^i\mathcal{VSB}_{rw} \leftarrow {}^i\mathcal{VNB}_{rw} \cup {}^i\mathcal{VPM}_{rw}$ 
6:      ${}^i\mathcal{VUSB}_{rw} = \{\}$ 
7:     for  ${}^i\mathcal{SB}_{rw} \in {}^i\mathcal{VSB}_{rw}$  asc v do
8:       if  ${}^i\mathcal{SB}_{rw}$  type of PM then
9:         if the latest  ${}^i\mathcal{SB}'_{rw}$  that has
been added to  ${}^i\mathcal{VUSB}_{rw}$  is not equivalent to
 ${}^i\mathcal{SB}_{rw}$  or  ${}^i\mathcal{VUSB}_{rw} = \{\}$  then
10:            ${}^i\mathcal{VUSB}_{rw} \cup {}^i\mathcal{SB}_{rw}$ 
11:         end if
12:       end if
13:       if  ${}^i\mathcal{SB}_{rw}$  type of NB then
14:         if the latest  ${}^i\mathcal{SB}'_{rw}$  that has
been added to  ${}^i\mathcal{VUSB}_{rw}$  is type of PM and
 ${}^i\mathcal{VUSB}_{rw} \neq \{\}$  then
15:            ${}^i\mathcal{VUSB}_{rw} \cup {}^i\mathcal{SB}_{rw}$ 
16:         end if
17:       end if
18:     end for
19:      ${}^i\mathcal{GB} \cup {}^i\mathcal{VUSB}_{rw}$ 
20:   end for
21:   return  ${}^i\mathcal{GB}$ 
22: end procedure

```

---



---

#### Algorithm 5 Decomposing ${}^i\mathcal{GB}$ to ${}^iM$

---

```

1: procedure DECOMPACTING( ${}^i\mathcal{GB}$ )
2:    $m = |{}^i\mathcal{C}|$ ,  $n = |{}^i\mathcal{A}|$ 
3:   initialise null matrix  $m \times n$   ${}^iM$ 
4:   initialise all blocks  ${}^i\mathcal{VMB}_{rw}$  and
 ${}^i\mathcal{MB}_{rw}$  in  ${}^iM$ 
5:   for  ${}^i\mathcal{VUSB}_{rw} \in {}^i\mathcal{GB}$  do
6:     for  ${}^i\mathcal{SB}_{rw} \in {}^i\mathcal{VUSB}_{rw}$  for ascend-
ing v do
7:       if there is a next element in
 ${}^i\mathcal{VUSB}_{rw}$  then
8:          $v2 \leftarrow$  version of next element
9:       else
10:         $v2 \leftarrow$  {get the version super-
block  ${}^i\mathcal{VMB}_{rw}$  from  ${}^iM$  with the same o,r,w
as  ${}^i\mathcal{VUSB}_{rw}$  and choose  ${}^i\mathcal{MB}_{rw}$  with high-
est v within it; return v}
11:       end if
12:       a = 0
13:       while a + v  $\neq$  v2 do
14:          $m \times n$   ${}^i\mathcal{MB}_{rw} \leftarrow$ 
 $k \times k$   ${}^i\mathcal{SB}_{rw}$ 
15:         a = a+1
16:       end while
17:     end for
18:   end for
19:   return  ${}^iM$ 
20: end procedure

```

---

### 5.6 The parallel mapping algorithm

Finally, we have all elements in place to present the algorithm that executes the mappings with three intertwined processes of parallel computation on a dense set of permutation matrices.

Since we can break down the permutation matrices into single atomic mapping operations for parallel computation and can execute parallel computation on the two higher levels of the block-system, too, we have achieved an optimal time efficient solution. As in any parallel architecture, the actual execution time is dependent on the system configuration and the available resources. Thus, we are measuring it later. The algorithm is shown as algorithm 6.

In order to speed up the processing of Kafka-messages from the parallel streams of messages in the streaming pipeline, we can use horizontal scaling of the app and thus refer to this in the algorithm as working on messages from the parallel stream in parallel. This can be implemented by reading

from different Kafka-partitions with different horizontally scaled apps.

The DMM-system is horizontally scalable under the condition that the we keep the configuration state stable. We need to make sure that all instances that we are spinning up have have the same configuration state, otherwise they will be producing different messages as a result.

It is significant to note at this point that our configuration state does not change more than a few times a day and that we need parallel instances only at defined time-slots when we are not changing the configuration, namely for initial loads during which very large numbers of messages need to be processed.

It is further important to note that while all operations occur only once and at once for a single mapping process, the ETL pipeline does not overall realize an 'exactly once' process. It is possible that FX emits the same data-load twice via different events. This can be identified by unique keys in the payload. Thus, for incoming data events that have a valid mapping, the ETL pipeline with the DMM system ensures an 'at least once' approach. There is also an error-checking and update-process in place for technically non-valid mappings.

## 6 Implementation

### 6.1 The changed CDM architecture

The aim of this paper is to present a new solution for the integration of a large microservice system into a streaming ETL pipeline. For such an implementation, the position of the CDM mapping system in the enterprise architecture has changed as compared to the established position in an Enterprise Service Bus (ESB). While the CDM mapping used to be placed between the single systems in the ESB, it is now merged into the microservice system as an API that helps to decouple the system from the enterprise. This is a fundamental change in ETL microservice architectures as compared to previous ESB implementations of a CDM.

The consequence of this architectural decision in the case of EOS is that the CDM mapping has been implemented as a Java-based Spring-Boot microservice within the FX system. Thus, other known implementations for such ETL transformations, such as for example a MapReduce implementation with Hadoop, which are usually conducted in components after the APIs of a microservice system, were not chosen.

---

### Algorithm 6 Parallel mapping of ${}^i MIn_v^o$ to ${}^i MOut_w^r$ with ${}^i \mathcal{DPM}$

---

```

1: procedure MAP(Parallel stream of  ${}^i MIn_v^o$ )
2:   for  ${}^i MIn_v^o$  in parallel do
3:      ${}^i DCPM_v^o \leftarrow {}^i DCPM_v^o$  from  ${}^i \mathcal{DPM}$ 
       with the same o and v as in  ${}^i MIn_v^o$ 
4:     for  $\forall {}_{ov} DPM_{rw} \in {}^i DCPM_v^o$  in parallel do
5:        ${}^i MOut_w^r \leftarrow$  create message
       with pairs of all CDM-schema version
       attributes and "null" objects. Number
       of objects is implicit.  $\{\{{}^i r.be_r.v_w.c_1 =$ 
       "labelCDM1",  ${}^i r.be_r.v_w.c_1.cd_1 =$ 
       "null",  ${}^i r.be_r.v_w.c_1.ncd_1 = 0\} \dots\}$ 
6:       for  $\forall {}^i m_{qp}$  from  ${}_{ov} DPM_{rw}$  do in parallel
7:          ${}^i r.be_r.v_w.c_q.ncd_q \leftarrow {}^i m_{qp} * {}^i$ 
            $d.s_o.v_v.a_p.nad_p$ 
8:         if  $ncd_q = 1$  then
9:           replace
           "null" object  $\{{}^i r.be_r.v_w.c_1 =$ 
           "labelCDM1",  ${}^i r.be_r.v_w.c_1.cd_1 =$ 
           "null",  ${}^i r.be_r.v_w.c_1.ncd_1 = 0\}$  in  $MOut_w^r$ 
           with
10:  $\{{}^i r.be_r.v_w.c_1 =$ 
           "labelCDM1",  ${}^i r.be_r.v_w.c_1.cd_1 =$ 
            ${}^i d.s_o.v_v.a_1.ad_1, {}^i r.be_r.v_w.c_1.c_1.ncd_1 = 1\}$ 
11:         end if
12:       end for
13:       Send  ${}^i MOut_w^r$  to parallel stream
14:     end for
15:   end for
16: end procedure

```

---

We have, thus, implemented the DMM-system into the microservice METL with the standard stack for microservices that we use at EOS, namely Java Spring-Boot, Postgres, Kafka, and React for the User Interface. In addition, we implemented Debezium and the Apicurio-Schema-Registry in the new ETL pipeline. The registry is accessible from all stages of FX to enable an early testing of new updates. (Schindler, 2021) It contains all the schemata that we use in FX and that map onto the business entities defined in the CDM.

### 6.2 Implementation of the algorithms

We took two noticeable decisions for implementing the outlined DMM solution in METL. First,



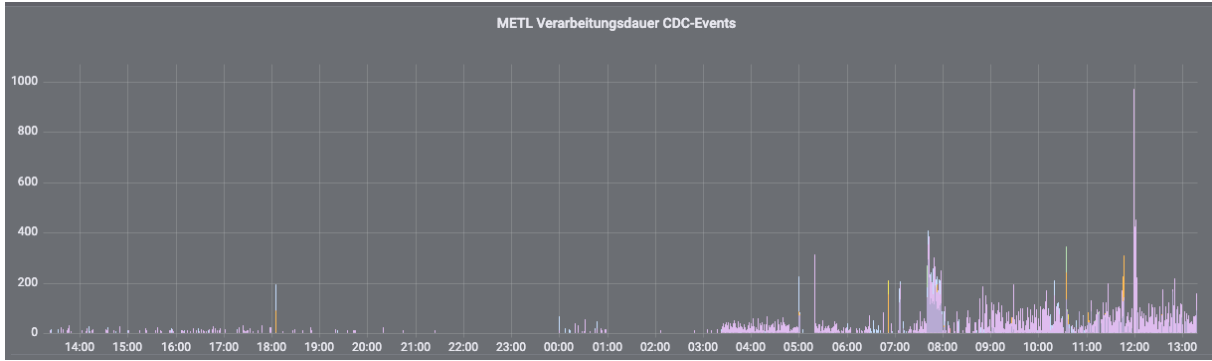


Figure 7: METL - Dashboard for system evaluation

we have shifted some more parts of the update process to  $^i\mathcal{USB}$ . This has allowed us to downshift the update algorithm to a Postgres-View which is based on a SQL-implementation of the decomposing and update algorithms.

Second, in order to make the access to  $^i\mathcal{DPM}$  effective for parallel computing, we use a cached function that reads in the columns  $^iDCPM_v^o$  of  $^i\mathcal{DPM}$  into an efficient hashmap which makes them accessible in  $O(1)$ . We are using Caffeine as the cache for the function. We evict the cache every time, a business entity, schema or mapping is updated or created and thus enforces an update of the system and the mapping matrix to a new state.

### 6.3 User Interface

Further, we have implemented an User Interface (UI) for enabling a user to confirm updates to new permutation matrix. This procedure is currently dealt with via an error and update process of the mappings. The UI, further, enables a detailed inspection of all single mapping paths.

The main feature request of our data owners has been to implement a reverse search that allows them to see which  $^im'$  schema versions are mapping to one business entity version. For this search, we are using the row-set  $^i\mathcal{DPM}$ .

Further, the data owners wanted to understand how the version progression is functioning in the system and thus, we have also implemented a search for the version sets  $^iDVP\mathcal{M}_v^o$ , which exhibits all mappings with relation to one schema and multiple versions.

The User Interface has proven to be a good basis to advance the more general evolution model for the versions, also of the business entities. Mappings can be elevated to new business entity versions in the User Interface in the same way as they are extended to new schemata versions. The system is

thus currently incrementally upgraded to the overall process defined in this paper.

Furthermore, the UI provides a good way to more strongly enforce the basic rule of the system (as compared to CSV initialisation files), namely the 1:1 attribute mappings that result in permutation matrices, which form the basis of the parallel computing, update and compacting.

### 6.4 Parallel computing

The system realises a one-directional  $^im':^in$  mapping between Kafka-messages. Despite the  $^im:^in$  structure, we have observed that most extracting schemata map only to one business entity currently. This is an intended behaviour, as we expect an integration to the CDM to result in  $^in \approx 1$ . Given the integration function, we also expect  $^im > 1$ .

Since the system conforms to this intended behaviour, we currently do not need all three parallel execution processes. However, we have kept the remaining steps of parallel computation as a reserve capacity to speed up METL further, should the need arise. As outlined above, the same holds true for the usage of horizontal scaling. We currently only need horizontal scaling for an initial load. Thus, also in this respect, we have reserve capacity.

## 7 Evaluation

Finally, we have developed several dashboards that allow for a full monitoring of the application that has gone live now. We record the number of transformations, the time they take and the storage requirements of the Caffeine cache. Thus, we are able to measure the effectiveness of our solution, which is in particular important with regard to optimising parallel computing once the load grows

further.

METL currently takes on average 39 milliseconds to conduct a full one-to-one-mapping. These data were measured over one day, namely on 13 February 2022, based on 1168 change-data-capture-events from Debezium. The standard-deviation, however, is high with 51 milliseconds. The two most probable causes for this are: First, METL is hosted in Docker-containers on virtual servers. Thus, external operations can impact the performance of METL. Secondly, the DMM-update is triggered several times a day, which evicts all caches and thus impacts on the processing time of a single event after the eviction. Given the known impact of external factors stemming from the virtual servers, we can conclude that it is reasonable to assume that the standard processing time for a single mapping of one incoming message without cache-update sits very likely in the lower bracket of execution times, which can be measured at around 10-20 milliseconds per CDC-event.

## 8 Conclusion

In sum, it has been shown that our new DMM-approach presents an efficient solution to the overall problem of modernizing ETL pipelines with microservice-based CDMs and Kafka-streams. We were able to solve the most pressing problem of this implementation, namely the usage of a very large and changing mapping matrix.

Our solution includes an optimal execution algorithm for parallel processing which is maximally time efficient. This is achieved by using square-block partitioning into permutation matrices and parallel processing. The successful optimization of the mapping is also born out by the measured metrics. It has been shown that we even have additional reserve capacity to speed up METL further, should the need arise. A mapping of a single Kafka message to  $n$  Kafka messages requires a space complexity of  $O(n)$  in the worst case. It can be brought down for the average case with a data-specific compacting algorithm. We have shown that our solution fulfills this requirement. Our algorithm can, for example, compact a null matrix to null saved blocks. We have made further gains on storage efficiency by using pattern based sequential compacting. In addition, we have developed a bespoke semi-automated update process that reduces the user-intervention to a minimum and is also based on pattern generalisation. This provides

a strong basis for further automation.

In conclusion, we have presented a new optimized solution for implementing a CDM into a microservice system as part of a streaming ETL pipeline. This implementation of a microservice system with a dynamic network and a dynamic mapping matrix is a new contribution to the research fields of CDMs, enterprise architecture, microservices and dynamic networks. The significance of this innovation derives from the fact that modern ETL pipelines with microservices, that are at the centre of many data-driven enterprises, depend on such solutions.

## 9 Acknowledgements

For the development of the CDM/ETL-pipeline, EOS assembled a team of system-architects, software engineers and data scientists. Many team-members, among them the authors of this paper, have experience in dealing with very large and fast changing data-sets and complex networks. The group had support from the director of software engineering at EOS-Technological Solutions, as well as from many other engineers, data scientists, requirement engineers, process managers and analysts at EOS and from members of external companies. The authors are indebted to all of them for fruitful discussions, contributions to the code and exchanges of ideas. The solution that we present in this paper would not have been possible without this wider innovative culture at EOS.

## 10 Authors

Dr. Christian Haase, Senior Data Scientist, NLP, Otto Business Intelligence; Software Engineer, EOS (during the METL-Project); Associated Researcher NLP-Group, Department of Informatics, University of Hamburg

Timo Röseler, Senior Software-Architect, EOS, Hamburg, Germany

Dr. Mattias Seidel, Senior Software-Architect, EOS, Hamburg, Germany

## References

Neepa Biswas, Anamitra Sarkar, and Kartick Chandra Mondal. 2020. Efficient incremental loading in ETL processing for real-time data integration. In *Innovations in Systems and Software Engineering*, volume 16, pages 53–61.

- Confluent. 2022. [Schema Evolution and Compatibility](#).
- Michael Dietrich and Jens Lemcke. 2011. [A Refined Canonical Data Model for Multi-schema Integration and Mapping](#). In *2011 IEEE 8th International Conference on e-Business Engineering*, pages 105–110. IEEE.
- Michael Dietrich, Jens Lemcke, and Gunther Stuhec. 2013a. [Iterative Effort Reduction in B2B Schema Integration via a Canonical Data Model](#). *International Journal of Strategic Information Technology and Applications*, 4(4):19–43.
- Michael Dietrich, Jens Lemcke, and Gunther Stuhec. 2013b. [Semantic Integration of E-Business Schemas via a Canonical Data Model: Assessing the Effort Reduction for B2B Message Exchange](#). In *2013 IEEE 10th International Conference on e-Business Engineering*, pages 106–111. IEEE.
- Forrester. 2010. [From The Field: The First Annual Canonical Model Management Forum](#).
- Christian Haase, Saba Anwar, Seid Yimam, Alexander Friedrich, and Chris Biemann. 2021. [SCoT: Sense Clustering over Time – a tool for analysing lexical change](#). In *aclanthology.org/2021.eacl*.
- Jens Lemcke, Gunther Stuhec, and Michael Dietrich. 2012. [Computing a canonical hierarchical schema](#). In *Enterprise Interoperability V - Proceedings of the I-ESA Conference*, volume 5, pages 305–315.
- S. McCarthy, A. McCarren, and M. Roantree. 2019. [An Automated ETL for Online Datasets](#). In *23rd Enterprise Computing Conference (EDOC)*.
- Microsoft. 10.03.2022. [Common Data Model](#).
- Gunnar Mohrling. 2022. [Advantages of log-based change-data-capture](#).
- Bruno Oliveira, Óscar Oliveira, Vasco Santos, and Orlando Belo. 2019. [ETL Development using Patterns: A Service-Oriented Approach](#). In *Proceedings of the 21st International Conference on Enterprise Information Systems*, pages 216–222. SCITEPRESS - Science and Technology Publications.
- M.J. Quinn. 2004. *Parallel Programming in C with MPI and OpenMP*. McGraw-Hill.
- Giulio Rosetti and Remy Cazabet. 2018. [Community discovery in dynamic networks: A survey](#). *ACM Comput. Surv.*, 51(2):1–37.
- Manuel Schindler. 2021. [Managing the API life cycle in an event-driven architecture: A practical approach](#).
- Alexander Suleykin and Peter Panfilov. 2020. [Metadata-Driven Industrial-Grade ETL System](#). In *2020 IEEE International Conference on Big Data (Big Data)*, pages 2433–2442. IEEE.
- Luís Henrique Neves Villaça, Leonardo Guerreiro Azevedo, and Sean Wolfgang Matsui Siqueira. 2020. [Microservice Architecture for Multistore Database Using Canonical Data Model](#). In *XVI Brazilian Symposium on Information Systems*, pages 1–8, New York, NY, USA. ACM.