

METL - a modern ETL pipeline with a dynamic mapping matrix

Christian Haase*, Timo Röseler⁺, Mattias Seidel⁺

⁺ EOS Technological Solutions, Hamburg, Germany

* Otto Business Intelligence, Hamburg, Germany

haase.mail@web.de

t.roeseler@eos-ts.com

m.seidel@eos-ts.com

Preprint

Abstract

Canonical data models (CDM) have gained traction as a pattern for data integration in streaming pipelines that extract, transform and load data (ETL). CDMs are in particular useful for integrating microservice systems. (Villaça et al., 2020; Oliveira et al., 2019) However, the transformation to a CDM is complex. (Lemcke et al., 2012) In this paper, we present a new solution that is based on a new dynamic mapping matrix (DMM). The DMM has been implemented into an app called Message ETL (METL). METL is the key part of a new ETL streaming pipeline at EOS. EOS is part of the Otto-Group, the second-largest e-commerce provider in Europe.

The pipeline is based on Kafka streams. METL transforms Kafka messages, that contain a set of data objects described by one of n different extracting schemata. It transforms each of these incoming messages into several outgoing ones. Each outgoing message contains a sub-set of the incoming data objects, but describes them with a different schema, namely one of m different CDM schemata. For the mapping, METL requires a matrix that consists of $m \times n$ sub-matrix mapping blocks. There are three problems, namely the sparsity of the matrix, the adaption of the matrix to changes in the schemata and time efficiency. We solve these problems by block-partitioning, sub-matrix formation and pattern generalization. In this process, we derive sets of permutation matrices. We show that they can be used for automated updates, for parallel computation in near real-time and compacting. The set of all permutation matrices forms the dynamic mapping matrix. For the solution, we draw on research into matrix partitioning (Quinn, 2004) and dynamic networks (Haase et al., 2021).

1 Introduction

The modernization of ETL pipelines is a central aspect of the transformation of enterprise systems in the age of cloud computing and machine learning (ML). (Biswas et al., 2020) The push for modernization has been caused by the increased velocity, variety and volume of big data and the new demands of systems that leverage ML. (McCarthy et al., 2019)

The modernization often encompasses the improvement of two different types of ETL pipelines. Traditional pipelines dating back to the 1990s connect a central database with a data warehouse (DW) and load the data once a day. They are too slow for modern near real-time scenarios and are, thus, often replaced with new streaming pipelines. These streaming pipelines are faster and can serve multiple systems more easily. They extract data from various sources, for example with Change Data Capture (CDC), and can forward it in near real-time to a multitude of consumers, such as ML systems.

However, these new streaming pipelines have also experienced new problems. With the increased number of connected distributed systems, the need has arisen to provide standardized data exchange formats for them. Such problems are in particular pressing for large microservice systems. Therefore, many enterprises have begun adding data integration to their ETL streaming pipelines.

The canonical (or common) data model is a design pattern in enterprise architecture that offers data integration. It was originally invented for service-oriented architectures (SOA). (Forrester, 2010) In recent years, the pattern has gained renewed attention for microservice systems (Villaça et al., 2020) and for distributed cloud systems (Microsoft, 10.03.2022). A custom CDM provides a bespoke alternative to the established commercial

Kafka-streams platforms.

While the CDM pattern offers many benefits, it also presents significant challenges and is difficult to implement. (Lemcke et al., 2012) Most mapping systems label large data packages with meta-data, even in big data scenarios, such as railway systems. (Suleykin and Panfilov, 2020) A CDM, however, requires that every single attribute of the extraction schema is handled.

In order to use a CDM efficiently in modern streaming ETL pipelines with near real-time requirements, more research and best practice examples are needed, in particular for microservice systems. We present such a pioneering study on the integration of a microservices system with a CDM into a streaming pipeline at EOS. EOS is part of the Otto-Group and has specialized in financial services.

In the first part of this paper, we present the architecture of the pipeline and the mapping system which we have designed. The new pipeline extracts data from a microservice system called FX with Debezium from more than 80 Postgres databases with several tables each. The extracted data of each table are described with versioned schemata that are pulled from a registry. There are n different versioned extracting schemata. The pipeline, then forwards the data with schematized Kafka-messages. METL then transforms each one of these Kafka-messages to several outgoing messages that describe the payload with a different schema, namely one of m' different versioned CDM schemata. METL then sends these Kafka-messages via a Kafka-Broker to the analytics platforms.

In the second part of the paper, we develop a model for the app. We show that METL is best conceptualized as a distributed dynamic network encompassing two schemata sub-graphs with blocks of attributes. These blocks of attributes form the leafs of the schemata trees. These leafs are expanded by child nodes in the form of data objects contained in the Kafka-messages. The attributes of one schema-version block can be connected to the attributes of another message-block. For each of these connections, we define a mapping function with a parameter. This parameter can be 0 or 1. If it is 1, then the contained data object in a message is mapped to a CDM-attribute. All parameters form the block-scoped mapping matrix.

The peculiar challenge of the system consists in the fact that this matrix expands when new blocks of attributes are added to the dynamic network or shrinks when blocks of attributes are deleted. We estimate that the mapping matrix can expand to up to 1.000.000.000 elements.

In the third part of the paper, we present a new optimal solution for managing updates to the matrix and for processing mappings with it in near real-time. First, we restrain the mappings to single sub-matrix blocks that connect the attributes of one extracting schema version with the attributes of one CDM-schema version. Thus, one incoming message is mapped at once to one outgoing message. An outgoing message does not need to wait for a second incoming message. This provides the basis for horizontal scaling.

Second, we restrain the attribute-to-attribute mappings to 1:1 mappings. This constraint enforces peculiar sub-matrix patterns inside the rectangular sub-matrix mapping blocks of the mapping matrix, namely either a null block or a square permutation matrix.

Third, we define static finite states of the matrix with the state i in order to make the dynamic re-sizing better manageable. Bases on these finite states, we develop a mapping system with two sets, first the set ${}^i\mathfrak{PM}$, which is the set of all permutation sub-matrices of the mapping matrix iM , and, second, the set ${}^i\mathfrak{UNB}$ that is the set of all unique sub-matrix permutation matrices and sub-matrix special null blocks of the mapping matrix iM . We derive these sets from the matrix by block-partitioning, sub-matrix formation and sequential generalisation within the different versioned mapping blocks of one extracting schema. The set ${}^i\mathfrak{PM}$ enables parallel processing and automated updates of the matrix from the state i to state $i + 1$. It forms the dynamic mapping matrix. The set ${}^i\mathfrak{UNB}$ enables highly efficient compacting to unique square sub-matrices.

In the fourth and fifth part, we explain the implementation of the new app and the streaming pipeline and evaluate the performance of METL in the pipeline.

2 Related research

For the solution, we draw on research into dynamic networks (Haase et al., 2021; Rosetti and Cazabet, 2018), distributed systems, microservices, enterprise architecture, ETL pipelines,

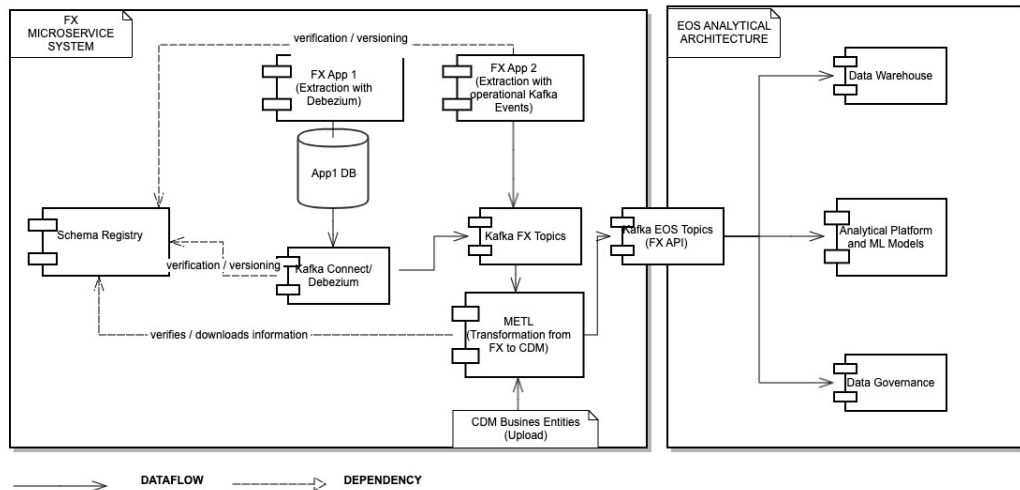


Figure 1: Architecture of the modern streaming ETL pipeline that extracts data from more than 80 microservices, transforms it to a CDM with the app METL and then pushes the data via Kafka-streams to the data warehouse and machine learning systems. The main problem of the architecture is the high number of schemata versions that are needed to integrate the microservice system into the pipeline. These versions cause the mapping matrix in METL to expand and can slow down the pipeline. The new dynamic mapping matrix solves this problem and enables a constant flow of data in the pipeline in near real-time.

Kafka-streams, mapping systems and into calculations with very large matrices. (Quinn, 2004)

Very large matrices play a role in many industrial, scientific and machine learning applications. Sparse block-mapping systems in linear algebra consist, for example, of a sparse block-scoped vector and a sparse block-matrix, which are multiplied to derive a resulting block-scoped sparse vector. We are using a simplified version of such a system and conduct single value multiplications with the parameters in the matrix. Since such multiplications provide single mathematical operations, it is difficult to optimize them further. If a matrix grows in size, so does the number of required operations.

The main approach for speeding up calculations with very large matrices is to partition them and to process the single parts in parallel. Such strategies are often developed in relation to static matrices, these are matrices that do not change their size or their values. There is less research on how to conduct such strategies in relation to dynamic matrices, which expand or shrink in size and undergo value updates.

3 Architecture of the new streaming ETL pipeline with a CDM

The FX-system at EOS is a modern distributed microservice system that deals with financial operations and is driven by machine learning models that predict the next best action. One of these models predicts, for example, an optimal monthly rate for debt repayments.

3.1 Challenges of the existing enterprise architecture

The modernization of the ETL pipelines at EOS has been caused by a number of issues that the previous pipelines and APIs have exhibited:

- The previous ETL streaming pipeline between FX and the DW, thus a modern pipeline type, could not deal efficiently with the high number of connected systems and the high change rate of the data structures. It was lacking data integration.
- The ML models have been trained with data from a different system forwarded by a second ETL pipeline. This has led to skewed predictions for FX data.
- This second pipeline was an old ETL pipeline

```

1- {
2-   "schemaId": 24,
3-   "payload": {
4-     "before": null,
5-     "after": {
6-       "id": 32201,
7-       "value": 10.00,
8-       "currency": "EUR",
9-       "time": 1634052484031131,
10-      "comment": null
11-    }
12-  },
13-   "source": {
14-     "connector": "postgresql",
15-     "db": "payments",
16-     "table": "incoming"
17-   }
18- }

```

```

1- {
2-   "type": "struct",
3-   "fields": [
4-     {
5-       "type": "struct",
6-       "fields": [
7-         {
8-           "type": "int64",
9-           "optional": false,
10-          "field": "id"
11-        },
12-        {
13-          "type": "int32",
14-          "optional": false,
15-          "name": "io.debezium.time.Date",
16-          "version": 1,
17-          "field": "time"
18-        }
19-      ]
20-    }
21-  ]
22- }

```

Figure 2: Left: example of a schematized Kafka-message. It transmits data that has been extracted by Debezium. Right: example of a (shortened) originating JSON-schema with a version that describes the content of the message.

type, which was not fast enough for near real-time scenarios.

EOS decided to overcome these challenges with a new combined ETL streaming pipeline that contains a CDM. The task of the CDM is to filter out technical data from the microservices, condense partially duplicated data, reduce the high number of data structure changes to a more stable schema, offer more precise and unified descriptions of the business content of the data for the DW and the ML models and introduce more general data types for sharing. (Forrester, 2010)

The new planned ETL pipeline shall have the potential for future near real-time cases. It is based on Kafka streams. It rests on five new pillars:

- Debezium connectors to the microservice databases that extract data in near real-time (Mohrling, 2022) ,
- an Apicurio registry for the extracting schema which enforces rules for schema versioning and schema evolution,
- a CDM for the outgoing messages that offers data integration,
- a new mapping app called Message ETL (METL) that maps extracted data to the CDM and offers adaptations to version changes as well as the possibility for new initial loads and error management procedures,
- a streaming API that hides the complexity of the distributed microservice system to the distributed enterprise systems.

The architecture of the new ETL streaming pipeline with the microservice METL is shown in figure 1. The key component in the pipeline is METL which conducts the mapping to the CDM before the data is pushed to the enterprise analytics system via Kafka-streams. The METL-Kafka-API in this pipeline aims to provide a well described stream of CDM data in the fastest time possible with minimal interruptions and clearly defined version update paths and error procedures.

Note that CDMs in microservices constitute a major architectural change towards the older SOA-architecture. CDMs used to be located between large systems. For the microservice-based ETL pipeline, the CDM has been moved into the microservice system as an API.

3.2 Versioned schemata and the complexity of the mapping

The main aim of the new mapping app METL is to implement the CDM into the pipeline which enables data integration. In order to do this, METL needs to be able to deal with a high number of extraction schemata and frequent changes to these schemata.

The data is extracted from the databases of the microservices with so-called log-based Change Data Capture (CDC) events. Such an extracted CDC event is shown in our message in figure 2. It consists of a "before" state of a data-row and a "after" state of a row in the database table. In the shown example, the "before" payload is empty. This means that the row has been created newly in the database. In addition to the "before": "after"

CDC event that is shown in figure 2, there are further CDC-event types, such as changed metadata-events or deletion notifications.

The extraction of CDC events from the databases of a microservice system in near real-time enables advanced use cases for predictions from machine learning systems. However, it requires a very flexible CDM mapping system that can deal with frequent version updates. Each new column, deleted column, added table, deleted table, renamed column, or changed type in any database of any of the microservices, requires namely a new version of an extracting schema.

Having said that, it is important to note that even if one does not use CDC on database level for the extraction, one still needs to deal with a high number of versions. The first ETL streaming pipeline of the FX system that extracted data from Kafka-APIs and not from the databases, also experienced a large amount of data structure changes.

Finally, the mapping system does not only need to deal with changes to the extracting schemata, but also with the version updates of the CDM. Schemata of a CDM are called business entities. The focus on business content underlines the idea to filter out technical details in a CDM mapping. While the business entities are more stable than the extracting schemata, they also undergo changes.

3.3 Streaming ETL with Kafka-based streams

The data in the streaming pipeline is forwarded by messages that are associated with versioned schemata. The message that is shown in the example in figure 2 is related to a versioned extracting schema by a unique global id. Messages that contain data with the mapped CDM schemata also contain described attributes and link to a versioned schema.

The CDM schema, however, differs from the extracting schema by offering more generalized types and better descriptions. Thus, for example, where the extraction schema on the right of figure 2 contains the type "int32", the CDM schema contains the type "integer". Furthermore, there are additional fields in the CDM schema for detailed short descriptions of the data, which are absent in the extracting schema shown in figure 2.

The mapping process from one message with the extracting schema to one message with the CDM schema, changes the schema of the data,

but not the data object itself. The described data objects are called the payload of the message. The payload of the incoming message consists of pairs of schema attributes and data objects, such as "time": "1634052484031131". The payload of the outgoing message consists of several pairs of attributes and objects, too. These attributes have exactly the same immutable object, thus, for example, "Time of the payment": "1634052484031131".

The best metaphor for understanding the system is from transport networks related to a large shipping terminal. The mapping app that we design constitutes the harbour. The pipeline is the water flow. The Kafka-messages are the ships that dock to the harbour and contain a sealed load that consists of containers, i.e. the abstract data objects. These containers are labelled with a schema. The containers are taken out of the incoming ship and are relabelled and are then put into new ships that carry them to their destinations.

The mapping matrix in this network system constitutes the logic of the system. It determines the full reloading and relabelling process of the containers. This matrix needs to be adapted constantly to deal with version updates that pose the core problem for our system.

3.4 Semi-automated workflows in the ETL pipeline

Version updates affect all components of the pipeline, in particular METL. The version updates of the extracting schema affect the schema registry and METL. The version updates of the CDM affect METL and all subsequent systems that need to deal with them.

There are two main strategies for version updates across all elements of the pipeline, forward and backward compatibility. One allows the deletions of attributes, the other one additions. Such update paths are usually defined by an overarching schema-system, and exist for example also for the widely used Avro-schema (Confluent, 2022).

For deletions and additions of extracting schemata in the EOS pipeline, multiple components interact in the pipeline. If an attribute is deleted, for example, the user needs to access the Apicurio schema registry, provide a new schema version and then add new mapping rules to METL.

Due to the high number of changes, this update process is semi-automated. If the registry detects

a change of attributes in the data schema of a microservice database, it enforces an update process to a new version.

The update process of the schemata of the CDM, is done in a manual manner. There is numerous research in initializing and updating CDMs. (Dietrich and Lemcke, 2011; Dietrich et al., 2013b,a) In the EOS case, however, the data owners of the FX system took the opportunity to integrate their domain knowledge to the CDM and, therefore, update the business entities manually. Such an update then requires also the adaption of the mapping matrix inside METL, which can be done in a manual manner, too.

The mapping app METL, thus, inherits the version update workflow from the schema registry and the CDM process. The external version updates directly affect the mapping matrix of METL. For any new schema or CDM version, it expands and needs new values for the new matrix elements. For any deleted schema or CDM version, it shrinks and needs a deletion procedure.

3.5 The mapping system as a distributed system

The described elaborate version update process across the pipeline shall prevent technical and content-based mapping errors which can occur if an outdated mapping definition is used that contains an attribute that has been deleted or a new mapping relationship is established in an automated manner that needs double-checking by a data owner.

However, there is a third source of possible complications that stems from the context of the implementation and the ETL pipeline. A mapping system that maps changing data structures in a pipeline is namely a distributed system and distributed systems produce problems of their own. They can be out of sync for example. It is for example possible that a new schema version has been pulled from the registry for a Kafka-message, but that this version is not known to METL yet.

Given the complexity of keeping a distributed mapping system in sync across the pipeline, it is good practice to have additional error-management procedures in place as well as options to set back Kafka-offsets and start new initial loads.

One needs to keep these fall-back options in mind when reading the paper. We conceptualize the

overall mapping system with several components in the pipeline with a state i . Each core element of this system, from the Kafka-messages to the schemata and the mapping matrix in METL inherits this state i . This does not mean that all elements can acquire a new state $i + 1$ instantly. They need to be updated separately to a new state $i + 1$ for the system to be in sync with an overall state again. In the implementation, we are thus checking at several points if the METL app is in sync with the other components of the pipeline that contribute to the mapping and throw an error if this is not the case.

3.6 Conclusion

In this section, we have analysed the architecture and the challenges of constructing a mapping app in a distributed system. Furthermore, we have shown that version updates form a central part of the system and that they pose the greatest challenge for the new mapping app.

4 Designing the static, sparse and sequential basic mapping system

After we have explored the architecture in the previous section, we are developing a static, sparse and sequential baseline mapping system in this section that can transform schematized Kafka-messages in a streaming ETL pipeline to a CDM and send out resulting Kafka-messages. This baseline system consists of two trees of the CDM schemata and the extracting schemata and the block-scoped matrix that defines the parameters for mappings between the attributes of the two trees.

In order to make the development process easier to understand, we design the baseline system as a static, sparse and sequential system. We then explain how one can make such a standard system dynamic with new methods in the next section. Since we design the baseline system as a sparse system, it includes 0s and "null" objects. We need this as a starting point for developing various compacting steps in the next section. Finally, we present a first sequential mapping algorithm, which we then optimize for parallel processing in the next section.

4.1 Defining the system as a network

The main data structure of our distributed system is a distributed dynamic network. A network is a

graph and a graph is a pair $G = (V,E)$ with V a set of vertices and E a set of edges. In relation to networks, one often speaks of nodes and links instead of vertices and edges. Networks are often used to conceptualize real-live processes, such as data or traffic flows. Graphs are used for discussing more abstract concepts in mathematics.

The CDM tree and the tree of the extracting schema are two sub-graphs of the network. The extracting schema tree iD defines a core part of the domain of the mapping and has a top-level node id . The CDM tree iR defines the range of the mappings and consists of a top-level node ir . These root-nodes have child-nodes in the form of the business entities and the schemata. These are versioned. The versions define the attributes associated with the business entity or the schema.

We describe a path in such a sub-graph of the network with a simplified edge notation. Instead of defining a path as ${}^ir.be_1, be_1.v_1$ etc., we simply write ${}^ir.be_1.v_1.c_1$ (range.business-entity.version.cdm-attribute) or ${}^id.s_o.v_v.a_p$ (domain.schema.version.attribute). c_q and a_p are the attributes that we map.

A mapping is defined as an operation that associates each element of a given set, called the domain, with one or more elements of a second set, called the range. In our case, the domain and the range are constituted by the trees and additional child-attributes of incoming and outgoing Kafka-messages that add to these trees in our distributed dynamic network.

In order for the Kafka message attributes to be related to a schema tree, both need to have the same state i . Once a Kafka-message is linked to the mapping network, it adds two child-nodes to the domain tree which contain values that are then used by the mapping function. For each of these connections, we define a parameter for a mapping function. These parameters form the $m \times n$ mapping matrix iM . The mapping function result either in a 0 or 1. If it results in 1, the data object contained in one of the child nodes is transferred and relabelled through the full network to an attribute in an outgoing Kafka-message.

The child nodes of the associated attributes that are necessary for the mapping process are always present in any Kafka-message, even if they are not explicitly visible due to omitted "null" values. These two child nodes are the data object ad_p and the number of data objects nad_p . Since any

abstract object can only be present or not in any message, the number of abstract data objects per attribute is $nad_p \in \{0, 1\}$. The same two children are present in any outgoing Kafka-messages $MOut_w^r$, for which, $ncd_q \in \{0, 1\}$.

Figure 2 shows a Kafka-message and its JSON schema. It contains, for example an attribute with data object "time" : "1634052484031131". We translate the information from the message as follows: Given $p=1$, then a_1 is "time", ad_1 is "1634052484031131" and nad_p is 1.

4.2 Defining a single attribute mapping

For every single mapping between any attributes of an extracting schema and a CDM schema, we define a **mapping element** ${}^im_{qp}$ that defines the parameter of a mapping function. The value of this element can change across the states i . It can either be 0 or 1, ${}^im_{qp} \in \{0, 1\}$.

The mapping function is

$$c_q.ncd_q \leftarrow {}^im_{qp} * a_p.nad_p$$

It takes its arguments from the value of the mapping element ${}^im_{qp}$ and from the children of the associated attributes a_p and c_q , more precisely from the number of data objects nad_p and ncd_q that are connected with the attribute.

The mapping function works on the child nodes of a_p and c_q that are only present once we connect at least one incoming and one outgoing Kafka message with the state i to this network.

If the result of the function is $ncd_1 = 1$, then the data object from the incoming Kafka-message is attached to the attribute c_q as a child element cd_q in the outgoing Kafka-message.

In order to avoid problems that may emerge from the invisible "null" problem of the JSON schemata that we use for the Kafka-messages, we include all optional attributes in Kafka-messages. We, thus, define that all a_p of any given ${}^iD_v^o$ are also present in ${}^iMin_v^o$. Making the Kafka-messages sparse, helps understanding and defining the contents in an exact manner.

Since a "null" object is equivalent to saying that 0 data objects are present in the message, we formalize

$$\begin{aligned} ad_p = "null" &\leftrightarrow nad_p = 0, \\ nad_p \neq "null" &\leftrightarrow nad_p = 1, \\ cd_q = "null" &\leftrightarrow ncd_q = 0, \\ cd_q \neq "null" &\leftrightarrow ncd_q = 1 \end{aligned}$$

	${}^i d.s_1$	${}^i d.s_1$	${}^i d.s_1$	${}^i d.s_1$	${}^i d.s_1$	${}^i d.s_2$
	$v_1.a_1$	$v_1.a_2$	$v_1.a_3$	$v_2.a_4 \equiv v_1.a_1$	$v_2.a_5 \equiv v_1.a_3$	$v_1.a_6$
${}^i r.be_1.v_1.c_1$	${}^i m_{11}$	${}^i m_{12}$	${}^i m_{1n}$
${}^i r.be_1.v_1.c_2$	${}^i m_{21}$
${}^i r.be_1.v_2.c_3$
${}^i r.be_1.v_2.c_4$	${}^i m_{i m_1}$

Figure 3: The mapping system consists of a distributed network and a ${}^i m \times {}^i n$ matrix ${}^i M$ that contains ${}^i m' \times {}^i n'$ sub-matrix mapping blocks. The blocks that are indicated with triple-lines provide the values for the mapping function between any two Kafka-messages. The matrix is not only block-scoped, but also super-block-scoped due to the hierarchies in the schema-trees. Blocks (gray/orange, pink/orange) can be grouped into super-blocks of various versions related to one schema, for example (magenta/lime, white/lime). The paths are described with a short-notation in the form of node1.node2.node3. Elements with the state index i can change values (or children nodes), elements without i cannot. The equivalence sign \equiv indicates that the same attributes have been assigned to multiple versions of the same schema within one magenta/white version-super-block.

4.3 Defining the block-scoped mapping matrix

In order to work with the large number of mapping parameters for all associations between all attributes, we aggregate the elements to a matrix ${}^i M$ and define $m' \times n'$ sub-matrix blocks within this matrix. These mapping blocks map the data objects associated with the attributes of one versioned extracting schema to the attributes of one versioned CDM schema.

All ${}^i m_{qp}$ for one given state i form the $m \times n$ matrix ${}^i M$. The sets ${}^i \mathcal{A}$ and ${}^i \mathcal{C}$ define the size of this matrix with ${}^i m = |{}^i \mathcal{A}|$ and ${}^i n = |{}^i \mathcal{C}|$.

The matrix is not only block-scoped by the Kafka-message, but also super-block scoped by hierarchies inherent in the schema trees. One can super-group attribute-blocks with different versions in relation to one particular schema, for example. This block- and super-block-scoped association matrix is shown in figure 3.

4.3.1 Names of matrix blocks

For the definition of various blocks in this matrix, we need a naming scheme.

- SINGLE ELEMENT

- ${}^i m_{qp}$ - element of the Matrix ${}^i M$

- SINGLE MATRIX BLOCKS AND SETS OF ELEMENTS

- MB - $m \times n$ block of matrix elements related to one schema-version and one CDM-schema-version

- SB - $n \times n$ square block of matrix elements - sub-matrix of MB

- NB - $n \times n$ null block of matrix elements - sub-matrix of MB

- PM - $n \times n$ permutation matrix - sub-matrix of MB

- D - densely saved block, 1s only

- SUPER-SETS OF MATRIX BLOCKS

- \mathcal{R} - Row super-block of matrix blocks

- \mathcal{C} - Column super-block of matrix blocks

- \mathcal{V} - Version super-block of matrix blocks

- \mathcal{U} - super-set with unique elements, i.e. \mathcal{VUSB} - version super-block of unique square matrix blocks

- SUPER-SETS OF SUPER-SETS

- ${}^i \mathcal{PM}$ - super-set of all permutation matrices. It contains the column-, row- and version-block-sets of all permutation matrices.

- ${}^i \mathcal{USB}$ - super-set of all super-blocks of unique square block matrices; contains also all column-, row- and version-block-sets.

- ${}^i \mathcal{NB}$ - super-set of all square null blocks; contains also all column-, row- and version-sets row sets.

- ${}^i \mathcal{MB}$ - super-set of all all MB ; contains also all column-, row- and version-block-sets.

4.4 The basic mapping algorithm

The main approach of dealing with the very large sparse block-scoped matrix, is to block-partition it into simple mapping blocks. For this, we need to group the elements ${}^i m_{qp}$ of ${}^i M$ first into ${}^i m' \times {}^i n'$ **blocks of mapping elements** ${}^i_{ov} MB_{rw}$. Such blocks are indicated by triple lines in figure 3. Such a block contains all possible associative elements in relation to one ${}^i D_v^o$ and one ${}^i R_w^r$ for one given state i . This block can be used to map the attributes of one incoming Kafka-message to the attributes of an outgoing Kafka-message. It is the basic building block of our system.

We further define two constraints. First, we define that one incoming message is mapped by one single block to one outgoing message. Thus, all blocks in one block of columns of the matrix $\forall {}^i_{ov} MB_{rw} \in {}^i CMB_v^o$, map one incoming message to ${}^i m'$ outgoing ones, including messages with null objects only. Thus, no outgoing message has to wait for a second incoming message. Second, we restrain the blocks to 1:1 attribute mappings.

Based on these definitions, we can define the initial sparse and sequential mapping algorithm for one incoming Kafka message in Algorithm 1. It uses a column set of mapping blocks to map one incoming message ${}^i MIN_v^o$ to ${}^i m'$ outgoing messages ${}^i MOUT_w^r$. The outgoing messages include messages that contain "null" objects only. At the end of the paper, we replace this sequential and sparse algorithm with an optimized parallel algorithm that only sends out messages that contain at least one non-"null" data object. Note: that "null" objects in outgoing messages are created in two ways in this algorithm: either the number of contained data objects per attribute is 0 or the parameter in the mapping block is 0.

4.5 Defining state change

We now can define more precisely, how the system changes from one state to another in relation to externally induced updates of the schemata. We define three triggers:

- The values of mapping elements ${}^i m_{qp}$ are changed by the user.
- A version is added to the extraction schema or a version is deleted. This induces changes to the set of the schema attributes and requires changes in the number and possibly

Algorithm 1 Sparse and sequential algorithm: mapping one ${}^i MIN_v^o$ to ${}^i m' {}^i MOUT_w^r$

```

1: procedure MAP( ${}^i MIN_v^o$ )
2:   get  ${}^i CMB_v^o$  from  ${}^i \mathfrak{M}\mathfrak{B}$  that matches the
   indices of the incoming message
3:   for  $\forall {}^i_{ov} MB_{rw} \in {}^i CMB_v^o$  do
4:      ${}^i MOUT_w^r \leftarrow$  create message with
   pairs of all CDM-schema version at-
   tributes and "null" objects. Number of
   objects is implicit.  $\{\{r.be_r.v_w.c_1 =$ 
   "labelCDM1",  ${}^i r.be_r.v_w.c_1.cd_1 =$ 
   "null",  ${}^i r.be_r.v_w.c_1.ncd_1 = 0\} \dots\}$ 
5:     for  $\forall {}^i m_{qp}$  from  ${}^i_{ov} MB_{rw}$  with
    ${}^i m_{qp} = 1$  do
6:        ${}^i r.be_r.v_w.c_q.ncd_q \leftarrow {}^i m_{qp} * {}^i$ 
    $d.s_o.v_v.a_p.nad_p$ 
7:       if  $ncd_q = 1$  then
8:         replace "null"
   object  $\{{}^i r.be_r.v_w.c_1 =$ 
   "labelCDM1",  ${}^i r.be_r.v_w.c_1.cd_1 =$ 
   "null",  ${}^i r.be_r.v_w.c_1.ncd_1 = 0\}$  in  ${}^i MOUT_w^r$ 
   with
9:  $\{{}^i r.be_r.v_w.c_1 =$ 
   "labelCDM1",  ${}^i r.be_r.v_w.c_1.cd_1 =$ 
    ${}^i d.s_o.v_v.a_1.ad_1, {}^i r.be_r.v_w.c_1.ncd_1 = 1\}$ 
10:      end if
11:    end for
12:    collect all  $m' {}^i MOUT_w^r$ 
13:  end for
14:  return  $m' {}^i MOUT_w^r$ 
15: end procedure

```

also the values of the elements ${}^i m_{qp}$.

- A version is added to the CDM schema or a version is deleted. This induces changes to the set of all CDM attributes and requires changes in the number and possibly also the values of the elements ${}^i m_{qp}$.

From this description, the main challenge of the mapping system becomes clearer. The size and the values of the mapping matrix need to be adapted to the external schema versions by transitioning ${}^i M$ to ${}^{i+1} M$. However, what is the size ${}^i M$ and how many do we need to change in response to external updates? There are more than 10.000 data-attributes in total in all databases and Kafka-events of FX. The CDM has more than 1.000 attributes. We estimate that after some time of usage, there will be at least 10 versions of any

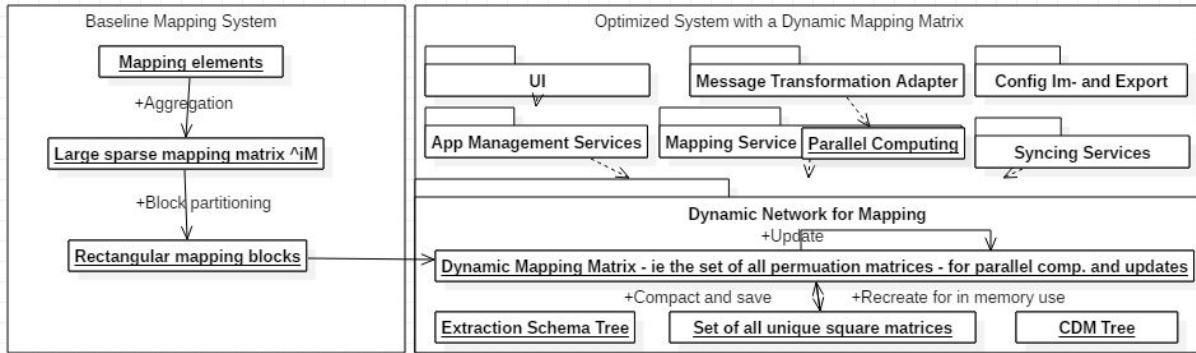


Figure 4: Development of the DMM system: first, a baseline mapping system is established with the mapping matrix iM . For the initial algorithm, a simple block partitioned form of the matrix is used. Second, these blocks are then generalized to permutation matrices. This set of permutation matrices forms the dynamic mapping matrix for parallel computation and matrix updates. Third, a different set of generalized square matrices is used for compact saving in a database.

schema that need to be managed in parallel. In order to conduct a mapping of all possible incoming Kafka message to the outgoing ones, one needs up to 1.000.000.000 associative elements ${}^i m_{qp}$ for any given state i . Thus for our $m \times n$ matrix ${}^i M$ $m \times n \approx 1.000.000.000$.

We further estimate that any schema version consists of 10 attributes. Thus, each time a new version is added to a database and a schema needs to be changed or each time a CDM-version is added, up to 100.000 elements ${}^i m_{qp}$ need to be added, deleted or updated in the transition from ${}^i M$ to ${}^{i+1} M$. Such a very large number is difficult to handle. The diff-set is virtually impossible to update for a user without an automated procedure. We, thus, need to optimize our system significantly.

4.6 Conclusion

The most important achievement of the simple block-mapping system is that it can be used to transform one single Kafka-message from the stream to ${}^i m'$ outgoing Kafka-messages with ease. The usage of ${}^i m'$ sub-matrix blocks for the mapping is intuitive. However, overall such a basic system has major flaws for our use case:

- it can only work on one single incoming Kafka-message at a time and can only map this one message to ${}^i m'$ outgoing ones in a sequential manner. No conception for parallel computation has been developed that is vital to conduct the mappings in near real-time;
- it cannot deal with new externally induced

schema versions and updates to all associative elements;

- the space complexity of the sparse matrix and sparse matrix blocks and sparse messages is very high, which in turn can affect the processing speed.

5 Optimizing the system with a dynamic mapping matrix

We have three optimisation goals for the baseline system, namely the optimization of time-, update- and space-efficiency (in this order). The main strategy for achieving these three goals consists in the partitioning of the ${}^i m \times n$ mapping matrix ${}^i M$ into ${}^i m' \times n'$ blocks MB as shown in figure 3 and to generalize them further into square matrix blocks SB with specific value patterns, namely sub-matrices in the form of square permutation matrices PM , which we use for mapping, and special 1×1 null matrix blocks NB which we need for our sequential compacting algorithm.

The permutation matrices are at the core of the overall optimization strategy. The significance of the permutation matrices, namely that they define a single message to message transformation, derives from the above mentioned single block constraint of the mappings. These square sub-matrices are colored green/brown and blue/brown in figure 5. The set of permutation matrices is called ${}^i_{ov} PM_{rw}$. These permutation matrices form the basis for parallel computation and automated updates and also play a role in our compacting algorithm. In this section, we will develop the optimized system as shown in figure 4.

The DMM system is realised by two new data sets, first the set ${}^i\mathfrak{PM}$, which is the set of all permutation matrices, and, second, the set ${}^i\mathcal{USB}$ that is the set of all unique permutation matrices and special null blocks. Both are super-supersets. ${}^i\mathfrak{PM}$ contains the sets ${}^i\mathcal{CPM}$, ${}^i\mathcal{RPM}$ and ${}^i\mathcal{VPM}$. These contain all single row-, column- and version- blocks ${}^i\mathcal{CPM}_v^o$, ${}^i\mathcal{VPM}_{rw}$ and ${}^i\mathcal{RPM}_w^r$. These contain the single permutation matrices, which in turn contain blocks of single associative elements ${}^im_{qp}$. ${}^i\mathcal{USB}$ contains the collection of all version blocks ${}^i\mathcal{USB}$, which contains all ${}^i\mathcal{VUSB}_{rw}$. It is used for compact storage. We visualize these matrix blocks in figure 3.

5.1 Improving matrix updates with permutation matrices

Update efficiency relates to the ability of the mapping system to manage the frequent changes of the mapping matrix that occur when new versions of the extracting schemata or the CDM schemata are added to the system or when older versions are deleted. In the given case of the CDM mapping at EOS, the permutation matrices and null matrices can be used for updates. If a matrix block has at least one 1, it contains a permutation matrix. It follows:

1:1 mapping of attributes in a hxj block of attributes with at least one 1 \leftrightarrow a kxk permutation sub-matrix of the hxj block exists

5.1.1 Equivalences among attributes

For any addition of a new version of an extracting schema, we work on the matrix and not on the single blocks for ease of understanding. We can conduct the update operations in a horizontal manner for extracting schemata and in a vertical manner for the CDM-schemata.

For the addition of a new version of an extracting schemata to the tree, we add a new block of columns to the matrix. In each row, these new version columns extend one specific extracting schema version-super-block. This version-super-block is extended by a rectangular null sub-matrix block. We have three choices for applying values to this rectangular null matrix block with the highest version v within each of the m' version-super-blocks:

- we can replace the null values with the values of a permutation matrix from a matrix block within the same version-super-block with version $v - 1$,

- we can copy a sub-matrix of a permutation matrix from a matrix block for the same schema with version $v - 1$ within this version-super-block thereby creating a new permutation matrix block in v ,
- we leave the newly created matrix block as a null block.

We can conduct the same operation in a vertical manner for added versions of CDM-schemata. In this case, we add a new matrix block ${}^i_{ov}MB_{rw}$ to a CDM-schema version-super-block ${}^i_{ov}VMB_r$ that corresponds to a new business entity version.

We can use options 1 and 2 only under one condition, namely when the new matrix block with version v in the horizontal or vertical version-super-block contains equivalent attributes to the block with version $v - 1$. This is often the case because attributes of one extracting- or CDM-schema are duplicated across schema versions in the update process. If we have a version 1 with attributes a_1 and a_2 and we add a_3 , then version 2 consists of a_1 , a_2 and a_3 . This duplication is one of the main reasons for the very quick and large expansion of the mapping matrix in a microservice system with a CDM. However, it also provides the basis for the solution.

Thus, if we want to create a mapping block for a new version for a given extracting or CDM-schema, we can add a new rectangular null matrix-block ${}^i_{ov}MB_{rw}$ to the horizontal version-super-block ${}^i_{ov}VMB_{rw}$ that correlates to a new version of an extracting schema or the vertical version-super-block ${}^i_{ov}VMB_r$.

In both cases, we can copy the square block pattern values from the previous version. Since we are operating on a matrix, we can do this operation for all super-version-blocks with row- and column-operations. In doing so, we might create new permutation matrices, namely smaller ones, as we may not be able to allocate all columns or rows to equivalent attribute-columns or rows. In such case, we only copy the columns or row with the equivalent values. In this case, we save the newly created permutation matrix. This last step is currently conducted in a semi-automated manner, but the feature is scheduled for full automation.

After such an update process, we also need to clean up. In our case, we only clean up for vertical updates as we explicitly want to use different extracting schemata versions in parallel. We set the rule that we only want to map any version of

	$s_1.v_1$	$s_1.v_1$	$s_1.v_1$	$s_1.v_2$	$s_1.v_2$	$s_2.v_1$
	a_1	a_2	a_3	$a_4 \equiv a_1$	$a_5 \equiv a_3$	a_6
$be_1.v_2.c_3$	1	0	0	1	0	0
$be_1.v_2.c_4$	0	0	1	0	1	0
$be_2.v_1.c_5$	0	0	0	0	0	1
$be_3.v_1.c_6$	0	1	0	0	0	0
$be_3.v_1.c_7$	1	0	0	0	0	0

Figure 5: Creating the Dynamic Mapping Matrix ${}^i\mathfrak{PM}$ from iM and compacting it to ${}^{i+1}\mathfrak{UB}$: First, the matrix iM is partitioned into version-super-blocks that contain parameters for mapping the attributes of multiple versions of one schema (magenta/white) and one business entity version (lime/orange). Second, within these version-super-blocks, single rectangular block-matrices are identified (with triple line borders). These are sized down to square matrices by sub-matrix formation. This process results in two types of square matrices, namely permutation matrices (green/brown and blue/brown) and special 1x1 null-blocks (green/yellow and blue/yellow). The permutation matrices are saved to ${}^{i+1}\mathfrak{PM}$ for parallel computation and version updates. This is the dynamic mapping matrix. Finally, these square blocks are compacted by determining unique ones for a sequential updating process. The unique ones for the update process are colored green/brown. They form the set ${}^{i+1}\mathfrak{UB}$. For the detailed algorithms, see the algorithm 2 and 4.

an extracting schema to one business entity version. This rule means that we need to delete old CDM-version blocks of rows after a vertical update operation from the matrix.

Therefore, we define that an update event of a tree triggers a chain of update processes of the matrix. The longest chain relates to the addition of a new CDM-schema version $w+1$. This requires several steps: expand the matrix with null block-rows for $w+1$; if there are equivalent attributes, then replace the values of the null block-rows with the permutation matrix values of w or a sub-matrix permutation matrix; delete the old row-blocks of w ; if you have created new permutation matrices, inform the user.

5.1.2 The user must provide initial values

In order to conceptualize the matrix updates for the schema changes in more detail, we need to define which steps we can automate and which steps require user intervention.

There is one main case that requires an initialisation of the values, namely when a new extracting schema or a business entity with the first version of a version-super-block is added to the system. Currently, this is done via the upload of a CSV file. We cannot use the above mentioned copy-last-version-procedure for a first version.

5.1.3 Semi-automated workflow

There are several cases for semi-automated workflows. The main case has been described above: a field is deleted and a new version is added to an

existing schema without this field. Subsequently, columns are added and new values are automatically copied from the previous version, which result in new permutation matrices. We want the user to be able to inspect these new mapping blocks and to change them if necessary.

5.1.4 Automated updates

Finally, there are several cases where we can apply the automated update procedure without any user intervention. This is mostly the case when internal technical details are deleted or changed from the microservice system that are not mapped to the CDM and thus are fully covered by the previous permutation matrix pattern that maps mainly content data.

In sum, it can be said that the suggested method of re-using the values of the permutation matrices from the most recent version, is applicable to many update cases of the matrix and thus should form the core of the DMM system. It needs to be paralleled by an API for initial uploads and an User Interface for user validation.

5.2 Parallel computation with permutation matrices

The permutation matrices are not only important for the update process, but, above all, for parallel computing and time efficiency in the near real-time ETL pipeline. Permutation matrices are consisting of linear independent rows and columns. They, thus, can be deconstructed further to single

		s_1v_1	s_1v_1	s_1v_1	s_1v_2	s_1v_2	s_1v_2	s_1v_3
		a_1	a_2	a_3	$a_4 \equiv a_1$	a_5	$a_6 \equiv a_2$	$a_7 \equiv a_4$
$s_1.v_1$	c_1	1	0	0	1	0	0	1
$s_1.v_1$	c_2	0	0	1	0	0	1	0
$s_1.v_2$	$c_3 \equiv c_1$	1	0	0	1	0	0	1
$s_1.v_2$	$c_4 \equiv c_2$	0	0	1	0	0	1	0
s_2v_1	c_6	0	1	0	0	0	0	0
s_2v_1	c_7	1	0	0	0	0	0	0

Figure 6: Using ${}^i\mathfrak{PM}$ to create ${}^{i+1}\mathfrak{PM}$ and compacting it to ${}^{i+1}\mathfrak{UB}$: Given two events, namely (1) the addition of a new business entity version $s_1.v_2$ with attributes c_3 and c_4 and (2) the addition of a new extracting schema version $s_1.v_3$. For each event the automated update is triggered. The algorithm 3 works on square sub-matrix blocks of equivalent attributes. (Thus, the rows and columns do not need to be exactly next to each other.) For better visualization, we show the operations on the full matrix. For event (1), the DMM system creates the new row-block with rows c_3 and c_4 with null values (yellow) in the matrix. It then copies the values of the square sub-matrix permutation matrices of the row-block c_1 and c_2 to the row-block with rows c_3 and c_4 , which are equivalent to c_1 and c_2 . (green/brown and blue/brown square matrices). It then deletes the old business version block with rows c_1 and c_2 (red). For event (2), it creates a column block with a_7 with 0 values. It then copies those parts of the permutation matrices of the column block relating to the most recent version s_1v_2 to column-block relating to the new version s_1v_3 . It create a new 1x1 special null block (blue) and a new smaller unique permutation matrix for element $(i+1)m_{37}$. Finally, the compacting algorithm is run on the matrix for saving to ${}^{i+1}\mathfrak{UB}$. The resulting blue and green squares are shown in the matrix. PS: Currently, users are informed that a new unique permutation matrix (the single green 1 from event 2) was created and are asked to confirm. It is planned to use this feature in a fully automated way in the future.

mapping elements for parallel computation. Our hierarchical block-partitioning of the matrix, thus, extends down through the last single mapping element.

Each permutation matrix within one rectangular mapping block in one column of the mapping matrix defines a single mapping between two schematized message. We call such a single mapping from one schematized message with one permutation matrix to one outgoing message an independent block mapping path. The great advantage of defining these independent block mapping paths in the DMM system consists in the ability to use them for parallel computing.

The full DMM system, thus, enables three-fold parallel computation, namely on the single attribute level, the block level of the Kafka-messages and the system level, as multiple Kafka-message can be processed in parallel within one configuration state i of the system. This is optimal.

5.3 Compacting matrix blocks

The DMM system is derived from a baseline system with a very large sparse block-scoped matrix. There are various compacting strategies in place.

There are several steps of null-compacting. The first one relates to identifying and deleting most rectangular null sub-matrix blocks from the matrix after the initial partitioning. These are creating messages that only contain "null" objects. We delete these, because we do not need these messages. We are, thus, only interested in the permutation matrices and some special null blocks for compacting. This compacts the matrix by an estimated 95%.

Second, we can form a dense version of the permutation matrices by saving only those mapping elements that have the value 1. To denote such a structure, we add a D before the elements that are compacted, such as DPM and a D before the sets of these compacted elements, such as ${}^i\mathfrak{DPM}$.

In order to optimise the space efficiency further for storage in the DB, we compact the permutation matrices to unique ones using pattern generalisation. This compacting, however, only works, if we deal with the null-blocks in a more advanced way.

We define a null-block for the space-optimization as the **special square 1x1 null block** ${}^i_{ov}NB_{rw}$. It contains just one single element (or even 0 elements in dense form). These 1x1 square sub-

matrices of the rectangular block matrices are the single green 0s or a single red 0s in figure 5. They "stop" the permutation matrix duplication in a horizontal manner for the de-compacting algorithm. We save these null-blocks in a dense form. The **dense null-block** ${}^i_{ov}DNB_{rw}$ is a special case among the dense blocks, because it is empty. This is realised in our implementation with the help of a hierarchical structure, in which we save blocks with their indices as the top level object and the mapping elements as associated lower level elements. A block without mapping elements is a special null block.

We do not save another block, namely the **non-saved special null block**. This peculiar block only exists tucked away in the compacting algorithm of the ${}^i\mathcal{U}\mathcal{G}\mathcal{B}$. The set ${}^i\mathcal{U}\mathcal{G}\mathcal{B}$ is used to reconstruct a matrix based on an algorithm that replaces values in a null matrix in a sequential manner starting from the lowest version. Therefore, we can omit special null blocks from this set that start a sequence in the lowest version of a schema. These non-saved special null block enables us to compact a very large null matrix to null elements. This is an optimal compacting result.

Although the set ${}^i\mathcal{U}\mathcal{G}\mathcal{B}$ is more strongly compacted than ${}^i\mathcal{P}\mathcal{M}$ and provides very strong null compacting, the size of both sets ${}^i\mathcal{P}\mathcal{M}$ and ${}^i\mathcal{U}\mathcal{G}\mathcal{B}$ grows in the worst case in the same linear way in relation to the number of realised mappings. The space complexity for the execution of one single mapping to ${}^i_{m'}$ outgoing message with the DMM is thus $O(n)$.

Most compacting strategies for sparse matrices, and there are several other ones, thus need to be applied with the data content in mind to find an optimal solution that optimises the space efficiency for an average use case. In our case, as explained, we have found a very good solution.

5.4 Design alternatives

We have chosen the set ${}^i\mathcal{P}\mathcal{M}$ as the centre of the DMM system because it contains the permutation matrices, which enable parallel computation. Further, the set is easy to update to a next state, which is our second most important goal. It is also well compacted. However, there are contenders to ${}^i\mathcal{P}\mathcal{M}$ for the central role as "the dynamic mapping matrix" in the system, namely iM and ${}^i\mathcal{U}\mathcal{G}\mathcal{B}$. We have excluded iM because it is too large and cannot be used for parallel computation. ${}^i\mathcal{U}\mathcal{G}\mathcal{B}$ can

also be used. One can run the automated updates with regard to this set. This requires, however, a de-compacting and compacting for every update step. This is costly. The advantage of this set-up is that ${}^{i+1}\mathcal{U}\mathcal{G}\mathcal{B}$ is immediately available from the database. Furthermore, the compacting algorithm for this set helps to determine unique new permutation matrices about which we want to inform the user. We have thus chosen ${}^i\mathcal{P}\mathcal{M}$ as the centre of the system, but we use ${}^i\mathcal{U}\mathcal{G}\mathcal{B}$ in a secondary role.

5.5 Creating and updating the DMM

5.5.1 Transforming iM to ${}^i\mathcal{P}\mathcal{M}$ and ${}^i\mathcal{N}\mathcal{B}$

In order to design the optimized DMM system, we need to create the sets ${}^i\mathcal{P}\mathcal{M}$, ${}^i\mathcal{N}\mathcal{B}$, ${}^i\mathcal{U}\mathcal{G}\mathcal{B}$. There are different ways to initialize them and then to update them further. It is possible, for example, to use the User Interface or a CSV upload as mentioned above.

However, there is also a third way. We can namely define the transformations from iM to ${}^i\mathcal{P}\mathcal{M}$. The algorithm, uses the matrix blocks $\neq 0$ for deriving the permutation matrix sub-matrices. These are stored in the appropriate set. The algorithm 2 is shown below.

Algorithm 2 Partition and generalise iM to ${}^i\mathcal{P}\mathcal{M}$

```

1: procedure TRANSFORM( ${}^iM$ )
2:    ${}^i\mathcal{P}\mathcal{M} = \{\}$ 
3:   for  ${}^i_{ov}\mathcal{M}B_{rw} \in {}^iM$  do
4:     if  $maxn_{ov}^i\mathcal{M}B_{rw} \neq 0$  then
5:        $nxn_{ov}^i\mathcal{P}M_{rw} \leftarrow {}^i_{ov}\mathcal{M}B_{rw}$ 
6:     end if
7:      ${}^i\mathcal{P}\mathcal{M} \cup {}^i_{ov}\mathcal{P}M_{rw}$ 
8:   end for
9:   return  ${}^i\mathcal{P}\mathcal{M}$ 
10: end procedure

```

5.5.2 Updating ${}^i\mathcal{P}\mathcal{M}$ to create ${}^{i+1}\mathcal{P}\mathcal{M}$

The set ${}^i\mathcal{P}\mathcal{M}$ can be updated by a user in a simple manner by adding, updating or deleting a permutation matrix block. However, for the automated updates to ${}^{i+1}\mathcal{P}\mathcal{M}$ in response to changes in iR and iD , we need an updating algorithm.

The updating algorithm 3 works on the rows and columns of the association matrix ${}^{i+1}M$. We first need to understand the operations on the matrix, so that we can then then translate them into a specific transformations of ${}^i\mathcal{P}\mathcal{M}$:

For a block-wise column or row deletion in the

matrix that is triggered by a version deletion in a schema, we simply delete the blocks of columns or rows from ${}^i\mathfrak{PM}$ that associate these attributes to others. We derive ${}^{i+1}\mathfrak{PM}$. We then run the compacting algorithm which saves to ${}^{i+1}\mathcal{USB}$.

Given a column expansion of the matrix that is triggered by an addition of a new version $v+1$ to an extracting schema o , we create a new block of columns in the matrix with null values. We then copy those columns of the block-column of version v of schema o to the single columns of $v+1$ which are associating equivalent attributes. We derive ${}^{i+1}\mathfrak{PM}$. We then run the compacting algorithm which saves to ${}^{i+1}\mathcal{USB}$. We may have created a new unique permutation matrix. The algorithm for the row expansion works in the same manner as the one for the column expansion.

For the overall algorithm 3 to work on ${}^i\mathfrak{PM}$, we need to have different responses for different cases as discussed above. The algorithm 3 is automatically triggered when a schema changes. We have observed that this update algorithm only needs to run a few times a day. Each incoming data-event can thus be resolved very fast by accessing ${}^i\mathcal{CPM}_v^o$. We only need to recalculate ${}^i\mathfrak{PM}$, once there is an update to any of the schemata- trees of the network.

5.5.3 Compacting ${}^i\mathfrak{PM}$ to ${}^i\mathcal{USB}$ and decompacting ${}^i\mathcal{USB}$

For the implementation, ${}^i\mathfrak{PM}$ is kept in memory. We do not persist it in the database. For this purpose, we use the more strongly compacted set ${}^i\mathcal{USB}$, which we also use to alarm the user of a newly created unique permutation matrix. From this set, we can also recreate iM . From iM , we can then create ${}^i\mathfrak{PM}$ with the algorithm 2.

We thus need two further algorithms for managing ${}^i\mathcal{USB}$ in the system. Algorithm 4 transforms the set ${}^i\mathfrak{PM}$ to ${}^i\mathcal{USB}$. For this operation, it also needs the corresponding set of the null-blocks ${}^i\mathcal{NB}$, which is obtained as the diff-set between iM and ${}^i\mathfrak{PM}$. The reverse algorithm is algorithm 5.

As explained above, the compacting and decompacting algorithms use sequential pattern generalisation to reduce the permutation matrices and null blocks to unique ones.

5.6 The parallel mapping algorithm

Finally, we have all elements in place to present the algorithm that executes the mappings with

Algorithm 3 Update ${}^i\mathfrak{PM}$ to ${}^{i+1}\mathfrak{PM}$ in response to changes in iR and iD and compact to ${}^{i+1}\mathcal{USB}$

```

1: procedure AUTO-UPDATE( ${}^i\mathfrak{PM}$ , change
   type,  ${}^iD$ ,  ${}^iR$ ,  ${}^{i+1}D$ ,  ${}^{i+1}R$ )
2:   switch change-type of  ${}^iD$  or  ${}^iR$  do
3:     case deleted schema  $o$  with version  $v$ 
   from  ${}^iD$ 
4:       determine  ${}^i\mathcal{CPM}_v^o$  that relates to
   deleted  $o$  and  $v$  from  ${}^iD$ 
5:        ${}^{i+1}\mathfrak{PM} \leftarrow {}^i\mathfrak{PM}$  minus  ${}^i\mathcal{CPM}_v^o$ 
6:     case deleted CDM schema  $r$  with ver-
   sion  $w$  from  ${}^iR$ 
7:       determine  ${}^i\mathcal{RPM}_w^r$  that relates to
   deleted  $r$  and  $w$  from  ${}^iR$ 
8:        ${}^{i+1}\mathfrak{PM} \leftarrow {}^i\mathfrak{PM}$  minus  ${}^i\mathcal{RPM}_w^r$ 
9:     case added schema  $o$  with version  $v$  in
    ${}^{i+1}D$ 
10:      determine  ${}^{i+1}\mathcal{CPM}_v^o$  that relates
   to added  $o$  and  $v$  to  ${}^{i+1}D$ 
11:       ${}^{i+1}\mathcal{CPM}_v^o \leftarrow$  {create NBs in
    ${}^{i+1}\mathcal{CPM}_v^o$  that correspond in size to existing
   PMs in  ${}^i\mathcal{CPM}_v^o$ ; copy columns of PMs from
    ${}^i\mathcal{CPM}_{v-1}^o$  to NBs that associate equivalent at-
   tributes to corresponding columns in  $v$ . Delete
   0 rows and columns from these blocks if a new
   smaller PMs was created. }
12:       ${}^{i+1}\mathfrak{PM} \leftarrow {}^i\mathfrak{PM}$  plus  ${}^{i+1}\mathcal{CPM}_v^o$ 
13:     case added CDM schema  $r$  with ver-
   sion  $w$  in  ${}^{i+1}R$ 
14:      determine  ${}^{i+1}\mathcal{VPM}_w^r$  that relates
   to added  $r$  and  $w$  to  ${}^{i+1}R$ 
15:       ${}^{i+1}\mathcal{RPM}_w^r \leftarrow$  {create NBs in
    ${}^{i+1}\mathcal{RPM}_w^r$  that correspond in size to existing
   PMs in  ${}^i\mathcal{RPM}_w^r$ ; copy rows of PMs from
    ${}^i\mathcal{RPM}_{w-1}^r$  to NBs that associate equivalent
   attributes to corresponding rows in  $w$ . Delete
   0 rows and columns from these blocks if a new
   smaller PMs was created. }
16:       ${}^{i+1}\mathfrak{PM} \leftarrow {}^i\mathfrak{PM}$  plus  ${}^{i+1}\mathcal{RPM}_w^r$ 
   minus  ${}^i\mathcal{RPM}_{w-1}^r$ 
17:     end switch
18:    ${}^{i+1}\mathcal{USB} \leftarrow$  compacting algorithm on
    ${}^{i+1}\mathfrak{PM}$ 
19:   if  ${}^{i+1}\mathcal{USB}$  contains new permutation ma-
   trices, inform user
20:   return  ${}^{i+1}\mathfrak{PM}$ ,  ${}^{i+1}\mathcal{USB}$ 
21: end procedure

```

three intertwined processes of parallel computa- tion on a dense set of permutation matrices. It

Algorithm 4 Compacting ${}^i\mathfrak{PM}$ and ${}^i\mathfrak{NB}$ to ${}^i\mathfrak{UB}$

```

1: procedure COMPACT( ${}^i\mathfrak{PM}$ ,  ${}^i\mathfrak{NB}$ )
2:    ${}^i\mathfrak{UB} = \{\}$ 
3:   for  $\forall {}^i\mathcal{VM}B_{rw} \in {}^i\mathfrak{MB}$  do
4:     select  ${}^i\mathcal{VPM}_{rw} \in {}^i\mathfrak{PM}$  and
 ${}^i\mathcal{VNB}_{rw} \in {}^i\mathfrak{NB}$  with the indices o,v,w of
 ${}^i\mathcal{VM}B_{rw}$ 
5:      ${}^i\mathcal{VSB}_{rw} \leftarrow {}^i\mathcal{VNB}_{rw} \cup {}^i\mathcal{VPM}_{rw}$ 
6:      ${}^iVUSB_{rw} = \{\}$ 
7:     for  ${}^i_{ov}SB_{rw} \in {}^i\mathcal{VSB}_{rw}$  asc v do
8:       if  ${}^i_{ov}SB_{rw}$  type of PM then
9:         if the latest  ${}^i_{ov}SB'_{rw}$  that has
been added to  ${}^iVUSB_{rw}$  is not equivalent to
 ${}^i_{ov}SB_{rw}$  or  ${}^iVUSB_{rw} = \{\}$  then
10:            ${}^iVUSB_{rw} \cup {}^i_{ov}SB_{rw}$ 
11:         end if
12:       end if
13:       if  ${}^i_{ov}SB_{rw}$  type of NB then
14:         if the latest  ${}^i_{ov}SB'_{rw}$  that has
been added to  ${}^iVUSB_{rw}$  is type of PM and
 ${}^iVUSB_{rw} \neq \{\}$  then
15:            ${}^iVUSB_{rw} \cup {}^i_{ov}SB_{rw}$ 
16:         end if
17:       end if
18:     end for
19:      ${}^i\mathfrak{UB} \cup {}^iVUSB_{rw}$ 
20:   end for
21:   return  ${}^i\mathfrak{UB}$ 
22: end procedure

```

only sends out messages that contain at least one non-”null” object. Further, the messages only contain non-”null” objects in the payload. Our JSON-schema enables such compacting.

Since we can break down the permutation matrices into single atomic mapping operations for parallel computation and can execute parallel computation on the two higher levels of the block-system, too, we have achieved an optimal time efficient solution. As in any parallel architecture, the actual execution time is dependent on the system configuration and the available resources. Thus, we are measuring it later. The algorithm is shown as algorithm 6.

In order to speed up the processing of Kafka-messages from the parallel streams of messages in the streaming pipeline, we can use horizontal scaling of the app. This can be implemented by reading from different Kafka-partitions with different

Algorithm 5 Decomposing ${}^i\mathfrak{UB}$ to iM

```

1: procedure DECOMPACTING( ${}^i\mathfrak{UB}$ )
2:    $m = |{}^i\mathcal{C}|$ ,  $n = |{}^i\mathcal{A}|$ 
3:   initialise null matrix  $m \times n$   ${}^iM$ 
4:   initialise all blocks  ${}^i_{ov}VMB_{rw}$  and
 ${}^i_{ov}MB_{rw}$  in  ${}^iM$ 
5:   for  ${}^iVUSB_{rw} \in {}^i\mathfrak{UB}$  do
6:     for  ${}^i_{ov}SB_{rw} \in {}^iVUSB_{rw}$  for ascending v do
7:       if there is a next element in
 ${}^iVUSB_{rw}$  then
8:          $v2 \leftarrow$  version of next element
9:       else
10:         $v2 \leftarrow$  {get the version super-
block  ${}^i_{ov}VMB_{rw}$  from  ${}^iM$  with the same o,r,w
as  ${}^iVUSB_{rw}$  and choose  ${}^i_{ov}MB_{rw}$  with high-
est v within it; return v}
11:       end if
12:       a = 0
13:       while a + v  $\neq$  v2 do
14:          $m \times n$   ${}^i_{ov+a}MB_{rw} \leftarrow$ 
 $k \times k$   ${}^i_{ov}SB_{rw}$ 
15:         a = a+1
16:       end while
17:     end for
18:   end for
19:   return  ${}^iM$ 
20: end procedure

```

horizontally scaled apps. The DMM-system is horizontally scalable under the condition that we keep the configuration state stable. We need to make sure that all instances that we are spinning up have the same configuration state, otherwise they will be producing different messages as a result.

It is significant to note at this point that our configuration state does not change more than a few times a day and that we need parallel instances only at defined time-slots when we are not changing the configuration, namely for initial loads during which very large numbers of messages need to be processed.

It is further important to note that while all operations occur only once and at once for a single mapping process, the ETL pipeline does not overall realize an ’exactly once’ process. It is possible that FX emits the same data-load twice via different events. This can be identified by unique keys in the payload. Thus, for incoming data events that

have a valid mapping, the ETL pipeline with the DMM system ensures an 'at least once' approach. There is also an error-checking and update-process in place for technically non-valid mappings.

Algorithm 6 Parallel and dense mapping of ${}^iMIn_v^o$ to ${}^iMOut_w^r$ with ${}^i\mathcal{DPM}$

```

1: procedure MAP(Parallel stream of  ${}^iMIn_v^o$ )
2:   for  ${}^iMIn_v^o$  in parallel do
3:      ${}^iDCPM_v^o \leftarrow {}^iDCPM_v^o$  from  ${}^i\mathcal{DPM}$ 
       with the same o and v as in  ${}^iMIn_v^o$ 
4:     for  $\forall {}^i_{ov}DPM_{rw} \in {}^iDCPM_v^o$  in parallel do
5:        ${}^iMOut_w^r \leftarrow$  create message with
       empty payload.
6:       Get all attributes  $c_q$  that are
       mapped by  ${}^i_{ov}DPM_{rw}$  from the CDM-
       schema version tree  ${}^i_{r.be_r.v_w}$  and keep in
       memory for mapping function.
7:       for  $\forall {}^i_{m_{qp}}$  from  ${}^i_{ov}DPM_{rw}$  do in
       parallel
8:          ${}^i_{r.be_r.v_w.c_q.ncd_q} \leftarrow {}^i_{m_{qp}} * {}^i_{d.s_o.v_v.a_p.nad_p}$ 
9:         if  $ncd_q = 1$  then
10:          add  $\{ {}^i_{r.be_r.v_w.c_1} =$ 
            "labelCDM1",  ${}^i_{r.be_r.v_w.c_1.cd_1} =$ 
             ${}^i_{d.s_o.v_v.a_1.ad_1}, {}^i_{r.be_r.v_w.c_1.c_1.ncd_1} = 1 \}$ 
            to payload of message  ${}^iMOut_w^r$ 
11:          end if
12:        end for
13:        if payload of  ${}^iMOut_w^r$  not empty
        then
14:          send  ${}^iMOut_w^r$  to parallel
        stream
15:        end if
16:      end for
17:    end for
18: end procedure

```

6 Implementation

6.1 The changed CDM architecture

The aim of this paper is to present a new solution for the integration of a large microservice system into a streaming ETL pipeline. For such an implementation, the position of the CDM mapping system in the enterprise architecture has changed as compared to the established position in an Enterprise Service Bus (ESB). While the CDM mapping used to be placed between the single systems in the ESB, it is now merged into the microservice

system as an API that helps to decouple the system from the enterprise. This is a fundamental change in ETL microservice architectures as compared to previous ESB implementations of a CDM.

The consequence of this architectural decision in the case of EOS is that the CDM mapping has been implemented as a Java-based Spring-Boot microservice within the FX system. Thus, other known implementations for such ETL transformations, such as for example a MapReduce implementation with Hadoop, which are usually conducted in components after the APIs of a microservice system, were not chosen.

We have, thus, implemented the DMM-system into the microservice METL with the standard stack for microservices that we use at EOS, namely Java Spring-Boot, Postgres, Kafka, and React for the User Interface. In addition, we implemented Debezium and the Apicurio-Schema-Registry in the new ETL pipeline. The registry is accessible from all stages of FX to enable an early testing of new updates. (Schindler, 2021) It contains all the schemata that we use in FX and that map onto the business entities defined in the CDM.

6.2 Implementation of the algorithms

We took two noticeable decisions for implementing the outlined DMM solution in METL. First, we have shifted some more parts of the update process to ${}^i\mathcal{U}\mathcal{G}\mathcal{B}$. This has allowed us to downshift the update algorithm to a Postgres-View which is based on a SQL-implementation of the decomposing and update algorithms.

Second, in order to make the access to ${}^i\mathcal{DPM}$ effective for parallel computing, we use a cached function that reads in the columns ${}^iDCPM_v^o$ of ${}^i\mathcal{DPM}$ into an efficient hashmap which makes them accessible in $O(1)$. We are using Caffeine as the cache for the function. We evict the cache every time, a business entity, schema or mapping is updated or created and thus enforces an update of the system and the mapping matrix to a new state.

6.3 User Interface

Further, we have implemented an User Interface (UI) for enabling a user to confirm updates to a new permutation matrix. This procedure is currently dealt with via an error and update process of the mappings. The UI, further, enables a detailed inspection of all single mapping paths.

The main feature request of our data owners has

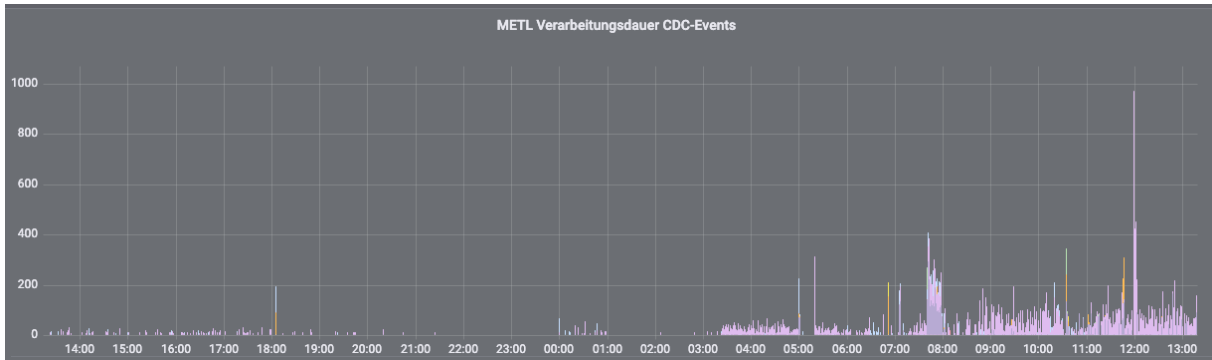


Figure 7: METL - Dashboard for system evaluation

been to implement a reverse search that allows them to see which $i_{n'}$ different Kafka messages with extracting schema versions are mapping to one Kafka message with one business entity version. For this search, we are using the row-set i_{DMM} .

Further, the data owners wanted to understand how the version progression is functioning in the system and thus, we have also implemented a search for the version sets $i_{DVP\mathcal{M}_v^o}$, which exhibits all mappings with relation to one schema and multiple versions.

The User Interface has proven to be a good basis to advance the more general evolution model for the versions, also of the business entities. Mappings can be elevated to new business entity versions in the User Interface in the same way as they are extended to new schemata versions. The system is thus currently incrementally upgraded to the overall process defined in this paper.

Furthermore, the UI provides a good way to more strongly enforce the basic rule of the system (as compared to CSV initialisation files), namely the 1:1 attribute mappings that result in permutation matrices, which form the basis of the parallel computing, update and compacting.

6.4 Parallel computing

The system realises a $i_{m':i_{n'}}$ mapping from Kafka-messages with extracting schemata to Kafka-messages with a CDM-schema. We have observed that many extracting schemata versions map to one business entity version. This is an intended behaviour, as we expect an integration to the CDM that reduces the number of extracting schemata to a more generalised form.

Since mappings from one incoming message to several outgoing ones are rare, we currently do not need the second parallel execution process that

splits up the mappings to the $i_{m'}$ outgoing messages. However, we have kept it as a reserve capacity to speed up METL further, should the need arise. As outlined above, the same holds true for the usage of horizontal scaling. We currently only need horizontal scaling for an initial load. Thus, also in this respect, we have reserve capacity.

7 Evaluation

Finally, we have developed several dashboards that allow for a full monitoring of the application that has gone live now. We record the number of transformations, the time they take and the storage requirements of the Caffeine cache. Thus, we are able to measure the effectiveness of our solution, which is in particular important with regard to optimising parallel computing once the load grows further.

METL currently takes on average 39 milliseconds to conduct a full one-to-one-mapping. These data were measured over one day, namely on 13 February 2022, based on 1168 change-data-capture-events from Debezium. The standard-deviation, however, is high with 51 milliseconds. The two most probable causes for this are: First, METL is hosted in Docker-containers on virtual servers. Thus, external operations can impact the performance of METL. Secondly, the DMM-update is triggered several times a day, which evicts all caches and thus impacts on the processing time of a single event after the eviction. Given the known impact of external factors stemming from the virtual servers, we can conclude that it is reasonable to assume that the standard processing time for a single mapping of one incoming message without cache-update sits very likely in the lower bracket of execution times, which can be measured at around 10-20 milliseconds per CDC-event.

8 Conclusion

In sum, it has been shown that our new DMM-approach presents an efficient solution to the overall problem of modernizing ETL pipelines with microservice-based CDMs and Kafka-streams. We were able to solve the most pressing problem of this implementation, namely the usage of a very large and changing mapping matrix.

Our solution includes an optimal execution algorithm for parallel processing which is maximally time efficient. This is achieved by using square-block partitioning into permutation matrices and parallel processing. The successful optimization of the mapping is also born out by the measured metrics. It has been shown that we even have additional reserve capacity to speed up METL further, should the need arise. A mapping of a single Kafka message to m Kafka messages requires a space complexity of $O(n)$ in the worst case. It can be brought down for the average case with a data-specific compacting algorithm. We have shown that our solution fulfills this requirement. Our algorithm can, for example, compact a null matrix to null saved blocks. We have made further gains on storage efficiency by using pattern based sequential compacting. In addition, we have developed a bespoke semi-automated update process that reduces the user-intervention to a minimum and is also based on pattern generalisation. This provides a strong basis for further automation.

In conclusion, we have presented a new optimized solution for implementing a CDM into a microservice system as part of a streaming ETL pipeline. This implementation of a microservice system with a dynamic network and a dynamic mapping matrix is a new contribution to the research fields of CDMs, enterprise architecture, microservices and dynamic networks. The significance of this innovation derives from the fact that modern ETL pipelines with microservices, that are at the centre of many data-driven enterprises, depend on such solutions.

9 Authors

Dr. Christian Haase, Senior Data Scientist, NLP, Otto Business Intelligence; Software Engineer, EOS (during the METL-Project); Associated Researcher NLP-Group, Department of Informatics, University of Hamburg

Timo Röseler, Senior Software-Architect,

EOS, Hamburg, Germany

Dr. Mattias Seidel, Senior Software-Architect, EOS, Hamburg, Germany

10 Acknowledgements

For the development of the CDM/ETL-pipeline, EOS assembled a team of system-architects, software engineers and data scientists. Many team-members, among them the authors of this paper, have experience in dealing with very large and fast changing data-sets and complex networks. The group had support from the director of software engineering at EOS-Technological Solutions, as well as from many other engineers, data scientists, requirement engineers, process managers and analysts at EOS and from members of external companies. The authors are indebted to all of them for fruitful discussions, contributions to the code and exchanges of ideas. The solution that we present in this paper would not have been possible without this wider innovative culture at EOS.

References

- Neepa Biswas, Anamitra Sarkar, and Kartick Chandra Mondal. 2020. Efficient incremental loading in ETL processing for real-time data integration. In *Innovations in Systems and Software Engineering*, volume 16, pages 53–61.
- Confluent. 2022. [Schema Evolution and Compatibility](#).
- Michael Dietrich and Jens Lemcke. 2011. [A Refined Canonical Data Model for Multi-schema Integration and Mapping](#). In *2011 IEEE 8th International Conference on e-Business Engineering*, pages 105–110. IEEE.
- Michael Dietrich, Jens Lemcke, and Gunther Stuhc. 2013a. [Iterative Effort Reduction in B2B Schema Integration via a Canonical Data Model](#). *International Journal of Strategic Information Technology and Applications*, 4(4):19–43.
- Michael Dietrich, Jens Lemcke, and Gunther Stuhc. 2013b. [Semantic Integration of E-Business Schemas via a Canonical Data Model: Assessing the Effort Reduction for B2B Message Exchange](#). In *2013 IEEE 10th International Conference on e-Business Engineering*, pages 106–111. IEEE.
- Forrester. 2010. [From The Field: The First Annual Canonical Model Management Forum](#).
- Christian Haase, Saba Anwar, Seid Yimam, Alexander Friedrich, and Chris Biemann. 2021. [SCoT: Sense](#)

- Clustering over Time – a tool for analysing lexical change. In aclanthology.org/2021.eacl.
- Jens Lemcke, Gunther Stuhec, and Michael Dietrich. 2012. Computing a canonical hierarchical schema. In *Enterprise Interoperability V - Proceedings of the I-ESA Conference*, volume 5, pages 305–315.
- S. McCarthy, A. McCarren, and M. Roantree. 2019. *An Automated ETL for Online Datasets*. In *23rd Enterprise Computing Conference (EDOC)*.
- Microsoft. 10.03.2022. *Common Data Model*.
- Gunnar Mohrling. 2022. *Advantages of log-based change-data-capture*.
- Bruno Oliveira, Óscar Oliveira, Vasco Santos, and Orlando Belo. 2019. *ETL Development using Patterns: A Service-Oriented Approach*. In *Proceedings of the 21st International Conference on Enterprise Information Systems*, pages 216–222. SCITEPRESS - Science and Technology Publications.
- M.J. Quinn. 2004. *Parallel Programming in C with MPI and OpenMP*. McGraw-Hill.
- Giulio Rosetti and Remy Cazabet. 2018. Community discovery in dynamic networks: A survey. *ACM Comput. Surv.*, 51(2):1–37.
- Manuel Schindler. 2021. *Managing the API life cycle in an event-driven architecture: A practical approach*.
- Alexander Suleykin and Peter Panfilov. 2020. *Metadata-Driven Industrial-Grade ETL System*. In *2020 IEEE International Conference on Big Data (Big Data)*, pages 2433–2442. IEEE.
- Luís Henrique Neves Villaça, Leonardo Guerreiro Azevedo, and Sean Wolfgang Matsui Siqueira. 2020. *Microservice Architecture for Multistore Database Using Canonical Data Model*. In *XVI Brazilian Symposium on Information Systems*, pages 1–8, New York, NY, USA. ACM.