## Rank-Metric Codes and Their Applications

Hannes Bartz German Aerospace Center (DLR) hannes.bartz@dlr.de

> Hedongliang Liu Technical University of Munich lia.liu@tum.de

Julian Renner
Technical University of Munich
julian.renner@tum.de

Lukas Holzbaur Technical University of Munich lukas.holzbaur@tum.de

Sven Puchinger Hensoldt Sensors GmbH mail@svenpuchinger.de

Antonia Wachter-Zeh Technical University of Munich antonia.wachter-zeh@tum.de

March 24, 2022

#### Abstract

The rank metric measures the distance between two matrices by the rank of their difference. Codes designed for the rank metric have attracted considerable attention in recent years, reinforced by network coding and further motivated by a variety of applications. In code-based cryptography, the hardness of the corresponding generic decoding problem can lead to systems with reduced public-key size. In distributed data storage, codes in the rank metric have been used repeatedly to construct codes with locality, and in coded caching, they have been employed for the placement of coded symbols. This survey gives a general introduction to rank-metric codes, explains their most important applications, and highlights their relevance to these areas of research.

## 1 Introduction

Codes composed of matrices are a natural generalization of codes composed of vectors. Codes in the rank metric of length  $n \leq m$  can be considered as a set of  $m \times n$  matrices over a finite field  $\mathbb{F}_q$  or equivalently as a set of vectors of length n over the extension field  $\mathbb{F}_{q^m}$ . The rank weight of each codeword vector is the rank of its matrix representation and the rank distance between two matrices is the rank of their difference. These definitions rely on the fact that the rank distance is indeed a metric. Several code constructions and basic properties of the rank metric show strong similarities to codes in the Hamming metric. However, there are also notable differences, e.g., in the list decoding properties.

Error-correcting codes in the rank metric were first considered by Delsarte (1978), who proved a Singleton-like upper bound on the cardinality of rank-metric codes and con-

structed a class of codes achieving this bound<sup>1</sup>. This class of codes was reintroduced by Gabidulin (1985) in his fundamental paper "Theory of Codes with Maximum Rank Distance". Further, in his paper several properties of codes in the rank metric and an efficient decoding algorithm based on an equivalent of the Euclidean algorithm were shown. Since Gabidulin's publication contributed significantly to the development of error-correcting codes in the rank metric, the most famous class of codes in the rank metric — the equivalents of Reed–Solomon codes — are nowadays called Gabidulin codes. These codes can be defined by evaluating non-commutative linearized polynomials, proposed by Ore (Ore, 1933a; Ore, 1933b). Independently of the previous work, Roth (1991) discovered in 1991 codes in the rank metric and applied them for correcting crisscross error patterns.

The goal of this survey is to provide an overview of the known properties of rankmetric codes and their application to problems in different areas of coding theory and cryptography.

Chapter 2 provides a brief introduction to rank-metric codes, their properties and their decoding. After providing basic notations for finite fields and linearized polynomials, we consider codes in the rank metric. We first define the rank metric and give basic properties and bounds on the cardinality of codes in the rank metric (namely, equivalents of the Singleton, sphere-packing, and the Gilbert-Varshamov bounds). Then, we define Gabidulin codes, show that they attain the Singleton-like upper bound on the cardinality and give their generator and parity-check matrices. We describe their decoding up to half the minimum rank-distance by syndrome-based decoding. A summary of how to accomplish this efficiently is given and the problem of error-erasure correction is considered. We also give an overview on list decoding of Gabidulin codes and consider interleaved and folded Gabidulin codes. Finally, further classes of rank-metric codes such as twisted Gabidulin codes are briefly discussed.

Rank-metric codes have several applications in communications and security, including public-key code-based cryptography. In 1978, Rivest, Shamir and Adleman (RSA) (Rivest et al., 1978) proposed the first public-key cryptosystem in order to guarantee secure communication in an asymmetric manner. Since then, public-key cryptography is essential to protect data via encryption, to enable secure key exchange for symmetric encryption, and to protect the authenticity and integrity of data via digital signature schemes. Only one year after the RSA cryptosystem was introduced, whose security relies on the hardness of the integer factorization problem, McEliece (1978) proposed the first public key cryptosystem based on error-correcting codes. In his pioneering work McEliece showed that hard problems in coding theory can be used to derive public-key cryptosystems. A crucial drawback of the McEliece cryptosystem compared to other public-key cryptosystems, such as RSA or elliptic curve cryptosystems (ECC), is its large public-key size. The recent develop-

<sup>&</sup>lt;sup>1</sup>In analogy to MDS codes, such codes are called Maximum Rank Distance (MRD) codes.

ments in quantum computing rendered all of the currently used public-key cryptosystems whose security relies on the integer factorization or the discrete logarithm problem insecure. In particular, Shor's algorithm (Shor, 1999) allows to solve both, the integer factorization problem and the discrete logarithm problem in polynomial time, which in turn allows to break the corresponding public-key cryptosystems completely, given a sufficiently large quantum computer. Since code-based public-key cryptosystems are resilient against all known attacks on quantum computers, including Shor's algorithm, they are considered to be quantum-resistant (or post-quantum secure) cryptosystems. Quantum-resistant cryptography is an important research area to ensure the long-term security of transmitted and stored data. Therefore, the National Institute of Standards and Technology (NIST) opened a standardization call, which meanwhile has reached its final round (NIST, 2017). In order to reduce the public-key size, many new McEliece variants based on several codes were proposed, both before and independent of the NIST competition and also as submissions to the NIST competition. This includes a long history of variants based on codes in the rank metric. The first McEliece variant in the rank metric was proposed by Gabidulin et al. (1991) and is therefore known as the GPT cryptosystem. Although no rank-metric based schemes are among the finalists, rank-metric based schemes are considered as potential candidates for future standards (Alagic et al., 2020).

Chapter 3 gives an overview of rank-metric code-based quantum-resistant encryption and authentication schemes. First, hard problems which can be used to design rank-metric code-based cryptosystems are considered. Then, a general framework to define most GPT variants is given, and the particular variants are described. Finally, an overview on non-GPT-like cryptosystems, including the NIST submission Rank Quasi Cyclic (RQC), and rank-metric code-based signature schemes is given.

Rank-metric codes find applications not only in the cryptographic protection of data, but also in ensuring its integrity. The increase in the amount of data that is stored by distributed storage systems has motivated a transition from replication of the data to the use of more involved storage codes, most commonly Maximum Distance Separable (MDS) codes. By storing one symbol of a codeword on each node, a node failure then corresponds to a symbol erasure and the Hamming distance of the storage code provides a guarantee on the number of failures the system can tolerate before data loss occurs. However, as the number of nodes in these systems grows, not only the number of tolerable node failures, but also the efficiency of the node repair process becomes a concern. Codes with locality (Huang et al., 2007; Chen et al., 2007; Gopalan et al., 2012) address this issue by reducing the number of nodes required for repair in the more likely event of a single or small number of node failures. While these codes are designed for the Hamming metric, codes for the rank metric, in particular, Gabidulin codes have repeatedly been used to construct these codes, especially for the stronger notion of maximally recoverable

(MR) locally repairable/recoverable codes (LRCs)<sup>2</sup>. Further, rank-metric codes have also been used in another area related to distributed storage, referred to as coded caching. Caching is a commonly used strategy to reduce the traffic rate during the peak hours. The communication procedure consists of two phases: placement and delivery. The seminal work by Maddah-Ali and Niesen (2014) has shown that applying coding merely in the delivery phase can reduce the traffic rate. As a further improved scheme (Yu et al., 2018) has been shown to be order-optimal under uncoded placement, schemes with coded placement (Chen et al., 2016; Gómez-Vilardebó, 2018) become of interest in order to further reduce the traffic rate during the delivery phase. Rank-metric codes have been utilized in the scheme with coded placement by Tian and Chen (2018), which has been shown to outperform the optimal scheme with uncoded placement (Yu et al., 2018) in the regime of small cache size.

In Chapter 4, the application of rank-metric codes to distributed data storage is outlined. First, we explore the connection between codes with locality and rank-metric codes by providing a high-level description of the property exploited by many constructions of (MR) LRCs. Second, we present the application of Maximum Rank Distance (MRD) codes in the coded caching scheme by Tian and Chen (2018).

Network coding has been attracting attention since the fundamental works by Ahlswede et al. (2000) and Li et al. (2003) showed that the capacity of multicast networks can be achieved by performing linear combinations of packets instead of just forwarding them. Rank-metric codes have been used in network coding solutions (Etzion and Wachter-Zeh, 2018) and error correction in coherent networks (Silva and Kschischang, 2009b). For random networks, rank-metric codes are used to correct errors by the lifting construction (Silva et al., 2008). In addition, the subspace metric (Kötter and Kschischang, 2008a) was introduced for error control, as this metric perfectly captures the type of errors that occur in (random) linear network coding. Due to the close relation between the rank metric and the subspace metric, rank-metric codes are a natural choice to construct subspace codes for error control in random network coding.

Chapter 5 introduces constructions of network codes based on MRD codes, constructions of subspace codes by lifting rank-metric codes, bounds on the cardinality, and the list decoding capability of subspace codes. We first present constructions based on MRD codes for a class of deterministic multicast networks, which guarantee that all the receivers decode all the messages. Two error models commonly considered in networks are described. We introduce subspace codes, with a focus on constructions based on lifting rank-metric codes and provide upper bounds on the size of subspace codes. Further, an analysis of list decoding subspace codes is provided.

Finally, Chapter 6 concludes this survey and shortly mentions further applications of rank-metric codes.

<sup>&</sup>lt;sup>2</sup>MR LRCs are also referred to as partial MDS (PMDS) codes.

### 2 Basics on Rank-Metric Codes

Codes in the rank metric have drawn increasing interest in recent years due to their application to cryptography, distributed storage and network coding. The survey by Gorla and Ravagnani (2018) mainly focuses on combinatorial properties of rank-metric codes, while the one by Sheekey (2019a) considers MRD codes and their properties. In particular, Gorla and Ravagnani (2018) and Gorla (2019) treat (amongst others): isometries, anticodes, duality, MacWilliams identities, generalized weights in the rank metric. We will therefore not considers these topics in this survey. An English version of the textbook by Gabidulin (2021) has been published recently which contains a collection of Gabidulin's results in the area of rank-metric codes. Our survey deals shortly with properties of rank-metric codes, but the main focus is on their decoding and their applications to code-based cryptography, storage, and network coding.

In this chapter, we give an introduction to rank-metric codes, their properties and decoding. In Section 2.1, we provide the basic notation used in this survey. Section 2.2 defines linearized polynomials and recalls some basic properties. In Section 2.3, we define the rank metric and state bounds on the cardinality of rank-metric codes, i.e., sphere-packing, Gilbert-Varshamov, and Singleton-like bounds. Section 2.4, 2.5 and 2.6 provide the weight distribution of rank metric codes, constant-rank codes and covering property of rank-metric codes, respectively. Section 2.7 defines Gabidulin codes, proves their minimum rank distance and gives generator and parity-check matrices. In Section 2.8, we describe syndrome-based decoding of Gabidulin codes, i.e., we prove the key equation, show how to solve it and how to reconstruct the final error. We also outline error-erasure decoding and summarize known fast decoders. In Section 2.9, we discuss results on list decoding of Gabidulin codes. Further, we introduce interleaved Gabidulin codes (Section 2.10), folded Gabidulin codes (Section 2.11) and summarize further classes of MRD codes (Section 2.13).

## 2.1 Notation

This section introduces notation that is used throughout the survey.

We denote a finite field of size q by  $\mathbb{F}_q$  and the set of all row vectors and matrices over this field by  $\mathbb{F}_q^n$  and  $\mathbb{F}_q^{m \times n}$ , respectively. The ring of integers is given by  $\mathbb{Z}$  and the non-negative integers by  $\mathbb{Z}_{\geq 0}$ . The set of integers  $\{i \mid a \leq i \leq b\}$  is denoted by [a,b] or by [b] if a=1. To simplify the notation, we denote  $\alpha^{q^i}=\alpha^{[i]}$ .

For a linear code of length n, dimension k over  $\mathbb{F}_{q^m}$ , and  $\mathbb{F}_q$ -rank distance d we write  $[n,k,d]_{q^m}^{\mathsf{R}}$  and for a non-linear code of cardinality M we write  $(n,M,d)_{q^m}^{\mathsf{R}}$ . Similarly, a code of Hamming distance d over  $\mathbb{F}_{q^m}$  is denoted  $[n,k,d]_{q^m}^{\mathsf{H}}$ . The rank and Hamming distance of a code  $\mathcal{C}$  are given by  $d_{\mathsf{R}}(\mathcal{C})$  and  $d_{\mathsf{H}}(\mathcal{C})$ , respectively.

The entries of a matrix  $\mathbf{A} \in \mathbb{F}_q^{m \times n}$  are given by  $A_{i,j}$  for  $i \in [1,m], j \in [1,n]$  and the

entries of a vector  $\mathbf{a} \in \mathbb{F}^n$  by  $a_i$  for  $i \in [1, n]$ . Denote by  $\langle \mathbf{A} \rangle_q$  the row-space of  $\mathbf{A}$ , i.e., the  $\mathbb{F}_q$ -linear vector space spanned by the rows of  $\mathbf{A}$ . Similarly,  $\langle \mathbf{A} \rangle_q^c$  denotes its column space. We define a mapping from  $\mathbb{F}_{q^m}^n$  to  $\mathbb{F}_q^{m \times n}$  by

$$\mathbf{a} = (a_1, \dots, a_n) \mapsto \mathbf{A} = \begin{pmatrix} A_{1,1} & \dots & A_{1,n} \\ \vdots & \ddots & \vdots \\ A_{m,1} & \dots & A_{m,n} \end{pmatrix},$$

where  $\boldsymbol{\beta} = (\beta_1, \beta_2, \dots, \beta_m)$  is a basis of  $\mathbb{F}_{q^m}$  over  $\mathbb{F}_q$  and

$$a_j = \sum_{i=1}^m A_{i,j} \beta_i, \quad \forall j \in [1, n].$$

The weight of a vector  $\mathbf{a} \in \mathbb{F}_{q^m}^n$  in the rank metric is its  $\mathbb{F}_q$ -rank, which is defined as  $\mathrm{rk}_q(\mathbf{a}) = \mathrm{rk}(\mathrm{ext}_\beta(\mathbf{a}))$ .

The trace operator is given by

$$\operatorname{Tr}_{q^m/q}: \mathbb{F}_{q^m}^n \to \mathbb{F}_q^n$$

$$\mathbf{a} = (a_1, \dots, a_n) \mapsto \left(\sum_{i=0}^{m-1} a_1^{[i]}, \dots, \sum_{i=0}^{m-1} a_n^{[i]}\right).$$

The Gaussian binomial coefficient, i.e., the number of r-dimensional subspaces of the vector space  $\mathbb{F}_q^s$ , is given by

$$\begin{bmatrix} s \\ r \end{bmatrix}_q := \begin{cases} \frac{(1-q^s)(1-q^{s-1})\dots(1-q^{s-r+1})}{(1-q)(1-q^2)\dots(1-q^r)} & \text{for } r \le s \\ 0 & \text{for } r > s, \end{cases}$$

where s and r are non-negative integers. The collection of these subspaces of dimension N of the ambient space is denoted  $\mathbb{P}_q(N)$  and  $\mathbb{G}_q(N,i)$  denotes the set of subspaces of dimension i in  $\mathbb{P}_q(N)$ . Hence,  $\mathbb{P}_q(N) = \bigcup_{i=1}^N \mathbb{G}_q(N,i)$ .

# 2.2 Linearized Polynomials

Linearized polynomials constitute a *non-commutative* ring and will later provide the definition of *Gabidulin codes*. Apart from their application to coding theory, linearized polynomials are used, e.g., in root-finding of *usual* polynomials and as permutation polynomials in cryptography.

They are also called q-polynomials and were introduced in 1933 by Ore (1933a) as a special case of *skew polynomials* (Ore, 1933b). The theory of skew polynomials is quite rich and widely investigated (Jacobson, 1943; Giesbrecht, 1998; Jacobson, 2010). It is possible to

construct error-correcting codes based on skew polynomials (Boucher *et al.*, 2007; Boucher and Ulmer, 2009b; Boucher and Ulmer, 2009a; Chaussade *et al.*, 2009; Boucher and Ulmer, 2012).

Linearized polynomials are defined as follows.

**Definition 2.2.1** (Linearized Polynomial). A polynomial a(x) is a linearized polynomial if it has the form

$$a(x) = \sum_{i=0}^{d_a} a_i x^{[i]}, \quad a_i \in \mathbb{F}_{q^m} \ \forall i \in [0, d_a].$$

The non-commutative univariate linearized polynomial ring with indeterminate x, consisting of all such polynomials over  $\mathbb{F}_{q^m}$ , is denoted by  $\mathbb{L}_{q^m}[x]$ .

The q-degree of a(x) is defined to be the largest  $i \in [0, d_a]$  such that  $a_i \neq 0$ .

**Remark 2.2.1.** Linearized polynomials are a special case of skew polynomials<sup>1</sup>, which were also introduced by Ore (1933b). Since a lot of literature on rank-metric codes defines rank-metric codes as evaluation codes of the more general class of skew polynomials, we briefly outline the connection here.

Let  $\mathbb{F}_{q^m}$  be a field extension of  $\mathbb{F}_q$ . The Galois group of the field extension is denoted by  $\operatorname{Gal}(\mathbb{F}_{q^m}/\mathbb{F}_q)$ , and consists of all automorphisms  $\sigma$  of  $\mathbb{F}_{q^m}$  that fix the small field  $\mathbb{F}_q$ , i.e.,  $\sigma(a) = a$  for all  $a \in \mathbb{F}_q$ . For finite fields, the Galois group consists of all powers of the Frobenius automorphism  $\phi_q : \mathbb{F}_{q^m} \to \mathbb{F}_{q^m}$ ,  $a \mapsto a^q$ , i.e.,

$$\operatorname{Gal}(\mathbb{F}_{q^m}/\mathbb{F}_q) = \left\{ \phi_q^i \, : \, 0 \le i < m \right\}.$$

The skew polynomial ring w.r.t.  $\mathbb{F}_{q^m}$  and  $\sigma \in \operatorname{Gal}(\mathbb{F}_{q^m}/\mathbb{F}_q)$  is the set of polynomials of the form

$$a = \sum_{i=0}^{d_a} a_i x^i,$$

where  $a_i \in \mathbb{F}_{q^m}$  and  $d_a \in \mathbb{Z}_{\geq 0}$ . Addition is defined as usual, i.e., component-wise, but multiplication is defined using the multiplication rule  $x \cdot a := \sigma(a)x$  for all  $a \in \mathbb{F}_{q^m}$ , and extended to arbitrary degree polynomials by associativity and distributivity. Hence, the closed-form expression for the multiplication of two polynomials  $a, b \in \mathbb{F}_{q^m}[x; \sigma]$  is

$$a \cdot b = \sum_{i} \left( \sum_{j=0}^{i} a_j \sigma^j(b_{i-j}) \right) x^i. \tag{2.1}$$

<sup>&</sup>lt;sup>1</sup>Skew polynomials become linearized polynomials when the derivation is zero and the Frobenius automorphism is used, i.e., when we consider only  $\mathbb{F}_q$ -linear maps.

This multiplication rule is in general non-commutative. The degree of a skew polynomial is defined by deg  $a := \max\{i : a_i \neq 0\}$  for  $a \neq 0$ , and deg  $a := -\infty$  for a = 0. The operator evaluation of a skew polynomial a is the map

$$a(\cdot) : \mathbb{F}_{q^m} \to \mathbb{F}_{q^m},$$
  
$$\alpha \mapsto \sum_i a_i \sigma^i(\alpha).$$

Note that there are several ways to define evaluation of skew polynomials, see, e.g., (Boucher and Ulmer, 2012). Other types of evaluations, such as the remainder evaluation, also have applications in coding theory.

The ring of linearized polynomials is isomorphic to the ring of skew polynomials with Frobenius automorphism  $\sigma = \phi_q$  through the obvious isomorphism

$$\varphi : \mathbb{L}_{q^m}[x] \to \mathbb{F}_{q^m}[x;\sigma],$$
$$\sum_{i=0}^{d_a} a_i x^{q^i} \mapsto \sum_{i=0}^{d_a} a_i x^i.$$

This can be easily seen by replacing  $\sigma$  by the Frobenius automorphism in the multiplication rule formula. Furthermore, the degree of a skew polynomial equals the q-degree of its corresponding linearized polynomial, and the operator evaluation of a skew polynomial equals the ordinary evaluation of its corresponding linearized polynomial.  $\diamond$ 

Recall that for any  $B \in \mathbb{F}_q$ ,  $B^{[i]} = B$  holds for any integer i. This provides the following lemma about evaluating linearized polynomials.

**Lemma 2.2.1** (Evaluation of a Linearized Polynomial (Berlekamp, 1984, Theorem 11.12)). Let  $\mathcal{B} = \{\beta_0, \beta_1, \dots, \beta_{m-1}\}$  be a basis of  $\mathbb{F}_{q^m}$  over  $\mathbb{F}_q$ , let a(x) be a linearized polynomial as in Definition 2.2.1 and let  $b \in \mathbb{F}_{q^m}$ . Denote  $\operatorname{ext}_{\beta}(b) = (B_0 \ B_1 \ \dots \ B_{m-1})^{\top} \in \mathbb{F}_q^{m \times 1}$ . Then,

$$a(b) = \sum_{i=0}^{m-1} B_i a(\beta_i).$$

Lemma 2.2.1 establishes the origin of the name *linearized* polynomials: for all  $A_1, A_2 \in \mathbb{F}_q$ , all  $b_1, b_2 \in \mathbb{F}_{q^m}$ , and  $a(x) \in \mathbb{L}_{q^m}[x]$  it holds that

$$a(A_1b_1 + A_2b_2) = A_1a(b_1) + A_2a(b_2).$$

Hence, any  $\mathbb{F}_q$ -linear combination of roots of a linearized polynomial a(x) is also a root of a(x).

**Theorem 2.2.2** (Roots of a Linearized Polynomial (Berlekamp, 1984, Theorem 11.31)). Let  $a(x) \in \mathbb{L}_{q^m}[x]$  be a linearized polynomial and let the extension field  $\mathbb{F}_{q^s}$  of  $\mathbb{F}_{q^m}$  contain all roots of a(x). Then, its roots form a linear space over  $\mathbb{F}_q$  and each root has the same multiplicity, which is a power of q.

The roots of a(x) form a linear space of dimension  $d_r \leq d_a$ . Let  $\{\beta_0, \beta_1, \ldots, \beta_{d_r-1}\}$  be a basis of this  $d_r$ -dimensional root space. Then, each distinct root  $r \in \mathbb{F}_{q^s}$  of a(x) can be expressed uniquely as  $r = \sum_{i=0}^{d_r-1} R_i \beta_i$ , where  $R_i \in \mathbb{F}_q \forall i$ . Conversely, the following lemma shows that the unique minimal subspace polynomial is always a linearized polynomial.

**Lemma 2.2.3** (Minimal Subspace Polynomial (Lidl and Niederreiter, 1996, Theorem 3.52)). Let  $\mathcal{U}$  be a linear subspace of  $\mathbb{F}_q^m$ , considered over  $\mathbb{F}_{q^m}$ . Let  $u_0, u_1, \ldots, u_{\dim(\mathcal{U})-1} \in \mathbb{F}_{q^m}$  be a basis of this subspace. Then, the minimal subspace polynomial

$$M_{u_0,u_1,...,u_{\dim(\mathcal{U})-1}}(x) := \prod_{\mathbf{u} \in \mathcal{U}} (x - \operatorname{ext}_{\beta}^{-1}(\mathbf{u})),$$

is a linearized polynomial over  $\mathbb{F}_{q^m}$  of q-degree dim( $\mathcal{U}$ ).

The q-Vandermonde matrix was introduced by Moore (1896) and plays an important role in linearized interpolation, evaluation and the q-transform. For a vector  $\mathbf{a} = (a_0 \ a_1 \ \dots \ a_{n-1}) \in \mathbb{F}_{q^m}^n$ , we obtain the  $s \times n$  q-Vandermonde matrix by the following map:

$$\operatorname{qvan}_s: \quad \mathbb{F}_{q^m}^n \to \mathbb{F}_{q^m}^{s \times n}$$

$$\mathbf{a} = (a_0 \ a_1 \ \dots \ a_{n-1}) \mapsto \mathcal{M}_{s,q} \left( \mathbf{a} \right) := \begin{pmatrix} a_1 & a_2 & \dots & a_n \\ a_1^q & a_2^q & \dots & a_n^q \\ \vdots & \vdots & \ddots & \vdots \\ a_1^{q^{s-1}} & a_2^{q^{s-1}} & \dots & a_n^{q^{s-1}} \end{pmatrix}. \tag{2.2}$$

**Lemma 2.2.4** (Determinant of Moore Matrix (Lidl and Niederreiter, 1996, Lemma 3.15)). Let  $\mathbf{a} = (a_0 \ a_1 \ \dots \ a_{n-1}) \in \mathbb{F}_{q^m}^n$ . The determinant of the square  $n \times n$  Moore matrix, defined as in (2.2), is

$$\det\left(\mathcal{M}_{s,q}\left(\mathbf{a}\right)\right) = a_0 \prod_{j=0}^{n-2} \prod_{B_0,\dots,B_j \in \mathbb{F}_q} \left(a_{j+1} - \sum_{h=0}^{j} B_h a_h\right).$$

Hence,  $\det (\mathcal{M}_{s,q}(\mathbf{a})) \neq 0$  if and only if  $a_0, a_1, \dots, a_{n-1}$  are linearly independent over  $\mathbb{F}_q$ . If  $a_0, a_1, \dots, a_{n-1}$  are linearly independent over  $\mathbb{F}_q$ , then  $\mathcal{M}_{s,q}(\mathbf{a})$  has rank  $\min\{s, n\}$ .

### 2.3 Rank-Metric Codes

The rank distance between  $\mathbf{a}$  and  $\mathbf{b}$  is the rank of the difference of the two matrix representations, i.e.,

$$d_{\mathsf{R}}(\mathbf{a}, \mathbf{b}) \coloneqq \mathrm{rk}_q(\mathbf{a} - \mathbf{b}) = \mathrm{rk}_q(\mathbf{A} - \mathbf{B}).$$

The minimum distance of a rank-metric code  $C(n, M)_{q^m}^{\mathsf{R}}$  over  $\mathbb{F}_{q^m}$  of length n and cardinality M is defined as

$$d_{\mathsf{R}}(\mathcal{C}) \coloneqq \min_{\substack{\mathbf{a}, \mathbf{b} \in \mathcal{C} \\ \mathbf{a} \neq \mathbf{b}}} d_{\mathsf{R}}(\mathbf{a}, \mathbf{b}).$$

A linear rank-metric code C over  $\mathbb{F}_{q^m}$ , denoted by  $[n, k, d]_{q^m}^{\mathsf{R}}$ , is a linear subspace of  $\mathbb{F}_{q^m}^n$  of dimension k and minimum rank distance

$$d_{\mathsf{R}}(\mathcal{C}) = \min_{\substack{\mathbf{a}, \mathbf{b} \in \mathcal{C} \\ \mathbf{a} \neq \mathbf{b}}} d_{\mathsf{R}}(\mathbf{a}, \mathbf{b}) = \min_{\substack{\mathbf{a} \in \mathcal{C} \\ \mathbf{a} \neq \mathbf{0}}} \mathrm{rk}_{q}(\mathbf{a}),$$

where the second equality holds because in a linear code any codeword can be represented as a linear combination of other codewords, thus,  $d_{\mathsf{R}}(\mathbf{a}, \mathbf{b}) = d_{\mathsf{R}}(\mathbf{a} - \mathbf{b}, \mathbf{0})$ .

A sphere in the rank metric of radius  $\tau$  around a word  $\mathbf{a} \in \mathbb{F}_{q^m}^n$  is the set of all words in rank distance exactly  $\tau$  from  $\mathbf{a}$  and a ball is the set of all words in rank distance at most  $\tau$  from  $\mathbf{a}$ . Such a sphere will be denoted by  $\mathcal{S}_{\mathsf{R}}^{(\tau)}(\mathbf{a}) = \mathcal{S}_{\mathsf{R}}^{(\tau)}(\mathbf{A})$  and such a ball by  $\mathcal{B}_{\mathsf{R}}^{(\tau)}(\mathbf{a}) = \mathcal{B}_{\mathsf{R}}^{(\tau)}(\mathbf{A})$ . The cardinality of  $\mathcal{B}_{\mathsf{R}}^{(\tau)}(\mathbf{a})$  can obviously be obtained by summing up the cardinalities of the spheres around  $\mathbf{a}$  of radius from zero up to  $\tau$ . The number of matrices of a certain rank is given, e.g., in (Migler et al., 2004). Therefore, we have

$$\begin{aligned} |\mathcal{S}_{\mathsf{R}}^{(\tau)}(\mathbf{a})| &= \begin{bmatrix} m \\ \tau \end{bmatrix}_q \prod_{j=0}^{\tau-1} (q^n - q^j), \\ |\mathcal{B}_{\mathsf{R}}^{(\tau)}(\mathbf{a})| &= \sum_{i=0}^{\tau} |\mathcal{S}_{\mathsf{R}}^{(i)}(\mathbf{a})| = \sum_{i=0}^{\tau} \begin{bmatrix} m \\ i \end{bmatrix}_q \prod_{j=0}^{i-1} (q^n - q^j). \end{aligned}$$

Note that the cardinalities  $|\mathcal{B}_{\mathsf{R}}^{(\tau)}(\mathbf{a})|$  and  $|\mathcal{S}_{\mathsf{R}}^{(\tau)}(\mathbf{a})|$  are independent of the choice of their center. The following lemma gives upper and lower bounds on the cardinality of balls with rank radius  $\tau$ .

**Lemma 2.3.1** (Bounds on Ball Size (Gadouleau and Yan, 2008a, Lemma 5)). For  $0 \le \tau \le \min\{n, m\}$ ,

$$q^{\tau(m+n-\tau)} \leq |\mathcal{B}_{\mathsf{R}}^{(\tau)}(\mathbf{a})| < K_q^{-1} \cdot q^{\tau(m+n-\tau)},$$

where  $K_q := \prod_{j=1}^{\infty} (1 - q^{-j})$ .

The asymptotic behavior of  $|\mathcal{B}_{\mathsf{R}}^{(\tau)}(\mathbf{a})|$  as  $n \to \infty$ , while  $\lim_{n \to \infty} \frac{n}{m}$  is a constant, can be found in (Gadouleau and Yan, 2008a, Lemma 11).

The cardinality of the intersection of two balls rank of given rank radius can be found in (Gadouleau and Yan, 2008a, Proposition 4, 5), while the size of the union of any K balls can be found in (Gadouleau and Yan, 2009, Lemma 2).

The following theorem states analogs of the sphere-packing (Hamming) and Gilbert–Varshamov bound in the rank metric, which can be proven similar to the Hamming metric (Gadouleau and Yan, 2006; Loidreau, 2008; Gadouleau and Yan, 2008a; Loidreau, 2012).

**Theorem 2.3.2** (Sphere Packing and Gilbert–Varshamov Bound in the Rank Metric (Gadouleau and Yan, 2006)). Let  $\mathcal{A}_{q^m}^{\mathsf{R}}(n,d)$  denote the maximum cardinality of a block code over  $\mathbb{F}_{q^m}$ 

of length n and minimum rank distance d and let  $\tau_0 = \left| \frac{d-1}{2} \right|$ . Then,

$$\frac{q^{mn}}{|\mathcal{B}_{\mathsf{R}}^{(d-1)}(\mathbf{0})|} \le \mathcal{A}_{q^m}^{\mathsf{R}}(n,d) \le \frac{q^{mn}}{|\mathcal{B}_{\mathsf{R}}^{(\tau_0)}(\mathbf{0})|}.$$
(2.3)

The LHS of (2.3) is the Gilbert-Varshamov bound in the rank metric and the RHS of (2.3) is the sphere packing bound in the rank metric.

A code is called *perfect* in the rank metric if it fulfills the RHS of (2.3) with equality. For a perfect code, the balls of radius  $\tau_0 = \left\lfloor \frac{d-1}{2} \right\rfloor$  around all codewords cover the whole space. However, in contrast to the Hamming metric, perfect codes do not exist in the rank metric (Loidreau, 2008, Proposition 2).

The Singleton bound in the rank metric is given in the following theorem.

**Theorem 2.3.3** (Singleton Bound in the Rank Metric (Delsarte, 1978, Theorem 5.4)). Let  $\mathcal{C}$  be a code over  $\mathbb{F}_{q^m}$  of length n, cardinality M, and minimum rank distance d. The cardinality M of  $\mathcal{C}$  is restricted by

$$M \le q^{\min\{n(m-d+1), \ m(n-d+1)\}} = q^{\max\{n,m\}(\min\{n,m\}-d+1)}. \tag{2.4}$$

If the cardinality of a code fulfills (2.4) with equality, the code is called maximum rank distance (MRD) code. An MRD (not necessarily linear) code over  $\mathbb{F}_{q^m}$  of length n, cardinality  $M = q^{\max\{n,m\}(\min\{n,m\}-d+1)}$ , and minimum rank distance d is denoted by  $\mathcal{MRD}(n, M)$ .

For linear codes of length  $n \leq m$  and dimension k, Theorem 2.3.3 implies that  $d \leq n - k + 1$ , cf. (Gabidulin, 1985, Corollary, p. 2). A linear MRD code over  $\mathbb{F}_{q^m}$  of length  $n \leq m$ , dimension k, and minimum rank distance d = n - k + 1 is therefore denoted by  $\mathcal{MRD}[n,k]$  and has cardinality  $M = q^{mk}$ . If n > m, we simply transpose all matrices and apply the previous considerations.

# 2.4 Weight Distribution of MRD Codes

In (Delsarte, 1978, Theorem 5.6) and (Gabidulin, 1985, Section 3), the weight distribution of linear MRD codes was derived. Let  $A_s(n,d)$  denote the number of codewords of an  $\mathcal{MRD}[n,k]$  code of rank s. This number can be calculated by separating the code into subspaces of dimension s and determining the number of words of the code in this subspace. By this, we obtain the recursive equation:

$$A_s(n,d) = \begin{bmatrix} n \\ s \end{bmatrix} A_s(s,d), \quad d \le s \le n,$$

where  $A_s(s,d)$  denotes the number of codewords in each s-dimensional subspace.

The rank weight distribution of  $\mathcal{MRD}[n,k]$  codes can be given by (Gabidulin, 1985)

$$A_{d+s} = \begin{bmatrix} n \\ d+s \end{bmatrix} \sum_{j=0}^{s} (-1)^{j+s} \underbrace{\begin{bmatrix} d+s \\ d+j \end{bmatrix}}_{=:B_j} q^{(s-j)(s-j-1)/2} (q^{m(j+1)}-1),$$

for s = 0, 1, ..., n - d and  $n \le m$ .

Note that for the special case of s=0 (i.e., the number of codewords of weight exactly d), we obtain:

$$A_d(n,d) = \begin{bmatrix} n \\ d \end{bmatrix} (q^m - 1).$$

In the following, we provide upper and lower bounds as well as an approximation of the MRD weight distribution, which might be helpful to quickly estimate the number of rank-s codewords. The relation between  $B_i$  and  $B_{i+1}$  can be estimated as

$$\frac{B_j}{B_{j+1}} = \frac{\begin{bmatrix} d+s \\ d+j \end{bmatrix} q^{(s-j)(s-j-1)/2} (q^{m(j+1)} - 1)}{\begin{bmatrix} d+s \\ d+j+1 \end{bmatrix} q^{(s-j-1)(s-j-2)/2} (q^{m(j+2)} - 1)}$$

$$\approx \frac{\begin{bmatrix} d+s \\ d+j \end{bmatrix} q^{(s-j-1)}}{\begin{bmatrix} d+s \\ d+j+1 \end{bmatrix} q^m}$$

$$\approx q^{(d+j)(s-j)-(d+j+1)(s-j-1)} \cdot q^{s-j-1-m}$$

$$= q^{(d+j)-(s-j)+1} \cdot q^{s-j-1-m} = q^{d+j-m}.$$

For an upper bound on  $A_{d+s}$ , we only consider the highest term, i.e., j = s, and obtain

$$A_{d+s} \le \begin{bmatrix} n \\ d+s \end{bmatrix} \begin{bmatrix} d+s \\ d+s \end{bmatrix} q^0 (q^{m(s+1)} - 1) \le \begin{bmatrix} n \\ d+s \end{bmatrix} q^{m(s+1)}.$$

To obtain a lower bound, we consider the difference between the two highest terms:

$$A_{d+s} \ge {n \brack d+s} \left( (q^{m(s+1)} - 1) - {d+s \brack d+s-1} q^0 (q^{ms} - 1) \right)$$

$$= {n \brack d+s} \left( (q^{m(s+1)} - 1) - (q^{d+s} - 1) (q^{ms} - 1) \right)$$

$$\approx {n \brack d+s} \left( q^{m(s+1)} - q^{d+s} q^{ms} \right) = {n \brack d+s} q^{m(s+1)} \left( 1 - q^{d+s-m} \right).$$

The following expression provides a rough estimate of the weight distribution:

$$A_{d+s} \approx \begin{bmatrix} n \\ d+s \end{bmatrix} q^{m(s+1)} \approx q^m q^{nd-d^2-2ds-s^2}.$$

## 2.5 Constant-Rank Codes

A concept closely related to the rank weight distribution of a code are constant-rank codes. Commonly, codes are designed to guarantee a lower bound on the minimum rank-distance of any two codewords. For linear codes, this implies a lower bound on the rank of each codeword, i.e., every codeword in a linear rank-metric code of minimum rank-distance d has rank at least d. In most cases, an  $[n, k, d]_{q^m}^R$  rank-metric code designed to have minimum distance d will contain words of any rank w with  $d \le w \le n$ . In contrast, constant-rank codes only contain words of a given rank. Their equivalent in the Hamming metric, so-called constant-weight codes, play an important role in list decoding (Johnson, 1962; Bassalygo, 1965) and a variety of other applications (see, e.g., (Agrell et al., 2000) and the references within).

Constant-rank codes were first considered by Gadouleau and Yan (2010), where they are used to solve problems related to constant-dimension codes (a class of subspace codes), which have application in noncoherent network coding (see Section 5.5.4). Similar to the Hamming metric, they also have implications for list-decoding of rank-metric codes, as discussed in Section 2.9.

**Definition 2.5.1** (Constant-Rank Code (Gadouleau and Yan, 2010)). A  $(n, M, d)_{q^m}^R$  code  $\mathcal{C} \subset \mathbb{F}_{q^m}^n$  is said to be of *constant-rank* w if

$$\operatorname{rk}_q(\mathbf{c}) = w, \ \forall \ \mathbf{c} \in \mathcal{C}.$$

Note that any non-trivial (w > 0) constant-rank code is necessarily non-linear, as it does not contain the all-zero codeword.

In (Gadouleau and Yan, 2010) it was shown that a constant-rank code of a certain cardinality can be constructed from a pair of constant-dimension subspace codes (for more details on subspace codes, see Section 5.4) of the same cardinality. This result was later generalized to arbitrary cardinalities by Wachter-Zeh (2013, Proposition 2).

**Lemma 2.5.1** ((Gadouleau and Yan, 2010, Prop. 3),(Wachter-Zeh, 2013, Prop. 2)). Let  $C_1$  and  $C_2$  be  $(n_1, M_1)$  and  $(n_2, M_2)$  constant-dimension r codes of subspace distance  $d_{S,1}$  and  $d_{S,2}$ , respectively, where  $r \leq \min\{n_1, n_2\}$ . Then, there exists an  $(n, M, d_R)_{q^m}^R$  constant-rank r code of cardinality  $M = \min\{M_1, M_2\}$ . Furthermore, the minimum rank distance  $d_R$  is

$$d_{\mathsf{R}} \ge \frac{1}{2} d_{\mathsf{S},1} + \frac{1}{2} d_{\mathsf{S},2} \;,$$

and, if  $M_1 = M_2$ , then

$$d_{\mathsf{R}} \le \frac{1}{2} \min\{d_{\mathsf{S},1}, d_{\mathsf{S},2}\} + r$$
.

Similarly, optimal constant-dimension codes can be constructed from optimal constant-rank codes (Gadouleau and Yan, 2010, Theorem 2).

Further, Gadouleau and Yan (2010) presents rank-metric analogs of several bounds on the cardinality of codes in the Hamming metric. Specifically, bounds resembling the Johnson bound, the Singleton bound, and the Bassalygo-Elias are introduced.

In (Wachter-Zeh, 2013) a close inspection of the achievable size of constant-rank codes results in upper and lower bounds on their cardinality. Interestingly, these results show that, unlike for codes in the Hamming metric, there does not exist a generic list decoding radius beyond the unique decoding radius that is guaranteed to be achievable for any code of a given length and minimum rank distance, independent of its structure (for more details, see Section 2.9).

A classification of constant weight codes was developed in (Randrianarisoa, 2019) based on a geometric approach.

## 2.6 Covering Property

The covering radius of a code  $\mathcal{C} \subseteq \mathbb{F}_{q^m}^n$  is the smallest integer  $\rho$  such that all vectors in the space  $\mathbb{F}_{q^m}^n$  are within distance  $\rho$  to some codeword of  $\mathcal{C}$ , i.e.,

$$\rho(\mathcal{C}) := \max_{\mathbf{x} \in \mathbb{F}_{q^m}^n} \min_{\mathbf{c} \in \mathcal{C}} d(\mathbf{x}, \mathbf{c}).$$

The covering radius of is a fundamental property of a code, which is generally harder to compute than the minimum distance. It measures the maximum weight of a correctable error vector. It also characterizes the maximality property of a code. A code  $\mathcal{C}$  is said to be maximal if there does not exist any code  $\mathcal{C}'$  of the same length and minimum distance such that  $\mathcal{C} \subset \mathcal{C}'$ . A maximal code has covering distance less than its minimum distance (Cohen et al., 1985; Byrne and Ravagnani, 2017), i.e.,  $\rho(\mathcal{C}) \leq d(\mathcal{C}) - 1$ .

The covering problem is to find the minimum cardinality of a code  $C \subseteq \mathbb{F}_{q^m}^n$  with covering radius  $\rho$ . Denote by  $M_{\mathsf{R}}(q^m,n,\rho)$  the minimum cardinality of such a code. This quantity for codes in the Hamming metric has been studied extensively (see (Bartoli et al., 2014; Cohen et al., 1997) and the references therein). In the rank-metric, the covering property has been studied by Gadouleau and Yan (2008a), (Gadouleau and Yan, 2009) for codes which are  $\mathbb{F}_{q^m}$ -linear. Several lower and upper bounds on  $M_{\mathsf{R}}(q^m,n,\rho)$  can be found in (Gadouleau and Yan, 2008a, Section V) and (Gadouleau and Yan, 2009). The numerical results and comparisons of the bounds for small parameters ( $\rho \leq 6, m \leq 7$ ) can be found in the tables provided by both references. From (Gadouleau and Yan, 2009, Table I) one can observe that there is gap between the best upper and lower bounds for these parameters. Finding tighter bounds for non-asymptotic parameters is still an open problem. The existing bounds are computationally expensive for larger code parameters.

The asymptotic behavior of  $M_{\mathsf{R}}(q^m, n, \rho)$  is stated in (Gadouleau and Yan, 2008a, Theorem 1).

More results on the covering property of  $\mathbb{F}_q$ -linear codes endowed with the rank metric can be found in (Byrne and Ravagnani, 2017).

## 2.7 Gabidulin Codes

Gabidulin codes are a special class of rank-metric codes and can be defined by their generator matrices.

**Definition 2.7.1** (Gabidulin Code (Gabidulin, 1985)). A linear  $\mathcal{G}(n,k)$  Gabidulin code over  $\mathbb{F}_{q^m}$  of length  $n \leq m$  and dimension k, denoted by  $\mathcal{G}(n,k)$ , is defined by its  $k \times n$  generator matrix

$$\mathbf{G} = \mathcal{M}_{k,q} \left( \left( g_0 \ g_1 \ \dots \ g_{n-1} \right) \right),\,$$

where  $\mathbf{g} = (g_0 \ g_1 \ \dots \ g_{n-1}) \in \mathbb{F}_{q^m}^n$  and  $\operatorname{rk}_q(\mathbf{g}) = n$ .

It was shown by Gabidulin (1985) that Gabidulin codes are MRD codes, i.e., they are of minimum rank-distance d = n - k + 1.

Equivalently, we can define Gabidulin codes by evaluating q-degree restricted linearized polynomials:

$$G(n,k) := \{ (f(g_0) \ f(g_1) \ \dots \ f(g_{n-1})) = f(\mathbf{g}) : f(x) \in \mathbb{L}_{q^m}[x]_{< k} \},$$

where the fixed elements  $g_0, \ldots, g_{n-1} \in \mathbb{F}_{q^m}$  are linearly independent over  $\mathbb{F}_q$  and  $\mathbb{L}_{q^m}[x]_{\leq k}$  is the set of all linearized polynomials with q-degree less than k.

**Theorem 2.7.1** (Minimum Rank Distance of a Gabidulin Code). The minimum rank distance of a  $\mathcal{G}(n,k)$  Gabidulin code over  $\mathbb{F}_{q^m}$  with  $n \leq m$  is d = n - k + 1.

*Proof.* The evaluation polynomials f(x) have q-degree less than k and therefore the dimension of their root spaces over  $\mathbb{F}_{q^m}$  is at most k-1.

Let  $\mathbf{C} = \operatorname{ext}_{\beta}(\mathbf{c}) \in \mathbb{F}_q^{m \times n}$  denote the representation of  $\mathbf{c} \in \mathcal{G}(n,k)$ . Since the evaluation of a linearized polynomial at a basis is an  $\mathbb{F}_q$ -linear map, the dimension of the right kernel of  $\mathbf{C} \in \mathbb{F}_q^{m \times n}$  is equal to the dimension of the root space of the corresponding evaluation polynomial f(x). Therefore,

$$\dim \ker(\mathbf{c}) \le k - 1, \quad \forall \mathbf{c} \in \mathcal{G}(n, k).$$

By linearity, there is a codeword  $\mathbf{c}$  in  $\mathcal{G}(n,k)$  of rank d and due to the rank nullity theorem, for this codeword dim  $\ker(\mathbf{c}) = n - d$  holds. Hence,

$$\dim \ker(\mathbf{c}) = n - d \le k - 1 \iff d \ge n - k + 1.$$

However, the Singleton-like bound (2.4) implies that  $d \le n - k + 1$  and hence, d = n - k + 1.

Gabdulin codes achieve the Singleton bound (2.4) with equality, thus they are MRD codes.

**Lemma 2.7.2** (Parity-Check Matrix of Gabidulin Code). Let **G** be a generator matrix of a  $\mathcal{G}(n,k)$  code, where  $g_0,g_1,\ldots,g_{n-1}\in\mathbb{F}_{q^m}$  are linearly independent over  $\mathbb{F}_q$ . Let  $h_0,h_1,\ldots,h_{n-1}$  be a non-zero solution for the following n-1 linear equations:

$$\sum_{i=0}^{n-1} g_i^{[j]} h_i = 0, \quad \forall j \in [-n+k+1, k-1].$$
 (2.5)

Then, the  $(n-k) \times n$  matrix

$$\mathbf{H} \coloneqq \mathcal{M}_{n-k,q} \left( (h_0 \ h_1 \ \dots \ h_{n-1}) \right) = \begin{pmatrix} h_0^{[0]} & h_1^{[0]} & \dots & h_{n-1}^{[0]} \\ h_0^{[1]} & h_1^{[1]} & \dots & h_{n-1}^{[1]} \\ \vdots & \vdots & \ddots & \vdots \\ h_0^{[n-k-1]} & h_1^{[n-k-1]} & \dots & h_{n-1}^{[n-k-1]} \end{pmatrix},$$

is a parity-check matrix of the  $\mathcal{G}(n,k)$  code.

*Proof.* Since the dual of a  $\mathcal{G}(n, k)$  code is a  $\mathcal{G}(n, n-k)$  code (Gabidulin, 1985, Theorem 3), we have to prove that  $\mathbf{H}$  is a generator matrix of this dual code, i.e.,  $\mathbf{G} \cdot \mathbf{H}^{\top} = \mathbf{0}$  has to hold, which is equivalent to the following n-1 linear equations:

$$\sum_{i=0}^{n-1} g_i^{[l]} h_i^{[j]} = 0, \qquad \forall l \in [0, k-1], j \in [0, n-k-1],$$

$$\iff \sum_{i=0}^{n-1} g_i^{[j]} h_i = 0, \qquad \forall j \in [-n+k+1, k-1].$$

Therefore, if  $h_0, h_1, \ldots, h_{n-1}$  are linearly independent over  $\mathbb{F}_q$ , **H** is a generator matrix of the dual code  $\mathcal{G}(n, n-k)$ . To prove this, denote  $\tilde{\mathbf{g}} = (g_0^{[-n+k+1]} \ g_1^{[-n+k+1]} \ \ldots \ g_{n-1}^{[-n+k+1]})$ . Then, (2.5) is equivalent to

$$\mathcal{M}_{n-1,q}(\widetilde{\mathbf{g}}) \cdot (h_0 \ h_1 \ \dots \ h_{n-1})^{\top} = \mathbf{0}. \tag{2.6}$$

The matrix  $\mathcal{M}_{n-1,q}(\widetilde{\mathbf{g}})$  is a generator matrix of a  $\mathcal{G}(n,n-1)$  code, since  $g_0^{[-n+k+1]}, g_1^{[-n+k+1]}, \ldots, g_{n-1}^{[-n+k+1]} \in \mathbb{F}_{q^m}$  are linearly independent over  $\mathbb{F}_q$ . Due to (2.6), the vector  $(h_0 \ h_1 \ \ldots \ h_{n-1})$  is a codeword of a  $\mathcal{G}(n,1)$  code, i.e., of the dual code of the  $\mathcal{G}(n,n-1)$  code. This  $\mathcal{G}(n,1)$  code has minimum rank distance d=n-1+1=n and therefore  $\mathrm{rk}((h_0 \ h_1 \ \ldots \ h_{n-1}))=n$ . Thus,  $\mathbf{H}$  is a generator matrix of the dual  $\mathcal{G}(n,n-k)$  code and therefore a parity-check matrix of the  $\mathcal{G}(n,k)$  code.

## 2.8 Decoding of Gabidulin Codes

We now recall some well-known results on the decoding of Gabidulin codes.

#### 2.8.1 Decoding of Errors

Following the descriptions of (Gabidulin, 1985; Roth, 1991; Gabidulin, 1992), we explain the idea of syndrome-based bounded minimum distance (BMD) decoding, without going into detail about the different algorithmic possibilities.

Let  $\mathbf{r} = \mathbf{c} + \mathbf{e} \in \mathbb{F}_{q^m}^n$  be the received word, where  $\mathbf{c} \in \mathcal{G}(n,k)$ . The goal of decoding is to reconstruct  $\mathbf{c}$ , given only the received word  $\mathbf{r}$ . Clearly, this is possible only if the rank of the error  $\mathbf{e}$  is not too big. Syndrome-based BMD decoding of Gabidulin codes follows similar steps as syndrome-based BMD decoding of Reed-Solomon codes. For Reed-Solomon codes, the two main steps are determining the "error locations" and finding the "error values", where the second step is considered to be much easier. Algebraic BMD decoding of Gabidulin codes also consists of two steps; however, the second one is not necessarily the easier one. The starting point of decoding Gabidulin codes is to decompose the error, based on the well-known rank decomposition of a matrix.

**Lemma 2.8.1** (Rank Decomposition (Matsaglia and Styan, 1974, Theorem 1)). For any matrix  $\mathbf{X} \in \mathbb{F}_q^{m \times n}$  of rank r there exist full rank matrices  $\mathbf{Y} \in \mathbb{F}_q^{m \times r}$  and  $\mathbf{Z} \in \mathbb{F}_q^{r \times n}$  such that  $\mathbf{X} = \mathbf{YZ}$ . Moreover, the column space of  $\mathbf{X}$  is  $\langle \mathbf{X} \rangle_q^c = \langle \mathbf{Y} \rangle_q^c \in \mathbb{G}_q(m,r)$  and the row space is  $\langle \mathbf{X} \rangle_q = \langle \mathbf{Z} \rangle_q \in \mathbb{G}_q(n,r)$ .

Therefore, we can rewrite the matrix representation of **e** with  $\mathrm{rk}_q(\mathbf{e}) = t$  by:

$$\mathbf{E} = \operatorname{ext}_{\beta} \left( \mathbf{e} \right) = \mathbf{A} \cdot \mathbf{B}, \quad \text{with } \mathbf{A} \in \mathbb{F}_q^{m \times t}, \ \mathbf{B} \in \mathbb{F}_q^{t \times n},$$

and if we define  $\mathbf{a} := \operatorname{ext}_{\beta}^{-1}(\mathbf{A}) \in \mathbb{F}_{q^m}^t$ :

$$\mathbf{e} = \operatorname{ext}_{\beta}^{-1}(\mathbf{E}) = \operatorname{ext}_{\beta}^{-1}(\mathbf{A}) \cdot \mathbf{B} = \mathbf{a} \cdot \mathbf{B} = (a_0 \ a_1 \ \dots \ a_{t-1}) \cdot \mathbf{B}. \tag{2.7}$$

This decomposition is clearly not unique, but any of them is good for decoding. The two main steps of decoding Gabidulin codes are therefore: first, determine "a basis of the column space" of the error, i.e., find the vector  $\mathbf{a}$  of a possible decomposition, and second, find the corresponding matrix  $\mathbf{B}$ , which determines the row space<sup>2</sup>. Both steps are based on the *syndrome*, which can be calculated out of the received word by

$$\mathbf{s} = (s_0 \ s_1 \ \dots \ s_{n-k-1}) = \mathbf{r} \cdot \mathbf{H}^{\top} = \mathbf{e} \cdot \mathbf{H}^{\top}, \tag{2.8}$$

 $<sup>^2</sup>$ Note that it is possible to change the order of these two steps and search for a basis of the row space first and then find a corresponding matrix **A**. This is a difference to Reed–Solomon codes, where we cannot interchange the two main steps.

where **H** is a parity-check matrix of the  $\mathcal{G}(n,k)$  code (see Lemma 2.7.2). We denote the associated syndrome polynomial by  $s(x) = \sum_{i=0}^{n-k-1} s_i x^{[i]} \in \mathbb{L}_{q^m}[x]$ . Its coefficients are calculated by

$$s_{i} = \sum_{j=0}^{n-1} e_{j} h_{j}^{[i]} = \sum_{j=0}^{n-1} \sum_{l=0}^{t-1} a_{l} B_{l,j} h_{j}^{[i]} =: \sum_{l=0}^{t-1} a_{l} d_{l}^{[i]}, \quad \forall i \in [0, n-k-1],$$
 (2.9)

with

$$d_l \coloneqq \sum_{j=0}^{n-1} B_{l,j} h_j. \tag{2.10}$$

We define the  $error\ span\ polynomial$  as the minimal subspace polynomial of the vector  ${\bf a}$  to be

$$\Lambda(x) := M_{a_0, a_1, \dots, a_{t-1}}(x) = \prod_{B_0 = 0}^{q-1} \dots \prod_{B_{t-1} = 0}^{q-1} \left( x - \sum_{i=0}^{t-1} B_i a_i \right). \tag{2.11}$$

Hence, due to Lemma 2.2.3, the error span polynomial  $\Lambda(x)$  is a linearized polynomial of q-degree t and any  $\mathbb{F}_q$ -linear combination of roots of  $\Lambda(x)$  is also a root of  $\Lambda(x)$ .

The first part of the decoding process is to determine  $\Lambda(x)$ , given the syndrome polynomial s(x), and it is strongly based on the following theorem, the *key equation* for decoding Gabidulin codes.

**Theorem 2.8.2** (Key Equation for Decoding Gabidulin Codes (Gabidulin, 1985, Lemma 4)). Let  $\mathbf{r} = \mathbf{c} + \mathbf{e} \in \mathbb{F}_{q^m}^n$  be given, where  $\mathbf{c} \in \mathcal{G}(n,k)$  over  $\mathbb{F}_{q^m}$  and  $\mathrm{rk}(\mathbf{e}) = t < n - k$ . Denote by  $\mathbf{s} = (s_0 \ s_1 \ \dots \ s_{n-k-1}) = \mathbf{r} \cdot \mathbf{H}^{\top} \in \mathbb{F}_{q^m}^{n-k}$  the syndrome as in (2.8) and by  $s(x) = \sum_{i=0}^{n-k-1} s_i x^{[i]}$  its associated polynomial.

Let the error span polynomial  $\Lambda(x)$  with  $\deg_q \Lambda(x) = t$  be defined as in (2.11), where  $\mathbf{a} = (a_0 \ a_1 \ \dots \ a_{t-1})$  is a basis of the column space of  $\mathbf{e}$ . Then,

$$\Omega(x) \equiv \Lambda(s(x)) \mod x^{[n-k]},$$
(2.12)

for some  $\Omega(x) \in \mathbb{L}_{q^m}[x]$  with  $\deg_q \Omega(x) < t$ .

*Proof.* With (2.9), the *i*-th coefficient of  $\Lambda(s(x))$  can be calculated by

$$\Omega_i := \sum_{j=0}^i \Lambda_j s_{i-j}^{[j]} = \sum_{j=0}^i \Lambda_j \left( \sum_{l=0}^{t-1} a_l d_l^{[i-j]} \right)^{[j]} = \sum_{l=0}^{t-1} d_l^{[i]} \sum_{j=0}^i \Lambda_j \cdot a_l^{[j]}.$$
 (2.13)

Note that  $\Omega_i$  is the coefficient of  $x^i$  in  $\Lambda(s(x))$ . For  $i \geq t$  this gives

$$\Omega_i = \sum_{l=0}^{t-1} d_l^{[i]} \Lambda(a_l) = 0, \quad \forall i \ge t,$$
(2.14)

since  $\Lambda(x)$  has  $a_i, \forall i \in [0, t-1]$ , as roots, see (2.11), and therefore  $\deg_q \Omega(x) < \deg_q \Lambda(x) = t$ .

Alternatively, we can derive a key equation for the row space of the error word.

**Theorem 2.8.3** (Row Space Key Equation for Decoding Gabidulin Codes (Silva and Kschischang, 2009a)). Let  $\mathbf{r} = \mathbf{c} + \mathbf{e} \in \mathbb{F}_{q^m}^n$  be given, where  $\mathbf{c} \in \mathcal{G}(n,k)$  over  $\mathbb{F}_{q^m}$  and  $\mathrm{rk}_q(\mathbf{e}) = t < n-k$ . Denote by  $\mathbf{s} = (s_0 \ s_1 \ \dots \ s_{n-k-1}) = \mathbf{r} \cdot \mathbf{H}^\top \in \mathbb{F}_{q^m}^{n-k}$  the syndrome as in (2.8) and by  $s(x) = \sum_{i=0}^{n-k-1} s_i x^{[i]}$  its associated polynomial.

Let the row error span polynomial be  $\Gamma(x) = M_{d_0,d_1,...,d_{t-1}}(x)$  with  $\deg_q \Gamma(x) = t$ , where  $d_i$  is defined as in (2.10) for  $i \in [0, t-1]$ . Further, let

$$\widetilde{s}_i = s_{n-k-1-i}^{[i-n+k+1]}, \quad \forall i \in [0, n-k-1]$$
(2.15)

and  $\widetilde{s}(x) = \sum_{i=0}^{n-k-1} \widetilde{s}_i x^{[i]}$ . Then,

$$\Phi(x) \equiv \Gamma(\widetilde{s}(x)) \mod x^{[n-k]},\tag{2.16}$$

for some  $\Phi(x) \in \mathbb{L}_{q^m}[x]$  with  $\deg_q \Phi(x) < t$ .

*Proof.* From (2.10), we obtain

$$\widetilde{s}_i = \sum_{l=0}^{t-1} a_l^{[i-n+k+1]} d_l.$$
 (2.17)

The *i*-th coefficient of the linearized composition  $\Gamma(\tilde{s}(x))$  can then be calculated by

$$\begin{split} \Phi_i &\coloneqq \left[ \Gamma(\widetilde{s}(x)) \right]_i = \sum_{j=0}^i \Gamma_j \widetilde{s}_{i-j}^{[j]} \\ &= \sum_{j=0}^i \Gamma_j \bigg( \sum_{l=0}^{t-1} a_l^{[i-j-n+k+1]} d_l \bigg)^{[j]} \\ &= \sum_{l=0}^{t-1} a_l^{[i-n+k+1]} \sum_{j=0}^i \Gamma_j \cdot d_l^{[j]}. \end{split}$$

For  $i \geq t$  this gives

$$\Phi_i = \sum_{l=0}^{t-1} a_l^{[i-n+k+1]} \Gamma(d_l) = 0, \quad \forall i \ge t,$$

since  $\Gamma(x)$  has all  $d_i$ ,  $\forall i \in [0, t-1]$ , as roots and therefore  $\deg_q \Phi(x) < \deg_q \Gamma(x) = t$ .  $\square$ 

Based on the key equation from Theorem 2.8.2, we explain the different steps of the standard decoding process of Gabidulin codes in the following and summarize them in Algorithm 1. Similar steps have to be accomplished when we solve the row space key equation instead of the column space key equation.

#### Syndrome Calculation

As mentioned before, the first step of decoding Gabidulin codes is calculating the syndrome based on a parity-check matrix  $\mathbf{H} \in \mathbb{F}_{q^m}^{(n-k) \times n}$  and the received word  $\mathbf{r} \in \mathbb{F}_{q^m}^n$  by

$$\mathbf{s} = (s_0 \ s_1 \ \dots \ s_{n-k-1}) = \mathbf{r} \cdot \mathbf{H}^{\top} = \mathbf{e} \cdot \mathbf{H}^{\top} \in \mathbb{F}_{q^m}^{n-k}.$$

### Solving the Key Equation

The direct way to find  $\Lambda(x)$  is to solve a linear system of equations based on the key equation (2.12). Due to (2.13) and (2.14) we have

$$\Omega_i = \sum_{j=0}^{i} \Lambda_j s_{i-j}^{[j]} = \sum_{j=0}^{t} \Lambda_j s_{i-j}^{[j]} = 0, \quad \forall i \ge t.$$

This is equivalent to the following homogeneous linear system of equations:

$$\begin{pmatrix}
\Omega_{t} \\
\Omega_{t+1} \\
\vdots \\
\Omega_{n-k-1}
\end{pmatrix} = \begin{pmatrix}
s_{t}^{[0]} & s_{t-1}^{[1]} & \dots & s_{0}^{[t]} \\
s_{t+1}^{[0]} & s_{t}^{[1]} & \dots & s_{1}^{[t]} \\
\vdots & \vdots & \ddots & \vdots \\
s_{n-k-1}^{[0]} & s_{n-k-2}^{[1]} & \dots & s_{n-k-1-t}^{[t]}
\end{pmatrix} \cdot \begin{pmatrix}
\Lambda_{0} \\
\Lambda_{1} \\
\vdots \\
\Lambda_{t}
\end{pmatrix} = \mathbf{0}.$$
(2.18)

If the dimension of the solution space of (2.18) is one, then any solution of (2.18) provides the coefficients of the error span polynomial  $\Lambda(x)$ , defined as in (2.11), except for a scalar factor. This scalar factor does not pose a problem, since it does not change the root space. The following lemma provides a criterion to obtain the actual number of errors out of the syndrome matrix.

**Lemma 2.8.4** (Rank of Syndrome Matrix (Gabidulin, 1992, Lemma, p. 132)). Let  $\mathbf{r} = \mathbf{c} + \mathbf{e} \in \mathbb{F}_{q^m}^n$ , where  $\mathbf{c} \in \mathcal{G}(n,k)$  and  $\mathrm{rk}(\mathbf{e}) = t \leq \left\lfloor \frac{n-k}{2} \right\rfloor$  and let  $(s_0 \ s_1 \ \dots \ s_{n-k-1}) \in \mathbb{F}_{q^m}^{n-k}$  denote the corresponding syndrome.

Then, for any  $u \geq t$ , the  $u \times (u+1)$  matrix

$$\mathbf{S}^{(u)} := \begin{pmatrix} s_u^{[0]} & s_{u-1}^{[1]} & \dots & s_0^{[u]} \\ s_{u+1}^{[0]} & s_u^{[1]} & \dots & s_1^{[u]} \\ \vdots & \vdots & \ddots & \vdots \\ s_{2u-1}^{[0]} & s_{2u-2}^{[1]} & \dots & s_{u-1}^{[u]} \end{pmatrix}$$

$$(2.19)$$

has full rank u if and only if u = t, where the i-th row of  $\mathbf{S}^{(u)}$  is defined to be all-zero if i + u > n - k - 1,  $\forall i = [0, u - 1]$ .

*Proof.* Since there are n-k non-zero syndrome coefficients, we can provide only n-k-u non-zero rows of  $\mathbf{S}^{(u)}$ . Therefore, for  $u > \left\lfloor \frac{n-k}{2} \right\rfloor$ , the matrix  $\mathbf{S}^{(u)}$  has only n-k-u < u non-zero rows and therefore rank less than u.

Let  $a_i, d_i = 0$  for  $i \ge t$ . For  $u \le \left\lfloor \frac{n-k}{2} \right\rfloor$ , we can decompose  $\mathbf{S}^{(u)}$  with (2.9) as

$$\mathbf{S}^{(u)} = \begin{pmatrix} d_0^{[u]} & d_1^{[u]} & \dots & d_{u-1}^{[u]} \\ d_0^{[u+1]} & d_1^{[u+1]} & \dots & d_{u-1}^{[u+1]} \\ \vdots & \vdots & \ddots & \vdots \\ d_0^{[2u-1]} & d_1^{[2u-1]} & \dots & d_{u-1}^{[2u-1]} \end{pmatrix} \cdot \begin{pmatrix} a_0^{[0]} & a_0^{[1]} & \dots & a_0^{[u]} \\ a_1^{[0]} & a_1^{[1]} & \dots & a_1^{[u]} \\ \vdots & \vdots & \ddots & \vdots \\ a_{u-1}^{[0]} & a_{u-1}^{[1]} & \dots & a_{u-1}^{[u]} \end{pmatrix}.$$

Both matrices are Moore matrices and due to Lemma 2.2.4, they have both full rank if and only if  $d_0, d_1, \ldots, d_{u-1}$  and  $a_0, a_1, \ldots, a_{u-1}$  are sets of elements which are linearly independent over  $\mathbb{F}_q$ . If u > t, this is not true, since  $a_i, d_i = 0$  for  $i \geq t$ . If u = t this is true and the left matrix is a square matrix of rank u and the right is a  $u \times (u+1)$  matrix of rank u. Since the first u columns of the right matrix constitute a matrix of rank u, the statement follows.

Thus, Lemma 2.8.4 proves that for  $t \leq \left\lfloor \frac{d-1}{2} \right\rfloor = \left\lfloor \frac{n-k}{2} \right\rfloor$ ,  $\mathbf{S}^{(t)}$  has full rank and the dimension of the solution space of (2.18) is one. For the algorithmic realization, we can set up  $\mathbf{S}^{(u)}$  for  $u = \left\lfloor \frac{d-1}{2} \right\rfloor$  and check its rank. If the rank is not full, we decrease u by one, control the rank, and so on, until we find u such that the rank is full. Since we have to solve several linear systems of equations over  $\mathbb{F}_{q^m}$ , the complexity of this step is in the order of at least  $O(t^3) \leq O(n^3)$  operations in  $\mathbb{F}_{q^m}$  with Gaussian elimination (cf. (Roth, 1991; Gabidulin, 1992)). See Subsection 2.8.3 for a list of asymptotically faster algorithms.

#### Finding the Root Space of $\Lambda(x)$

After solving the key equation (2.18) for the coefficients of  $\Lambda(x)$ , we have to find a basis of the root space of  $\Lambda(x)$ . This basis corresponds to one possible  $\mathbf{a} = (a_0 \ a_1 \ \dots \ a_{t-1})$  in the decomposition of (2.7). Finding a basis of the root space of a linearized polynomial is relatively easy due to the structure of their roots. We can find the root space of  $\Lambda(x)$  by finding the right kernel of its associated evaluated matrix, i.e., for some basis  $\mathcal{B} = \{\beta_0, \beta_1, \dots, \beta_{m-1}\}$  of  $\mathbb{F}_{q^m}$  over  $\mathbb{F}_q$ , we have to determine

$$\ker \left( \operatorname{ext}_{\beta} \left( \left( \Lambda(\beta_0) \ \Lambda(\beta_1) \ \dots \ \Lambda(\beta_{m-1}) \right) \right) \right).$$

The kernel of this matrix is equivalent to  $\operatorname{ext}_{\beta}(\mathbf{a})$  of one possible  $\mathbf{a}$ . Thus, finding the root space of  $\Lambda(x)$  involves solving a linear system of equations of size m over  $\mathbb{F}_q$ , which has complexity at most  $O(m^3)$  over  $\mathbb{F}_q$ . This root-finding procedure was explained in detail in (Lidl and Niederreiter, 1996; Berlekamp, 1984).

#### Determining the Error

Knowing a possible vector  $\mathbf{a} \in \mathbb{F}_{q^m}^t$ , we have to find the corresponding matrix  $\mathbf{B} \in \mathbb{F}_q^{t \times n}$  such that  $\mathbf{e} = \mathbf{a} \cdot \mathbf{B}$  as in (2.7). This is basically done in two substeps. Based on (2.9), we can set up the following system of equations which we have to solve for  $\mathbf{d} = (d_0 \ d_1 \ \dots \ d_{t-1})^3$ :

$$\begin{pmatrix}
a_0^{[0]} & a_1^{[0]} & \dots & a_{t-1}^{[0]} \\
a_0^{[-1]} & a_1^{[-1]} & \dots & a_{t-1}^{[-1]} \\
\vdots & \vdots & \ddots & \vdots \\
a_0^{[-(n-k-1)]} & a_1^{[-(n-k-1)]} & \dots & a_{t-1}^{[-(n-k-1)]}
\end{pmatrix} \cdot \begin{pmatrix}
d_0 \\
d_1 \\
\vdots \\
d_{t-1}
\end{pmatrix} = \begin{pmatrix}
s_0^{[0]} \\
s_1^{[-1]} \\
\vdots \\
s_{n-k-1}^{[-(n-k-1)]}
\end{pmatrix} . (2.20)$$

Solving this system of equations with Gaussian elimination requires complexity  $O(n^3)$  operations over  $\mathbb{F}_{q^m}$ , whereas the algorithm from (Gabidulin, 1985) requires complexity  $O(n^2)$  over  $\mathbb{F}_{q^m}$  by using the Moore structure of the involved matrix.

After having found **d**, we determine the matrix **B** out of  $d_l = \sum_{i=0}^{n-1} B_{l,i} h_i$  for all  $l \in [0, t-1]$ . The complexity of this calculation is negligible, since  $(h_0 \ h_1 \dots h_{n-1})$  has rank n and we are looking for the representation of **d** over  $\mathbb{F}_q$  using these linearly independent elements.

Finally, we calculate  $\mathbf{e} = \mathbf{a} \cdot \mathbf{B}$  and can reconstruct  $\mathbf{c} = \mathbf{r} - \mathbf{e}$ . A summary of this decoding procedure is given in Algorithm 1. Notice that the algorithm will most likely output a decoding failure when  $t > \left\lfloor \frac{d-1}{2} \right\rfloor$ . In this case, with high probability, there is more than one solution of the linear system of equations that solves for the coefficients of the error span polynomial.

 $<sup>^{3}</sup>$ Notice that this system of equations from (2.20) can be used to do row-erasure-only correction, i.e., when **a** is known in advance due to the channel. For the concept of row and column erasures, see also Figure 2.1.

### Algorithm 1:

 $\mathbf{c}$  or decoding failure  $\leftarrow \text{DECODEGABIDULIN}(\mathbf{r}; \mathbf{H})$ 

```
Input: \mathbf{r} = (r_0 \ r_1 \ \dots \ r_{n-1}) \in \mathbb{F}_{q^m}^n \text{ with } n \leq m,
                     Parity-check matrix \mathbf{H} = \mathcal{M}_{n-k,q} ((h_0 \ h_1 \ \dots \ h_{n-1})) of \mathcal{G}(n,k)
      Output: Estimated codeword \mathbf{c} \in \mathbb{F}_{q^m}^n or decoding failure
  1 Syndrome calculation: \mathbf{s} \leftarrow \mathbf{r} \cdot \mathbf{H}^{\top} \in \mathbb{F}_{a^m}^{n-k}
  \mathbf{if} \ \mathbf{s} = \mathbf{0} \ \mathbf{then}
              Estimated codeword: \mathbf{c} \leftarrow \mathbf{r}
             return c
  5 else
             Set up \mathbf{S}^{(t)} as in (2.19) for t = \lfloor \frac{n-k}{2} \rfloor
                while rk(\mathbf{S}^{(t)}) < t \mathbf{do}
                    t \leftarrow t - 1
  7
                Set up \mathbf{S}^{(t)} as in (2.19)
  8
             Solve \mathbf{S}^{(t)} \cdot \mathbf{\Lambda}^{\top} = \mathbf{0} for \mathbf{\Lambda} = (\Lambda_0 \ \Lambda_1 \ \dots \ \Lambda_t) \in \mathbb{F}_{q^m}^{t+1}
  9
              Find basis (a_0 \ a_1 \ \dots \ a_{\varepsilon-1}) \in \mathbb{F}_{q^m}^{\varepsilon} of the root space of \Lambda(x) = \sum_{i=0}^t \Lambda_i x^{[i]} over \mathbb{F}_{q^m}
10
             if \varepsilon = t then
11
                     Find \mathbf{d} = (d_0 \ d_1 \ \dots \ d_{t-1}) \in \mathbb{F}_{q^m}^t by solving (2.20)
12
                     Find \mathbf{B} = \left(B_{i,j}\right)_{j \in [0,n-1]}^{i \in [0,t-1]} \in \mathbb{F}_q^{t \times n} such that d_i = \sum_{j=0}^{n-1} B_{i,j} h_j
13
                     Estimated codeword: \mathbf{c} \leftarrow \mathbf{r} - \mathbf{a} \cdot \mathbf{B}
14
                    return c
15
              else
16
                    return decoding failure
17
```

#### 2.8.2 Error-Erasure Decoding

For a short description on error-erasure decoding of Gabidulin codes, denote by  $\mathbf{C} \in \mathbb{F}_q^{m \times n}$  the transmitted codeword (i.e., the matrix representation of  $\mathbf{c} \in \mathbb{F}_q^n$ ) of a  $\mathcal{G}(n,k)$  code that is corrupted by an additive error  $\mathbf{E} \in \mathbb{F}_q^{m \times n}$ . At the receiver side, only the received matrix  $\mathbf{R} \in \mathbb{F}_q^{m \times n}$ , where  $\mathbf{R} = \mathbf{C} + \mathbf{E}$ , is known. The channel might provide additional side information in the form of erasures:

- $\rho$  row erasures (in (Silva et al., 2008) called "deviations") and
- $\gamma$  column erasures (in (Silva et al., 2008) called "erasures"),

such that the received matrix can be decomposed into

$$\mathbf{R} = \mathbf{C} + \underbrace{\mathbf{A}^{(R)}\mathbf{B}^{(R)} + \mathbf{A}^{(C)}\mathbf{B}^{(C)} + \mathbf{E}^{(E)}}_{=\mathbf{E}_{\text{total}}},$$
(2.21)

where  $\mathbf{A}^{(R)} \in \mathbb{F}_q^{m \times \varrho}$ ,  $\mathbf{B}^{(R)} \in \mathbb{F}_q^{\varrho \times n}$ ,  $\mathbf{A}^{(C)} \in \mathbb{F}_q^{m \times \gamma}$ ,  $\mathbf{B}^{(C)} \in \mathbb{F}_q^{\gamma \times n}$  are full-rank matrices, respectively, and  $\mathbf{E}^{(E)} \in \mathbb{F}_q^{m \times n}$  is a matrix of rank t. For an illustration see Figure 2.1.

The decoder knows **R** and additionally  $\mathbf{A}^{(R)}$  and  $\mathbf{B}^{(C)}$ . Further, t denotes the number of errors without side information. The rank-metric error-erasure decoding algorithms from (Gabidulin and Pilipchuk, 2008; Silva et al., 2008; Wachter-Zeh and Zeh, 2014) can then reconstruct  $\mathbf{c}_{\mathcal{G}} \in \mathcal{G}(n,k)$  with asymptotic complexity  $O(n^2)$  operations over  $\mathbb{F}_{q^m}$ , or in subquadratic complexity using the fast operations described in (Puchinger and Wachter-Zeh, 2016; Puchinger and Wachter-Zeh, 2018), if

$$2t + \rho + \gamma \le d - 1 = n - k \tag{2.22}$$

is fulfilled.




Figure 2.1: Illustration of row erasures, column erasures and (full) errors in the rank metric. The known matrices (given by the channel) are filled with gray.

#### 2.8.3 Other Decoding Algorithms

The syndrome-based decoder that we presented above is based on the algorithms presented in (Gabidulin, 1985; Gabidulin, 1992). However, instead of solving a linear system of equations to find the error span polynomial (we call this the first step below), Gabidulin suggested to use the analog of the extended Euclidean algorithm (EEA) for linearized polynomials. This gives a quadratic complexity in the code length for this step of the decoder. Roth independently proposed an alternative decoder that also solves the first step using a linear system of equations in (Roth, 1991). Furthermore, there are several adaptations of the Berlekamp–Massey algorithm (Paramonov and Tretjakov, 1991; Richter and Plass, 2004a; Richter and Plass, 2004b; Hassan and Sidorenko, 2010; Sidorenko et al., 2011b; Sidorenko and Bossert, 2014), which allow to recover the error span polynomial in  $O(n^2)$  or  $O^{\sim}(n^{1.69})$  (divide-and-conquer variant) operations over  $\mathbb{F}_{q^m}$ , where n is the code length. Note that in the latter case, the second step of the decoder becomes the bottleneck.

All of the mentioned algorithms are rank-metric counterparts of classical decoding algorithms for Reed-Solomon codes, which first find an error locator polynomial and then determine the error values. For Reed-Solomon codes, the latter step has negligible complexity compared to the first part of the algorithm. In the Gabidulin code case, the second step is rather heavy. Determining the error from the known  $\mathbf{a} \in \mathbb{F}_{q^m}^t$  is as fast as an algorithm with (soft-)quadratic cost over  $\mathbb{F}_{q^m}$ : computing a basis of the root space of the error span polynomial costs  $O(n^2m)$  operations in  $\mathbb{F}_q$ , which asymptotically costs—up to logarithmic

factors—as much as  $O(n^2)$  operations over  $\mathbb{F}_{q^m}$  using the bases in (Couveignes and Lercier, 2009).

There are also some decoding algorithms that directly output the message polynomial and thus avoid the second step. Loidreau (2006) proposed a Welch–Berlekamp-type decoder, which directly returns the message polynomial by first finding two linearized polynomials that fulfill certain evaluation conditions and degree constraints, followed by a division of one polynomial by the other. The resulting decoder has cubic complexity in the code length over  $\mathbb{F}_{q^m}$ .

The decoder in (Wachter-Zeh et al., 2013) is based on a key equation that contains the message polynomial, which is sometimes referred to as "Gao-like key equation" since it can be seen as the rank-metric analog of (Gao, 2003). The key equation can be solved using only multiplication, division, EEA, multi-point evaluation, minimal subspace polynomial computation, and interpolation of linearized polynomials. Fast operations for these operations with linearized polynomials in (Puchinger and Wachter-Zeh, 2016; Puchinger and Wachter-Zeh, 2018) led to the first sub-quadratic decoding algorithm for Gabidulin codes.

Module minimization (Puchinger et al., 2017a), also called row reduction, of linearized polynomial matrices gives a general framework for decoding Gabidulin codes and related codes. For the case of Gabidulin codes, it is equivalent to the EEA, but for other classes, such as interleaved codes, it is more flexible. A divide-and-conquer version, Alekhnovich's algorithm, gives a sub-quadratic algorithm in n. Most recently, minimal approximant bases for linearized polynomials have been studied in (Bartz et al., 2021). These bases enable more flexible and faster decoding algorithms for variants of Gabidulin codes, e.g., (lifted) interleaved and folded Gabidulin codes.

# 2.9 Considerations on List Decoding Gabidulin Codes

Given a word  $\mathbf{r} \in \mathbb{F}_{q^m}^n$  (or alternatively, a matrix  $\mathbf{R} \in \mathbb{F}_q^{m \times n}$ ), a list decoding algorithm outputs all codewords that are inside a ball of radius  $\tau$ , centered at  $\mathbf{r}$ , where  $\tau$  is possibly larger than the unique decoding radius of the code. For a given code, a natural question to ask is: for which values of  $\tau$  can list decoding be done efficiently?


Although Gabidulin codes can be seen as the rank-metric analog of Reed–Solomon codes, there are a few remarkable differences.

List decoding of rank-metric codes and Gabidulin codes was recently studied in (Wachter-Zeh, 2013; Ding, 2015b; Guruswami et al., 2016; Raviv and Wachter-Zeh, 2016; Liu et al., 2017; Xing and Yuan, 2018; Trombetti and Zullo, 2020). In (Wachter-Zeh, 2013), it was shown that Gabidulin codes cannot be list-decoded beyond the Johnson radius. Hence, for  $\tau \geq n - \sqrt{n(n-d)}$ , general list decoding has exponential (in n) worst-case complexity since the list size grows exponential in n, see (Wachter-Zeh, 2013, Theorem 1). This result was

generalized to any rank-metric code by Ding (2015b). When m is sufficiently large, Ding (2015b) also showed that with high probability a random rank-metric code can be efficiently list decoded. Further, it was shown in (Wachter-Zeh, 2013) that there is no Johnson-like polynomial upper bound on the list size since there exists a non-linear rank-metric code with exponentially growing list size for any radius greater than the unique decoding radius. In (Guruswami et al., 2016), an explicit subcode of a Gabidulin code was shown to be efficiently list-decodable. The remarkable difference to Reed–Solomon codes is the following: There are families of Gabidulin codes of rate  $R \geq 1/6$  for which some received words have exponential-sized lists even for decoding only one error beyond  $\left\lfloor \frac{n-k}{2} \right\rfloor$ , see (Raviv and Wachter-Zeh, 2016). This result was recently generalized in (Trombetti and Zullo, 2020) to more general classes of MRD codes.

Despite their analogy to Reed–Solomon codes and many unsuccessful trials by researchers in the last 20 years, nobody has found a polynomial-time list decoding algorithm for Gabidulin codes analog to the Guruswami–Sudan decoder for RS codes. In fact, the above mentioned result in the list size of some Gabidulin codes proves that an equally general algorithm cannot exist.

Figures 2.2a and 2.2b illustrates the different decoding regions of rank-metric and Gabidulin codes.






Figure 2.2: List size of codes in the rank metric, depending on normalized Bounded Minimum Distance (BMD) decoding radius  $\tau_{BMD}/n = (d-1)/2n$  and normalized Johnson radius  $\tau_J/n$  and on the normalized minimum distance  $\delta = d/n$ .

## 2.10 Interleaved Gabidulin Codes

Interleaved Gabidulin Codes are a code class for which efficient decoders are known that are able to correct errors of rank larger than  $\lfloor \frac{d-1}{2} \rfloor$ .

**Definition 2.10.1** (Interleaved Gabidulin Codes (Loidreau and Overbeck, 2006)). A linear (vertically, heterogeneous) interleaved Gabidulin code  $\mathcal{IG}(u; n, k^{(1)}, \ldots, k^{(u)})$  over  $\mathbb{F}_{q^m}$  of length  $n \leq m$ , dimensions  $k^{(i)} \leq n$ ,  $\forall i \in [1, u]$ , and interleaving order u is defined by

$$\mathcal{IG}(u; n, k^{(1)}, \dots, k^{(u)}) := \left\{ \begin{pmatrix} \mathbf{c}_{\mathcal{G}}^{(1)} \\ \mathbf{c}_{\mathcal{G}}^{(2)} \\ \vdots \\ \mathbf{c}_{\mathcal{G}}^{(u)} \end{pmatrix} : \mathbf{c}_{\mathcal{G}}^{(i)} \in \mathcal{G}(n, k^{(i)}), \forall i \in [1, u] \right\}.$$

If  $k(i) = k, \forall i \in [1, u]$ , we call the code a homogeneous interleaved Gabidulin code and denote it by  $\mathcal{IG}(u; n, k)$ .

When considering random errors of rank weight t, the code  $\mathcal{IG}(u; n, k)$  can be decoded uniquely with high probability up to  $t \leq \lfloor \frac{u}{u+1}(n-k) \rfloor$  errors<sup>4</sup>, cf. (Loidreau and Overbeck, 2006; Sidorenko *et al.*, 2011a; Wachter-Zeh and Zeh, 2014). However, it is well-known that there are error patterns for which the known efficient decoders fail.

There are several decoding algorithms for interleaved Gabidulin codes. The most common one is the syndrome-based decoder, cf. (Sidorenko et al., 2011a). For interleaved codes, we consider errors whose column spaces are the same. Therefore, we can stack the syndrome matrices (2.20) from each row of the received word and solve the corresponding linear system of equations for the error span polynomial to obtain the error span polynomial which is the same for all rows. Counting the number of unknowns and equations results in the restriction  $t \leq \lfloor \frac{u}{u+1}(n-k) \rfloor$ . This maximum radius can only be achieved if the rank of the stacked syndrome matrix is full, else the linear system of equations does not have a unique solution and a syndrome-based decoder declares a decoding failure.

In the following, we shortly summarize the interpolation-based decoder by Wachter-Zeh and Zeh (2014). The algorithm consists of two steps: the *interpolation step* computes non-zero vectors of linearized polynomials

$$\mathbf{Q}^{(i)} = [Q_0^{(i)}, Q_1^{(i)}, \dots, Q_u^{(i)}] \in \mathbb{L}_{q^m}[x]^{u+1} \setminus \{\mathbf{0}\}, \ \forall i = 1, \dots, L$$

such that they fulfill certain degree and evaluation conditions with respect to the received matrix  $\mathbf{C} + \mathbf{E}$ . The root-finding step finds all message polynomial vectors  $[f_1, \ldots, f_u]$  of degrees deg  $f_j < k_j$  such that

$$Q_0^{(i)} + \sum_{j=1}^u Q_j^{(i)} f_j = 0 \quad \forall i = 1, \dots, L.$$

If the rank of the error matrix **E** is at most  $\frac{u}{u+1}(n-\bar{k})$  with  $\bar{k} := \frac{1}{u} \sum_{j=1}^{u} k_j$ , then at least one satisfactory interpolation vector  $\mathbf{Q}^{(i)}$  exists (Wachter-Zeh and Zeh, 2014). In this case,

<sup>&</sup>lt;sup>4</sup>In this setting, an error of weight t is a  $u \times n$  matrix of  $\mathbb{F}_q$ -rank t. Note that this means that the tall  $(um) \times n$ -matrix obtained by expanding the matrix component-wise over  $\mathbb{F}_q$  has rank t.

the output list contains the transmitted message polynomial vector. The algorithm can be considered as a partial unique or list decoder (Wachter-Zeh and Zeh, 2014). Notice that the list decoder returns a *basis* of the list of all codewords on the decoding list. The number of all words on the list can become large.

## 2.11 Folded Gabidulin Codes

Variants of folded Gabidulin codes were proposed independently in (Mahdavifar and Vardy, 2012) and (Guruswami et al., 2012). In (Guruswami et al., 2012) the coefficients of the message polynomial are restricted to belong to the subfield  $\mathbb{F}_q$  of  $\mathbb{F}_{q^m}$ . In the following we consider folded Gabidulin codes as defined in (Mahdavifar and Vardy, 2012).

**Definition 2.11.1** (h-Folded Gabidulin Code). Let  $\alpha$  be a primitive element of  $\mathbb{F}_{q^m}$  and let  $n \leq m$ . Let h be a positive integer that divides n and let g = n/h. An h-folded Gabidulin code  $\mathcal{FG}[h, \alpha; g, k]$  of length g and dimension k is defined as

$$\left\{ \begin{pmatrix} f(\alpha^{0}) & f(\alpha^{1}) & \dots & f(\alpha^{h-1}) \\ f(\alpha^{h}) & f(\alpha^{h+1}) & \dots & f(\alpha^{2h-1}) \\ \vdots & \vdots & \ddots & \vdots \\ f(\alpha^{n-h}) & f(\alpha^{n-h+1}) & \dots & f(\alpha^{n-1}) \end{pmatrix} : f(x) \in \mathbb{L}_{q^{m}}[x]_{\leq k} \right\}.$$
(2.23)

Defining  $\alpha_F = (\alpha^0 \ \alpha^h \ \dots \ \alpha^{n-h})^\top$ , we can write each codeword of  $\mathcal{FG}[h, \alpha; g, k]$  as

$$(f(\boldsymbol{\alpha}_F) f(\alpha \boldsymbol{\alpha}_F) \dots f(\alpha^{h-1} \boldsymbol{\alpha}_F))$$
 (2.24)

where  $f(x) \in \mathbb{L}_{q^m}[x]_{\leq k}$ . For a fixed basis of  $\mathbb{F}_{q^{hm}}$  over  $\mathbb{F}_{q^m}$  a codeword of an h-folded Gabidulin code  $\mathcal{FG}[h,\alpha;g,k]$  can be represented as a column vector  $\mathbf{c} \in \mathbb{F}_{q^{hm}}^{g \times 1}$ , a matrix  $\mathbf{C} \in \mathbb{F}_{q^m}^{g \times hm}$  or a matrix  $\mathbf{C} \in \mathbb{F}_q^{g \times hm}$ . The j-th row of  $\mathbf{C}$  for  $j \in [0,g-1]$  is

$$\mathbf{c}_j = \left( f(\alpha^{jh}) \ f(\alpha^{jh+1}) \ \dots \ f(\alpha^{(j+1)h-1}) \right)$$

and can be seen as an element of the field  $\mathbb{F}_{q^{hm}}$ . Folded Gabidulin codes are codes of length g over a large field  $\mathbb{F}_{q^{hm}}$  that can be decoded over the small field  $\mathbb{F}_{q^m}$ . An h-folded Gabidulin code considered over  $\mathbb{F}_{q^{hm}}$  is a *nonlinear* code over  $\mathbb{F}_{q^{hm}}$  since  $\mathbb{F}_{q^{hm}}$ -linear combinations of codewords do not necessarily give codewords.

A folded Gabidulin code is  $\mathbb{F}_{q^m}$ -linear since the unfolded code is an  $\mathbb{F}_{q^m}$ -linear subspace of  $\mathbb{F}_{q^m}^n$ . This also implies that the code is *linear* over  $\mathbb{F}_q$ .

The number of codewords in  $\mathcal{FG}[h,\alpha;g,k]$  is  $|\mathcal{FG}[h,\alpha;g,k]| = q^{mk}$ . The code rate of a folded Gabidulin code is the same as the code rate of the unfolded code (Mahdavifar and

Vardy, 2012), i.e.,

$$R = \frac{\log_{q^{hm}} (|\mathcal{FG}[h, \alpha; g, k]|)}{q} = \frac{k}{n}.$$
 (2.25)

The following theorem shows that folded Gabidulin codes are MRD codes if and only if h divides k.

**Theorem 2.11.1** (Minimum Distance of h-Folded Gabidulin Codes (Bartz and Sidorenko, 2017, Theorem 1)). The minimum rank distance of an h-folded Gabidulin code  $\mathcal{FG}[h, \alpha; g, k]$  of length  $g = \frac{n}{h}$  is  $d_r = g - \lceil \frac{k}{h} \rceil + 1$ .

*Proof.* An h-folded Gabidulin code forms a group under addition since  $\mathbb{L}_{q^m}[x]_{< k}$  forms an additive group over  $\mathbb{F}_{q^m}$ . Thus the minimum distance of the code  $\mathcal{C}_r = \mathcal{FG}[h, \alpha; g, k]$  is given by the minimum rank of a nonzero codeword, i.e.,

$$d_r(\mathcal{C}_r) = \min_{\mathbf{C} \in \mathcal{C}_r^*} \operatorname{rk}_q(\underline{\mathbf{C}})$$

where  $C_r^* := C_r \setminus \{\mathbf{0}\}$ . Let  $\mathbf{C} \in C_r^*$  be a codeword generated by the evaluation of  $f(x) \in \mathbb{L}_{q^m}[x]_{\leq k}$  at the code locators  $\{\alpha^0, \alpha^1, \dots, \alpha^{n-1}\}$ . Since  $g \leq hm$  we have  $\operatorname{rk}_q(\underline{\mathbf{C}}) \leq g$ . If the row rank of  $\mathbf{C}$  is

$$\operatorname{rk}_{q}(\underline{\mathbf{C}}) = g - z$$

then by  $\mathbb{F}_q$ -elementary row operations (Gaussian elimination) we get  $\mathbf{C}'$  with z zero rows and g-z linearly independent rows. It follows that  $\mathbf{C}'$  is generated by the evaluation of f(x) at the new code locators  $\alpha'_i$  that are obtained from  $\alpha_i$  by  $\mathbb{F}_q$ -elementary operations for all  $i \in [0, n-1]$ . Thus the new code locators  $\alpha'_0, \alpha'_1, \ldots, \alpha'_{n-1}$  are  $\mathbb{F}_q$ -linearly independent and we have  $f(\alpha'_i) = 0$  for all  $i \in [0, n-1]$  at most k-1 times. Hence the number of zero rows z in  $\mathbf{C}'$  satisfies

$$z \le \left| \frac{k-1}{h} \right| = \left\lceil \frac{k}{h} \right\rceil - 1 \tag{2.26}$$

and

$$d_r(\mathcal{C}_r) = \min_{\mathbf{C} \in \mathcal{C}_r^*} \operatorname{rk}_q(\underline{\mathbf{C}}) \ge g - \left\lceil \frac{k}{h} \right\rceil + 1.$$
 (2.27)

From the Singleton-like bound we have

$$\log_{q^{hm}} q^{mk} \le g - d_r + 1 \quad \Longleftrightarrow \quad d_r \le g - \frac{k}{h} + 1. \tag{2.28}$$

Combining (2.27) and (2.28) we get

$$g - \left\lceil \frac{k}{h} \right\rceil + 1 \le d_r \le g - \frac{k}{h} + 1 \tag{2.29}$$

and the statement of the theorem follows, since  $d_r$  is an integer.

Thus folded Gabidulin codes fulfill the Singleton bound in the rank metric with equality, i.e., they are MRD codes, if and only if h divides k. If h does not divide k then Theorem 2.11.1 shows that the code still has the best minimum distance for the given parameters g, k and h but the size of the code could be larger in this case.

#### 2.11.1 Decoding of Folded Gabidulin Codes

Motivated by the results of Guruswami and Rudra (Guruswami and Rudra, 2008) and Vadhan (Vadhan, 2011), there is an interpolation-based decoding algorithm for folded Gabidulin codes (Mahdavifar and Vardy, 2012), which will be summarized in the following.

The algorithm consists of two steps: the *interpolation step* computes  $r \leq s$  non-zero and (left)  $\mathbb{L}_{q^m}[x]$ -independent vectors of linearized polynomials

$$\mathbf{Q}^{(i)} = [Q_0^{(i)}, Q_1^{(i)}, \dots, Q_s^{(i)}] \in \mathbb{L}_{q^m}[x]^{s+1} \setminus \{\mathbf{0}\}, \ \forall i = 1, \dots, r$$

such that they fulfill certain degree and evaluation conditions with respect to interpolation points obtained in a sliding-window manner from the received matrix  $\mathbf{C} + \mathbf{E}$ . The root-finding step finds all message polynomials f of degrees deg f < k such that

$$Q_0^{(i)} + \sum_{j=1}^u Q_j^{(i)} f(\alpha^{j-1} x) = 0 \quad \forall i = 1, \dots, r.$$

If the rank of the error matrix  $\mathbf{E}$  is less than  $\frac{s}{s+1}\left(\frac{g(h-s+1)-k+1}{h-s+1}\right)$ , then at least one satisfactory interpolation vector  $\mathbf{Q}^{(i)}$  exists, see (Mahdavifar and Vardy, 2012). The output list contains the transmitted message polynomial vector. The algorithm can be considered as a partial unique or list decoder (Bartz, 2017; Bartz and Sidorenko, 2017). A decoding scheme for folded Gabidulin codes with an improved decoding performance for high-rate codes was presented in (Bartz, 2017; Bartz and Sidorenko, 2017).

# 2.12 Decoding of Symmetric Errors

A *symmetric error* is an error matrix where the transpose of the matrix coincides with the matrix itself. When error matrices are symmetric, the correctable rank of the error can be increased by using special code constructions.

In (Pilipchuk and Gabidulin, 2005; Gabidulin and Pilipchuk, 2004; Gabidulin and Pilipchuk, 2006), it was shown that for Gabidulin codes that contain a linear subcode of symmetric matrices can correct symmetric error matrices of rank up to (n-1)/2.

In (Jerkovits *et al.*, 2021), the condition of symmetric errors was relaxed and *space-symmetric error matrices*, which have the property that their column and row spaces coincide, were considered. It is possible to use a Gabidulin code with the same property as

in (Pilipchuk and Gabidulin, 2005; Gabidulin and Pilipchuk, 2004; Gabidulin and Pilipchuk, 2006) to decode such space-symmetric errors of rank up to 2(n-k)/3 with high probability.

### 2.13 Further Classes of MRD Codes

In the last five years, there has been a growing interest in finding new MRD codes that are not equivalent<sup>5</sup> to a Gabidulin code. The first such family was discovered independently by Sheekey (2016) (twisted Gabidulin codes) and Otal and Özbudak (2016) (special case of twisted Gabidulin codes). These seminal works started a fruitful line of work, which resulted in various constructions of linear and non-linear MRD codes, for instance:

- Generalizations of twisted Gabidulin codes in (Sheekey, 2016, Remark 9) and (Lunardon et al., 2018; Otal and Özbudak, 2017; Sheekey, 2019b; Puchinger et al., 2017b).
- Some further constructions: linear MRD codes of dimension 2 which are not generalized Gabidulin codes (Horlemann-Trautmann and Marshall, 2017), new MRD codes from projective geometry (Csajbók et al., 2018a; Csajbók et al., 2018b; Bartoli et al., 2019), MRD codes with maximum idealizers, which are not generalized Gabidulin codes, for n = 7, q odd and n = 8,  $q \equiv 1 \pmod{3}$  (Csajbók et al., 2020),  $\mathbb{F}_q$ -linear MRD codes of  $\mathbb{F}_q^{6\times6}$  of dimension 12, minimum distance 5 (Marino et al., 2020).

A recent survey by Sheekey (2019a) gives a comprehensive overview of these code constructions. In the following, we briefly outline the construction of linear twisted Gabidulin codes.

A twisted Gabidulin code is defined by evaluating linearized polynomials, similar to Gabidulin codes. However, in contrast to Gabidulin codes, these polynomials do not have q-degree at most k-1, but have non-zero monomials of higher degree. The coefficients of these monomials are chosen in a special way such that the resulting code is an MRD code. Figure 2.3 illustrates twisted Gabidulin codes in different levels of generality. Note that the codes in (Sheekey, 2016) can be more general if we allow the codes to be non-linear over  $\mathbb{F}_{q^m}$ , but we restrict ourselves to  $\mathbb{F}_{q^m}$ -linear codes here.

**Definition 2.13.1** (Twisted Gabidulin Code, (Sheekey, 2016; Puchinger *et al.*, 2017b)). Let  $n, k, \ell \in \mathbb{N}$  with k < n and  $\ell \le n - k$ . Choose a

•  $hook\ vector^6\ \boldsymbol{h} \in \{0,\dots,k-1\}^\ell$  and a

<sup>&</sup>lt;sup>5</sup>By equivalent, we mean that one code can be obtained by a semi-linear isometry of the rank metric: that is, multiplication of an invertible  $n \times n$  matrix over  $\mathbb{F}_q$  from the right, multiplication with a constant in  $\mathbb{F}_{q^m}^*$ , and taking an automorphism (which fixes  $\mathbb{F}_q$ ) of each codeword entry.

<sup>6</sup>For didactic reasons, this definition slightly differs from the one in (Puchinger *et al.*, 2017b), i.e., this

<sup>&</sup>lt;sup>o</sup>For didactic reasons, this definition slightly differs from the one in (Puchinger *et al.*, 2017b), i.e., this is a special case.

- twist vector  $\mathbf{t} \in \{1, \dots, n-k\}^{\ell}$  with distinct entries  $t_i$ , and let
- $\eta \in (\mathbb{F}_{q^m} \setminus \{0\})^{\ell}$ .

The set of  $[k, t, h, \eta]$ -twisted linearized polynomials over  $\mathbb{F}_{q^m}$  is defined by

$$\mathcal{P}_{\boldsymbol{t},\boldsymbol{h},\boldsymbol{\eta}}^{n,k} = \left\{ f = \sum_{i=0}^{k-1} f_i x^{[i]} + \sum_{j=1}^{\ell} \eta_j f_{h_j} x^{[k-1+t_j]} : f_i \in \mathbb{F}_{q^m} \right\}.$$

Let  $\alpha_1, \ldots, \alpha_n \in \mathbb{F}_{q^m}$  be linearly independent over  $\mathbb{F}_q$  and write  $\boldsymbol{\alpha} = [\alpha_1, \ldots, \alpha_n]$ . The  $[\boldsymbol{\alpha}, \boldsymbol{t}, \boldsymbol{h}, \boldsymbol{\eta}]$ -twisted Gabidulin code of length n and dimension k is given by

$$\mathcal{TG}_{\boldsymbol{\alpha},\boldsymbol{t},\boldsymbol{h},\boldsymbol{\eta}}[n,k] = \left\{ [f(\alpha_1), f(\alpha_2), \dots, f(\alpha_n)] : f \in \mathcal{P}_{\boldsymbol{t},\boldsymbol{h},\boldsymbol{\eta}}^{n,k} \right\}.$$

In Sheekey's case (Sheekey, 2016)  $(n=m,\ell=1,\boldsymbol{h}=(0),\boldsymbol{t}=(1))$ , a twisted Gabidulin code is MRD if  $\eta=\eta_1$  has field norm  $N_{\mathbb{F}_{q^m}/\mathbb{F}_q}(\eta):=\frac{\eta^{q^n-1}}{\eta^q-1}\neq (-1)^{nk}$ . A non-zero  $\eta$  with this property exists for any field size q>2. Puchinger et al. (2017b) also gave a necessary condition for the given more general class of twisted Gabidulin codes to be MRD: if we choose a chain of proper subfields  $\mathbb{F}_q\subseteq\mathbb{F}_{q^{s_0}}\subseteq\mathbb{F}_{q^{s_1}}\subseteq\cdots\subseteq\mathbb{F}_{q^{s_\ell}}=\mathbb{F}_{q^m}$ , take the evaluation points  $\alpha_i$  from  $\mathbb{F}_{q^{s_0}}$  (this requires  $n\leq s_0$ ), and choose  $\eta_i\in\mathbb{F}_{q^{s_i}}\setminus\mathbb{F}_{q^{s_{i-1}}}$ , then the resulting code is MRD. Note that we have  $m\geq 2^\ell n$ , so the codes are defined over relatively large fields for large  $\ell$ .

A finite semifield (Dickson, 1905; Dickson, 1906; Albert, 1961; Knuth, 1963) is a finite division algebra with multiplicative identity, in which multiplication is not necessarily associative. It is well-known (see, e.g., (Cruz et al., 2016)) that a certain class of finite semifields is in one-to-one correspondence to the set of (not necessarily linear) MRD codes of length n and minimum rank distance n over  $\mathbb{F}_{q^n}$ . Note that in this case, all non-zero codewords are invertible matrices, which corresponds to the fact that division is possible in a division ring. This correspondence gave rise to various constructions of MRD codes inequivalent to Gabidulin codes (see (Sheekey, 2019a) for an overview), and also inspired some new MRD constructions for d < n. For instance, Sheekey's twisted Gabidulin codes (Sheekey, 2016) coincide with generalized twisted fields (Albert, 1961) for k = 1, but still provide MRD codes for k > 1.

When constructing new rank-metric codes, it is always of importance to show that the new codes are not equivalent to an existing code construction (see (Wan, 1996; Berger, 2003; Morrison, 2014) for the formal definition of equivalence in the rank metric). A practical tool that can show inequivalence for linear rank-metric codes in many cases was introduced by Neri et al. (2020). The method works well for several code constructions that are evaluation codes of linearized polynomials.

Decoding of Sheekey's twisted Gabidulin codes and its additive variants was studied in (Randrianarisoa and Rosenthal, 2017; Randrianarisoa, 2017; Li, 2019; Li and Kadir, 2019;

Kadir et al., 2021; Kadir and Li, 2020). The general decoding principle of (Randrianarisoa and Rosenthal, 2017; Randrianarisoa, 2017) is to solve a linear system of equations with one fewer equation than usual (cf. Section 2.8). The solutions of these equations form a one-dimensional space. In addition, we have one non-linear equation that arises from the special structure of the evaluation polynomials. It is shown in (Randrianarisoa and Rosenthal, 2017; Randrianarisoa, 2017) that we can efficiently find the unique solution of the decoder by solving this additional non-linear equation. So far, there is no polynomial-time decoder for twisted Gabidulin codes with multiple twists, or one twist  $t_1 > 1$ .

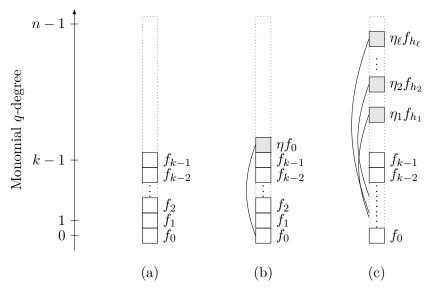


Figure 2.3: Illustration of evaluation polynomials of twisted Gabidulin codes. Boxes  $\square$  correspond to possibly non-zero coefficients. Arcs connect the corresponding hook and twist (gray background) coefficients (cf. Definition 2.13.1). (a) shows the evaluation polynomials of a Gabidulin code (Delsarte, 1978; Gabidulin, 1985; Roth, 1991):  $f_0, \ldots, f_{k-1}$  can be chosen arbitrarily, and all higher-degree coefficients are zero. (b) shows the evaluation polynomials of Sheekey's (Sheekey, 2016) twisted Gabidulin codes, where the k-th coefficient is a multiple of the zeroth coefficient. (c) shows the evaluation polynomials of the generalization of twisted Gabidulin codes in Definition 2.13.1: there are several non-zero coefficients of degree  $\geq k$ , and each depends on one of the coefficients  $f_0, \ldots, f_{k-1}$ .

# 3 Applications to Code-Based Cryptosystems

Most currently-used public-key cryptosystems are based on number-theoretic hard problems. As soon as large-scale quantum computers exist, it will be possible to solve these seemingly hard problems in polynomial time using Shor's algorithm (Shor, 1999). As it is likely that capable quantum computers will exist in the near future, there is a strong need to develop, analyze and standardize post-quantum cryptosystems. The importance is also reflected in the currently running post-quantum cryptography standardization competition by the National Institute of Standards and Technology (NIST).

Code-based cryptosystems are, besides lattice-based systems, among the very few candidates for post-quantum-secure public key encryption (PKE) schemes and key encapsulation mechanisms (KEM). Their security is based on hard computational problems in coding theory and en-/decryption often corresponds to en-/decoding of a code. One of the biggest challenges in designing code-based cryptosystems is to reduce the size of the public key. The most prominent example of a code-based cryptosystem is the McEliece system (McEliece, 1978), which is based on binary Goppa codes (in the Hamming metric).

Rank-metric code-based cryptosystems have been studied since 1991. Their main advantage is that the generic decoding problem in the rank metric, which is often the underlying hard problem of a code-based cryptosystem, is seemingly harder to solve than the corresponding problem in the Hamming metric. This results in significantly reduced key sizes compared to similar Hamming-metric schemes. Especially in the last 10 years, there have been several important developments related to rank-metric code-based cryptosystems. Two of the known systems, RQC and ROLLO, have been considered in the NIST standardization. According to the Status Report on the Second Round of the NIST Post-Quantum Cryptography Standardization Process (Alagic et al., 2020, Section 3.14, 3.16), although neither of them advanced on in the PQC standardization process due to that the security analysis of them needs more time to mature, NIST encouraged further research on rank-based cryptosystems, as their key and ciphertext sizes remain competitive compared to traditional Hamming-metric codes.

In this chapter, we present several known rank-metric code-based cryptosystems. We start with a discussion on hard problems in the rank metric (Section 3.1). In Section 3.2, we present rank-metric cryptosystems that can be seen as variants of the McEliece cryptosystem in the rank metric. Most prominently, we discuss the GPT system (the first known rank-metric code-based cryptosystem which basically adapts the McEliece principle) and its variants, including the—as of today—unbroken one by Loidrau, the one based on Gabidulin matrix codes, and the one based on quasi-cyclic low-rank-parity-check (LRPC) codes (which is used in the NIST submission ROLLO). We outline two schemes that are based on the hardness of list decoding rank-metric codes in Section 3.3. In Section 3.4, we discuss the NIST submission RQC, which is based on rank quasi-cyclic (or, more generally, ideal rank) codes. We briefly discuss signature schemes in Section 3.6 and conclude the chapter with a parameter comparison of unbroken rank-metric code-based cryptosystems in Section 3.5.

## 3.1 The Hardness of Problems in the Rank Metric

#### 3.1.1 Random Codes

In analogy to the Hamming metric, several problems in the rank metric can be defined and their hardness can be analyzed. We start with defining problems for *random* rank-metric codes. For these problems, we need the definition of a (random code) *rank syndrome decoding* (RSD) distribution as follows.

## **Definition 3.1.1** (Random Code Rank Syndrome Decoding (RSD) Distribution).

- Input: q, n, k, w, m
- Choose uniformly at random

$$-\mathbf{H} \stackrel{\$}{\leftarrow} \{\mathbf{A} \in \mathbb{F}_{q^m}^{(n-k) \times n} : \operatorname{rk}_{q^m}(\mathbf{A}) = n - k\}$$
$$-\mathbf{x} \stackrel{\$}{\leftarrow} \{\mathbf{a} \in \mathbb{F}_{q^m}^n : \operatorname{rk}_q(\mathbf{a}) = w\}$$

• Output:  $(\mathbf{H}, \mathbf{H}\mathbf{x}^{\top})$ 

Hence, the output is a random parity-check matrix and a random syndrome which stems from a random error of weight w.

The first problem that we are considering is the search RSD problem.

#### Problem 3.1.1 (Search RSD Problem).

- Input:  $(\mathbf{H}, \mathbf{y})$  from the RSD Distribution.
- Goal: Find one  $\mathbf{x} \in \{\mathbf{a} \in \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{a}) = w\}$  such that  $\mathbf{H}\mathbf{x}^\top = \mathbf{y}^\top$ .

This problem is therefore equivalent to decoding of the random rank-metric code defined by **H**. If  $w \leq \left\lfloor \frac{d-1}{2} \right\rfloor$ , where d denotes the minimum rank distance of the code defined by **H**, the search RSD problem returns the unique decoding result. For larger radii, the search RSD problem returns only *one* error of suitable weight.

The hardness of Problem 3.1.1 has been investigated by Gaborit and Zémor (2016). Their main result shows that if there is a probabilistic polynomial-time algorithm that solves the search RSD problem, then every problem in the complexity class NP can be solved by a probabilistic polynomial-time algorithm.

In (Chabaud and Stern, 1996; Ourivski and Johansson, 2002; Gaborit et al., 2016; Aragon et al., 2018; Bardet et al., 2020a; Bardet et al., 2020b), algorithms that solve the Search RSD problem are proposed. The recent work by Bardet et al. (2020b) results in the smallest computational complexity for many sets of parameters. This recent algorithmic breakthrough in the search for low-rank codewords in linear codes significantly reduced

the complexity of solving the Search RSD problem. Due to this, the parameters of several cryptographic schemes had to be increased to ensure the same security level. This algorithm consists of rewriting the problem in terms of a bivariate polynomial system, solving it with the use of a Gröbner basis (Bardet et al., 2020a; Bardet et al., 2020b). This improvement had a major impact on the parameters of all cryptographic schemes whose security relies on the difficulty of the Search RSD problem.

If  $w > \left\lfloor \frac{d-1}{2} \right\rfloor$ , there might be several codewords in the list and it makes sense to modify the problem. That means, consider the case that multiple  $\mathbf{x}$  with  $\mathrm{rk}_q(\mathbf{x}) = w$  such that  $\mathbf{H}\mathbf{x}^\top = \mathbf{y}^\top$  exist, but only one of them corresponds to a codeword that is the message. If we decide on a "wrong"  $\mathbf{x}$ , we cannot retrieve any information about the message. Hence, we need to consider the following *list* search RSD problem.

#### Problem 3.1.2 (List Search RSD Problem).

- Input:  $(\mathbf{H}, \mathbf{y})$  from the RSD Distribution.
- Goal: Find all  $\mathbf{x} \in \{\mathbf{a} \in \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{a}) = w\}$  such that  $\mathbf{H}\mathbf{x}^\top = \mathbf{y}^\top$ .

Note that the *list* search RSD problem is at least as hard as the search RSD problem as we have to find all vectors  $\mathbf{x}$  with this property.

We can also state the decisional version of the RSD problem as follows.

#### **Problem 3.1.3** (Decision RSD Problem).

- Input: (**H**, **y**) from the RSD Distribution.
- Goal: Decide with non-negligible advantage whether  $(\mathbf{H}, \mathbf{y})$  came from the RSD distribution or the uniform distribution over  $\mathbb{F}_{q^m}^{(n-k)\times n} \times \mathbb{F}_{q^m}^{n-k}$ .

#### 3.1.2 Gabidulin Codes

As a second step, we consider the hardness of problems when decoding *Gabidulin* codes. Similar to the problems in the previous section, we first define a Gabidulin code RSD distribution.

### **Definition 3.1.2** (Gabidulin Code Rank Syndrome Decoding (RSD) Distribution).

- Input: q, n, k, w, m
- Choose uniformly at random
  - $-\mathbf{H} \stackrel{\$}{\leftarrow} \mathcal{H}$ , where  $\mathcal{H}$  is the set of all parity check matrices of Gabidulin codes  $\mathcal{G}(n,k)$  over  $\mathbb{F}_{q^m}$

$$-\mathbf{x} \stackrel{\$}{\leftarrow} \{\mathbf{a} \in \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{a}) = w\}$$

• Output:  $(\mathbf{H}, \mathbf{H}\mathbf{x}^{\top})$ .

## Problem 3.1.4 (Gabidulin Code Search RSD Problem).

- Input: (H, y) from the Gabidulin Code RSD Distribution.
- Goal: Find one  $\mathbf{x} \in \{\mathbf{a} \in \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{a}) = w\}$  such that  $\mathbf{H}\mathbf{x}^\top = \mathbf{y}^\top$ .

If  $w \leq \left\lfloor \frac{d-1}{2} \right\rfloor$  where d = n - k + 1 is the minimum distance of the Gabidulin code, this problem is efficiently solvable by any Gabidulin decoder, see e.g., Section 2.8. The fastest known decoder from Puchinger and Wachter-Zeh (2016) has sub-quadratic decoding complexity over  $\mathbb{F}_{q^m}$  (see 2.8.3).

For larger w, there is no known polynomial-time decoder, but the syndrome-based decoder can be adapted by simply searching through the solution space of the syndrome key equation. That means that all solutions of a linear homogeneous system of equations over  $\mathbb{F}_{q^m}$  with n-k-w equations and w+1 unknowns have to be considered. Thus, the work factor of this search is  $q^{m(2w-n-k)}$ . In (Renner et~al.,~2020a), solving Problem 3.1.4 was accelerated compared to searching through the solution space of the key equation. The algorithm by Renner et~al.~(2020a) consists of repeatedly guessing a subspace that should have a large intersection with the error row and/or column space. The guessed space is then used as erasures in an Gabidulin error-erasure decoder. The algorithm terminates when the intersection of the guessed space and the error row and/or column space is large enough such that the decoder outputs a codeword that is close enough to the received word. The expected work factor of this randomized decoding approach is a polynomial term times  $q^{m(n-k)-w(n+m)+w^2+\min\{2\xi(\frac{n+k}{2}-\xi),wk\}}$ , where n is the code length, q the size of the base field, m the extension degree of the field, k the code dimension, k the number of errors, and k is k in the extension degree of the field, k the code dimension, k the number of errors, and k is k in the extension degree of the field, k the code dimension, k the number of errors, and k is k in the extension degree of the field, k the code dimension, k the number of errors, and k is k in the extension degree of the field, k the code dimension, k the number of errors, and k is k in the extension degree of the field, k the code dimension, k the number of errors, and k is k in the extension degree of the field.

Further notice that the hardness of Problem 3.1.4 is upper bounded by the hardness of Problem 3.1.5 below where  $all \mathbf{x}$  with this property have to be found.

# Problem 3.1.5 (Gabidulin Code List Search RSD Problem).

- Input: (**H**, **y**) from the Gabidulin Code RSD Distribution.
- Goal: Find all  $\mathbf{x} \in \{\mathbf{a} \in \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{a}) = w\}$  such that  $\mathbf{H}\mathbf{x}^\top = \mathbf{y}^\top$ .

When  $w \leq \left\lfloor \frac{n-k}{2} \right\rfloor$ , the decoding result is unique and the Gabidulin Code List Search RSD Problem (Problem 3.1.5) is equivalent to the Gabidulin Code Search RSD Problem (Problem 3.1.4) and efficiently solvable. However, for  $w > \left\lfloor \frac{n-k}{2} \right\rfloor$ , there are cases in which the two problems differ substantially. For instance, the problem of recovering the message

from the ciphertext in the Faure–Loidreau (FL) system or in the RQC system can be reduced to the *Gabidulin Code List Search RSD Problem* since by finding all errors of weight w, the actual error will be contained in the output list. The *Gabidulin Code Search RSD Problem* is not necessarily useful when  $w > \left\lfloor \frac{n-k}{2} \right\rfloor$  as it find only one word of the list.

The Gabidulin Code List Search RSD Problem (Problem 3.1.5) when  $w > \left\lfloor \frac{n-k}{2} \right\rfloor$  is equal to list decoding a corrupted codeword of a Gabidulin code, where the error has rank weight w. The exact complexity of this problem is unknown, but there are some partial answers<sup>1</sup>. There are families of Gabidulin codes of rate  $R \geq 1/6$  for which some received words have lists of exponential size even for decoding only one error beyond  $\left\lfloor \frac{n-k}{2} \right\rfloor$ , see (Raviv and Wachter-Zeh, 2016). This result was recently generalized to more general classes of MRD codes by Trombetti and Zullo (2020). These bounds on the list size of some Gabidulin codes proves that an equally general algorithm as the Guruswami–Sudan list decoding algorithm for Reed–Solomon codes cannot exist for Gabidulin codes. For  $w \geq n - \sqrt{n(n-d)}$ , the Gabidulin Code List Search RSD Problem (Problem 3.1.5) has exponential worst-case complexity since the list size grows exponential in n, see (Wachter-Zeh, 2013, Theorem 1). The worst-case complexity can be considered as an indication for the average complexity which is usually considered in cryptography to assess the security level.

Notice that in (Guruswami and Wang, 2013c), subcodes of Gabidulin codes were efficiently list-decoded, but this result does not apply to Gabidulin codes themselves. Based on the previous partial answers on the hardness of list decoding Gabidulin codes, it is widely conjectured that Problem 3.1.5 is hard.

For completeness, the decisional version of Problem 3.1.4 is shown below.

## Problem 3.1.6 (Gabidulin Code Decision RSD Problem).

- Input: (**H**, **y**) from the Gabidulin Code RSD Distribution.
- Goal: Decide with non-negligible advantage whether  $(\mathbf{H}, \mathbf{y})$  came from the Gabidulin Code RSD distribution or the uniform distribution over  $\mathbb{F}_{q^m}^{(n-k)\times n} \times \mathbb{F}_{q^m}^{n-k}$

To solve the correspoding decisional problem, no faster approach than trying to solve the associated search problems is known. This is usually done for all decoding-based problems. A similar decisional problem can be given for list decoding.

#### 3.1.3 Problems Related to Decoding Interleaved Rank-Metric Codes

In this subsection, we consider problems related to random interleaved rank-metric codes and later also related to interleaved Gabidulin codes.

<sup>&</sup>lt;sup>1</sup>See also Section 2.9 for a summary on list decoding of rank-metric codes.

## **Definition 3.1.3** (Interleaved Random Code RSD Distribution).

- Input: q, n, k, w, m.
- Choose uniformly at random

$$-\mathbf{H} \stackrel{\$}{\leftarrow} \{\mathbf{A} \in \mathbb{F}_{q^m}^{(n-k) \times n} : \operatorname{rk}_{q^m}(\mathbf{A}) = n - k\}$$
$$-\mathbf{X} \stackrel{\$}{\leftarrow} \{\mathbf{X} \in \mathbb{F}_{q^m}^{u \times n} : \operatorname{rk}_q(\mathbf{X}) = w\}$$

• Output:  $(\mathbf{H}, \mathbf{H}\mathbf{X}^{\top})$ .

# Problem 3.1.7 (Interleaved Random Code Search RSD Problem).

- Input:  $(\mathbf{H}, \mathbf{Y})$  from the Interleaved Random Code RSD Distribution.
- Goal: Find one  $\mathbf{X} \in {\mathbf{X} \in \mathbb{F}_{q^m}^{u \times n} : \mathrm{rk}_q(\mathbf{X}) = w}$  such that  $\mathbf{H}\mathbf{X}^{\top} = \mathbf{Y}^{\top}$ .

This problem is clearly as least at hard as solving the same problem for a specific code, in particular, the *Interleaved Gabidulin Code Search RSD Problem* as introduced in the following.

The hardness of both problems is discussed afterwards.

# **Definition 3.1.4** (Interleaved Gabidulin Code RSD Distribution).

- Input: q, n, k, w, m.
- Choose uniformly at random
  - $\mathbf{H} \stackrel{\$}{\leftarrow} \mathcal{H}$ , where  $\mathcal{H}$  is the set of all parity check matrices of Gabidulin codes  $\mathcal{G}(n,k)$  over  $\mathbb{F}_{q^m}$ .
  - $-\mathbf{X} \stackrel{\$}{\leftarrow} {\{\mathbf{X} \in \mathbb{F}_{q^m}^{u \times n} : \mathrm{rk}_q(\mathbf{X}) = w\}}.$
- Output:  $(\mathbf{H}, \mathbf{H} \mathbf{X}^{\top})$ .

# Problem 3.1.8 (Interleaved Gabidulin Code Search RSD Problem).

- Input: (H, Y) from the Interleaved Gabidulin Code RSD Distribution.
- Goal: Find one  $\mathbf{X} \in \{\mathbf{A} \in \mathbb{F}_{q^m}^{u \times n} : \mathrm{rk}_q(\mathbf{A}) = w\}$  such that  $\mathbf{H} \mathbf{X}^\top = \mathbf{Y}^\top$ .

The Interleaved Gabidulin Code Search RSD Problem is equal to decoding a corrupted codeword of an interleaved Gabidulin code of interleaving order u, where the error has rank weight w over  $\mathbb{F}_q$ . This problem has been extensively studied and it turns out that the hardness depends on w and the  $\mathbb{F}_{q^m}$ -rank of  $\mathbf{X}$ . In the following, we discuss the hardness of Problem 3.1.7 (interleaved random code) and Problem 3.1.8 (interleaved Gabidulin code). Notice that Problem 3.1.7 is clearly at least as hard as Problem 3.1.8.

- For  $w \leq \lfloor \frac{n-k}{2} \rfloor$ , we can decode each of the u rows separately as the decoding result is guaranteed to be unique due to the minimum distance of the Gabidulin code. Therefore, Problem 3.1.7 reduces to u instances of Problem 3.1.1 with the corresponding hardness considerations. Similarly, Problem 3.1.8 reduces to u instances of Problem 3.1.4 which is efficiently solvable by any Bounded Minimum Distance (BMD) decoder for Gabidulin codes.
- For the special case of high interleaving order  $u \geq w$  where  $w \leq n k 1$  and  $\operatorname{rk}_{q^m}(\mathbf{X}) = w$ , Problem 3.1.7 and Problem 3.1.8 both have a polynomial-time solution (without failure probability) given by the rank-metric Metzner-Kapturowski decoder by Renner *et al.* (2021b). Thus, decoding (any) linear interleaved rank-metric code of high interleaving order is an easy problem.
- For  $w \leq \lfloor \frac{u}{u+1}(n-k) \rfloor$ , the Interleaved Gabidulin Code Search RSD Problem (Problem 3.1.8) can be solved in  $O(un^2)$  operations in  $\mathbb{F}_{q^m}$ , cf. (Sidorenko et al., 2011a), with high probability  $(>1-\frac{4}{q^m})$ .
  - For the unlikely cases (with probability less than  $\frac{4}{q^m}$ ) of decoding failure, it is not proven to be a hard problem. Although there is no such general complexity result, decoding explicitly the errors for which all known decoders fail is considered hard by the community and has been subject to intensive research for more than 13 years (since the decoder by Loidreau and Overbeck (2006) was proposed). In the Hamming metric, the equivalent problem for RS codes has been studied since the work by Krachkovsky and Lee (1997) and more than a dozen of papers have dealt with the decoding algorithms for these codes since then. None of these papers was able to give a polynomial-time decoding algorithm for the case when Krachkovsy–Lee's algorithm fails. Furthermore, the same results on the list size as for Gabidulin codes apply for interleaved Gabidulin codes since it consists of u parallel Gabidulin codewords and at the same time can be seen as a single codeword of a Gabidulin code with larger field size.
- For w > d, the complexity of both interleaved problems grows exponentially in n.
- For horizontal interleaved random codes, the corresponding problem is called Rank Support Learning (RSL) and was introduced by Gaborit et al. (2017a, Definition 7). The recent paper by Bardet and Briaud (2021) proposed an algebraic attack on RSL which clearly outperforms the previous attacks.
- The *Decoding one Out of Many* approach by Sendrier (2011) in the Hamming metric provides a way to recover one of the *u* error vectors (and therefore the span of the whole matrix **X**). However, this work has not yet been adapted to the rank metric.

If it will be adapted, it should reduce the exponent of the work factor of brute-force decoding for Problem 3.1.7 (of course this also applies for Problem 3.1.8, but this problem can efficiently be solved up to  $w \leq \lfloor \frac{u}{u+1}(n-k) \rfloor$  in any case).

The following table provides an overview of the previously considered problems and the rank-metric code-based cryptosystems that rely on these problems.

| Problem No.     | Problem               | Cryptosystems                |  |  |
|-----------------|-----------------------|------------------------------|--|--|
| Problem 3.1.1   | Search RSD Problem    | All GPT variants (including  |  |  |
|                 |                       | Loidreau's new system)       |  |  |
| Problem 3.1.2   | List Search RSD Prob- | RQC (ciphertext),            |  |  |
|                 | lem                   | Faure–Loidreau (ciphertext), |  |  |
|                 |                       | RAMESSES (public key, ci-    |  |  |
|                 |                       | phertext)                    |  |  |
| Problem 3.1.4   | Gabidulin Code Search | Faure–Loidreau               |  |  |
|                 | RSD Problem           |                              |  |  |
| Problem $3.1.5$ | Gabidulin Code List   | RQC, Faure–Loidreau          |  |  |
|                 | Search RSD Problem    |                              |  |  |
| Problem 3.1.8   | Interleaved Gabidulin | Original Faure–Loidreau      |  |  |
|                 | Code Search RSD       |                              |  |  |
|                 | Problem               |                              |  |  |

**Table 3.1:** Overview of problems in the rank metric and the corresponding cryptosystems.

# 3.2 McEliece-like Systems

In 1978, McEliece (1978) proposed a public-key cryptosystem whose security is based on the generic decoding problem for linear error-correcting codes.

Compared to the widely-used Rivest, Shamir and Adleman (RSA) public-key cryptosystem (Rivest *et al.*, 1978), the McEliece cryptosystem suffers from larger public keys (when employing Goppa codes as originally suggested), which is a drawback for practical applications.

In general, to use a certain class of codes in the McEliece principle, the challenge is to find codes with a good error-correction capability and a weak code structure or a code structure that can be hidden effectively, in order to reduce the public key size. Since the proposal of the original McEliece cryptosystem, which is based on binary Goppa codes, several variants based on different code families were proposed. Besides McEliece variants based on codes in the Hamming metric, there are McEliece-like cryptosystems that are

based on codes in the rank metric. One benefit of rank-metric code-based cryptosystems is, that the generic decoding problem in the rank metric is significantly harder than in the Hamming metric which allows for very small public keys.

In the following, we give a summary of existing McEliece-like cryptosystems based on rank-metric codes, including variants based on algebraic rank-metric codes (e.g., Gabidulin codes) as well as random rank-metric codes (e.g., LRPC codes).

# 3.2.1 Description of the Cryptosystems

For the description of the different rank-metric code-based cryptosystems we use the following terminology and notation.

- Security level (bit): SL
- Public key: pk
- Secret key: sk
- Plaintext: m
- Ciphertext:  $\mathbf{c}$
- Ciphertext length ct
- Set of global parameters: param
- Deterministic assignment:  $\leftarrow$
- Random assignment:  $\stackrel{\$}{\leftarrow}$
- Setup: param  $\leftarrow$  Setup  $\left(1^{\mathsf{SL}}\right)$
- Key generation:  $(pk, sk) \leftarrow KeyGen(param)$
- Encryption:  $\mathbf{c} \leftarrow \mathsf{Enc}(\mathsf{pk}, \mathbf{m})$
- Decryption:  $\mathbf{m} \leftarrow \mathsf{Dec}(\mathsf{sk}, \mathbf{c})$
- $\mathsf{GL}_n\left(\mathbb{F}_q\right)$ : the set of all full-rank matrices of  $\mathbb{F}_q^{n\times n}$

Unless otherwise stated, the parameters q, m, n and k are chosen according to Table 3.2.

| Parameter | Stands for       | Restriction |  |
|-----------|------------------|-------------|--|
| q         | field order      | prime power |  |
| m         | extension degree | $1 \le m$   |  |
| n         | code length      | $n \le m$   |  |
| k         | code dimension   | $k \le n$   |  |

Table 3.2: Parameters of the GPT variants.

# 3.2.2 McEliece-type Rank-Metric Cryptosystems based on Gabidulin Codes

Gabidulin, Paramonov, Tretjakov (GPT) proposed a Gabidulin code-based cryptosystem (Gabidulin et al., 1991) with very compact keys compared to the original McEliece cryptosystem (McEliece, 1978).

Compared to codes in the Hamming metric, rank metric codes have an even stronger structure that can be exploited by an attacker to break the corresponding cryptosystems. As a result, the GPT cryptosystem has a long history of attacks and fixes, which is illustrated in Figure 3.1.

### Original GPT Cryptosystem

The original GPT cryptosystem (Gabidulin et al., 1991) is a rank-metric variant of the McEliece cryptosystem that is based on Gabidulin codes. In the GPT cryptosystem (Gabidulin et al., 1991), the notion of a column scrambling matrix (over  $\mathbb{F}_q$ ) does not increase the security level of the system since the Moore-structure of the Gabidulin code generator matrix is preserved. Hence, a different distortion transformation using low-rank distortion matrix  $\mathbf{X}$  is used to hide the inherent structure of the Gabidulin code in the public code described by pk. Detailed descriptions of the key generation, encryption and decryption of the original GPT cryptosystem are provided in Algorithms 2-4.

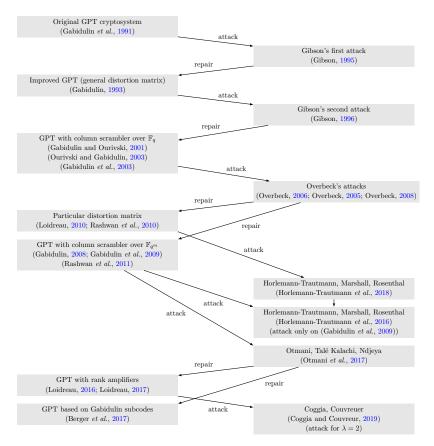


Figure 3.1: Overview of the history of GPT variants and attacks.

```
Algorithm 2: KeyGen (·) (Gabidulin et al., 1991)

Input: Parameters param = \{q, m, n, k, t_X < \lfloor \frac{n-k}{2} \rfloor, t_{\mathsf{pub}} = \lfloor \frac{n-k}{2} \rfloor - t_X\}
Output: Secret key sk, public key pk

1 \mathbf{g} \overset{\$}{\leftarrow} \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{g}) = n
2 \mathbf{S} \overset{\$}{\leftarrow} \mathsf{GL}_k (\mathbb{F}_{q^m})
3 \mathbf{a} \overset{\$}{\leftarrow} \mathbb{F}_{q^m}^k, \mathbf{b} \overset{\$}{\leftarrow} \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{b}) \leq t_X
4 \mathbf{G}_{\mathcal{C}} = \mathcal{M}_{k,q}(\mathbf{g})^a
5 \mathbf{X} \leftarrow \mathbf{a}^{\mathsf{T}} \mathbf{b} where \mathrm{rk}_q(\mathbf{X}) \leq t_X
6 \mathfrak{D}(\mathbf{G}_{\mathcal{C}}) = \mathbf{S}(\mathbf{G}_{\mathcal{C}} + \mathbf{X})
7 \mathrm{return} \ sk \leftarrow (\mathbf{S}, \mathbf{G}_{\mathcal{C}}), \ pk \leftarrow (\mathfrak{D}(\mathbf{G}_{\mathcal{C}}), t_{\mathsf{pub}}, t_X)
```

 $<sup>{}^</sup>a\mathcal{M}_{s,q}\left(\mathbf{a}\right) \in \mathbb{F}_{q^m}^{s \times n}$  the  $s \times n$  Moore matrix for a vector  $\mathbf{a} = (a_1, a_2, \dots, a_n) \in \mathbb{F}_{q^m}^n$ .

## **Algorithm 3:** Enc ( $\cdot$ ) (Gabidulin *et al.*, 1991)

Input: Plaintext  $\mathbf{m} \in \mathbb{F}_{q^m}^k$ , public key  $\mathsf{pk} = (\mathfrak{D}\left(\mathbf{G}_{\mathcal{C}}\right), t_{\mathsf{pub}}, t_X)$ 

Output: Ciphertext  $\mathbf{c} \in \mathbb{F}_{q^n}^n$ 

- $\begin{array}{ll} \mathbf{1} \ \mathbf{e} \xleftarrow{\$} \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{e}) = t_{\mathsf{pub}} = \lfloor \frac{n-k}{2} \rfloor t_X \\ \mathbf{2} \ \mathbf{c} \leftarrow \mathbf{m}\mathfrak{D}\left(\mathbf{G}_{\mathcal{C}}\right) + \mathbf{e} = \mathbf{m}\mathbf{S}\mathbf{G}_{\mathcal{C}} + \mathbf{m}\mathbf{S}\mathbf{X} + \mathbf{e} \end{array}$
- з return c

# **Algorithm 4:** $Dec(\cdot)$ (Gabidulin *et al.*, 1991)

Input: Ciphertext  $\mathbf{c} \in \mathbb{F}_{q^m}^n$ , secret key  $\mathsf{sk} = (\mathbf{S}, \mathbf{G}_{\mathcal{C}})$ 

Output: Plaintext  $\mathbf{m} \in \mathbb{F}_{q^m}^k$ 

- 1 **c** is a codeword of the (n,k) Gabidulin code  $\mathcal{C}$  described by  $\mathbf{G}_{\mathcal{C}}$  that is corrupted by an error  $\tilde{\mathbf{e}} = \mathbf{mSX} + \mathbf{e}$  with  $\mathrm{rk}_q(\tilde{\mathbf{e}}) \leq \lfloor \frac{n-k}{2} \rfloor$  that can be corrected by a secret efficient decoder  $\mathsf{Decode}_{\mathcal{C}}(\cdot)$  for  $\mathcal{C}$
- $\mathbf{\tilde{m}} \leftarrow \mathsf{Decode}_{\mathcal{C}}(\mathbf{c})$
- 3 return  $\mathbf{m} \leftarrow \tilde{\mathbf{m}} \mathbf{S}^{-1}$

## Gibson's Attack on the Original GPT Cryptosystem

Gibson (1995) proposed an attack on the original GPT cryptosystem that exploits the Moore structure of the generator matrix of Gabidulin codes to obtain an alternative secret key from the public key

$$pk = S(G + a^{T}b)$$
(3.1)

where  $\mathbf{S} \in \mathbb{F}_{q^m}^{k \times k}$  is a full-rank matrix,  $\mathbf{a} \in \mathbb{F}_{q^m}^{1 \times k}$  and  $\mathbf{b} \in \mathbb{F}_{q^m}^{1 \times n}$  with  $\mathrm{rk}_q(\mathbf{b}) \leq t_X$ . In particular, Gibson's attack computes matrices  $\tilde{\mathbf{G}}$ ,  $\tilde{\mathbf{S}}$  and  $\tilde{\mathbf{X}}$  from (3.1) such that  $\tilde{\mathbf{G}}$  is a generator matrix of a Gabidulin code  $\mathcal{G}(n,k)$ ,  $\mathsf{pk} = \tilde{\mathbf{S}}(\tilde{\mathbf{G}} + \tilde{\mathbf{X}})$  and  $\tilde{\mathbf{X}} \in \mathbb{F}_{q^m}^{n \times n}$  with  $\operatorname{rk}_q(\mathbf{X}) \leq t_X$ . In the following we give a brief description of the idea behind Gibson's attack.

There exists a matrix  $\mathbf{T} \in \mathbb{F}_{q^m}^{k \times k}$  such that

$$\mathbf{T}\left(\mathbf{I}_{k} \mid \mathbf{X}\right) = \mathbf{G} + \mathbf{a}^{\top} \mathbf{b}. \tag{3.2}$$

Partition the matrix **G** and the vectors **g** and **b** into the first k and remaining n-kcolumns, i. e.,

$$\mathbf{G} = (\mathbf{P} \mid \mathbf{Q}), \quad \mathbf{g} = (\mathbf{p} \mid \mathbf{q}), \quad \mathbf{b} = (\mathbf{b}_1 \mid \mathbf{b}_2)$$

with  $\mathbf{P} \in \mathbb{F}_{q^m}^{k \times k}$ ,  $\mathbf{Q} \in \mathbb{F}_{q^m}^{k \times (n-k)}$ ,  $\mathbf{p}, \mathbf{b}_1 \in \mathbb{F}_{q^m}^k$  and  $\mathbf{q}, \mathbf{b}_2 \in \mathbb{F}_{q^m}^{n-k}$ . Then we can write (3.2) as

$$\mathbf{T} = \mathbf{P} + \mathbf{a}^{\mathsf{T}} \mathbf{b}_1$$
 and  $\mathbf{T} \mathbf{X} = \mathbf{Q} + \mathbf{a}^{\mathsf{T}} \mathbf{b}_2$ .

and get that

$$\mathbf{PX} = \mathbf{Q} + \mathbf{a}^{\top} (\mathbf{b}_2 - \mathbf{b}_1 \mathbf{X}). \tag{3.3}$$

Define the reversed vectors

$$\bar{\mathbf{p}} = \left(p_1^{[k-1]}, p_2^{[k-1]}, \dots, p_k^{[k-1]}\right),$$

$$\bar{\mathbf{q}} = \left(q_1^{[k-1]}, q_2^{[k-1]}, \dots, q_{n-k}^{[k-1]}\right),$$

$$\bar{\mathbf{a}} = \left(a_k, a_{k-1}^{[1]}, a_{k-2}^{[2]}, \dots, a_1^{[k-1]}\right),$$

the all-one vector  $\mathbf{1} \coloneqq (1, \dots, 1) \in \mathbb{F}_{q^m}^k$  and the matrices

$$\mathbf{F}_j \coloneqq egin{pmatrix} f_j^{[1]} & & & & & \\ & f_j^{[1]} & & & & \\ & & \ddots & & & \\ & & & f_j^{[k-1]} & \end{pmatrix} \quad ext{and} \quad \mathbf{X}_j \coloneqq ig(\mathbf{x}_j \quad \mathbf{x}_j^{[1]} \quad \dots \quad \mathbf{x}_j^{[k-1]}ig)$$

where  $\mathbf{x}_j$  denotes the j-th column of  $\mathbf{X}$ . Then we can rewrite (3.3) as the reduced linear system of equations

$$\bar{\mathbf{p}}\mathbf{X}_{j} = \bar{q}_{j}\mathbf{1} + \bar{\mathbf{a}}\mathbf{F}_{j}, \quad \forall j = 1,\dots,n-k.$$
 (3.4)

Gibson showed, that (3.4) can be solved in  $O(m^3q^m)$  operations in  $\mathbb{F}_{q^m}$  and thus breaks the original GPT cryptosystem for the parameters proposed in (Gabidulin *et al.*, 1991). Although Gibson's attack breaks the original GPT cryptosystem for practical parameters  $(n \leq 30)$ , the complexity of the attack is *exponential* in the length of the code.

### Modified GPT Variant by Gabidulin

In order to prevent the attack by Gibson (1995), Gabidulin (1993) presented a modified variant of the GPT cryptosystem which uses a more general distortion matrix  $\mathbf{X}$ . The modified key generation is described in Algorithm 5.

```
Algorithm 5: KeyGen (·) (Gabidulin, 1993)

Input: Parameters param = \{q, m, n, k, t_X < \lfloor \frac{n-k}{2} \rfloor, t_{\mathsf{pub}} = \lfloor \frac{n-k}{2} \rfloor - t_X\}
Output: Secret key sk, public key pk

1 \mathbf{g} \overset{\$}{\leftarrow} \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{g}) = n
2 \mathbf{S} \overset{\$}{\leftarrow} \mathsf{GL}_k (\mathbb{F}_{q^m})
3 \mathbf{A} \overset{\$}{\leftarrow} \mathbb{F}_{q^m}^{k \times t_X}, \mathbf{B} \overset{\$}{\leftarrow} \mathbb{F}_{q^m}^{t_X \times n} : \mathrm{rk}_q(\mathbf{B}) \leq t_X
4 \mathbf{G}_{\mathcal{C}} = \mathcal{M}_{k,q}(\mathbf{g})
5 \mathbf{X} \leftarrow \mathbf{A}\mathbf{B} where \mathrm{rk}_q(\mathbf{X}) \leq t_X
6 \mathfrak{D}(\mathbf{G}_{\mathcal{C}}) = \mathbf{S}(\mathbf{G}_{\mathcal{C}} + \mathbf{X})
7 return sk \leftarrow (\mathbf{S}, \mathbf{G}_{\mathcal{C}}), pk \leftarrow (\mathfrak{D}(\mathbf{G}_{\mathcal{C}}), t_{\mathsf{pub}}, t_X)
```

#### Gibson's Attack on the Modified GPT Cryptosystem

(Gibson, 1996) presented a second attack that breaks the modified GPT cryptosystem. Since the attack is based on the ideas of the initial attack (Gibson, 1995), a detailed description is omitted.

# Modification with Right Scrambler over $\mathbb{F}_q$

In order to prevent Gibson's attacks, new methods (Gabidulin and Ourivski, 2001; Ourivski and Gabidulin, 2003) were proposed to repair the GPT cryptosystem. In particular, GPT variants with a combination of a distortion matrix together with a column scrambling matrix  $\mathbf{P}$  over  $\mathbb{F}_q$  provided resilience against Gibson's attacks. The key generation, encryption and decryption are described in Algorithm 6 – 8 respectively.

```
Algorithm 6: KeyGen (·) (Gabidulin and Ourivski, 2001; Ourivski and Gabidulin, 2003)
```

```
Input: Parameters param = \{q, m, n, k, r, t_X < \lfloor \frac{n-k}{2} \rfloor, t_{\mathsf{pub}} = \lfloor \frac{n-k}{2} \rfloor t_X \}
Output: Secret key sk, public key pk

1 \mathbf{g} \overset{\$}{\leftarrow} \mathbb{F}_q^n : \mathrm{rk}_q(\mathbf{g}) = n
2 \mathbf{S} \overset{\$}{\leftarrow} \mathrm{GL}_k (\mathbb{F}_{q^m})
3 \mathbf{P} \overset{\$}{\leftarrow} \mathrm{GL}_{n+r} (\mathbb{F}_q)
4 \mathbf{X}_1 \overset{\$}{\leftarrow} \mathbb{F}_{q^m}^{k \times r}, \mathbf{X}_2 \overset{\$}{\leftarrow} \mathbb{F}_{q^m}^{k \times n} : \mathrm{rk}_q(\mathbf{X}_2) = t_X
5 \mathbf{P}, \mathbf{X}_1, \mathbf{X}_2 are chosen to have certain properties (see Gabidulin and Ourivski, 2001; Ourivski and Gabidulin, 2003)
6 \mathbf{G}_{\mathcal{C}} = \mathcal{M}_{k,q} (\mathbf{g})
7 \mathfrak{D} (\mathbf{G}_{\mathcal{C}}) = \mathbf{S} ((\mathbf{0} \mid \mathbf{G}_{\mathcal{C}}) + (\mathbf{X}_1 \mid \mathbf{X}_2)) \mathbf{P} = \mathbf{S} (\mathbf{X}_1 \mid \mathbf{G}_{\mathcal{C}} + \mathbf{X}_2) \mathbf{P} \text{ with } \mathbf{0} \in \mathbb{F}_q^{k \times r}
8 \mathbf{return} \ sk \leftarrow (\mathbf{S}, \mathbf{P}, \mathbf{G}_{\mathcal{C}}), \ pk \leftarrow (\mathfrak{D} (\mathbf{G}_{\mathcal{C}}), t_{\mathsf{pub}}, t_X, r)
```

**Algorithm 7:** Enc (⋅) (Gabidulin and Ourivski, 2001; Ourivski and Gabidulin, 2003)

```
Input: Plaintext \mathbf{m} \in \mathbb{F}_{q^m}^k, public key \mathsf{pk} = (\mathfrak{D}\left(\mathbf{G}_{\mathcal{C}}\right), t_{\mathsf{pub}}, t_X, r)

Output: Ciphertext \mathbf{c} \in \mathbb{F}_{q^m}^{n+r}

1 \mathbf{e} \stackrel{\$}{\leftarrow} \mathbb{F}_{q^m}^{n+1} : \mathrm{rk}_q(\mathbf{e}) = t_{\mathsf{pub}} = \lfloor \frac{n-k}{2} \rfloor - t_X

2 \mathbf{c} \leftarrow \mathbf{m} \mathfrak{D}\left(\mathbf{G}_{\mathcal{C}}\right) + \mathbf{e} = \mathbf{m} \mathbf{S}\left((\mathbf{0} \mid \mathbf{G}_{\mathcal{C}}) + (\mathbf{X}_1 \mid \mathbf{X}_2)\right) \mathbf{P} + \mathbf{e}

3 return \mathbf{c}
```

**Algorithm 8:** Dec (⋅) (Gabidulin and Ourivski, 2001; Ourivski and Gabidulin, 2003)

```
Input: Ciphertext \mathbf{c} \in \mathbb{F}_{q^m}^{n+r}, secret key \mathsf{sk} = (\mathbf{S}, \mathbf{P}, \mathbf{G}_{\mathcal{C}})
Output: Plaintext \mathbf{m} \in \mathbb{F}_{q^m}^k

1 Compute \mathbf{c}' := \mathbf{c}\mathbf{P}^{-1} = \mathbf{m}\mathbf{S}\left((\mathbf{0} \mid \mathbf{G}_{\mathcal{C}}) + (\mathbf{X}_1 \mid \mathbf{X}_2)\right) + \mathbf{e}\mathbf{P}^{-1}

2 Since \mathbf{P} \in \mathbb{F}_q^{(r+n) \times (r+n)} we have that \mathbf{e}' := \mathbf{e}\mathbf{P}^{-1} satisfies \mathrm{rk}_q(\mathbf{e}') \leq t_{\mathsf{pub}}

3 From \mathbf{c}' extract the subvector

\mathbf{c}'' = (c'_{r+1}, c'_{r+2} \dots, c'_{r+n}) = \mathbf{m}\mathbf{S}\mathbf{G}_{\mathcal{C}} + \mathbf{m}\mathbf{X}_2 + \mathbf{e}''

where \mathbf{e}'' corresponds to the last n positions of \mathbf{e}' = \mathbf{e}\mathbf{P}^{-1}

4 Since \mathrm{rk}_q(\mathbf{e}'') \leq \mathrm{rk}_q(\mathbf{e}') \leq t_{\mathsf{pub}} and \mathrm{rk}_q(\mathbf{m}\mathbf{X}_2) \leq t_X we have that \mathbf{c}'' is a codeword of the Gabidulin code \mathcal{C} that is corrupted by an error \mathbf{m}\mathbf{X}_2 + \mathbf{e}'' of rank at most t_X + t_{\mathsf{pub}} \leq \lfloor \frac{n-k}{2} \rfloor that can be corrected by a secret efficient decoder for \mathcal{C}

5 \tilde{\mathbf{m}} \leftarrow \mathsf{Decode}_{\mathcal{C}}(\mathbf{c})

6 \mathsf{return} \ \mathbf{m} \leftarrow \tilde{\mathbf{m}}\mathbf{S}^{-1}
```

### Structural Attacks

After the series of Gibson's attacks and the subsequent repairs, (Overbeck, 2005) presented structural key-recovery attack on the original cryptosystem. Unlike the attacks by Gibson, Overbeck's attacks run in polynomial time and thus break the GPT cryptosystem for all parameters. The attack on the original GPT cryptosystem was extended in (Overbeck, 2006) to break the GPT variants using a column scrambling matrix (Ourivski and Gabidulin, 2003). Another variant of Overbeck's attacks (Overbeck, 2008) combines methods from (Overbeck, 2005; Overbeck, 2006) in order to cryptanalyze (Gabidulin et al., 2003). In the following we describe the main idea of Overbeck's attacks.

For an  $[n, k, d]_q^{\mathsf{R}}$  linear rank-metric code  $\mathcal{C}$  with generator matrix  $\mathbf{G}$ , we define  $\mathcal{C}^{q^i}$  to be the code obtained by taking each codeword in  $\mathcal{C}$  to the element-wise power  $q^i$ . Note, that the code  $\mathcal{C}^{q^i}$  is generated by  $\mathbf{G}^{q^i}$ , where  $\mathbf{G}^{q^i}$  is the matrix obtained by taking each element in  $\mathbf{G}$  to the power of  $q^i$ .

**Definition 3.2.1** (q-Sum). Let  $\mathcal{C}$  be an  $[n, k, d]_q^{\mathsf{R}}$  rank-metric code over  $\mathbb{F}_{q^m}$  and let  $i \in \mathbb{N}_0$ . Then the i-th q-sum of  $\mathcal{C}$  is defined as

$$\Lambda_i(\mathcal{C}) = \mathcal{C} + \mathcal{C}^q + \dots + \mathcal{C}^{q^i}. \tag{3.5}$$

For a random code  $\mathcal{C}$  we have dim  $\Lambda_i(\mathcal{C}) = \min\{n, ik\}$  with high probability. However, if  $\mathcal{C}$  is a Gabidulin code  $\mathcal{G}(n, k)$ , we have that dim  $\mathcal{C} = \min\{n, k+i\}$ , which is significantly smaller than the dimension of the q-sum of a random code. Hence, a Gabidulin code can be distinguished from a random code by checking the dimension of the q-sum.

Based on Overbeck's observation, one can distinguish a Gabidulin code from a random code by applying the q-sum to the public key and therefore derive an efficient decoder for the underlying decoder.

# Variants using Column Scramblers over $\mathbb{F}_{q^m}$

The series of Overbeck's attacks broke all GPT variants for most practical parameters. In order to prevent Overbeck's attack, GPT variants with column scrambling matrices over  $\mathbb{F}_{q^m}$  were proposed. The first GPT variant using a column scrambler over  $\mathbb{F}_{q^m}$  was proposed by Gabidulin (2008). The GPT variants by Gabidulin et al. (2009) and Rashwan et al. (2010) are also based on this general idea. In (Otmani et al., 2017) it was shown that (Gabidulin et al., 2009; Rashwan et al., 2010) are special cases of (Gabidulin, 2008). Hence, we only describe the general system from (Gabidulin, 2008) in Algorithm 9-11.

```
Algorithm 9: KeyGen (\cdot) (Gabidulin, 2008)
```

```
Input: Parameters param = \left\{q,m,n,k,r,t_{\sf pub},t_X<\lfloor\frac{n-k}{2}\rfloor,t_2\right\} Output: Secret key sk, public key pk
\mathbf{1} \ \mathbf{g} \stackrel{\$}{\leftarrow} \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{g}) = n
\mathbf{S} \stackrel{\$}{\leftarrow} \mathsf{GL}_k\left(\mathbb{F}_{q^m}\right)
з \mathbf{P} \stackrel{\$}{\leftarrow} \mathsf{GL}_{n+t_X}\left(\mathbb{F}_{q^m}\right) such that
                                                                       \mathbf{P}^{-1} = \begin{pmatrix} \mathbf{P}_{11} & \mathbf{P}_{12} \\ \mathbf{P}_{21} & \mathbf{P}_{22} \end{pmatrix} \text{ with } \begin{array}{l} \mathbf{P}_{11} \in \mathbb{F}_{q^m}^{t_X \times t_X}, & \mathbf{P}_{12} \in \mathbb{F}_{q^m}^{t_X \times n} \\ \mathbf{P}_{21} \in \mathbb{F}_{q^m}^{n \times t_X}, & \mathbf{P}_{12} \in \mathbb{F}_{q}^{n \times n} \end{array}
              and \operatorname{rk}_q(\mathbf{P}_{12}) < t_2
4 \mathbf{X} \stackrel{\$}{\leftarrow} \mathbb{F}_{q^m}^{k \times t_X} : \mathrm{rk}_q(\mathbf{X}) = t_X
 5 \mathbf{G}_{\mathcal{C}} = \mathcal{M}_{k,q}\left(\mathbf{g}\right)
 6 \mathfrak{D}\left(\mathbf{G}_{\mathcal{C}}\right) = \mathbf{S}\left(\mathbf{X} \mid \mathbf{G}_{\mathcal{C}}\right) \mathbf{P}
 7 return sk \leftarrow (\mathbf{S}, \mathbf{P}, \mathbf{G}_{\mathcal{C}}), pk \leftarrow (\mathfrak{D}(\mathbf{G}_{\mathcal{C}}), t_{\mathsf{pub}}, t_{X}, t_{2})
```

## **Algorithm 10:** Enc $(\cdot)$ (Gabidulin, 2008)

```
Input: Plaintext \mathbf{m} \in \mathbb{F}_{q^m}^k, public key \mathsf{pk} = (\mathfrak{D}\left(\mathbf{G}_{\mathcal{C}}\right), t_{\mathsf{pub}}, t_X, t_2)
      Output: Ciphertext \mathbf{c} \in \mathbb{F}_{q^m}^{n+t_X}
1 \mathbf{e} \stackrel{\$}{\leftarrow} \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{e}) = t_{\mathsf{pub}} = \lfloor \frac{n-k}{2} \rfloor and \mathbf{e} = (\mathbf{e}_1 \mid \mathbf{e}_2) where \mathbf{e}_1 \in \mathbb{F}_{q^m}^{t_X} and \mathbf{e}_2 \in \mathbb{F}_{q^m}^n with
          \operatorname{rk}_q(\mathbf{e}_2) = t_{\mathsf{pub}} - t_2
\mathbf{c} \leftarrow \mathbf{m} \mathfrak{D} \left( \mathbf{G}_{\mathcal{C}} \right) + \mathbf{e} = \mathbf{m} \mathbf{S} \left( \mathbf{X} \mid \mathbf{G}_{\mathcal{C}} \right) \mathbf{P} + \mathbf{e}
з return c
```

# **Algorithm 11:** $Dec(\cdot)$ (Gabidulin, 2008)

Input: Ciphertext  $\mathbf{c} \in \mathbb{F}_{q^m}^{n+t_X}$ , secret key  $\mathsf{sk} = (\mathbf{S}, \mathbf{P}, \mathbf{G}_{\mathcal{C}})$ 

Output: Plaintext  $\mathbf{m} \in \mathbb{F}_{q^m}^k$ 

- 1 Compute  $\mathbf{c}' \coloneqq \mathbf{c} \mathbf{P}^{-1} = \mathbf{m} \hat{\mathbf{S}} \left( \mathbf{X} \mid \mathbf{G}_{\mathcal{C}} \right) + \mathbf{e} \mathbf{P}^{-1}$
- **2** From  $\mathbf{c}'$  extract the subvector

$$\mathbf{c}'' = (c'_{t_X+1}, c'_{t_X+2}, \dots, c'_{t_X+n}) = \mathbf{mSG}_{\mathcal{C}} + \mathbf{e}''$$

where  $\mathbf{e}''$  corresponds to the last n positions of  $\mathbf{e}\mathbf{P}^{-1}$  given by

$$\mathbf{e}'' = \mathbf{e}_1 \mathbf{P}_{12} + \mathbf{e}_2 \mathbf{P}_{22}.$$

Since the rank of  $\mathbf{P}_{12}$  satisfies  $\mathrm{rk}_q(\mathbf{P}_{12}) < t_2$  and  $\mathbf{P}_{22}$  has its elements in  $\mathbb{F}_q$  we have that

$$\operatorname{rk}_q(\mathbf{e}'') \le \operatorname{rk}_q(\mathbf{P}_{12}) + \operatorname{rk}_q(\mathbf{e}_2) = t_2 + t_{\mathsf{pub}} - t_2 = t_{\mathsf{pub}}.$$

- **3** Hence,  $\mathbf{c}''$  is a codeword of the Gabidulin code  $\mathcal{C}$  that is corrupted by an error  $\mathbf{e}''$  of rank at most  $t_{\mathsf{pub}} \leq \lfloor \frac{n-k}{2} \rfloor$  that can be corrected by a secret efficient decoder for  $\mathcal{C}$
- $\mathbf{4} \ \tilde{\mathbf{m}} = \mathbf{mS} \leftarrow \mathsf{Decode}_{\mathcal{C}}(\mathbf{c})$
- 5 return  $m \leftarrow \tilde{m}S^{-1}$

## Variants using Particular Distortion Matrices

Different GPT variants that are resistant against Overbeck's attacks were proposed by Loidreau (2010) and Rashwan *et al.* (2010). Rather than relying on a column scrambling matrix over  $\mathbb{F}_{q^m}$ , the variants use particular distortion matrices to prevent Overbeck's structural attacks. The variants can be described in Algorithm 12 - 14.

# Algorithm 12: KeyGen (·) (Loidreau, 2010; Rashwan et al., 2010)

Input: Parameters param =  $\{q, m, n, k, t_{pub} \leq \lfloor \frac{n-k}{2} \rfloor, t_X\}$ 

Output: Secret key sk, public key pk

- $\mathbf{1} \ \mathbf{g} \stackrel{\$}{\leftarrow} \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{g}) = n$
- $\mathbf{2} \ \mathbf{S} \xleftarrow{\$} \mathsf{GL}_k\left(\mathbb{F}_{q^m}\right)$
- з  $\mathbf{P} \stackrel{\$}{\leftarrow} \mathsf{GL}_{n+t_X}\left(\mathbb{F}_q\right)$
- 4  $\mathbf{X} \stackrel{\$}{\leftarrow} \mathbb{F}_{q^m}^{k \times t_X} : \mathrm{rk}_q(\mathbf{X}) = t_X$
- $\mathbf{G}_{\mathcal{C}}=\mathcal{M}_{k,q}\left(\mathbf{g}
  ight)$
- 6  $\mathfrak{D}(\mathbf{G}_{\mathcal{C}}) = \mathbf{S}(\mathbf{X} \mid \mathbf{G}_{\mathcal{C}}) \mathbf{P}$
- 7 return  $sk \leftarrow (\mathbf{S}, \mathbf{G}_{\mathcal{C}}, \mathbf{P}), pk \leftarrow (\mathfrak{D}(\mathbf{G}_{\mathcal{C}}), t_{\mathsf{pub}}, t_X)$

If the right kernel of pk has dimension one, a decoder can be obtained from pk in polynomial time. This occurs with high probability if **X** is chosen uniformly at random. This implies the design criterion that **X** has to be chosen such that  $\mathrm{rk}_q(\mathbf{X}) \leq \frac{t_X - \ell}{n - k}$  for some  $\ell \geq 1$  which implies  $t_X > (n - k)$  (see (Loidreau, 2010, Corollary 1)). However, this restriction increases the key size.

# Algorithm 13: Enc (·) (Loidreau, 2010; Rashwan et al., 2010)

```
Input: Plaintext \mathbf{m} \in \mathbb{F}_{q^m}^k, public key \mathsf{pk} = (\mathfrak{D}\left(\mathbf{G}_{\mathcal{C}}\right), t_{\mathsf{pub}}, t_X)
Output: Ciphertext \mathbf{c} \in \mathbb{F}_{q^m}^{n+t_X}

1 \mathbf{e} \xleftarrow{\$} \mathbb{F}_{q^m}^{n+t_X} : \mathrm{rk}_q(\mathbf{e}) = t_{\mathsf{pub}} = \lfloor \frac{n-k}{2} \rfloor
2 \mathbf{c} \leftarrow \mathbf{m} \mathfrak{D}\left(\mathbf{G}_{\mathcal{C}}\right) + \mathbf{e} = \mathbf{m} \mathbf{S}\left(\mathbf{X} \mid \mathbf{G}_{\mathcal{C}}\right) \mathbf{P} + \mathbf{e}
3 return \mathbf{c}
```

## Algorithm 14: Dec (·) (Loidreau, 2010; Rashwan et al., 2010)

```
Input: Ciphertext \mathbf{c} \in \mathbb{F}_{q^m}^{n+t_X}, secret key \mathsf{sk} = (\mathbf{S}, \mathbf{G}_{\mathcal{C}}, \mathbf{P})
Output: Plaintext \mathbf{m} \in \mathbb{F}_{q^m}^k
1 Compute \mathbf{c}' := \mathbf{c}\mathbf{P}^{-1} = \mathbf{m}\mathbf{S}\left(\mathbf{X} \mid \mathbf{G}_{\mathcal{C}}\right) + \mathbf{e}\mathbf{P}^{-1}
2 From \mathbf{c}' extract the subvector
\mathbf{c}'' = (c'_{t_X+1}, c'_{t_X+2} \dots, c'_{t_X+n}) = \mathbf{m}\mathbf{S}\mathbf{G}_{\mathcal{C}} + \mathbf{e}''
where \mathbf{e}'' corresponds to the last n positions of \mathbf{e}\mathbf{P}^{-1}. Notice, that \mathrm{rk}_q(\mathbf{e}') \leq t_{\mathsf{pub}} since \mathbf{P} is over \mathbb{F}_q.
3 Since \mathrm{rk}_q(\mathbf{e}'') \leq \mathrm{rk}_q(\mathbf{e}') \leq t_{\mathsf{pub}} we have that \mathbf{c}'' is a codeword of the Gabidulin code \mathcal{C} that
```

- 3 Since  $\operatorname{rk}_q(\mathbf{e}') \leq \operatorname{rk}_q(\mathbf{e}') \leq t_{\operatorname{pub}}$  we have that  $\mathbf{c}''$  is a codeword of the Gabidulin code  $\mathcal{C}$  that is corrupted by an error  $\mathbf{e}''$  of rank at most  $t_{\operatorname{pub}} \leq \lfloor \frac{n-k}{2} \rfloor$  that can be corrected by a secret efficient decoder for  $\mathcal{C}$
- 4  $\tilde{\mathbf{m}} = \mathbf{mS} \leftarrow \mathsf{Decode}_{\mathcal{C}}(\mathbf{c})$
- 5 return  $\mathbf{m} \leftarrow \tilde{\mathbf{m}} \mathbf{S}^{-1}$

The approach by Rashwan et al. (2010) (also referred as the "smart approach") relies on the same structure as the system in (Loidreau, 2010) with the difference that the increase of the key size in (Loidreau, 2010) due to the rank restriction on  $\mathbf{X}$  is avoided by imposing a structural restriction on  $\mathbf{X}$ . In particular,  $\mathbf{X}$  is constructed from a Moore matrix of rank  $\ell$  and a non-Moore matrix of rank  $t_X - a$  to avoid Overbeck's attacks.

### Attack on Variant with Distortion Matrices

The above mentioned attempts to defend the GPT cryptosystem from Overbeck's attacks based on distortion matrices were broken by Horlemann-Trautmann *et al.* (2018). The main idea of the attack is based on recovering vectors of rank one from an extended public generator matrix that allow to recover the secret key.

### Attacks on Variant with Column Scramblers

The alternative GPT variants proposed to prevent Overbecks's attacks by using column scrambling matrices over  $\mathbb{F}_{q^m}$  were subject to several attacks. First, the scheme by Gabidulin et al. (2009) was attacked by Horlemann-Trautmann et al. (2018) using ideas from (Gaborit et al., 2015). This attack was followed by a generalized Overbeck attack (Otmani et al., 2017) that cryptanalyzes (Gabidulin, 2008; Gabidulin et al., 2009; Rashwan et al.,

2010) which is more efficient than that in (Horlemann-Trautmann *et al.*, 2016). The main result of (Otmani *et al.*, 2017) is that all GPT variants with a column scrambler over  $\mathbb{F}_{q^m}$  can be reduced to a cryptosystem with column scrambler over  $\mathbb{F}_q$  with a slightly degraded Gabidulin code. However, the error-correction capability of the degraded code is sufficient to recover the imposed errors for most parameters.

## GPT Variant with Rank Amplifiers

The GPT variants (Loidreau, 2016; Loidreau, 2017) use particular column scrambling matrices over  $\mathbb{F}_{q^m}$ , called rank amplifiers. The variants are described in Algorithm 15–17. In particular, the coefficients of the inverse of the right scrambler are taken from some fixed-dimensional  $\mathbb{F}_q$ -linear subspace of  $\mathbb{F}_{q^m}$ . This idea is motivated by LRPC codes (Gaborit et al., 2013) and the analogue cryptosystem in the Hamming metric proposed by Baldi et al. (2016).

```
Algorithm 15: KeyGen (·) (Loidreau, 2016; Loidreau, 2017)

Input: Parameters param = \{q, m, n, k, \lambda, t_{\mathsf{pub}} \leq \lfloor \frac{n-k}{2\lambda} \rfloor \}
Output: Secret key sk, public key pk

1 Random \mathbb{F}_q-linear subspace \mathcal{V} of dimension \dim(\mathcal{V}) = \lambda

2 \mathbf{g} \overset{\$}{\leftarrow} \mathbb{F}_q^n : \mathrm{rk}_q(\mathbf{g}) = n

3 \mathbf{S} \overset{\$}{\leftarrow} \mathrm{GL}_k(\mathbb{F}_{q^m})

4 \mathbf{P} \overset{\$}{\leftarrow} \mathrm{GL}_n(\mathbb{F}_{q^m}) : p_{i,j} \in \mathcal{V} for all i, j \in [1, n]

5 \mathbf{G}_{\mathcal{C}} = \mathcal{M}_{k,q}(\mathbf{g})

6 \mathfrak{D}(\mathbf{G}_{\mathcal{C}}) = \mathbf{SG}_{\mathcal{C}}\mathbf{P}^{-1}

7 \mathsf{return} \ sk \leftarrow (\mathbf{S}, \mathbf{G}_{\mathcal{C}}, \mathbf{P}), \ pk \leftarrow (\mathfrak{D}(\mathbf{G}_{\mathcal{C}}), t_{\mathsf{pub}}, \lambda)
```

```
Algorithm 16: Enc (·) (Loidreau, 2016; Loidreau, 2017)

Input: Plaintext \mathbf{m} \in \mathbb{F}_{q^m}^k, public key \mathsf{pk} = (\mathfrak{D}\left(\mathbf{G}_{\mathcal{C}}\right), t_{\mathsf{pub}}, \lambda)
Output: Ciphertext \mathbf{c} \in \mathbb{F}_{q^m}^n

1 \mathbf{e} \overset{\$}{\leftarrow} \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{e}) = t_{\mathsf{pub}} = t_{\mathsf{pub}} \leq \lfloor \frac{n-k}{2\lambda} \rfloor
2 \mathbf{c} \leftarrow \mathbf{m}\mathfrak{D}\left(\mathbf{G}_{\mathcal{C}}\right) + \mathbf{e} = \mathbf{m}\mathbf{S}\mathbf{G}_{\mathcal{C}}\mathbf{P}^{-1} + \mathbf{e}
3 return \mathbf{c}
```

## Algorithm 17: Dec (·) (Loidreau, 2016; Loidreau, 2017)

```
Input: Ciphertext \mathbf{c} \in \mathbb{F}_{q^m}^n, secret key \mathsf{sk} = (\mathbf{S}, \mathbf{G}_{\mathcal{C}}, \mathbf{P})
Output: Plaintext \mathbf{m} \in \mathbb{F}_{q^m}^k
1 Compute \mathbf{c}' \coloneqq \mathbf{cP}^{-1} = \mathbf{mSG}_{\mathcal{C}} + \mathbf{eP}
2 Since the entries of \mathbf{P} span a \lambda-dimensional \mathbb{F}_q-linear subspace of \mathbb{F}_{q^m}, we have that \mathrm{rk}_q(\mathbf{eP}) \le \lambda \, \mathrm{rk}_q(\mathbf{e}) = \lambda t_{\mathsf{pub}} (see (Loidreau, 2016, Proposition 1)).
3 Hence, \mathbf{c}'' is a codeword of the Gabidulin code \mathcal{C} that is corrupted by an error \mathbf{eP} of rank at most \lambda t_{\mathsf{pub}} \le \lfloor \frac{n-k}{2} \rfloor that can be corrected by a secret efficient decoder for \mathcal{C}
4 \tilde{\mathbf{m}} = \mathbf{mS} \leftarrow \mathsf{Decode}_{\mathcal{C}}(\mathbf{c})
5 \mathbf{return} \ \mathbf{m} \leftarrow \tilde{\mathbf{m}S}^{-1}
```

# Attack for GPT with Rank Amplifiers ( $\lambda = 2$ )

Coggia and Couvreur (2019) proposed an attack on the rank-amplifier variant of the GPT cryptosystem (Loidreau, 2016; Loidreau, 2017). The attack is successful for  $\lambda = 2$  and a public code with code rate  $R_{\text{pub}} \geq \frac{1}{2}$ . In general, parameters where the public code has rate  $R_{\text{pub}} \geq 1 - \frac{1}{\lambda}$  should be avoided. However, there still are practical parameters for which the system (Loidreau, 2016; Loidreau, 2017) cannot be broken by the attack by Coggia and Couvreur (2019).

#### Variant using Gabidulin Matrix Codes

In (Berger et al., 2017) a cryptosystem based on matrix codes was proposed. These matrix codes are obtained from subcodes of binary images of Gabidulin codes to mask the structure of the underlying Gabidulin code in order to prevent Overbeck-like attacks. This approach roughly gains a factor of 10 compared to the original McEliece cryptosystem and provides very compact private keys. In Algorithms 18-20, describe this cryptosystem. We give a high-level description of the q-ary image of a code, which is used in the key generation of this cryptosystem. For any matrix  $\mathbf{A} \in \mathbb{F}_q^{m \times n}$  let  $\operatorname{vec}(\mathbf{A}) \in \mathbb{F}_q^{mn}$  denote the row vector representation of  $\mathbf{A}$  obtained by concatenating the transposed columns of  $\mathbf{A}$ . Analogously, denote by  $\operatorname{mat}(\mathbf{a})$  the corresponding inverse mapping to obtain a matrix  $\mathbf{A} \in \mathbb{F}_q^{m \times n}$  from a vector  $\mathbf{a} \in \mathbb{F}_q^{mn}$ . Under a fixed basis of  $\mathbb{F}_{q^m}$  over  $\mathbb{F}_q$ , any code  $\mathcal{C} \subseteq \mathbb{F}_{q^m}^n$  can be represented as a subset of  $\mathbb{F}_q^{m \times n}$ . The q-ary image  $\operatorname{Im}_q(\mathcal{C}) \subseteq \mathbb{F}_q^{mn}$  of  $\mathcal{C}$  is then defined as the code obtained by applying the mapping  $\operatorname{vec}(\cdot)$  to each codeword of  $\mathcal{C}$  expanded over  $\mathbb{F}_q$ , which results in a code of length mn and dimension mk that can be represented by an  $mk \times mn$  generator matrix over  $\mathbb{F}_q$ .

```
Algorithm 18: KeyGen (·) (Berger et al., 2017)
```

```
Input: Parameters param = \{q, m, n, k, r, t_{\mathsf{pub}} = \lfloor \frac{n-k}{2} \rfloor \}

Output: Secret key sk, public key pk

1 \mathbf{g} \overset{\$}{\leftarrow} \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{g}) = n

2 \mathbf{B}_0 \overset{\$}{\leftarrow} \mathrm{GL}_m(\mathbb{F}_q)

3 \mathbf{B}_1 \overset{\$}{\leftarrow} \mathrm{GL}_n(\mathbb{F}_q)

4 \mathbf{L} \overset{\$}{\leftarrow} \mathbb{F}_q^{s \times km - s}

5 \mathbf{G} \leftarrow generator matrix of \mathrm{Im}_q(\mathcal{G}(\mathbf{g}; n, k)) (in \mathbb{F}_q^{km \times mn})

6 \widetilde{\mathbf{G}} = \mathbf{G}(\mathbf{B}_1 \otimes \mathbf{B}_0^\top) with the corresponding generator matrix in systematic from \widetilde{\mathbf{G}}_{\mathsf{sys}} = (\mathbf{I}_{km} \mid \mathbf{P}). Define \widetilde{\mathbf{H}} = (-\mathbf{P}^\top \mid \mathbf{I}_{(n-k)m})

7 Define \mathbf{U} = (\mathbf{L} \mid \mathbf{I}_s \mid \mathbf{0}_{s,(n-k)m})

8 Define \mathbf{H}_{\mathsf{pub}} = \left(\frac{\mathbf{U}}{\widetilde{\mathbf{H}}}\right) and \mathbf{G}_{\mathsf{pub}} \in \mathbb{F}_q^{(km-s) \times mn} s.t. \mathbf{G}_{\mathsf{pub}} \mathbf{H}_{\mathsf{pub}}^\top = \mathbf{0}.
```

#### **Algorithm 19:** Enc $(\cdot)$ (Berger *et al.*, 2017)

9 return  $sk \leftarrow (\mathbf{B}_0, \mathbf{B}_1, \mathbf{g}), pk \leftarrow (\mathbf{G}_{\mathsf{pub}}, t_{\mathsf{pub}})$ 

```
Input: Plaintext \mathbf{m} \in \mathbb{F}_q^{km-s}, public key \mathsf{pk} = (\mathbf{G}_{\mathsf{pub}}, t_{\mathsf{pub}})
Output: Ciphertext \mathbf{c} \in \mathbb{F}_q^{m \times n}

1 \mathbf{E} \xleftarrow{\$} \mathbb{F}_q^{m \times n} : \mathrm{rk}_q(\mathbf{E}) = t_{\mathsf{pub}}
2 \mathbf{C} \leftarrow \mathrm{mat}(\mathbf{m}\mathbf{G}_{\mathsf{pub}}) + \mathbf{E}
```

### **Algorithm 20:** Dec ( $\cdot$ ) (Berger *et al.*, 2017)

з return C

```
Input: Ciphertext \mathbf{c}, secret key \mathsf{sk} = (\mathbf{B}_0, \mathbf{B}_1)

Output: Plaintext \mathbf{m}

1 Compute \tilde{\mathbf{C}} \leftarrow \mathbf{B}_0^{-1}\mathbf{C} = \max(\mathbf{m}\mathbf{G}_{\mathsf{pub}}) + \tilde{\mathbf{E}} where \tilde{\mathbf{E}} = \mathbf{B}_0^{-1}\mathbf{E} with \mathrm{rk}_q(\tilde{\mathbf{E}}) = t_{\mathsf{pub}}

2 Compute \tilde{\mathbf{c}} from \tilde{\mathbf{C}}

3 Decode \tilde{\mathbf{c}} and use \mathbf{B}_1 to obtain \mathbf{m}

4 return \mathbf{m}
```

# Twisted Gabidulin Codes in the GPT System

Twisted Gabidulin codes were applied to the GPT system by Puchinger et al. (2018). However, it turned out that there is a distinguisher when using such Twisted Gabidulin codes in the GPT system.

**Theorem 3.2.1** (*q*-Sum Dimension of Twisted Gabidulin Codes, (Puchinger et al., 2018)). Let

 $n, k, t, h, \eta, \alpha$  be chosen as in Definition 2.13.1 such that

$$\Delta := \frac{n-k-\ell}{\ell+1} \in \mathbb{N},$$

$$t_i := (i+1)(\Delta+1), \qquad \forall i = 1, \dots, \ell,$$

$$0 < h_1 < h_2 < \dots h_{\ell} < k-1 \qquad \text{s.t.}$$

$$|h_{i+1} - h_i| > 1, \qquad \forall i = 1, \dots, \ell-1.$$

For all  $i \in \mathbb{N}$ , we then have

$$\dim \Lambda_i(\mathcal{TG}_{\boldsymbol{\alpha},\boldsymbol{t},\boldsymbol{h},\boldsymbol{\eta}}[n,k]) = \min\{k-1+(i+1)(\ell+1),n\}.$$

In particular, for a small number of twists  $\ell$ , the dimension of the q-sum of Twisted Gabidulin codes is rather low compared to random codes of the same dimension (though larger than that of Gabidulin codes), which constitutes a distinguisher.

Lavauzelle and Renner (2020) proposed a polynomial-time key-recovery attack on the Hamming-metric variant of this scheme. Furthermore, they showed that the presented attack can straightforwardly be applied to the variant based on twisted Gabidulin codes for certain parameters. However, this naïve adaption can be avoided by a careful choice of the parameters.

#### Interleaving Loidreau's GPT System

The ideas of using interleaved codes in the McEliece system (Elleuch et~al., 2018; Holzbaur et~al., 2019) were combined with Loidreau's GPT variant (Loidreau, 2017) in (Renner et~al., 2019a). That means, u parallel ciphertexts are considered where each is a codeword from Loidreau's Gabidulin code (i.e., a Gabidulin code scrambled with a matrix that contains elements from a subspace, (see Loidreau, 2017)) with rank multipliers plus a rank burst error (i.e., all the errors lie in a common row space). The dimension of the total row space of the parallel errors is restricted by  $\left\lfloor \frac{u}{u+1} \frac{n-k}{2} \right\rfloor$ .

In (Renner et al., 2019a), it was shown that in principle, Loidreau's system can be interleaved using classical decoders for interleaved Gabidulin codes. Similar to (Holzbaur et al., 2019), an attack based on an error code can be prevented by choosing the error matrix in a suitable way. The construction of (in this sense) secure errors requires rank-metric codes whose minimum distances are close to the Singleton bound. Gabidulin codes yield potentially insecure error patterns since the resulting error matrix can be distinguished from a random one. However, if the error matrix is drawn in a random way, it fulfills the requirements with high probability. For this choice, upper bounds on the decryption failure and secure parameter sets with potential key size reductions by approximately 15% compared to Loidreau's system were provided.

#### 3.2.3 McEliece-Type Rank-Metric Cryptosystems based on QC-LRPC Codes

A GPT variant based on a randomized construction of rank-metric codes was proposed by Gaborit et al. (2013). This random rank-metric coding approach uses low-rank parity-check (LRPC) codes in the GPT system in order to prevent the series of structural attacks based on the inherent algebraic structure of Gabidulin codes. The NIST submission ROLLO (Aguilar Melchor et al., 2019a), which is the merge of the initial round-1 submissions Rank-Ouroboros (formerly known as Ouroboros-R), LAKE and LOCKER, is a GPT variant based on LRPC codes.

**Definition 3.2.2** (Low-Rank Parity-Check Code). A  $[\lambda; n, k]$  LRPC code of length n, dimension k, and rank  $\lambda$  over  $\mathbb{F}_{q^m}$  is defined as a code with a parity-check matrix  $\mathbf{H} \in \mathbb{F}_{q^m}^{(n-k) \times n}$ , where the  $\mathbb{F}_q$ -linear vector space

$$\mathcal{H} := \langle \{h_{i,j} : i \in [1, n-k], j \in [1, n] \} \rangle_q \tag{3.6}$$

has dimension at most  $\lambda$ .

LRPC codes can be constructed to be quasi-cylic codes. In this case, the parity-check matrix as well as the generator matrix consist of blocks of circulant matrices, that allow for a very compact representation, which is favorable in terms of the key size. In particular, variants consisting of two circulant matrices (also called double-circulant (DC)) are of particular interest for cryptographic applications (Gaborit *et al.*, 2013).

In the following we give a high-level description of the decoding algorithm for LRPC codes from (Gaborit *et al.*, 2013), where we define the *rank support* as follows:

**Definition 3.2.3** (Rank Support). Let  $\mathbf{x} = (x_1, x_2, \dots, x_n) \in \mathbb{F}_{q^m}^n$ . The support supp $(\mathbf{x})$  is the  $\mathbb{F}_q$ -subspace of  $\mathbb{F}_{q^m}$  generated by the coordinates of  $\mathbf{x}$ :

$$\operatorname{supp}(\mathbf{x}) = \langle x_1, \dots, x_n \rangle_q.$$

Let

$$\Phi = \{\phi_1, \phi_2, \dots, \phi_{\lambda}\} \quad \text{and} \quad \Gamma = \{\gamma_1, \gamma_2, \dots, \gamma_t\}$$
(3.7)

be bases for  $\mathcal{H}$  and the error support  $\mathcal{E} := \operatorname{supp}(\mathbf{e})$ , respectively. Then each element of the syndrome  $\mathbf{s} = \mathbf{e} \mathbf{H}^{\top}$  can be written as

$$s_i = \sum_{r=1}^t \sum_{\ell=1}^\lambda s_{i,\ell,r} \phi_\ell \gamma_r, \tag{3.8}$$

where

$$s_{i,\ell,r} = \sum_{j=1}^{n} h_{i,j,\ell} e_{j,r}, \qquad \ell \in [1, \lambda], r \in [1, t], i \in [1, n - k].$$
(3.9)

and  $h_{i,j,\ell}$  is the expansion of  $h_{i,j}$  over  $\mathbb{F}_q$  with respect to  $\Phi$ . Hence, each syndrome entry  $s_i$  is an  $\mathbb{F}_q$ -linear combination of the elements

$$\{\phi_1 \gamma_1, \phi_1 \gamma_2, \dots, \phi_{\lambda} \gamma_t\}. \tag{3.10}$$

With high probability the elements above span the product space  $\mathcal{HE} := \{ab : a \in \mathcal{H}, b \in \mathcal{E}\}$ . Defining the syndrome space  $\mathcal{S} := \sup(\mathbf{s})$  and  $\mathcal{S}_{\ell} := \{\phi_{\ell}^{-1}\mathcal{S} : \ell \in [1, \lambda]\}$  we may recover  $\mathcal{E}$  as

$$\mathcal{E} \subseteq \mathcal{S}_1 \cap \mathcal{S}_2 \cap \dots \cap \mathcal{S}_{\ell} \tag{3.11}$$

with high probability. Once a basis of the product space is known the error locations can be recovered by solving the  $\mathbb{F}_q$ -linear system of equations (3.9) that has a unique solution with high probability. Knowing the error locations and the support  $\mathcal{E}$ , the error vector  $\mathbf{e}$  can be recovered. The detailed description of the cryptosystem is provided in Algorithms 21–23.

```
Algorithm 21: KeyGen (·) (Gaborit et al., 2013)
```

Input: Parameters param =  $\{q, m, n, k, \lambda, t_{pub}\}$ 

Output: Secret key sk, public key pk

- 1 Random  $\mathbb{F}_q$ -linear subspace  $\mathcal{H}$  of dimension  $\dim(\mathcal{V}) = \lambda$
- **2**  $\mathbf{H} \stackrel{\$}{\leftarrow} \mathbb{F}_{q^m}^{(n-k)\times n} : \operatorname{rk}_{q^m}(\mathbf{H}) = n-k \text{ and } h_{i,j} \in \mathcal{H} \text{ for all } i \in [1, n-k] \text{ and } j \in [1, n]$
- $\mathbf{s} \ \mathbf{S} \in \mathsf{GL}_k\left(\mathbb{F}_{q^m}\right)$
- 4  $\mathbf{G}_{\mathcal{C}} \leftarrow \mathbb{F}_{q^m}^{k \times n} : \mathrm{rk}(\mathbf{G}) = k \text{ and } \mathbf{G}\mathbf{H}^{\top} = \mathbf{0}$
- 5  $\mathfrak{D}(\mathbf{G}_{\mathcal{C}}) = \mathbf{S}\mathbf{G}_{\mathcal{C}}$
- 6 return  $sk \leftarrow (\mathbf{H}, \mathbf{S}), pk \leftarrow (\mathfrak{D}(\mathbf{G}_{\mathcal{C}}), t_{\mathsf{pub}})$

#### **Algorithm 22:** Enc $(\cdot)$ (Gaborit *et al.*, 2013)

Input: Plaintext  $\mathbf{m} \in \mathbb{F}_{q^m}^k$ , public key  $\mathsf{pk} = (\mathfrak{D}\left(\mathbf{G}_{\mathcal{C}}\right), t_{\mathsf{pub}})$ 

Output: Ciphertext  $\mathbf{c} \in \mathbb{F}_{q^m}^n$ 

- $\mathbf{e} \leftarrow \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{e}) = t_{\mathsf{pub}}$
- $\mathbf{2} \ \mathbf{c} \leftarrow \mathbf{m}\mathfrak{D}\left(\mathbf{G}_{\mathcal{C}}\right) + \mathbf{e} = \mathbf{m}\mathbf{S}\mathbf{G}_{\mathcal{C}} + \mathbf{e}$
- з return с

## **Algorithm 23:** Dec $(\cdot)$ (Gaborit *et al.*, 2013)

Input: Ciphertext  $\mathbf{c} \in \mathbb{F}_{q^m}^n$ , secret key  $\mathsf{sk} = (\mathbf{H}, \mathbf{S})$ 

Output: Plaintext  $\mathbf{m} \in \mathbb{F}_{q^m}^k$ 

- 1 Decode  $\mathbf{c}$  using  $\mathbf{H}$ :  $\tilde{\mathbf{m}} \leftarrow \mathsf{Decode}_{\mathcal{C}}(\mathbf{c})$
- $\mathbf{2} \ \ \tilde{\mathbf{m}} = \mathbf{mS} \leftarrow \mathsf{Decode}_{\mathcal{C}}\left(\mathbf{c}\right)$
- 3 return  $\mathbf{m} \leftarrow \tilde{\mathbf{m}} \mathbf{S}^{-1}$

#### 3.2.4 Attack on the QC-LRPC GPT Variant

An attack on the QC-LRPC cryptosystem that exploits the block-circulant structure of the parity-check matrix was presented in (Hauteville and Tillich, 2015). As a possible repair,

the application of so-called *ideal* LRPC codes instead of QC-LRPC codes was suggested by Hauteville and Tillich (2015) and Aragon *et al.* (2019c). Ideal LRPC codes allow for the same compact code representation as QC-LRPC codes but are not vulnerable to the attack in (Hauteville and Tillich, 2015). The current version of the NIST submission ROLLO is based on ideal LRPC codes (Aguilar Melchor *et al.*, 2019a).

In addition to the structural attack by Hauteville and Tillich (2015) there is a reaction-based attack on the QC-LRPC GPT cryptosystem that exploits decoding failures that may occur during the decryption process to recover the secret key (Aragon and Gaborit, 2019). Let  $\mathbf{G}_{LRPC}$  be a generator matrix of the code generated by a parity-check matrix  $\mathbf{H}_{LRPC}$  of a  $[\lambda; n, k]$  QC-LRPC code over  $\mathbb{F}_{q^m}$  that can correct  $t_{\text{pub}}$  errors with high probability. The main idea of this attack is to challenge the decoder with particularly chosen error patterns and observe if the decoder can decode or not. The observation of the corresponding decoding failure rate can reveal the structure of the parity-check matrix  $\mathbf{H}_{LRPC}$ . In particular, the failure event that the syndrome does not span the whole product space (which dominates the decoding failure probability for most practical parameters) is exploited. In this case, the linear system of equations in (3.9) is rank deficient and thus the error locations cannot be recovered. Compared to the reaction-based attacks on QC-LDPC/MDPC codes in the Hamming metric (Guo et al., 2016), the effectiveness of the reaction-based attack in the rank metric is much higher since there exist much more equivalent keys of the form  $\mathbf{WH}_{LRPC}$  where  $\mathbf{W} \in \mathbf{GL}_{n-k}$  ( $\mathbb{F}_q$ ) that allow decryption (i.e. efficient decoding).

The reaction-based attack by Aragon and Gaborit (2019) is evaded in ROLLO by using *ephemeral* keys.

# 3.3 Systems based on the Hardness of List Decoding

## 3.3.1 The Faure–Loidreau Cryptosystem

The Faure–Loidreau (FL) cryptosystem was proposed by Faure and Loidreau (2005) as the rank-metric analog of (Augot and Finiasz, 2003). While the Augot–Finiasz cryptosystem is closely connected to (list) decoding Reed–Solomon codes, the FL cryptosystem is connected to (list) decoding Gabidulin codes. The FL system was broken for all parameters with a structural attack by Gaborit *et al.* (2016), which implicitly used the fact that the public key is a corrupted codeword of an interleaved Gabidulin code.

The security of the original Faure–Loidreau (FL) cryptosystem (Faure and Loidreau, 2005) is based on Problem 3.1.8. However, the relevant parameter w was chosen such that it is easy to attack the system using a decoder for interleaved Gabidulin codes, which is the underlying idea of the attack by Gaborit  $et\ al.\ (2016)$ . The repaired Faure–Loidreau system, LIGA (Renner  $et\ al.\ (2021c)$ ), relies on a similar problem as Problem 3.1.8, with an additional restriction on  $\mathbf{X}$ , which avoids the attack from (Gaborit  $et\ al.\ (2016)$ ).

The system works as follows. Let  $q, m, n, k, u, w, t_{\sf pub}, \zeta$  be positive integers that fulfill  $k < n \le m, \ 2 \le u < k,$ 

$$\max\left\{n-k-\frac{k-u}{u-1}, \left|\frac{n-k}{2}\right|+1\right\} \le w < \frac{u}{u+2}(n-k),$$

and  $t_{\mathsf{pub}} = \left\lfloor \frac{n-k-w}{2} \right\rfloor$ . We consider three finite fields,  $\mathbb{F}_q$ ,  $\mathbb{F}_{q^m}$ , and  $\mathbb{F}_{q^{mu}}$ , which are extension fields of each other, respectively:

$$\mathbb{F}_q \subseteq \mathbb{F}_{q^m} \subseteq \mathbb{F}_{q^{mu}}$$
.

The FL key generation is shown in Algorithm 24. The public key consists of the tuple

$$\mathsf{pk} = (\mathbf{g}, k, \mathbf{k}_{\mathsf{pub}}, t_{\mathsf{pub}}),$$

where  $\mathbf{g} \in \mathbb{F}_{q^m}^n$  is the defining vector of a Gabidulin code of dimension k. By representing the vector

$$\mathbf{k}_{\mathsf{pub}} = \mathbf{x} \cdot \mathbf{G}_{\mathcal{G}} + \mathbf{z} \in \mathbb{F}_{q^{mu}}^n$$

as a  $u \times n$  matrix over  $\mathbb{F}_{q^m}$ , it is a corrupted codeword of a u-interleaved Gabidulin code over  $\mathbb{F}_{q^m}$ , where the error  $\mathbf{z} = (\mathbf{s} \mid \mathbf{0}) \cdot \mathbf{P}^{-1}$  is chosen such that the  $\mathbb{F}_q$ -rank weight of each row of the matrix representation of the error is beyond the unique error correction capability of the Gabidulin code.

The secret key is the tuple  $sk = (\mathbf{x}, \mathbf{P})$ , where  $\mathbf{x}$  is the encoded message in  $\mathbf{k}_{\mathsf{pub}}$  and  $\mathbf{P}^{-1}$  is the right factor of the error vector  $\mathbf{z}$ .

The encryption procedure is described in Algorithm 25. It consists of encoding a zero-padded version  $\mathbf{m}' \in \mathbb{F}_{q^m}^k$  of the secret message  $\mathbf{m} \in \mathbb{F}_{q^m}^{k-u}$  with the Gabidulin code w.r.t.  $\mathbf{g}$ , adding the trace of a scalar multiple of  $\mathbf{k}_{\mathsf{pub}}$ , and an additional error  $\mathbf{e}$ . The trace of a scalar multiple of  $\mathbf{k}_{\mathsf{pub}}$  is a corrupted codeword of the Gabidulin code. Hence, the ciphertext is a codeword of the Gabidulin code corrupted by two errors. An attacker is assumed to have no knowledge of the two errors and hence faces the problem of decoding a corrupted codeword of a large error weight.

The legitimate receiver has partial information about the error added through the public key: The first w rows of  $\mathbf{P}^{-1}$  are a basis of the row space of the error, which can be seen as an erasure in the rank metric. Hence, the receiver is able to retrieve the message  $\mathbf{m}$  by an error-erasure decoder (see, e.g., Section 2.8). This decryption procedure is outlined in Algorithm 26.

The problem of recovering a valid private key from the public key is equivalent to Problem 3.1.8 on page 39. For the chosen values of w, this problem can be solved for most errors (i.e., with high probability for random errors) using decoders of interleaved Gabidulin codes. This was first (implicitly) realized in (Gaborit *et al.*, 2016), where a structural attack on the Faure–Loidreau system was proposed.

```
Algorithm 24: KeyGen (·) (Faure and Loidreau, 2005)

Input: Parameters param = (q, m, n, k, u, w)

Output: Secret key sk, public key pk

1 \mathbf{g} \stackrel{\$}{\leftarrow} \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{g}) = n

2 \mathbf{x} \stackrel{\$}{\leftarrow} \mathbb{F}_{q^m u}^k : \{x_{k-u+1}, \dots, x_k\} is a basis of \mathbb{F}_{q^m u} over \mathbb{F}_{q^m}

3 \mathbf{s} \stackrel{\$}{\leftarrow} \{\mathbf{a} \in \mathbb{F}_{q^m u}^w : \mathrm{rk}_q(\mathbf{a}) = w\}

4 \mathbf{P} \stackrel{\$}{\leftarrow} \mathbb{F}_q^{n \times n} : \mathbf{P} invertible

5 \mathbf{G}_{\mathcal{G}} \leftarrow \mathcal{M}_{k,q}(\mathbf{g})

6 \mathbf{z} \leftarrow (\mathbf{s} \mid \mathbf{0}) \cdot \mathbf{P}^{-1}
```

# Algorithm 25: Enc (·) (Faure and Loidreau, 2005)

9 return  $sk \leftarrow (\mathbf{x}, \mathbf{P}), pk \leftarrow (\mathbf{g}, k, \mathbf{k}_{\mathsf{pub}}, t_{\mathsf{pub}})$ 

7  $\mathbf{k}_{\mathsf{pub}} \leftarrow \mathbf{x} \cdot \mathbf{G}_{\mathcal{G}} + \mathbf{z}$ 8  $t_{\mathsf{pub}} \leftarrow \left\lfloor \frac{n - w - k}{2} \right\rfloor$ 

```
Input: Plaintext \mathbf{m} \in \mathbb{F}_{q^m}^{k-u}, public key \mathsf{pk} = (\mathbf{g}, k, \mathbf{k}_{\mathsf{pub}}, t_{\mathsf{pub}})

Output: Ciphertext \mathbf{c} \in \mathbb{F}_{q^{mu}}^n

1 \alpha \stackrel{\$}{\leftarrow} \mathbb{F}_{q^{mu}} \setminus \{0\}

2 \mathbf{e} \stackrel{\$}{\leftarrow} \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{e}) = t_{\mathsf{pub}}

3 \mathbf{m}' \leftarrow (m_1, \dots, m_{k-u}, 0, \dots, 0) \in \mathbb{F}_{q^m}^k

4 \mathbf{G}_{\mathcal{G}} \leftarrow \mathcal{M}_{k,q}(\mathbf{g})

5 \mathbf{c} \leftarrow \mathbf{m} \cdot \mathbf{G}_{\mathcal{G}} + \mathrm{Tr}_{q^{mu}/q^m}(\alpha \mathbf{k}_{\mathsf{pub}}) + \mathbf{e}

6 \mathbf{return} \mathbf{c}
```

## **Algorithm 26:** Dec $(\cdot)$ (Faure and Loidreau, 2005)

```
Input: Ciphertext \mathbf{c}, secret key \mathsf{sk} = (\mathbf{x}, \mathbf{P})
Output: Plaintext \mathbf{m} \in \mathbb{F}_{q^{mu}}^{k-u}

1 \mathbf{c}' \leftarrow \mathbf{cP}|_{[w+1,n]}
2 \mathcal{G}' \leftarrow \text{Gabidulin} code generated by \mathbf{G}_{\mathcal{G}}\mathbf{P}|_{[w+1,n]}
3 \mathbf{m}'' \leftarrow \text{decode } \mathbf{c}' \text{ in } \mathcal{G}' \text{ (decode "to message" using the encoding mapping induced by } \mathbf{G}_{\mathcal{G}}\mathbf{P}|_{[w+1,n]})
4 \{x_{k-u+1}^*, \dots, x_k^*\} \leftarrow \text{dual basis of } \mathbb{F}_{q^{mu}} \text{ over } \mathbb{F}_{q^m} \text{ to } \{x_{k-u+1}, \dots, x_k\}
5 \alpha \leftarrow \sum_{i=k-u+1}^k m_i'' x_i^*
6 \mathbf{m}' \leftarrow \mathbf{m}'' - \text{Tr}_{q^{mu}/q^m}(\alpha \mathbf{x})
7 \mathbf{m} \leftarrow (m_1', \dots, m_{k-u}')
8 return \mathbf{m}
```

### 3.3.2 Repair of FL Cryptosystem: LIGA

A repair of the FL cryptosystem was proposed in (Wachter-Zeh *et al.*, 2018; Renner *et al.*, 2021c). The resulting system is called LIGA, since it is based on the hardness of <u>list</u> decoding and <u>interleaved</u> decoding of <u>Gabidulin codes</u>. The underlying idea of the repair is

the well-known fact that all known decoders for interleaved Gabidulin codes fail for a large enough class of error patterns. Hence, we can modify the FL key generation algorithm to choose only errors for which the decoders fail. This ensures that the resulting public key is not vulnerable to the structural attack in (Gaborit *et al.*, 2016). More precisely, for a parameter  $\zeta$  with  $\zeta < \frac{w}{n-k-w}$  and  $\zeta q^{\zeta w-m} \leq \frac{1}{2}$ , replace Line 3 of Algorithm 24 (KeyGen  $(\cdot)$ ) by

3  $\mathcal{A} \stackrel{\$}{\leftarrow} \left\{ \text{subspace } \mathcal{U} \subseteq \mathbb{F}_{q^m}^w : \dim \mathcal{U} = \zeta, \mathcal{U} \text{ has a basis consisting only of elements that are } \mathbb{F}_q\text{-linearly independent} \right\}$ 

$$\mathbf{3}, \begin{pmatrix} \mathbf{s}_1 \\ \vdots \\ \mathbf{s}_u \end{pmatrix} \stackrel{\$}{\leftarrow} \left\{ \begin{pmatrix} \mathbf{s}_1' \\ \vdots \\ \mathbf{s}_u' \end{pmatrix} : \langle \mathbf{s}_1', \dots, \mathbf{s}_u' \rangle_{\mathbb{F}_{q^m}} = \mathcal{A}, \ \mathrm{rk}_q(\mathbf{s}_i') = w, \ \forall i \right\}$$

It is shown in (Renner *et al.*, 2021c) that, under the assumption that two decisional problems, called ResIG-Dec and ResG-Dec, are hard, the public-key encryption version of LIGA is IND-CPA secure in the standard model, and the key encapsulation mechanisms version is IND-CCA2 secure in the random oracle model.

Recently, it was shown in (Bombar and Couvreur, 2021), by proposing a message recovery attack on the system, that ResG-Dec is in fact not hard. It is an open problem whether the FL/LIGA system can be protected against this attack by a further modification.

# 3.3.3 RAMESSES

In (Lavauzelle *et al.*, 2019), the rank-metric code-based cryptosystem RAMESSES was presented. Similar to the system by Faure and Loidreau (2005), the applied code is public, so the structure of the code does not need to be hidden. However, similar to LIGA (Renner *et al.*, 2021c), it was recently broken by (Bombar and Couvreur, 2021).

# 3.4 A System based on Rank Quasi-Cyclic Codes

In this section, the system RQC, an efficient rank-metric encryption scheme from random quasi-cyclic codes is considered (Aguilar Melchor *et al.*, 2019b), which was submitted to the NIST standardization competition (Aguilar Melchor *et al.*, 2019b).

<sup>&</sup>lt;sup>2</sup>Compared to the number of total possible error matrices, the fraction of matrices for which the decoders fail is small (i.e., the decoders suceed with high probability). However, this fraction of matrices is large enough to make a brute-force search through all of these "failing error matrices" more complex than the work factor of the system.

#### 3.4.1 Definitions

Each element of  $\mathbb{F}_{q^m}^n$  can be uniquely represented by a polynomial of the ring  $\mathbb{F}_{q^m}[X]/\langle P \rangle$ , where  $\langle P \rangle$  denotes the ideal of  $\mathbb{F}_{q^m}[X]$  generated by the polynomial  $P \in \mathbb{F}_q[X]$  of degree n, i.e.,

$$\varphi: \mathbb{F}_{q^m}^n \to \mathbb{F}_{q^m}[X]/\langle P \rangle$$
$$(u_1, \dots, u_n) \mapsto \sum_{i=1}^n u_i X^{i-1}.$$

We define the product of two vectors  $\mathbf{u}, \mathbf{v} \in \mathbb{F}_{q^m}^n$  by

$$\mathbf{w} = \mathbf{u}\mathbf{v} \in \mathbb{F}_{q^m}^n \Leftrightarrow \varphi(\mathbf{w}) = \varphi(\mathbf{u})\varphi(\mathbf{v}) \mod P.$$

The ideal matrix generated by  $\mathbf{v}$  and P is denoted by

$$\mathcal{IM}(\mathbf{v}) := \begin{pmatrix} \varphi^{-1}(\varphi(\mathbf{v}) \mod P) \\ \varphi^{-1}(X\varphi(\mathbf{v}) \mod P) \\ \vdots \\ \varphi^{-1}(X^{n-1}\varphi(\mathbf{v}) \mod P) \end{pmatrix}.$$

The product **uv** can then be written as a vector–matrix multiplication

$$\mathbf{u}\mathbf{v} = \mathbf{u}\mathcal{I}\mathcal{M}(\mathbf{v}) = \mathcal{I}\mathcal{M}(\mathbf{u})^{\top}\mathbf{v} = \mathbf{v}\mathbf{u}.$$

Ideal codes are a family of codes with a systematic parity-check matrix formed by blocks of ideal matrices.

**Definition 3.4.1** (s-Ideal codes). Let  $P \in \mathbb{F}_q[X]$  be a polynomial of degree n. A parity-check matrix (under the systematic form) of an s-ideal code  $\mathcal{C}_{\mathsf{ideal}}(ns, n)$  is given by

$$\mathbf{H} = egin{pmatrix} & \mathcal{IM}(\mathbf{h}_1)^{ op} \ & \mathbf{I}_{n(s-1)} & drawnows \ & \mathcal{IM}(\mathbf{h}_{s-1})^{ op} \end{pmatrix} \in \mathbb{F}_{q^m}^{n(s-1) imes ns},$$

where  $\mathbf{h}_i \in \mathbb{F}_{q^m}^n$  for  $i = 1, \dots, s-1$ . We say that  $\mathbf{h}_1, \dots, \mathbf{h}_{s-1}$  generate the systematic parity-check matrix of  $\mathcal{C}$ .

For an s-ideal code with a systematic parity-check matrix  $\mathbf{H}$  generated by  $\mathbf{h}_1, \dots, \mathbf{h}_{s-1}$ , the syndrome  $\mathbf{s} = (\mathbf{s}_1, \dots, \mathbf{s}_{s-1}) \in \mathbb{F}_{q^m}^{n(s-1)}$  of an error  $\mathbf{e} = (\mathbf{e}_1, \dots, \mathbf{e}_s) \in \mathbb{F}_{q^m}^{ns}$  is equal to

$$\mathbf{s}_i = \mathbf{e}_i \mathbf{H}^{ op}$$
  
=  $\mathbf{e}_i + \mathbf{h}_i \mathbf{e}_s$ ,

for  $i = 1, \dots, s - 1$ . We define

$$S_w^n := \{ \mathbf{x} \in \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{x}) = w \},$$

$$S_{1,w}^n := \{ \mathbf{x} \in \mathbb{F}_{q^m}^n : \mathrm{rk}_q(\mathbf{x}) = w, 1 \in \langle x_1, \dots, x_n \rangle_q \},$$

and

$$\mathcal{S}_{w_1,w_2}^{3n} \coloneqq \{\mathbf{x} = (\mathbf{x}_1, \mathbf{x}_2, \mathbf{x}_3) \in \mathbb{F}_{q^m}^{3n} : \operatorname{rk}_q((\mathbf{x}_1, \mathbf{x}_3)) = w_1, \\ \operatorname{rk}_q((\mathbf{x}_2)) = w_1 + w_2, \langle \mathbf{x}_1, \mathbf{x}_3 \rangle_q \subset \langle \mathbf{x}_2 \rangle_q \}.$$

### 3.4.2 Public Key Encryption

RQC uses two types of codes. The first code is a publicly known Gabidulin code  $\mathcal{G}(n,k)$  with a generator matrix  $\mathbf{G}_{\mathsf{G}} \in \mathbb{F}_{q^m}^{k \times n}$  which is generated by  $\mathbf{g}_{\mathsf{G}} \in \mathbb{F}_{q^m}^n$ . The second code is a random 2-ideal code  $\mathcal{C}_{\mathsf{R}}(2n,n)$  ideal [2n,n] code  $\mathcal{C}_{\mathsf{R}}$  with a parity check matrix

$$\mathbf{H}_{\mathsf{R}} = \begin{pmatrix} \mathbf{I}_n & \mathcal{I}\mathcal{M}(\mathbf{h}_{\mathsf{R}})^{\top} \end{pmatrix} \in \mathbb{F}_{q^m}^{n \times 2n}.$$

| Parameter      | Stands for                              | Restriction                                 |  |
|----------------|---|---|--|
| $\overline{q}$ | field order                             | prime power                                 |  |
| m              | extension degree                        | $1 \le m$                                   |  |
| n              | length of the Gabidulin code            | $n \le m$                                   |  |
| k              | dimension of the Gabidulin code         | $k \le n$                                   |  |
| w              | error weight of the public key syndrome | $w \le \lfloor \frac{n-k}{2} \rfloor$       |  |
| $w_{R}$        | error weight of the ciphertext syndrome | $ww_{R} \leq \lfloor \frac{n-k}{2} \rfloor$ |  |

Table 3.3: Parameters of the RQC System

Algorithms 27–29 constitute the public key encryption version of the RQC scheme, where a description of the parameters is given in Table 3.3.

```
Algorithm 27: KeyGen (·) (Aguilar Melchor et al., 2019b; Aguilar-Melchor et al.,
2018)
    Input: Parameters
                   param = \{n, k, w, w_R, P \in \mathbb{F}_q[X] \text{ is an irreducible polynomial of degree } n\}
    Output: Secret key sk, public key pk
\mathbf{1} \ \mathbf{h}_{\mathsf{R}} \overset{\$}{\leftarrow} \mathbb{F}_{q^m}^n
\mathbf{g}_\mathsf{G} \overset{\$}{\leftarrow} \mathcal{S}_n^n
\mathbf{s} \ (\mathbf{x}, \mathbf{y}) \stackrel{\$}{\leftarrow} \mathcal{S}_{1,w}^{2n}
\mathbf{4} \ \mathbf{s} \leftarrow \mathbf{x} + \mathbf{y} \mathbf{h}_{\mathsf{R}} \mod P
5 return sk \leftarrow (\mathbf{x}, \mathbf{y}), pk \leftarrow (\mathbf{g}_{\mathsf{G}}, \mathbf{h}_{\mathsf{R}}, \mathbf{s})
Algorithm 28: Enc (·) (Aguilar Melchor et al., 2019b; Aguilar-Melchor et al.,
    Input: Plaintext \mathbf{m} \in \mathbb{F}_{q^m}^k, public key \mathsf{pk} = (\mathbf{g}_\mathsf{G}, \mathbf{h}_\mathsf{R}, \mathbf{s})
    Output: Ciphertext \mathbf{c} \in \mathbb{F}_{q^m}^{2n}
\mathbf{1} \ (\mathbf{r}_1, \mathbf{e}, \mathbf{r}_2) \stackrel{\$}{\leftarrow} \mathcal{S}^{3n}_{w_1, w_2}
\mathbf{u} \leftarrow \mathbf{r}_1 + \mathbf{r}_2 \mathbf{h}_{\mathsf{R}} \mod P
\mathbf{v} \leftarrow \mathbf{mG}_{\mathsf{G}} + \mathbf{sr}_2 + \mathbf{e} \mod P
\mathbf{c} \leftarrow (\mathbf{u}, \mathbf{v})
5 return c
Algorithm 29: Dec (·) (Aguilar Melchor et al., 2019b; Aguilar-Melchor et al.,
2018)
    Input: Ciphertext \mathbf{c} = (\mathbf{u}, \mathbf{v}) \in \mathbb{F}_{a^m}^{2n}, secret key \mathsf{sk} = (\mathbf{x}, \mathbf{y})
    Output: Plaintext \mathbf{m} \in \mathbb{F}_{q^m}^k
1 \ \mathbf{c'} \leftarrow \mathbf{v} - \mathbf{u}\mathbf{y}
   \mathbf{m} \leftarrow \mathsf{Decode}_{\mathcal{G}}\left(\mathbf{c}'\right) // Decode in the Gabidulin code \mathcal{G}(n,k) generated by \mathbf{G}_\mathsf{G} (see
           Section 2.8)
з return m
```

### 3.4.3 Attacks on the RQC System

There are two known types of attacks on the RQC system which both decode in a random 2-ideal code  $C_R(2n, n)$  for  $(\mathbf{x}, \mathbf{y}) \in \mathcal{S}_{1,w}^{2n}$  or in a random 3-ideal code  $C_R(3n, n)$  for  $(\mathbf{e}, \mathbf{r}_1, \mathbf{r}_2) \in \mathcal{S}_{w_R}^{3n}$ . There is no known attack that utilizes the ideal structure of the code. Hence, ordinary attacks on the RSD problem give the best-known attacks. These include combinatorial attacks, such as the one by Aragon *et al.* (2018), as well as the algebraic attacks by Bardet *et al.* (2020a) and Bardet *et al.* (2020b).

| System name     | sk    | pk      | ct   | Security | DFR |
|-----------------|-------|---------|------|----------|-----|
| RQC-I           | 40    | 1834    | 3652 | 128 bit  | no  |
| ROLLO-I-128     | 40    | 696     | 696  | 128 bit  | yes |
| Loidreau-128    |       | 6720    | 464  | 128 bit  | no  |
| BIKE-2 Level 1  | 249   | 1271    | 1271 | 128 bit  | yes |
| McEliece348864  | 6452  | 261120  | 128  | 128 bit  | no  |
| RQC-II          | 40    | 2853    | 5690 | 192 bit  | no  |
| ROLLO-I-192     | 40    | 958     | 958  | 192 bit  | yes |
| Loidreau-192    |       | 11520   | 744  | 192 bit  | no  |
| BIKE-2 Level 2  | 387   | 2482    | 2482 | 192 bit  | yes |
| McEliece460896  | 13568 | 524160  | 188  | 192 bit  | no  |
| RQC-III         | 40    | 4090    | 8164 | 256 bit  | no  |
| ROLLO-I-256     | 40    | 1371    | 1371 | 256 bit  | yes |
| Loidreau-256    |       | 16128   | 1024 | 256 bit  | no  |
| BIKE-2 Level 3  | 513   | 4094    | 4094 | 256 bit  | yes |
| McEliece6688128 | 13892 | 1044992 | 240  | 256 bit  | no  |

**Table 3.4:** Comparison of memory costs of sk, pk and the ciphertext ct in Byte of IND-CCA-secure Loidreau (Shehhi *et al.*, 2019) and the NIST proposals RQC (Aguilar Melchor *et al.*, 2019b), ROLLO (Aguilar Melchor *et al.*, 2019a), BIKE (Aragon *et al.*, 2019a) and Classic McEliece (Bernstein *et al.*, 2019). The entry 'yes' in the column DFR indicates that a scheme has a decryption failure rate larger than 0.

# 3.5 Parameters of Public-Key Encryption Schemes

Table 3.4 compares the key sizes for different security levels (pre- and post-quantum) of—as of today—unbroken rank-metric code-based public-key encryption schemes.

# 3.6 Signature Schemes

Signature schemes are used to guarantee authenticity and integrity. Code-based cryptography is almost exclusively known for PKEs and Key Encapsulation Mechanisms (KEMs) (e.g., Classic McEliece, BIKE, HQC), but not for signature schemes. Three code-based signature schemes had been submitted to the first round of NIST's process for PQC standardization in 2017 (pqsigRM, RaCoSS, RankSign), but none of these advanced to the third or even the second round as they were all broken. Since the start of the NIST PQC process, there was however further progress on signatures: on the one hand, from initially very diverse submissions, only lattice-based schemes remained as finalists. On the other hand, cryptographic research has led to new promising schemes, e.g., based on isogenies.

Code-based signatures have evolved as well. Recent proposals for signature schemes include Wave by Debris-Alazard et al. (2018) and Durandal by Aragon et al. (2019b). Wave is based on generalized (U, U + V) codes, while Durandal is an adaption of the Schnorr–Lyubashevsky (Lyubashevsky, 2012) approach in the rank metric. While this proposal is considered secure, its Hamming-metric counterpart was attacked in (Baldi et al., 2020).

# 4 Applications to Storage

Motivated by the popularity of cloud services, coding theoretic solutions for problems related to storage and distribution of content have surged in interest in recent years. In this chapter we introduce two such settings—locality in distributed storage and coded caching—and discuss the application of rank-metric codes to address these problems. In Section 4.1 we provide a high-level description of the property exploited by many constructions of (MR) LRCs and explore the connection between rank-metric codes and codes with locality, both in the Hamming and the rank metric. In Section 4.2 we present the application of Maximum Rank Distance (MRD) codes in the coded caching scheme by Tian and Chen (2018).

# 4.1 Locality in Distributed Data Storage

The goal of a distributed storage system is to store data such that the failure of a number of nodes is guaranteed not to incur data loss. The simplest solution is replication, where identical copies of the data are stored at each node. While this has the advantage that a failed node is simply recovered by creating another replica, the downside is the significant storage overhead. To reduce this overhead, systems such as Facebook's f4 storage system (Muralidhar et al., 2014) and the Google File System (Fikes, 2010) have transitioned to employing maximum distance separable (MDS) codes. Given a number of node failures that has to be tolerated, the MDS property guarantees a minimal storage overhead. However, if even a single node fails in such a system, which is the most likely failure event, it also implies that a large number of nodes needs to be involved in the repair process. To mitigate this effect, storage codes with locality were introduced<sup>1</sup>, which enforce linear dependencies between smaller subsets of positions. This suggests a separation of the parity check equations into local parities, which are prescribed to have a specific support, and global parities, which are unrestricted. The seminal work by Gopalan et al. (2012) introduced a bound on the minimum Hamming distance of a code with one local parity for every subset of a partition

<sup>&</sup>lt;sup>1</sup>This should be regarded as a specific notion of locality that caters to the requirements of distributed storage systems. The concept of locality in general has a long history in coding theory and is the underlying property for, e.g., the majority logic decoding algorithm for Reed–Muller (RM) codes (MacWilliams and Sloane, 1988, Ch. 13).

of the code positions and an arbitrary number of global parities. Codes for this setting are commonly referred to as locally recoverable codes (LRCs). This class forms a special case of the general definition of codes for topologies, formally introduced in (Gopalan et al., 2014). There, a topology is defined as a restriction on the support of the parity-check matrix of a code. Given such a topology, a subclass of particular interest are maximally recoverable (MR) codes (Huang et al., 2007; Chen et al., 2007), which guarantee to correct any erasure pattern that is theoretically correctable, given the locality (support) constraints. The special case of MR LRCs (Huang et al., 2007; Chen et al., 2007; Blaum et al., 2013; Gopalan et al., 2014; Balaji and Kumar, 2015; Blaum et al., 2016; Calis and Koyluoglu, 2016; Hu and Yekhanin, 2016; Gopalan et al., 2017; Horlemann-Trautmann and Neri, 2020; Gabrys et al., 2018; Martínez-Peñas and Kschischang, 2019), also referred to as partial MDS (PMDS) codes, has received considerable attention in recent years. Interestingly, many constructions of MR LRCs (Blaum et al., 2013; Rawat et al., 2014; Calis and Koyluoglu, 2016; Hu and Yekhanin, 2016; Gabrys et al., 2018) and MR codes for other topologies (Gopalan et al., 2014; Holzbaur et al., 2021a) rely on some variation of MRD codes, specifically Gabidulin codes, as their global parities, even if this connection is often not made explicit.

The first part of this section is dedicated to highlighting this connection between MRD codes and codes with locality, which shows that codes originally designed for the rank metric, also have application in the Hamming metric. Furthermore, we briefly introduce the concept of codes with locality in the rank metric.

#### 4.1.1 Codes with Locality in the Hamming Metric

In this section, we consider codes in the Hamming metric, constructed using MRD codes. For completeness, we briefly recall the definition of the Hamming distance here. A linear  $[n,k,d^{(\mathsf{H})}]_q^\mathsf{H}$  code  $\mathcal C$  is a k-dimensional subspace of  $\mathbb F_q^n$  and its minimum Hamming distance is defined to be

$$\mathit{d}^{(\mathsf{H})} = \min_{\mathbf{c} \in \mathcal{C} \setminus \{\mathbf{0}\}} \operatorname{wt}_{\mathsf{H}}(\mathbf{c}) \;,$$

where  $wt_{\mathsf{H}}(\mathbf{c})$  is the number of non-zero positions in  $\mathbf{c}$ . It is well-known (MacWilliams and Sloane, 1988, Chapter 17), that any code fulfills the Singleton bound, given by

$$d^{(\mathsf{H})} \le n - k + 1 \tag{4.1}$$

and codes that meet the bound with equality are referred to as maximum distance separable (MDS) codes.

A code with locality does not only impose distance constraints on the full codewords, but also on subsets of their positions. There are several different notions of codes with locality which can be classified into three main classes. Informally, locally repairable codes (LRCs) require that every position can be recovered from a small subset of other positions.

Maximally recoverable (MR) LRCs<sup>2</sup> are additionally required to correct any erasure pattern that is possibly correctable given the locality constraints. Finally, codes for topologies are simply defined by a restriction on the support of a parity-check matrix of the code. The latter were defined by Gopalan *et al.* (2014) and we slightly adapt the definition here to better reflect the common separation of parities in codes with locality into local and global parities.

**Definition 4.1.1** (Codes for topologies (Gopalan *et al.*, 2014)). Let  $T \subset ([n-k-s] \times [n])$  be a subset of indices. We say an  $[n,k]_q^{\mathsf{H}}$  code  $\mathcal{C}$  is a *code for the topology* T if there exists a parity-check matrix of  $\mathcal{C}$  given by

$$\mathbf{H} = egin{pmatrix} \mathbf{H}^{(\mathsf{local})} \ \mathbf{H}^{(\mathsf{global})} \end{pmatrix}$$

with  $\mathbf{H}^{(\mathsf{local})} \in \mathbb{F}_q^{n-k-s \times n}$  and  $\mathbf{H}^{(\mathsf{global})} \in \mathbb{F}_q^{s \times n}$  such that  $\mathbf{H}_{i,j}^{(\mathsf{local})} = 0 \ \forall (i,j) \in T$ .

Observe that the restriction on the support of the parity-check matrix given by the topology T is a prerequisite for a code to have locality—for any subset of positions that allows for the recovery of another position, there must exist a codeword in the dual code that is only supported on these positions. Definition 4.1.1 includes LRCs and MR LRCs as special cases, where the matrix  $\mathbf{H}^{(\text{local})}$  is given by a block diagonal matrix (up to permutation of the columns).

**Example 4.1.1.** Informally, a code has r-locality if any codeword position can be recovered from at most r other codeword positions. Commonly, these  $repair\ sets$  are assumed to partition the set of codeword indices. Consider, for example, a code of length n=12 and locality r=3, with local repair sets given by the partition of [n] into the three sets  $\mathcal{W}_1=[1,4],\ \mathcal{W}_2=[5,8],$  and  $\mathcal{W}_3=[9,12].$  A code where each position  $\mathbf{c}_i$  for  $i\in\mathcal{W}_j,j\in[1,3]$  can be recovered from the remaining positions  $\{\mathbf{c}_l\mid l\in\mathcal{W}_j\setminus\{i\}\}$  in the set  $\mathcal{W}_j$  is obtained by choosing

To see that position i=1 can be recovered as required, it suffices to rearrange the first parity-check equation given by

$$\sum_{l=1}^{4} \mathbf{c}_l = 0 \quad \Leftrightarrow \quad \mathbf{c}_1 = -\sum_{l=2}^{4} \mathbf{c}_l \ .$$

Obviously, this matrix fulfills the constraints of the topology

$$T = \big\{ (1,l) | l \in [5,12] \big\} \cup \big\{ (2,l) | l \in ([1,4] \cup [9,12]) \big\} \cup \big\{ (3,l) | l \in [1,8] \big\} \ .$$

<sup>&</sup>lt;sup>2</sup>These codes are also referred to as partial MDS codes in literature.

Depending on the specific subclass under consideration, the global parities given by  $\mathbf{H}^{(\mathsf{global})}$ , which are not restricted in their support, are then used to either maximize the minimum Hamming distance of the code (LRCs) or the number of erasures that can be corrected once the local correction capabilities are exhausted (MR LRCs), where the latter is a strictly stronger property. The goal of this chapter is to show that MRD codes are a natural choice to provide these global parities, a fact that has been exploited (more or less explicitly) by many of the known constructions, in particular for the stronger notion of locality of MR codes.

To this end, we first establish a well-known connection between the correctability of a given set of erasures and the properties of the generator and parity-check matrix of a linear code.

**Proposition 4.1.1.** Let  $\mathcal{C}$  be an  $[n,k,d^{(\mathsf{H})}]_q^\mathsf{H}$  code. Denote by  $\mathbf{G}$  and  $\mathbf{H}$  an arbitrary generator and parity-check matrix of  $\mathcal{C}$ . Then a set of erasures  $\mathcal{E} \subset [n]$  is correctable if and only if the following equivalent conditions hold:

1. The generator matrix restricted to the non-erased positions is of full rank, i.e.,

$$\operatorname{rk}(\mathbf{G}|_{[n]\setminus\mathcal{E}}) = k$$
.

2. The parity-check matrix restricted to the erased positions is of full rank, i.e.,

$$\operatorname{rk}(\mathbf{H}|_{\mathcal{E}}) = |\mathcal{E}|$$
.

#### 4.1.2 Global Parities via MRD Codes

To establish the goal in terms of erasure correction capability when designing codes with locality, we first discuss the maximal improvement achievable by adding global parities. A similar analysis was carried out for binary locality restrictions by Gopalan *et al.* (2014) and for the subclass of grid-like topologies by Holzbaur *et al.* (2021a). Here, we focus on the general definition of locality given in Definition 4.1.1 because the advantage of using MRD codes lies in their generality. However, note that the following also directly applies to MR LRCs, for which the set of correctable patterns was derived by Blaum *et al.* (2013).

Consider a code  $\mathcal{C}$  as in Definition 4.1.1. Assume the matrix  $\mathbf{H}^{(\text{local})} \in \mathbb{F}_q^{n-k-s}$  is given and fulfills the restrictions imposed by some topology T. We denote by  $\mathbb{E}$  the set of erasure patterns of weight n-k-s that the code spanned by the local parity checks of  $\mathbf{H}^{(\text{local})}$  can correct. By Proposition 4.1.1 this set is exactly given by

$$\mathbb{E}^{(\mathsf{local})} = \{\mathcal{E} \subset [n] \mid |\mathcal{E}| = n-k-s, \mathrm{rk}(\mathbf{H}^{(\mathsf{local})}|_{\mathcal{E}}) = n-k-s\}$$

Note that this set uniquely defines the set of erasure patterns of arbitrary weight correctable in this code, given by all subsets of the elements of  $\mathbb{E}^{(local)}$ , i.e., the code can correct all

patterns in

$$\{\mathcal{E} \subset [n] \mid \exists \mathcal{E}' \in \mathbb{E}^{(\mathsf{local})} \text{ s.t. } \mathcal{E} \subseteq \mathcal{E}'\}.$$

As the correctability of an erasure pattern  $\mathcal{E}'$  directly implies that all its subsets can be corrected, we only consider these maximal patterns here.

Similarly, the set of maximal erasure patterns  $\mathbb{E}$  correctable by the code  $\mathcal{C}$  is given by

$$\mathbb{E} = \{ \mathcal{E} \subset [n] \mid |\mathcal{E}| = n - k, \operatorname{rk}(\mathbf{H}|_{\mathcal{E}}) = n - k \} . \tag{4.2}$$

Observe that

$$\operatorname{rk}(\mathbf{H}|_{\mathcal{E}}) = \operatorname{rk}\left(\begin{pmatrix} \mathbf{H}^{(\mathsf{local})}|_{\mathcal{E}} \\ \mathbf{H}^{(\mathsf{global})}|_{\mathcal{E}} \end{pmatrix}\right) = n - k ,$$

and the dimensions of the matrices directly imply the necessary condition that  $\operatorname{rk}(\mathbf{H}^{(\operatorname{local})}|_{\mathcal{E}}) = n-k-s$  for any  $\mathcal{E} \in \mathbb{E}$ . Trivially, it follows that there exists some  $\mathcal{E}' \subset \mathcal{E}$  with  $|\mathcal{E}'| = n-k-s$  such that  $\operatorname{rk}(\mathbf{H}^{(\operatorname{local})}|_{\mathcal{E}'}) = n-k-s$ , i.e., the pattern  $\mathcal{E}$  can be written as a union of two disjoint sets  $\mathcal{E} = \mathcal{E}' \cup \mathcal{I}$  with  $\mathcal{E}' \in \mathbb{E}^{(\operatorname{local})}$  and  $|\mathcal{I}| = s$ . This implies that

$$\mathbb{E} \subseteq \{ \mathcal{E}' \cup \mathcal{I} \mid \mathcal{E}' \in \mathbb{E}^{(\mathsf{local})}, \mathcal{I} \in [n] \setminus \mathcal{E}', |\mathcal{I}| = s \} . \tag{4.3}$$

In other words, every erasure pattern correctable by  $\mathbb{E}$  can be written as the union of a pattern in  $\mathbb{E}^{(local)}$  and s additional positions.

To see that this is exactly the set of correctable patterns, we require the following lemma, which is based on employing MRD codes as the global parities. Note that similar methods have been used in literature to prove properties of codes with locality, see, e.g., (Hu and Yekhanin, 2016, Claim 3).

**Lemma 4.1.1.** Let  $\mathbf{A} \in \mathbb{F}_q^{a \times n}$  with  $\mathrm{rk}(\mathbf{A}) = a$  and  $\mathbf{B} \in \mathbb{F}_q^{b \times n}$  be a parity-check matrix of an  $[n, n-b]_{q^m}^{\mathsf{R}}$  MRD code, where  $b \leq n-a$ . Then

$$\operatorname{rk}_{q^m} \left( \begin{bmatrix} \mathbf{A} \\ \mathbf{B} \end{bmatrix} \right) = a + b .$$

*Proof.* The ranks of  $\mathbf{A}, \mathbf{B}$  sum up if their  $\mathbb{F}_{q^m}$ -row spans intersect trivially. First, consider an element in the row space  $\langle \mathbf{A} \rangle_{\mathbb{F}_{q^m}}$  given by

$$\mathbf{v} = \mathbf{u} \cdot \mathbf{A}$$

with  $\mathbf{u} \in \mathbb{F}_{q^m}^a$ . Clearly,  $\mathrm{rk}_{\mathbb{F}_q}(\mathbf{u}) \leq a$  and since  $\mathbf{A}$  is in  $\mathbb{F}_q$ , we have  $\mathrm{rk}_{\mathbb{F}_q}(\mathbf{v}) \leq a$ .

Now consider  $\langle \mathbf{B} \rangle_{\mathbb{F}_{q^m}}$ . As **B** is the parity-check matrix of an  $[n, n-b]_{q^m}^{\mathsf{R}}$  MRD code, its row span is an  $[n, b]_{q^m}^{\mathsf{R}}$  MRD code. Therefore, every non-zero element  $\mathbf{w} \in \langle \mathbf{B} \rangle$  is of  $\mathbb{F}_q$ -rank

$$\operatorname{rk}_{\mathbb{F}_q}(\mathbf{w}) \ge n - b + 1 \ge n - (n - a) + 1 = a + 1$$
.

Hence, the  $\mathbb{F}_{q^m}$ -row spans of **A** and **B** intersect trivially and the lemma statement follows.

This lemma directly implies a construction of a code for the topology T that is optimal in terms of its "global" erasure correction capability, i.e., given the matrix  $\mathbf{H}^{(local)}$  it corrects any pattern that is possibly correctable by adding s global parities.

**Construction 4.1.1.** Given a matrix  $\mathbf{H}^{(\text{local})} \in \mathbb{F}_q^{n-k-s \times n}$  that fulfills the constraints imposed by the topology T, define  $\mathcal{C}$  to be the code spanned by

$$\mathbf{H} = egin{pmatrix} \mathbf{H}^{(\mathsf{local})} \\ \mathbf{H}^{(\mathsf{global})} \end{pmatrix} \; ,$$

where  $\mathbf{H}^{(\mathsf{global})} \in \mathbb{F}_{q^m}^{s \times n}$  is the parity-check matrix of an  $[n, n-s]_{q^m}^\mathsf{R}$  MRD code.

Now consider an erasure pattern

$$\mathcal{E} \in \{\mathcal{E}' \cup \mathcal{I} \mid \mathcal{E}' \in \mathbb{E}^{(\mathsf{local})}, \mathcal{I} \in [n] \setminus \mathcal{E}', |\mathcal{I}| = s\}$$

and a code  $\mathcal{C}$  as in Construction 4.1.1. It is easy to see that  $\mathbf{H}^{(\mathsf{global})}|_{\mathcal{E}}$  spans a  $[k+s,k]_{q^m}^{\mathsf{R}}$  MRD code. Furthermore, by (4.2) the matrix  $\mathbf{H}^{(\mathsf{local})}|_{\mathcal{E}}$  is of full-rank. It follows directly from Lemma 4.1.1 that  $\mathbf{H}|_{\mathcal{E}}$  is of full rank and therefore that  $\mathcal{C}$  can correct the pattern  $\mathcal{E}$ . Hence, the set of correctable patterns is exactly the set give in (4.3), i.e.,

$$\mathbb{E} = \{ \mathcal{E}' \cup \mathcal{I} \mid \mathcal{E}' \in \mathbb{E}^{(\mathsf{local})}, \mathcal{I} \in [n] \setminus \mathcal{E}', |\mathcal{I}| = s \} \ .$$

In particular, notice that if  $\mathbf{H}^{(local)}$  spans a code that is MR for the respective topology without global redundancy, i.e., a code that can correct any erasure pattern that is correctable given the support constraints on  $\mathbf{H}^{(local)}$  imposed by the topology T, Construction 4.1.1 gives a code that is MR for the topology T including the "global" unrestricted parities in  $\mathbf{H}^{(global)}$ .

The construction given in Construction 4.1.1 is intended as a proof of concept on how MRD codes can be applied to construct codes with locality. It is easy to see that requiring  $\mathbf{H}^{(\mathsf{global})}$  to span an  $[n, n-s]_{q^m}^{\mathsf{R}}$  MRD code is a stronger property than required for the application of Lemma 4.1.1. Instead it suffices that for any  $\mathcal{E} \in \mathbb{E}$  the code spanned by  $\mathbf{H}^{(\mathsf{global})}|_{\mathcal{E}}$  is an  $[k+s,k]_{q^m}^{\mathsf{R}}$  MRD code.

On a high level, the constructions by Blaum et al. (2013), Rawat et al. (2014), Calis and Koyluoglu (2016), Hu and Yekhanin (2016), Gopalan et al. (2014), and Holzbaur et al. (2021a) are based on ensuring this property (or a similar property on the generator matrix), either by explicitly making use of the structure of  $\mathbf{H}^{(local)}$  in the case of MR LRCs or employing more generic methods that ensure that any subset of k+s positions spans an MRD code. While there are constructions of MR LRCs resulting in lower field size, e.g., based on linearized RS code (Martínez-Peñas and Kschischang, 2019), employing MRD codes can also allow for providing other desired properties, such as the possibility of accommodating array codes (Rawat et al., 2014) or regeneration properties (Holzbaur et al., 2021b). However, the details of these applications are beyond the scope of this survey.

## 4.1.3 Codes with Locality in the Rank Metric

The previous sections were concerned with the construction of codes with locality in the Hamming metric, which is the metric best-motivated by storage applications. However, the concept of locality has also been considered in the rank metric by Kadhe *et al.* (2019).

**Definition 4.1.2** (Rank-locality (Kadhe *et al.*, 2019, Definition 2)). An  $[n, k, d]_{q^m}^R$  code  $\mathcal{C}$  is said to have  $(r, \rho)$  rank-locality, if for every column  $i \in [n]$ , there exists a set  $\Gamma(i) \subset [n]$  of indices such that

- $i \in \Gamma(i)$ ,
- $|\Gamma(i)| \leq r + \rho 1$ , and
- $d^{(\mathsf{R})}(\mathcal{C}|_{\Gamma(i)}) \geq \rho$ .

Similar to the Singleton-like bound in the Hamming metric derived by Gopalan *et al.* (2012) and generalized by Kamath *et al.* (2014), Kadhe *et al.* (2019) proves a bound on the minimum rank-distance of codes with locality in the rank metric independent of the field size.

**Theorem 4.1.2** (Bound on the rank-distance of codes with rank-locality (Kadhe *et al.*, 2019, Theorem 1)). For any  $[n, k, d]_{q^m}^R$  code  $\mathbb C$  with rank-locality  $(r, \rho)$ , the minimum rank-distance  $d_R$  is bounded by

$$d^{(\mathsf{R})}(\mathbb{C}) \le n - k + 1 - \left( \left\lceil \frac{k}{r} \right\rceil - 1 \right) (\rho - 1). \tag{4.4}$$

Along with this Singleton-like bound on the distance, (Kadhe et al., 2019) presented a code construction that achieves this bound with equality. This construction can be viewed as the skew-analog of the construction of Singleton-optimal codes with locality in the Hamming metric given in Tamo and Barg, 2014 (see also (Kadhe et al., 2019, Section III.C)), replacing the use of RS codes with Gabidulin codes.

**Definition 4.1.3** (Code with rank-locality (Kadhe *et al.*, 2019, Construction 1)). Let m, n, k, r, and  $\rho$  be positive integers such that r|k,  $(r+\rho-1)|n$ , and n|m. Define  $\mu=n/(r+\rho-1)$ . Let  $\mathcal{A}=\{\alpha_1,\ldots,\alpha_{r+\delta-1}\}$  be a basis of  $\mathbb{F}_{q^{r+\delta-1}}$  over  $\mathbb{F}_q$  and  $\mathcal{B}=\{\beta_1,\ldots,\beta_{\mu}\}$  be a basis of  $\mathbb{F}_{q^n}$  over  $\mathbb{F}_{q^{r+\rho-1}}$ . For  $1 \leq j \leq \mu$  define  $\mathcal{P}_j=\{\alpha_i\beta_j \mid i \in [r+\rho-1]\}$  and  $\mathcal{P}:=\bigcup_{j=1}^{\mu}\mathcal{P}_j$ .

Define the code

$$\mathcal{C} = \left\{ \left( f_{\mathbf{m}}(\gamma) \right)_{\gamma \in \mathcal{P}} | \mathbf{m} \in \mathbb{F}_{q^m}^k \right\}$$

with

$$f_{\mathbf{m}}(x) = \sum_{i=0}^{r-1} \sum_{j=0}^{\frac{k}{r}-1} m_{i+jr} x^{[(r+\delta-1)j+i]}$$
.

**Theorem 4.1.3** ((Kadhe *et al.*, 2019, Theorem 2)). The  $[n, k]_{q^m}^R$  code of Definition 4.1.3 has  $(r, \rho)$  rank-locality and fulfills the bound of Theorem 4.1.2 with equality.

The idea of the proof of this statement is similar to the corresponding proof in the Hamming metric in (Tamo and Barg, 2014) and based on determining a polynomial that is constant on all elements of  $\mathcal{P}_j$  for each  $j \in [r + \rho - 1]$ . For sake of brevity, we omit the proof of this theorem and refer the interested reader to (Kadhe *et al.*, 2019).

In Kadhe *et al.*, 2019 it is further shown that lifting (see Definition 5.4.3 on Page 87) the codes of Definition 4.1.3 results in codes with locality in the subspace metric.

# 4.2 Coded Caching Scheme with MRD Codes

Caching is a commonly-used data management strategy to reduce the communication load during the peak-traffic time where the terminals of the communication system are equipped with local caches.

### 4.2.1 System Description

Consider a cache-aided broadcast system consists of a transmitting server which has access to a library of N files  $W_1, \ldots, W_N$ , and K users, where each user has a cache that can store M files (see Figure 4.1 for an illustration). The shared links between the server and users are error-free. The communication is composed of two stages:

- 1. Placement Phase: The users fill their caches  $Z_1, \ldots, Z_K$  with (coded) file segments from the library according to a placement protocol. The communication cost in this phase is negligible.
- 2. Delivery Phase: The users reveal their demands  $d_1, \ldots, d_K$  and the server transmits a message  $X_{d_1,\ldots,d_K}$  so that each user  $k \in [1,K]$  can recover its demanded file  $W_{d_k}$  according to  $X_{d_1,\ldots,d_K}$  and its cache content  $Z_k, \forall k \in [1,K]$ .

Maddah-Ali and Niesen (2014), proposed a coded caching scheme that outperforms uncoded caching, where in the delivery phase the requested files (or segments of files) which are not cached are sent to each user individually. In the work by Maddah-Ali and Niesen (2014) and further improved scheme by Yu et al. (2018), binary coding is used in the communication phase while non-coded file segments are stored in the local caches. Rank-metric codes are used in the coded caching scheme with coded placement (Tian and Chen, 2018). This scheme is shown to outperform the optimal scheme with uncoded placement (Yu et al., 2018) in the regime of small cache size.

For schemes with uncoded placement, the principle for designing the placement is that coded multicasting opportunities are created simultaneously for all possible requests in the




Figure 4.1: Illustration of a Cache-Aided Broadcast System.

delivery phase. When the placement applies coding, in addition to the principle above, the coding coefficients should be chosen such that a set of full rank conditions are satisfied, which guarantees that all the file segments that are part of the linear combinations of the cached symbols can be decoded after receiving sufficient coded symbols in the delivery phase (Tian and Chen, 2018, Section IV.A). However, specifying the coding coefficients for generic parameters turns out to be difficult. Tian and Chen (2018) resolved the issue by a combination of rank metric codes (used in placement phase) and MDS codes (used in delivery phase), which provides an explicit solution apart from an existence proof by Ho et al. (2006).

#### 4.2.2 Coded Placement Scheme with Rank-Metric Codes

In the following, we describe the scheme from (Tian and Chen, 2018) with a focus on the placement phase as it uses rank-metric codes.

Fix an integer parameter  $1 \leq t \leq K$  and partition each file  $W_n$  into  $\binom{K}{t}$  subfiles  $W_{n,\mathcal{S}}$ , where  $\mathcal{S} \subseteq [1,K], |\mathcal{S}| = t$ .

A Gabidulin code  $\mathcal{G}(P_0, P)$  is used to encode the cached symbols, where

$$P = \binom{K-1}{t-1}N$$

and

$$P_o = 2 \binom{K-1}{t-1} N - \binom{K-2}{t-1} (N-1).$$

The code locators are denoted by  $g_1, g_2, \ldots, g_{P_0} \in \mathbb{F}_{q^m}$  and are linearly independent in  $\mathbb{F}_q$ . The cache  $Z_k$  of each user k is filled as follows:

### 1. Collect P subfiles

 $\{W_{n,\mathcal{S}}: \text{ for all } n \in [1,N] \text{ and } \mathcal{S} \text{ such that } k \in \mathcal{S}\}.$ 

Interpret each subfile as an element in  $\mathbb{F}_{q^m}$ . Denote by  $v_i$  the *i*-th subfile in this set, for all  $i \in [1, P]$ .

2. Encode the subfiles by evaluating the linearized polynomial

$$f(x) = \sum_{i=1}^{P} v_i x^{q^{i-1}}, v_i \in \mathbb{F}_{q^m}$$

at the last  $P_0 - P$  code locators  $g_{P_0 - P + 1}, \dots, g_{P_0} \in \mathbb{F}_{q^m}$  and place these coded symbols into the cache.

It can be seen that the cached content are the linear combination of subfiles of different files. Once the demand  $d_k$  of the user k is known, the subfiles of  $W_n$ ,  $n \neq d_k$ , which are components in the linear combination, will be seen as interference to the subfiles of  $W_{d_k}$ . The strategy of a delivery scheme is sending symbols to eliminate this interference as well as sending the remaining subfiles of  $W_{d_k}$  which are not part of the linear combinations stored in the cache  $Z_k$ . The delivery scheme by Tian and Chen (2018) utilizes MDS codes and consists of three main steps:

- 1. For each file  $W_n$ , send the uncoded subfiles that are *only* cached by the users who do not request  $W_n$ .
- 2. For each file  $W_n$ , collect all subfiles cached by the users of whom *some* do not request file  $W_n$  (skipping the subfiles that are already sent in Step 1), encode them with a systematic MDS code over  $\mathbb{F}_q$  and send the parity-check symbols.
- 3. For each file  $W_n$ , collect all subfiles cached by the users of whom all request  $W_n$ , encode them with a systematic MDS code over  $\mathbb{F}_q$  and send the parity-check symbols.

The length of the MDS code in Step 2 is chosen such that each user receives  $2P - P_0$  symbols which are linear combinations of the same subfiles as its cached symbols which are  $\mathbb{F}_q$ -linearly independent of the cached symbols. Therefore, after Step 1 and 2, each user can eliminate the interference and decode all the subfiles of the requested file which are part of the basis of its cached symbols, due to the fact it has collected P  $\mathbb{F}_q$ -linear combinations of P subfiles. The purpose of Step 3 is to guarantee that each user decodes the subfiles of its requested file which are not part of the linear combinations of its cached symbols. The length of the MDS in this step is therefore chosen to guarantee that all users receive sufficient linear independent symbols to achieve that.

The sketch above is a description of the delivery scheme for the case where all files are requested. For details and a variation for the case where some files are not requested, we refer interested readers to the original work (Tian and Chen, 2018).

# 5 Applications to Network Coding

Network coding is an elegant technique introduced to improve network throughput and performance. With its simple premise that intermediate nodes in the network can process incoming packets instead of only forwarding them, algebraic coding is a very straightforward approach to cope with this problem. In this chapter we introduce the applications of rankmetric codes in finding solutions for deterministic networks and error correction in random networks. In Section 5.1 we present several classifications of network coding problems. Section 5.2 presents a class of constructions based on MRD codes for a class of deterministic multicast networks, which guarantee that all the receivers decode all the messages. Two error models in networks that are often considered are described in Section 5.3. Section 5.4 introduces subspace codes, with the focus on the constructions by lifting rank-metric codes. Section 5.5 provides upper bounds on the size of subspace codes and an analysis of list decoding subspace codes.

### 5.1 Introduction

Consider a network consisting of one or multiple sources and one or multiple receivers with intermediate relay nodes as possible connections between the sources and receivers. The network coding problem can be formulated as follows: for each node in the network, find a function of its incoming messages to transmit on its outgoing links, such that each receiver can recover all (or a predefined subset of all) the messages. The set of functions that solve the network coding problem is a solution of the network. A network is said to be solvable if such functions exists. In the seminal paper by Ahlswede et al. (2000) it was shown that network coding increases the throughput compared to simple routing. Further, it was shown that network coding achieves the capacity of multicast networks (i.e., one-to-many scenarios). We can distinguish between linear and non-linear network coding and between deterministic and random network coding.

### • Linear vs. Non-Linear Network Coding

If the functions of a solution are restricted to be linear, the network coding is referred to as linear network coding. It was shown by Li et al. (2003) that forwarding linear combinations of the incoming packets at intermediate nodes suffices to achieve the multicast capacity. This observation is important since linear combinations are simple operations that can be performed efficiently at the intermediate nodes as well as at the transmitter and receiver. The performance of network coding depends on the choice of functions (also known as coding coefficients) at the intermediate nodes since an unfortunate choice of coding coefficients might cancel packets out. An algebraic formulation of the linear network coding problem and its solvability can be found

in (Kötter and Médard, 2003). Some works investigated the performance of network coding for practical uses, such as coded TCP (Kim et al., 2011) and forwarding coded packets in wireless mesh networks (Katti et al., 2008). If a non-linear function is employed in the network, then it is classified as non-linear network coding. Non-linear codes may employ a smaller alphabet than linear codes (Lehman and Lehman, 2004), however, they are rarely considered for practical usage due to the lack of efficient decoding algorithms.

#### • Deterministic vs. Random Network Coding

A network coding problem is called *deterministic* if the coding functions of all nodes are fixed and known by the receivers. A deterministic algorithm to compute the optimal coding coefficients that achieve the min-cut maximum flow capacity for the in-network linear combinations in polynomial time was proposed by Jaggi *et al.* (2005). In Section 5.2 we will discuss the application of rank-metric codes and subspace codes to (generalized) combination networks.

It was shown by Ho et al. (2006) that the multicast capacity can be reached with successful decoding probability approaching 1 as the field size of the randomly chosen coefficients of the linear combinations goes to infinity. In random linear network coding (RLNC), each node can choose the coding functions randomly. This RLNC approach has no need for central coordination of the network coding coefficients and thus can be used for dynamic networks.

### • Scalar vs. Vector Network Coding

If both, the coding coefficients and packets, are scalars, the solution is called a scalar network coding solution. Kötter and Médard (2003) provided an algebraic formulation for the linear network coding problem and its scalar solvability. Vector network coding as part of fractional network coding was mentioned in (Cannons et al., 2006). A solution of the network is called an (s,t) fractional vector network coding solution, if the edges transmit vectors of length t, but the message vectors are of length  $s \leq t$ . The case s = t = 1 corresponds to a scalar solution. Ebrahimi and Fragouli (2011) have extended the algebraic approach from (Kötter and Médard, 2003) to vector network coding. Here, all packets are vectors of length t and the coding coefficients are matrices. A set of  $t \times t$  coding matrices for which all receivers can recover their requested information, is called a vector network coding solution (henceforth, it will be called *vector solution*). Notice that vector operations imply linearity over vectors; therefore, a vector solution is always a (vector) linear solution. In terms of the achievable rate, vector network coding outperforms scalar linear network coding (Medard et al., 2003; Dougherty et al., 2007; Etzion and Wachter-Zeh, 2018). In (Etzion and Wachter-Zeh, 2018), it was shown that for special networks (generalized combination

networks), vector coding solutions based on rank-metric and subspace codes significantly reduce the required alphabet size. In one subfamily of these networks, the scalar linear solution requires a field size  $q_s = q^{(h-2)t^2/h + o(t)}$ , for even  $h \geq 4$ , where h denotes the number of messages, while (Etzion and Wachter-Zeh, 2018) provides a vector solution of field size q and dimension t. Such a vector solution has the same alphabet size as a scalar solution of field size  $q^t$ .

### 5.2 Solutions of Generalized Combination Networks

An  $(\varepsilon, \ell)$ - $\mathcal{N}_{h,r,\alpha\ell+\varepsilon}$  generalized combination network is a class of multicast networks, illustrated in Figure 5.1 (see also (Etzion and Wachter-Zeh, 2018)). The network has three

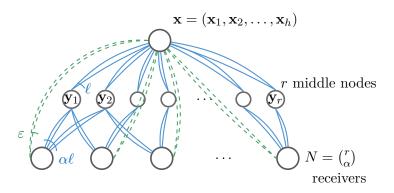


Figure 5.1: Illustration of  $(\varepsilon, \ell) - \mathcal{N}_{h,r,\alpha\ell+\varepsilon}$  networks

layers. The first layer consists of a source with h source messages. The source transmits coded messages to r middle nodes via  $\ell$  parallel links (solid lines) between itself and each middle node. Any  $\alpha$  middle nodes in the second layer are connected to a unique receiver (again, by  $\ell$  parallel links each). Each receiver is also connected to the source via  $\varepsilon$  direct links (dashed lines). Each one of the  $\binom{r}{\alpha}$  receivers demands all the h messages. It was shown by Etzion and Wachter-Zeh (2018, Thm. 8) that the  $(\varepsilon, \ell)$ - $\mathcal{N}_{h,r,\alpha\ell+\varepsilon}$  network has a trivial solution if  $h \leq \ell + \varepsilon$  and it has no solution if  $h > \alpha\ell + \varepsilon$ . Therefore we only consider the non-trivially solvable networks with  $\ell + \varepsilon < h \leq \alpha\ell + \varepsilon$  in this section.

A linear solution of an  $(\varepsilon, \ell)$ - $\mathcal{N}_{h,r,\alpha\ell+\varepsilon}$  network is a set of coding coefficients at all middle nodes, such that every receiver  $j \in [N]$  can recover all the h source messages  $\mathbf{x}_1, \ldots, \mathbf{x}_h$  from the received message  $\mathbf{y}_{j_1}, \ldots, \mathbf{y}_{j_{\alpha}}$ . If the messages  $\mathbf{x}_1, \ldots, \mathbf{x}_h$  are vectors in  $\mathbb{F}_q^t$  and the coding coefficients for each middle node are matrices over  $\mathbb{F}_q$ , the corresponding solution is called a *vector linear solution*. If the messages  $x_1, \ldots, x_h$  are scalars in  $\mathbb{F}_q$  (i.e., t = 1) and the coding coefficient at each middle node is a vector over  $\mathbb{F}_q$ , then the corresponding solution is called a *scalar linear solution*.

In the following, we provide two constructions for vector linear solutions of the  $(\varepsilon, \ell)$ - $\mathcal{N}_{h,r,\alpha\ell+\varepsilon}$  networks using rank-metric codes in Section 5.2.1.

#### 5.2.1 Vector Solutions Using MRD Codes

In this section, we present several constructions from (Etzion and Wachter-Zeh, 2018) of vector solutions of  $(\varepsilon, \ell)$ - $\mathcal{N}_{h,r,\alpha\ell+\varepsilon}$  networks.

**Theorem 5.2.1** (Roth (1991) and Lusina et al. (2003)). Let

$$\mathcal{D}_t \coloneqq \{\mathbf{0}_t, \mathbf{I}_t, \mathbf{C}, \mathbf{C}^2, \dots, \mathbf{C}^{q^t-2}\},$$

where **C** is a companion matrix of a primitive polynomial  $p(x) = p_0 + p_1 x + \dots + p_{t-2} x^{t-2} + p_{t-1} x^{t-1} + x^t \in \mathbb{F}_q[x]$ , i.e.,

$$\mathbf{C} \coloneqq \begin{pmatrix} 0 & 1 & 0 & \dots & 0 & 0 \\ 0 & 0 & 1 & \dots & 0 & 0 \\ \vdots & & & & & & \\ 0 & 0 & 0 & \dots & 0 & 1 \\ -p_0 & -p_1 & -p_2 & \dots & -p_{t-2} & -p_{t-1}, \end{pmatrix} \in \mathbb{F}_q^{t \times t}.$$

and is a primitive polynomial. Then,  $\mathcal{D}_t$  is an  $\mathcal{MRD}(t, q^t)$  code of  $q^t$  pairwise *commutative* matrices.

The following corollary considers block Vandermonde matrices which will be used for the vector solution. Note that  $\mathbf{I}_t = \mathbf{C}^{q^t-1} \in \mathcal{D}_t$ .

Corollary 5.2.2 (Etzion and Wachter-Zeh (2018)). Let  $\mathcal{D}_t$  be the  $\mathcal{MRD}(t, q^t)$  code defined by the companion matrix  $\mathbf{C}$  (Theorem 5.2.1). Let  $\mathbf{C}_i$ ,  $i = 1, \ldots, h$ , be distinct codewords of  $\mathcal{D}_t$ . Define the following  $(ht) \times (ht)$  block matrix:

$$\mathbf{M} = egin{pmatrix} \mathbf{I}_t & \mathbf{C}_1 & \mathbf{C}_1^2 & \dots & \mathbf{C}_1^{h-1} \ \mathbf{I}_t & \mathbf{C}_2 & \mathbf{C}_2^2 & \dots & \mathbf{C}_2^{h-1} \ dots & dots & dots & \ddots & dots \ \mathbf{I}_t & \mathbf{C}_h & \mathbf{C}_h^2 & \dots & \mathbf{C}_h^{h-1} \end{pmatrix}.$$

Then, any  $(ht) \times (\ell t)$  submatrix consisting of  $h\ell$  blocks of **consecutive columns** has full rank  $\ell t$ , for any  $\ell = 1, \ldots, h$ .

Note that the blocks of rows do not have to be consecutive, but a block has to be included with all its t rows in the submatrix.

Based on this corollary, we can now provide several constructions for the generalized combination networks with different parameters.

**Construction 5.2.1** (Construction for (0,1)- $\mathcal{N}_{h,r,h}$  combination network). Let

$$\mathcal{D}_t = \{\mathbf{C}_1, \mathbf{C}_2, \dots, \mathbf{C}_{q^t}\} \subset \mathbb{F}_q^{t \times t}$$

be the  $\mathcal{MRD}(t,q^t)$  code defined by the companion matrix  $\mathbf{C}$  (Theorem 5.2.1) and let  $r \leq q^t + 1$ . Consider the (0,1)- $\mathcal{N}_{h,r,h}$  combination network with message vectors  $\mathbf{x}_1, \ldots, \mathbf{x}_h \in \mathbb{F}_q^t$ . One node from the middle layer receives and transmits  $\mathbf{y}_r = \mathbf{x}_h$  and the other r-1 nodes of the middle layer transmit

$$\mathbf{y}_i = \left(\mathbf{I}_t \; \mathbf{C}_i \; \mathbf{C}_i^2 \; \dots \; \mathbf{C}_i^{h-1} \right) \cdot \left(\mathbf{x}_1 \; \mathbf{x}_2 \; \dots \; \mathbf{x}_h \right)^{ op} \in \mathbb{F}_q^t,$$

for i = 1, ..., r - 1.

The matrices  $\mathbf{I}_t, \mathbf{C}_i, \mathbf{C}_i^2, \dots, \mathbf{C}_i^{h-1}$ ,  $i = 1, \dots, r-1$ , are the coding coefficients of the incoming and outgoing edges of node i in the middle layer.

**Theorem 5.2.3** (Etzion and Wachter-Zeh (2018)). Construction 5.2.1 provides a vector linear solution of field size q and dimension t to the  $\mathcal{N}_{h,q^t+1,h}$  combination network, i.e.,  $\mathbf{x}_1, \ldots, \mathbf{x}_h$  can be reconstructed at all receivers.

*Proof.* Each receiver i obtains h vectors  $\mathbf{y}_{i_1}, \dots, \mathbf{y}_{i_h}$  and has to solve one of the following two systems of linear equations:

$$\begin{pmatrix} \mathbf{y}_{i_1}^\top \\ \mathbf{y}_{i_2}^\top \\ \vdots \\ \mathbf{y}_{i_b}^\top \end{pmatrix} = \begin{pmatrix} \mathbf{I}_t & \mathbf{C}_{i_1} & \mathbf{C}_{i_1}^2 & \dots & \mathbf{C}_{i_1}^{h-1} \\ \mathbf{I}_t & \mathbf{C}_{i_2} & \mathbf{C}_{i_2}^2 & \dots & \mathbf{C}_{i_2}^{h-1} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ \mathbf{I}_t & \mathbf{C}_{i_b} & \mathbf{C}_{i_b}^2 & \dots & \mathbf{C}_{i_b}^{h-1} \end{pmatrix} \cdot \begin{pmatrix} \mathbf{x}_1^\top \\ \mathbf{x}_2^\top \\ \vdots \\ \mathbf{x}_h^\top \end{pmatrix}$$

or

$$\begin{pmatrix} \mathbf{y}_{i_1}^\top \\ \vdots \\ \mathbf{y}_{i_{h-1}}^\top \\ \mathbf{y}_{r}^\top \end{pmatrix} = \begin{pmatrix} \mathbf{I}_t & \mathbf{C}_{i_1} & \mathbf{C}_{i_1}^2 & \dots & \mathbf{C}_{i_1}^{h-1} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ \mathbf{I}_t & \mathbf{C}_{i_{h-1}} & \mathbf{C}_{i_{h-1}}^2 & \dots & \mathbf{C}_{i_{h-1}}^{h-1} \\ \mathbf{0}_t & \mathbf{0}_t & \mathbf{0}_t & \dots & \mathbf{I}_t \end{pmatrix} \cdot \begin{pmatrix} \mathbf{x}_1^\top \\ \mathbf{x}_2^\top \\ \vdots \\ \mathbf{x}_h^\top \end{pmatrix},$$

for some distinct  $i_1, \ldots, i_h \in \{2, \ldots, r\}$ . According to Corollary 5.2.2, in both cases, the corresponding matrix has full rank and there is a unique solution for  $(\mathbf{x}_1 \ \mathbf{x}_2 \ \ldots \ \mathbf{x}_h)$ .

**Construction 5.2.2** (Construction for the (1,2)- $\mathcal{N}_{4,r,5}$  generalized combination network). Let

$$\mathcal{C} = \{\mathbf{C}_1, \mathbf{C}_2, \dots, \mathbf{C}_{q^{2t^2 + 2t}}\} \subseteq \mathbb{F}_q^{2t \times 2t}$$

be an  $\mathcal{MRD}(2t, q^{2t^2+2t})$  code of minimum rank-distance t and let  $r \leq q^{2t^2+2t}$ . Consider the (1, 2)- $\mathcal{N}_{4,r,5}$  network with message vectors  $\mathbf{x}_1, \mathbf{x}_2, \mathbf{x}_3, \mathbf{x}_4 \in \mathbb{F}_q^t$ . The i-th middle node

transmits:

$$\begin{pmatrix} \mathbf{y}_{i_1}^\top \\ \mathbf{y}_{i_2}^\top \end{pmatrix} = \begin{pmatrix} \mathbf{I}_{2t} & \mathbf{C}_i \end{pmatrix} \cdot \begin{pmatrix} \mathbf{x}_1^\top \\ \mathbf{x}_2^\top \\ \mathbf{x}_3^\top \\ \mathbf{x}_4^\top \end{pmatrix} \in \mathbb{F}_q^{2t}, \quad i = 1, \dots, r.$$

The direct link from the source which ends in the same receiver as the links from two distinct middle nodes  $i, j \in \{1, 2, ..., r\}$  transmits the vector

$$\mathbf{z}_{ij} = \mathbf{P}_{ij} \cdot \left(\mathbf{x}_1, \mathbf{x}_2, \mathbf{x}_3, \mathbf{x}_4\right)^{\top} \in \mathbb{F}_q^t,$$

where the matrix  $\mathbf{P}_{ij} \in \mathbb{F}_q^{t \times 4t}$  is chosen such that

$$\operatorname{rk}\begin{pmatrix} \mathbf{I}_{2t} & \mathbf{C}_i \\ \mathbf{I}_{2t} & \mathbf{C}_j \\ \mathbf{P}_{ij} \end{pmatrix} = 4t. \tag{5.1}$$

Since

$$\operatorname{rk}\begin{pmatrix}\mathbf{I}_{2t} & \mathbf{C}_i \\ \mathbf{I}_{2t} & \mathbf{C}_j \end{pmatrix} = \operatorname{rk}\begin{pmatrix}\mathbf{I}_{2t} & \mathbf{C}_i \\ \mathbf{0}_{2t} & \mathbf{C}_j - \mathbf{C}_i \end{pmatrix} \geq 3t,$$

it follows that the t rows of  $\mathbf{P}_{ij}$  can be chosen such that the overall rank of the matrix from (5.1) is 4t.

**Theorem 5.2.4.** Construction 5.2.2 provides a vector solution to the (1,2)- $\mathcal{N}_{4,r,5}$  network with messages of length t over  $\mathbb{F}_q$  for any  $r \leq q^{2t(t+1)}$ .

*Proof.* Each receiver  $R_{ij}$  (i.e., the receiver node connecting to the *i*-th and *j*-th middle node) obtains the vectors  $\mathbf{y}_{i_1}, \mathbf{y}_{i_2}, \mathbf{y}_{j_1}, \mathbf{y}_{j_2} \in \mathbb{F}_q^t$  and the vector  $\mathbf{z}_{ij}$  from the direct link. From these five vectors, the receiver wants to reconstruct the message vectors  $\mathbf{x}_1, \mathbf{x}_2, \mathbf{x}_3, \mathbf{x}_4$  by solving the following linear system of equations:

$$(\mathbf{y}_{i_1},\mathbf{y}_{i_2},\mathbf{y}_{j_1},\mathbf{y}_{j_2})^{ op} = egin{pmatrix} \mathbf{I}_{2t} & \mathbf{C}_i \ \mathbf{I}_{2t} & \mathbf{C}_j \ \mathbf{P}_{ij} \end{pmatrix} \cdot (\mathbf{x}_1,\mathbf{x}_2,\mathbf{x}_3,\mathbf{x}_4)^{ op}$$

The choice of  $\mathbf{P}_{ij}$  from Construction 5.2.2 guarantees that this linear system of equations has a unique solution for  $(\mathbf{x}_1, \mathbf{x}_2, \mathbf{x}_3, \mathbf{x}_4)$ .

Construction 5.2.2 can be further generalized to any  $(\varepsilon, \ell)$ - $\mathcal{N}_{2\ell,r,2\ell+\varepsilon}$  networks with  $\alpha = 2$  and  $\varepsilon \geq \ell - 1$ . In particular, we include the construction for the  $(\ell - 1, \ell)$ - $\mathcal{N}_{2\ell,r,3\ell-1}$  generalized combination network.

**Construction 5.2.3** (For  $(\ell-1,\ell)$ - $\mathcal{N}_{2\ell,r,3\ell-1}$  network). Let

$$\mathcal{C} = \{\mathbf{C}_1, \mathbf{C}_2, \dots, \mathbf{C}_{a^{\ell \varepsilon t^2 + \ell t}}\}$$

be an  $\mathcal{MRD}(\ell t, q^{\ell(\ell-1)t^2+\ell t})$  code of minimum rank-distance t and let r be any integer such that  $r \leq q^{\ell(\ell-1)t^2+\ell t}$ . Consider the  $(\ell-1,\ell)$ - $\mathcal{N}_{2\ell,r,3\ell-1}$  network with message vectors  $\mathbf{x}_1, \ldots, \mathbf{x}_{2\ell} \in \mathbb{F}_q^t$ , where  $\ell \geq 2$ . The i-th middle node transmits:

$$(\mathbf{y}_{i_1}, \mathbf{y}_{i_2})^{\top} = (\mathbf{I}_{\ell t} \quad \mathbf{C}_i) \cdot (\mathbf{x}_1, \dots, \mathbf{x}_{2\ell})^{\top} \in \mathbb{F}_q^{\ell t}, \quad i = 1, \dots, r.$$

The  $\ell-1$  direct links from the source, which end at the same receiver as the links from two distinct nodes  $i, j \in \{1, 2, ..., r\}$  of the middle layer, transmit the vectors

$$\mathbf{z}_{ijs} = \mathbf{P}_{ijs} \cdot \left(\mathbf{x}_1, \dots, \mathbf{x}_{2\ell}\right)^{\top} \in \mathbb{F}_q^t, \ s = 1, \dots, \ell - 1$$

where the  $t \times (2\ell t)$  matrices  $\mathbf{P}_{ijs}$  are chosen such that

$$\operatorname{rk} \begin{pmatrix} \mathbf{I}_{\ell t} & \mathbf{C}_{i} \\ \mathbf{I}_{\ell t} & \mathbf{C}_{j} \\ \mathbf{P}_{ij1} \\ \vdots \\ \mathbf{P}_{ij(\ell-1)} \end{pmatrix} = 2\ell t. \tag{5.2}$$

By the rank distance of C we have that  $\operatorname{rk}\begin{pmatrix} \mathbf{I}_{\ell t} & \mathbf{C}_i \\ \mathbf{I}_{\ell t} & \mathbf{C}_j \end{pmatrix} \geq \ell t + t = (\ell + 1)t$ , and hence the  $(\ell - 1)t$  rows of the matrices  $\mathbf{P}_{ijs}$  can be chosen such that the overall rank of the matrix from (5.2) is  $2\ell t$ .

The following result is an immediate consequence of this construction.

**Corollary 5.2.5.** Construction 5.2.3 provides a vector solution of field size q and dimension t to the  $(\ell-1,\ell)$ - $\mathcal{N}_{2\ell,r,3\ell-1}$  network for any  $r \leq q^{\ell(\ell-1)t^2+\ell t}$  with  $2\ell$  messages for any  $\ell \geq 2$ .

# 5.3 Error Control in (Random) Linear Network Coding

In the following, the constructions are based on the notion of *subspaces*. Therefore we first introduce the following notations related to subspaces used throughout the remainder of this chapter.

Given a subspace  $\mathcal{V} \in \mathbb{P}_q(N)$ , its orthogonal subspace is defined as

$$\mathcal{V}^{\perp} := \{ \mathbf{u} : \mathbf{v} \cdot \mathbf{u} = \mathbf{0} \ \forall \ \mathbf{v} \in \mathcal{V} \}$$
 (5.3)

The subspace distance between two subspaces  $\mathcal{U}, \mathcal{V}$  in  $\mathbb{P}_q(N)$  is defined as

$$d_{S}(\mathcal{U}, \mathcal{V}) := \dim(\mathcal{U} + \mathcal{V}) - \dim(\mathcal{U} \cap \mathcal{V})$$
$$= \dim(\mathcal{U}) + \dim(\mathcal{V}) - 2\dim(\mathcal{U} \cap \mathcal{V}) . \tag{5.4}$$

A different metric on  $\mathbb{P}_q(N)$  is the *injection distance* (Silva and Kschischang, 2009b; Silva, 2009) which is defined as

$$d_I(\mathcal{U}, \mathcal{V}) := \max\{\dim(\mathcal{U}), \dim(\mathcal{V})\} - \dim(\mathcal{U} \cap \mathcal{V}). \tag{5.5}$$

We now give a more detailed description of the channel models of (random) linear network coding.

#### 5.3.1 Matrix Channel

Suppose K packets  $\mathbf{x}_i \in \mathbb{F}_q^N$  for  $i \in [0, K-1]$  of length N are transmitted from a source to the receivers. Let the matrix  $\mathbf{X} \in \mathbb{F}_q^{K \times N}$  contain the transmitted packets  $\mathbf{x}_i \in \mathbb{F}_q^N$  for  $i \in [0, K-1]$  as rows. The in-network linear combinations from the source to one sink can be modeled by

$$\mathbf{y}_j = \sum_{i=0}^{K-1} a_{j,i} \mathbf{x}_i, \quad \forall j \in [0, M-1] \quad \Longleftrightarrow \quad \mathbf{Y} = \mathbf{A}\mathbf{X}$$

where the network matrix  $\mathbf{A}$  depends on the network topology as well as the coefficients of the linear combinations performed in the network. If  $\mathbf{A}$  is constant and known at the receiver we call the scenario coherent network coding. If  $\mathbf{A}$  is not known at the receiver we have noncoherent (or "channel oblivious") network coding (Yunnan et al., 2003; Kötter and Kschischang, 2008a). A scheme for noncoherent network coding was presented by Yunnan et al. (2003). The idea is to append an identity matrix to the packet matrix  $\mathbf{X}$  such that if  $\mathbf{A}$  has full rank K the transmitted packets in  $\mathbf{X}$  can be recovered from the received matrix  $\mathbf{Y}$  by Gaussian elimination.

In real networks the network matrix  $\mathbf{A}$  can have smaller rank than K due to an insufficient number of links from the source to a sink or erased packets due to link failures or an unfortunate choice of the coding coefficients. Additionally, noisy links may corrupt symbols or entire packets. A single malicious or lost packet in the received matrix  $\mathbf{Y}$  causes the scheme by Yunnan *et al.* (2003) to fail.

A matrix channel model (Kötter and Kschischang, 2008a; Silva et al., 2008; Silva, 2009) incorporating these types of errors is given by

$$\mathbf{y}_{j} = \sum_{i=0}^{K-1} a_{j,i} \mathbf{x}_{i} + \sum_{t=0}^{T-1} d_{j,t} \mathbf{z}_{t}, \quad \forall j \in [0, M-1] \quad \Longleftrightarrow \quad \mathbf{Y} = \mathbf{A}\mathbf{X} + \mathbf{D}\mathbf{Z}$$
 (5.6)

where  $\mathbf{D} \in \mathbb{F}_q^{M \times T}$  and the matrix  $\mathbf{Z} \in \mathbb{F}_q^{T \times N}$  contains T erroneous packets  $\mathbf{z}_t \in \mathbb{F}_q^N$  for  $t \in [0, T-1]$  as rows.

The challenge of error control in network coding is that linear combinations with erroneous packets again result in an erroneous packet which makes errors propagate through the entire network. The problem of error propagation is illustrated in Figure 5.2.




Figure 5.2: Error propagation in RLNC. A single link error can corrupt the entire transmission.

Error control for coherent network coding, i.e., if **A** is known at the transmitter and the receiver, was considered by Cai and Yeung (2002), Yeung and Cai (2006), and Cai and Yeung (2006). These schemes select the network coding coefficients such that they can be used for error correction.

#### 5.3.2 Operator Channel

In 2008, Kötter and Kschischang observed that in the error-free case for noncoherent RLNC (i.e.,  $\mathbf{Z} = \mathbf{0}$  and  $\mathrm{rk}_q(\mathbf{A}) = K$ ) the row space of the transmitted packet matrix is preserved by the random and unknown  $\mathbb{F}_q$ -linear combinations in the network, i.e., we have that  $\langle \mathbf{A} \ \mathbf{X} \rangle_q = \langle \mathbf{X} \rangle_q$  (Kötter and Kschischang, 2008a). This motivated their idea to consider the row space of the transmitted and received matrices  $\mathbf{X}$  and  $\mathbf{Y}$ . The row space  $\langle \mathbf{Y} \rangle_q$  of the received  $\mathbf{Y}$  in (5.6) can be decomposed into a direct sum

$$\langle \mathbf{Y} \rangle_{q} = \tilde{\mathcal{X}} \oplus \mathcal{Z},$$
 (5.7)

where  $\tilde{\mathcal{X}} = \langle \mathbf{X} \rangle_q \cap \langle \mathbf{Y} \rangle_q$  is a subspace of  $\langle \mathbf{X} \rangle_q$  and  $\mathcal{Z}$  is an error space that intersects trivially with  $\langle \mathbf{X} \rangle_q$  (i.e.,  $\mathcal{Z} \cap \langle \mathbf{X} \rangle_q = \mathbf{0}$ ). Motivated by the decomposition (5.7), Kötter and Kschischang (2008a) proposed a channel model that abstracts the linear network coding channel on the packet level (5.6) to the subspace level, i.e., the linear vector spaces spanned by the transmitted and received packets. The *operator channel* (Kötter and Kschischang, 2008a, Definition 1) is a discrete memoryless channel that has input and output from an alphabet  $\mathbb{P}_q(N)$ . The output  $\mathcal{U}$  is related to the input  $\mathcal{V}$  with  $n_t := \dim(\mathcal{V})$  by

$$\mathcal{U} = \mathfrak{H}_{n_t - \delta}(\mathcal{V}) \oplus \mathcal{E},\tag{5.8}$$


$$\mathcal{V} \in \mathbb{P}_q(N)$$
  $\mathcal{S}_{n_t - \delta}(\mathcal{V}) \oplus \mathcal{E}$   $\mathcal{U} \in \mathbb{P}_q(N)$ 

Figure 5.3: The operator channel (Kötter and Kschischang, 2008a).

where  $\mathfrak{H}_{n_t-\delta}(\mathcal{V})$  returns a random  $(n_t-\delta)$ -dimensional subspace of  $\mathcal{V}$ , and  $\mathcal{E}$  denotes an error space of dimension  $\gamma$  (see Figure 5.3). We call  $\delta$  the number of deletions and  $\gamma$  the number of insertions. We consider the worst case that  $\mathcal{V}$  and  $\mathcal{E}$  intersect trivially, i.e.,  $\mathcal{V} \cap \mathcal{E} = \{\mathbf{0}\}$ , since otherwise vectors that are contained in  $\mathcal{V}$  and  $\mathcal{E}$  but are not contained in  $\mathfrak{H}_{n_t-\delta}(\mathcal{V})$  might decrease the number of observed deletions at the channel output (Kötter and Kschischang, 2008a). Thus the noncorrupted subspace is  $\mathcal{U} \cap \mathcal{V} = \mathfrak{H}_{n_t-\delta}(\mathcal{V})$  and we have

$$\dim(\mathcal{U} \cap \mathcal{V}) \ge 0 \iff n_t \ge \delta \text{ and } \gamma = \dim(\mathcal{E}) \le N - n_t.$$
 (5.9)

The relation between the input and output of the operator channel is illustrated in Figure 5.4.



**Figure 5.4:** Illustration of the relation between the input and output of the operator channel (5.8). The transmitted space is  $\mathcal{V}$  (blue and green) and the received space is  $\mathcal{U} = (\mathcal{V} \cap \mathcal{U}) \oplus \mathcal{E}$  (green and red). The green intersection space is returned by  $\mathfrak{H}_{n_t-\delta}(\mathcal{V})$  and the red error space is  $\mathcal{E}$ .

The distribution of  $\mathfrak{H}_{n_t-\delta}(\mathcal{V})$  does not affect the performance of the code and can be chosen to be uniform (see (Kötter and Kschischang, 2008a)). Any type of errors occurring in the matrix channel (5.6) can be modeled by the operator channel (5.8) and vice versa. The dimension of the output subspace  $\mathcal{U}$  is then

$$n_r := \dim(\mathcal{U}) = \dim(\mathfrak{H}_{n_t - \delta}(\mathcal{V})) + \dim(\mathcal{E}) = n_t - \delta + \gamma.$$

The subspace distance between the input subspace  $\mathcal V$  and the output subspace  $\mathcal U$  is

$$d_{S}(\mathcal{V}, \mathcal{U}) = \dim(\mathcal{V}) + \dim(\mathcal{U}) - 2\dim(\mathcal{V} \cap \mathcal{U})$$

$$= n_{t} + n_{r} - 2(n_{t} - \delta)$$

$$= \gamma + \delta.$$
(5.10)

We further relate the input  $\mathcal{V}$  and the output  $\mathcal{U}$  with the following definition.

**Definition 5.3.1** ( $(\gamma, \delta)$ -Reachability). We say that a subspace  $\mathcal{V}$  is  $(\gamma, \delta)$ -reachable from a subspace  $\mathcal{U}$  if there exists a realization of the operator channel (5.8) with  $\gamma$  insertions and  $\delta$  deletions that transforms the input  $\mathcal{V}$  to the output  $\mathcal{U}$ .

If a space  $\mathcal{V}$  is  $(\gamma, \delta)$ -reachable from a space  $\mathcal{U}$ , then we have that  $d_{S}(\mathcal{U}, \mathcal{V}) = \gamma + \delta$ .

The operator channel is of particular interest to evaluate the performance of decoders for subspace codes (cf. Section 5.4). Later we present decoding schemes that can correct insertions and deletions beyond the unique decoding region by allowing a very small decoding failure probability. The decoding failure probability depends on the number of insertions  $\gamma$  and deletions  $\delta$ . We use the operator channel to validate the upper bounds for the decoding failure probability for particular values of  $\gamma$  and  $\delta$ .

# 5.4 Subspace Codes

Subspace codes have been proposed for error control for noncoherent RLNC, e.g., when the network topology and the random in-network linear combinations are not known or used by the transmitter and the receiver (Kötter and Kschischang, 2008a; Silva et al., 2008). This idea was motivated by *Grassmann* codes in the field of complex numbers that are used for multiple antenna channels (Zheng and Tse, 2002). Constructions of subspace codes from Gabidulin codes were proposed in 2003 as linear authentication codes (Wang et al., 2003). Kötter and Kschischang revisited the Reed–Solomon like construction by Wang et al. (2003) in the context of error correction in RLNC and proposed a suitable metric for subspaces (Kötter and Kschischang, 2008a).

**Definition 5.4.1** (Subspace Code). A subspace code  $C_s$  is a nonempty subset of  $\mathbb{P}_q(N)$ .

The minimum distance  $d_{\mathsf{S}}(\mathcal{C}_s)$  of a subspace code  $\mathcal{C}_s$  is defined as

$$d_{\mathsf{S}}(\mathcal{C}_s) := \min_{\mathcal{V}, \mathcal{V}' \in \mathcal{C}_s, \mathcal{V} \neq \mathcal{V}'} d_{\mathsf{S}}(\mathcal{V}, \mathcal{V}'). \tag{5.11}$$

#### 5.4.1 Constant-Dimension Subspace Codes

An important class of subspace codes are constant-dimension subspace codes, which are defined as follows.

**Definition 5.4.2** (Constant-Dimension Subspace Code). A constant-dimension subspace code of dimension  $n_t$  is a nonempty subset of  $\mathbb{G}_q(N, n_t)$ .

The relation between the subspace distance (5.4) and the injection distance (5.5) of a constant-dimension subspace code  $C_s$  is (see (Silva, 2009))

$$d_{\mathsf{S}}(\mathcal{C}_s) = 2d_I(\mathcal{C}_s). \tag{5.12}$$

In the following we consider constant-dimension codes only and use the subspace distance as a metric. All results can be expressed in terms of the injection distance by using (5.12).

Constructions of constant-dimension subspace codes were first considered by Wang et al. (2003) for linear authentication codes, later applied to RLNC by Kötter and Kschischang (2008a), Silva et al. (2008), and Silva (2009). The code rate of a constant-dimension subspace code  $C_s \subseteq \mathbb{G}_q(N, n_t)$  is defined as

$$R = \frac{\log_q(|\mathcal{C}_s|)}{Nn_t}. (5.13)$$

For a constant-dimension subspace code  $C_s \subseteq \mathbb{G}_q(N, n_t)$  with minimum distance  $d_{\mathsf{S}}(C_s)$ , the *complementary* code is define as the set of all orthogonal subspaces (see (5.3))

$$C_s^{\perp} := \left\{ V^{\perp} : \mathcal{V} \in \mathcal{C}_s \right\}. \tag{5.14}$$

The complementary code is a constant-dimension code  $C_s^{\perp} \subseteq \mathbb{G}_q(N, N - n_t)$  of size  $|C_s^{\perp}| = |C_s|$ , minimum distance  $d_{\mathsf{S}}(C_s^{\perp}) = d_{\mathsf{S}}(C_s)$  (Kötter and Kschischang, 2008a) and code rate

$$R^{\perp} = \frac{\log_q(|\mathcal{C}_s|)}{N(N - n_t)} = \frac{n_t}{N - n_t} R.$$
 (5.15)

Hence, we consider only codes with  $n_t \leq N/2$  since for each code with  $n_t > N/2$  there exists a complementary code with  $n_t < N/2$  that has the same minimum distance and a higher code rate.

#### 5.4.2 Lifted Rank-Metric Codes

It was shown by Silva et al. (2008) that constant-dimension subspace codes can be obtained by lifting rank-metric codes. Lifted MRD codes are "near-optimal" (Silva, 2009, Theorem 4.24). The lifting operation (Silva et al., 2008; Silva, 2009) appends the identity matrix to each rank-metric codeword and considers the row space of the resulting augmented matrix as a subspace codeword.

To describe a large variety of constant-dimension subspace codes that are constructed from rank-metric codes, we define a *generalized lifting* operation.

**Definition 5.4.3** (Generalized Lifting). Let  $\mathbf{A} \in \mathbb{F}_q^{n_t \times n_t}$  with  $\mathrm{rk}_q(\mathbf{A}) = n_t$  and let  $\mathbf{C} \in \mathbb{F}_q^{n_t \times M}$ . Define the map  $\Pi : \mathbb{F}_q^{n_t \times M} \mapsto \mathbb{G}_q(n_t + M, n_t)$ 

$$\mathbf{C} \mapsto \Pi_{\mathbf{A}}(\mathbf{C}) = \langle (\mathbf{A} \ \mathbf{C}) \rangle_{q}.$$
 (5.16)

The subspace  $\Pi_{\mathbf{A}}(\mathbf{C}) \in \mathbb{G}_q(n_t + M, n_t)$  is called an **A**-lifting of **C**. Given a matrix code  $\mathcal{C} \subseteq \mathbb{F}_q^{n_t \times M}$  the corresponding **A**-lifted code  $\Pi_{\mathbf{A}}(\mathcal{C}) \subseteq \mathbb{G}_q(n_t + M, n_t)$  is defined as

$$\Pi_{\mathbf{A}}(\mathcal{C}) \coloneqq \left\{ \Pi_{\mathbf{A}}(\mathbf{C}) : \mathbf{C} \in \mathcal{C} \right\}.$$

Let  $\mathcal{G}(n_t, k) \subseteq \mathbb{F}_q^{n_t \times n_t}$  be a Gabidulin code (see Definition 2.7.1) with evaluation points  $\alpha$ . There are two common choices for the lifting matrix  $\mathbf{A}$ .

The interpolation-based decoding scheme (Kötter and Kschischang, 2008a) uses  $\mathbf{A} = \operatorname{ext}_{\beta}(\alpha)$  to construct the subspace code  $\Pi_{\mathbf{A}}(\mathcal{G}(n,k))$ . This construction is beneficial for interpolation-based decoding schemes since the basis vectors contain the code locators and thus can be used directly for decoding. We call codes of this form *locator-lifted* rank-metric codes.

In the syndrome-based approach (Silva et al., 2008) an identity matrix is used to construct subspace codes of the form  $\Pi_{\mathbf{I}_{n_t}}(\mathcal{G}(n_t,k))$ . For syndrome-based decoding schemes a canonical form of the received basis is required which can be obtained easily by Gaussian elimination if the code is lifted using an identity matrix. Thus we call constructions of this form identity-lifted rank-metric codes.

For identity-lifted rank-metric codes the subspace distance of the lifted code is twice the rank distance of the rank-metric code (Silva *et al.*, 2008; Silva, 2009). The following lemma extends this result to **A**-lifted codes.

**Lemma 5.4.1** (Subspace Distance of **A**-Lifted Codes). Let  $C_r \subset \mathbb{F}_q^{n_t \times m}$  be a rank-metric code of length  $n_t$  and minimum distance  $d_r(C_r)$  over the field  $\mathbb{F}_q$ . Let  $\mathbf{A} \in \mathbb{F}_q^{n_t \times n_t}$  be nonsingular. Then the **A**-lifted subspace code  $C_s = \Pi_{\mathbf{A}}(C_r)$  has minimum subspace distance  $d_{\mathsf{S}}(C_s) = 2d_r(C_r)$ .

*Proof.* We have

$$d_{S}(C_{s}) = \Pi_{\mathbf{A}}(C_{r}) = \Pi_{\mathbf{I}}(\mathbf{A}^{-1}C_{r}).$$

Using Proposition 4 from Silva et al. (2008) we obtain

$$d_{\mathsf{S}}(\mathcal{C}_s) = \Pi_{\mathbf{I}}(\mathbf{A}^{-1}\mathcal{C}_r) = 2d_r(\mathbf{A}^{-1}\mathcal{C}_r) = 2d_r(\mathcal{C}_r).$$

A well-known method to obtain a parity check matrix from a systematic generator matrix of a code (Lin and Costello, 2004, p. 55) can be used to construct the complementary code (5.14) of an identity-lifted rank-metric code.

**Proposition 5.4.1** (Complementary Code of Identity-Lifted Code). Let  $C_r \subset \mathbb{F}_q^{n_t \times m}$  be a rank-metric code. Let  $C_s = \Pi_{\mathbf{I}}(C_r)$  be the corresponding identity-lifted rank-metric code in  $\mathbb{G}_q(N, n_t)$  with  $N = n_t + m$ . Then the complementary code  $C_s^{\perp}$  with dimension  $n_t^{\perp} = N - n_t$  can be constructed from  $C_r$  by

$$C_s^{\perp} = \left\{ \left\langle \left( -\mathbf{C}^{\top} \mathbf{I}_{n_t^{\perp}} \right) \right\rangle_q : \mathbf{C} \in C_r \right\}. \tag{5.17}$$

#### 5.4.3 Interleaved Subspace Codes

Identity-lifted *interleaved* Gabidulin codes were considered by Silva *et al.* (2008) to reduce the rate-loss due to the lifting and the computational complexity rather than increasing the decoding region. Decoding schemes for identity-lifted interleaved Gabidulin codes with an improved decoding region were proposed by Sidorenko and Bossert (2010) and Li *et al.* (2014). Locator-lifted interleaved Gabidulin codes - further called interleaved subspace codes - were first considered by Bartz and Wachter-Zeh (2014).

**Definition 5.4.4** (*L*-Interleaved Subspace Code). Let  $\alpha = (\alpha_0 \ \alpha_1 \ \dots \alpha_{n_t-1})^{\top}$  with  $n_t \leq m$  be a vector containing  $\mathbb{F}_q$ -linearly independent code locators from  $\mathbb{F}_{q^m}$ . For fixed integers  $k^{(1)}, \dots, k^{(L)} \leq n_t$ , an interleaved subspace code  $\mathcal{IS}[L; n_t, k^{(1)}, \dots, k^{(L)}]$  of dimension  $n_t$  and interleaving order L is defined as

$$\left\{ \left\langle \left( \boldsymbol{\alpha} \ f^{(1)}(\boldsymbol{\alpha}) \ f^{(2)}(\boldsymbol{\alpha}) \ \dots \ f^{(L)}(\boldsymbol{\alpha}) \right) \right\rangle_{q} : f^{(j)}(x) \in \mathbb{L}_{q^{m}}[x]_{< k^{(j)}}, \forall j \in [1, L] \right\}. \tag{5.18}$$

Let  $\mathbf{A} = \mathrm{ext}_{\beta}(\alpha)$ . L-interleaved subspace codes are  $\mathbf{A}$ -lifted interleaved Gabidulin codes  $\mathcal{IG}(L; n, k^{(1)}, \dots, k^{(L)})$  with code locators  $\alpha$  (see Definition 2.10.1), i.e., we have

$$\mathcal{IS}[L; n_t, k^{(1)}, \dots, k^{(L)}] = \Pi_{\mathbf{A}} \left( \mathcal{IG}(L; n_t, k^{(1)}, \dots, k^{(L)})^{\top} \right),$$

where  $\mathcal{IG}^{\top} \subset \mathbb{F}_{q^m}^{n_t \times L}$  is obtained by transposing all codewords of  $\mathcal{IG} \subset \mathbb{F}_{q^m}^{L \times n_t}$ .

If  $k^{(j)} = k, \forall j \in [1, L]$  we call the code a homogeneous interleaved subspace code and denote it by  $\mathcal{IS}[L, \alpha; n_t, k]$ . The basis vectors in (5.18) are of the form

$$(\alpha, \beta^{(1)}, \dots, \beta^{(L)})$$
 with  $\alpha \in \langle \boldsymbol{\alpha} \rangle_q, \beta^{(1)}, \dots, \beta^{(L)} \in \mathbb{F}_{q^m}$ 

and are expanded over the field  $\mathbb{F}_q$  before transmission. The ambient vector space is

$$W_s = \langle \underline{\alpha} \rangle_q \times \underbrace{\mathbb{F}_q^m \times \cdots \times \mathbb{F}_q^m}_{L \text{ times}}$$

with dimension  $\dim(W_s) = N = n_t + Lm$ .

The code rate of  $\mathcal{IS}[L; n_t, k^{(1)}, \dots, k^{(L)}]$  is

$$R = \frac{\log_q \left( |\mathcal{IS}[L; n_t, k^{(1)}, \dots, k^{(L)}]| \right)}{n_t N} = \frac{m \sum_{j=1}^L k^{(j)}}{n_t (n_t + Lm)}.$$
 (5.19)

For increasing interleaving order L the rate loss caused by the appended code locators decreases since  $n_t \ll Lm$ . For L=1 (no interleaving) the codes from Defintion 5.4.4 are equivalent to Kötter-Kschischang subspace codes (Kötter and Kschischang, 2008a).

**Proposition 5.4.2** (Minimum Distance of *L*-Interleaved Subspace Codes). The minimum subspace distance of an *L*-interleaved subspace code  $\mathcal{IS}[L, \alpha; n_t, k^{(1)}, \dots, k^{(L)}]$  as in Definition 5.4.4 is

$$d_{\mathsf{S}}(\mathcal{IS}) = 2\left(n_t - \max_{j \in [1,L]} \left\{k^{(j)}\right\} + 1\right).$$

#### 5.4.4 Decoding of Interleaved Subspace Codes

Decoding of interleaved subspace codes was considered in (Bartz, 2017; Bartz and Wachter-Zeh, 2018). The algorithm consists of two steps: the *interpolation step* computes  $r \leq L$  non-zero and (left)  $\mathbb{L}_{a^m}[x]$ -independent vectors of linearized polynomials

$$\mathbf{Q}^{(i)} = [Q_0^{(i)}, Q_1^{(i)}, \dots, Q_L^{(i)}] \in \mathbb{L}_{q^m}[x]^{L+1} \setminus \{\mathbf{0}\}, \ \forall i = 1, \dots, r$$

such that they fulfill certain degree and evaluation conditions with respect to the received space. The root-finding step finds all message polynomials  $f_j$  of degrees deg  $f_j < k$  such that

$$Q_0^{(i)} + \sum_{j=1}^u Q_j^{(i)} f_j = 0 \quad \forall i = 1, \dots, r.$$

If the number of insertions  $\gamma$  and deletions  $\delta$  satisfies  $\gamma + L\delta < L(n_t - k + 1)$ , then at least one satisfactory interpolation vector  $\mathbf{Q}^{(i)}$  exists, see (Bartz, 2017; Bartz and Wachter-Zeh, 2018). The output list contains the transmitted message polynomial vector. The algorithm can be considered as a partial unique or list decoder (Bartz, 2017; Bartz and Wachter-Zeh, 2018).

#### 5.4.5 Folded Subspace Codes

We present a family of folded subspace codes that can be decoded from insertions and deletions beyond the unique decoding region for any code rate R. This class of folded subspace codes is motivated by the constructions by Mahdavifar and Vardy (2012) and Guruswami and Wang (2013a) and was published by Bartz and Sidorenko (2015).

**Definition 5.4.5** (h-Folded Subspace Code). Let  $\alpha$  be a primitive element of  $\mathbb{F}_{q^m}$ . An h-folded subspace code  $\mathcal{FS}[h,\alpha;n_t,k]$  of dimension  $n_t$ , where  $hn_t \leq m$ , is defined as the set of subspaces

$$\left\{ \left\langle \left( \begin{array}{cccc} \alpha^0 & f(\alpha^0) & \dots & f(\alpha^{h-1}) \\ \alpha^h & f(\alpha^h) & \dots & f(\alpha^{2h-1}) \\ \vdots & \vdots & \vdots & \vdots \\ \alpha^{hn_t-h} & f(\alpha^{hn_t-h}) & \dots & f(\alpha^{hn_t-1}) \end{array} \right) \right\}_q : f(x) \in \mathbb{L}_{q^m}[x]_{\leq k} \right\}.$$

Defining the column vector  $\boldsymbol{\alpha}_F = \left(\alpha^0 \ \alpha^h \ \dots \ \alpha^{hn_t-h}\right)^\top$  we can write each codeword of  $\mathcal{FS}[h,\alpha;n_t,k]$  as

$$\left\langle \left( \boldsymbol{\alpha}_F \ f(\boldsymbol{\alpha}_F) \ f(\alpha \boldsymbol{\alpha}_F) \ \dots \ f(\alpha^{h-1} \boldsymbol{\alpha}_F) \right) \right\rangle_q$$
 (5.20)

where  $f(x) \in \mathbb{L}_{q^m}[x]_{< k}$ . The dimension of the ambient vector space

$$W_s = \langle \underline{\alpha_F} \rangle_q \times \underbrace{\mathbb{F}_q^m \times \cdots \times \mathbb{F}_q^m}_{h \text{ times}}$$

is  $N = n_t + hm$ , since the vectors in the space  $\langle \underline{\alpha_F} \rangle_q$  have nonzero components at the  $n_t$  known positions  $0, h, 2h, \ldots, hn_t - h$  only. The zeroes at the known positions do not need to be transmitted and can be inserted at the receiver. The size of  $\mathcal{FS}[h, \alpha; n_t, k]$  is  $|\mathcal{FS}[h, \alpha; n_t, k]| = q^{mk}$  and the code rate is

$$R = \frac{\log_q(|\mathcal{FS}[h,\alpha;n_t,k]|)}{n_t N} = \frac{km}{n_t(n_t + hm)}.$$
 (5.21)

The h-folded subspace codes in Definition 5.4.5 are locator-lifted h-folded Gabidulin codes (see Definition 2.11.1). Combining Theorem 2.11.1 and Lemma 5.4.1 we obtain the minimum distance of h-folded subspace codes.

**Proposition 5.4.3** (Minimum Distance of h-Folded Subspace Codes). The minimum subspace distance of an h-folded subspace code  $\mathcal{FS}[h,\alpha;n_t,k]$  is

$$d_s = 2\left(n_t - \left\lceil \frac{k}{h} \right\rceil + 1\right). \tag{5.22}$$

#### 5.4.6 Decoding of Folded Subspace Codes

Based on the decoding schemes for folded Gabidulin codes (Mahdavifar and Vardy, 2012), an interpolation-based decoding scheme for folded subspace codes was considered in (Bartz, 2017; Bartz and Sidorenko, 2015). The algorithm consists of two steps: the *interpolation step* computes  $r \leq L$  non-zero and (left)  $\mathbb{L}_{q^m}[x]$ -independent vectors of linearized polynomials

$$\mathbf{Q}^{(i)} = [Q_0^{(i)}, Q_1^{(i)}, \dots, Q_s^{(i)}] \in \mathbb{L}_{q^m}[x]^{s+1} \setminus \{\mathbf{0}\}, \ \forall i = 1, \dots, r$$

such that they fulfill certain degree and evaluation conditions with respect to the received subspace. The *root-finding step* finds all message polynomials f of degrees deg f < k such that

$$Q_0^{(i)} + \sum_{j=1}^u Q_j^{(i)} f(\alpha^{j-1} x) = 0 \quad \forall i = 1, \dots, r.$$

If the number of insertions  $\gamma$  and deletions  $\delta$  satisfies  $\gamma + s\delta < s(n_t - \frac{k-1}{h-s+1})$ , then at least one satisfactory interpolation vector  $\mathbf{Q}^{(i)}$  exists, see (Bartz, 2017; Bartz and Wachter-Zeh, 2018). The output list contains the transmitted message polynomial vector. The algorithm can be considered as a partial unique or list decoder (Bartz, 2017; Bartz and Wachter-Zeh, 2018).

# 5.5 Upper Bounds on Subspace Codes

In this section, we consider upper bounds on the cardinality and the average list size of constant-dimension subspace codes. Since we are interested in constructions of codes of maximum size we focus on upper bounds. An extensive survey on lower and upper bounds on the size of subspace codes can be found in (Khaleghi *et al.*, 2009). We compare the interleaved subspace codes from Section 5.4.3 and the folded subspace codes from Section 5.4.5 with the bounds and show that the bounds can be asymptotically achieved by the considered codes while keeping the field size low.

Consider a constant-dimension subspace code  $C_s \subset \mathbb{G}_q(N, n_t)$  and define the normalized weight  $\lambda$ , the code rate R and the normalized distance  $\eta$  as

$$\lambda = \frac{n_t}{N} ,$$

$$R = \frac{\log_q(|\mathcal{C}_s|)}{Nn_t} = \frac{\log_q(|\mathcal{C}_s|)}{\lambda N^2} ,$$

$$\eta = \frac{d_S(\mathcal{C}_s)}{2n_t} = \frac{d_S(\mathcal{C}_s)}{2\lambda N} .$$
(5.23)

#### 5.5.1 Singleton-like Bound for Subspace Codes

The Singleton-like bound for subspace codes (Kötter and Kschischang, 2008a) upper bounds the size of a subspace code  $C_s \in \mathbb{G}_q(N, n_t)$  by

$$|\mathcal{C}_s| \le \begin{bmatrix} N - (d_{\mathsf{S}}(\mathcal{C}_s) - 2)/2\\ \max\{n_t, N - n_t\} \end{bmatrix}_a. \tag{5.24}$$

The Gaussian coefficient can be lower and upper bounded by (Kötter and Kschischang, 2008b)

$$q^{\ell(N-\ell)} \le \begin{bmatrix} N \\ \ell \end{bmatrix}_q \le 3.5 q^{\ell(N-\ell)}. \tag{5.25}$$

Using (5.25) we can upper bound (5.24) by

$$|\mathcal{C}_s| \le 3.5q^{\max\{n_t, N - n_t\}(N - d_S(\mathcal{C}_s)/2 + 1 - \max\{n_t, N - n_t\})}.$$
 (5.26)

For  $n_t \leq N/2$  we have

$$|\mathcal{C}_s| \le 3.5q^{(N-n_t)(n_t - d_S(\mathcal{C}_s)/2 + 1)}$$

and can express the Singleton-like bound (5.26) in terms of normalized parameters as

$$\log_q(|\mathcal{C}_s|) \le (N - n_t)(n_t - d_{\mathsf{S}}(\mathcal{C}_s)/2 + 1) + \log_q(3.5)$$

$$\iff R \le (1 - \lambda)\left(1 - \eta + \frac{1}{\lambda N}\right) + \frac{\log_q(3.5)}{\lambda N^2}.$$
(5.27)

Notice that for fixed dimension  $n_t$  we have  $\lambda \sim \frac{1}{N}$  for  $N \gg n_t$ . Thus the term  $\log_q(3.5)/(\lambda N^2)$  in (5.27) vanishes asymptotically for  $N \to \infty$  with order 1/N.

For a code  $C'_s$  with  $n'_t \geq N/2$  we have

$$|\mathcal{C}_s'| \le 3.5q^{n_t'(N-n_t'-d_{\mathsf{S}}(\mathcal{C}_s')/2+1)} \tag{5.28}$$

which in terms of the normalized parameters  $\lambda' = n'_t/N$  and  $\eta' = d_S(\mathcal{C}'_s)/(2n'_t)$  of  $\mathcal{C}'_s$  gives

$$R' \le 1 - \lambda' - \lambda' \eta' + \frac{1}{N} + \frac{\log_q(3.5)}{\lambda' N^2}.$$
 (5.29)

For the complementary code  $C_s^{\perp}$  (see (5.14)) of  $C_s$  we have  $n_t' = N - n_t \ge N/2$ ,  $\lambda' = 1 - \lambda$  and  $\eta' = \frac{\lambda}{1 - \lambda} \eta$ . By substituting  $\lambda'$  and  $\eta'$  in (5.29) we can write the Singleton bound for  $C_s^{\perp}$  in terms of the normalized parameters of  $C_s$  as

$$R^{\perp} \leq \lambda \left( 1 - \eta + \frac{1}{\lambda N} \right) + \frac{\log_q(3.5)}{(1 - \lambda)N^2}$$

$$= \frac{\lambda}{1 - \lambda} \left( (1 - \lambda) \left( 1 - \eta + \frac{1}{\lambda N} \right) + \frac{\log_q(3.5)}{\lambda N^2} \right). \tag{5.30}$$

Recall from (5.15) that the code rate R of a subspace code  $C_s$  is related to the code rate  $R^{\perp}$  of the dual code  $C_s^{\perp}$  by  $R^{\perp} = \frac{\lambda}{1-\lambda}R$ . From (5.24) and (5.30) we see that the complementary code of a Singleton-bound-achieving code also achieves the Singleton bound. This relation is analog to the dual codes of Singleton bound achieving codes in the Hamming metric.

#### 5.5.2 Anticode Bound

The Anticode bound was proposed by Delsarte for arbitrary association schemes (P. Delsarte, 1973, p. 32). Any subset  $\mathcal{A}(t)$  of  $\mathbb{G}_q(N, n_t)$  with  $d_{\mathsf{S}}(\mathcal{U}, \mathcal{V}) \leq 2t$  for all  $\mathcal{U}, \mathcal{V} \in \mathcal{A}(t)$  is called an Anticode of diameter t. Let  $\mathcal{C}_s \subseteq \mathbb{G}_q(N, n_t)$  be a constant-dimension subspace code. The Anticode bound implies that

$$|\mathcal{C}_s| \le \frac{|\mathbb{G}_q(N, n_t)|}{|\mathcal{A}(t-1)|} = \frac{|\mathbb{G}_q(N, n_t)|}{|\mathcal{A}\left(\frac{d_{\mathsf{S}}(\mathcal{C}_s) - 2}{2}\right)|}.$$
(5.31)

The bound is tight for the largest Anticode of diameter t in  $\mathbb{G}_q(N, n_t)$  which has size  $|\mathcal{A}(t)| = {N-n_t+t \brack t}_q$  for  $n_t \leq N/2$  (P. Frankl and R. M. Wilson, 1986). Using this result in (5.31) we get

$$|\mathcal{C}_s| \le \frac{\begin{bmatrix} N \\ n_t \end{bmatrix}_q}{\begin{bmatrix} n_t \\ n_t - \frac{d_{\mathsf{S}}(\mathcal{C}_s)}{2} + 1 \end{bmatrix}_q} = \frac{\begin{bmatrix} N \\ n_t - \frac{d_{\mathsf{S}}(\mathcal{C}_s)}{2} + 1 \end{bmatrix}_q}{\begin{bmatrix} n_t \\ n_t - \frac{d_{\mathsf{S}}(\mathcal{C}_s)}{2} + 1 \end{bmatrix}_q}.$$
 (5.32)

The Anticode bound (5.32) was proposed in (Etzion and Vardy, 2011, Theorem 1) and described in (Khaleghi *et al.*, 2009, Theorem 3). Using (5.25) we can bound (5.32) from above by

$$|\mathcal{C}_s| \le 3.5q^{(N-n_t)(n_t - d_{\mathsf{S}}(\mathcal{C}_s)/2 + 1)}$$
 (5.33)

which coincides with the Singleton-like bound (5.26). Thus (5.33) can be expressed in terms of normalized parameters as (5.27), i.e., we have

$$R \le (1 - \lambda) \left( 1 - \eta + \frac{1}{\lambda N} \right) + \frac{\log_q(3.5)}{N^2 \lambda}.$$
 (5.34)

#### 5.5.3Upper Bounds for Interleaved and Folded Subspace Codes

We now evaluate the bounds from Section 5.5.1 and Section 5.5.2 for the parameters of interleaved and folded subspace codes.

#### Evaluation of Bounds for Interleaved Subspace Codes

Consider an interleaved subspace code  $C_s = \mathcal{IS}[L, \boldsymbol{\alpha}; n_t, k^{(1)}, \dots, k^{(L)}]$  and define  $k_{\text{max}} :=$  $\max_{i \in [1,L]} \{k^{(j)}\}\$ . The normalized parameters (5.23) for  $\mathcal{C}_s$  are

$$\begin{split} N &= n_t + Lm \ , \\ \lambda &= \frac{n_t}{n_t + Lm} \ , \\ R &= \frac{m \sum_{j=1}^L k^{(j)}}{n_t (n_t + Lm)} \ , \\ \eta &= \frac{n_t - k_{\text{max}} + 1}{n_t} \ . \end{split}$$

For fixed  $n_t$  and m the limit  $N \to \infty$  corresponds to  $L \to \infty$  and we get  $\lim_{L \to \infty} \lambda = 0$ and  $\lim_{L\to\infty}(R) = \frac{k_{\text{max}}}{n_t}$  which is the asymptotic code rate of the corresponding interleaved Gabidulin code  $\mathcal{IG}(L; n_t, k^{(1)}, \dots, k^{(L)})$  for  $L \to \infty$ . This illustrates that the rate loss due to the lifting becomes negligible for large L.

Evaluating the Singleton-like bound (5.24) for the code parameters of L-interleaved subspace codes  $\mathcal{IS}[L, \boldsymbol{\alpha}; n_t, k^{(1)}, \dots, k^{(L)}]$  gives

$$|C_s| \le \begin{bmatrix} n_t + Lm - (n_t - k_{\text{max}} + 1) + 1 \\ n_t + Lm - n_t \end{bmatrix}_q$$
 (5.35)

$$= \begin{bmatrix} Lm + k_{\text{max}} \\ Lm \end{bmatrix}_{q}$$

$$\leq 3.5 \cdot q^{Lmk_{\text{max}}}.$$

$$(5.36)$$

$$\leq 3.5 \cdot q^{Lmk_{\text{max}}}.\tag{5.37}$$

Equation (5.35) shows that the size of an interleaved subspace code  $\mathcal{IS}[L, \alpha; n_t, k^{(1)}]$ ,  $\ldots, k^{(L)}$ ] (which is  $q^{m\sum_{j=1}^{L} k^{(j)}}$ ) has the same asymptotic behavior as the Singleton bound if  $k^{(j)} = k_{\text{max}}$  for all  $j \in [1, L]$ , i.e., if the code is a homogeneous interleaved subspace code. A code that achieves the Singleton-like bound in subspace metric can have at most 3.5 times more codewords than a homogeneous interleaved subspace code  $\mathcal{IS}[L, \boldsymbol{\alpha}; n_t, k]$  of size  $q^{Lmk}$ . The code rate of a homogeneous interleaved subspace code  $C_s = \mathcal{IS}[L, \boldsymbol{\alpha}; n_t, k]$  in terms of normalized parameters is

$$\log_{q}(|\mathcal{C}_{s}|) = Lmk \iff \frac{\log_{q}(|\mathcal{C}_{s}|)}{Nn_{t}} = \frac{1}{Nn_{t}}(N - n_{t})(n_{t} - d_{S}(\mathcal{C}_{s})/2 + 1)$$

$$\iff R = (1 - \lambda)\left(1 - \eta + \frac{1}{\lambda N}\right)$$
(5.38)

which has the same asymptotic behavior as the Singleton-like bound (5.27) and the Anticode bound (5.34) for  $L \to \infty$  (i.e.,  $N \to \infty$ ).

#### Evaluation of Bounds for Folded Subspace Codes

The normalized parameters (5.23) for a folded subspace code  $C_s = \mathcal{FS}[h, \alpha; n_t, k]$  are

$$N = n_t + hm, \quad \lambda = \frac{n_t}{n_t + hm},$$

$$R = \frac{mk}{n_t(n_t + hm)} \quad \text{and} \quad \eta = \frac{n_t - \lceil k/h \rceil + 1}{n_t}.$$

Evaluating the Singleton-like bound (5.24) for these parameters and using (5.25) gives

$$|\mathcal{C}_{s}| \leq \begin{bmatrix} n_{t} + hm - (n_{t} - \lceil k/h \rceil + 1) + 1 \\ n_{t} + hm - n_{t} \end{bmatrix}_{q}$$

$$= \begin{bmatrix} hm + \lceil k/h \rceil \\ hm \end{bmatrix}_{q} \leq 3.5 \cdot q^{hm\lceil k/h \rceil}.$$
(5.39)

Recall that the size of a folded subspace code is  $|\mathcal{FS}[h,\alpha;n_t,k]| = q^{mk}$ . Thus the size of  $\mathcal{FS}[h,\alpha;n_t,k]$  has the same asymptotic behavior as the Singleton-like bound (5.39) if and only if h divides k. In this case a Singleton bound achieving code can have at most 3.5 times more codewords than  $\mathcal{FS}[h,\alpha;n_t,k]$ .

Notice that for fixed  $n_t$  the degree m of the field  $\mathbb{F}_{q^m}$  increases in h since we require  $hn_t \leq m$ . For  $hn_t = n = m$ , where n is the length of the unfolded code of  $\mathcal{FG}[h, \alpha; n_t, k]$  (see Definition 2.11.1) and  $h >> n_t$ , we have

$$R = \frac{khn_t}{n_t(n_t + h^2n_t)} = \frac{kh}{n_t(h^2 + 1)} \approx \frac{k}{n}$$

which is the code rate of  $\mathcal{FG}[h, \alpha; n_t, k]$  (see (2.25)). This shows that the code rate loss due to the lifting is negligible for large  $h >> n_t$ .

For the case when h divides k the code rate of a folded subspace code  $\mathcal{FS}[h, \alpha; n_t, k]$  in terms of normalized parameters is

$$\log_{q}(|\mathcal{C}_{s}|) = hmk \iff \frac{\log_{q}(|\mathcal{C}_{s}|)}{Nn_{t}} = \frac{1}{Nn_{t}}(N - n_{t})(n_{t} - d_{S}(\mathcal{C}_{s})/2 + 1)$$

$$\iff R = (1 - \lambda)\left(1 - \eta + \frac{1}{\lambda N}\right) \tag{5.40}$$

which has the same asymptotic behavior as the Singleton-like bound (5.27) and the Anticode bound (5.34) for  $N \to \infty$ .

Hence, with increasing interleaving order L and folding parameter h homogeneous interleaved subspace codes and folded subspace codes where h divides k show the same asymptotic behavior as the Singleton-like bound (5.27) and the Anticode bound (5.34).

### Comparison of Interleaved and Folded Subspace Codes with Upper Bounds

We now compare the code rate R of interleaved and folded subspace codes with the Singleton-like bound (5.27) and the Anticode bound (5.34). Figure 5.5 shows the normalized distance  $\eta$  over the code rate R for Kötter-Kschischang codes (L=h=1) and interleaved/folded subspace codes with L=h=3,5,10. The Singleton-like bound for the corresponding N and  $\lambda$  is computed using (5.27). Recall that in terms of normalized parameters the Anticode bound (5.34) coincides with the Singleton-like bound (5.27).

With increasing interleaving order L and folding parameter h the interleaved and folded subspace codes approach the Singleton-like bound for subspace codes since the normalized weight  $\lambda$  decreases for increasing interleaving order L or increasing folding parameter h.

Notice that a noninterleaved subspace code in (Kötter and Kschischang, 2008a) with M = Lm shows the same behavior. This code has to be decoded in  $\mathbb{F}_{q^M}$  whereas the interleaved code is decoded in the (sub-) field  $\mathbb{F}_{q^m}$  which is in general more efficient.

#### 5.5.4 Upper Bound on the Average List Size of Subspace Codes

Given an  $n_r$ -dimensional received space  $\mathcal{U} \in \mathbb{P}_q(N)$  the list decoding problem of a subspace code  $\mathcal{C}_s$  is to find the list

$$\mathcal{L} = \{ \mathcal{V} \in \mathcal{C}_s : d_{\mathcal{S}}(\mathcal{U}, \mathcal{V}) \le r \}$$
 (5.41)

where r is the decoding radius in subspace metric. The challenge of list decoding subspace codes is to decrease the size of the list of candidate codewords, which is exponential in the dimension of the transmitted subspace (Wachter-Zeh, 2013). List decodable variants of subspace codes have been proposed in (Mahdavifar and Vardy, 2010; Guruswami et al., 2012; Trautmann et al., 2013; Wachter-Zeh and Zeh, 2014) and allow to correct insertions and deletions beyond half the minimum subspace distance. Most list decodable subspace codes are based on locator-lifted Gabidulin codes and control the list size by either restricting the message symbols or the code locators to belong to a subfield. The list size for this decoder is further reduced in (Guruswami and Wang, 2013b) by restricting the coefficients of the message polynomials to belong to the hierarchical subspace evasive sets. The output of this decoder is a basis for the affine space of candidate solutions which in the worst case results in a very large list of exponential size in the dimension of the transmitted subspace. Bounds on the list-decodability of random subspace codes were given in (Ding, 2015a).

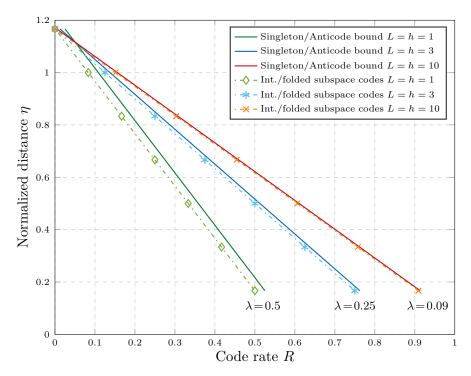


Figure 5.5: Normalized distance  $\eta$  over the code rate R for q=2, m=6 and  $n_t=6$  and interleaving orders / folding parameters L=h=1,3,10 with the corresponding normalized weight  $\lambda$ .

For constant-dimension subspace codes the receiver knows that all codewords have dimension  $n_t$ . Recall that the distance between the input and the output of the operator channel (5.8) with parameters  $\gamma$  and  $\delta$  is  $\gamma + \delta$  (see (5.10)). We now give an upper bound on the average list size of constant-dimension subspace codes, i.e., the average number of codewords that are in subspace distance within  $r = \gamma + \delta$  from an  $n_r$ -dimensional received subspace. The bound uses ideas for the average list size of Reed-Solomon codes (McEliece, 2003) and Gabidulin codes (Wachter-Zeh and Zeh, 2014).

The number of  $n_t$ -dimensional subspaces in  $\mathbb{P}_q(N)$  at subspace distance at most r from a fixed  $n_r$ -dimensional subspace  $\mathcal{U}$  in  $\mathbb{P}_q(N)$  is denoted by

$$\tilde{V}_S(n_r, n_t, r) = |\{ \mathcal{V} \in \mathbb{G}_q(N, n_t) : d_S(\mathcal{U}, \mathcal{V}) \le r \}|.$$

$$(5.42)$$

It is shown in (Etzion and Vardy, 2011, Lemma 7)  $\tilde{V}_S(n_r, n_t, r)$  is independent of the center  $\mathcal{U}$  and given by

$$\tilde{V}_{S}(n_{r}, n_{t}, r) = \sum_{j=\lceil \frac{n_{t}+n_{r}-r}{2} \rceil}^{\min\{n_{t}, n_{r}\}} q^{(n_{t}-j)(n_{r}-j)} \begin{bmatrix} n_{r} \\ j \end{bmatrix}_{q} \begin{bmatrix} N-n_{r} \\ n_{t}-j \end{bmatrix}_{q}.$$
 (5.43)

For  $n_t = n_r$  and r = 2t this definition coincides with the volume of a sphere in (Kötter and Kschischang, 2008a)

$$S(\mathcal{V}, n_r, t) = \{ \mathcal{U} \in \mathbb{G}_q(N, n_r) : d_{\mathsf{S}}(\mathcal{U}, \mathcal{V}) \le 2t \}$$
 (5.44)

and we get

$$|S(\mathcal{V}, n_r, t)| = \tilde{V}_S(n_r, n_r, 2t) = \sum_{i=0}^t q^{i^2} \begin{bmatrix} \ell \\ i \end{bmatrix}_q \begin{bmatrix} N - \ell \\ i \end{bmatrix}_q.$$

For deriving the average list size we need the number of  $n_t$ -dimensional subspaces within distance at most  $\gamma + \delta$  around a  $(n_r = n_t + \gamma - \delta)$ -dimensional subspace. We now derive an upper bound for  $\tilde{V}_S(n_t + \gamma - \delta, n_t, \gamma + \delta) =: V_S(n_t, \gamma, \delta)$ .

**Lemma 5.5.1** (Volume of Balls in Subspace Metric). The number  $V_S(n_t, \gamma, \delta)$  of  $n_t$ -dimensional subspaces in  $\mathbb{P}_q(N)$  at subspace distance at most  $\gamma + \delta$  from a fixed  $(n_r = n_t + \gamma - \delta)$ -dimensional subspace in  $\mathbb{P}_q(N)$  satisfies

$$V_S(n_t, \gamma, \delta) = \sum_{i=0}^{\min\{\gamma, \delta\}} q^{(\delta-i)(\gamma-i)} \begin{bmatrix} n_t + \gamma - \delta \\ \gamma - i \end{bmatrix}_q \begin{bmatrix} N - (n_t + \gamma - \delta) \\ \delta - i \end{bmatrix}_q$$
 (5.45)

$$< 16 \cdot (\min\{\gamma, \delta\} + 1) \cdot q^{\gamma(n_t - \delta) + \delta(N - n_t)}. \tag{5.46}$$

The proof of Lemma 5.5.1 can be found in (Bartz, 2017, Appendix A.1.1).

We now derive an upper bound on the average list size of constant-dimension subspace codes.

**Theorem 5.5.2** (Average List Size of Subspace Codes). Let  $C_s \subseteq \mathbb{G}_q(N, n_t)$  be a constantdimension subspace code over  $\mathbb{F}_q$ . Let  $\mathcal{U}$  be an  $n_r = n_t + \gamma - \delta$  dimensional subspace chosen uniformly at random from all subspaces in  $\mathbb{G}_q(N, n_r)$  that are within distance at most  $\gamma + \delta$ to a codeword of  $C_s$ . The average list size  $\bar{\mathcal{L}}(\gamma, \delta)$ , i.e., the average number of codewords from  $C_s$  at subspace distance at most  $\gamma + \delta$  from the fixed  $(n_r = n_t + \gamma - \delta)$ -dimensional subspace  $\mathcal{U}$ , is upper bounded by

$$\bar{\mathcal{L}}(\gamma,\delta) < 1 + \frac{|\mathcal{C}_s| - 1}{\left[ N \atop n_t \right]_q} \cdot V_S(n_t,\gamma,\delta) < 1 + q^{\log_q(|\mathcal{C}_s|) - (N - n_t - \gamma)(n_t - \delta)}. \tag{5.47}$$

*Proof.* By assumption  $\mathcal{U}$  is chosen uniformly at random from all subspaces in  $\mathbb{G}_q(N, n_r)$  that are within subspace distance at most  $\gamma + \delta$  to a codeword of  $\mathcal{C}_s$ . There are  $|\mathcal{C}_s| - 1$  noncausal<sup>1</sup> codewords (subspaces) out of  $\begin{bmatrix} N \\ n_t \end{bmatrix}_q$  possible  $n_t$ -dimensional subspaces. Thus there are on average

$$\bar{\mathcal{L}}'(\gamma,\delta) = \frac{|\mathcal{C}_s| - 1}{\binom{N}{n_t}_q} \cdot V_S(n_t,\gamma,\delta) < \frac{|\mathcal{C}_s|}{\binom{N}{n_t}_q} \cdot V_S(n_t,\gamma,\delta)$$
(5.48)

<sup>&</sup>lt;sup>1</sup>Here noncausal codewords refer to all codewords in a code except for the transmitted codeword.

noncausal codewords within subspace distance at most  $\gamma + \delta$  from the received subspace  $\mathcal{U}$ . Using Lemma 5.5.1 we can upper bound (5.48) by

$$\bar{\mathcal{L}}'(\gamma,\delta) < \frac{|\mathcal{C}_s|}{\binom{N}{n_t}_q} \cdot V_S(n_t,\gamma,\delta) 
< q^{\log_q(|\mathcal{C}_s|) - n_t(N - n_t)} \cdot 16 \cdot (\min\{\gamma,\delta\} + 1) \cdot q^{\gamma(n_t - \delta) + \delta(N - n_t)} 
= 16 \cdot (\min\{\gamma,\delta\} + 1) \cdot q^{\log_q(|\mathcal{C}_s|) - n_t(N - n_t) + \gamma(n_t - \delta) + \delta(N - n_t)} 
= 16 \cdot (\min\{\gamma,\delta\} + 1) \cdot q^{\log_q(|\mathcal{C}_s|) - (n_t - \delta)(N - n_t) + \gamma(n_t - \delta)} 
= 16 \cdot (\min\{\gamma,\delta\} + 1) \cdot q^{\log_q(|\mathcal{C}_s|) - (N - n_t - \gamma)(n_t - \delta)}.$$

Including the causal codeword we get  $\bar{\mathcal{L}}(\gamma, \delta) = 1 + \bar{\mathcal{L}}'(\gamma, \delta)$ .

In terms of normalized parameters (5.23) we can write (5.47) as

$$\bar{\mathcal{L}}(\gamma, \delta) < 1 + q^{\log_q(|\mathcal{C}_s|) - ((1-\lambda)N - \gamma)(\lambda N - \delta)}$$
(5.49)

$$=1+q^{\log_q(|\mathcal{C}_s|)-\frac{1-\lambda}{\lambda}\left(\lambda N-\frac{\lambda}{1-\lambda}\gamma\right)(\lambda N-\delta)}.$$
 (5.50)

From (5.49) we see that the influence of insertions and deletions on the average list size is asymmetric. The degree of this asymmetry depends on the normalized weight  $\lambda$ . If  $\lambda \leq 1/2$  (i.e., if  $n_t \leq N/2$ ) a deletion affects the average list size  $(1 - \lambda)/\lambda$  times more than an insertions. For  $\lambda > 1/2$  (i.e., if  $n_t > N/2$ ) an insertion affects the average list size  $\lambda/(1-\lambda)$  times more than a deletion.

Hence, a code with normalized weight  $\lambda \leq N/2$  should be more robust against insertions whereas a code with  $\lambda > N/2$  should be able to tolerate more deletions.

We now evaluate Theorem 5.5.2 for the parameters of lifted rank-metric codes.

Corollary 5.5.3 (Average List Size of Lifted Rank-Metric Codes). Let  $C_r \subset \mathbb{F}_q^{n_t \times M}$  be a rank-metric code with code rate  $R_r$  and let  $C_s = \Pi_{\mathbf{I}}(C_r)$ . Let the received space  $\mathcal{U}$  be chosen uniformly at random among all subspaces from  $\mathbb{G}_q(N, n_r)$  that contain a codeword. The average list size  $\bar{\mathcal{L}}(\gamma, \delta)$ , i.e., the average number of codewords within subspace distance at most  $\gamma + \delta$  from an  $(n_r = n_t + \gamma - \delta)$ -dimensional received subspace  $\mathcal{U}$ , is upper bounded by

$$\bar{\mathcal{L}}(\gamma, \delta) < 1 + 16 \cdot (\min\{\gamma, \delta\} + 1) \cdot q^{n_t R_r M - (M - \gamma)(n_t - \delta)}. \tag{5.51}$$

#### Average List Size of Interleaved Subspace Codes

We now estimate the average number of codewords of an interleaved subspace code that are within subspace distance  $\gamma + \delta$  from the received subspace. By evaluating Corollary 5.5.3 for the parameters of interleaved subspace codes we obtain

$$\bar{\mathcal{L}}_{I}(\gamma,\delta) < 1 + 16 \cdot (\min\{\gamma,\delta\} + 1) \cdot q^{L(mk - (n_t - \delta)(m - \frac{\gamma}{L}))}. \tag{5.52}$$

Note that if we choose  $n_t \approx m$  in (5.52) we observe an asymmetry between insertions and deletions of degree L, i.e., deletions affect the average list size of the code L times more than insertions.

Consider a homogeneous interleaved subspace code  $C_s = \mathcal{IS}[L, \alpha; n_t, k]$ . To decode interleaved subspace codes with a probabilistic unique decoder we require the average list size to be close to one. This is fulfilled if the exponent in (5.52) becomes negative, i.e., if we have

$$mk - (n_t - \delta) \left( m - \frac{\gamma}{L} \right) < 0$$

$$\iff mk < n_t m - n_t \frac{\gamma}{L} - \delta m + \frac{\delta \gamma}{L}$$

$$\iff k < n_t - \frac{n_t}{m} \frac{\gamma}{L} - \delta + \frac{\delta \gamma}{Lm}.$$

For  $n_t \approx m$  we get

$$\frac{\gamma}{L} + \delta < n_t - k + \frac{\delta \gamma}{Lm} \iff \gamma + L\delta < L\left(n_t - k\right) + \frac{\delta \gamma}{m}$$

$$\iff \gamma + \delta \left(L - \frac{\gamma}{m}\right) < L\left(n_t - k\right)$$

$$\iff \gamma + \delta \left(L - \frac{\gamma}{m}\right) < L\left(\frac{d_{\mathsf{S}}(\mathcal{C}_s) - 2}{2}\right). \tag{5.53}$$

From (5.53) we see that a good list decoder for interleaved subspace codes should be able to tolerate approximately L times more insertions  $\gamma$  than deletions  $\delta$  and return on average a list of size close to one if  $\gamma$  and  $\delta$  satisfy (5.53).

The asymmetry between insertions and deletions is due to the influence of L on the normalized weight  $\lambda = n_t/(n_t + Lm)$  (see (5.49)).

#### Average List Size of Folded Subspace Codes

By Corollary 5.5.3, the average list size for folded subspace codes is upper bounded by

$$\bar{\mathcal{L}}_{F}(\gamma, \delta) < 1 + 16 \cdot (\min\{\gamma, \delta\} + 1) \cdot q^{mk - (n_t - \delta)(hm - \gamma)}. \tag{5.54}$$

Let  $C_s = \mathcal{FS}[h, \alpha; n_t, k]$  and assume that h divides k. We get an average list size close to one if the exponent in (5.54) becomes negative, i.e., if for  $n_t h \approx m$  we have

$$mk < (n_{t} - \delta)(hm - \gamma)$$

$$\iff mk < n_{t}hm - n_{t}\gamma - \delta hm + \delta \gamma = n_{t}hm - \frac{m\gamma}{h} - \delta hm + \delta \gamma$$

$$\iff \frac{\gamma}{h} + \delta h < n_{t}h - k + \frac{\delta \gamma}{m}$$

$$\iff \frac{\gamma}{h} + \delta \left(h - \frac{\gamma}{m}\right) < h\left(n_{t} - \frac{k}{h}\right) = h\left(\frac{d_{S}(C_{s}) - 2}{2}\right). \tag{5.55}$$

Compared to interleaved codes (5.53) the average list size of folded subspace codes (5.55) shows an even a higher degree of asymmetry between the tolerable insertions and deletions. Thus, a good list decoder for h-folded subspace codes should tolerate approximately  $h^2$ -times more insertions  $\gamma$  than deletions  $\delta$  and return a list of average size close to one if  $\gamma$  and  $\delta$  satisfy (5.55).

# 6 Conclusion

In this survey, we have presented rank-metric codes and some of their most important applications. Chapter 2 formally introduced several classes of and properties of rank-metric codes with a focus on Gabidulin codes and then summarized a selection of known results on their decoding. Chapter 3 investigated the application of rank-metric codes in cryptography. We briefly recalled a number of rank-metric based cryptosystems and formally defined the respective hard problems as well as some known attacks on these systems. Chapter 4 focused on applications in storage, first highlighting the role of MRD codes in the construction of codes with locality followed by a brief summary of a coded caching scheme based on Gabidulin codes. Finally, in Chapter 5 we explored error-correction schemes for network coding utilizing MRD codes.

In the following, we list some further results and applications of rank-metric codes that we have not discussed in detail in this survey.

#### Further Results on Rank-Metric Codes

In (Neri, 2020), the structure of systematic generator matrices of Gabidulin codes was studied. It was shown that the non-systematic part of these matrices are q-analogs of Cauchy matrices, which can be seen as the rank-metric analog result of (Roth and Seroussi, 1985) on systematic generator matrices of generalized Reed-Solomon codes.

There is a very simple rank-metric code construction, introduced in (Gaborit *et al.*, 2017b) under the name "simple codes". These codes are able to correct probabilistic up to a radius that is larger than the one of Gabidulin codes of the same parameters. This comes at the cost of a high decoding complexity (but still polynomial), and the codes have minimum rank distance one, which means that decoding fails already for some (very few) errors of rank one.

Rank-metric codes can also be constructed over infinite fields. For instance, Roth (1991) gives bounds for such codes, and presents a simple construction for rank-metric codes over algebraically closed fields (here, we mean sets of matrices over an algebraically closed field, and the rank is taken w.r.t. this field). In (Roth, 1996; Augot et al., 2018), constructions of Gabidulin codes over arbitrary Galois field extensions were given. Decoding of Gabidulin codes over Galois extensions was studied by Robert (2016), Müelich et al. (2016), and

Augot et al. (2018). For exact computation domains (such as number fields), it is still an open problem to properly analyze the intermediate coefficient growth in these decoding algorithms, e.g., analog to (Sippel et al., 2019) for Reed-Solomon codes. In (Roth, 2017), decoding of rank-metric codes over algebraically closed fields in (Roth, 1991) was studied.

There is also a line of work that studies rank-metric codes over finite rings, mainly motivated by network coding applications. The first work was by Kamche and Mouaha (2019), who studied Gabidulin codes over principal ideal rings, their decoding, and applications. Puchinger et al. (2021) studied the first decoding algorithm for Gabidulin codes over Galois rings that has a provable quadratic complexity in the code length. The papers (Renner et al., 2020b; Renner et al., 2021a; Djomou et al., 2021; Kamche et al., 2021) study low-rank parity-check codes over various finite rings.

In (Renner et al., 2019b), interleaved low-rank parity-check codes were defined (similar as vertically and heterogeneously interleaved Gabidulin codes), an efficient decoding algorithm for this code class was devised, and upper bounds on the decoding failure rate of this algorithm were derived.

There are also various papers that study weight distributions and MacWilliams identities for codes in the rank metric (Delsarte, 1978; Gabidulin, 1985; Gadouleau and Yan, 2008b; Jurrius and Pellikaan, 2015; Ravagnani, 2016; Blanco-Chacón et al., 2018; Byrne et al., 2020). For more details, we refer to the survey by Gorla and Ravagnani (2018).

In (Neri et al., 2018), it was shown that for growing extension degree,  $\mathbb{F}_{q^m}$ -linear MRD codes become dense in the set of rank-metric codes, i.e., their relative number converges to one. This agrees with the result on the density of  $\mathbb{F}_{q^m}$ -linear MRD codes in (Byrne and Ravagnani, 2020), which derives upper and lower bounds on the probability that a randomly chosen  $\mathbb{F}_{q^m}$ -linear [n,k] code has a given minimum  $\mathbb{F}_q$ -rank distance d. In contrast to MDS codes in the Hamming metric and  $\mathbb{F}_{q^m}$ -linear MRD codes,  $\mathbb{F}_q$ -linear MRD codes are not dense. Byrne and Ravagnani (2020) showed that the density of  $\mathbb{F}_q$ -linear MRD codes is asymptotically at most  $\frac{1}{2}$ , both as  $q \to \infty$  and  $m \to \infty$ . Gluesing-Luerssen (2020) showed that  $\mathbb{F}_q$ -linear  $3 \times 3$  MRD codes of minimum rank distance 3 are sparse, i.e., its proportion approaches 0 as  $q \to \infty$ . In a recent work by Gruica and Ravagnani (2020), the asymptotic density of  $\mathbb{F}_q$ -linear  $n \times m$  MRD of minimum rank distance d is  $O(q^{-(d-1)(n-d+1)+1})$  as  $q \to \infty$ , which means that  $\mathbb{F}_q$ -linear MRD codes are also sparse, unless d = 1 or n = d = 2.

This survey has discussed block codes in the rank metric. There is also a line of work on convolutional codes in the rank metric (Wachter et al., 2011; Wachter-Zeh and Sidorenko, 2012; Wachter-Zeh et al., 2015; Napp et al., 2017b; Napp et al., 2017a; Napp et al., 2018; Almeida and Napp, 2021). These codes are considered in the related sum-rank metric, which can be seen as a mix of the Hamming and rank metric. The sum-rank metric has attracted a lot of attention recently due to promising applications in network coding, distributed data storage, and space-time coding. For more details on sum-rank-metric codes, we refer to the recent survey by Martínez-Peñas et al. (2021).

### Further Applications of Rank-Metric Codes

There are also several further applications of the codes that we have not discussed. For instance, rank-metric codes can be used in combinatorics (Lewis and Morales, 2020), to construct linear authentication codes (Wang et al., 2003) and space-time codes (Gabidulin et al., 2000; Lusina et al., 2003; Lu and Kumar, 2004; Augot et al., 2013; Puchinger et al., 2016; Kamche and Mouaha, 2019) (see (Martínez-Peñas et al., 2021) for a recent survey). They have also been used for digital image watermarking (Lefèvre et al., 2019), low-rank matrix recovery (Forbes and Shpilka, 2012; Müelich et al., 2017) (using rank-metric codes over infinite fields (Roth, 1991; Roth, 1996; Augot et al., 2018)), and private information retrieval over networks (Tajeddine et al., 2019).

# Acknowledgements

The work of L. Holzbaur and A. Wachter-Zeh was supported by the German Research Foundation (Deutsche Forschungsgemeinschaft, DFG) under Grant No. WA3907/1-1. This work has also been supported by the European Research Council (ERC) under the European Union's Horizon 2020 research and innovation programme (grant agreement no. 801434). H. Liu has been supported by a German Israeli Project Cooperation (DIP) grant under grant no. PE2398/1-1 and KR3517/9-1.

This work was done while S. Puchinger was with the Department of Applied Mathematics and Computer Science, Technical University of Denmark (DTU), Lyngby, Denmark and the Department of Electrical and Computer Engineering, Technical University of Munich, Munich, Germany. He was supported by the European Union's Horizon 2020 research and innovation program under the Marie Sklodowska-Curie grant agreement no. 713683 and by the European Research Council (ERC) under the European Union's Horizon 2020 research and innovation programme (grant agreement no. 801434).

### References

- Agrell, E., A. Vardy, and K. Zeger. (2000). "Upper bounds for constant-weight codes". *IEEE Transactions on Information Theory.* 46(7): 2373–2395.
- Aguilar Melchor, C., N. Aragon, M. Bardet, S. Bettaieb, L. Bidoux, O. Blazy, J. Deneuville, P. Gaborit, A. Hauteville, A. Otmani, O. Ruatta, J. Tillich, and G. Zemor. (2019a). "ROLLO rank-ouroboros, LAKE & LOCKER". Second round submission to the NIST post-quantum cryptography call. URL: https://pqc-rollo.org.
- Aguilar Melchor, C., N. Aragon, S. Bettaieb, L. Bidoux, O. Blazy, J. Deneuville, P. Gaborit, G. Zemor, A. Couvreur, and Hauteville. (2019b). "Rank quasi cyclic (RQC)". Second round submission to the NIST post-quantum cryptography call. URL: https://pqc-rqc.org.
- Aguilar-Melchor, C., O. Blazy, J. Deneuville, P. Gaborit, and G. Zémor. (2018). "Efficient encryption from random quasi-cyclic codes". *IEEE Transactions on Information Theory*. 64(5): 3927–3943. DOI: 10.1109/TIT.2018.2804444.
- Ahlswede, R., N. Cai, S. Li, and R. Yeung. (2000). "Network information flow". *IEEE Transactions on Information Theory*. 46(4): 1204–1216. ISSN: 0018-9448.
- Alagic, G., J. Alperin-Sheriff, D. Apon, D. Cooper, Q. Dang, J. Kelsey, C. Miller, D. Moody, R. Peralta, R. Perlner, A. R. and Daniel Smith-Tone, and Y.-K. Liu. (2020). "Status Report on the Second Round of the NIST Post-Quantum Cryptography Standardization Process". Tech. rep. US Department of Commerce, NIST.
- Albert, A. A. (1961). "Generalized twisted fields". Pacific J. Math. 11(1): 1-8.
- Almeida, P. and D. Napp. (2021). "A new rank metric for convolutional codes". *Designs*, Codes and Cryptography. 89(1): 53–73.
- Aragon, N., P. Barreto, S. Bettaieb, L. Bidoux, O. Blazy, J. Deneuville, P. Gaborit, S. Gueron, T. Güneysu, C. Aguilar Melchor, R. Misoczki, E. Persichetti, N. Sendrier, J. Tillich, V. Vasseur, and G. Zemor. (2019a). "BIKE bit flipping key encapsulation". Second round submission to the NIST post-quantum cryptography call. URL: https://pqc-rollo.org.
- Aragon, N., O. Blazy, P. Gaborit, A. Hauteville, and G. Zémor. (2019b). "Durandal: a rank metric based signature scheme". In: *Annual International Conference on the Theory and Applications of Cryptographic Techniques*. Springer. 728–758.
- Aragon, N. and P. Gaborit. (2019). "A key recovery attack against LRPC using decryption failures". In: Coding and Cryptography, International Workshop, WCC. Vol. 2019.
- Aragon, N., P. Gaborit, A. Hauteville, O. Ruatta, and G. Zémor. (2019c). "Low rank parity check codes: new decoding algorithms and applications to cryptography". *IEEE Transactions on Information Theory.* 65(12): 7697–7717.
- Aragon, N., P. Gaborit, A. Hauteville, and J.-P. Tillich. (2018). "A new algorithm for solving the rank syndrome decoding problem". In: 2018 IEEE International Symposium on Information Theory (ISIT). IEEE. 2421–2425.

- Augot, D. and M. Finiasz. (2003). "A public key encryption scheme based on the polynomial reconstruction problem". *LNCS: Revised selected papers of EUROCRYPT 2003*. 2656: 229–249.
- Augot, D., P. Loidreau, and G. Robert. (2013). "Rank metric and Gabidulin codes in characteristic zero". In: *IEEE Int. Symp. Inf. Theory (ISIT)*. Istanbul, Turkey. arXiv: 1305.4047.
- Augot, D., P. Loidreau, and G. Robert. (2018). "Generalized Gabidulin codes over fields of any characteristic". *Designs, Codes and Cryptography.* 86(8): 1807–1848.
- Balaji, S. and P. V. Kumar. (2015). "On partial maximally-recoverable and maximally-recoverable codes". In: 2015 IEEE International Symposium on Information Theory (ISIT). IEEE. 1881–1885.
- Baldi, M., M. Bianchi, F. Chiaraluce, J. Rosenthal, and D. Schipani. (2016). "Enhanced public key security for the McEliece cryptosystem". *Journal of Cryptography*. 29(1): 1–27.
- Baldi, M., K. Khathuria, E. Persichetti, and P. Santini. (2020). "Cryptanalysis of a code-based signature scheme based on the Lyubashevsky framework". *Tech. rep.* Cryptology ePrint Archive, Report 2020/905, https://eprint.iacr. org/2020/905.
- Bardet, M. and P. Briaud. (2021). "An algebraic approach to the rank support learning problem". CoRR. abs/2103.03558. arXiv: 2103.03558. URL: https://arxiv.org/abs/2103.03558.
- Bardet, M., P. Briaud, M. Bros, P. Gaborit, V. Neiger, O. Ruatta, and J.-P. Tillich. (2020a). "An algebraic attack on rank metric code-based cryptosystems". In: Annual International Conference on the Theory and Applications of Cryptographic Techniques. Springer. 64–93.
- Bardet, M., M. Bros, D. Cabarcas, P. Gaborit, R. A. Perlner, D. Smith-Tone, J.-P. Tillich, and J. A. Verbel. (2020b). "Improvements of algebraic attacks for solving the rank decoding and MinRank problems". In: *Advances in Cryptology ASIACRYPT 2020*. Vol. 12491. *Lecture Notes in Computer Science*. Springer. 507–536.
- Bartoli, D., M. Giulietti, and I. Platoni. (2014). "On the covering radius of mds codes". *IEEE Transactions on Information Theory.* 61(2): 801–811.
- Bartoli, D., C. Zanella, and F. Zullo. (2019). "A new family of maximum scattered linear sets in  $PG(1, q^6)$ ".  $arXiv\ preprint\ arXiv:1910.02278$ .
- Bartz, H. (2017). "Algebraic Decoding of Subspace and Rank-Metric Codes". *PhD thesis*. Technische Universität München.
- Bartz, H., T. Jerkovits, S. Puchinger, and J. Rosenkilde. (2021). "Fast decoding of codes in the rank, subspace, and sum-rank metric". *IEEE Transactions on Information Theory*. 67(8): 5026–5050. DOI: 10.1109/TIT.2021.3067318.
- Bartz, H. and V. Sidorenko. (2015). "List and probabilistic unique decoding of folded subspace codes". In: *IEEE International Symposium on Information Theory (ISIT)*. Hong Kong, China. DOI: 10.1109/ISIT.2015.7282407.

- Bartz, H. and V. Sidorenko. (2017). "Algebraic decoding of folded Gabidulin codes". *Designs, Codes and Cryptography.* 82(1-2): 449–467.
- Bartz, H. and A. Wachter-Zeh. (2014). "Efficient interpolation-based decoding of interleaved subspace and Gabidulin codes". In: 52nd Annual Allerton Conference on Communication, Control, and Computing. Monticello, IL. 1349–1356. DOI: 10.1109/ALLERTON.2014.7028612.
- Bartz, H. and A. Wachter-Zeh. (2018). "Efficient decoding of interleaved subspace and Gabidulin codes beyond their unique decoding radius using gröbner bases". Advances in Mathematics of Communications. 12(4): 773.
- Bassalygo, L. A. (1965). "New upper bounds for error correcting codes". *Probl. Inf. Transm.* 1(4): 41–44.
- Berger, T. P. (2003). "Isometries for rank distance and permutation group of Gabidulin codes". *IEEE Transactions on Information Theory*. 49(11): 3016–3019.
- Berger, T. P., P. Gaborit, and O. Ruatta. (2017). "Gabidulin matrix codes and their application to small ciphertext size cryptosystems". In: *International Conference in Cryptology in India*. Springer. 247–266.
- Berlekamp, E. R. (1984). Algebraic Coding Theory. Aegean Park Press. ISBN: 0894120638.
- Bernstein, D., T. Chou, T. Lange, I. Maurich, R. Misoczki, R. Niederhagen, E. Persichetti, C. Peters, P. Schwabe, N. Sendrier, J. Szefer, and W. Wang. (2019). "Classic McEliece". Second round submission to the NIST post-quantum cryptography call. URL: https://classic.mceliece.org.
- Blanco-Chacón, I., E. Byrne, I. Duursma, and J. Sheekey. (2018). "Rank metric codes and zeta functions". *Designs, Codes and Cryptography.* 86(8): 1767–1792.
- Blaum, M., J. L. Hafner, and S. Hetzler. (2013). "Partial-MDS codes and their application to RAID type of architectures". *IEEE Transactions on Information Theory*. 59(7): 4510–4519.
- Blaum, M., J. S. Plank, M. Schwartz, and E. Yaakobi. (2016). "Construction of partial MDS and sector-disk codes with two global parity symbols". *IEEE Transactions on Information Theory.* 62(5): 2673–2681.
- Bombar, M. and A. Couvreur. (2021). "Decoding supercodes of Gabidulin codes and applications to cryptanalysis". arXiv preprint arXiv:2103.02700.
- Boucher, D., W. Geiselmann, and F. Ulmer. (2007). "Skew cyclic codes". Appl. Algebra Engrg. Comm. Comput. 18(4).
- Boucher, D. and F. Ulmer. (2012). "Linear codes using skew polynomials with automorphisms and derivations". *Designs, Codes and Cryptography*. June: 1–27. ISSN: 0925-1022. DOI: 10.1007/s10623-012-9704-4.
- Boucher, D. and F. Ulmer. (2009a). "Codes as modules over skew polynomial rings". In: Cryptography and Coding. Ed. by M. Parker. Vol. 5921. Lecture Notes in Computer Science. Springer. 38–55. DOI: 10.1007/978-3-642-10868-6\\_3.

- Boucher, D. and F. Ulmer. (2009b). "Coding with skew polynomial rings". *J. Symbolic Comput.* 44(12): 1644–1656. ISSN: 07477171. DOI: 10.1016/j.jsc.2007.11.008.
- Byrne, E., G. Cotardo, and A. Ravagnani. (2020). "Rank-metric codes, generalized binomial moments and their zeta functions". *Linear Algebra and its Applications*. 604: 92–128.
- Byrne, E. and A. Ravagnani. (2017). "Covering radius of matrix codes endowed with the rank metric". SIAM Journal on Discrete Mathematics. 31(2): 927–944.
- Byrne, E. and A. Ravagnani. (2020). "Partition-balanced families of codes and asymptotic enumeration in coding theory". *Journal of Combinatorial Theory, Series A.* 171: 105169.
- Cai, N. and R. W. Yeung. (2002). "Network coding and error correction". In: *IEEE Information Theory Workshop (ITW)*. 119–122. DOI: 10.1109/ITW.2002.1115432.
- Cai, N. and R. W. Yeung. (2006). "Network error correction, II: lower bounds". Communications in Information and Systems. 6(1): 37–54.
- Calis, G. and O. O. Koyluoglu. (2016). "A general construction for PMDS codes". *IEEE Communications Letters*. 21(3): 452–455.
- Cannons, J., R. Dougherty, C. Freiling, and K. Zeger. (2006). "Network routing capacity". *IEEE Trans. Inform. Theory.* 52(3): 777–788.
- Chabaud, F. and J. Stern. (1996). "The cryptographic security of the syndrome decoding problem for rank distance codes". In: *Advances in Cryptology ASIACRYPT '96*. Ed. by K. Kim and T. Matsumoto. Berlin, Heidelberg: Springer Berlin Heidelberg. 368–381. ISBN: 978-3-540-70707-3.
- Chaussade, L., P. Loidreau, and F. Ulmer. (2009). "Skew codes of prescribed distance or rank". Designs, Codes and Cryptography. 50(3): 267–284. DOI: 10.1007/s10623-008-9230-6.
- Chen, M., C. Huang, and J. Li. (2007). "On the maximally recoverable property for multi-protection group codes". In: 2007 IEEE International Symposium on Information Theory. IEEE. 486–490.
- Chen, Z., P. Fan, and K. B. Letaief. (2016). "Fundamental limits of caching: improved bounds for users with small buffers". *IET Communications*. 10(17): 2315–2318.
- Coggia, D. and A. Couvreur. (2019). "On the security of a Loidreau's rank metric code based encryption scheme". In: Workshop on Coding and Cryptography (WCC).
- Cohen, G., I. Honkala, S. Litsyn, and A. Lobstein. (1997). Covering codes. Elsevier.
- Cohen, G., M. Karpovsky, H. Mattson, and J. Schatz. (1985). "Covering radius—survey and recent results". *IEEE Transactions on Information Theory*. 31(3): 328–343.
- Couveignes, J.-M. and R. Lercier. (2009). "Elliptic periods for finite fields". Finite Fields and Their Applications. 15(1): 1–22.
- Cruz, J. de la, M. Kiermaier, A. Wassermann, and W. Willems. (2016). "Algebraic structures of MRD codes". Advances in Mathematics of Communications. 10(3): 499–510.
- Csajbók, B., G. Marino, O. Polverino, and C. Zanella. (2018a). "A new family of MRD-codes". *Linear Algebra and its Applications*. 548: 203–220.

- Csajbók, B., G. Marino, O. Polverino, and Y. Zhou. (2020). "MRD codes with maximum idealizers". *Discrete Mathematics*. 343(9): 111985.
- Csajbók, B., G. Marino, and F. Zullo. (2018b). "New maximum scattered linear sets of the projective line". Finite Fields and Their Applications. 54: 133–150.
- Debris-Alazard, T., N. Sendrier, and J.-P. Tillich. (2018). "Wave: A new code-based signature scheme". arXiv: 1810.07554.
- Delsarte, P. (1978). "Bilinear forms over a finite field with applications to coding theory". Journal of Combinatorial Theory. 25(3): 226–241.
- Dickson, L. E. (1905). "On finite algebras". Nachrichten von der Gesellschaft der Wissenschaften zu Göttingen, Mathematisch-Physikalische Klasse. 1905: 358–393.
- Dickson, L. E. (1906). "On commutative linear algebras in which division is always uniquely possible". Transactions of the American Mathematical Society. 7(4): 514–522.
- Ding, Y. (2015a). "On list-decodability of random rank metric codes and subspace codes".

  IEEE Transactions on Information Theory. 61(1): 51–59. ISSN: 0018-9448. DOI: 10.1109/TIT.2014.2371915.
- Ding, Y. (2015b). "On list-decodability of random rank metric codes and subspace codes". *IEEE Transactions on Information Theory.* 61(1): 51–59.
- Djomou, F. R. K., H. T. Kalachi, and E. Fouotsa. (2021). "Generalization of low rank parity-check (LRPC) codes over the ring of integers modulo a positive integer". *Arabian Journal of Mathematics*: 1–10.
- Dougherty, R., C. Freiling, and K. Zeger. (2007). "Networks, matroids, and non-Shannon information inequalities". *IEEE Trans. Inf. Theory.* 53(6): 1949–1969.
- Ebrahimi, J. B. and C. Fragouli. (2011). "Algebraic algorithms for vector network coding". *IEEE Trans. Inf. Theory.* 57(2): 996–1007.
- Elleuch, M., A. Wachter-Zeh, and A. Zeh. (2018). "A public-key cryptosystem from interleaved Goppa codes". arXiv preprint arXiv:1809.03024.
- Etzion, T. and A. Vardy. (2011). "Error-correcting codes in projective space". *IEEE Transactions on Information Theory.* 57(2): 1165–1173. ISSN: 0018-9448.
- Etzion, T. and A. Wachter-Zeh. (2018). "Vector network coding based on subspace codes outperforms scalar linear network coding". *IEEE Transactions on Information Theory*. 64(4): 2460–2473.
- Faure, C. and P. Loidreau. (2005). "A new public-key cryptosystem based on the problem of reconstructing p-polynomials". In: *International Workshop on Coding and Cryptog-raphy*. Springer. 304–315.
- Fikes, A. (2010). Storage Architecture and Challenges. URL: https://cloud.google.com/files/storage\_architectur Forbes, M. A. and A. Shpilka. (2012). "On identity testing of tensors, low-rank recovery and compressed sensing". In: Proceedings of the forty-fourth annual ACM symposium on Theory of computing. ACM. 163–172.
- Gabidulin, E. M. (1985). "Theory of codes with maximum rank distance". *Problemy Peredachi Informatsii*. 21(1): 3–16.

- Gabidulin, E. M., M. Bossert, and P. Lusina. (2000). "Space-time codes based on rank codes". In: *IEEE Int. Symp. Inf. Theory (ISIT)*. Sorrento, Italy. 284.
- Gabidulin, E. M. and N. I. Pilipchuk. (2004). "Symmetric Rank Codes". *Probl. Inf. Transm.* 40(2): 103–117.
- Gabidulin, E. M. (2008). "Attacks and counter-attacks on the GPT public key cryptosystem". Designs, Codes and Cryptography. 48(2): 171–177.
- Gabidulin, E. M. (1993). "On public-key cryptosystems based on linear codes: efficiency and weakness." In: 4th IMA Conference on Cryptography and Coding. IMA Press.
- Gabidulin, E. M. (1992). "A fast matrix decoding algorithm for rank-error-correcting codes". *Algebraic Coding*. Lecture Notes in Computer Science 573: 126–133.
- Gabidulin, E. M. (2021). *Rank Codes*. Ed. by V. Sidorenko. München: TUM.University Press. ISBN: 978-3-95884-062-1.
- Gabidulin, E. M. and N. I. Pilipchuk. (2006). "Symmetric matrices and codes correcting rank errors beyond the [(d-1)/2] bound". *Discrete Applied Mathematics*. 154(2): 305–312.
- Gabidulin, E. M. and N. I. Pilipchuk. (2008). "Error and erasure correcting algorithms for rank codes". *Designs, Codes and Cryptography.* 49(1-3): 105–122.
- Gabidulin, E. M. and A. V. Ourivski. (2001). "Modified GPT PKC with right scrambler". Electronic Notes in Discrete Mathematics. 6: 168–177.
- Gabidulin, E. M., A. V. Ourivski, B. Honary, and B. Ammar. (2003). "Reducible rank codes and their applications to cryptography". *IEEE Transactions on Information Theory*. 49(12): 3289–3293.
- Gabidulin, E. M., A. Paramonov, and O. Tretjakov. (1991). "Ideals over a non-commutative ring and their application in cryptology". In: Workshop on the Theory and Application of Cryptographic Techniques. Springer. 482–489.
- Gabidulin, E. M., H. Rashwan, and B. Honary. (2009). "On improving security of GPT cryptosystems". In: 2009 IEEE International Symposium on Information Theory. IEEE. 1110–1114.
- Gaborit, P., O. Ruatta, and J. Schrek. (2016). "On the complexity of the rank syndrome decoding problem". *IEEE Trans. Inform. Theory.* 62(2): 1006–1019. ISSN: 0018-9448. DOI: 10.1109/TIT.2015.2511786.
- Gaborit, P., A. Hauteville, D. H. Phan, and J.-P. Tillich. (2017a). "Identity-based encryption from codes with rank metric". In: *Advances in Cryptology CRYPTO 2017*. Ed. by J. Katz and H. Shacham. Cham: Springer International Publishing. 194–224. ISBN: 978-3-319-63697-9.
- Gaborit, P., A. Hauteville, D. H. Phan, and J.-P. Tillich. (2017b). "Identity-based encryption from codes with rank metric". In: Annual International Cryptology Conference. Springer. 194–224.

- Gaborit, P., G. Murat, O. Ruatta, and G. Zémor. (2013). "Low rank parity check codes and their application to cryptography". In: *Int. Workshop Coding Cryptogr.* (WCC). Bergen, Norway. 168–180.
- Gaborit, P., O. Ruatta, and J. Schrek. (2015). "On the complexity of the rank syndrome decoding problem". *IEEE Transactions on Information Theory*. 62(2): 1006–1019.
- Gaborit, P. and G. Zémor. (2016). "On the hardness of the decoding and the minimum distance problems for rank codes". *IEEE Transactions on Information Theory*. 62(12): 7245–7252. DOI: 10.1109/TIT.2016.2616127.
- Gabrys, R., E. Yaakobi, M. Blaum, and P. H. Siegel. (2018). "Constructions of partial MDS codes over small fields". *IEEE Transactions on Information Theory*. 65(6): 3692–3701.
- Gadouleau, M. and Z. Yan. (2006). "Properties of codes with the rank metric". In: *IEEE Global Telecomm. Conf. (GLOBECOM)*. San Francisco, CA, USA. 1–5. ISBN: 1-4244-0356-1. DOI: 10.1109/glocom.2006.173.
- Gadouleau, M. and Z. Yan. (2010). "Constant-rank codes and their connection to constant-dimension codes". *IEEE Transactions on Information Theory*. 56(7): 3207–3216. ISSN: 0018-9448. DOI: 10.1109/TIT.2010.2048447.
- Gadouleau, M. and Z. Yan. (2008a). "Packing and covering properties of rank metric codes". *IEEE Transactions on Information Theory.* 54(9): 3873–3883. ISSN: 0018-9448.
- Gadouleau, M. and Z. Yan. (2008b). "MacWilliams identity for codes with the rank metric". EURASIP journal on wireless communications and networking. 2008: 1–13.
- Gadouleau, M. and Z. Yan. (2009). "Bounds on covering codes with the rank metric". *IEEE Communications Letters*. 13(9): 691–693.
- Gao, S. (2003). "A new algorithm for decoding Reed-Solomon codes". Commun. Inf. Network Sec. 712: 55–68.
- Gibson, K. (1995). "Severely denting the Gabidulin version of the McEliece public key cryptosystem". *Designs, Codes and Cryptography.* 6(1): 37–45.
- Gibson, K. (1996). "The security of the Gabidulin public key cryptosystem". In: *International Conference on the Theory and Applications of Cryptographic Techniques*. Springer. 212–223.
- Giesbrecht, M. (1998). "Factoring in skew-polynomial rings over finite fields". J. Symb. Computation. 26(4): 463-486. ISSN: 07477171. DOI: 10.1006/jsco.1998.0224.
- Gluesing-Luerssen, H. (2020). "On the sparseness of certain linear mrd codes". Linear Algebra and its Applications. 596: 145–168. ISSN: 0024-3795. DOI: https://doi.org/10.1016/j.laa.2020.03.006.
- Gómez-Vilardebó, J. (2018). "Fundamental limits of caching: Improved rate-memory trade-off with coded prefetching". *IEEE Transactions on Communications*. 66(10): 4488–4497. ISSN: 1558-0857. DOI: 10.1109/TCOMM.2018.2834364.
- Gopalan, P., G. Hu, S. Kopparty, S. Saraf, C. Wang, and S. Yekhanin. (2017). "Maximally recoverable codes for grid-like topologies". In: *Proceedings of the Twenty-Eighth Annual ACM-SIAM Symposium on Discrete Algorithms*. SIAM. 2092–2108.

- Gopalan, P., C. Huang, B. Jenkins, and S. Yekhanin. (2014). "Explicit maximally recoverable codes with locality". *IEEE Transactions on Information Theory*. 60(9): 5245–5256.
- Gopalan, P., C. Huang, H. Simitci, and S. Yekhanin. (2012). "On the locality of codeword symbols". *IEEE Transactions on Information theory*. 58(11): 6925–6934.
- Gorla, E. (2019). "Rank-metric codes". arXiv: 1902.02650 [cs.IT].
- Gorla, E. and A. Ravagnani. (2018). "Codes endowed with the rank metric". In: *Network Coding and Subspace Designs*. Springer. 3–23.
- Gruica, A. and A. Ravagnani. (2020). "Common complements of linear subspaces and the sparseness of mrd codes". SIAM Journal on Applied Algebra and Geometry, to appear. arXiv: 2011.02993.
- Guo, Q., T. Johansson, and P. Stankovski. (2016). "A key recovery attack on MDPC with CCA security using decoding errors". In: *International Conference on the Theory and Application of Cryptology and Information Security*. Springer. 789–815.
- Guruswami, V. and A. Rudra. (2008). "Explicit codes achieving list decoding capacity: error-correction with optimal redundancy". *IEEE Transactions on Information Theory*. 54(1): 135–150.
- Guruswami, V. and C. Wang. (2013a). "Linear-algebraic list decoding for variants of Reed-Solomon codes". *IEEE Transactions on Information Theory*. 59(6): 3257–3268. ISSN: 0018-9448. DOI: 10.1109/TIT.2013.2246813.
- Guruswami, V., S. Narayanan, and C. Wang. (2012). "List decoding subspace codes from insertions and deletions". In: *Proceedings of the 3rd Innovations in Theoretical Computer Science Conference (ITCS)*. Cambridge, Massachusetts. 183–189. ISBN: 978-1-4503-1115-1. DOI: 10.1145/2090236.2090252.
- Guruswami, V. and C. Wang. (2013b). "Explicit rank-metric codes list-decodable with optimal redundancy". *Electronic Colloquium on Computational Complexity (ECCC)*.
- Guruswami, V. and C. Wang. (2013c). "Explicit rank-metric codes list-decodable with optimal redundancy". CoRR. abs/1311.7084. arXiv: 1311.7084. URL: http://arxiv.org/abs/1311.7084.
- Guruswami, V., C. Wang, and C. Xing. (2016). "Explicit list-decodable rank-metric and subspace codes via subspace designs". *IEEE Transactions on Information Theory.* 62(5): 2707–2718.
- Hassan, Y. and V. R. Sidorenko. (2010). "Fast recursive linearized feedback shift register synthesis". In: *International Workshop on Algebraic and Combinatorial Coding Theory* (ACCT). Novosibirsk, Russia. 162–167.
- Hauteville, A. and J.-P. Tillich. (2015). "New algorithms for decoding in the rank metric and an attack on the LRPC cryptosystem". In: 2015 IEEE International Symposium on Information Theory (ISIT). IEEE. 2747–2751.

- Ho, T., M. Médard, R. Kötter, D. R. Karger, M. Effros, J. Shi, and B. Leong. (2006). "A random linear network coding approach to multicast". *IEEE Transactions on Information Theory.* 52(10): 4413–4430. ISSN: 0018-9448. DOI: 10.1109/TIT.2006.881746.
- Holzbaur, L., H. Liu, S. Puchinger, and A. Wachter-Zeh. (2019). "On decoding and applications of interleaved Goppa codes". In: 2019 IEEE International Symposium on Information Theory (ISIT). IEEE. 1887–1891.
- Holzbaur, L., S. Puchinger, E. Yaakobi, and A. Wachter-Zeh. (2021a). "Correctable erasure patterns in product topologies". In: 2021 IEEE International Symposium on Information Theory (ISIT). IEEE.
- Holzbaur, L., S. Puchinger, E. Yaakobi, and A. Wachter-Zeh. (2021b). "Partial MDS codes with regeneration". *IEEE Transactions on Information Theory*. DOI: 10.1109/TIT.2021.3091455.
- Horlemann-Trautmann, A.-L. and K. Marshall. (2017). "New criteria for MRD and Gabidulin codes and some rank-metric code constructions". Advances in Mathematics of Communications. 11(3): 533–548.
- Horlemann-Trautmann, A.-L., K. Marshall, and J. Rosenthal. (2016). "Considerations for rank-based cryptosystems". In: 2016 IEEE International Symposium on Information Theory (ISIT). IEEE. 2544–2548.
- Horlemann-Trautmann, A.-L., K. Marshall, and J. Rosenthal. (2018). "Extension of Overbeck's attack for Gabidulin-based cryptosystems". *Designs, Codes and Cryptography*. 86(2): 319–340.
- Horlemann-Trautmann, A.-L. and A. Neri. (2020). "A complete classification of partial-MDS (maximally recoverable) codes with one global parity". *Advances in Mathematics of Communications*. 14(1): 69–88.
- Hu, G. and S. Yekhanin. (2016). "New constructions of SD and MR codes over small finite fields". In: 2016 IEEE International Symposium on Information Theory (ISIT). IEEE. 1591–1595.
- Huang, C., M. Chen, and J. Li. (2007). "Pyramid codes: flexible schemes to trade space for access efficiency in reliable data storage systems". In: Sixth IEEE International Symposium on Network Computing and Applications (NCA 2007). 79–86. DOI: 10.1109/NCA.2007.37.
- Jacobson, N. (1943). The Theory of Rings. American Mathematical Society. ISBN: 0821815024.
- Jacobson, N. (2010). Finite-Dimensional Division Algebras over Fields. 1st ed. 1996. Corr. 2nd printing 2009. Springer. ISBN: 3540570292.
- Jaggi, S., P. Sanders, P. A. Chou, M. Effros, S. Egner, K. Jain, and L. M. G. M. Tolhuizen. (2005). "Polynomial time algorithms for multicast network code construction". IEEE Transactions on Information Theory. 51(6): 1973–1982. ISSN: 0018-9448. DOI: 10.1109/TIT.2005.847712.
- Jerkovits, T., V. Sidorenko, and A. Wachter-Zeh. (2021). "Decoding of Space-Symmetric Rank Errors". In: *IEEE International Symposium on Information Theory (ISIT)*. 658–663. DOI: 10.1109/ISIT45174.2021.9518115.

- Johnson, S. (1962). "A new upper bound for error-correcting codes". *IRE Trans. Inf. Theory.* 8(3): 203–207. ISSN: 0096-1000. DOI: 10.1109/TIT.1962.1057714.
- Jurrius, R. and R. Pellikaan. (2015). "On defining generalized rank weights". arXiv preprint arXiv:1506.02865.
- Kadhe, S., S. El Rouayheb, I. Duursma, and A. Sprintson. (2019). "Codes with locality in the rank and subspace metrics". *IEEE Transactions on Information Theory*. 65(9): 5454–5468.
- Kadir, W. K. and C. Li. (2020). "On decoding additive generalized twisted Gabidulin codes". Cryptography and Communications. 12(5): 987–1009.
- Kadir, W. K., C. Li, and F. Zullo. (2021). "On interpolation-based decoding of a class of maximum rank distance codes". arXiv preprint arXiv:2105.03115.
- Kamath, G. M., N. Prakash, V. Lalitha, and P. V. Kumar. (2014). "Codes with local regeneration and erasure correction". *IEEE Transactions on Information Theory*. 60(8): 4637–4660.
- Kamche, H. T., H. T. Kalachi, F. R. K. Djomou, and E. Fouotsa. (2021). "Low-rank parity-check codes over finite commutative rings and application to cryptography". arXiv preprint arXiv:2106.08712.
- Kamche, H. T. and C. Mouaha. (2019). "Rank-metric codes over finite principal ideal rings and applications". *IEEE Transactions on Information Theory*. 65(12): 7718–7735.
- Katti, S., H. Rahul, W. Hu, D. Katabi, M. Medard, and J. Crowcroft. (2008). "XORs in the air: practical wireless network coding". *IEEE/ACM Transactions on Networking*. 16(3): 497–510. DOI: 10.1109/TNET.2008.923722.
- Khaleghi, A., D. Silva, and F. R. Kschischang. (2009). "Subspace codes". In: Cryptography and Coding. Vol. 5921. Lecture Notes in Computer Science. 1–21. DOI: 10.1007/978-3-642-10868-6\\_1.
- Kim, M., M. Médard, and J. Barros. (2011). "Modeling network coded tcp throughput: a simple model and its validation". In: Proceedings of the 5th International ICST Conference on Performance Evaluation Methodologies and Tools. VALUETOOLS '11. Paris, France: ICST (Institute for Computer Sciences, Social-Informatics and Telecommunications Engineering). 131–140. ISBN: 9781936968091.
- Knuth, D. E. (1963). "Finite semifields and projective planes". *PhD thesis*. California Institute of Technology.
- Kötter, R. and F. R. Kschischang. (2008a). "Coding for errors and erasures in random network coding". *IEEE Transactions on Information Theory*. 54(8): 3579–3591. ISSN: 0018-9448. DOI: 10.1109/TIT.2008.926449.
- Kötter, R. and F. R. Kschischang. (2008b). "Coding for errors and erasures in random network coding". *IEEE Trans. Inf. Theor.* 54(8): 3579–3591. ISSN: 0018-9448. DOI: 10.1109/TIT.2008.926449.
- Kötter, R. and M. Médard. (2003). "An algebraic approach to network coding". *IEEE/ACM Transactions on Networking*. 11(5): 782–795. DOI: 10.1109/TNET.2003.818197.

- Krachkovsky, V. Y. and Y. X. Lee. (1997). "Decoding for iterative Reed-Solomon coding schemes". *IEEE Transactions on Magnetics*. 33(5): 2740–2742. ISSN: 00189464. DOI: 10.1109/20.617715.
- Lavauzelle, J., P. Loidreau, and B.-D. Pham. (2019). "RAMESSES, a rank metric encryption scheme with short keys". URL: http://arxiv.org/abs/1911.13119.
- Lavauzelle, J. and J. Renner. (2020). "Cryptanalysis of a system based on twisted reed-solomon codes". *Designs, Codes and Cryptography*. 88(7): 1285–1300.
- Lefèvre, P., P. Carré, and P. Gaborit. (2019). "Application of rank metric codes in digital image watermarking". Signal Processing: Image Communication. 74: 119–128.
- Lehman, A. R. and E. Lehman. (2004). "Complexity classification of network information flow problems". In: *Proceedings of the 15th annual ACM-SIAM symposium on discrete algorithms (SODA 2004)*, New Orleans, LA, USA. 142–150.
- Lewis, J. B. and A. H. Morales. (2020). "Rook theory of the finite general linear group". Experimental Mathematics. 29(3): 328–346. DOI: 10.1080/10586458.2018.1470045. eprint: https://doi.org/10.1080/10586458.2018.1470045.
- Li, C. (2019). "Interpolation-based decoding of nonlinear maximum rank distance codes". In: 2019 IEEE International Symposium on Information Theory (ISIT). IEEE. 2054–2058.
- Li, C. and W. Kadir. (2019). "On decoding additive generalized twisted Gabidulin codes". In: *International Workshop on Coding and Cryptography (WCC)*.
- Li, S. Y. R., R. W. Yeung, and N. Cai. (2003). "Linear network coding". *IEEE Transactions on Information Theory*. 49(2): 371–381. ISSN: 0018-9448. DOI: 10.1109/TIT.2002.807285.
- Li, W., V. Sidorenko, and D. Silva. (2014). "On transform-domain error and erasure correction by Gabidulin codes". *Designs, Codes and Cryptography.* 73: 571–586.
- Lidl, R. and H. Niederreiter. (1996). Finite Fields. Encyclopedia of Mathematics and its Applications. Cambridge University Press. ISBN: 0521392314.
- Lin, S. and D. J. Costello. (2004). Error Control Coding. 2nd ed. Prentice Hall. ISBN: 0130426725.
- Liu, S., C. Xing, and C. Yuan. (2017). "List decodability of random subcodes of Gabidulin codes". *IEEE Transactions on Information Theory*. 63(1): 159–163.
- Loidreau, P. (2012). "Asymptotic behaviour of codes in rank metric over finite fields". *Designs, Codes and Cryptography*. July: 1–14. ISSN: 0925-1022. DOI: 10.1007/s10623-012-9716-0.
- Loidreau, P. (2016). "An evolution of GPT cryptosystem". In: *Int. Workshop Alg. Combin. Coding Theory (ACCT)*.
- Loidreau, P. and R. Overbeck. (2006). "Decoding rank errors beyond the error correcting capability". In: *International Workshop on Algebraic and Combinatorial Coding Theory* (ACCT). Zvenigorod, Russia. 186–190.

- Loidreau, P. (2006). "A Welch-Berlekamp like algorithm for decoding Gabidulin codes". In: *Coding and cryptography*. Vol. 3969. *Lecture Notes in Computer Science*. Berlin: Springer. 36–45.
- Loidreau, P. (2008). "Properties of codes in rank metric". In: *International Workshop on Algebraic and Combinatorial Coding Theory (ACCT)*. Pamporovo, Bulgaria. 192–198.
- Loidreau, P. (2010). "Designing a rank metric based McEliece cryptosystem". In: *International Workshop on Post-Quantum Cryptography*. Springer. 142–152.
- Loidreau, P. (2017). "A new rank metric codes based encryption scheme". In: 8th Int. Conf. on Post-Quantum Cryptography (PQCrypto).
- Lu, H.-F. and P. V. Kumar. (2004). "Generalized unified construction of space-time codes with optimal rate-diversity tradeoff". In: *IEEE International Symposium on Information Theory (ISIT)*. Chicago, IL, USA. 95. ISBN: 0-7803-8280-3.
- Lunardon, G., R. Trombetti, and Y. Zhou. (2018). "Generalized twisted Gabidulin codes". Journal of Combinatorial Theory, Series A. 159: 79–106.
- Lusina, P., E. M. Gabidulin, and M. Bossert. (2003). "Maximum rank distance codes as space-time codes". *IEEE Transactions on Information Theory*. 49(10): 2757–2760. ISSN: 0018-9448.
- Lyubashevsky, V. (2012). "Lattice signatures without trapdoors". In: Annual International Conference on the Theory and Applications of Cryptographic Techniques. Springer. 738–755.
- MacWilliams, F. J. and N. J. A. Sloane. (1988). The Theory of Error-Correcting Codes. North Holland Publishing Co. ISBN: 0444851933.
- Maddah-Ali, M. A. and U. Niesen. (2014). "Fundamental limits of caching". *IEEE Transactions on Information Theory*. 60(5): 2856–2867. ISSN: 1557-9654. DOI: 10.1109/TIT.2014.2306938.
- Mahdavifar, H. and A. Vardy. (2010). "Algebraic list-decoding on the operator channel". In: *IEEE International Symposium on Information Theory (ISIT)*. Austin, TX, USA. 1193–1197. ISBN: 978-1-4244-7890-3. DOI: 10.1109/ISIT.2010.5513656.
- Mahdavifar, H. and A. Vardy. (2012). "List-decoding of subspace codes and rank-metric codes up to Singleton bound". In: *IEEE International Symposium on Information The-ory (ISIT)*. Cambridge, MA, USA. 1488–1492. ISBN: 978-1-4673-2580-6. DOI: 10.1109/ISIT.2012.6283511.
- Marino, G., M. Montanucci, and F. Zullo. (2020). "MRD-codes arising from the trinomial  $x^q + x^{q^3} + cx^{q^5} \in \mathbb{F}_{q^6}[x]$ ". Linear Algebra and its Applications. 591: 99–114.
- Martínez-Peñas, U. and F. R. Kschischang. (2019). "Universal and dynamic locally repairable codes with maximal recoverability via sum-rank codes". *IEEE Transactions on Information Theory.* 65(12): 7790–7805.
- Martínez-Peñas, U., M. Shehadeh, and F. Kschischang. (2021). "Codes in the sum-rank metric". submitted to Fundamentals and Applications.
- Matsaglia, G. and G. Styan. (1974). "Equalities and inequalities for ranks of matrices". Linear and Multilinear Algebra. 2(3): 269–292.

- McEliece, R. J. (2003). "On the average list size for the guruswami-sudan decoder". In: 7th International Symposium on Communications Theory and Applications (ISCTA). Ambleside, UK.
- McEliece, R. J. (1978). "A public-key cryptosystem based on algebraic coding theory". Deep Space Network Progress Report. 42(44): 114–116.
- Medard, M., M. Effros, T. Ho, and D. Karger. (2003). "On coding for non-multicast networks". In: 41st Allerton Conference on Communication, Control and Computing.
- Migler, T., K. E. Morrison, and M. Ogle. (2004). "Weight and rank of matrices over finite fields". arXiv: math/0403314. URL: http://arxiv.org/abs/math/0403314.
- Moore, E. H. (1896). "A two-fold generalization of Fermat's theorem". Bull. Amer. Math. Soc. 2: 189–199. DOI: 10.1090/S0002-9904-1896-00337-2.
- Morrison, K. (2014). "Equivalence for rank-metric and matrix codes and automorphism groups of Gabidulin codes". *IEEE Transactions on Information Theory.* 60(11): 7035–7046.
- Müelich, S., S. Puchinger, and M. Bossert. (2017). "Low-rank matrix recovery using Gabidulin codes in characteristic zero". *Electronic Notes in Discrete Mathematics*. 57: 161–166.
- Müelich, S., S. Puchinger, D. Mödinger, and M. Bossert. (2016). "An alternative decoding method for Gabidulin codes in characteristic zero". In: 2016 IEEE International Symposium on Information Theory (ISIT). IEEE. 2549–2553.
- Muralidhar, S., W. Lloyd, S. Roy, C. Hill, E. Lin, W. Liu, S. Pan, S. Shankar, V. Sivakumar, L. Tang, et al. (2014). "f4: facebook's warm BLOB storage system". In: 11th USENIX Symposium on Operating Systems Design and Implementation (OSDI 14). 383–398.
- Napp, D., R. Pinto, J. Rosenthal, and F. Santana. (2017a). "Column rank distances of rank metric convolutional codes". In: *International Castle Meeting on Coding Theory* and Applications. Springer. 248–256.
- Napp, D., R. Pinto, J. Rosenthal, and P. Vettori. (2017b). "MRD rank metric convolutional codes". In: 2017 IEEE International Symposium on Information Theory (ISIT). IEEE. 2766–2770.
- Napp, D., R. Pinto, J. Rosenthal, and P. Vettori. (2018). "Faster decoding of rank metric convolutional codes". In: 23rd International Symposium on Mathematical Theory of Networks and Systems.
- Neri, A. (2020). "Systematic encoders for generalized Gabidulin codes and the q-analogue of Cauchy matrices". *Linear Algebra and its Applications*. 593: 116–149. ISSN: 0024-3795. DOI: https://doi.org/10.1016/j.laa.2020.02.002.
- Neri, A., A.-L. Horlemann-Trautmann, T. Randrianarisoa, and J. Rosenthal. (2018). "On the genericity of maximum rank distance and Gabidulin codes". *Designs, Codes and Cryptography.* 86(2): 341–363.

- Neri, A., S. Puchinger, and A.-L. Horlemann-Trautmann. (2020). "Equivalence and characterizations of linear rank-metric codes based on invariants". *Linear Algebra and its Applications*. 603: 418–469.
- NIST. (2017). "Post-quantum cryptography standardization". https://csrc.nist.gov/Projects/Post-Quantum-Curve type of the control of the contr
- Ore, Ø. (1933a). "On a special class of polynomials". Transactions of the American Mathematical Society. 35: 559–584.
- Ore, Ø. (1933b). "Theory of non-commutative polynomials". Ann. Math. 34(3): 480–508.
- Otal, K. and F. Özbudak. (2016). "Explicit constructions of some non-Gabidulin linear maximum rank distance codes". Advances in Mathematics of Communications. 10(3): 589.
- Otal, K. and F. Özbudak. (2017). "Additive rank metric codes". *IEEE Transactions on Information Theory.* 63(1): 164–168.
- Otmani, A., H. T. Kalashi, and S. Ndjeya. (2017). "Improved cryptanalysis of rank metric schemes based on Gabidulin codes". *preprint*. Apr. URL: http://arxiv.org/abs/1602.08549v1.
- Ourivski, A. V. and T. Johansson. (2002). "New technique for decoding codes in the rank metric and its cryptography applications". *Problems of Information Transmission*. 38(3): 237–246. ISSN: 1608-3253. DOI: 10.1023/A:1020369320078. URL: https://doi.org/10.1023/A:1020369320078.
- Ourivski, A. V. and E. M. Gabidulin. (2003). "Column scrambler for the GPT cryptosystem". Discrete Applied Mathematics. 128(1): 207–221.
- Overbeck, R. (2005). "A new structural attack for GPT and variants". *LNCS: MYCRYPT*. 3715: 50–63.
- Overbeck, R. (2006). "Extending Gibson's attacks on the GPT cryptosystem". *LNCS:* Revised Selected Papers of WCC 2005. 3969: 178–188.
- Overbeck, R. (2008). "Structural attacks for public key cryptosystems based on Gabidulin codes". *Journal of Cryptology*. 21(2): 280–301.
- P. Delsarte. (1973). "An algebraic approach to association schemes of coding theory". Philips research reports supplements. 10(May): 103.
- P. Frankl and R. M. Wilson. (1986). "The Erdös-Ko-Rado theorem for vector spaces". Journal of Combinatorial Theory. 43(May): 228–236.
- Paramonov, A. V. and O. V. Tretjakov. (1991). "An analogue of Berlekamp-Massey algorithm for decoding codes in rank metric". In: *Moscow Institute of Physics and Technology (MIPT)*.
- Pilipchuk, N. and E. Gabidulin. (2005). "On Codes Correcting Symmetric Rank Errors". In: Coding and Cryptography. Vol. 3969. 14–21. DOI: 10.1007/11779360 2.
- Puchinger, S., J. R. né Nielsen, W. Li, and V. Sidorenko. (2017a). "Row reduction applied to decoding of rank-metric and subspace codes". *Designs, Codes and Cryptography*. 82(1-2): 389–409.

- Puchinger, S., J. Renner, and A. Wachter-Zeh. (2018). "Twisted Gabidulin codes in the GPT cryptosystem". arXiv preprint arXiv:1806.10055.
- Puchinger, S., J. Renner, A. Wachter-Zeh, and J. Zumbrägel. (2021). "Efficient decoding of Gabidulin codes over Galois rings". In: *IEEE International Symposium on Information Theory (ISIT)*, arXiv preprint arXiv:2102.02157.
- Puchinger, S., J. Rosenkilde né Nielsen, and J. Sheekey. (2017b). "Further generalisations of twisted Gabidulin codes". In: *International Workshop on Coding and Cryptography (WCC)*.
- Puchinger, S., S. Stern, M. Bossert, and R. F. Fischer. (2016). "Space-time codes based on rank-metric codes and their decoding". In: 2016 International Symposium on Wireless Communication Systems (ISWCS). IEEE. 125–130.
- Puchinger, S. and A. Wachter-Zeh. (2016). "Sub-quadratic decoding of Gabidulin codes". In: *IEEE Int. Symp. Inf. Theory (ISIT)*. Barcelona, Spain.
- Puchinger, S. and A. Wachter-Zeh. (2018). "Fast operations on linearized polynomials and their applications in coding theory". *Journal of Symbolic Computation*. 89: 194–215.
- Randrianarisoa, T. (2017). "A decoding algorithm for rank metric codes". arXiv preprint arXiv:1712.07060.
- Randrianarisoa, T. H. (2019). "A geometric approach to rank metric codes and a classification of constant weight codes". *CoRR*. abs/1907.04372. arXiv: 1907.04372. URL: http://arxiv.org/abs/1907.04372.
- Randrianarisoa, T. and J. Rosenthal. (2017). "A decoding algorithm for twisted Gabidulin codes". In: 2017 IEEE International Symposium on Information Theory (ISIT). IEEE. 2771–2774.
- Rashwan, H., E. M. Gabidulin, and B. Honary. (2010). "A smart approach for GPT cryptosystem based on rank codes". In: 2010 IEEE International Symposium on Information Theory. IEEE. 2463–2467.
- Rashwan, H., E. M. Gabidulin, and B. Honary. (2011). "Security of the GPT cryptosystem and its applications to cryptography". Security and Communication Networks. 4(8): 937–946.
- Ravagnani, A. (2016). "Rank-metric codes and their duality theory". *Designs, Codes and Cryptography.* 80(1): 197–216.
- Raviv, N. and A. Wachter-Zeh. (2016). "Some Gabidulin codes cannot be list decoded efficiently at any radius". *IEEE Transactions on Information Theory*. 62(4): 1605–1615. DOI: 10.1109/TIT.2016.2532343.
- Rawat, A. S., O. O. Koyluoglu, N. Silberstein, and S. Vishwanath. (2014). "Optimal locally repairable and secure codes for distributed storage systems". *IEEE Transactions on Information Theory.* 60(1): 212–236. DOI: 10.1109/TIT.2013.2288784.

- Renner, J., S. Puchinger, and A. Wachter-Zeh. (2019a). "Interleaving Loidreau's rank-metric cryptosystem". In: XVI International Symposium "Problems of Redundancy in Information and Control Systems".
- Renner, J., T. Jerkovits, and H. Bartz. (2019b). "Efficient decoding of interleaved low-rank parity-check codes". In: 2019 XVI International Symposium "Problems of Redundancy in Information and Control Systems" (REDUNDANCY). 121–126. DOI: 10.1109/REDUNDANCY48165.201
- Renner, J., T. Jerkovits, H. Bartz, S. Puchinger, P. Loidreau, and A. Wachter-Zeh. (2020a). "Randomized decoding of Gabidulin codes beyond the unique decoding radius". In: *International Conference on Post-Quantum Cryptography (PQCrypto)*. Paris, France.
- Renner, J., A. Neri, and S. Puchinger. (2021a). "Low-rank parity-check codes over Galois rings". *Designs, Codes and Cryptography.* 89(2): 351–386.
- Renner, J., S. Puchinger, and A. Wachter-Zeh. (2021b). "Decoding high-order interleaved rank-metric codes". In: *IEEE Int. Symp. Inf. Theory (ISIT)*. Melbourne, Australia.
- Renner, J., S. Puchinger, and A. Wachter-Zeh. (2021c). "LIGA: a cryptosystem based on the hardness of rank-metric list and interleaved decoding". *Designs, Codes and Cryptography.* 89(6): 1279–1319.
- Renner, J., S. Puchinger, A. Wachter-Zeh, C. Hollanti, and R. Freij-Hollanti. (2020b). "Low-rank parity-check codes over the ring of integers modulo a prime power". *IEEE International Symposium on Information Theory (ISIT)*.
- Richter, G. and S. Plass. (2004a). "Error and erasure decoding of rank-codes with a modified Berlekamp-Massey algorithm". In: *International ITG Conference on Systems, Communications and Coding 2004 (SCC)*. Erlangen, Germany.
- Richter, G. and S. Plass. (2004b). "Fast decoding of rank-codes with rank errors and column erasures". In: *IEEE International Symposium on Information Theory (ISIT)*. Chicago, IL, USA. 398. DOI: 10.1109/ISIT.2004.1365435.
- Rivest, R. L., A. Shamir, and L. Adleman. (1978). "A method for obtaining digital signatures and public-key cryptosystems". *Communications of the ACM*. 21(2): 120–126.
- Robert, G. (2016). "A quadratic Welch-Berlekamp algorithm to decode generalized Gabidulin codes, and some variants". In: 2016 IEEE International Symposium on Information Theory (ISIT). IEEE. 2559–2563.
- Roth, R. M. (1991). "Maximum-rank array codes and their application to crisscross error correction". *IEEE Transactions on Information Theory.* 37(2): 328–336.
- Roth, R. M. (1996). "Tensor codes for the rank metric". *IEEE Transactions on Information Theory.* 42(6): 2146–2157.
- Roth, R. M. (2017). "On decoding rank-metric codes over large fields". *IEEE Transactions on Information Theory*. 64(2): 944–951.
- Roth, R. M. and G. Seroussi. (1985). "On generator matrices of MDS codes (corresp.)" *IEEE transactions on information theory.* 31(6): 826–830.

- Sendrier, N. (2011). "Decoding one out of many". In: Post-Quantum Cryptography. Ed. by B.-Y. Yang. Berlin, Heidelberg: Springer Berlin Heidelberg. 51–67. ISBN: 978-3-642-25405-5.
- Sheekey, J. (2016). "A new family of linear maximum rank distance codes". Advances in Mathematics of Communications. 10(3): 475–488.
- Sheekey, J. (2019a). "13. MRD codes: constructions and connections". In: Combinatorics and finite fields: Difference sets, polynomials, pseudorandomness and applications. Ed. by K. Schmidt and A. Winterhof. Vol. 23. de Gruyter. 255–286.
- Sheekey, J. (2019b). "New semifields and new MRD codes from skew polynomial rings". Journal of the London Mathematical Society. DOI: 10.1112/jlms.12281.
- Shehhi, H. A., E. Bellini, F. Borba, F. Caullery, M. Manzano, and V. Mateu. (2019). "An IND-CCA-secure code-based encryption scheme using rank metric". In: *Progress in Cryptology AFRICACRYPT 2019*. Ed. by J. Buchmann, A. Nitaj, and T. Rachidi. Cham: Springer International Publishing. 79–96. ISBN: 978-3-030-23696-0.
- Shor, P. W. (1999). "Polynomial-time algorithms for prime factorization and discrete logarithms on a quantum computer". SIAM review. 41(2): 303–332.
- Sidorenko, V. R. and M. Bossert. (2010). "Decoding interleaved Gabidulin codes and multisequence linearized shift-register synthesis". In: *IEEE International Symposium on Information Theory (ISIT)*. Austin, TX, USA. 1148–1152.
- Sidorenko, V. R., L. Jiang, and M. Bossert. (2011a). "Skew-feedback shift-register synthesis and decoding interleaved Gabidulin codes". *IEEE Transactions on Information Theory.* 57(2): 621–632. ISSN: 0018-9448.
- Sidorenko, V. R., G. Richter, and M. Bossert. (2011b). "Linearized shift-register synthesis". *IEEE Transactions on Information Theory.* 57(9): 6025–6032. ISSN: 0018-9448. DOI: 10.1109/TIT.2011.2162173.
- Sidorenko, V. and M. Bossert. (2014). "Fast skew-feedback shift-register synthesis". Designs, Codes and Cryptography. 70(1-2): 55–67.
- Silva, D. and F. R. Kschischang. (2009a). "Fast encoding and decoding of Gabidulin codes". In: *IEEE International Symposium on Information Theory (ISIT)*. Seoul, Korea. 2858–2862. ISBN: 978-1-4244-4312-3. DOI: 10.1109/ISIT.2009.5205272.
- Silva, D. and F. R. Kschischang. (2009b). "On metrics for error correction in network coding". *IEEE Transactions on Information Theory*. 55(12): 5479–5490. ISSN: 0018-9448. DOI: 10.1109/tit.2009.2032817.
- Silva, D. (2009). "Error Control for Network Coding". *PhD thesis*. Toronto, Canada: University of Toronto, Toronto, Canada.
- Silva, D., F. R. Kschischang, and R. Kötter. (2008). "A rank-metric approach to error control in random network coding". *IEEE Transactions on Information Theory.* 54(9): 3951–3967.

- Sippel, C., C. Ott, S. Puchinger, and M. Bossert. (2019). "Reed-Solomon codes over fields of characteristic zero". In: 2019 IEEE International Symposium on Information Theory (ISIT). IEEE. 1537–1541.
- Tajeddine, R., A. Wachter-Zeh, and C. Hollanti. (2019). "Private information retrieval over random linear networks". *IEEE Transactions on Information Forensics and Security*. 15(July): 790–799.
- Tamo, I. and A. Barg. (2014). "A family of optimal locally recoverable codes". *IEEE Transactions on Information Theory.* 60(8): 4661–4676.
- Tian, C. and J. Chen. (2018). "Caching and delivery via interference elimination". *IEEE Transactions on Information Theory.* 6(3): 1548–1560. ISSN: 1557-9654. DOI: 10.1109/TIT.2018.2794543.
- Trautmann, A.-L., N. Silberstein, and J. Rosenthal. (2013). "List decoding of lifted Gabidulin codes via the plücker embedding". In: *International Workshop on Coding and Cryptog-raphy (WCC)*. Bergen, Norway.
- Trombetti, R. and F. Zullo. (2020). "On the list decodability of rank metric codes". *IEEE Transactions on Information Theory.* 66(9): 5379–5386.
- Vadhan, S. P. (2011). "Pseudorandomness". In: Foundation and Trends in Theoretical Computer Science.
- Wachter-Zeh, A., S. Puchinger, and J. Renner. (2018). "Repairing the Faure-Loidreau public-key cryptosystem". In: *IEEE International Symposium on Information Theory* (ISIT). 2426–2430. DOI: 10.1109/ISIT.2018.8437561.
- Wachter-Zeh, A. (2013). "Bounds on list decoding of rank-metric codes". *IEEE Transactions on Information Theory*. 59(11): 7268–7277. ISSN: 0018-9448. DOI: 10.1109/TIT.2013.2274653.
- Wachter-Zeh, A., V. Afanassiev, and V. Sidorenko. (2013). "Fast decoding of Gabidulin codes". Des. Codes Cryptogr. 66(1): 57–73.
- Wachter-Zeh, A. and V. Sidorenko. (2012). "Rank metric convolutional codes for random linear network coding". In: 2012 International Symposium on Network Coding (NetCod). IEEE. 1–6.
- Wachter-Zeh, A., M. Stinner, and V. Sidorenko. (2015). "Convolutional codes in rank metric with application to random network coding". *IEEE Transactions on Information Theory.* 61(6): 3199–3213.
- Wachter-Zeh, A. and A. Zeh. (2014). "List and unique error-erasure decoding of interleaved Gabidulin codes with interpolation techniques". *Designs, Codes and Cryptography.* 73(2): 547–570. ISSN: 0925-1022. DOI: 10.1007/s10623-014-9953-5.
- Wachter, A., V. R. Sidorenko, M. Bossert, and V. V. Zyablov. (2011). "On (partial) unit memory codes based on Gabidulin codes". *Problems of Information Transmission*. 47(2): 117–129.
- Wan, Z.-X. (1996). Geometry of matrices: in memory of professor LK Hua (1910–1985). World Scientific.

- Wang, H., C. Xing, and R. Safavi-Naini. (2003). "Linear authentication codes: bounds and constructions". *IEEE Transactions on Information Theory*. 49(4): 866–872.
- Xing, C. and C. Yuan. (2018). "A new class of rank-metric codes and their list decoding beyond the unique decoding radius". *IEEE Transactions on Information Theory.* 64(5): 3394–3402.
- Yeung, R. W. and N. Cai. (2006). "Network error correction, I: basic concepts and upper bounds". Communications in Information and Systems. 6(1): 19–35.
- Yu, Q., M. A. Maddah-Ali, and A. S. Avestimehr. (2018). "The exact rate-memory trade-off for caching with uncoded prefetching". *IEEE Transactions on Information Theory*. 64(2): 1281–1296. ISSN: 1557-9654. DOI: 10.1109/TIT.2017.2785237.
- Yunnan, P. C., P. A. Chou, Y. Wu, and K. Jain. (2003). "Practical network coding". 41st Annual Allerton Conference on Communication, Control, and Computing. Oct.
- Zheng, L. and D. N. C. Tse. (2002). "Communication on the Grassmann manifold: a geometric approach to the noncoherent multiple-antenna channel". *IEEE Transactions on Information Theory.* 48(2): 359–383. ISSN: 0018-9448. DOI: 10.1109/18.978730.