

Towards Dynamic and Safe Configuration Tuning for Cloud Databases

Xinyi Zhang*^{†‡}
Peking University & Alibaba Group
zhang_xinyi@pku.edu.cn

Hong Wu[†]
Alibaba Group
hong.wu@alibaba-inc.com

Yang Li*
Peking University
liyong.cs@pku.edu.cn

Jian Tan[†]
Alibaba Group
j.tan@alibaba-inc.com

Feifei Li[†]
Alibaba Group
lifeifei@alibaba-inc.com

Bin Cui*^{‡§}
Peking University
bin.cui@pku.edu.cn

ABSTRACT

Configuration knobs of database systems are essential to achieve high throughput and low latency. Recently, automatic tuning systems using machine learning methods (ML) have shown to find better configurations compared to experienced database administrators (DBAs). However, there are still gaps to apply the existing systems in production environments, especially in the cloud. First, they conduct tuning for a given workload within a limited time window and ignore the dynamicity of workloads and data. Second, they rely on a copied instance and do not consider the availability of the database when sampling configurations, making the tuning expensive, delayed, and unsafe. To fill these gaps, we propose ONLINETUNE, which tunes the online databases safely in changing cloud environments. To accommodate the dynamicity, ONLINETUNE embeds the environmental factors as context feature and adopts contextual Bayesian Optimization with context space partition to optimize the database adaptively and scalably. To pursue safety during tuning, we leverage the black-box and the white-box knowledge to evaluate the safety of configurations and propose a safe exploration strategy via subspace adaptation. We conduct evaluations on dynamic workloads from benchmarks and real-world workloads. Compared with the state-of-the-art methods, ONLINETUNE achieves 14.4%~165.3% improvement on cumulative performance while reducing 91.0%~99.5% unsafe configuration recommendations.

CCS CONCEPTS

• **Information systems** → **Autonomous database administration**; • **Computing methodologies** → **Machine learning**.

*School of CS & Key Laboratory of High Confidence Software Technologies, Peking University

[†]Database and Storage Laboratory, Damo Academy, Alibaba Group

[‡]Center for Data Science, Peking University & National Engineering Laboratory for Big Data Analysis and Applications

[§]Institute of Computational Social Science, Peking University (Qingdao)

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

SIGMOD '22, June 12–17, 2022, Philadelphia, PA, USA

© 2022 Association for Computing Machinery.

ACM ISBN 978-1-4503-9249-5/22/06...\$15.00

<https://doi.org/10.1145/3514221.3526176>

KEYWORDS

online tuning; cloud database; availability

ACM Reference Format:

Xinyi Zhang, Hong Wu, Yang Li, Jian Tan, Feifei Li, and Bin Cui. 2022. Towards Dynamic and Safe Configuration Tuning for Cloud Databases. In *Proceedings of the 2022 International Conference on Management of Data (SIGMOD '22)*, June 12–17, 2022, Philadelphia, PA, USA. ACM, New York, NY, USA, 17 pages. <https://doi.org/10.1145/3514221.3526176>

1 INTRODUCTION

Modern database management systems (DBMS) have dozens of configurable knobs that control the runtime behaviors [15] and impact database performance such as throughput and latency. Finding an optimal configuration for a given workload is proven to be an NP-hard problem [57] and it is impossible to enumerate and evaluate all the combinations. To find promising configurations, database administrators (DBAs) put considerable effort into tuning the configurations based on their experience. In addition, the workloads from real-world applications are *dynamic*, which means the properties of the workloads vary over time. Figure 1 (a) shows a dynamic workload trace from a real-world application. Similarly, the underlying data size and distribution constantly change due to the data modification operations. In Figure 1 (b), the size of underlying data increases almost three times after running TPC-C workload for 33 hours. The *dynamicity* of the environment makes configuration tuning more difficult.

Many recent studies focus on automatic configuration tuning for DBMSs using Machine Learning (ML) techniques, including Gaussian Process Regression from OtterTune[6], and Deep Deterministic Policy Gradient from CDBTune [73] and QTune [41]. These ML-based tuning systems can efficiently sample more promising configurations than DBAs; that is, they could find near-to-optimal configurations with fewer trials. They utilize ML models to suggest promising configurations and update the models by evaluating the configurations iteratively. To achieve this, they first need to copy the target DBMS instance to either replay or forward the workload. In each iteration, the tuner suggests a configuration and applies it to the copied DBMS. Then, the workload is executed to evaluate the performance metrics of the suggested configuration, and the model is updated based on the evaluation. This process repeats until the models converge or stop conditions are met (e.g., budget limits).

Unfortunately, there are several major problems when deploying these systems in production, especially in the cloud. All the existing

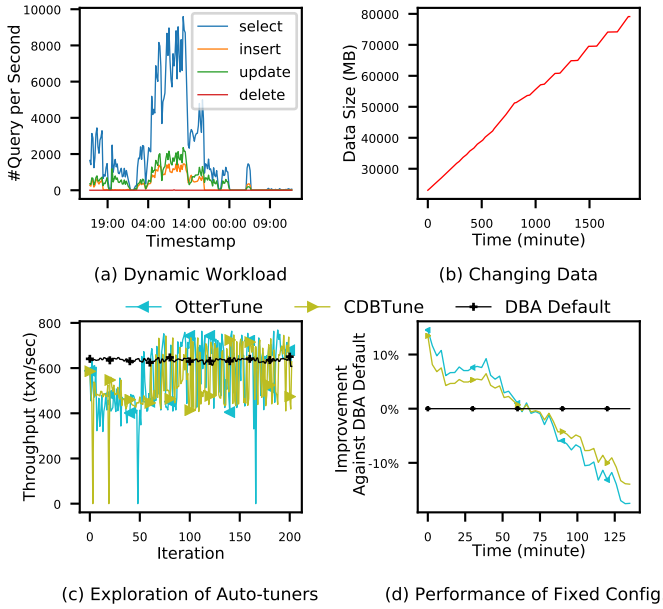


Figure 1: Motivating Examples: Figures (a) and (b) show the dynamic environment in the cloud. Figures (c) and (d) show the performance of existing auto-tuners. In (c), the tuners tune a static workload with numerous unsafe trials. In (d), we apply the best configurations found in (c) to a dynamic workload and observe decreasing improvement.

systems fall into *offline tuning* systems since the tuning process runs in a copied instance using a workload trace within a certain period. On the one hand, they only consider part of the workload, assuming the workload pattern never shifts too far. The tuning process usually takes hours or days to find near-to-optimal configurations. Consequently, the offline methods can not adapt to the dynamic workload from real-world applications. On the other hand, these systems rely on a copied instance and require the infrastructure to replay the workloads [69]. For the consideration of data privacy, the copied instance should be launched in the users’ environment (e.g., Virtual Private Cloud). Every time end-users want to tune the configurations, they should purchase a copied instance and prepare the workload and data based on a snapshot. This cloning process is time-consuming makes the tuning task expensive and delayed. The Total Cost of Ownership (TCO) is increased for end-users, which is an important factor in the cloud.

To fill the above gaps, it is desirable to design a configuration tuning system coordinating with the online database to adapt to the workload changes directly and conveniently. Tuning configuration knobs for an online database does not need to copy the instance, so the TCO issue is directly solved. However, the online tuning system should address the following challenges. First, high availability is essential to online databases, and it is not allowed to sample bad configurations during tuning, causing the performance downgrade. However, it is inevitable for existing approaches to sample bad configurations. Figure 1 (c) shows the process of existing automatic configuration tuning systems tuning the TPC-C workload in a MySQL instance. OtterTune utilizes Bayesian Optimization to

suggest promising configurations by balancing exploration and exploitation, and CDBTune adopts reinforcement learning to learn the tuning policy via trials-and-error. They could find near-to-optimal configurations. However, 50%~70% of their recommended configurations are worse than the default. The tuning even causes two system hangings by configuring the total memory (e.g., buffer pool, insert buffer, sort buffer, etc.) larger than the machine’s physical capacity. Such harmful recommendations would expose enormous risks to online databases. Second, the dynamic environment in the cloud should be considered, and we can not directly leverage the offline tuning approaches. Figure 1 (d) shows the performance of applying the best configurations obtained from the tuning processes in Figure 1 (c) to a dynamic workload (changing the transaction weight gradually from the original TPC-C workload). We observe that the applied configurations have better performance at the beginning. However, the configurations recommended by the offline tuning systems mismatch the dynamic workload afterward. They become worse than the default after 75 minutes. From these perspectives, the online database tuning should fulfill the following desiderata:

Dynamicty: The tuner is capable of responding to the dynamic environment (e.g., workload and its underlying data) adaptively.
Safety: The tuner should recommend configurations that do not downgrade the database performance during the tuning process.

In this paper, we propose ONLINE-TUNE, an online tuning system that tunes the databases safely and adaptively in the constantly changing cloud environment. For **dynamicty**, we formulate the online tuning problem into a contextual bandit problem. ONLINE-TUNE featurizes the context and optimizes the database performance over a context-configuration joint space. We propose a clustering and model section strategy to scale up ONLINE-TUNE with accumulated observations. ONLINE-TUNE clusters the observations, fit multiple models, and selects the appreciate one for a given context. For **safety**, ONLINE-TUNE safely explores the configuration space. It evaluates the safety of configurations by leveraging both the black-box knowledge (i.e., posterior estimate from the model) and white-box knowledge (i.e., heuristics-based rules from the domain experience). Since satisfying the safety constraint in the continuous and high-dimension space is non-trivial [34], we transform the high-dimension optimization problem into a sequence of subspace problems that can be solved efficiently. Each model maintains a configuration subspace centered around the best configuration found so far. ONLINE-TUNE starts from configurations similar to those known to be safe and expands the subspace to facilitate further explorations. Specifically, we make the following contributions:

- To address the challenges in real DBMS scenarios with the dynamic workload, we define the online tuning problem and solve it as a contextual bandit problem with safety constraints. To the best of our knowledge, ONLINE-TUNE is the first online configuration tuning system for DBMS with safety consideration.
- We propose a context featurization model that extracts features of workloads and underlying data. Using this, ONLINE-TUNE adopts the contextual Bayesian optimization technique to optimize the database adaptively with constantly changing environments.
- To enhance the scalability of ONLINE-TUNE with extensive data in the cloud, we propose a clustering and model selection strategy that significantly decreases the computation complexity.

- To solve the safety issue, we combine the black-box and the white-box knowledge to evaluate the safety of configurations and propose a safe exploration strategy via subspace adaptation, largely reducing the risks of applying harmful configurations.
- We implement the proposed method and evaluate on dynamic workloads from benchmarks and the real-world application. Compared with the state-of-the-art techniques, ONLINETUNE achieves 14.4%~165.3% improvement on cumulative improvement while decreasing 91.0%~99.5% unsafe recommendations.

The remainder of the paper is organized as follows. We review the related works in Section 2 and formally define the online tuning problem in Section 3. A system overview of ONLINETUNE is presented in Section 4, followed by a description of our techniques for contextual performance modeling in Section 5, safe configuration recommendation in Section 6. Section 7 presents our experimental evaluation. Finally, we conclude in Section 8.

2 RELATED WORK

Configuration Tuning. There has been an active area of research on tuning configurations of DBMS, which can be summarized as:

- **Rule-based.** Rule-based methods recommend configurations using heuristic rules. Database vendors develop tuning tools to provide DBA with knobs recommendations through identifying database’s bottlenecks due to misconfigurations [12] or asking the DBA questions about their application [67]. Wei et al. propose to generate fuzzy rules for database tuning [66]. BestConfig [75] searches configurations based on several heuristics. Rule-based methods strongly depend on the assumptions of their heuristics and fail to utilize knowledge gained from previous tuning efforts.
- **Learning-based.** iTuned [15], Ottertune [6] and ResTune [74] use Bayesian Optimization (BO) based method, modeling the tuning as a black-box optimization problem. Reinforcement Learning (RL) is adopted in [41, 73] to tune DBMS by learning a neural network between the internal metrics and the configurations. In the field of data analytic systems, ReIM [37] studies the problem of tuning the memory allocation and develops an empirically-driven algorithm. And Tuneful [18, 19] combines incremental Sensitivity Analysis and BO to prone configuration space. Although RL methods can adapt to workloads by fine-tuning its neural network, additional time and evaluation samples are needed. All the above methods train a machine learning model to learn the offline tuning policy and cannot promptly respond to the dynamic environment. Besides, they do not consider the safety constraints when interacting with the database, which restricts them from being deployed in production.

Query Featurizing. Query featurizing aims at translating plain SQLs into their vectorized representations. We summarize it into SQL text parsing and logical plan parsing based on the input. SQL text parsing directly processes the query texts. TF-IDF is used to represent a query as a collection of the weighted frequencies of its individual word tokens [45, 74]. However, its unbounded vocabulary makes generalization across workloads difficult. Therefore ResTune restricts its calculation to reserved SQL keywords [74]. To support larger vocabulary, [30, 76] resort to representation learning which is frequently used in NLP. Representation learning produces dense vectors capturing nuanced relationships of unstructured data. They

use deep models, e.g., LSTM or CNN, to learn the distributional embeddings. Logical plan parsing parses a query plan to aggregate key features, including the cost or categories of operators, scanned tables, and predicates. It has been adopted by many state-of-the-art works in the field of query-performance prediction or cardinality estimation [4, 5, 23, 33, 38, 47, 51, 58]. QTune encodes query type, involved tables, query operators and the corresponding costs to predict the internal metrics of a database [41].

Bayesian Optimization. Our algorithm falls under the general umbrella of Bayesian optimization (BO). It learns and optimizes a black-box function over configuration space [54]. BO works iteratively: (1) updating the surrogate model that describes the relationship between configurations and their performances and (2) choosing the next configuration to evaluate by computing the acquisition function value. The acquisition function measures the utility of candidate points for the next evaluation by trading off the exploration of uncertain areas and exploiting promising regions.

BO has been extensively used in many scenarios, including hyperparameter tuning [9, 14, 31, 42, 68], experimental design [22] and controller tuning [11, 20, 21, 46]. Contextual BO considers the environmental conditions by augmenting the GP kernel with extra context variables and uses $CGP - UCB$ to select promising action [35]. DBA Bandit [52] chooses a set of indices from finite and discrete configuration space based on the context of indexed columns and derived statistics from database optimizer. It achieves an $\tilde{O}(\sqrt{n})$ regret bound after playing n rounds as a safety guarantee, implying that the per-step average cumulative regret approaches zero after sufficiently many steps. However, guaranteeing the safety of every step is still challenging but vital for mission-critical applications. Recently, Constrained BO is proposed to optimize a black-box function with unknown constraint [24, 25, 40]. But the constraint is not considered safety-critical, and the algorithm is allowed to evaluate unsafe parameters. The main instance of safe optimization is SAFEOPT algorithm [56]. However, its formulation relies on a discretization of configuration space, which hinders high-dimensional applications. Meanwhile, scaling up BO with high dimensions is another active area. Recent works propose local modeling [16, 34, 64, 64] and space partitioning [49, 65], which achieve strong empirical results in high dimensional problems. Motivated by the advances, ONLINETUNE refines a configuration *subspace* that can be discretized efficiently.

3 PROBLEM STATEMENT

Consider a database system with a continuous configuration space $\Theta = \Theta_1 \times \Theta_2 \times \dots \times \Theta_m$ and a context space C . The context $c \in C$ is uncontrollable environmental conditions, e.g., dynamic workloads. We denote the database performance metrics as f , which can be any chosen metric to be optimized, such as *throughput*, *99th percentile latency*, etc. Given a configuration θ and context c , the corresponding performance $f(\theta, c)$ can be observed only after evaluation.

As we discussed, the online tuner should satisfy two requirements: **dynamicity** and **safety**. The **dynamicity** requirement means the tuner should consider changing environmental conditions (context) when recommending the configurations. We formalize it as a contextual bandit problem [35], where at each iteration t , the tuner receives context c_t and outputs a configuration θ_t to

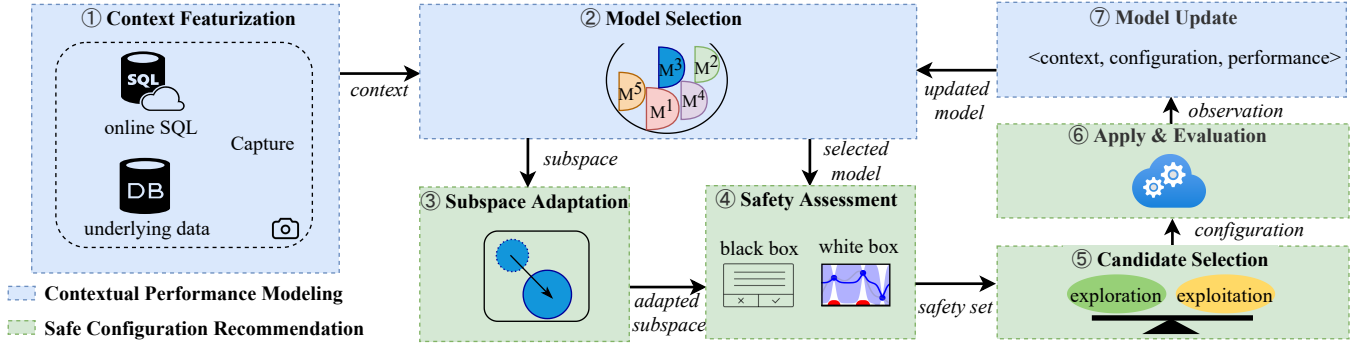


Figure 2: ONLINE TUNE Workflow.

maximize the payoff (i.e., database performance f). The **safety** requirement indicates that we additionally need to ensure that, for each tuning iteration t , $f_t \geq \tau$ holds, where $f_t = f(\theta_t, c_t)$ and $\tau \in \mathbb{R}$ is a specific safety threshold. We define the configurations that satisfy the above condition to be *safe*. The safety threshold indicates the degree of risk end-users can tolerate when adopting the tuning approach. As the database is a mission-critical system, the service level agreement must be guaranteed by the cloud providers under the vendor default configuration [60, 62]. Intuitively, the safety threshold is set to the database performance under the default configuration (denoted as default performance). In case the default performance fluctuates with workload changes, we assume that the default performance for any given workload can be acquired. Note in practice, the default performance can be easily obtained or predicted when a historical knowledge base is available (such as in [6, 18, 74]). For example, the user could train a regression model that inputs the context and outputs the default performance. Even without any previous knowledge, we can take some time to observe the default performance. At the very beginning, without any assumptions about f , searching the safe configurations is a nonsensical task. Hence, we also assume that, before the optimization, we are given an initial safety set that contains at least one safe configuration. Assuming that the objective is a maximization problem, the online tuning problem to solve for $c_t \in C$ is :

$$\begin{aligned} & \arg \max_{\theta_t \in \Theta} f(\theta_t, c_t), \\ & \text{subject to } f(\theta_t, c_t) \geq \tau. \end{aligned} \quad (1)$$

4 OVERVIEW OF ONLINETUNE

Workflow. To conduct online tuning, ONLINE TUNE first queries the default configuration and its performance to build an initial safety set. The safety threshold is set to the default performance, as discussed in Section 3. Then, ONLINE TUNE functions iteratively. It adapts to the dynamic environment by featurizing the context, recommending a promising configuration θ_t at the beginning of an iteration, and evaluating its performance during the iteration to update the model. The interval size (i.e., time for one iteration) controls the granularity of ONLINE TUNE’s adaptation to the dynamicity. Given a tuning time, ONLINE TUNE can collect more observations and make more fine-grained suggestions with a small interval size. We use a three-minute interval by default and conduct sensitivity

analysis in our experiments. Within one iteration, the workflow of ONLINE TUNE forms an iterative cycle, as presented by ①-⑦ in Figure 2. The workflow consists of two stages: contextual performance modeling and safe configuration recommendation.

Contextual performance modeling aims at obtaining a surrogate model that predicts the performance of given configurations in dynamic environments. The surrogate is a contextual Gaussian Process (GP) model fitted on historical observations (or the initial safety set, if no historical observations exist). ① ONLINE TUNE first captures the dynamic factors (e.g., workload and its underlying data) through context featurization, obtaining a context (see Section 5.1 for details). ② It then selects a contextual GP model fitted on the observations from the cluster with similar contexts. The clusters are periodically re-clustered in an offline manner (Section 5.3). ⑦ The construction of contextual GP is introduced in Section 5.2.

Safe configuration recommendation aims at selecting a safe and promising configuration from the configuration space. To avoid the aggressive exploration of BO, especially the over-exploration of boundaries, ONLINE TUNE reduces the optimization over the whole configuration space into a sequence of *subspace* optimization. All operations in this stage are restricted in the *subspace* where the safe optimization problem can be discretized and solved efficiently. In essence, the *subspace* is centered around the best configuration estimated so far, gradually moving towards the optimal. This stage inputs the selected surrogate model and its corresponding subspace. ③ For a newly fitted model, ONLINE TUNE initializes a subspace centered around the best-estimated configuration. Otherwise, ONLINE TUNE adapts the subspace according to the tuning history, e.g., expands the subspace when making consecutive successes (Section 6.1). ④ The adapted subspace is discretized to build a candidate set. ONLINE TUNE assesses the safety of the candidates based on the model’s lower bound estimate, forming a safety set. It also consults the white box to dismiss unsafe configurations. In case the heuristic white box excludes the optimal configurations from the safety set, ONLINE TUNE relaxes inappropriate rules (Section 6.2.2). ⑤ ONLINE TUNE then selects a configuration from the safety set by either maximizing the acquisition function or exploring the safe boundaries of subspace. ⑥ Finally, ONLINE TUNE applies the configuration to the online database and evaluates its performance. **Architecture.** The main parts of ONLINE TUNE are deployed in a backend tuning cluster (ONLINE TUNE sever), while the context featurization module is deployed in the database instance for data

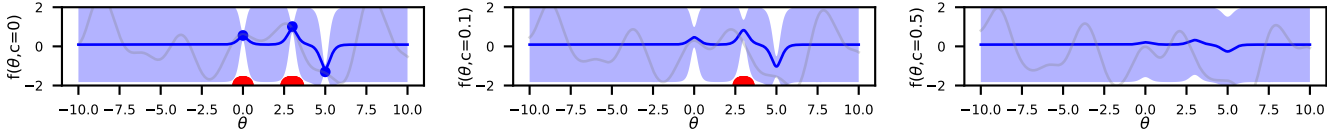


Figure 3: Generalization over Contexts: ONLINE TUNE has the three observations (blue points) under the context $c = 0$ (left) and fits a posterior distribution with mean (blue line) and confidence bound (light blue area). By exploiting correlations between different contexts, ONLINE TUNE can transfer knowledge of the objective function to a different context $c = 0.1$ (middle), but little knowledge to the distant context (right). The red label shows the estimated safety set with zero as the safety threshold.

privacy concerns. ONLINE TUNE server maintains a data repository that stores the historical observations from the previous tuning iterations, which can be initially empty. ONLINE TUNE server interacts with the database instance via a controller that monitors the tuning tasks’ states and transfers the data.

5 CONTEXTUAL PERFORMANCE MODELING

ONLINE TUNE responds to dynamic environments when tuning online DBMSs. It augments the GP kernel with context variables to learn the relationship between (context, configuration), and database performance. We first discuss how to featurize context and construct a contextual GP model. Then, we present a clustering and model selection strategy to enhance the model’s scalability.

5.1 Context Featurization

Context featurization aims to capture uncontrollable dynamic factors, which affects the relationship between configurations and database performances. When tuning the database, the workload and underlying data are constantly and continuously changing due to the upstream applications and the DML statements (e.g., insert, delete and update). ONLINE TUNE featurizes the two factors to adapt to the dynamicity.

5.1.1 Workload Featurization. We now illustrate how to featurize the changing workload. There are two dynamic aspects of workloads [43]: (1) *query arrival rate*: the number of arriving queries per second can fluctuate. (2) *query composition*: the types of queries may change, and the ratio of queries composition may vary.

Query arrival rate can be encoded by one dimension. For *query composition*, we need to translate the plain queries into vectorized representations. We adopt representation learning techniques [8] to extract informative encoding of queries and generalize across workloads. We choose LSTM, which have been used successfully for SQL query analysis [29, 30, 76]. We use a standard LSTM encoder-decoder network [59] to ease the burden of collecting labeling data. The final hidden state on the encoder network provides a dense encoding for the query. Lastly, we average the query encoding, obtaining the *queries composition* feature of a workload.

5.1.2 Underlying Data Featurization. Learning the distribution of database data is a non-trivial task [26, 70, 71]. Based on the observation that only the data changes affecting the workload queries are related to the tuning policy, we use the following features from the DBMS optimizer: (1) estimate of rows to be examined by queries, (2) the percentage of rows filtered by table conditions in queries,

(3) whether an index is used. The first two features are queries’ cardinality estimation, capturing the effective changes in data size and distribution. The last feature indicates the index building/dropping operation. We average the three features of queries, obtaining the underlying data feature of a workload.

Finally, we concatenate the workload feature and underlying data feature to obtain the final context features. Although query plans can provide extra information about the query execution, e.g., operators and costs, we do not encode them as contexts. This is because the extra information is affected by ONLINE TUNE’s previous configuration, which is unsuitable as a context for future tuning. In addition, modern DBMSs have hundreds of plan operators [44], encoding the plan operators could cause the “dimensionality issue” when augmenting the sparse and high-dimensional variables to GP kernel. Other dynamic factors could affect database performance, such as hardware configuration, data partition change, user-invoke configurations, etc. Their changes usually occur intermittently. ONLINE TUNE can re-initialize a tuning task when the changes occur or encode these factors. For example, ONLINE TUNE can encode hardware configuration (e.g., memory size, #CPU) to support hardware updates. Database anomalies (e.g., out of disk space and cybercriminal attack) are out of ONLINE TUNE’s scope.

5.2 Performance Modeling with Contexts

A performance model estimates the performance metrics given context and potential configurations. We adopt the contextual GP as the performance model, which extends the GP to support dynamic environments. GP is a popular surrogate model for objective modeling in Bayesian Optimization [28] due to its expressiveness and well-calibrated uncertainty estimates. GP provides confidence bounds on its predictions to model the objective function with limited samples. In such a scenario, other data-intensive techniques, e.g., deep learning [41, 73] may struggle with low data efficiency and interpretability [18]. In this section, we focus on learning the performance model and leave the phase of safe tuning in Section 6.

We aim to learn a performance model for different but correlated contexts. In the learning phase, we construct the probability distribution $p(f|\theta, c, H_t)$ of the target function $f = f(\theta, c)$ given an unspecified input θ , the observed context feature c and the observations $H_t = \{c_i, \theta_i, y_i\}_{i=1}^t$. The posterior distribution over f is a contextual GP with mean $\mu_t(\theta, c)$ and variance $\sigma_t^2(\theta, c)$:

$$\begin{aligned} \mu_t(\theta, c) &= k^T \left(K + \sigma^2 I \right)^{-1} y_{1:t}, \\ \sigma_t^2(\theta) &= k \left((\theta, c), (\theta, c) \right) - k^T \left(K + \sigma^2 I \right)^{-1} k, \end{aligned} \quad (2)$$

Algorithm 1: Offline Clustering

Input: $H_t = \{c_i, \theta_i, y_i\}_{i=1}^t$ **Output:** Multiple contextual GPs and a decision boundary

- 1 **if** *Need_ReLearn()* **then**
 - 2 Conduct DBSCAN on $\{c_i\}_1^t$ and get cluster labels $\{l_i\}_1^t$.
 - 3 Fit Contextual GP $p(f|c, \theta, H_t)$ for each clustering.
 - 4 Fit SVM model on $\{c_i, l_i\}_1^t$, obtaining decision boundary.
-

where $k = [k((\theta_1, c_1), (\theta, c)), \dots, k((\theta_t, c_t), (\theta, c))]^T$ and K is a covariance matrix whose (i, j) th entry is $K_{i,j} = k((\theta_i, c_i), (\theta_j, c_j))$. The kernel $k((\theta, c), (\theta', c'))$ should model the distances between points of configuration and context. Concretely, we construct an additive kernel $k_\Theta(\theta, \theta') + k_C(c, c')$. We use a linear kernel $k_C(c, c')$ to model the dependence on contexts and a Martin kernel $k_\Theta(\theta, \theta')$ to model the nonlinear performance on configurations. Intuitively, such design could model overall trends according to the context, and the configuration-specific deviation from this trend [35].

The composite kernel implies that function values are correlated when configurations and contexts are similar [10]. We expect the same configuration across correlated contexts to have similar performance predictions. The correlations between contexts can significantly speed up the tuning. Figure 3 shows a simple scenario with a one-dimension context feature and a one-dimension configuration. Even though the algorithm has only explored the configuration space at the first context ($z = 0$, left figure), the correlation between the functions generalizes information to the unobserved context ($z = 0.1$, central figure). The knowledge transfer improves data efficiency and reduces the number of required evaluations.

5.3 Clustering and Model Selection

The contextual GP can model the database performance in dynamic environments. However, it has $O(n^3)$ complexity with n observations. The cubical computation complexity limits the applicability with increasing observations in the cloud. To tackle this problem, we propose a clustering and model selection strategy based on the similarity of context features. The observations are clustered, and the number of observations in each cluster can be bounded under a constant number P . ONLINETUNE fits multiple contextual GPs based on the clusters and learns a decision boundary for model selection. Therefore the complexity is bounded by $O(P^3)$, which makes ONLINETUNE can scale with increasing observations.

Algorithm 1 presents the procedure. We first perform the DBSCAN clustering algorithm [17] based on context features $\{c_i\}_1^t$, obtaining a cluster label l_i for each c_i (Line 2), as shown in Figure 4 (a). For each cluster, ONLINETUNE fits a contextual GP model using its observations (Line 3). To select a model for unseen contexts, ONLINETUNE uses SVM to learn a non-linear decision boundary (Line 4, as shown in Figure 4 (b)). We choose SVM for its simplicity, ease of training, and the need for fewer samples to generalize well in practices [63]. Besides improving scalability, such clustering excludes the observations with distant contexts from the training set for the GP model, preventing the “negative transfer” [36].

Augmented observations are classified into a cluster based on their context and the learned boundary. However, the distribution




Figure 4: Clustering and Model Selection: Each point denotes a sample and the learned boundary splits the context space.

of context features may shift as more observations are collected, and the previous clustering and boundary need to be re-learned periodically. ONLINETUNE maintains the existing clustering and a simulated new clustering to determine whether to re-learn or not (Line 1). The difference between the two kinds of clusterings indicates context shifts. We use a mutual information-based score (MI) to quantify the difference. MIs close to zero indicate two vastly dissimilar clusterings, while MIs close to one indicates the opposite. When the MI score is smaller than a threshold (we set 0.5 in the experiments), the re-clustering is triggered, and the boundary and models are updated based on the revised clusters (Line 2–4).

6 SAFE CONFIGURATION RECOMMENDATION

ONLINETUNE aims to optimize the database performance while ensuring safety throughout the tuning process. Instead of optimizing the performance function over the global configuration space, ONLINETUNE restricts its optimization in a subspace and gradually expands it towards the optimum. The subspace restriction enables a fine discretization to generalize safety and mitigates the over-exploring nature of BO. This section introduces how ONLINETUNE adapts the subspace, forms a safety set within the subspace, and selects a safe and promising configuration.

6.1 Subspace Adaptation

To expand towards the global optimum, the configuration subspace is adjusted iteratively and alternated between hypercube and line regions, as shown in Algorithm 2.

The hypercube region $\{\theta \mid \|\theta - \theta_{best}\|_2 \leq R_n\} \cap \Theta$ is defined with a region center θ_{best} and a radius R_n . The region center θ_{best} is set to the best configuration observed so far. The radius R_n controls the optimization space. If R_n is large enough for the hypercube region to contain the whole configuration space, this will be equivalent to running standard global BO, while a small R_n may slow down the exploration. At initialization, R_n is set to a base value (e.g., 5% ranges of each dimension). It is typical behavior to shrink R_n after consecutive “failures” and expand it after consecutive “successes” [50]. We define a “success” as recommending a configuration better than the previous one and a “failure” as a recommendation that does not. The details about adjusting R_n is illustrated in Line 4–7.

The line region is a one-dimensional affine subspace $\{\theta_{best} + \alpha d : \alpha \in \mathbb{R}\} \cap \Theta$, defined with the offset θ_{best} and a direction $d \in \mathbb{R}^m$. It is proved that the optimization with line regions can converge globally [34]. The direction of the line region determines the trace of optimization. We implement two strategies to generate the directions: random direction (increasing the exploration) and important direction (aligned with the important configuration knob, increasing exploitation). Appendix contains the details.

Algorithm 2: Subspace Adaptation

Input: Current subspace Θ_n , Current best config. θ_{best} ,
Success counter Y_{succ} , Failure counter Y_{fail}
Parameters: Consecutive success threshold η_{succ} ,
Consecutive failure threshold η_{fail}
Output: Adapted configuration subspace

```
1 if  $\Theta_n$  is None then
2    $\Theta_n = \{\theta \mid \|\theta - \theta_{best}\|_2 \leq R_n\} \cap \Theta$ .
3 if  $\Theta_n$  is hypercube region then
4   if  $Y_{succ} > \eta_{succ}$  then
5      $R_n = \min(R_{max}, 2R_n)$ ,  $Y_{succ} = 0$ ,  $Y_{fail} = 0$ .
6   if  $Y_{fail} > \eta_{fail}$  then
7      $R_n = R_n/2$ ,  $Y_{fail} = 0$ ,  $Y_{succ} = 0$ .
8   if Switching_Rule() then
9      $d = \text{generate\_direction}()$ .
10     $\Theta_n = \{\theta_{best} + \alpha d : \alpha \in \mathbb{R}\} \cap \Theta$ .
11 if  $\Theta_n$  is line region then
12   if Switching_Rule() then
13      $\Theta_n = \{\theta \mid \|\theta - \theta_{best}\|_2 \leq R_n\} \cap \Theta$ .
14 return  $\Theta_n$ .
```

The subspace is first initialized as a hypercube region to restrict the optimization near the initial safety set (Lines 1–2). The hypercube region encourages optimization densely in the interior but may lead to an over-exploitation, even getting trapped in a local optimum [61]. ONLINETUNE switches to line region to control the trade-off between exploitation and safe exploration (Lines 3–13). The alternation is triggered by a switching rule (Lines 8 and 12): when no unevaluated safe configuration exists in Θ_m or a certain number of consecutive failures to recommend better configurations, ONLINETUNE switches to another type of subspace. The update of θ_{best} moves the subspace towards the optimum.

6.2 Safety Assessment

ONLINETUNE discretizes the adapted subspace to build a candidate set. Then the safety of each candidate is assessed based on the confidence bounds of the contextual GP (black-box knowledge) and the existing domain knowledge (white-box knowledge).

6.2.1 Black-Box Knowledge. Given context c , ONLINETUNE utilizes the confidence bounds of the selected contextual GP model m^n to access the safety of θ :

$$\begin{aligned} l_n(\theta, c) &= \mu_n(\theta, c) - \beta\sigma_n(\theta, c), \\ u_n(\theta, c) &= \mu_n(\theta, c) + \beta\sigma_n(\theta, c), \end{aligned} \quad (3)$$

where l_n and u_n are the lower and upper bound predictions, with μ_n and σ_n from Equation 2. The parameter β controls the tightness of the confidence bounds, and we set its value following the study of Srinivas et al. [55]. The true function value f falls into the confidence interval $[l_n(\theta, c), u_n(\theta, c)]$ with a high probability. We can determine safe configurations with $l_n(\theta, c) > \tau$; that is, configurations with worst-case performance still above the safety threshold

τ . We restrict the performance modeling in a local subspace containing previously evaluated configurations, and the local modeling can be trusted more than global modeling. This is also the rationale behind the trust-region methods from stochastic optimization [72].

6.2.2 White-Box Knowledge. Although the relationship between configurations and database performances is complex. Domain knowledge does exist to dismiss bad configurations. For example, the total buffer size can not exceed the physical memory capacity of the deployed machine. Experienced DBA tunes the databases based on domain knowledge, and some database tuning tools also use heuristics to give tuning suggestions [3, 12, 66, 67]. Such white-box tuning provides intuitive suggestions and could serve as a warm starting and space pruning component for ML-based tuning. When forming the final safety set, ONLINETUNE consults the white box and dismisses the unsafe or unpromising configurations deviated from the white box’s suggestions. We implement ONLINETUNE’s white-box assistant using MySQLTuner [3]. MySQLTuner examines the DBMS metrics and uses static heuristics to suggest setting ranges for configurations. The ranges are generated based on rules (e.g., setting key buffer size larger than the total MyISAM indexes size or increasing the join buffer size if #joins without indexes per day is larger than 250). ONLINETUNE removes the configurations not satisfying the white box’s suggestions from its safety set. If the white box suggests a specific configuration instead of the ranges, ONLINETUNE filters the configurations far away from the suggested one. Other white-box tuning tools or hand-crafted rules can coexist with ONLINETUNE if they provide suggestions for ONLINETUNE’s tuning knobs. Instead of directly applying, their suggestions can be used as white-box assistants for ONLINETUNE.

However, the white box does not evolve according to the feedback, causing the trap in local optimum. The rules could even be inappropriate, excluding the optimal configurations from S_n . This happens only when the white-box rule rejects a configuration while the black-box algorithm recommends this configuration (i.e., decision conflict). To prevent this, ONLINETUNE uses a relaxation strategy to relax inappropriate rules. ONLINETUNE maintains a conflict counter and a conflict-safe counter for each rule. When the decision conflict happens several times, reaching a threshold, ONLINETUNE will ignore the rule and recommend the controversial configuration. Note that only one rule can be ignored in the recommendation to control the interdependence between different rules. After evaluation, if the configuration is safe, the conflict-safe counter will increase by one. When a rule’s conflict-safe counter reaches a threshold, the rule will be relaxed (e.g., the configuration range given by the rule is enlarged). The thresholds for each white-box rule can be set differently according to its credibility. A larger threshold leads to more trust in the white-box rule.

6.3 Candidate Selection

After the safety set is generated, ONLINETUNE selects a configuration from the candidates in the safety set. Like all the black-box optimization, the selection should trade-off between two objectives: (1) exploitation, trying to localize the high-performance regions within the current safety set, (2) exploration, acquiring new knowledge, and trying to expand the current estimate of the safety set. We adopt Upper Confidence Bound (UCB) [55] constrained to the

safety set as a sampling criterion, shown in Equation 4:

$$\theta_{max} = \arg \max_{\theta \in S_n} \mu_n(\theta, c) + \beta \sigma_n(\theta, c). \quad (4)$$

UCB selects the configuration at locations where the upper bound of its confidence interval is maximal. Repeatedly evaluating the system performance at configurations given by UCB improves the mean estimate of the underlying function and decreases the uncertainty at candidate configurations for the maximum. The global maximum is provably found eventually [55].

To expand the safe subspace explicitly, ONLINETUNE also selects the safe configurations at the boundary of the safety set with the highest uncertainty since they are promising candidates for expanding the safety set. To unify the two sampling criteria, we adopt the epsilon-greedy policy [48], which selects the maximal UCB configuration with a probability of $1 - \epsilon$ and the boundary point with a possibility of ϵ .

7 EVALUATION

Outline: We first compare ONLINETUNE with the state-of-the-art database configuration tuning methods on dynamic environments in Section 7.1. The comparison is conducted under three settings: (1) *dynamic queries composition*, where the queries composition of the workload is constantly changing, (2) *transactional-analytical*, simulating a daily transactional-analytical workload cycle by alternating the execution of OLTP and OLAP workloads, and (3) *real-world workload*. In Section 7.1.4, we analyze the overhead of the compared methods. In Section 7.2, a case study is presented. In Section 7.3, we conduct ablation studies to evaluate the effectiveness of ONLINETUNE’s design, including the context space design and the safe exploration strategy. We also validate the robustness of ONLINETUNE on different initial safety sets and interval sizes. In addition, we evaluate the baselines under *static workload* setting to analyze the search efficiency in Section 7.4.

Baselines: The baselines are explained below:

- *DBA Default* is the configuration provided by experienced DBAs.
- *ONLINETUNE* is our safe and contextual tuner. We implement ONLINETUNE’s prediction model using GPy library [1].
- *BO* is a Bayesian Optimization approach, widely used in database configuration tuning [6, 7, 15, 32]. We use similar design with OtterTune [15]: Gaussian process as surrogate model and EI as acquisition function. We also implemented BO via GPy library.
- *DDPG* is a reinforcement learning agent which is used to tune the database configuration [73]. The agent inputs internal metrics of the DBMS and outputs proper configurations. The DDPG algorithm is implemented using PyTorch library [2] with its neural network architecture borrowed from CDBTune [73].
- *QTune* is a query-aware tuner that supports three tuning granularities [41]. We adopt its workload-level tuning. It embeds workload features to predict internal metrics via a pre-trained model, while CDBTune uses the measured internal metrics.
- *ResTune* adopts constrained Bayesian Optimization to minimize resource utilization with SLA constraints [74]. It uses an ensemble framework (i.e., RGPE) to transfer historical knowledge from observations of source workloads. We modify ResTune to maximize database performance with the same safety constraints as

ONLINETUNE. To adopt RGPE in online tuning, we cluster every 25 observations as one source workload.

- *MysqlTuner* is a MySQL tuning tool that examines DBMS metrics and uses static heuristics to suggest configurations [3]. It is also the white-box assistant that ONLINETUNE consults.

Workloads: We use three workloads with different characteristics from well-known benchmarks and a real-world workload. The three workloads are TPC-C, Twitter from OLTP-Bench [13] and JOB [39]. TPC-C is a traditional OLTP benchmark characterized by write-heavy transactions with complex relations. Twitter is extracted from web-based applications, characterized by heavily skewed many-to-many relationships and non-uniform access. JOB is an analytical workload with 113 multi-join queries, characterized by realistic and complex joins [39]. We load about 29 GB data for Twitter, 18 GB for TPC-C, 9 GB for JOB and use unlimited arrival rates for OLTP workloads to fully evaluate the benefits from tuning, as [6, 15, 32, 41, 73] did. The real-world workload comes from a database monitoring service. In our experiments, we use the workload from 10:00 to 16:00 on September 2nd, 2021. And the read-write ratio per minute varies from 3:1 ~74:1 in this period.

Setup: We use version 5.7 of RDS MySQL. We tune 40 dynamic configuration knobs without restarting the database since the restart is not acceptable for online databases. The 40 configuration knobs are chosen based on their importance by DBAs. The experiments run on a cloud instance with 8 vCPU and 16GB RAM. The interval size is set to 3 minutes. We use the DBA default configuration as the initial safety set and its performance as the safety threshold, which are also added to the training set of other baselines for fairness.

Metrics: We evaluate the baselines from two perspectives: safety and cumulative performance during tuning. For safety, we count the number of unsafe configuration recommendations (#Unsafe) and the number of system failures (#Failure) within the tuning period. For the cumulative performance, it is measured by the number of transactions (#txn) processed by the database during tuning for OLTP workload and the sum of execution time for OLAP workload.

7.1 Evaluation on Dynamic Workload

We evaluate the baselines tuning online database with constructed dynamic workloads and real-workload workload with dynamic query arrival rates. We intend to answer two questions: (1) *Can they recommend the configuration adaptively with the dynamic workload?* (2) *Can they reliably respect the safety requirement?*

7.1.1 Evaluation on workloads with dynamic query compositions. To simulate the dynamicity, we construct workload with dynamic query compositions. For TPC-C and Twitter, we vary transaction weights via OLTP-Bench [13]. The weights are sampled from a normal distribution with a sine function of iterations as mean and a 10% standard deviation. For JOB, we execute ten queries per iteration, and five out of them are re-sampled. If the execution time exceeds the interval size, we kill the queries. Since TPC-C is a write-heavy workload, its underlying data is also changing (e.g., its data size change from 18 GB to 48 GB during tuning).

ONLINETUNE finds the workload-specific configuration. As shown in Figure 5, ONLINETUNE achieves 54.3% ~93.8% improvement on cumulative performance than the MySQL default, and

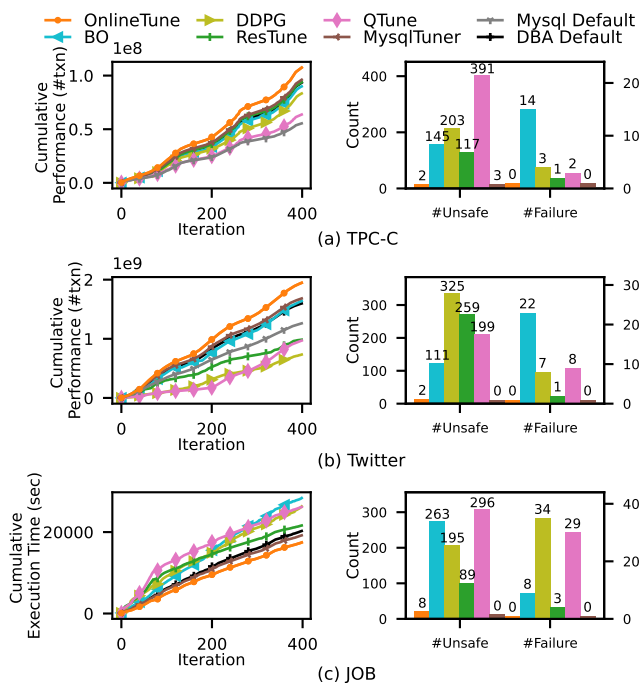


Figure 5: Cumulative performance (for TPC-C and Twitter, the higher is the better; for JOB, the lower is the better) and safety statistics when tuning dynamic workloads.

16.2% ~21.9% improvement than the DBA default. The DBA default is expected to have a relatively robust performance across workloads. ONLINE TUNE applies better configuration, illustrating its adaptability in dynamic environments. In addition, ONLINE TUNE achieves 14.4%~165.3% improvement on cumulative performance than existing offline approaches. The reasons are two-fold. First, the offline methods struggle to handle dynamic environments. BO uses observations $\{\theta_i, y_i\}_1^t$ to fit the GP model, ignoring dynamic environmental factors. When workload drifts, BO fails to learn suitable configurations. ResTune adopts an ensemble GP that assigns different weights to its base models but its base models still ignore the dynamic factors. DDPG and QTune fine-tune the models when environments change, but fine-tuning a neural network needs lots of training samples, which is inefficient for online tuning. Second, the offline methods over-explore configuration spaces. Evaluating unsafe configurations is a part of learning for offline methods. Although ResTune aims at finding the configurations satisfying the constraints, it still needs to evaluate and learn the unsafe area. Compared with the white-box method (MysqlTuner), ONLINE TUNE achieves 10.1%~19.7% improvement. Although MysqlTuner does not have the over-exploration issue, it relies on heuristic rules and traps in local optimum.

ONLINE TUNE reliably respects the safety requirement when tuning the online database. Recommending safe configurations is non-trivial when tuning online databases since the workload changes may cause the shifting of safe configurations. As shown in Figure 5, none of the system failures occur when applying ONLINE TUNE, while offline tuning methods cause several system failures.

The offline methods have 22.2% ~97.8% unsafe configuration recommendations within the 400 tuning intervals. Compared to them, ONLINE TUNE reduces 91.0%~99.5% unsafe recommendations. This is contributed to the safe exploration strategy of ONLINE TUNE, which we analyze in detail with an ablation study in Section 7.3.2.

7.1.2 Evaluation on Transactional-Analytical Cycle. We simulate a daily transactional-analytical workload cycle by alternating dynamic TPC-C and JOB workloads. We use 99% latency as the optimization objective. The workload characterization of TPC-C (OLTP, write-heavy) and JOB (OLAP, complex joins) are significantly different. Respecting safety constraints is rather tricky in such a scenario. Figure 6 (a) shows the performance of ONLINE TUNE and the DBA default. The workload starts as TPC-C and repeatedly alternates with JOB every 100 iterations. ONLINE TUNE gradually finds configurations better than the DBA default, as shown in the zoom-in plot. When switching to JOB, ONLINE TUNE takes some iterations to explore the configuration space. Meanwhile, several unsafe configurations with latency slightly larger than the safety threshold occur. Then, ONLINE TUNE finds suitable configuration adaptively (e.g., larger sort buffer size for JOB workload). When switching from TPC-C to JOB again, ONLINE TUNE selects the surrogate model fitted with previous observations for JOB and recommends suitable configurations more quickly. ONLINE TUNE achieves performance than the DBA default while respecting the safety requirement, while other approaches fail, as shown in Figure 7 (a).

7.1.3 Evaluation on Real-World Workload. We evaluate on a workload from the real-workload application. Figure 6 (b) shows the tuning process of ONLINE TUNE and Figure 7 (b) presents the performances of all the baselines. We observe that ONLINE TUNE achieves 39.4% improvement on cumulative improvement compared to the DBA default and 25.5% ~64.2% improvement compared to offline methods. Although ONLINE TUNE applies several unsafe configurations at the beginning, their performances are within 10% deviation of the default performance as shown in Figure 6 (b).

7.1.4 Algorithm Overhead. Figure 8 shows the computation time when tuning JOB workload. For BO, DDPG and ResTune, the computation time consists of (1) statistics collection, (2) model fitting, and (3) model probe. For ONLINE TUNE and QTune, the time also includes featurization. ONLINE TUNE’s computation time is slightly larger than BO at the beginning. However, BO’s overhead increases exponentially over tuning iteration, as GP suffers from cubic complexity on sample number. Instead, ONLINE TUNE’s computation time is within 3.79 seconds due to its clustering strategy.

In addition to the computation time, we also analyze the impact of ONLINE TUNE’s tuning overhead. ONLINE TUNE’s featurization module is deployed in the database instance, while the other parts are deployed in the backend tuning servers whose overhead does not influence the database instance. Therefore, we focus on the impact of featurization. This module takes about 57.7 ms per iteration on average. To measure its impact, we keep the configuration unchanged and compare the resource usages and database performance. We observe that the average CPU usage with featurization is 77.28%, and the one without featurization is 77.27%. The increase is negligible since the featurization time only accounts for a slight proportion of a tuning interval (180 s). Its impact on database performance

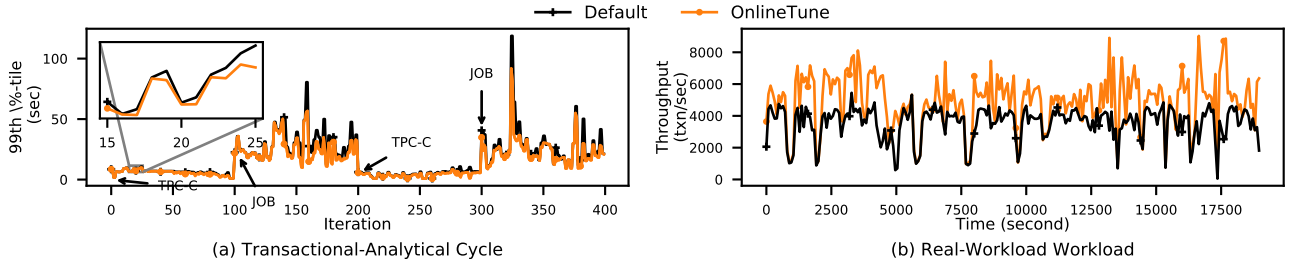


Figure 6: Iterative Performance on OLTP-OLAP circle and real-world workload.

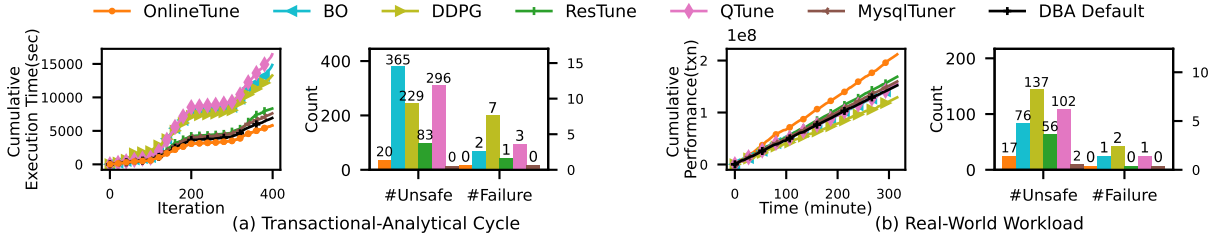


Figure 7: Cumulative performance and safety statistics on OLTP-OLAP circle and real-world workload.

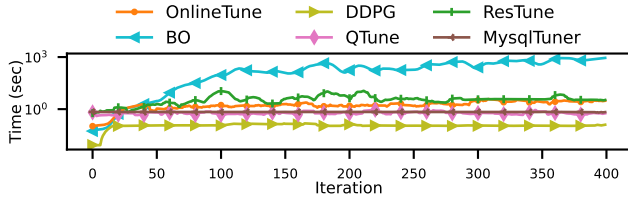


Figure 8: Computation time of different approaches.

can also be overlooked due to marginal resource consumption. For evaluation, we keep configurations unchanged to observe the impact. In practice, the database performance will be improved when running ONLINETUNE, as evaluated above.

7.2 Case Study

To further investigate ONLINETUNE’s tuning performance, we conduct a case study tuning five knobs. We construct a workload trace using YCSB with different read/write transaction compositions, as shown in Figure 9. The joint context-configuration space is smaller than the other experiments in the paper. Therefore, we can use extensive evaluations to explore the space and obtain the best configurations (denoted as the Best) and the unsafe areas for each workload composition. As shown in Figure 10, we observe that there are interactions between knobs. And, regular patterns exist among workload compositions, e.g., when buffer pool size (k_1) is large and heap table size (k_2) is small, the throughput is relatively low. However, the overall effects of knobs are quite different among the workloads, e.g., distinct optimal positions. Thus, it is necessary to consider the workload dynamicity when tuning online.

Figure 11 presents the tuning result, which aligns with the evaluation in Section 7.1. As shown in the iterative plot, the distances

between ONLINETUNE and the Best gradually decrease as ONLINETUNE safely finds configurations near the optimum. The iterative performances of the offline baselines have large fluctuations due to their trials and errors. In Figure 12, we focus on the configuration values of the top-2 important knobs. The unsafe region is approximated by excluding the knob’s values from all the safe configurations. Note that if a configuration is assigned with a knob value in the unsafe region, the configuration is unsafe, but not vice versa. This is due to knobs interaction may cause unsafe. We observe that the optimal configurations (the Best) are not portable across workloads. ONLINETUNE applies configurations adaptive to the dynamic workload, which safely proceeds towards the optimum. The other baselines explore the space aggressively in the first 50 iterations and always have a chance to explore the unsafe region.

Figure 13 visualizes the working process of ONLINETUNE’s modules. From the left figure, we make two observations. First, ONLINETUNE can select the corresponding model for the observed context. Second, the subspace is initially centered around the default configuration and moves towards the optimum. The configuration subspaces maintained by each model gradually move far from the default, safely exploring the configuration space. From the right figure, we observe that the size of safety set is updated with the augmented observations. If ONLINETUNE evaluates unsafe configuration, its safety estimation will be immediately tightened, and ONLINETUNE will recommend conservative configurations near the evaluated-best ones, avoiding successive regression.

7.3 Analysis of ONLINETUNE

We carefully design ONLINETUNE with contextual modeling and safe exploration strategy to explore configurations safely in dynamic environments. We evaluate the corresponding designs via ablation study and validate the robustness of ONLINETUNE.

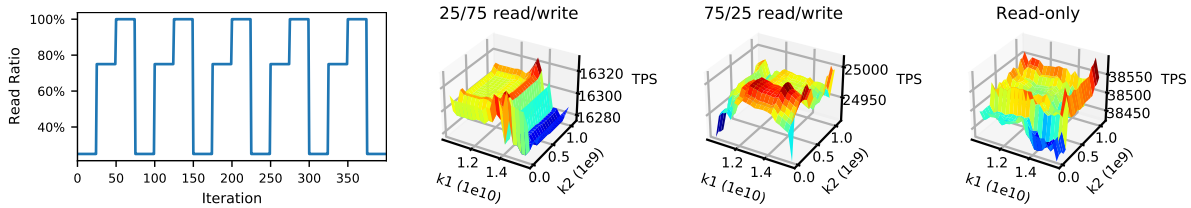


Figure 9: Pattern of YCSB workload. Figure 10: Throughput as a function of configurations: k1 denotes sort_buffer_pool_size and k2 denotes max_heap_table_size.

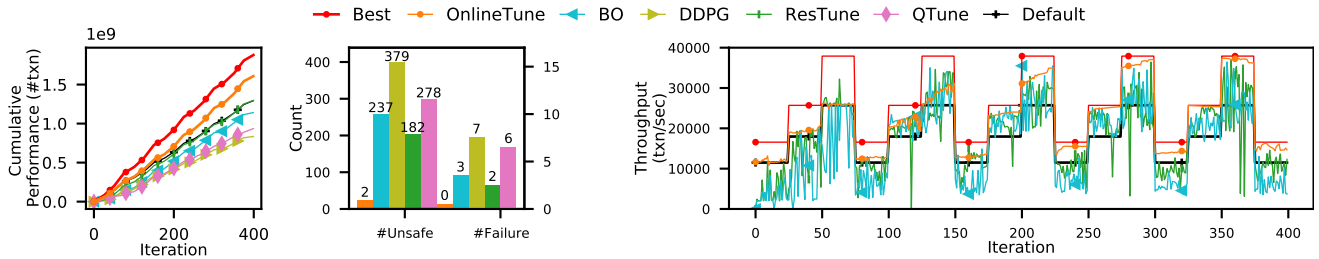


Figure 11: Results on YCSB workload: The left figure shows the cumulative result and the right shows the iterative performance. For clarity of presentation, we only show the iterative performances of the top 3 baselines (ONLINE TUNE, ResTune and BO).

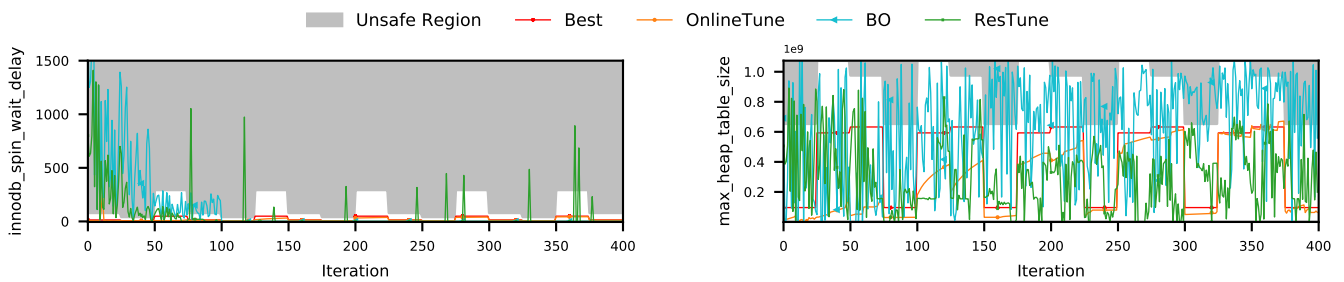


Figure 12: Configurations applied by ONLINE TUNE, ResTune and BO on YCSB workload: We present the top 2 important knobs.

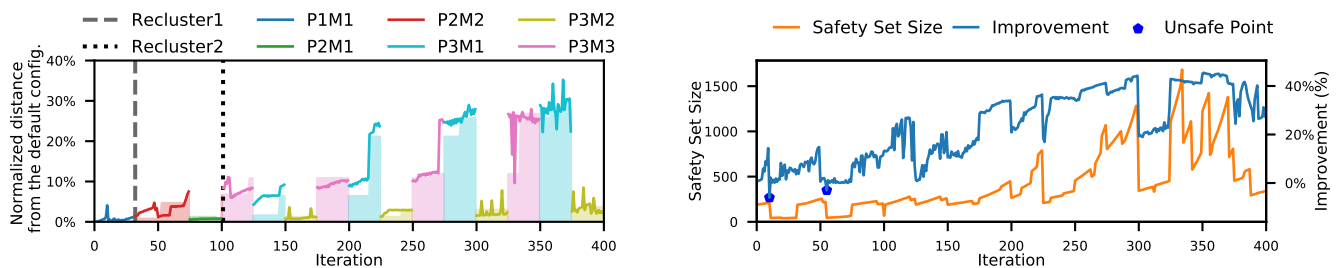


Figure 13: Visualization of ONLINE TUNE. In the left figure, different colors denote different models selected over iterations. The lines denote the distance between the recommended configuration and the default, and the dash denotes the distance between subspace centers and the default. The right figure presents the size of safety set estimated by ONLINE TUNE in its restricted subspace. For reference, we also plot the performance improvement over iterations.

7.3.1 Ablation Study on Contextual Modeling. We remove certain components of contextual modeling (featurization of workload and data changes, clustering, and model selection) in ONLINE TUNE to understand their contribution to the overall system. We compare

(1) ONLINE TUNE, (2) ONLINE TUNE-w/o-workload, removing workload feature from context, (3) ONLINE TUNE-w/o-data, removing optimizer statistics (underlying data feature) from context, (4) ONLINE TUNE-w/o-clustering, removing clustering and model selection

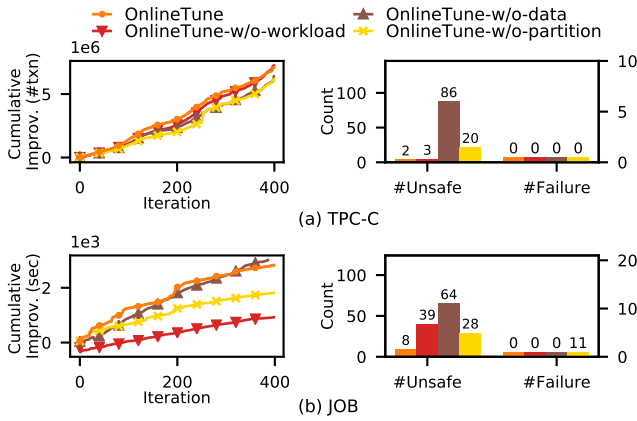


Figure 14: Ablation study on context space design.

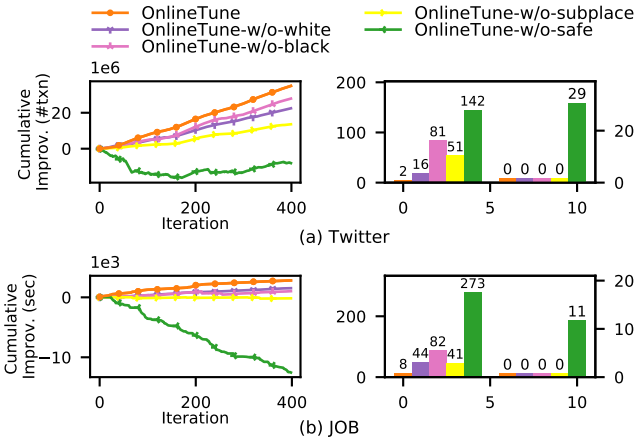


Figure 15: Ablation study on safe exploration.

design. The experiments are conducted in dynamic TPC-C and JOB with the same setting as in Section 7.1.1. Figure 14 shows the improvement in cumulative performance against the DBA default and safety statistic of those baselines. In the following evaluation, instead of cumulative performance, we use cumulative improvement that shows the benefit of online tuning more clearly. For the read-only workload JOB where no data changes occur, ONLINE-TUNE-w/o-data exceeds ONLINE-TUNE slightly because the dimension of context feature decreases with no information loss, which means that modeling over contexts becomes easier. However, when data change occurs as in TPC-C workload, ONLINE-TUNE outperforms the other baselines since its context feature gives a comprehensive abstraction of the dynamic environment. Since the clustering and model selection strategy can prevent “negative transfer”, ONLINE-TUNE outperforms ONLINE-TUNE-w/o-clustering in all the cases.

7.3.2 Ablation Study on Safe Exploration. To safely optimize the online database, ONLINE-TUNE utilizes contextual GP (black-box knowledge) and domain knowledge (white-box knowledge) and gradually expands the optimization subspace. To analyze their

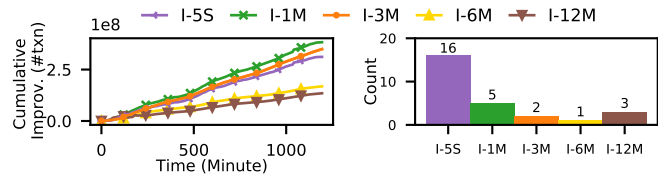


Figure 16: Tuning Twitter with different interval sizes.

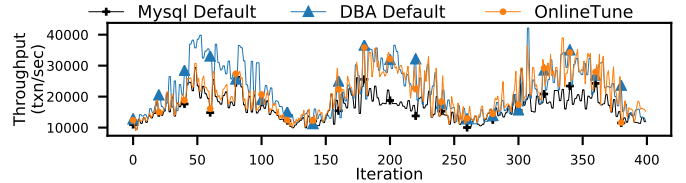


Figure 17: Starting from MySQL Default.

functionality, we compare: (1) ONLINE-TUNE, (2) ONLINE-TUNE-w/o-white, removing white-box safety assessment (3) ONLINE-TUNE-w/o-black, removing black-box safety assessment, (4) ONLINE-TUNE-w/o-subspace, optimizing in the whole configuration space, (5) ONLINE-TUNE-w/o-safe, removing all the safety strategy, i.e., vanilla contextual BO. As shown in Figure 15, ONLINE-TUNE beats other baselines in both performance and safety degree. We make the following observations: (1) The black-box knowledge largely reduces the unsafe recommendations. The limited domain rules only cover a small subset of unsafe cases and fail to capture the complex and high-dimension relationship between configuration, environment, and database performance. Therefore, ONLINE-TUNE-w/o-black’s unsafe recommendations are much more than ONLINE-TUNE-w/o-white’s. (2) The white-box knowledge assists in filtering the unsafe configurations. We find that the unsafe recommendation in ONLINE-TUNE-w/o-white is mainly caused by the knobs without intrinsic ordering, e.g., thread_concurrency. Thread_concurrency defines the maximum number of threads permitted inside InnoDB. But a value of 0 (the default value) is interpreted as infinite concurrency (no limit). The GP model depends on the natural ordering property and smoothness of space. When ONLINE-TUNE-w/o-white expands the safe space, it is likely to try a value near zero, like one, causing performance downgrade due to the lack of computing resources. ONLINE-TUNE has domain rules to filter the value of thread concurrency less than half of the number of virtual CPUs, preventing the unsafe case. (3) Optimizing over promising subspace instead of the whole configuration space can enhance safety and localize good configurations. ONLINE-TUNE-w/o-subspace recommends more unsafe configurations than ONLINE-TUNE. As discussed, it is hard to generalize the safety of configurations in the whole space, and the prediction of GP is more trustworthy in a small trust region. Besides, the global optimization approaches (i.e., ONLINE-TUNE-w/o-subspace, ONLINE-TUNE-w/o-safe) they over-explore boundaries of configuration spaces. (4) Without any safety designs, ONLINE-TUNE-w/o-safe has the worst performance.

7.3.3 Varying Interval Sizes. We run ONLINE-TUNE under different interval sizes: 5 seconds, 1 minute, 3 minutes, 6 minutes, and 12

Table 1: Statistics on static workloads: For each workload, bold face indicates the best value. Search Step denotes the iteration needed to find a configuration within 10% of the estimated optimum, \ denotes such configuration is not found.

Workload	ONLINE TUNE		BO		DDPG		ResTune		QTune		MySQLTuner	
	Max Improv.	Search Step	Max Improv.	Search Step	Max Improv.	Search Step	Max Improv.	Search Step	Max Improv.	Search Step	Max Improv.	Search Step
TPC-C	17.03%	176	19.99%	74	16.66%	76	12.03%	\	12.02%	\	13.44%	\
Twitter	48.18%	129	43.43%	158	35.79%	\	46.95%	10	8.06%	\	13.07%	\
JOB	11.67%	141	7.77%	\	7.60%	\	11.84%	155	11.24%	168	7.23%	\

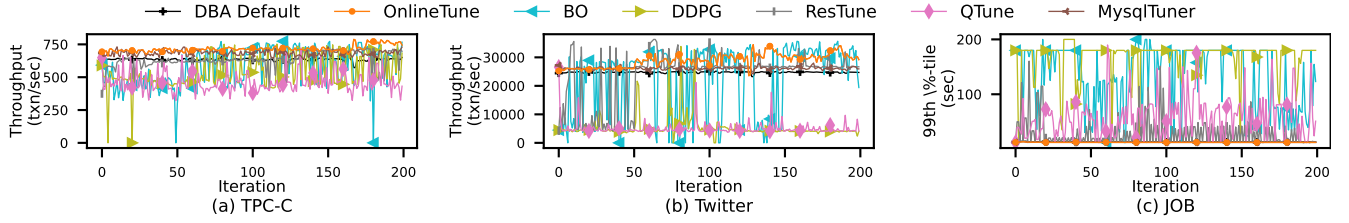


Figure 18: Iterative performance on static workloads: minimal throughput (0) and maximal latency (200) denote system failure.

minutes, as shown in Figure 16. Within a certain range, a smaller interval leads to quicker adaptation. The reason is two-fold. First, OnlineTune could recommend fine-grained configurations suitable for dynamic workloads. Second, ONLINE TUNE could collect more observations in a given time, leading to better tuning policies. However, the interval size also determines the time for evaluating the database performance. It cannot be too small to avoid the instability caused by performance fluctuation [7]. As shown, tuning with a 5-second interval performs worse than the 1-minute one with more unsafe recommendations. And we have observed significant performance variance for 5-second intervals on a fixed configuration.

7.3.4 Varying Initial Safety Set and Safety Threshold. In the above evaluation, we use the DBA default as the initial safety set and its performance as a safety threshold. However, there exists a question: *Can ONLINE TUNE recommend suitable configurations with an inferior starting point?* Therefore, we use the MySQL default configuration as the initial safety set and its performance as the safety threshold. As shown in Figure 17, the MySQL default’s performance is worse than the DBA default’s. One main difference is that the MySQL default sets the buffer pool size 128 MB while the DBA default sets the buffer pool size 13 GB. When starting from the MySQL default, ONLINE TUNE applies safe configurations better than the MySQL default. And it achieves a comparable performance to tuning with the DBA default as the starting point after about 150 iterations.

7.4 Evaluation on Static Workload

The existing approaches work well to search for optimal configurations on static workloads. This evaluation aims to assess the search efficiency of ONLINE TUNE with the safety constraints. Figure 18 presents the performance with statistics shown in Table 1.

ONLINE TUNE reduces the unsafe recommendations significantly with search efficiency comparable to the state-of-the-art offline tuning methods. Offline methods are designed to search for the optimum without safety considerations. In terms of efficiency, ONLINE TUNE is comparable to BO, ResTune, and better than DDPG, QTune in all the cases. ONLINE TUNE is very unlikely to apply unsafe configurations, while the offline methods violate

safety constraints considerably. Although ONLINE TUNE’s safety consideration may make the exploration slower, adaptively restricting the search space could localize good solutions, which improves the convergence, especially in JOB’s case.

8 CONCLUSION

We introduce ONLINE TUNE, an online tuning system that is aware of the dynamic environments and optimizes the database safely. ONLINE TUNE featurizes the dynamic environmental factors as context feature and leverages Contextual Bayesian Optimization to optimize the context-configuration joint space. We propose a safe exploration strategy, greatly enhancing the safety of online tuning. As future extensions, we plan to investigate combining ONLINE TUNE with offline tuning. The offline process could explore more configurations on replicas of the target DBMS, replaying the historical workloads to collect observations for online tuning. Therefore, ONLINE TUNE could exploit the promising configuration space in the online phase, thus responding to the dynamic environment more quickly. In addition, ONLINE TUNE could pause online configuring after applying suitable configurations. This could be achieved by a stopping and triggering mechanism. We could keep ONLINE TUNE’s workflow at each iteration (including context featurization and acquisition value calculation for candidate points) but not change the database configurations until more promising candidates appear. For example, we can measure whether more promising candidates exist by calculating the Expected Improvement (EI) value against the applied configuration. The configuring is triggered when candidates with EI values larger than a threshold exist, indicating that the context changes lead to the need for re-configuring.

ACKNOWLEDGMENTS

This work is supported by National Natural Science Foundation of China (NSFC)(No. 61832001), Alibaba Group through Alibaba Innovative Research Program and National Key Research, and the Beijing Academy of Artificial Intelligence. Bin Cui is the corresponding author.

REFERENCES

- [1] 2015. GPy Library. <https://sheffieldml.github.io/GPy>.
- [2] 2017. PyTorch Library. <https://pytorch.org>.
- [3] 2019. MySQL Tuning Primer Script. <https://github.com/major/MySQLTuner-perl>.
- [4] Mert Akdere, Ugur Cetintemel, Matteo Riondato, Eli Upfal, and Stanley B. Zdonik. 2011. The Case for Predictive Database Systems: Opportunities and Challenges. In *CIDR*. www.cidrdb.org, 167–174.
- [5] Mert Akdere, Ugur Cetintemel, Matteo Riondato, Eli Upfal, and Stanley B. Zdonik. 2012. Learning-based Query Performance Modeling and Prediction. In *ICDE*. IEEE Computer Society, 390–401.
- [6] Dana Van Aken, Andrew Pavlo, Geoffrey J. Gordon, and Bohan Zhang. 2017. Automatic Database Management System Tuning Through Large-scale Machine Learning. In *SIGMOD Conference*. ACM, 1009–1024.
- [7] Dana Van Aken, Dongsheng Yang, Sebastien Brillard, Ari Fiorino, Bohan Zhang, Christian Billian, and Andrew Pavlo. 2021. An Inquiry into Machine Learning-based Automatic Configuration Tuning Services on Real-World Database Management Systems. *Proc. VLDB Endow.* 14, 7 (2021), 1241–1253.
- [8] Yoshua Bengio, Aaron C. Courville, and Pascal Vincent. 2013. Representation Learning: A Review and New Perspectives. *IEEE Trans. Pattern Anal. Mach. Intell.* 35, 8 (2013), 1798–1828.
- [9] James Bergstra, Rémi Bardenet, Yoshua Bengio, and Balázs Kégl. 2011. Algorithms for Hyper-Parameter Optimization. In *NIPS*. 2546–2554.
- [10] Felix Berkenkamp, Andreas Krause, and Angela P. Schoellig. 2016. Bayesian Optimization with Safety Constraints: Safe and Automatic Parameter Tuning in Robotics. *CoRR* abs/1602.04450 (2016).
- [11] Roberto Calandra, André Seyfarth, Jan Peters, and Marc Peter Deisenroth. 2014. An experimental comparison of Bayesian optimization for bipedal locomotion. In *ICRA*. IEEE, 1951–1958.
- [12] Karl Dias, Mark Ramacher, Uri Shaft, Venkateshwaran Venkataramani, and Graham Wood. 2005. Automatic Performance Diagnosis and Tuning in Oracle. In *CIDR*. www.cidrdb.org, 84–94.
- [13] Djellel Eddine Difallah, Andrew Pavlo, Carlo Curino, and Philippe Cudré-Mauroux. 2013. OLTP-Bench: An Extensible Testbed for Benchmarking Relational Databases. *Proc. VLDB Endow.* 7, 4 (2013), 277–288.
- [14] Liang Du, Ruobin Gao, Ponnuthurai Nagaratnam Suganthan, and David Z. W. Wang. 2022. Bayesian optimization based dynamic ensemble for time series forecasting. *Inf. Sci.* 591 (2022), 155–175.
- [15] Songyun Duan, Vamsidhar Thummalala, and Shivnath Babu. 2009. Tuning Database Configuration Parameters with iTuned. *Proc. VLDB Endow.* 2, 1 (2009), 1246–1257.
- [16] David Eriksson, Michael Pearce, Jacob R. Gardner, Ryan Turner, and Matthias Poloczek. 2019. Scalable Global Optimization via Local Bayesian Optimization. In *NeurIPS*. 5497–5508.
- [17] Martin Ester, Hans-Peter Kriegel, Jörg Sander, and Xiaowei Xu. 1996. A Density-Based Algorithm for Discovering Clusters in Large Spatial Databases with Noise. In *KDD*. AAAI Press, 226–231.
- [18] Ayat Fekry, Lucian Carata, Thomas F. J.-M. Pasquier, Andrew Rice, and Andy Hopper. 2020. To Tune or Not to Tune?: In Search of Optimal Configurations for Data Analytics. In *KDD*. ACM, 2494–2504.
- [19] Ayat Fekry, Lucian Carata, Thomas F. J.-M. Pasquier, Andrew Rice, and Andy Hopper. 2020. Tuneful: An Online Significance-Aware Configuration Tuner for Big Data Analytics. *CoRR* abs/2001.08002 (2020).
- [20] Marcello Fiducioso, Sebastian Curi, Benedikt Schumacher, Markus Gwerder, and Andreas Krause. 2019. Safe Contextual Bayesian Optimization for Sustainable Room Temperature PID Control Tuning. In *IJCAI*. ijcai.org, 5850–5856.
- [21] Lorenz Fischer, Shen Gao, and Abraham Bernstein. 2015. Machines Tuning Machines: Configuring Distributed Stream Processors with Bayesian Optimization. In *CLUSTER*. IEEE Computer Society, 22–31.
- [22] Adam Foster, Martin Jankowiak, Eli Bingham, Paul Horsfall, Yee Whye Teh, Tom Rainforth, and Noah D. Goodman. 2019. Variational Bayesian Optimal Experimental Design. In *NeurIPS*. 14036–14047.
- [23] Archana Ganapathi, Harumi A. Kuno, Umeshwar Dayal, Janet L. Wiener, Armando Fox, Michael I. Jordan, and David A. Patterson. 2009. Predicting Multiple Metrics for Queries: Better Decisions Enabled by Machine Learning. In *ICDE*. IEEE Computer Society, 592–603.
- [24] Jacob R. Gardner, Matt J. Kusner, Zhixiang Eddie Xu, Kilian Q. Weinberger, and John P. Cunningham. 2014. Bayesian Optimization with Inequality Constraints. In *ICML (JMLR Workshop and Conference Proceedings, Vol. 32)*. JMLR.org, 937–945.
- [25] Michael A. Gelbart, Jasper Snoek, and Ryan P. Adams. 2014. Bayesian Optimization with Unknown Constraints. In *UAI*. AUAI Press, 250–259.
- [26] Benjamin Hilprecht, Andreas Schmidt, Moritz Kullessa, Alejandro Molina, Kristian Kersting, and Carsten Binnig. 2020. DeepDB: Learn from Data, not from Queries! *Proc. VLDB Endow.* 13, 7 (2020), 992–1005.
- [27] Frank Hutter, Holger H. Hoos, and Kevin Leyton-Brown. 2014. An Efficient Approach for Assessing Hyperparameter Importance. In *ICML (JMLR Workshop and Conference Proceedings, Vol. 32)*. JMLR.org, 754–762.
- [28] Frank Hutter, Lars Kotthoff, and Joaquin Vanschoren (Eds.). 2019. *Automatic Machine Learning: Methods, Systems, Challenges*. Springer.
- [29] Shrainik Jain and Bill Howe. 2018. Query2Vec: NLP Meets Databases for Generalized Workload Analytics. *CoRR* abs/1801.05613 (2018).
- [30] Shrainik Jain, Jiaqi Yan, Thierry Cruanes, and Bill Howe. 2019. Database-Agnostic Workload Management. In *CIDR*. www.cidrdb.org.
- [31] Marjan Kaedi, Nasser Ghasem-Aghaee, and Chang Wook Ahn. 2013. Holographic memory-based Bayesian optimization algorithm (HM-BOA) in dynamic environments. *Sci. China Inf. Sci.* 56, 9 (2013), 1–17.
- [32] Konstantinos Kanellis, Rammatthan Alagappan, and Shivaram Venkataraman. 2020. Too Many Knobs to Tune? Towards Faster Database Tuning by Pre-selecting Important Knobs. In *HotStorage*. USENIX Association.
- [33] Andreas Kipf, Thomas Kipf, Bernhard Radke, Viktor Leis, Peter A. Boncz, and Alfons Kemper. 2019. Learned Cardinalities: Estimating Correlated Joins with Deep Learning. In *CIDR*. www.cidrdb.org.
- [34] Johannes Kirschner, Mojmir Mutny, Nicole Hiller, Rasmus Ischebeck, and Andreas Krause. 2019. Adaptive and Safe Bayesian Optimization in High Dimensions via One-Dimensional Subspaces. In *ICML (Proceedings of Machine Learning Research, Vol. 97)*. PMLR, 3429–3438.
- [35] Andreas Krause and Cheng Soon Ong. 2011. Contextual Gaussian Process Bandit Optimization. In *NIPS*. 2447–2455.
- [36] Adit Krishnan, Mahashweta Das, Mangesh Bendre, Hao Yang, and Hari Sundaram. 2020. Transfer Learning via Contextual Invariants for One-to-Many Cross-Domain Recommendation. In *SIGIR*. ACM, 1081–1090.
- [37] Mayuresh Kunjir and Shivnath Babu. 2020. Black or White? How to Develop an AutoTuner for Memory-based Analytics. In *SIGMOD Conference*. ACM, 1667–1683.
- [38] Hai Lan, Zhifeng Bao, and Yuwei Peng. 2021. A Survey on Advancing the DBMS Query Optimizer: Cardinality Estimation, Cost Model, and Plan Enumeration. *Data Sci. Eng.* 6, 1 (2021), 86–101.
- [39] Viktor Leis, Andrey Gubichev, Atanas Mirchev, Peter A. Boncz, Alfons Kemper, and Thomas Neumann. 2015. How Good Are Query Optimizers, Really? *Proc. VLDB Endow.* 9, 3 (2015), 204–215.
- [40] Benjamin Letham, Brian Karrer, Guilherme Ottoni, and Eytan Bakshy. 2017. Constrained Bayesian Optimization with Noisy Experiments. *CoRR* abs/1706.07094 (2017).
- [41] Guoliang Li, Xuanhe Zhou, Shifu Li, and Bo Gao. 2019. QTune: A Query-Aware Database Tuning System with Deep Reinforcement Learning. *Proc. VLDB Endow.* 12, 12 (2019), 2118–2130.
- [42] Edo Liberty, Zohar S. Karnin, Bing Xiang, Laurence Rousesnel, Baris Coskun, Ramesh Nallapati, Julio Delgado, Amir Sadoughi, Yury Astashonok, Piali Das, Can Balioglu, Saswata Chakravarty, Madhav Jha, Philip Gautier, David Arpin, Tim Januschowski, Valentin Flunkert, Yuyang Wang, Jan Gasthaus, Lorenzo Stella, Syama Sundar Rangapuram, David Salinas, Sebastian Schelter, and Alex Smola. 2020. Elastic Machine Learning Algorithms in Amazon SageMaker. In *SIGMOD Conference*. ACM, 731–737.
- [43] Lin Ma, Dana Van Aken, Ahmed Hefny, Gustavo Mezerhane, Andrew Pavlo, and Geoffrey J. Gordon. 2018. Query-based Workload Forecasting for Self-Driving Database Management Systems. In *SIGMOD Conference*. ACM, 631–645.
- [44] Lin Ma, William Zhang, Jie Jiao, Wuwen Wang, Matthew Butrovich, Wan Shen Lim, Prashanth Menon, and Andrew Pavlo. 2021. MB2: Decomposed Behavior Modeling for Self-Driving Database Management Systems. In *SIGMOD Conference*. ACM, 1248–1261.
- [45] Vitor Hirota Makiyama, M. Jordan Raddick, and Rafael D. C. Santos. 2015. Text Mining Applied to SQL Queries: A Case Study for the SDSS SkyServer. In *SIMBig (CEUR Workshop Proceedings, Vol. 1478)*. CEUR-WS.org, 66–72.
- [46] Alonso Marco, Felix Berkenkamp, Philipp Hennig, Angela P. Schoellig, Andreas Krause, Stefan Schaal, and Sebastian Trimpe. 2017. Virtual vs. real: Trading off simulations and physical experiments in reinforcement learning with Bayesian optimization. In *ICRA*. IEEE, 1557–1563.
- [47] Ryan C. Marcus, Parimarjan Negi, Hongzi Mao, Chi Zhang, Mohammad Alizadeh, Tim Kraska, Olga Papaemmanouli, and Nesime Tatbul. 2019. Neo: A Learned Query Optimizer. *Proc. VLDB Endow.* 12, 11 (2019), 1705–1718.
- [48] Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Alex Graves, Ioannis Antonoglou, Daan Wierstra, and Martin A. Riedmiller. 2013. Playing Atari with Deep Reinforcement Learning. *CoRR* abs/1312.5602 (2013).
- [49] Rémi Munos. 2011. Optimistic Optimization of a Deterministic Function without the Knowledge of its Smoothness. In *NIPS*. 783–791.
- [50] John A. Nelder and R. Mead. 1965. A Simplex Method for Function Minimization. *Comput. J.* 7, 4 (1965), 308–313.
- [51] Jennifer Ortiz, Magdalena Balazinska, Johannes Gehrke, and S. Sathya Keerthi. 2019. An Empirical Analysis of Deep Learning for Cardinality Estimation. *CoRR* abs/1905.06425 (2019).
- [52] R. Malinga Perera, Bastian Oetomo, Benjamin I. P. Rubinstein, and Renata Borovica-Gajic. 2021. DBA bandits: Self-driving index tuning under ad-hoc, analytical workloads with safety guarantees. In *ICDE*. IEEE, 600–611.
- [53] Bobak Shahriari, Kevin Swersky, Ziyu Wang, Ryan P. Adams, and Nando de Freitas. 2016. Taking the Human Out of the Loop: A Review of Bayesian Optimization. *Proc. IEEE* 104, 1 (2016), 148–175.

- [54] Jasper Snoek, Hugo Larochelle, and Ryan P. Adams. 2012. Practical Bayesian Optimization of Machine Learning Algorithms. In *NIPS*. 2960–2968.
- [55] Niranjan Srinivas, Andreas Krause, Sham M. Kakade, and Matthias W. Seeger. 2010. Gaussian Process Optimization in the Bandit Setting: No Regret and Experimental Design. In *ICML*. Omnipress, 1015–1022.
- [56] Yanan Sui, Alkis Gotovos, Joel W. Burdick, and Andreas Krause. 2015. Safe Exploration for Optimization with Gaussian Processes. In *ICML (JMLR Workshop and Conference Proceedings, Vol. 37)*. JMLR.org, 997–1005.
- [57] David G. Sullivan, Margo I. Seltzer, and Avi Pfeffer. 2004. Using probabilistic reasoning to automate software tuning. In *SIGMETRICS*. ACM, 404–405.
- [58] Ji Sun and Guoliang Li. 2019. An End-to-End Learning-based Cost Estimator. *Proc. VLDB Endow.* 13, 3 (2019), 307–319.
- [59] Ilya Sutskever, Oriol Vinyals, and Quoc V. Le. 2014. Sequence to Sequence Learning with Neural Networks. In *NIPS*. 3104–3112.
- [60] Rebecca Taft, Nosayba El-Sayed, Marco Serafini, Yu Lu, Ashraf Aboulnaga, Michael Stonebraker, Ricardo Mayerhofer, and Francisco Jose Andrade. 2018. P-Store: An Elastic Database System with Predictive Provisioning. In *SIGMOD Conference*. ACM, 205–219.
- [61] Jian Tan, Niv Nayman, Mengchang Wang, and Rong Jin. 2021. CobBO: Coordinate Backoff Bayesian Optimization with Two-Stage Kernels. *CoRR* abs/2101.05147 (2021).
- [62] Jian Tan, Tieying Zhang, Feifei Li, Jie Chen, Qixing Zheng, Ping Zhang, Honglin Qiao, Yue Shi, Wei Cao, and Rui Zhang. 2019. iTune: Individualized Buffer Tuning for Large-scale Cloud Databases. *Proc. VLDB Endow.* 12, 10 (2019), 1221–1234.
- [63] Linnan Wang, Rodrigo Fonseca, and Yuandong Tian. 2020. Learning Search Space Partition for Black-box Optimization using Monte Carlo Tree Search. In *NeurIPS*.
- [64] Zi Wang, Clement Gehring, Pushmeet Kohli, and Stefanie Jegelka. 2018. Batched Large-scale Bayesian Optimization in High-dimensional Spaces. In *AISTATS (Proceedings of Machine Learning Research, Vol. 84)*. PMLR, 745–754.
- [65] Ziyu Wang, Babak Shakibi, Lin Jin, and Nando de Freitas. 2014. Bayesian Multi-Scale Optimistic Optimization. In *AISTATS (JMLR Workshop and Conference Proceedings, Vol. 33)*. JMLR.org, 1005–1014.
- [66] Zhijie Wei, Zuohua Ding, and Juiliang Hu. 2014. Self-tuning performance of database systems based on fuzzy rules. In *FSKD*. IEEE, 194–198.
- [67] Gerhard Weikum, Axel Mönkeberg, Christof Hasse, and Peter Zabback. 2002. Self-tuning Database Technology and Information Services: from Wishful Thinking to Viable Engineering. In *VLDB*. Morgan Kaufmann, 20–31.
- [68] Martin Wistuba, Nicolas Schilling, and Lars Schmidt-Thieme. 2015. Sequential Model-Free Hyperparameter Tuning. In *ICDM*. IEEE Computer Society, 1033–1038.
- [69] Jiaqi Yan, Qiuye Jin, Shrainik Jain, Stratis D. Viglas, and Allison W. Lee. 2018. Snowtrail: Testing with Production Queries on a Cloud Database. In *DBTest@SIGMOD*. ACM, 4:1–4:6.
- [70] Zongheng Yang, Amog Kamsetty, Sifei Luan, Eric Liang, Yan Duan, Peter Chen, and Ion Stoica. 2020. NeuroCard: One Cardinality Estimator for All Tables. *Proc. VLDB Endow.* 14, 1 (2020), 61–73.
- [71] Zongheng Yang, Eric Liang, Amog Kamsetty, Chenggang Wu, Yan Duan, Peter Chen, Pieter Abbeel, Joseph M. Hellerstein, Sanjay Krishnan, and Ion Stoica. 2019. Deep Unsupervised Cardinality Estimation. *Proc. VLDB Endow.* 13, 3 (2019), 279–292.
- [72] Ya-Xiang Yuan. [n.d.]. A Review of Trust Region Algorithms for Optimization.
- [73] Ji Zhang, Yu Liu, Ke Zhou, Guoliang Li, Zhili Xiao, Bin Cheng, Jiashu Xing, Yangtao Wang, Tianheng Cheng, Li Liu, Minwei Ran, and Zekang Li. 2019. An End-to-End Automatic Cloud Database Tuning System Using Deep Reinforcement Learning. In *SIGMOD Conference*. ACM, 415–432.
- [74] Xinyi Zhang, Hong Wu, Zhuo Chang, Shuowei Jin, Jian Tan, Feifei Li, Tieying Zhang, and Bin Cui. 2021. ResTune: Resource Oriented Tuning Boosted by Meta-Learning for Cloud Databases. In *SIGMOD Conference*. ACM, 2102–2114.
- [75] Yuqing Zhu, Jianxun Liu, Mengying Guo, Yungang Bao, Wenlong Ma, Zhuoyue Liu, Kumpeng Song, and Yingchun Yang. 2017. BestConfig: tapping the performance potential of systems via automatic configuration tuning. In *SoCC*. ACM, 338–350.
- [76] Zainab Zolaktaf, Mostafa Milani, and Rachel Pottinger. 2020. Facilitating SQL Query Composition and Analysis. In *SIGMOD Conference*. ACM, 209–224.

Appendix

OUTLINE

This supplemental material is organized as follows:

- A.1 More details about ONLINETUNE Architecture.
- A.2 High-Level Algorithm.
- A.3 Details about subspace adaptation.

A1 MORE DETAILS ABOUT ONLINETUNE ARCHITECTURE

System Architecture. Figure A1 presents the architecture of ONLINETUNE. The left part shows the online database system in the cloud environment that runs ever-changing workloads. The right part represents the ONLINETUNE server deployed in the backend tuning cluster. ONLINETUNE maintains a data repository that stores the historical observations $\{ \langle c_i, \theta_i, y_i \rangle \}_1^t$ from the previous tuning iterations, which could be initially empty. The controller monitors the states of tuning tasks and transfers the data between the database side and ONLINETUNE server side. The main parts of ONLINETUNE run on the server side, whose resource consumption doesn't affect the online database. The context featurization module is deployed in the database instance for data privacy concerns.

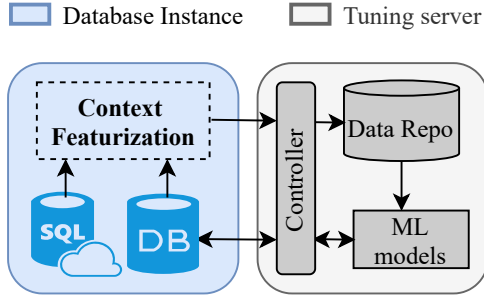


Figure A1: ONLINETUNE Architecture.

Discussion. ONLINETUNE is a reactive approach: it featurizes the online workloads at the beginning of an iteration and applies a configuration for the later time of the iteration. Since changes in real-world workloads are gradual, the little lagging can be acceptable. A predictive module for the context might help. However, it still assumes gradual and predictable changes based on historical data, and an inaccurate prediction module could greatly affect the tuner's performance.

A2 TOP-LEVEL ALGORITHM

Algorithm 3 presents the top-level algorithm. ONLINETUNE first queries the default configuration and its performance to form the initial safety set and initializes the data repository (Line1–3). The safety threshold is set as the default performance. At the beginning of an iteration, ONLINETUNE collects the incoming workload queries and corresponding optimizer's estimations to calculate context

vector c_i (Line 5, Section 5.1). ONLINETUNE loads a prediction model m_{i-1}^n selected by a SVM model that inputs the context vector and outputs a cluster label n (Line 6, Section 5.3). Then, a configuration subspace is initialized or adapted (Line 7, Section 6.1). ONLINETUNE discretizes the configuration subspace and assesses the safety of unevaluated configurations based on the black-and-white prior knowledge to form a safe candidate set (safety set) (Line 8, Section 6.2). Next, ONLINETUNE recommends a configuration θ_i within the safety set to trade-off exploitation (i.e., making decisions based on existing knowledge) and exploration (i.e., acquiring new knowledge or expanding the safety set) (Line 9, Section 6.3). The configuration θ_i is applied to the online database, and the database performance y_i during the tuning interval is collected. Finally, ONLINETUNE updates the prediction model and data repository with $\{\theta_i, c_i, y_i\}$ (Lines 12 to 11). ONLINETUNE determines whether to re-cluster or not ((Line 13, see Algorithm 1 for details). If needing re-cluster, ONLINETUNE clusters the observations based on $\{c_i\}_1^t$, fits prediction models for each cluster, and re-train the SVM model, as illustrated in Section 5.3.

Algorithm 3: Top-Level Algorithm of ONLINETUNE

Output: Configuration recommendation adaptively with changing environment

- 1 Featurize the environment factor, get context c_0 .
 - 2 Query default configuration θ_0 and get its performance y_0 .
 - 3 Initialize a data repository H_0 with $\langle c_0, \theta_0, y_0 \rangle$.
 - 4 **for** $i \leftarrow 1$ to K **do**
 - 5 Featurize and get context c_i .
 - 6 Select a model m_{i-1}^n , where $n = SVM(c_i)$.
 - 7 $\Theta_i^n = \text{Subspace_Adaptation}(\Theta_{i-1}^n, H_{i-1})$.
 - 8 Generate safe candidates $S_i^n \in \Theta_i^n$.
 - 9 Select a configuration θ_i within S_i^n .
 - 10 Apply θ_i and evaluate its performance y_i .
 - 11 $H_i = \text{Append}(H_{i-1}, \langle \theta_i, c_i, y_i \rangle)$.
 - 12 Fit prediction model m_i^n on H_i .
 - 13 Offline_Clustering(H_i).
-

A3 DETAILS ABOUT SUBSPACE ADAPTATION

A3.1 More Rationale about Subspace Restriction

Given a configuration space Θ and a contextual GP model, we can discretize Θ to obtain a set of candidates and assess the safety of each candidate based on the estimation of the GP model. However, the direct operation over the whole space suffers from the curse of dimensionality. First, the candidates need to be close to each other in order to use the GP to generalize safety. When tuning more than a couple of knobs, it is computationally affordable to conduct a fine discretization over the whole configuration space [34]. In addition, the database performance function is often complex, making the estimation of the GP model problematic for high dimensional configuration (more than ten parameters) [53]. To deal

Table A1: Average time breakdown for one tuning iteration on JOB workload.

	Featurization	Model Selection	Model Update	Subspace Adaptation	Safety Assessment	Candidate Selection	Apply & Evaluation
Average Time	0.0577s	0.0259s	1.3583s	0.2695s	0.1354s	0.0278s	178.1254s
Percentage	0.03%	0.01%	0.75%	0.15%	0.08%	0.02%	98.96%

with those challenges, we draw inspiration from a class of trust-region methods in stochastic optimization [72]. These methods use a linear and quadratic prediction model inside a trust region, which is often a sphere or a polytope centered at the best observation. Intuitively, while linear and quadratic models are likely to be inadequate to model globally, they can be accurate in a sufficiently small trust region [16]. However, the linear models struggle to handle noisy observations and require small trust regions to provide accurate modeling behavior. Naturally, we use contextual GP as the prediction model to describe the function $f(\theta, c)$ and restrict ONLINETUNE’s optimization space in the trust region (i.e., configuration subspace). The optimization can be solved efficiently within the trust region, and the GP model’s estimation can be trusted in the trust region [16].

A3.2 Direction Oracles for Line Region

ONLINETUNE implements two strategies to generate the directions, including random direction and important direction.

Random direction. A strategy is to pick the direction uniformly (random direction), increasing the exploration.

Important direction. ONLINETUNE also chooses the directions aligned with the important configuration knob (important direction), inspired by the important knobs pre-selecting procedure before tuning used by existing configuration tuning approaches [6, 18, 32]. It is empirically shown that restricting the optimization space in several important knobs can largely reduce the tuning iterations and achieve similar improvement [32]. The importance of knobs is quantified by Fanova [27], a line-time approach for assessing feature importance. However, detecting important knobs needs thousands of evaluation samples for a given workload. And fixing the configuration space wrongly (e.g., filtering important knobs) will severely hinder the optimization. ONLINETUNE’s adaptation of subspace solves this problem by adjusting the subspace over iterations.

A random direction is chosen if the performance improvement in the previous hypercube region is lower than a threshold (exploration). Otherwise, an important direction is chosen by sampling from the top-5 important knobs (exploitation). The importance of knobs is updated with the increasing observations.