Hypergraph Contrastive Collaborative Filtering

Lianghao Xia University of Hong Kong aka_xia@foxmail.com

Jiashu Zhao Wilfrid Laurier University jzhao@wlu.ca Chao Huang^{*} University of Hong Kong chaohuang75@gmail.com

> Dawei Yin Baidu Inc. yindawei@acm.org

Yong Xu South China University of Technology yxu@scut.edu.cn

> Jimmy Xiangji Huang York University jhuang@yorku.ca

ABSTRACT

Collaborative Filtering (CF) has emerged as fundamental paradigms for parameterizing users and items into latent representation space, with their correlative patterns from interaction data. Among various CF techniques, the development of GNN-based recommender systems, e.g., PinSage and LightGCN, has offered the state-of-theart performance. However, two key challenges have not been well explored in existing solutions: i) The over-smoothing effect with deeper graph-based CF architecture, may cause the indistinguishable user representations and degradation of recommendation results. ii) The supervision signals (i.e., user-item interactions) are usually scarce and skewed distributed in reality, which limits the representation power of CF paradigms. To tackle these challenges, we propose a new self-supervised recommendation framework Hypergraph Contrastive Collaborative Filtering (HCCF) to jointly capture local and global collaborative relations with a hypergraphenhanced cross-view contrastive learning architecture. In particular, the designed hypergraph structure learning enhances the discrimination ability of GNN-based CF paradigm, so as to comprehensively capture the complex high-order dependencies among users. Additionally, our HCCF model effectively integrates the hypergraph structure encoding with self-supervised learning to reinforce the representation quality of recommender systems, based on the hypergraph-enhanced self-discrimination. Extensive experiments on three benchmark datasets demonstrate the superiority of our model over various state-of-the-art recommendation methods, and the robustness against sparse user interaction data. Our model implementation codes are available at https://github.com/akaxlh/HCCF.

CCS CONCEPTS

• Information systems \rightarrow Recommender systems.

KEYWORDS

Recommendation; Collaborative Filtering; Self-Supervised Learning

SIGIR'22, July 11-15, 2022, Madrid, Spain

ACM Reference Format:

Lianghao Xia, Chao Huang, Yong Xu, Jiashu Zhao, Dawei Yin, and Jimmy Xiangji Huang. 2022. Hypergraph Contrastive Collaborative Filtering. In Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR'22), July 11–15, 2022, Madrid, Spain. ACM, Singapore, 10 pages. https://doi.org/10.1145/3477495.3532058

1 INTRODUCTION

Personalized recommender systems have been widely utilized to help users discover items of interest for information overload alleviation on the web, such as online retail platforms (*e.g.*, Amazon, Alibaba) [17], social networking applications (*e.g.*, Facebook, Wechat) and online video sites (*e.g.*, Youtube, Tiktok) [10]. Among various techniques, Collaborative filtering (CF) has emerged as the foundation architecture for recommendation, such as conventional matrix factorization methods [14, 26], and recent neural network-based models [13, 34, 52]. The key rationale behind the CF paradigm is to project users and items into low-dimensional latent representations, based on the observed user-item interactions [7].

With the advancement of graph neural networks (GNNs) in achieving unprecedented success for graph representations tasks, one recent promising research line leverages graph neural networks to exploit user-item interaction graph structure for collaborative filtering. Several recent efforts have explored deeply into GNNs to propagate embeddings with user-item interaction edges to capture CF signals among neighboring nodes in subgraphs, so as to further improve the user representation quality. Specifically, PinSage [44] and NGCF [35] employ GCN to propagate embeddings over the user-item interaction graph. Later on, LightGCN [12] proposes to alleviate training difficulty by identifying the unnecessity of feature transformation in GNN-based recommender system. Additionally, inspired by the effectiveness of disentangled graph representation learning [23], DGCF [36] disentangles latent user interests with intent-aware user-item graph structures for embedding users.

While the aforementioned graph-based Collaborative Filtering models have offered state-of-the-art performance for recommendation applications, two key issues remain less explored:

i) **Over-Smoothing Collaborative Effects**. The graph neural CF architecture with deeper embedding propagation layers may result in indistinguishable user vectors [25, 50], which limits the representation quality of high-order collaborative relations. The over-mixing of information among connected users/items over their interaction subgraphs can involve harmful noise for representing unique user preference. The over-smoothing issues of graph-based CF paradigms (*e.g.*, LightGCN [12], PinSage [44], ST-GCN [47], GCCF [4]) are illustrated in Figure 1. In particular, we observe the

^{*}Chao Huang is the corresponding author.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

^{© 2022} Copyright held by the owner/author(s). Publication rights licensed to ACM. ACM ISBN 978-1-4503-8732-3/22/07...\$15.00 https://doi.org/10.1145/3477495.3532058




Figure 1: i) The recommendation performance (measured by NDCG@20); and ii) The embedding smoothness (measured by MAD metric with heatmaps) of state-of-the-art graphbased collaborative filtering models (*i.e.*, LightGCN [12], Pin-Sage [44], GCCF [4], ST-GCN [47]) on Yelp dataset.

larger smoothness degrees of the user representations encoded from different methods with the increase of graph propagation layers. Here, we adopt the quantitative metric Mean Average Distance (MAD) [3] to measure the graph smoothness by calculating the average distance among user embeddings learned by different methods. As shown in Figure 1, the over-smoothing issue limits the recommendation performance of graph neural CF frameworks due to the indistinguishable embeddings by stacking more graph aggregation layers. Hence, encoding distinguishable and informative user/item representations from the holistic interaction graph is of crucial importance for differentiating user preference.

ii) Supervision Interaction Data Scarcity and Noise: Most graph-based collaborative filtering models belong to the supervised learning paradigm, in which the user representation process is supervised by user-item interaction signals. The effectiveness of such approaches largely relies on sufficient supervision signals (i.e., observed user-item interactions), and cannot learn quality user/item representations under the interaction label scarcity. However, the interaction data scarcity issue is ubiquitous in various practical recommendation scenarios [49], since most users only sporadically interact with very limited number of items. The majority of collaborative filter-based recommender systems cannot perform well on long-tail items because of the data sparsity phenomenon and skewed interaction distribution. Additionally, most GNN-based recommendation methods design the message passing mechanism in which the embedding propagation is merely performed with the original graph neighbors. However, such explicit user-item relations (e.g., clicks or views) always bring noisy information (e.g., user misclick behaviors) to the constructed interaction graph [48]. For example, user's real interest is likely to be confounded after his/her page views on a lot of irrelevant items [38].

Presented Work. In view of the aforementioned limitations and challenges, we develop a hypergraph contrastive learning framework with self-augmentation for GNN-based collaborative relation modeling, by proposing a new recommendation model–HCCF. In particular, we leverage hypergraph learning architecture to supplement the encoding of graph-based CF paradigm with global collaborative effects based on the low-rank structure learning. While several recent studies use hypergraph to encode the high-order relations in recommendation, most of them rely on the original connections among users or items to generate their hypergraph between users and items based on their observed interactions. MHCN [45] pre-defines the motif-based social connections are inevitably noisy or incomplete in practical scenarios [48]. To mitigate this issue, in our HCCF, the parameterized hypergraph-guided user dependent structures and the original interaction graph encoder are jointly learned towards better user preference representation.

Furthermore, we design relational learning augmentation schema based on the dual-graph contrastive learning. Inspired by the strength of contrastive learning in visual and language data representation [5, 31], there exist some recent self-supervised collaborative filtering models (e.g., SGL [38], SLRec [43]) which augment the original interaction data with randomly node and edge dropout, or mask operations. However, this might drop some essential information (e.g., interactions between users and their interested items), which hinders the encoding of user real interests. To fill this gap, we treat the explicit interaction graph and the learned implicit hypergraph structure as two contrastive views, without the random noise perturbation based on the pre-defined operators. We also provide theoretical justification behind our model design from the perspective of improving model optimization with better gradients. Empirical results show that HCCF consistently improves the performance over state-of-the-art recommendation models, e.g., average relative improvement of 24.7% over LightGCN, 33.8% over DHCF, 20.2% over MHCN and 14.8% over SGL in terms of NDCG@20.

In summary, this paper makes the following contributions:

- We introduce a generic self-supervised recommendation framework for enhancing the robustness of graph collaborative filtering paradigm, through distilling self-augmented contrastive views between the local and global modeling of collaborative effects.
- We present HCCF which innovatively integrates the global hypergraph structure learning with local collaborative relation encoder, to cooperatively supervise each other. The designed hypergraph contrastive learning schema empowers the graph neural CF paradigm, to capture the intrinsic and implicit dependencies among users and items with effective instance discrimination.
- Systematic experimental studies are conducted to evaluate the performance of our HCCF model and 15 various baselines on several benchmark datasets. Further ablation study is provided to investigate the effect of key modules in HCCF.

2 PRELIMINARIES AND RELATED WORK

2.1 Collaborative Filtering Learning Paradigm

We let $\mathcal{U} = \{u_1, ..., u_i, ..., u_I\}$ ($|\mathcal{U}| = I$) and $\mathcal{V} = \{v_1, ..., v_j, ..., v_J\}$ ($|\mathcal{V}| = J$) represent the set of users and items, respectively. The interaction matrix $\mathcal{A} \in \mathbb{R}^{I \times J}$ indicates the implicit relationships between each user in \mathcal{U} and his/her consumed items. Each entry $\mathcal{A}_{i,j}$ in \mathcal{A} will be set as 1 if user u_i has adopted item v_j before and $\mathcal{A}_{i,j} = 0$ otherwise. The objective of CF task is to forecast the unobserved user-item interactions with the encoded corresponding representations. The assumption of CF paradigm lies in that behaviorally similar users are more likely to share similar interests.

Many existing CF approaches are designed with the various embedding functions to generate vectorized representations of users and items. Then, the similarity matching function is introduced to estimate the relevance score between user u_i and the candidate item v_j . Following this paradigm, NCF [13] and DMF [42] replaces the inner-product with Multilayer Perceptron to reconstruct the ground truth user-item interactions. Furthermore, to transform users and items into the latent embeddings, Autoencoder has been utilized as the embedding function with the behavior reconstruction objective, such as AutoRec [30] and CDAE [39].

2.2 Graph-based Recommender Systems.

To capture high-order collaborative signals, one prominent direction explores user-item relations based on multi-hop interaction topological structures with graph oriented approaches [16, 35, 41, 44]. For example, NGCF [35] and PinSage [44] have demonstrated the importance of high-order connectivity between users and items for collaborative filtering. To further improve the message passing process in graph convolutional framework, LightGCN [12] proposes to omit the non-linear transformation during propagation, and uses the sum-based pooling operation for neighborhood aggregation.

Some recent studies also follow the graph-structured information propagation rule to refine user/item embeddings, with various neighborhood aggregation functions [15]. For example, learning disentangled or behavior-aware user representations is proposed to improve CF paradigm, *e.g.*, DGCF [36], MacridVAE [24] and MBGMN [41]. The hyperbolic embedding space is adopted to encode high-order information from neighboring users/items in [32].

2.3 Hypergraph Learning for Recommendation

Inspired by the generalization ability of hypergraph in modeling complex high-order dependencies [8, 9, 11], some recently developed recommender systems are empowered to capture interaction patterns with the constructed hypergraph structures and uniform node-hyperedge connections, like HyRec [33], DHCF [18] and MHCN [45]. For instance, HyRec attempts to propagate information among multiple items by considering users as hyperedges. DHCF models the hybrid multi-order correlations between users and items based on the constructed hypergraph structures. Different from them, our HCCF framework designs a learnable hypergraph structure encoder, which not only improves the discrimination capability of CF representation paradigm, but also preserves the personalized global collaborative relationships across users and items in recommender systems. The presented hypergraph dependency structure learning method brings advantages in automatically distilling interdependency to enhance discrimination ability of user and item representations by addressing the graph over-smoothing issue.

2.4 Contrastive Representation Learning

Contrastive learning has become an effective self-supervised framework, to capture the feature representation consistency under different views [27, 37]. It has achieved promising performance in various domains, such as visual data representation [5, 28], language data understanding [2, 31], graph representation learning [29, 51] and recommender systems [22, 38, 45, 46]. These contrastive learning approaches seek the exploration of data- or task-specific augmentations with auxiliary signals. To tackle the challenge of insufficient supervision labels in recommendation, we propose a new self-supervised recommendation framework to supplement the encoding of collaborative effects with explicitly local-global interdependency modeling, under a hypergraph learning schema.




Figure 2: The illustration of HCCF's overall architecture. i) In the Graph-Local component, the explicit local collaborative similarities are encoded with the embedding aggregation function: $\mathbf{z}_i^{(u)} = \sigma(\bar{\mathcal{A}}_{i,*} \cdot \mathbf{E}^{(v)})$ and $\mathbf{z}_j^{(v)} = \sigma(\bar{\mathcal{A}}_{*,j} \cdot \mathbf{E}^{(u)})$. ii) In the Hypergraph-Global component, the global crossuser and cross-item dependencies are captured through the hypergraph message passing function: $\sigma(\mathcal{H}^{(u)} \cdot \mathcal{H}^{(u)\top} \cdot \mathbf{E}_{l-1}^{(u)})$. iii) In the cross-view contrastive component, the selfsupervision signals are distilled from both local and global perspectives with the representations $\mathbf{z}_{i,l}$ and global $\Gamma_{i,l}$.

3 METHODOLOGY

In this section, we present our HCCF framework whose overall architecture is shown in Figure 2. First, we leverage the graphbased message passing module as the encoder to capture the local collaborative similarities among users and items. Second, we propose a new hypergraph neural network with global dependency structure learning to comprehensively capture global collaborative effects for graph neural CF paradigm. Finally, a new hypergraph contrastive learning architecture is introduced with complementary self-distilling views (local and global collaborative relations).

3.1 Local Collaborative Relation Encoding

Following the common collaborative filtering paradigm, we first represent each user u_i and item v_j with the embedding vectors $\mathbf{e}_i^{(u)} \in \mathbb{R}^d$ and $\mathbf{e}_j^{(v)} \in \mathbb{R}^d$, respectively (*d* denotes the embedding dimensionality). We further define $\mathbf{E}^{(u)} \in \mathbb{R}^{I \times d}$ and $\mathbf{E}^{(v)} \in \mathbb{R}^{J \times d}$ to represent the embeddings corresponding to users and items. Inspired by the effectiveness of simplified graph convolutional network in LightGCN [12], we design our local graph embedding propagation layer with the following form:

$$\mathbf{z}_{i}^{(u)} = \sigma(\bar{\mathcal{A}}_{i,*} \cdot \mathbf{E}^{(v)}), \quad \mathbf{z}_{j}^{(v)} = \sigma(\bar{\mathcal{A}}_{*,j} \cdot \mathbf{E}^{(u)})$$
(1)

where $\mathbf{z}_i^{(u)}, \mathbf{z}_j^{(v)} \in \mathbb{R}^d$ represent the aggregated information from neighboring items/users to the centric node u_i and v_j . $\sigma(\cdot)$ denotes the LeakyReLU activation function with 0.5 slope for negative inputs, which not only brings benefits to the gradient backpropagation, but also injects the non-linearity into the transformation. Here, $\bar{\mathcal{A}} \in \mathbb{R}^{I \times J}$ denotes the normalized adjacent matrix derived from the user-item interaction matrix ${\mathcal A}$ calculated as:

$$\bar{\mathcal{A}} = \mathbf{D}_{(u)}^{-1/2} \cdot \mathcal{A} \cdot \mathbf{D}_{(v)}^{-1/2}, \quad \bar{\mathcal{A}}_{i,j} = \frac{\mathcal{A}_{i,j}}{\sqrt{|\mathcal{N}_i| \cdot |\mathcal{N}_j|}}$$
(2)

where $\mathbf{D}_{(u)} \in \mathbb{R}^{I \times I}$, $\mathbf{D}_{(v)} \in \mathbb{R}^{J \times J}$ are diagonal degree matrices. The neighboring items/users of user (u_i) /item (v_j) are denoted by \mathcal{N}_i and \mathcal{N}_j , respectively.

By integrating multiple embedding propagation layers, we refine the user/item representations to aggregate local neighborhood information for contextual embedding generation. Suppose $\mathbf{e}_{i,l}^{(u)}$ and $\mathbf{e}_{j,l}^{(v)}$ represents the embedding of user u_i and item v_j at the (l)-th GNN layer. The message passing process from (l - 1)-th layer to the (l)-th layer is formally defined as below:

$$\mathbf{e}_{i,l}^{(u)} = \mathbf{z}_{i,l}^{(u)} + \mathbf{e}_{i,l-1}^{(u)}, \quad \mathbf{e}_{j,l}^{(v)} = \mathbf{z}_{j,l}^{(v)} + \mathbf{e}_{j,l-1}^{(v)}$$
(3)

We apply the residual connections for self-information incorporation between the source and target node during the message aggregation across graph layers. This emphasizes the semantics of the centric node and alleviates the over-smoothing issue of GNN.

3.2 Hypergraph Global Dependency Learning

To inject global collaborative relations among users/items into the CF representation paradigm, we design a global dependency encoder via hypergraph structure learning.

3.2.1 Hypergraph Message Passing Paradigm. Motivated by the strength of hypergraph for unifying nodes beyond pairwise relations [19], we endow our HCCF to capture complex high-order relations under a deep hypergraph message passing architecture. Hypergraph consists of a set of vertices and hyperedges, in which each hyperedge can connect any number of vertices [6]. In our hypergraph collaborative filtering scenario, we utilize hyperedges as intermediate hubs for global-aware information passing across users and items without the hop distance limit. The model structure of hypergraph message passing paradigm is illustrated in Figure 3.

To be specific, we define the hypergraph dependency matrix for users and items as $\mathcal{H}^{(u)} \in \mathbb{R}^{I \times H}$ and $\mathcal{H}^{(v)} \in \mathbb{R}^{J \times H}$. Here, Hrepresent the number of hyperedges. We give a formal presentation of our hypergraph message passing as:

$$\Gamma_{l}^{(u)} = \sigma(\mathcal{H}^{(u)}\Lambda^{(u)}) = \sigma(\mathcal{H}^{(u)} \cdot \mathcal{H}^{(u)\top} \cdot \mathbf{E}_{l-1}^{(u)})$$
(4)

where $\Lambda^{(u)} \in \mathbb{R}^{H \times d}$ denotes the hyperedge-specific embeddings for users, and σ denotes the LeakyReLU mapping. $\Gamma_l^{(u)} \in \mathbb{R}^{I \times d}$ represents the hyper embeddings of users $(u_i \in \mathcal{U})$ in hypergraph representation space under the *l*-th propagation layer. The hyper embeddings $\Gamma_l^{(v)}$ of items $(v_j \in \mathcal{V})$ can be generated in an analogous way. Our hypergraph message extraction phase takes the user/item embeddings $\mathbf{E}_{l-1}^{(u)}$, $\mathbf{E}_{l-1}^{(v)}$ (refined from the graph local embedding propagation), and learnable hypergraph dependent structural matrices $\mathcal{H}^{(u)}$, $\mathcal{H}^{(v)}$ (will be elaborated in the following subsection) as the computation input knowledge, to jointly preserve the local and global collaborative effects.

3.2.2 **Parameterized Hypergraph Structure Learning.** To adaptively learn hypergraph-based dependent structures across users and items, we propose to parameterize hypergraph dependency

matrices $\mathcal{H}^{(u)}$, $\mathcal{H}^{(v)}$ which are jointly optimized along with the GNN-based CF architecture. Without loss of generality, we use \mathcal{H} to denote user-side dependency matrix $\mathcal{H}^{(u)}$ or item-side dependency matrix $\mathcal{H}^{(v)}$ in the following sections for simplifying notations. Note that by obtaining a trainable hypergraph structural matrix \mathcal{H} , the node-wise global dependency can be derived with \mathcal{HH}^{\top} .

However, learning dense hypergraph adjacent matrices $\mathcal{H}^{(u)} \in \mathbb{R}^{I \times H}$, $\mathcal{H}^{(v)} \in \mathbb{R}^{J \times H}$ will enormously increase the size of model parameters with high computational cost (especially for the large number of hyperedges *H*). To tackle this challenge, we propose to parameterize the hypergraph structure matrices $\mathcal{H}^{(u)}$, $\mathcal{H}^{(v)}$ into latent space in a low-rank manner to achieve model efficiency:

$$\mathcal{H}^{(u)} = \mathbf{E}^{(u)} \cdot \mathbf{W}^{(u)}, \quad \mathcal{H}^{(v)} = \mathbf{E}^{(v)} \cdot \mathbf{W}^{(v)}$$
(5)

where $\mathbf{W}^{(u)}, \mathbf{W}^{(v)} \in \mathbb{R}^{d \times H}$ represents the learnable embedding matrices for user- and item-side hyperedges. $\mathbf{E}^{(u)}, \mathbf{E}^{(v)}$ represents the embeddings of users and items. By doing so, the hypergraph structure learning component only takes extra $O(H \times d)$ time complexity, which is quite small as compared to the computational cost $O((I + J) \times d)$ for the main embedding space. In addition, we design the parameterized dependency structure encoder with the matrix decomposition on \mathcal{H} in a low-rank manner, which further regularizes the latent structure learning for overfitting alleviation.

3.2.3 **Hierarchical Hypergraph Mapping.** Although the aforementioned hypergraph structure learning framework endows our HCCF with the capability of capturing global user- and item-wise collaborative relationships, we further supercharge our hypergraph neural architecture with a high-level of hyperedge-wise feature interaction. Towards this end, we augment our HCCF with multiple hypergraph neural layers by stacking different layers of hyperedges with size *H*. In particular, the set of foregoing hyperedges will serve as the first hypergraph layer, which will interact with deep hypergraph layers non-linearly. In form, the hyperedge embeddings of deep layers are derived with the encoding function $\psi(\cdot)$ as follows:

$$\bar{\mathbf{\Lambda}} = \psi^{c}(\mathbf{\Lambda}), \ \psi(\mathbf{X}) = \sigma(\mathbf{V}\mathbf{X}) + \mathbf{X}, \ \mathbf{\Lambda} = \mathcal{H}^{\top}\mathbf{E}$$
 (6)

where $\Lambda \in \mathbb{R}^{H \times d}$ denotes the hyperedge embeddings aggregated from the user/item representations $\mathbf{E} \in \mathbb{R}^{K \times d}$ as well as the learned node-hyperedge structures $\mathcal{H} \in \mathbb{R}^{K \times H}$ (K = I or J). Here, c denotes the number of hypergraph embedding layers. $\mathbf{V} \in \mathbb{R}^{H \times H}$ is a trainable parametric matrix for embedding projection. We adopt LeakyReLU as the activation function $\sigma(\cdot)$ to handle non-linearities. The residual connection operation is applied to the embedding generation across hypergraph layers. After the hierarchical hypergraph mapping, we refine the user/item representations:

$$\Gamma_l = \sigma(\mathcal{H} \cdot \bar{\Lambda}) = \sigma(\mathcal{H} \cdot \psi^c(\mathcal{H}^\top \cdot \mathbf{E})) \tag{7}$$

3.3 Multi-Order Aggregation and Prediction

To integrate the local dependency encoding with the global collaborative relation modeling, we iteratively perform the graph local embedding propagation and hypergraph information aggregation:

$$\mathbf{e}_{i,l}^{(u)} = \mathbf{z}_{i,l}^{(u)} + \Gamma_{i,l}^{(u)} + \mathbf{e}_{i,l-1}^{(u)}, \ \mathbf{e}_{j,l}^{(v)} = \mathbf{z}_{j,l}^{(v)} + \Gamma_{j,l}^{(v)} + \mathbf{e}_{j,l-1}^{(v)}$$




Figure 3: The illustration of hypergraph-enhanced contrasting architecture built over the hypergraph structure learning. (a) The hypergraph structure is parameterized with $\mathcal{H}^{(u)}$ and $\mathcal{H}^{(v)}$. (b) $\psi^{c}(\Lambda)$ represents the hierarchically structured multiple hypergraph neural layers. (c) Contrastive objectives $\mathcal{L}_{s}^{(u)}$ and $\mathcal{L}_{s}^{(v)}$ are generated via local-global cross-view supervision.

where $\mathbf{z}_{i,l}^{(u)}$ represents the *l*-th order embedding of user u_i aggregated from his/her locally connected neighbors. $\Gamma_{i,l}^{(u)}$ denotes the fused *l*-th order user representation through hyperedges. We further apply the residual operations for the embedding aggregation. The multi-order user/item embeddings are generated with the element-wise embedding summation, and the inner product of them is utilized to estimate the interaction preference score between user u_i and item v_i , formally is shown as follows:

$$\Psi_{i}^{(u)} = \sum_{l=0}^{L} \mathbf{E}_{i,l}^{(u)}, \ \Psi_{j}^{(v)} = \sum_{l=0}^{L} \mathbf{E}_{j,l}^{(v)}, \ \mathrm{Pr}_{i,j} = \Psi_{i}^{(u)\top} \Psi_{j}^{(v)}$$
(8)

Given these notations, we define our pair-wise marginal loss as:

$$\mathcal{L}_{r} = \sum_{i=0}^{I} \sum_{s=1}^{S} \max(0, 1 - \Pr_{i, p_{s}} + \Pr_{i, n_{s}})$$
(9)

For each user u_i , we respectively sample *S* positive (indexed by p_s) and negative (indexed by n_s) instances from their observed and non-interacted items.

3.4 Hypergraph-enhanced Contrastive Learning

This section describes how we enable our HCCF with the cross-view collaborative supervision under a hypergraph neural architecture, to augment the user representation with sparse supervision signals.

3.4.1 **Hypergraph-guided Contrasting.** We design our contrastive learning component by maximizing the agreement between the explicit user-item interactive relationships and the implicit hypergraphbased dependency. In particular, we generate two representation views as i) local collaborative relation encoding over the user-item interaction graph, and ii) global hypergraph structure learning among users/items. Such contrastive learning leverages the user and item self-discrimination, to offer auxiliary supervision signals from the local and global representation space.

3.4.2 **Cross-View Collaborative Supervision.** We take different views of the same user/item as the positive pairs $(\mathbf{z}_{i,l}, \Gamma_{i,l})$, and treat views of different users/items as negative pairs. By doing so, our model learns discriminative representations by contrasting the generated positive and negative instances. We formally define our contrastive loss for user representations with the InfoNCE [27] as:

$$\mathcal{L}_{s}^{(u)} = \sum_{i=0}^{I} \sum_{l=0}^{L} -\log \frac{\exp(s(\mathbf{z}_{i,l}^{(u)}, \Gamma_{i,l}^{(u)})/\tau)}{\sum_{i'=0}^{I} \exp(s(\mathbf{z}_{i,l}^{(u)}, \Gamma_{i',l}^{(u)})/\tau)}$$
(10)

where $s(\cdot)$ denotes the cosine similarity function and τ denotes the tunable temperature hyperparameter to adjust the scale for softmax. We perform the contrastive learning between the local user embedding $(\mathbf{z}_{i,l}^{(u)})$ and global hypergraph-guided representation $\Gamma_{i,l}^{(u)}$. This allows the local and global dependency views to collaboratively supervise each other, which enhances the user representation.

3.4.3 **Data Augmentation on Graph Structure.** To further alleviate the overfitting issue during the cross-view contrastive learning process, we design edge dropout operator over both the user-item interaction graph and the learned hypergraph structure as:

$$\bar{\mathcal{A}} := \mathbf{M}_G \circ \bar{\mathcal{A}}; \quad \mathcal{H} := \mathbf{M}_H \circ \mathcal{H}$$
(11)

where := denotes the assignment operator and \circ denotes the elementwise multiplication. $\mathbf{M}_G \in \mathbb{R}^{I \times J}$ and $\mathbf{M}_H \in \mathbb{R}^{J \times H}$ are binary mask matrices with dropout probability μ . We integrate our hypergraph contrastive loss with our CF loss into a unified objective as:

$$\mathcal{L} = \mathcal{L}_r + \lambda_1 \cdot (\mathcal{L}_s^{(u)} + \mathcal{L}_s^{(v)}) + \lambda_2 \cdot \|\Theta\|_{\mathrm{F}}^2$$
(12)

We minimize \mathcal{L} using Adam optimizer. The weight-decay regularization term is applied over parameters Θ .

3.5 In-Depth Analysis of HCCF

This section provides further analysis of our HCCF model with the theoretical discussion and time complexity analysis.

3.5.1 **Theoretical Analysis of HCCF.** Our hypergraph contrastive learning enhances the discrimination ability of graph-based CF representation paradigm by generating adaptive gradients from hard negative samples. Specifically, the influences of negative samples over the learned embeddings under the self-supervised learning architecture can be quantified as:

$$c(i') = \left(\bar{\Gamma}_{i',l}^{(u)} - (\bar{\mathbf{z}}_{i,l}^{(u)\top}\bar{\Gamma}_{i',l}^{(u)})\bar{\mathbf{z}}_{i,l}^{(u)}\right) \cdot \frac{\exp(\bar{\mathbf{z}}_{i,l}^{(u)\top}\bar{\Gamma}_{i,l}^{(u)}/\tau)}{\sum_{i'}\exp(\bar{\mathbf{z}}_{i,l}^{(u)\top}\bar{\Gamma}_{i',l}^{(u)}/\tau)} \quad (13)$$

where c(i') denotes the gradients related to negative sample i', $\bar{\Gamma}_{i',l}^{(u)} = \Gamma_{i',l}^{(u)} / \|\Gamma_{i',l}^{(u)}\|_2$ and $\bar{\mathbf{z}}_{i,l}^{(u)} = \mathbf{z}_{i,l}^{(u)} / \|\mathbf{z}_{i,l}^{(u)}\|_2$ are the normalized embeddings. By further analyzing the norm of c(i'), we can find it proportional to a unique function as:

$$\|c(i')\|_2 \propto \sqrt{1-x^2} \cdot \exp(\frac{x}{\tau}) \tag{14}$$

where $x = \bar{\mathbf{z}}_{i,l}^{(u)\top} \bar{\Gamma}_{i',l}^{(u)}$ is the cosine similarity between the embeddings from two contrastive views. As the similarity score increases, $\|c(i')\|_2$ increases dramatically, under proper τ settings. Inspired by

Table 1: Statistics of the experimental datasets.

Dataset	User #	Item #	Interaction #	Density		
Yelp	29601	24734	1517326	$2.1e^{-3}$		
Movielens	69878	10196	9988816	$1.4e^{-2}$		
Amazon-book	78578	77801	3190224	$5.2e^{-4}$		

the recent studies in [20, 38], our contrastive learning emphasizes the gradients from hard negative samples that are more similar to the positive ones, which improves the model training. In our hypergraph structure learning, we endow the CF paradigm with the power to capture the global user dependency without the limitation of observed user-item connections. This also allows the robust gradient updates of different user representations to influence with each other based on their latent global relatedness.

3.5.2 Model Complexity Analyses. The graph local collaborative relation encoding takes $O(L \times |\mathcal{A}| \times d)$ complexity, where *L* denotes the number of graph neural layers. $|\mathcal{A}|$ is the number of edges in user-item interaction graph. Additionally, the hypergraph message passing schema takes $O(L \times (I+J) \times H \times d)$ complexity with the node-hyperedge information propagation. In our contrastive learning paradigm, the cost is $O(L \times B \times (I+J) \times d)$, owing to our designed low-rank-based hypergraph structure learning. Here, *B* denotes the number of users/items included in a single batch. For the memory cost, HCCF only involves $O(H \times d)$ extra parameters in the hypergraph structure learning, as compared to existing GNN-based collaborative filtering models.

4 EVALUATION

Our experiments aim to answer the research questions as follows:

- **RQ1**: What is the performance of our HCCF as compared to various state-of-the-art recommender systems?
- **RQ2**: How does the hypergraph structure learning and crossview contrastive learning contribute to the performance?
- RQ3: How does HCCF perform in alleviating data sparsity?
- **RQ4**: How do the key hyperparameters influence the performance of the proposed HCCF framework?
- **RQ5**: How does the hypergraph-enhanced global dependency modeling benefit the model interpretation?

4.1 Experimental Settings

4.1.1 Evaluation Datasets. We conduct experiments on three public datasets. Yelp: this dataset has been widely adopted for evaluating recommender systems with the task of business venue recommendation. MovieLens: it is a movie recommendation dataset. We follow the same processing rubric in [13] using the 10-core setting by keeping users and items with at least 10 interactions. Amazon-book: this dataset records user ratings on products with book category on Amazon with the 20-core setting. Table 1 presents the statistics of all datasets. Experimented datasets and codes have been released (refer to the link provided in the abstract).

4.1.2 **Evaluation Protocols and Metrics.** Following the same data partition rubrics in most recent graph CF models [35, 43], we generate our training, validation and test set with the ratio of 7:1:2. To mitigate the sampling bias, we evaluate the prediction accuracy using the all-ranking protocol [12] over all items. We adopt

Recall@N and *Normalized Discounted Cumulative Gain (NDCG)@N* as the metrics, which are widely used in recommendation [35, 40].

4.1.3 **Baseline Methods.** We compare HCCF with 15 baselines covering various recommendation paradigms.

Conventional Matrix Factorization Approach.

• **BiasMF** [21]. It is a widely adopted baseline which is developed over the matrix factorization with user and item bias.

MLP-enhanced Collaborative Filtering.

 NCF [13]. It is neural CF model which encodes the non-linear feature interactions with multiple hidden layers. In particular, we use two hidden layers with the same embedding dimensionality.

Autoencoder-based Collaborative Filtering Model.

• AutoR [30]. It utilizes Autoencoder as the embedding projection function with the reconstruction objective to generate latent representations for observed user-item interactions.

GNN-based Collaborative Filtering Frameworks.

- GC-MC [1]: The graph convolutional operations are applied to capture user-item dependency based on neighbor relationships.
- **PinSage** [44]: In the message passing of PinSage, the neighbor relations are generated based on the random walk sampling strategy. It generates negative instances using the PageRank score.
- NGCF [35]: this approach designs graph embedding propagation layers to generate user/item representations, by aggregating feature embeddings with high-order connection information.
- **ST-GCN** [47]: it supplements the GCN-based with the reconstruction task of masked node embeddings to address the limitation of label leakage issue. ST-GCN integrates graph convolutional encoder-decoders with intermediate supervision.
- LightGCN [12]: it proposes to simply the burdensome NGCF framework by removing the non-linear projection and embedding transformation during the message passing. The sum-based pooling is used for user representation generation.
- GCCF [4]: it enhances the graph neural network-based CF from two perspectives: i) omitting the non-linear transformation; ii) incorporating the residual network structure.

Disentangled Graph Learning for Recommendation.

• **DGCF** [36]. it investigates the fine-grained user intention to enhance the representation ability of CF framework by disentangling multiple latent factors for user representation.

Recommendation with Hypergraph Neural Networks.

- **HyRec** [33]. It leverages the hypergraph structure to model relationships between user and his/her interacted items, by considering multi-order information in a dynamic environment.
- **DHCF** [18]. The new developed jump hypergraph convolution is introduced into the dual-channel CF to perform message passing with prior information. The divide-and-conquer scheme is used for dual-channel learning.

Self-Supervised Learning for Recommendation.

- MHCN [45]. It enhances the graph neural network-based recommendation with the self-supervision signals generated from the graph informax network, by maximizing the mutual information between node embedding and graph-level representation.
- **SGL** [38]. This state-of-the-art self-supervised graph learning method directly changes the structures of user-item interaction graphs for data augmentation with i) probability-based node and edge dropout operations; ii) random walk-based sampling.

	Tuble 2. I efformatice comparison on reip, movelens, rinazon autusets in terms of Actual and Abeo.																	
Data	Metric	BiasMF	NCF	AutoR	GCMC	PinSage	NGCF	STGCN	LightGCN	GCCF	DGCF	HyRec	DHCF	MHCN	SLRec	SGL	HCCF	p-val.
Yelp	Recall@20	0.0190	0.0252	0.0259	0.0266	0.0345	0.0294	0.0309	0.0482	0.0462	0.0466	0.0472	0.0449	0.0503	0.0476	0.0526	0.0607	2×10^{-6}
	NDCG@20	0.0161	0.0202	0.0210	0.0251	0.0288	0.0243	0.0262	0.0409	0.0398	0.0395	0.0395	0.0381	0.0424	0.0398	0.0444	0.0510	5×10^{-8}
leip	Recall@40	0.0371	0.0487	0.0504	0.0585	0.0599	0.0522	0.0504	0.0803	0.0760	0.0774	0.0791	0.0751	0.0826	0.0821	0.0869	0.1007	3×10^{-6}
	NDCG@40	0.0227	0.0289	0.0301	0.0373	0.0385	0.0330	0.0332	0.0527	0.0508	0.0511	0.0522	0.0493	0.0544	0.0541	0.0571	0.0658	4×10^{-7}
	Recall@20	0.0878	0.1097	0.1230	0.1411	0.1706	0.1611	0.1298	0.1789	0.1742	0.1763	0.1801	0.1363	0.1497	0.1758	0.1833	0.2048	3×10^{-3}
MLens	NDCG@20	0.1197	0.1297	0.1667	0.1731	0.2108	0.1961	0.1639	0.2128	0.2109	0.2101	0.2178	0.1726	0.1814	0.2003	0.2205	0.2467	4×10^{-7}
101LCIIS	Recall@40	0.1753	0.1634	0.1908	0.2106	0.2724	0.2594	0.2006	0.2650	0.2606	0.2681	0.2685	0.2171	0.2250	0.2633	0.2768	0.3081	8×10^{-6}
	NDCG@40	0.1381	0.1427	0.1785	0.1865	0.2362	0.2225	0.1782	0.2322	0.2331	0.2319	0.2340	0.1901	0.1962	0.2360	0.2426	0.2717	7×10^{-7}
	Recall@20	0.0093	0.0142	0.0131	0.0103	0.0213	0.0222	0.0192	0.0319	0.0317	0.0211	0.0302	0.0280	0.0296	0.0285	0.0327	0.0344	2×10^{-4}
Amazon	NDCG@20	0.0049	0.0085	0.0099	0.0074	0.0158	0.0160	0.0144	0.0236	0.0243	0.0154	0.0225	0.0202	0.0219	0.0238	0.0249	0.0258	5×10^{-3}
1 11102011	Recall@40	0.0196	0.0223	0.0202	0.0217	0.0366	0.0376	0.0312	0.0499	0.0483	0.0351	0.0432	0.0471	0.0489	0.0463	0.0531	0.0561	2×10^{-4}
	NDCG@40	0.0103	0.0133	0.0123	0.0124	0.0210	0.0213	0.0184	0.0290	0.0285	0.0201	0.0246	0.0272	0.0284	0.0314	0.0312	0.0330	2×10^{-3}

Table 2: Performance comparison on Yelp, MovieLens, Amazon datasets in terms of Recall and NDCG.

• **SLRec** [43]. In this method, the feature correlations are considered as the additional regularization for improving recommender systems with a multi-task self-supervised learning approach.

4.1.4 **Hyperparameter Settings.** We use Adam optimizer with the learning rate of $1e^{-3}$ and 0.96 decay ratio for model inference. The hidden state dimensionality is configured as 32. We stack two propagation layers for graph local embedding propagation. In our hypergraph learning, the number of hyperedges and hierarchical hypergraph mapping layers are set as 128 and 3, respectively. The batch size and dropout ratio are selected from {64, 128, 256, 512} and {0.25, 0.5, 0.75}, respectively. The regularization weight λ_1 and λ_2 are tuned from the ragne { $1e^{-5}$, $1e^{-4}$, $1e^{-3}$, $1e^{-2}$ } for loss balance. The temperature parameter τ is searched from the range {0.1, 0.3, 1, 3, 10} to control the strength of gradients in our contrastive learning. The effect of τ is further studied in the following subsection.

4.2 Performance Validation (RQ1)

In this section, we analyze the evaluation results and summarize the following observations and conclusions.

- Overall Performance Validation. As the experimental result shown in Table 2, our HCCF consistently outperforms all baselines across different datasets in terms of all evaluation metrics. This observation validates the superiority of our HCCF method, which can be attributed to: i) By uncovering latent global collaborative effects, HCCF can not only model the holistic dependencies among users, but also preserves individual user interaction patterns with better discrimination ability. ii) Benefiting from our hypergraph contrastive learning schema, HCCF fulfills the effective self-data augmentation for sparse interactions, with cross-view (from locally to globally) supervision signals.
- Superiority of Hypergraph Structure Learning. Additionally, hypergraph recommendation methods (*i.e.*, DHCF and HyRec) outperform most of GNN-based CF models (*e.g.*, PinSage, NGCF, ST-GCN), suggesting the effectiveness of modeling high-order collaborative effects under hypergraph architecture. The significant improvement of our HCCF over competitive hypergraph recommender systems, further indicates that our designed learnable hypergraph neural structure paradigm is good at i) adaptively fulfilling the modeling of global collaborative dependencies among users and items; ii) alleviating the over-smoothing effect among neighboring node embeddings in GNN-based CF models. Specifically, representations on user preference are refined by both local connected users/items and global dependent users.

• Effectiveness of Hypergraph Contrastive Learning. With the analysis of HCCF across different datasets, we notice that the performance gap with baselines on Amazon data is larger than other datasets. This observation validates the effectiveness of HCCF in handing the sparse user-item interactions. Furthermore, compared with state-of-the-art self-supervised learning recommendation models (i.e., MHCN, SGL, SLRec), HCCF consistently achieves better performance. Specifically, SGL uses the probability-based randomly masking operations to generate contrastive views, which may dropout important supervision interaction labels. Furthermore, following the generative self-supervised frameworks, MHCN and SLRec attempt to integrate additional learning tasks with the main recommendation objective. However, the incorporated self-supervised learning objective may not be able to adapt well on the recommendation loss optimization, which significantly hurts the representation ability of recommender systems. This justifies the superiority of our hypergraph contrastive learning paradigm, via effectively integrating hypergraph strucutre learning with the cross-view contrastive selfsupervised signals for collaborative filtering.

4.3 Ablation Study of HCCF (RQ2)

We explore the component effects of HCCF from: i) global hypergraph structure learning; ii) cross-view contrastive self-augmentation.

• Effect of Hypergraph Structure Learning. We investigate the importance of hypergraph learning for contributing the performance improvement, by generating two variants by: (1) removing the hierarchical hypergraph mapping for hyperedge-wise feature interaction, termed as *-HHM*; (2) disabling the low-rank hypergraph dependency encoding, termed as *-LowR*.

Results. We report the evaluation results in Table 3. Without the exploration of hierarchically structured hypergraph mapping, *-HHM* downgrades the recommendation accuracy. This observation justifies the rationality of enabling the hierarchical non-linear feature interaction through deep hypergraph neural layers. Additionally, while *-LowR* preserves the multi-layer hypergraph structures, it directly learns a $\mathbb{R}^{I \times H}$ transformation matrix with larger parameter size, and thus may lead to the overfitting. With the parameterized hypergraph structure learning in a low-rank manner, we not only simplify the model size but also alleviate the overfitting via effective global message passing.

• Effect of Cross-View Contrastive Self-Supervision. We also investigate the effectiveness of another core of HCCF's cross-view hypergraph-based contrastive learning. Specifically, we build a

Table 3: Ablation study on key components of HCCF.

Data	Ye	elp	Movi	eLens	Amazon						
Variants	Recall	NDCG	Recall	NDCG	Recall	NDCG					
Top-20											
-LowR	0.0587	0.0496	0.1937	0.2317	0.0319	0.0236					
-HHM	0.0599	0.0505	0.1891	0.2319	0.0305	0.0230					
-Hyper	0.0584	0.0490	0.1847	0.2233	0.0257	0.0188					
-CCL	0.0566	0.0484	0.1984	0.2397	0.0282	0.0217					
HCCF	0.0607	0.0510	0.2048	0.2467	0.0344	0.0258					
Top-40											
-LowR	0.0987	0.0634	0.2984	0.2622	0.0530	0.0309					
-HHM	0.0992	0.0646	0.2914	0.2565	0.0505	0.0297					
-Hyper	0.0982	0.0625	0.2780	0.2450	0.0419	0.0243					
-CCL	0.0937	0.0619	0.3021	0.2650	0.0460	0.0276					
HCCF	0.1007	0.0658	0.3081	0.2717	0.0561	0.0330					

variant -*CCL* by disabling the contrastive learning between the user-item interaction encoding and hypergraph dependency modeling. Another model variant *-Hyper* only relies on the encoding of local collaborative relations to produce user and item representations. This variant does not capture the global user- and item-wise collaborative relationships through the hypergraph.

Results. Clearly, HCCF always achieves the best performance as compared to competitive model variants, which further emphasizes the benefits of our hypergraph contrastive learning paradigm. To be specific, 1) our hypergraph structure learning is of great significance for the explicitly modeling of global property for user-item interaction patterns. It is in line with our assumption that our hypergraph neural network can alleviate the over-smoothing effect caused by local information aggregation. 2) The cross-view local-global contrastive learning paradigm indeed improves the performance of GNN-based collaborative filtering, with our self-supervised contrastive objectives. The incorporated intrinsic supervision labels reinforce the user-item interaction embedding space via the self-discrimination from local and global collaborative views.

4.4 In Depth Analysis of HCCF's Benefits (RQ3)

4.4.1 **Robustness of HCCF in Alleviating Data Sparsity.** To verify whether HCCF is robust to sparse issue which is ubiquitous in recommender systems, we partition users into different groups based on their interaction numbers (*e.g.*, 20-25, 25-30). From the results shown in Figure 4, our HCCF shows potentials in addressing the data sacristy issue. We ascribe this superiority to the HCCF's ability of cooperatively supervision between local collaborative relation encoding and global dependency learning. Furthermore, SGL is relatively unstable than HCCF across different sparsity degrees. It suggests that randomly dropping nodes or edges may discard important information of the original user-item interaction structures, making the training process unstable. The GCN-based method LightGCN may not learn quality representations for user preference by only relying on the sparse interaction data.

4.4.2 Effect of HCCF in Addressing Over-Smoothing. With our designed cross-view hypergraph-guided contrastive learning component, user/item embeddings can be regularized to be far away based on their self-discrimination between the local-level and global-level collaborative relations. By doing so, the graph-based over-smoothing effect can be alleviated in our framework. To validate the effectiveness of our method in alleviating over-smoothing

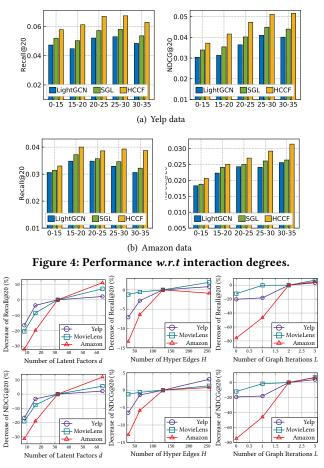


Figure 5: Hyperparameter study of the HCCF.

effect, in addition to the superior performance produced by our HCCF, we also calculate the Mean Average Distance (MAD) [3] over all node embedding pairs learned by the trained HCCF and two variants: i) -CCL (without the hypergraph-enhanced cross-view contrastive learning); ii) -Hyper (without the hypergraph neural network). The quantitative MAD metric measures the smoothness of a graph in terms of its node embeddings. The measurement results are shown in Table 4, where User and Item refer to the average similarity score between user nodes and item nodes, respectively. From the results, we can observe the more obvious over-smoothing phenomenon of the compared variants (-CCL) and (-Hyper) with smaller embedding distance scores. The above observations further justify the effectiveness of our hypergraph-enhanced contrastive learning in i) alleviating the over-smoothing issue in user representations refined with graph propagation; ii) empowering the model generalization ability of graph-based neural CF paradigm.

Table 4: Graph smoothness degrees (measured by MAD) with the encoded user/item embeddings by comparing with the variant -CCL (disabling the cross-view contrastive learning).

					Data				
Veln	User	0.9505	0.9106	0.9747	Amazon	User	0.7911	0.9106	0.9671
reip	Item	0.7673	0.9498	0.9671		Item	0.8570	0.7106	0.8573




Figure 6: Impact of τ in contrastive learning on Yelp data.

4.5 Hyperparameter Analysis (RQ4)

In this section, we study the impact of several key hyperparameters (*e.g.*, embedding dimensionality *d*, # of hyperedge *H*, # of graph message passing layers, temperature τ) in our HCCF framework and report the evaluation results in Figure 5 and Figure 6.

- (i) The best performance can be achieved with the hidden state dimensionality of 32 and the number of hyperedges of 128. In our hypergraph neural network, hyperedges serve as the intermediate connections acorss different users/items. Different hyperedge-specific cross-node structures may reflect different types of dependency semantics. Therefore, the recommendation performance degradation may stem from the overfitting issue with larger number of hyperedge-specific representation spaces.
- (ii) Two layers of graph encoder is sufficient to offer good performance, since our hypergraph-enhanced CF paradigm encourages the global collaborative relation modeling. Through the message passing across both adjacent and non-adjacent users under a hypergraph architecture, users with similar interaction patterns will be reinforced to achieve similar representations, so as to preserve the global collaborative context.
- (iii) In our framework of hypergraph-enhanced contrastive learning, the temperature parameter τ controls the strength of identifying hard negatives with the incorporated contrastive objective. From evaluation results in Figure 6, we can observe that the best performance can be achieved with $\tau = 1.0$. Additionally, larger τ value ($\tau > 1.0$) brings smaller gradient for learning hard negatives, which leads to the performance degradation.

4.6 Case Study (RQ5)

We qualitatively investigate the effects of our hypergraph-enhanced contrastive learning framework to i) capture the implicit global user dependency, and ii) alleviate the over-smoothing issue.

4.6.1 **Global User Dependency.** We project user embeddings into different colors based on the vector values. The user-hyperedge dependencies are presented with different colors in terms of the relevance scores. As shown in Figure 7, although the non-overlap interacted items between different users, our HCCF can distill their implicit dependency by generating similar embeddings (with similar node colors) only using user interaction data. For example, (1) the user pair with same interacted category flavors (u_0 , u_1) and (u_4 , u_7); (2) socially connected users (u_5 , u_9). This provides an intuitive impression of HCCF's ability in exploring the implicit global user dependency for offering better recommendation performance.

4.6.2 **Over-Smoothing Alleviation.** we conduct case study to further investigate the ability of HCCF against the over-smoothing




Figure 7: Case study of capturing implicit global dependencies across users through our hypergraph learning.

issue. We randomly pick a closely-connected sub-graph for users. The learned node embeddings and the co-interaction connections are shown in Figure 8. Here we also compare HCCF with the -Hyper variant. We can see that -Hyper assigns similar embeddings to all users in the sub-graph, as their embeddings are smoothed by each other. In contrast, HCCF is able to learn the subtle differences and divide the users into roughly two groups (colored with green and brown), even if two nodes are strongly bonded together (*e.g.*, user 17 and user 43). By checking the detailed information about the sampled users, we found that the green users (16, 18, 43, 96) interact with much fewer items (< 50 interactions) compared to the brown users (\geq 100 interactions). Overall, HCCF is able to distinguish users with sparse and dense interactions.




Figure 8: Learned embeddings of users in a closelyconnected sub-graph given by HCCF with and without our hypergraph learning compoent (model variant -Hyper).

5 CONCLUSION

This paper mainly focuses on enhancing the neural collaborative filtering with the hypergraph-guided self-supervised learning paradigm. We present HCCF which is featured by a hypergraph structure learning module and a cross-view hypergraph contrastive encoding schema. Our hypergraph contrastive CF framework learns better user representations by simultaneously characterizing both local and global collaborative relationships in a joint embedding space. Extensive experiments validate the superiority of HCCF towards competitive baselines. In future, we may explore the dynamic user dependency with a time-aware hypergraph embedding function, to inject temporal context into our CF architecture.

ACKNOWLEDGMENTS

This research is supported by the research grants from the Department of Computer Science & Musketeers Foundation Institute of Data Science at the University of Hong Kong, the Natural Sciences & Engineering Research Council (NSERC) of Canada.

REFERENCES

- Rianne van den Berg, Thomas N Kipf, and Max Welling. 2017. Graph convolutional matrix completion. In *KDD*.
- [2] Hannan Cao, Wenmian Yang, and Hwee Tou Ng. 2021. Grammatical Error Correction with Contrastive Learning in Low Error Density Domains. In *EMNLP*. 4867–4874.
- [3] Deli Chen, Yankai Lin, Wei Li, Peng Li, Jie Zhou, and Xu Sun. 2020. Measuring and relieving the over-smoothing problem for graph neural networks from the topological view. In AAAI, Vol. 34. 3438–3445.
- [4] Lei Chen, Le Wu, Richang Hong, Kun Zhang, and Meng Wang. 2020. Revisiting Graph Based Collaborative Filtering: A Linear Residual Graph Convolutional Network Approach. In AAAI, Vol. 34. 27–34.
- [5] Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. 2020. A simple framework for contrastive learning of visual representations. In *ICML*. PMLR, 1597–1607.
- [6] Xu Chen, Kun Xiong, Yongfeng Zhang, Long Xia, et al. 2020. Neural Featureaware Recommendation with Signed Hypergraph Convolutional Network. *TOIS* 39, 1 (2020), 1–22.
- [7] Xin Dong, Lei Yu, Zhonghuo Wu, Yuxia Sun, Lingfeng Yuan, and Fangxi Zhang. 2017. A hybrid collaborative filtering model with deep structure for recommender systems. In AAAI, Vol. 31.
- [8] Yifan Feng, Haoxuan You, Zizhao Zhang, Rongrong Ji, and Yue Gao. 2019. Hypergraph neural networks. In AAAI, Vol. 33. 3558–3565.
- [9] Yue Gao, Zizhao Zhang, Haojie Lin, Xibin Zhao, Shaoyi Du, and Changqing Zou. 2020. Hypergraph learning: Methods and practices. *TPAMI* (2020).
- [10] Qingyu Guo, Fuzhen Zhuang, Chuan Qin, Hengshu Zhu, Xing Xie, Hui Xiong, and Qing He. 2020. A survey on knowledge graph-based recommender systems. *TKDE* (2020).
- [11] Li He, Hongxu Chen, Dingxian Wang, Shoaib Jameel, Philip Yu, and Guandong Xu. 2021. Click-Through Rate Prediction with Multi-Modal Hypergraphs. In *CIKM*. 690–699.
- [12] Xiangnan He, Kuan Deng, Xiang Wang, Yan Li, Yongdong Zhang, and Meng Wang. 2020. Lightgcn: Simplifying and powering graph convolution network for recommendation. In SIGIR. 639–648.
- [13] Xiangnan He, Lizi Liao, Hanwang Zhang, Liqiang Nie, Xia Hu, and Tat-Seng Chua. 2017. Neural collaborative filtering. In WWW. 173–182.
- [14] Xiangnan He, Hanwang Zhang, Min-Yen Kan, and Tat-Seng Chua. 2016. Fast matrix factorization for online recommendation with implicit feedback. In SIGIR, 549–558.
- [15] Chao Huang. 2021. Recent Advances in Heterogeneous Relation Learning for Recommendation. arXiv preprint arXiv:2110.03455 (2021).
- [16] Chao Huang, Jiahui Chen, Lianghao Xia, Yong Xu, Peng Dai, Yanqing Chen, Liefeng Bo, Jiashu Zhao, and Jimmy Xiangji Huang. 2021. Graph-enhanced multi-task learning of multi-level transition dynamics for session-based recommendation. In AAAI.
- [17] Chao Huang, Xian Wu, Xuchao Zhang, Chuxu Zhang, Jiashu Zhao, Dawei Yin, and Nitesh V Chawla. 2019. Online purchase prediction via multi-scale modeling of behavior dynamics. In KDD. 2613–2622.
- [18] Shuyi Ji, Yifan Feng, Rongrong Ji, Xibin Zhao, Wanwan Tang, and Yue Gao. 2020. Dual channel hypergraph collaborative filtering. In KDD. 2020–2029.
- [19] Jianwen Jiang, Yuxuan Wei, Yifan Feng, Jingxuan Cao, and Yue Gao. 2019. Dynamic Hypergraph Neural Networks. In IJCAI. 2635–2641.
- [20] Prannay Khosla, Piotr Teterwak, Chen Wang, Aaron Sarna, Yonglong Tian, Phillip Isola, Aaron Maschinot, Ce Liu, and Dilip Krishnan. 2020. Supervised contrastive learning. NIPS 33 (2020), 18661–18673.
- [21] Yehuda Koren, Robert Bell, et al. 2009. Matrix factorization techniques for recommender systems. Computer 8 (2009), 30–37.
- [22] Xiaoling Long, Chao Huang, Yong Xu, Huance Xu, Peng Dai, Lianghao Xia, and Liefeng Bo. 2021. Social Recommendation with Self-Supervised Metagraph Informax Network. In CIKM. 1160–1169.
- [23] Jianxin Ma, Peng Cui, Kun Kuang, Xin Wang, and Wenwu Zhu. 2019. Disentangled graph convolutional networks. In *ICML*. PMLR, 4212–4221.
- [24] Jianxin Ma, Chang Zhou, Peng Cui, Hongxia Yang, and Wenwu Zhu. 2019. Learning disentangled representations for recommendation. In NIPS. 5711–5722.
- [25] Yimeng Min, Frederik Wenkel, and Guy Wolf. 2020. Scattering gcn: Overcoming oversmoothness in graph convolutional networks. (2020).
- [26] Andriy Mnih and Russ R Salakhutdinov. 2008. Probabilistic matrix factorization. In NIPS. 1257–1264.

- [27] Aaron van den Oord, Yazhe Li, and Oriol Vinyals. 2018. Representation learning with contrastive predictive coding. arXiv preprint arXiv:1807.03748 (2018).
- [28] Jizong Peng, Ping Wang, Christian Desrosiers, and Marco Pedersoli. 2021. Selfpaced contrastive learning for semi-supervised medical image segmentation with meta-labels. *NIPS* 34 (2021).
- Jiezhong Qiu, Qibin Chen, Yuxiao Dong, Jing Zhang, Hongxia Yang, Ming Ding, Kuansan Wang, and Jie Tang. 2020. Gcc: Graph contrastive coding for graph neural network pre-training. In *KDD*. 1150–1160.
 Suvash Sedhain, Aditya Krishna Menon, Scott Sanner, and Lexing Xie. 2015.
- [30] Suvash Sedhain, Aditya Krishna Menon, Scott Sanner, and Lexing Xie. 2015. Autorec: Autoencoders meet collaborative filtering. In WWW. 111–112.
- [31] Dario Stojanovski, Benno Krojer, Denis Peskov, and Alexander Fraser. 2020. ContraCAT: Contrastive coreference analytical templates for machine translation. In COLING. 4732–4749.
- [32] Jianing Sun, Zhaoyue Cheng, Saba Zuberi, Felipe Pérez, and Maksims Volkovs. 2021. HGCF: Hyperbolic Graph Convolution Networks for Collaborative Filtering. In WWW. 593–601.
- [33] Jianling Wang, Kaize Ding, Liangjie Hong, Huan Liu, and James Caverlee. 2020. Next-item recommendation with sequential hypergraphs. In SIGIR. 1101–1110.
- [34] Pengfei Wang, Hanxiong Chen, Yadong Zhu, Huawei Shen, and Yongfeng Zhang. 2019. Unified collaborative filtering over graph embeddings. In SIGIR. 155–164.
- [35] Xiang Wang, Xiangnan He, Meng Wang, Fuli Feng, and Tat-Seng Chua. 2019. Neural Graph Collaborative Filtering. In SIGIR.
- [36] Xiang Wang, Hongye Jin, An Zhang, Xiangnan He, Tong Xu, and Tat-Seng Chua. 2020. Disentangled graph collaborative filtering. In SIGIR. 1001–1010.
- [37] Wei Wei, Chao Huang, Lianghao Xia, Yong Xu, Jiashu Zhao, and Dawei Yin. 2022. Contrastive Meta Learning with Behavior Multiplicity for Recommendation. In WSDM. 1120–1128.
- [38] Jiancan Wu, Xiang Wang, Fuli Feng, Xiangnan He, Liang Chen, Jianxun Lian, and Xing Xie. 2021. Self-supervised graph learning for recommendation. In SIGIR. 726–735.
- [39] Yao Wu, Christopher DuBois, Alice X Zheng, and Martin Ester. 2016. Collaborative denoising auto-encoders for top-n recommender systems. In WSDM. ACM, 153–162.
- [40] Lianghao Xia, Chao Huang, Yong Xu, Peng Dai, Xiyue Zhang, Hongsheng Yang, Jian Pei, and Liefeng Bo. 2021. Knowledge-enhanced hierarchical graph transformer network for multi-behavior recommendation. In AAAI, Vol. 35. 4486–4493.
- [41] Lianghao Xia, Yong Xu, Chao Huang, Peng Dai, and Liefeng Bo. 2021. Graph meta network for multi-behavior recommendation. In SIGIR. 757–766.
- [42] Hong-Jian Xue, Xinyu Dai, Jianbing Zhang, Shujian Huang, and Jiajun Chen. 2017. Deep Matrix Factorization Models for Recommender Systems. In *IJCAI*. 3203–3209.
- [43] Tiansheng Yao, Xinyang Yi, Derek Zhiyuan Cheng, et al. 2021. Self-supervised Learning for Large-scale Item Recommendations. In CIKM. 4321–4330.
- [44] Rex Ying, Ruining He, Kaifeng Chen, Pong Eksombatchai, William L Hamilton, and Jure Leskovec. 2018. Graph convolutional neural networks for web-scale recommender systems. In KDD. 974–983.
- [45] Junliang Yu, Hongzhi Yin, Jundong Li, Qinyong Wang, Nguyen Quoc Viet Hung, and Xiangliang Zhang. 2021. Self-Supervised Multi-Channel Hypergraph Convolutional Network for Social Recommendation. In WWW. 413–424.
- [46] Yang Yuhao, Chao Huang, Lianghao Xia, and Chenliang Li. 2022. Knowledge graph contrastive learning for recommendation. In SIGIR.
- [47] Jiani Zhang, Xingjian Shi, Shenglin Zhao, and Irwin King. 2019. Star-gcn: Stacked and reconstructed graph convolutional networks for recommender systems. In IJCAI.
- [48] Jianan Zhao, Xiao Wang, Chuan Shi, Binbin Hu, Guojie Song, and Yanfang Ye. 2021. Heterogeneous Graph Structure Learning for Graph Neural Networks. In AAAI.
- [49] Lei Zheng, Chaozhuo Li, Chun-Ta Lu, Jiawei Zhang, and Philip S Yu. 2019. Deep Distribution Network: Addressing the Data Sparsity Issue for Top-N Recommendation. In SIGIR. 1081–1084.
- [50] Kaixiong Zhou, Xiao Huang, Yuening Li, Daochen Zha, Rui Chen, and Xia Hu. 2020. Towards deeper graph neural networks with differentiable group normalization. In NIPS.
- [51] Yanqiao Zhu, Yichen Xu, Feng Yu, Qiang Liu, Shu Wu, and Liang Wang. 2021. Graph contrastive learning with adaptive augmentation. In WWW. 2069–2080.
- [52] Lixin Zou, Long Xia, Yulong Gu, Xiangyu Zhao, Weidong Liu, Jimmy Xiangji Huang, and Dawei Yin. 2020. Neural interactive collaborative filtering. In SIGIR. 749–758.