

Modern Baselines for SPARQL Semantic Parsing

Debayan Banerjee
debayan.banerjee@uni-hamburg.de
Universität Hamburg
Hamburg, Germany

Pranav Ajit Nair*
pranavajitnair.cse18@itbhu.ac.in
Indian Institute of Technology (BHU)
Varanasi, India

Jivat Neet Kaur*
t-kaurjivat@microsoft.com
Microsoft Research
Bengaluru, India

Ricardo Usbeck
ricardo.usbeck@uni-hamburg.de
Universität Hamburg
Hamburg, Germany

Chris Biemann
christian.biemann@uni-hamburg.de
Universität Hamburg
Hamburg, Germany

ABSTRACT

In this work, we focus on the task of generating SPARQL queries from natural language questions, which can then be executed on Knowledge Graphs (KGs). We assume that gold entity and relations have been provided, and the remaining task is to arrange them in the right order along with SPARQL vocabulary, and input tokens to produce the correct SPARQL query. Pre-trained Language Models (PLMs) have not been explored in depth on this task so far, so we experiment with BART, T5 and PGNs (Pointer Generator Networks) with BERT embeddings, looking for new baselines in the PLM era for this task, on DBpedia and Wikidata KGs. We show that T5 requires special input tokenisation, but produces state of the art performance on LC-QuAD 1.0 and LC-QuAD 2.0 datasets, and outperforms task-specific models from previous works. Moreover, the methods enable semantic parsing for questions where a part of the input needs to be copied to the output query, thus enabling a new paradigm in KG semantic parsing. Code and data used for this work can be found at <https://github.com/debayan/sigir2022-sparqlbaselines>.

CCS CONCEPTS

• Information systems → Question answering.

KEYWORDS

Knowledge Graph, Question Answering, Semantic Parsing, SPARQL

ACM Reference Format:

Debayan Banerjee, Pranav Ajit Nair, Jivat Neet Kaur, Ricardo Usbeck, and Chris Biemann. 2022. Modern Baselines for SPARQL Semantic Parsing. In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '22)*, July 11–15, 2022, Madrid, Spain. ACM, New York, NY, USA, 6 pages. <https://doi.org/10.1145/3477495.3531841>

*Both authors contributed equally to this research.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

SIGIR '22, July 11–15, 2022, Madrid, Spain

© 2022 Copyright held by the owner/author(s). Publication rights licensed to ACM. ACM ISBN 978-1-4503-8732-3/22/07...\$15.00
<https://doi.org/10.1145/3477495.3531841>

1 INTRODUCTION

Knowledge Graph Question Answering (KGQA) is the task of finding answers to questions posed in natural language, using triples present in a KG. Typically the following steps are followed in KGQA: 1) Objects of interest in the natural language question (NLQ) are detected and linked to the KG in a step called entity linking (EL). 2) The relation between the objects is discovered and linked to the KG in a step called relation linking (RL). 3) A formal query, usually SPARQL, is formed with the linked entities and relations. The query is executed on the KG to fetch the answer. This step is called Query Building (QB), and is the focus of this paper. We assume that gold entities and relations are made available, and our task is to generate the correct SPARQL query. We experiment with a Pointer Generator Network [29] with special vectorisation, and with more recent pre-trained language models such as T5 [26] and BART [22]. We choose models that are able to copy tokens from the input text to the output SPARQL query, apart from being able to handle normal category of questions. Questions which require copy operations are found in the dataset LC-QuAD 2.0 [9], for example:

Is it true that an Olympic-size swimming pool's operating temperature is equal to 22.4 ?

which has the corresponding SPARQL over Wikidata KG [42]:

ASK WHERE

```
{  
  wd:Q2084454 wdt:P5066 ?obj  
  filter(?obj = 22.4)  
}
```

We found no previous work for SPARQL QB that can handle such questions. We also show that on datasets where copying is not required (LC-QuAD 1.0 [39]), the approaches still exhibit a strong performance.

Our contribution is as follows:

- We find that with the correct input tokenisation, T5 outperforms all previous works and achieves state of the art performance on LC-QuAD 1.0 over DBpedia [20], and LC-QuAD 2.0 over Wikidata.

2 RELATED WORK

Diefenbach et al. [7] studied several QA systems and concluded that the QB step is generally intertwined with rest of the modules in a pipeline, and hence not evaluated separately. Later, with the advent of Frankenstein [33] and Canary [32], which are frameworks that allow modular construction of an end-to-end KGQA pipeline, it

was seen that the QB module is the least researched aspect of the pipeline. Soon after, Singh et al. [34] presented a comprehensive survey of individual components of KGQA pipeline and evaluated Sina [31] and NLIWOD¹ as individual QB components.

Several recent works attempt to solve complex query building by constructing intermediate query representations, such as staged query graphs [6, 16, 19, 23, 43] based on λ -calculus or skeleton structures [37]. These systems have no built-in method of performing copy operations from input text to output query. The system based on skeleton structure requires manual annotation of queries to corresponding skeletal structures, apart from the final generated query. Some other solutions rely on templates [1, 8, 35], which generally have the natural limitation of the query only being limited to the templates chosen beforehand [2, 41]. In the work of Ding et al. [8], the templates are discovered from the input training data, however, the implementation of the method of discovery of such templates, structures, and sub-structures in the queries is dataset specific. It is unclear if the same method of discovery can scale to all datasets.

Most systems that work over query graphs and use λ -calculus start with the assumption that entities are already linked, and the relations must still be found. However, with the availability of joint entity and relation linkers such as EARL [10] and Falcon [28], we can develop semantic parsers which focus only on query building and receive both entities and relations pre-linked.

For non-KG semantic parsing, PLMs have been evaluated recently with a focus on compositional generalisation [30]. For KG semantic parsing, the Compositional Freebase Questions (CFQ) [18] dataset that is based on the Freebase KG [3], has reported results with non-pre-trained Transformer-based models, while subsequent works [14] [11] over the same dataset have experimented with PLMs. This line of work may be considered closest to ours, however, their focus is on compositional generalisation, while our focus is on the ability to faithfully copy input tokens to the produced query. CFQ has no questions that require such copy operations. Moreover, since Freebase is no longer an active project, our focus is on DBpedia and Wikidata. By exploring two new datasets and corresponding KGs, we expand the scope of research.

Some recent work on Complex Temporal Question Answering [17] handled questions that require extraction of time stamps from the input question. They use task-specific temporal extraction tools such as SUTime [5] and HeidelTime [36] for this purpose, however in the end, they do not form a SPARQL query, and instead attempt to find the correct answer directly through an entity re-ranking approach. Our efforts are instead on finding such flexible single models which can perform such extraction tasks along with the building of SPARQL queries.

The models we experiment with pose no structural or template-based constraints neither at an intermediate stage nor during decoding, and are able to produce any possible query structure since we generate the final query token by token. They require the input question, the linked entities and relations, and a fixed vocabulary of all possible SPARQL tokens. This allows them to operate on all possible datasets and KGs.

3 MODELS

3.1 T5

T5, or Text-to-Text Transfer Transformer, is a Transformer [40] based encoder-decoder architecture that uses a text-to-text approach. Every task, including translation, question answering, and classification, is cast as feeding the model text as input and training it to generate some target text. This allows for the use of the same model, loss function, hyper-parameters, etc. across a diverse set of tasks. We experiment with two variants of the T5 model: T5-small with 60 million parameters and T5-base with 220 million parameters. The uncompressed C4 corpus used to pre-train the models is 750 GB in size.

3.1.1 Input Tokenisation. Let the natural language input question be denoted by $Q = [w_1, w_2 \dots w_n]$ where w denotes the words in the question. The linked entities be denoted by $E = [E_1, E_2 \dots E_n]$ and the relations by $R = [R_1, R_2 \dots R_n]$. For each entity and relation we fetch the corresponding label from the respective KG such that E_{lab_1} denotes the label for E_1 , and similarly for relations. Let the SPARQL vocabulary be denoted by V . The input string to the model is formed as follows:

$$w_1 w_2 \dots w_n [SEP] E_1 E_{lab_1} \dots E_n E_{lab_n} [SEP] R_1 R_{lab_1} \dots R_n R_{lab_n}$$

where each word is separated from the other word by a space. We denote the entities by their respective KG IRIs. For DBpedia the entities take the form, e.g. "http://dbpedia.org/resource/Dolley_Madison" while the relations look like "http://dbpedia.org/ontology/spouse". For Wikidata a typical entity looks like wd:Q76 (Barack Obama) while a typical relation looks like wdt:P31 (instance of). The prefixes wd:, wdt: and several others are expanded according to the list available online². We shuffle the order of entities and relations randomly before passing it to the model.

When the input string is passed to T5 as it is, the accuracy is close to zero, as the AutoTokenizer splits the URLs as it sees fit, and it later fails to concatenate the fragments properly at the output. To work around this problem for DBpedia, we made use of the 100 sentinel tokens that T5 provides. The sentinel tokens were originally used during pre-training objective to denote masked tokens, but in our case, we make use of them to represent the prefixes, e.g. http://dbpedia.org/ontology/ as a specific sentinel token such as <extra_id_2>. Additionally, we represent each of the items in the SPARQL vocabulary V as a sentinel token with a specific ID for each keyword. We do the same for prefixes in Wikidata for LC-QuAD 2.0.

3.1.2 Output. The output is composed of tokens from Q, V, E and R . In the case of LC-QuAD 1.0, since there are no questions that require copying of tokens from Q , the output is composed of tokens from V, E and R . We would like to point out that since our input contains the entities and relations, the model always has to perform a form of "copying" even to decide where in the output SPARQL query to place the entities and relations. In the case of questions from LC-QuAD 2.0, in some cases this copying mechanism must

¹<https://github.com/semantic-systems/NLIWOD/>

²<https://www.wikidata.org/wiki/EntitySchema:E49>

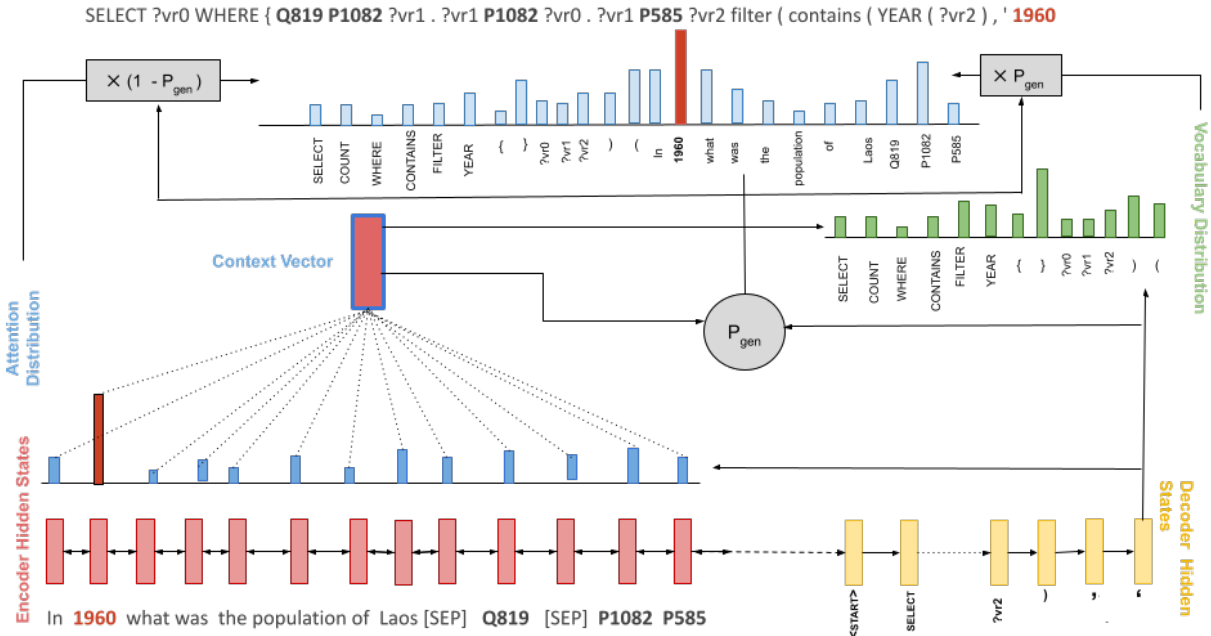


Figure 1: PGN-based QB model. At the current time step, the model is decoding the symbol after the single quote character ('). It considers the scores over the vocabulary and the attention weights over the input text to obtain a final probability distribution, from which it makes the prediction of choosing 1960 as the next token.

also decide which input token from Q to copy and to which position in the output. The output for E and R are not produced verbatim, and instead they are split as a special token prefix, and then the entity or relation ID. A post-processing step is required to resolve these sentinel token IDs into the original prefixes and combine them with the adjacent IDs. For example, `wdt:P31` is produced in the output as `<extra_id_3> P31`.

3.2 BART

The Bidirectional and Auto-Regressive Transformer or BART is a Transformer that combines the Bidirectional Encoder with an Autoregressive decoder into one Seq2Seq model. We experiment with the BART-base model consisting of 139 million trainable parameters. This model was pre-trained on 160 GB of data resulting from the combination of four corpuses, namely, Bookcorpus [45], CC-News [24], OpenWebText [13] and Stories [38].

3.2.1 *Input Tokenisation.* We form the input string for BART in the same manner as discussed in Section 3.1.1 for T5. However there is no concept of sentinel tokens in BART. Hence to handle special tokens, we instead add them to the BartTokenizer using the `add_tokens` function and appropriately resize the token embedding space using the `resize_token_embeddings` function.³

³https://huggingface.co/docs/transformers/model_doc/bart

3.3 Pointer Generator Network

A PGN is a seq2seq network with an encoder and a decoder block. We experiment exclusively with LSTM-based [15] PGNs. While PGNs can generate output tokens from a given vocabulary via softmax selection, they are also able to copy tokens from the input text to the output by making use of attentions weights of the decoder. A significant difference between T5, BART and PGN is that for PGNs no pre-training on corpus is performed. The model consists of 53 million trainable parameters which is comparable to T5-small’s 60 million parameters size.

PGNs have typically been employed for abstract summarisation tasks but recently Rongali et al. [27] used PGNs to perform SQL semantic parsing. Figure 1 depicts this architecture parsing an example query.

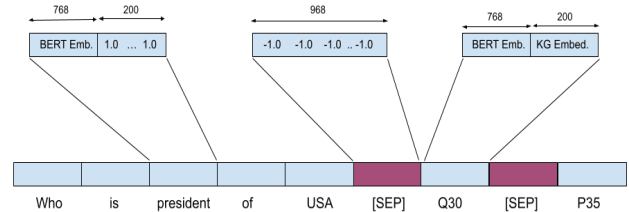


Figure 2: Input vector for PGN-BERT.

3.3.1 *Input Tokenisation.* We construct our input vector (Figure 2) by concatenating the question tokens with gold entities and relations. We add a separator token [SEP] between question tokens

	F1	F1
	DBpedia 16.04	Wikidata
	LC-QuAD 1.0	LC-QuAD 2.0
Sina [31]	0.24	-
NLIWOD	0.48	-
SQG [44]	0.75	-
CompQA [23]	0.77	-
SubQG [8]	0.85	-
AQG-net [6]	-	0.45
Multi-hop QGG [19]	-	0.53
CLC [46]	-	0.59
PGN-BERT	0.67	0.77
PGN-BERT-BERT	0.88	0.86
BART	0.84	0.64
T5-Small	0.90	0.92
T5-Base	0.91	0.91

Table 1: Results for query generation with gold entities and relations. Best results are in bold.

and entity candidates, as well as between entity candidates and relation candidates to help the model understand the segments of the input tokens. Each token is represented by a 968-dimensional vector, where the first 768 dimensions are the BERT contextual embeddings of the question token, or the entity label or relation label, as the case may be. The next 200 dimensions are reserved for the KG embeddings. For question tokens, KG embeddings do not apply, so we fill the 200 dimensions with a sequence of $1 \cdot \emptyset$. The [SEP] token is represented by a vector full of $-1 \cdot \emptyset$. The linked entities and relations carry the respective KG embeddings in the last 200 dimensions.

3.3.2 KG Embeddings. For both datasets, we make use of TransE embeddings, due to its popularity and ease of availability [4]. For DBpedia, we train TransE embeddings ourselves using PyTorch-BigGraph [21]. For the training, we proceed to 30 epochs and use the cosine dot operator as the comparator function. For Wikidata we made use of readily available TransE embeddings made available by Pytorch-BigGraph⁴ on their webpage.

3.3.3 Re-Ranker. We found that the beams produced by the PGN often contained the right query but not in the top position. To improve the ranking of queries further, we fine-tuned a pre-trained BERT-based classifier (distil-bert-base-uncased) on the output of the PGN. We take the top-10 beam outputs of the PGN on the val sets and query the KG. We save the output of all the queries which produce a valid response from the KG. To train the BERT-based classifier, we form the input string by concatenating the question tokens, the SPARQL query, and the KG response. For supervision, we provide binary labels 0 and 1 for right and wrong query. Once trained, we use the logit values of the penultimate layer of the model for re-ranking the queries produced by PGN on the test set.

4 DATASETS

- **LC-QuAD 1.0** contains 5,000 questions that are answerable on DBpedia 2016-04. The dataset originally contains a 4:1 train-test split. However, several competing systems in Table 1 instead use a smaller split of 3,253 questions. We adopt the same split and follow Ding et al. [8] in performing 5-fold cross-validation with 70:10:20 split for train, dev, and test, respectively. There are no questions that require copying of input tokens to output query in this dataset.
- **LC-QuAD 2.0** is based on Wikidata and consists of a mixture of simple and complex questions that were verbalized by human workers on Amazon Mechanical Turk. It is a large and varied dataset comprising 24,180 train questions and 6,046 test questions. In addition, to the best of our knowledge, this is the sole dataset that incorporates aspects of hyper-relational [12] structure of recent Wikidata versions. Approximately 16% of questions in the dataset require copying of input tokens to the output query.

5 EVALUATION

In Table 1, the results of competing systems for LC-QuAD 1.0 are shown as reported by Ding et al. [8]. The results for competing systems for LC-QuAD 2.0 are as reported by Zou et al. [46], also found on the KGQA leaderboard [25]⁵. For evaluating T5, BART and PGNs on both datasets, we take the top-10 beams outputs of the models and query the KG in ranked serial order. The first query to return a non-empty response is considered the output of the model. We match the KG responses of the generated query to the gold query and mark it a match if they are identical, and no match if they are not.

In the case of LC-QuAD 2.0, we found a large number of queries no longer answerable on the current version of Wikidata. The original dump used to create the dataset is no longer available online⁶. As a result, we setup an endpoint with the dump dated 13 October 2021⁷ of Wikidata and filtered the test set of 6046 questions down to 4211 questions for which the gold query produced a valid response. We loaded the triples to a Virtuoso Open Source Triple Store and used it as our endpoint. Zou et al. [46] resort to a similar pre-filtration step for the dataset in their work.

In Table 1, PGN-BERT refers to the setting where we feed the PGN with BERT embeddings. We apply no re-ranker to the output beams, and consider the first query in the ranked beams to produce a valid response from the KG as the output of the system. On the other hand, PGN-BERT-BERT refer to the setting where the beams are further re-ranked with the BERT-based re-ranker described previously.

6 DISCUSSION

T5 not only outperforms all previous works on both datasets, but also BART and PGN that we experiment with. It is important to handle input tokenisation of prefixes through sentinel IDs for T5, or else the model produces zero accuracy. In the case of PGN, we also performed a test without input KG embeddings, where we

⁴<https://github.com/facebookresearch/PyTorch-BigGraph>

⁵<https://kgqa.github.io/leaderboard/>

⁶<https://databus.dbpedia.org/dbpedia/wikidata/debug/2020.07.01>

⁷<https://dumps.wikimedia.org/wikidatawiki/entities/>

saw a 20% point drop in accuracy. In spite of the addition of KG embeddings, it fails to get an edge over T5, which operates solely based on entity and relation labels. It can hence be concluded that the large amount of pre-training for T5 outranks the KG embedding advantage.

In the case of BART versus T5, we observed that the copy actions of BART were not as clean as T5. For example, in LC-QuAD 2.0, BART produced an F1 of 0.3 for questions that require token copy to the output, while T5 produced an F1 of 0.8. We believe this is due to the fact that instead of using sentinel IDs, which are inherently a part of the T5 model from its pre-training objective, we had to resort to adding special tokens to the `BartTokenizer`, which does not produce the same copying performance.

T5-small and T5-base produce similar performance, which suggests that the extra number of parameters in the base model remains unused for our given task. For LC-QuAD 2.0, none of the previous works has the ability to copy tokens from input to the output, so our approaches outperform them by far. In terms of PGN performance, on using the BERT re-ranker, we see gains in the range of 10-20 % points, which shows that PGN does a poor job of producing the right query towards the top. When comparing T5-small performance with PGN, although they have similar parameter count, the pre-training on 750 GB of corpus seems to be the crucial factor in T5-small's favour.

7 ERROR ANALYSIS

We randomly sampled 100 cases of erroneous outputs for PGN, T5-Small and BART, as shown in Table 2. The most important difference in the errors produced by T5/BART versus PGN is what we call "copy morphing". T5/BART produce their output from an open ended sub-word-based vocabulary, and hence sometimes corrupt the item being copied. At times, they produce wrong entity IDs, e.g., in the case of DBpedia, Barack-Obama instead of Barack_Obama, and in some other cases, they hallucinate entity IDs that are not part of the linked entities or relations in input. We also encountered cases of morphing relation IDs to semantically similar words, like `notableWork` changing to `notabilityWork`, or unexpected capitalisation, e.g., `Artist` instead of `artist`. Although PGN's overall accuracy is lower, they do not exhibit this issue, since the copying takes place from an expanded vocabulary which is limited, consisting of SPARQL tokens and the input tokens. We also found that copy morphing in T5 takes place only for DBpedia where the entity and relation IDs are similar to the dictionary labels. For Wikidata, where the IDs are numerical, morphing does not occur.

We categorise the other kind of errors under the following heads: Triple Flip, e.g., `<o p s>` instead of `<s p o>`, Wrong Variables, e.g., `?var0` instead of `?var1`, Wrong Intent, e.g., ASK instead of SELECT, Copy Errors, where the wrong token is copied, and Syntax Errors, where the generated query is malformed and an invalid SPARQL query. We observe that BART has poor performance in copying, while other models have most errors in triple flips and wrong variables.

8 CONCLUSION AND FUTURE WORK

In this work, we establish new baselines using PLMs for the KG semantic parsing task for two datasets. Our results surpass the results

	PGN		BART		T5-Small	
	LCQ1	LCQ2	LCQ1	LCQ2	LCQ1	LCQ2
Triple Flip	56	54	22	30	66	60
Wrong Var	78	63	18	-	36	8
Wrong Intent	22	15	-	10	4	26
Copy Error	-	14	22	40	-	18
Copy Morph	-	-	60	-	26	-
Syntax Errors	-	-	16	40	-	-

Table 2: Error breakdown for randomly sampled 100 errors

of earlier baselines and lay grounds for future research. We make use of readily available and popular models, with minimal changes to input vectorisation and tokenisation, to report state of the art results on SPARQL semantic parsing and query building tasks over DBpedia and Wikidata. We show that these methods are flexible and able to handle a variety of questions with no fixation on templates or query graphs. The direction of future semantic parsing work for SPARQL should lay more emphasis on pre-training, since currently it is more focused on producing custom model architectures for the tasks.

As future work, we would like to explore the ability of these models in disambiguation tasks, where the input consists of entity and relation candidates, instead of linked entities and relations.

9 ACKNOWLEDGMENTS

This research was partially funded by the German Federal Ministry of Education and Research (BMBF) as part of the INSTANT project, ID 02L18A111.

REFERENCES

- [1] Abdalghani Abujabal, Mohamed Yahya, Mirek Riedewald, and Gerhard Weikum. 2017. Automated Template Generation for Question Answering over Knowledge Graphs. International World Wide Web Conferences Steering Committee.
- [2] Ram G. Athreya, Srividya Kona Bansal, Axel-Cyrille Ngonga Ngomo, and Ricardo Usbeck. 2021. Template-based Question Answering using Recursive Neural Networks. In *15th IEEE International Conference on Semantic Computing, ICSC 2021, Laguna Hills, CA, USA, January 27-29, 2021*. IEEE.
- [3] Kurt Bollacker, Colin Evans, Praveen Paritosh, Tim Sturge, and Jamie Taylor. 2008. Freebase: A Collaboratively Created Graph Database for Structuring Human Knowledge. In *Proceedings of the 2008 ACM SIGMOD International Conference on Management of Data*. Association for Computing Machinery. <https://doi.org/10.1145/1376616.1376746>
- [4] Antoine Bordes, Nicolas Usunier, Alberto Garcia-Durán, Jason Weston, and Oksana Yakhnenko. 2013. Translating Embeddings for Modeling Multi-Relational Data (*NIPS*). Curran Associates Inc.
- [5] Angel X. Chang and Christopher Manning. 2012. SUTime: A library for recognizing and normalizing time expressions. In *Proceedings of the Eighth International Conference on Language Resources and Evaluation (LREC'12)*. European Language Resources Association (ELRA).
- [6] Yongrui Chen, Huiying Li, Yuncheng Hua, and Guilin Qi. 2020. Formal Query Building with Query Structure Prediction for Complex Question Answering over Knowledge Base. In *Proceedings of the Twenty-Ninth International Joint Conference on Artificial Intelligence, IJCAI-20*. International Joint Conferences on Artificial Intelligence Organization.
- [7] Dennis Diefenbach, Vanessa Lopez, Kamal Singh, and Pierre Maret. 2018. Core Techniques of Question Answering Systems over Knowledge Bases: A Survey. *Knowledge and Information Systems* (2018).
- [8] Jiwei Ding, Wei Hu, Qixin Xu, and Yuzhong Qu. 2019. Leveraging Frequent Query Substructures to Generate Formal Queries for Complex Question Answering. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*. ACL.
- [9] Mohnish Dubey, Debayan Banerjee, Abdelrahman Abdelkawi, and Jens Lehmann. 2019. LC-QuAD 2.0: A Large Dataset for Complex Question Answering over

- Wikidata and DBpedia. In *The Semantic Web – ISWC 2019*. Springer International Publishing.
- [10] Mohnish Dubey, Debayan Banerjee, Debanjan Chaudhuri, and Jens Lehmann. 2018. EARL: Joint Entity and Relation Linking for Question Answering over Knowledge Graphs. In *Proceedings of the 17th International Semantic Web Conference (ISWC)*.
- [11] Daniel Furrer, Marc van Zee, Nathan Scales, and Nathanael Schärli. 2020. Compositional Generalization in Semantic Parsing: Pre-training vs. Specialized Architectures. <https://arxiv.org/abs/2007.08970>
- [12] Mikhail Galkin, Priyansh Trivedi, Gaurav Maheshwari, Ricardo Usbeck, and Jens Lehmann. 2020. Message Passing for Hyper-Relational Knowledge Graphs. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing*. ACL.
- [13] Aaron Gokaslan and Vanya Cohen. 2019. OpenWebText Corpus. <http://Skylion007.github.io/OpenWebTextCorpus>
- [14] Jonathan Herzig, Peter Shaw, Ming-Wei Chang, Kelvin Guu, Panupong Pasupat, and Yuan Zhang. 2021. Unlocking Compositional Generalization in Pre-trained Models Using Intermediate Representations. *arXiv preprint arXiv:2104.07478* (2021).
- [15] Sepp Hochreiter and Jürgen Schmidhuber. 1997. Long Short-Term Memory. *Neural Computation* (1997).
- [16] Sen Hu, Lei Zou, and Xinbo Zhang. 2018. A State-transition Framework to Answer Complex Questions over Knowledge Base. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*. ACL.
- [17] Zhen Jia, Soumajit Pramanik, Rishiraj Saha Roy, and Gerhard Weikum. 2021. *Complex Temporal Question Answering on Knowledge Graphs*. Association for Computing Machinery.
- [18] Daniel Keysers, Nathanael Schärli, Nathan Scales, Hylke Buisman, Daniel Furrer, Sergii Kashubin, Nikola Momchev, Danila Sinopalnikov, Lukasz Stafiniak, Tibor Tihon, Dmitry Tsarkov, Xiao Wang, Marc van Zee, and Olivier Bousquet. 2020. Measuring Compositional Generalization: A Comprehensive Method on Realistic Data. In *International Conference on Learning Representations*. <https://openreview.net/forum?id=SygcCnNKwr>
- [19] Yunshi Lan and Jing Jiang. 2020. Query Graph Generation for Answering Multi-hop Complex Questions from Knowledge Bases. In *Proceedings of the 58th Annual Meeting of the ACL*. ACL, Online.
- [20] Jens Lehmann, Robert Isele, Max Jakob, Anja Jentzsch, Dimitris Kontokostas, Pablo N Mendes, Sebastian Hellmann, Mohamed Morsey, Patrick Van Kleef, Sören Auer, et al. 2015. DBpedia – A Large-Scale, Multilingual Knowledge Base Extracted from Wikipedia. *Semantic Web* (2015).
- [21] Adam Lerer, Ledell Wu, Jiajun Shen, Timothee Lacroix, Luca Wehrstedt, Abhijit Bose, and Alex Peysakhovich. 2019. PyTorch-BigGraph: A Large-scale Graph Embedding System. In *Proceedings of the 2nd SysML Conference*.
- [22] Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020. BART: Denoising Sequence-to-Sequence Pre-training for Natural Language Generation, Translation, and Comprehension. In *Proceedings of the 58th Annual Meeting of the ACL*. ACL.
- [23] Kangqi Luo, Fengli Lin, Xusheng Luo, and Kenny Zhu. 2018. Knowledge Base Question Answering via Encoding of Complex Query Graphs. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*. ACL.
- [24] Joel Mackenzie, Rodger Benham, Matthias Petri, Johanne R. Trippas, J. Shane Culpepper, and Alistair Moffat. 2020. CC-News-En: A Large English News Corpus. In *Proceedings of the 29th ACM International Conference on Information & Knowledge Management (CIKM '20)*. ACM.
- [25] Aleksandr Perevalov, Xi Yan, Liubov Kovriguina, Longquan Jiang, Andreas Both, and Ricardo Usbeck. 2022. Knowledge Graph Question Answering Leaderboard: A Community Resource to Prevent a Replication Crisis. *CoRR* abs/2201.08174 (2022). [arXiv:2201.08174](https://arxiv.org/abs/2201.08174) <https://arxiv.org/abs/2201.08174>
- [26] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. Exploring the Limits of Transfer Learning with a Unified Text-to-Text Transformer. *Journal of Machine Learning Research* (2020).
- [27] Subendhu Rongali, Luca Soldaini, Emilio Monti, and Wael Hamza. 2020. Don't Parse, Generate! A Sequence to Sequence Architecture for Task-Oriented Semantic Parsing. *Proceedings of The Web Conference 2020* (2020).
- [28] Ahmad Sakor, Kuldeep Singh, and Maria-Esther Vidal. 2019. FALCON: An Entity and Relation Linking Framework over DBpedia. In *Proceedings of the ISWC 2019 Satellite Tracks (Posters & Demonstrations, Industry, and Outrageous Ideas) co-located with 18th International Semantic Web Conference (ISWC 2019), Auckland, New Zealand, October 26-30, 2019*.
- [29] Abigail See, Peter J. Liu, and Christopher D. Manning. 2017. Get To The Point: Summarization with Pointer-Generator Networks. In *Proceedings of the 55th Annual Meeting of the ACL*. ACL.
- [30] Peter Shaw, Ming-Wei Chang, Panupong Pasupat, and Kristina Toutanova. 2021. Compositional Generalization and Natural Language Variation: Can a Semantic Parsing Approach Handle Both?. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*. Association for Computational Linguistics.
- [31] Saeedeh Shekarpour, Edgard Marx, Axel-Cyrille Ngonga Ngomo, and Sören Auer. 2015. SINA: Semantic interpretation of user queries for question answering on interlinked data. *Journal of Web Semantics* (2015).
- [32] Kuldeep Singh, Andreas Both, Dennis Diefenbach, Saeedeh Shekarpour, Didier Cherix, and Christoph Lange. 2016. Qanary - The Fast Track to Creating a Question Answering System with Linked Data Technology. In *The Semantic Web - ESWC 2016 Satellite Events, Heraklion, Crete, Greece, May 29 - June 2, 2016, Revised Selected Papers* (2016-01-01).
- [33] Kuldeep Singh, Ioanna Lytra, Arun Sethupat Radhakrishna, Akhilesh Vyas, and Maria-Esther Vidal. 2018. Dynamic Composition of Question Answering Pipelines with FRANKENSTEIN. In *The 41st International ACM SIGIR Conference on Research & Development in Information Retrieval, SIGIR 2018, Ann Arbor, MI, USA, July 08-12, 2018*.
- [34] Kuldeep Singh, Arun Sethupat Radhakrishna, Andreas Both, Saeedeh Shekarpour, Ioanna Lytra, Ricardo Usbeck, Akhilesh Vyas, Akmal Khikmatullaev, Dharmen Punjani, Christoph Lange, Maria Esther Vidal, Jens Lehmann, and Sören Auer. 2018. Why Reinvent the Wheel: Let's Build Question Answering Systems Together. In *Proceedings of the 2018 World Wide Web Conference*. International World Wide Web Conferences Steering Committee.
- [35] Tommaso Soru, Edgard Marx, Diego Moussallem, Gustavo Publio, André Valdes-tilhas, Diego Esteves, and Ciro Baron Neto. 2017. SPARQL as a Foreign Language. In *Proceedings of the 13th International Conference on Semantic Systems - SEMANTICS2017 Posters and Demos*.
- [36] Jannik Strötgen and Michael Gertz. 2010. HeidelTime: High Quality Rule-Based Extraction and Normalization of Temporal Expressions. In *Proceedings of the 5th International Workshop on Semantic Evaluation*. Association for Computational Linguistics.
- [37] Yawei Sun, Lingling Zhang, Gong Cheng, and Yuzhong Qu. 2020. SPARQA: Skeleton-Based Semantic Parsing for Complex Questions over Knowledge Bases. *Proceedings of the AAAI Conference on Artificial Intelligence* 34 (2020).
- [38] Trieu H. Trinh and Quoc V. Le. 2018. A Simple Method for Commonsense Reasoning. *CoRR* abs/1806.02847 (2018). [arXiv:1806.02847](https://arxiv.org/abs/1806.02847) <http://arxiv.org/abs/1806.02847>
- [39] Priyansh Trivedi, Gaurav Maheshwari, Mohnish Dubey, and Jens Lehmann. 2017. LC-QuAD: A Corpus for Complex Question Answering over Knowledge Graphs. In *The Semantic Web – ISWC 2017*. Springer International Publishing.
- [40] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is All you Need. In *Advances in Neural Information Processing Systems*. Curran Associates, Inc. <https://proceedings.neurips.cc/paper/2017/file/3f5ee243547dee91fbd053c1c4a845aa-Paper.pdf>
- [41] Daniel Vollmers, Richa Jalota, Diego Moussallem, Hardik Topiwala, Axel-Cyrille Ngonga Ngomo, and Ricardo Usbeck. 2021. Knowledge Graph Question Answering Using Graph-Pattern Isomorphism. (2021).
- [42] Vrandečić, Denny and Krötzsch, Markus. 2014. Wikidata: A Free Collaborative Knowledge Base. *Commun. ACM* (2014).
- [43] Wen-tau Yih, Ming-Wei Chang, Xiaodong He, and Jianfeng Gao. 2015. Semantic Parsing via Staged Query Graph Generation: Question Answering with Knowledge Base. In *Proceedings of the 53rd Annual Meeting of the ACL and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*. ACL.
- [44] Hamid Zafar, Giulio Napolitano, and Jens Lehmann. 2018. Formal Query Generation for Question Answering over Knowledge Bases. In *The Semantic Web*. Springer International Publishing.
- [45] Yukun Zhu, Ryan Kiros, Rich Zemel, Ruslan Salakhutdinov, Raquel Urtasun, Antonio Torralba, and Sanja Fidler. 2015. Aligning Books and Movies: Towards Story-Like Visual Explanations by Watching Movies and Reading Books. In *The IEEE International Conference on Computer Vision (ICCV)*.
- [46] Jianyun Zou, Min Yang, Lichao Zhang, Yechen Xu, Qifan Pan, Fengqing Jiang, Ran Qin, Shushu Wang, Yifan He, Songfang Huang, and Zhou Zhao. 2021. A Chinese Multi-type Complex Questions Answering Dataset over Wikidata. [arXiv:2111.06086](https://arxiv.org/abs/2111.06086) [cs.CL]