

# PERT: A New Solution to Pinyin to Character Conversion Task

Jinghui Xiao<sup>1</sup>

Qun Liu<sup>1</sup>

Xin Jiang<sup>1</sup>

Yuanfeng Xiong<sup>2</sup>

Haiteng Wu<sup>2</sup>

Zhe Zhang<sup>2</sup>

<sup>1</sup>Huawei Noah's Ark Lab <sup>2</sup>Huawei Technologies Co., Ltd.

{xiao.jinghui4, qun.liu, Jiang.Xin, xiongyuanfeng}@huawei.com

{wuhaiteng, zhangzhe88}@huawei.com

## Abstract

Pinyin to Character conversion (P2C) task is the key task of Input Method Engine (IME) in commercial input software for Asian languages, such as Chinese, Japanese, Thai language and so on. It's usually treated as sequence labelling task and resolved by language model, i.e. n-gram or RNN. However, the low capacity of the n-gram or RNN limits its performance. This paper introduces a new solution named **PERT** which stands for bidirectional **P**inyin **E**ncoder **R**epresentations from **T**ransformers. It achieves significant improvement of performance over baselines. Furthermore, we combine PERT with n-gram under a Markov framework, and improve performance further. Lastly, the external lexicon is incorporated into PERT so as to resolve the OOD issue of IME.

## 1 Introduction

Some Asian languages, such as Chinese, Japanese and Thai language, can not be input directly through standard keyboard. User types in them via commercial input software, such as Microsoft Input Method (Gao et al., 2002), Sogou Input Method<sup>1</sup>, Google Input Method<sup>2</sup>, and so on. Pinyin is the official romanization representation for Chinese language. It's natural for user to type in Chinese by pinyin sequence. For example, taking a snapshot from Sogou Input Method as Figure 1 shows, user inputs a pinyin sequence of *wo men qu yong he gong* from the standard keyboard and it is converted into the desired Chinese sentence of “我们去雍和宫 (we are going to Yonghe Lama Temple)”. Therefore, Pinyin to Character conversion (“P2C” for short) task is the key task of commercial input software.

Usually, the P2C task is treated as sequence labelling task and resolved by language model, i.e.

<sup>1</sup><https://pinyin.sogou.com/>

<sup>2</sup><https://www.google.com/inputtools/services/features/input-method.html>



Figure 1: User Types in Chinese via Pinyin in IME



Figure 2: Pinyin to Character Conversion Task

n-gram. Specifically, there are three steps as Figure 2 shows. Firstly, the Chinese character candidates are generated according to the input pinyin tokens. All of candidates constitute of a lattice. Secondly, language model provides the probability between characters, i.e.  $P(\text{们} | \text{我})$ , for later calculations. Thirdly, an optimal path with the highest probability in the lattice is found by the Viterbi algorithm. N-gram is the dominant model in the commercial input method software. However, its simplicity and low capacity limit the performance. In the trend of deep learning techniques of recent year, more powerful models, such as RNN (Meng and Zhao, 2019; Yao et al., 2018; Wu et al., 2017), have been applied on the P2C task and achieve substantial improvement. The pre-training language models like BERT-CRF (Souza et al., 2019; Dai et al., 2019) are also applied to the sequence labelling task, such as named entity recognition (NER) and outperform n-gram and RNN significantly.

Inspired by the success of BERT-CRF, we design PERT (bidirectional **P**inyin **E**ncoder **R**epresentations from **T**ransformers) especially for the P2C task. Instead of the pre-training technique such as BERT-CRF, we train PERT directly on the P2C task on the massive pinyin-character paral-

lel corpus, and achieve substantial improvement of performance over n-gram and RNN. There are three contributions in this paper:

- We design PERT for the P2C task and achieve substantial improvement of performance.
- We combine PERT with n-gram under Markov framework and get further performance improvement.
- We incorporate external lexicon in PERT to solve the Out-Of-Domain (“OOD” for short) issue of IME.

## 2 Method

We describe our methodology in this section. Firstly, we present the implement of PERT in Section 2.1. Then we show how to combine PERT with n-gram in Section 2.2. Lastly, we incorporate external lexicon into PERT in Section 2.3.

### 2.1 PERT

Figure 3 shows the network architecture of PERT. There are two differences between BERT and PERT on architecture. Firstly, as shown in the bottom of Figure 3, PERT only takes the pinyin token as input since it is designed especially for the P2C task. Whereas, the BERT models for Chinese, such as ChineseBERT (Sun et al., 2021), take both pinyin and character as input because they are for the common tasks, i.e. Chinese Word Segmentation (CWS), Text Classification (TC) and so on. There is only 410 pinyin tokens (without tone) which is about 2x order of magnitude smaller than Chinese subword (usually about 50k). The scale of embedding layer of PERT is much smaller than BERT. Secondly, there is no segment embedding but only pinyin embedding and position embedding in PERT. PERT is trained directly on the P2C task on the massive pinyin-character parallel corpus, and there is no pre-training process. It doesn’t need Next Sentence Prediction (NSP) task, thus no segment embedding.

BERT adopts the pretraining-then-finetune paradigm so as to leverage the massive unlabelled text corpus to supplement limited labelled corpus of target task. However, for the P2C task, we can convert the massive character corpus into the according pinyin corpus accurately and efficiently, and build the massive parallel corpus. Then, PERT can be trained directly on the target P2C task on this corpus. It is called Text-to-Pinyin conversion (“T2P”

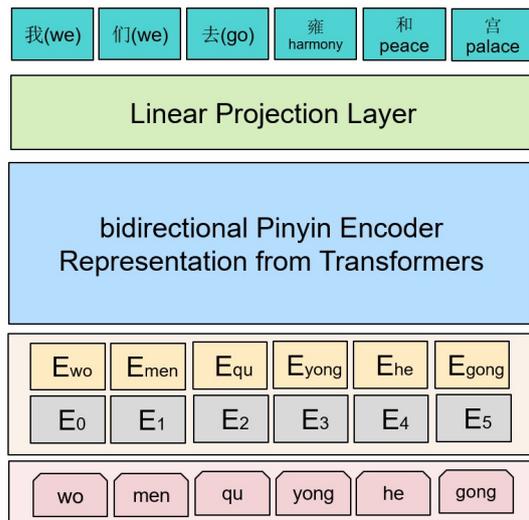


Figure 3: PERT for the P2C Task.  $w_0$  is the input pinyin token.  $E_0$  is the position embedding and  $E_{w_0}$  is the token embedding of pinyin. 我( $w_e$ ) is the predicted Chinese character.

for short) task (Zhang and Laprie, 2003) which is the contrary task of the P2C task. The similar tasks are the transliteration task (Kundu et al., 2018) and the phoneme-to-grapheme conversion task (Peters et al., 2017). Both of them are resolved with the sequence-to-sequence models. However, the T2P task is much simpler because most of pinyin information can be determined within its lexical context. We can firstly segment the Chinese character sequence into words and then get the correct pinyin token within its word context. The accuracy exceeds 99.9% (Zhang and Laprie, 2003) and there is the open toolkit named PYPinyin<sup>3</sup>.

### 2.2 Combining PERT with N-gram

In practice, the commercial input software usually installs both n-gram model (for faster installation) and PERT (for higher performance) at the same time. In this section, we combine these two models together so as to get more capability. We start from the derivation of Bayes rule. Then we unify these two models under Markov’s framework.

In the P2C task, language model estimates the joint conditional probability of  $P(c_1 \dots c_n | y_1 \dots y_n)$ , which is the probability of Chinese character sequence  $c_1 \dots c_n$  given the input pinyin sequence  $y_1 \dots y_n$ . We can decompose it under the Bayes

<sup>3</sup><https://github.com/mozillazg/python-pinyin>

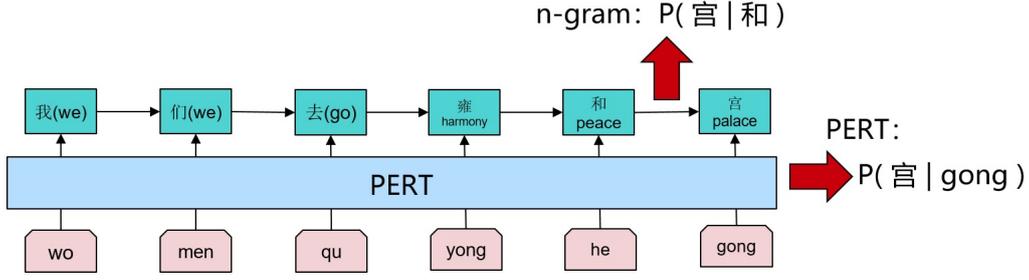


Figure 4: Unify PERT with N-gram Under Markov Framework

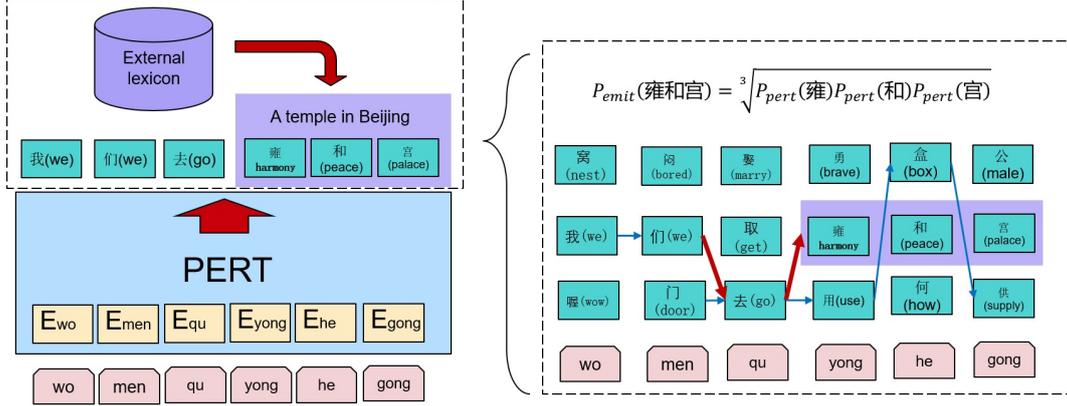


Figure 5: Incorporate Lexicon in PERT

rule as Formula 1:

$$\begin{aligned}
 &P(c_1 \dots c_n | y_1 \dots y_n) \\
 &= P(c_1 \dots c_{n-1}, c_n | y_1 \dots y_n) \\
 &= P(c_1 \dots c_{n-1} | y_1 \dots y_n) * P(c_n | c_1 \dots c_{n-1}, y_1 \dots y_n) \\
 &\approx P(c_1 \dots c_{n-1} | y_1 \dots y_{n-1}) * P(c_n | c_1 \dots c_{n-1}, y_1 \dots y_n) \\
 &\approx P(c_1 \dots c_{n-1} | y_1 \dots y_{n-1}) \\
 &\quad * P(c_n | c_1 \dots c_{n-1}) * P(c_n | y_1 \dots y_n)
 \end{aligned} \tag{1}$$

We further simplify these probabilities in two aspects. Firstly, we simplify  $P(c_1 \dots c_{n-1} | y_1 \dots y_n)$  to  $P(c_1 \dots c_{n-1} | y_1 \dots y_{n-1})$  since  $y_n$  is in the future during user inputs. Secondly, we simplify  $P(c_n | c_1 \dots c_{n-1}, y_1 \dots y_n)$  into the product of  $P(c_n | c_1 \dots c_{n-1})$  and  $P(c_n | y_1 \dots y_n)$  as the last line of Formula 1 shows. As presented in Figure 4,  $P(c_n | c_1 \dots c_{n-1})$  can be taken as the *State Transition Probability* of Markov framework, and can be estimated by n-gram.  $P(c_n | y_1 \dots y_n)$  is the *Emission Probability* and can be estimated by PERT.  $P(c_1 \dots c_{n-1} | y_1 \dots y_{n-1})$  is the *history* and can be further decomposed in the same way as above.

Note that in our implementation, n-gram is estimated separately from PERT. Whereas, BERT-CRF

estimates BERT and n-gram in an end-to-end way. It's not applicable for BERT-CRF to the P2C task because of two reasons. Firstly, it usually requires different corpus to train n-gram and PERT separately in practice, i.e. the smaller dialog corpus for n-gram whose style is closer to user's real input, but the whole huge corpus (including news, web-text and dialog) for PERT which has more parameters. It can not be trained in an end-to-end way. Secondly, the target estimation space of BERT-CRF is the whole Chinese characters whose number is more than  $6k$ . It takes too much GPU memory when calculating the normalization for CRF, which makes it infeasible to train BERT-CRF on a very large corpus<sup>4</sup>.

<sup>4</sup>We adopt Nvidia V100 GPU with 32G memory in our experiments. We encountered the OOM problem when training BERT-CRF at the BERT-base scale. At the BERT-tiny scale, the max batch size was 4, and it took more than five weeks to process about 6 epoch on a training corpus of 300M. On the contrary, the batch size of PERT-tiny was set to 2k and it only took 1.5 hour to finish training 6 epoch on the same corpus. Considering the size of our whole training corpus exceeds 2400M as described later, we thought the cost of training BERT-CRF was unacceptable to us.

## 2.3 Incorporating External Lexicon

The commercial IME engine adopts external lexicon to solve the OOD issue on edge device. For example, it adopts the computer lexicon to adapt to the computer domain, adopts the location lexicon to support some location names, i.e. “雍和宫(Yonghe Lama Temple)”, adopts the user lexicon to fit for user’s input custom, and so on. Figure 5 illustrates our way to incorporate external lexicon in PERT. Specifically there are three steps. Firstly, we recognize the word item according to the external lexicon, and add it into the lattice of candidates, as shown in the left part of Figure 5. Secondly, we estimate the word probability by its component characters according to Formula 2. Here we adopt the geometric mean of probability according to the article (Nelson, 2017). Other metrics can also be tried. Finally, we search an optimal path together with the added word by Viterbi algorithm, as shown by the red arrow of Figure 5’s right part.

$$P_{emit}(\text{雍和宫}) = \sqrt[3]{P_{pert}(\text{雍}) * P_{pert}(\text{和}) * P_{pert}(\text{宫})} \quad (2)$$

## 3 Experiment

### 3.1 Description of Data Set and Lexicon

As far as we know, there is no benchmark available to the P2C task. So we build our own data set and will make it public to the community later. Table 1 describes the detailed information. These articles are collected from some major Chinese news websites, such as Netease, Tencent News and so on. Total 2.6M articles are taken as the training corpus, and another 1k disjoint articles as the test corpus. Besides, two additional corpus from the Baike website and the Society forum<sup>5</sup> are chosen to evaluate the OOD performance. All these corpora are firstly segmented into sentences according to a punctuation list including comma, period, and so on. Secondly, the non-pinyin characters are filtered out, i.e. number, punctuation, English. Thirdly, they are further segmented by a max length (16 in our experiment) because user only types a few tokens once a time. Lastly, we convert them into the pinyin sequence by PYPinyin.

*The Table of General Standard Chinese Charac-*

<sup>5</sup>[https://github.com/brightmart/nlp\\_chinese\\_corpus](https://github.com/brightmart/nlp_chinese_corpus)

Corpus	#Articles	#Chars	#Disk
News-Train	2,603,869	2,432,585,138	9.7G
News-Test	1000	926,792	3.7M
Baike-Test	49,357	6,238,834	30M
Society-Test	68,345	5,709,450	30M

Table 1: The Detailed Information of Corpus

ters<sup>6</sup> containing more than 6k characters is taken as the basic lexicon in the experiments. Besides, *Xiandai Hanyu Changyongcibiao (Common words in Contemporary Chinese, “Common-Words” for short)* containing 0.1m items (Li and Su, 2008) and *Tencent Network Lexicon (“Network-Words” for short)* published by Tencent AI Lab<sup>7</sup> containing 8.8 million items are taken as the external lexicons.

### 3.2 Evaluation Metrics

In order to evaluate the performance, we use both character-level precision and sentence-level precision. The character-level precision is defined as the ratio that the IME engine converts to the Chinese characters correctly, as described in Formula 3.

$$Precision_{char} = \frac{\#correct\_converted\_char}{\#total\_converted\_char} \quad (3)$$

Similarly we can define the sentence-level precision which is much stricter since it requires the correctness of whole sequence. Yet it is more meaningful in practice because the input software usually prompts the conversion of whole sequence in its first place and there is shortcut for user to choose that result.

Besides, we also choose *millisecond per token* to evaluate the latency.

### 3.3 Baselines and Experiment Settings

Two kinds of language models, Bigram and LSTM, are taken as baselines.

- **Bigram.** Bigram is the de facto model adopted widely in the commercial IME engine. We build it on *The Table of General Standard Chinese Characters* on the training corpus presented in Table 1. No pruning strategy is adopted since the scale of corpus is large enough.

<sup>6</sup>[https://en.wikipedia.org/wiki/Table\\_of\\_General\\_Standard\\_Chinese\\_Characters](https://en.wikipedia.org/wiki/Table_of_General_Standard_Chinese_Characters)

<sup>7</sup><https://ai.tencent.com/ailab/nlp/embedding.html>

Model	#Parameter	Char_Precision	Char_Improvement	Sen_Precision	Sen_Improvement	ms/token
Bigram	7.4M	85.10%	NA	34.26%	NA	1.80
LSTM	4.2M	89.71%	4.61%↑	47.87%	13.61%↑	54.63
PERT-tiny	1.3M	85.18%	0.08%↑	32.01%	-2.25%↓	0.34
PERT-mini	5.0M	90.57%	5.47%↑	48.77%	14.51%↑	0.62
PERT-small	16.5M	95.41%	10.31%↑	64.38%	30.12%↑	0.63
PERT-medium	29.1M	95.59%	10.49%↑	65.74%	31.48%↑	1.13
PERT-base	91.1M	96.59%	11.49%↑	73.31%	39.05%↑	1.71

Table 2: Performances on the P2C Task. *Char\_Precision* is the character-level precision; *Char\_Improvement* is the improvement of character-level precision; *Sen\_Precision* is the sentence-level precision; *Sen\_Improvement* is the improvement of sentence-level precision. *ms/token* is the millisecond per token.

- **LSTM.** LSTM is reported that gets better performance than Bigram (Meng and Zhao, 2019; Yao et al., 2018; Malhotra et al., 2015) in the IME engine. In our implementation, both the embedding size and the hidden size are 256, and the learning rate is  $5e^{-4}$ . The batch size is  $2k$  and the epoch number is 10.

For PERT, we follow the specifications of Google from the tiny model to the base model<sup>8</sup>. We also set its max length to 16 instead of 512, so as to be consistent to the training corpus.

### 3.4 Experiments on the P2C Task

The experimental results are presented in Table 2. Firstly, LSTM outperforms Bigram significantly, which gets 4.61% improvement on character-level precision and 13.61% on sentence-level precision. It confirms the previous conclusion in Yao et al. (2018). Secondly, PERT-tiny gets the comparable performance to Bigram with only about one-sixth parameter number. And PERT-mini achieves much better performance than Bigram with similar yet smaller number of parameter. It outperforms LSTM too. It proves that PERT has a better network architecture and gets more capability. Lastly, as the scale increases, PERT gets better and better performances. PERT-base achieves 11.49% improvement on character-level precision and 39.05% on sentence-level precision from Bigram. It can be deployed in the resource-rich environment, i.e. on the cloud, so as to provide better services.

Table 2 also presents the inference speed. Bigram is evaluated on Intel(R) Xeon(R) Gold 6561 CPU with 72 cores and 3.00GHz, and others are on Nvidia Tesla V100 GPU with 32M memory. Batch processing is used both for LSTM and PERT. Although LSTM takes much more time than Bigram, it has already been deployed in the real products

<sup>8</sup><https://github.com/google-research/bert>

Model	Char_Precision	+Bigram	Improved
PERT-tiny	85.18%	91.28%	6.10%↑
PERT-mini	90.57%	93.68%	3.11%↑
PERT-small	95.41%	96.18%	0.77%↑
PERT-medium	95.59%	96.63%	1.03%↑
PERT-base	96.59%	96.99%	0.40%↑

Table 3: Performances on Combining PERT with Bigram.

successfully (Meng and Zhao, 2019; Yao et al., 2018). PERT at all the scales takes much less time than LSTM because it can take fully advantage of parallelism of GPU. Thus, it is reasonable to draw the conclusion that PERT is deployable to real product.

### 3.5 Combining PERT with N-gram

Table 3 presents the experimental results that combines PERT with Bigram as described in Section 2.2. As we can see, the combined model outperforms the single PERT at every scale of model, which proves that our method can take effective use of the capability of each sub-model and get better performance. Not surprisingly, as the scale increases, PERT becomes more powerful and the gain from the combined model becomes smaller. It’s acceptable because the combined model is expected to deploy only on edge device as described in Section 2.2. In the resource-rich environments, we can just deploy PERT as large as possible.

### 3.6 Incorporating External Lexicon

In this section, we evaluate PERT on two OOD corpus: the Baike corpus and the Society Forum corpus. Then two external lexicons are incorporated into PERT separately so as to improve the performance, as described in Section 2.3. The experimental results are presented in Table 4 and 5 respectively.

Firstly, PERT-tiny gets 83.40% precision on the Baike corpus in Table 4 and 80.26% on the Society

Model	Char_Precision	+Common-Words	Improved	+Network-Words	Improved
PERT-tiny	83.40%	87.17%	3.77%↑	88.75%	5.35%↑
PERT-mini	88.80%	90.04%	1.24%↑	91.24%	2.44%↑
PERT-small	91.28%	91.86%	0.58%↑	92.75%	1.47%↑
PERT-medium	92.41%	92.88%	0.47%↑	93.57%	1.16%↑
PERT-base	93.68%	94.12%	0.44%↑	94.53%	0.85%↑

Table 4: Character-level Precision of PERT with External Lexicon on the Baike Domain. *Common-Words* is Xiandai Hanyu Changyongcibiao and *Network-Words* is Tencent Network Lexicon as described in Section 3.1.

Model	Char_Precision	+Common-Words	Improved	+Network-Words	Improved
PERT-tiny	80.26%	84.04%	3.75%↑	86.21%	5.95%↑
PERT-mini	87.13%	87.89%	0.76%↑	89.52%	2.39%↑
PERT-small	90.16%	90.17%	0.01%↑	91.37%	1.21%↑
PERT-medium	91.52%	91.35%	0.17%↓	92.38%	0.86%↑
PERT-base	93.16%	92.97%	0.19%↓	93.61%	0.45%↑

Table 5: Character-level Precision of PERT with External Lexicon on the Society Domain. *Common-Words* is Xiandai Hanyu Changyongcibiao and *Network-Words* is Tencent Network Lexicon as described in Section 3.1.

Forum corpus in Table 5, whereas it gets 85.18% on the in-domain corpus as shown in Table 2. The performance drops dramatically, which indicates that the OOD issue is very severe to the commercial input software. Secondly, the precision is improved by 3.77% with the Common-words lexicon, and by 5.35% with the Network-words lexicon on the Baike corpus in Table 4. Similar results can be found on the Society Forum corpus in Table 5. It proves that our method can effectively solve the OOD problem of IME engine. Thirdly, comparing the improvements from two lexicons, the bigger scale of lexicon brings the larger improvement, which also verifies the effectiveness of external lexicon to the OOD problem. Lastly, the gain gradually fade away as the scale of PERT increases. It’s acceptable since the external lexicon is only expected to deploy on edge device.

### 3.7 Ablation on Scale of Corpus

In the experiments of above sections, we use a large text corpus containing about 2432M Chinese characters, whose scale is comparable to Google BERT (about 3300M English words). The large scale of language model is always criticized on carbon footprint issue (Pérez-Mayos et al., 2021). In this section, we do the ablation study on the scale of corpus so as to find out whether smaller scale of training corpus is enough to achieve comparable performances. Specifically, we divide the whole corpus into ten pieces, and train PERT-base on them in an accumulated way in the same settings.

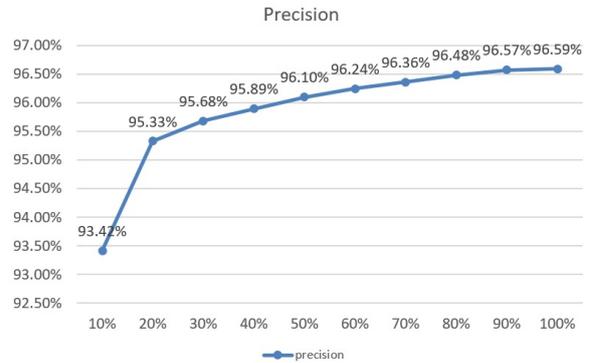


Figure 6: Character-level Precision of PERT on Different Scale of Corpus

The results are presented in Figure 6.

The PERT trained on 10% corpus gets only 93.41% precision, which is dramatically lower than 96.59% of the model trained on the full corpus. Moreover, as the scale increases, the performance increases accordingly. It indicates that it always benefits from the increasing scale of corpus. However, the gain becomes more and more marginal. The PERT on 90% corpus performs almost as good as the full model.

## 4 Related Work

There are several technical approaches to solve the P2C tasks. It can be treated as sequence labeling task like POS tagging, or as seq2seq task like machine translation, or resolved by pre-trained language model.

## 4.1 Sequence Labeling Task

In industry, the P2C task is treated as sequence labeling task. N-gram (Bahl et al., 1983) is the de facto model adopted widely in commercial input method. Some smoothing methods, such as additive smoothing (Laplace, 1825), interpolation smoothing (Jelinek and Mercer, 1980), back-off smoothing (Katz, 1987), Kneser-Ney smoothing (Kneser and Ney, 1995), are adopted to solve the zero-probability problem. Laterly, the exponential models, such as Maximum Entropy Markov Model (“MEMM” for short) (McCallum et al., 2000) and Conditional Random Field (“CRF” for short) (Lafferty et al., 2001), are proposed to improve the performance from n-gram. In recent year, under the trend of deep learning, RNN (Wu et al., 2017) gets more model capacity by capturing longer context. LSTM (Yao et al., 2018) is applied on the IME engine and achieves the improvements both in the P2C task and in the candidate prompt task. An incremental selective softmax method is further proposed to speed up the inference. Different from the above works, we adopt the bidirectional encoder representation of Transformer network. Trained on the massive parallel corpus, PERT gets significant performance improvement from n-gram as well as LSTM on the P2C task.

## 4.2 Pre-trained Language Model on P2C Task

Recently, the emergence of pre-trained models (PTMs) has brought natural language processing to a new era. BERT (Devlin et al., 2019) takes the bidirectional encoder representation of transformer networks. It is firstly pre-trained on some self-supervised tasks on the massive unlabelled corpus, such as Masked Language Modeling (“MLM” for short) and Next Sentence Predicting (“NSP” for short). Then it is fine-tuned on the target tasks on the small labelled corpus. It achieves the SOTA results on many tasks, including the sequence labeling task. Zhang and Joe (2020) applies pre-trained language model to the P2C task and proposes BERT-P2C. In the experiments, BERT-P2C outperforms other pre-trained models such as ELMO. Different from BERT-P2C, we train PERT directly on the target P2C task by creating the massive labelled corpus instead of the pretrain-then-finetune paradigm, as described in Section 2.1. Besides, comparing with Zhang and Joe (2020) which costs the parameters of two encoders and

one decoder of transformers, PERT only takes one encoder whose parameter is much smaller (about one third) than BERT-P2C. Moreover, PERT also outperforms BERT-P2C in the P2C experiments. We describe the experimental results in details in Appendix A.

BERT-CRF (Souza et al., 2019; Dai et al., 2019) further employs the CRF decoder on the top of BERT encoder, so as to exploit the structure information of target sequence. It is trained in an end-to-end way and achieves the SOTA result on the NER task of Portuguese. Different from BERT-CRF, we train PERT and n-gram separately for two reasons as described in Section 2.2. Firstly, it is required some flexibility when deploying on real product. Secondly, the costs to train BERT-CRF on the whole corpus, especially for the calculation on the normalization of BERT-CRF, are more than that we can afforded.

ChineseBERT (Sun et al., 2021) exploits some information specific to Chinese, such as glyph and pinyin, so as to enhance its capability on Chinese language. It gets improvement from Google-BERT on a variety of Chinese NLP tasks, such as machine reading comprehension, text classification, named entity recognition and so on. PLOME (Liu et al., 2021) designs the pre-trained tasks specific to glyph and pinyin in the input text. It is applied on Chinese spelling correction task and gets the SOTA result. For these models, pinyin is only the auxiliary information which has to be input together with glyph and text. It can not be input alone, as the P2C task requires. However, PERT only takes pinyin as input, and it’s especially designed for the P2C task.

## 4.3 Machine Translation Approach

In academic community, the P2C task is also considered as machine translation task (Zhu et al., 2020; Zhang and Joe, 2020; Zhang et al., 2019; Meng and Zhao, 2019) in which pinyin is taken as source language and Chinese character is target language. It’s usually resolved in an encoder-decoder network like Transformer. In practice, the uni-directional decoder is usually the efficiency bottleneck during inference. Then the Non-AutoRegressive (“NAR” for short) decoder with bi-directional attentions is proposed to solve this problem (Gu et al., 2018; Kasner et al., 2020; Gu and Kong, 2021).

In the P2C task, the number of input pinyin to-

kens is exactly the same as the number of output Chinese characters, which is an explicit constraint that we can utilize. Thus it's more natural to treat it as sequence labeling task as this paper presents. In the future, we can adopt the encoder-decoder solution when we take the continuous letter-level input (without pinyin segmentation before P2C) or the sub-pinyin token input (segmenting input letter sequence into sub-pinyin token sequence) whose lengths are much longer than the length of target character sequence. These models are expected to be more tolerated to input error. We leave them in our future works. Besides, comparing PERT with NAR machine translation system, there is no heavy decoder used in PERT. Thus, the number of PERT parameter is about a half of NAR machine translation system.

## 5 Conclusions

In this paper, we propose PERT for the P2C task which is crucial to the IME engine of commercial input software. In the experiments, PERT outperforms n-gram as well as LSTM significantly. Moreover, we combine PERT with n-gram under Markov framework and get further improvement. Lastly, we incorporate external lexicon into PERT so as to resolve the OOD issue of IME.

## 6 Future Work

There are several ideas to try in the future. One interesting idea is to replace the current pinyin-level input with the letter-level input, and convert it into Chinese character sequence by the seq2seq model as discussed in Section 4.3. The built model is expected to be more tolerated to input error, and makes the IME engine more robust. Online learning is another interesting and important topic. Zhang et al. (2019) designs an efficient method to update the vocabulary during the user input process, and augment the IME engine with the learned vocabulary effectively. However, Zhang et al. (2019) adopts RNN as encoder, which is usually regarded as less capable than Transformer architecture. We are going to incorporate PERT with the online learning method to get further improvement. Lastly, we are going to deploy our model to real product, and compare performance with some commercial input software on real input of user (Meng and Zhao, 2019; Huang et al., 2018).

## References

- Lalit R. Bahl, Frederick Jelinek, and Robert L. Mercer. 1983. [A maximum likelihood approach to continuous speech recognition](#). *IEEE Trans. Pattern Anal. Mach. Intell.*, 5(2):179–190.
- Hui Bu, Jiayu Du, Xingyu Na, Bengu Wu, and Hao Zheng. 2017. [AISHELL-1: an open-source mandarin speech corpus and a speech recognition baseline](#). In *20th Conference of the Oriental Chapter of the International Coordinating Committee on Speech Databases and Speech I/O Systems and Assessment, O-COCOSDA 2017, Seoul, South Korea, November 1-3, 2017*, pages 1–5. IEEE.
- Zhenjin Dai, Xutao Wang, Pin Ni, Yuming Li, Gangmin Li, and Xuming Bai. 2019. [Named entity recognition using BERT bilstm CRF for chinese electronic health records](#). In *12th International Congress on Image and Signal Processing, BioMedical Engineering and Informatics, CISP-BMEI 2019, Suzhou, China, October 19-21, 2019*, pages 1–5. IEEE.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pages 4171–4186. Association for Computational Linguistics.
- Jianfeng Gao, Joshua Goodman, Mingjing Li, and Kai-Fu Lee. 2002. [Toward a unified approach to statistical language modeling for chinese](#). *ACM Trans. Asian Lang. Inf. Process.*, 1(1):3–33.
- Jiatao Gu, James Bradbury, Caiming Xiong, Victor O. K. Li, and Richard Socher. 2018. [Non-autoregressive neural machine translation](#). In *6th International Conference on Learning Representations, ICLR 2018, Vancouver, BC, Canada, April 30 - May 3, 2018, Conference Track Proceedings*. OpenReview.net.
- Jiatao Gu and Xiang Kong. 2021. [Fully non-autoregressive neural machine translation: Tricks of the trade](#). In *Findings of the Association for Computational Linguistics: ACL/IJCNLP 2021, Online Event, August 1-6, 2021*, volume ACL/IJCNLP 2021 of *Findings of ACL*, pages 120–133. Association for Computational Linguistics.
- Yafang Huang, Zuchao Li, Zhuosheng Zhang, and Hai Zhao. 2018. [Moon IME: neural-based chinese pinyin aided input method with customizable association](#). In *Proceedings of ACL 2018, Melbourne, Australia, July 15-20, 2018, System Demonstrations*, pages 140–145. Association for Computational Linguistics.

- F. Jelinek and R. L. Mercer. 1980. Interpolated estimation of markov source parameters from sparse data. In *Proceedings of the Workshop on Pattern Recognition in Practice, North-Holland, Amsterdam*, pages 381–397. The Netherland.
- Zdenek Kasner, Jindrich Libovický, and Jindrich Helcl. 2020. Improving fluency of non-autoregressive machine translation. *CoRR*, abs/2004.03227.
- S. M. Katz. 1987. Estimation of probabilities from sparse data for the language model component of a speech recognizer. *IEEE Transactions on Acoustics, Speech and Signal Processin*, 35:400–401.
- Reinhard Kneser and Hermann Ney. 1995. Improved backing-off for m-gram language modeling. In *1995 International Conference on Acoustics, Speech, and Signal Processing, ICASSP '95, Detroit, Michigan, USA, May 08-12, 1995*, pages 181–184. IEEE Computer Society.
- Soumyadeep Kundu, Sayantan Paul, and Santanu Pal. 2018. A deep learning based approach to transliteration. In *Proceedings of the Seventh Named Entities Workshop, NEWS@ACL 2018, Melbourne, Australia, July 20, 2018*, pages 79–83. Association for Computational Linguistics.
- John D. Lafferty, Andrew McCallum, and Fernando C. N. Pereira. 2001. Conditional random fields: Probabilistic models for segmenting and labeling sequence data. In *Proceedings of the Eighteenth International Conference on Machine Learning (ICML 2001), Williams College, Williamstown, MA, USA, June 28 - July 1, 2001*, pages 282–289. Morgan Kaufmann.
- P. S. Laplace. 1825. *Philosophical Essay on Probabilities*, 5 edition. Springer Verlag.
- Xingjian Li and Xinchun Su. 2008. *Xiandai Hanyu changyongcibiao*. The Commercial Press, Beijing.
- Shulin Liu, Tao Yang, Tianchi Yue, Feng Zhang, and Di Wang. 2021. PLOME: pre-training with misspelled knowledge for chinese spelling correction. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing, ACL/IJCNLP 2021, (Volume 1: Long Papers), Virtual Event, August 1-6, 2021*, pages 2991–3000. Association for Computational Linguistics.
- Pankaj Malhotra, Lovekesh Vig, Gautam Shroff, and Puneet Agarwal. 2015. Long short term memory networks for anomaly detection in time series. In *23rd European Symposium on Artificial Neural Networks, ESANN 2015, Bruges, Belgium, April 22-24, 2015*.
- Andrew McCallum, Dayne Freitag, and Fernando C. N. Pereira. 2000. Maximum entropy markov models for information extraction and segmentation. In *Proceedings of the Seventeenth International Conference on Machine Learning (ICML 2000), Stanford University, Stanford, CA, USA, June 29 - July 2, 2000*, pages 591–598. Morgan Kaufmann.
- Zhen Meng and Hai Zhao. 2019. A smart sliding chinese pinyin input method editor for touchscreen devices.
- Kenric P. Nelson. 2017. Assessing probabilistic inference by comparing the generalized mean of the model and source probabilities. *Entropy*, 19(6):286.
- Laura Pérez-Mayos, Miguel Ballesteros, and Leo Wanner. 2021. How much pretraining data do language models need to learn syntax? In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing, EMNLP 2021, Virtual Event / Punta Cana, Dominican Republic, 7-11 November, 2021*, pages 1571–1582. Association for Computational Linguistics.
- Ben Peters, Jon Dehdari, and Josef van Genabith. 2017. Massively multilingual neural grapheme-to-phoneme conversion. *CoRR*, abs/1708.01464.
- Fábio Souza, Rodrigo Frassetto Nogueira, and Roberto de Alencar Lotufo. 2019. Portuguese named entity recognition using BERT-CRF. *CoRR*, abs/1909.10649.
- Zijun Sun, Xiaoya Li, Xiaofei Sun, Yuxian Meng, Xiang Ao, Qing He, Fei Wu, and Jiwei Li. 2021. Chinesebert: Chinese pretraining enhanced by glyph and pinyin information. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing, ACL/IJCNLP 2021, (Volume 1: Long Papers), Virtual Event, August 1-6, 2021*, pages 2065–2075. Association for Computational Linguistics.
- Dong Wang and Xuewei Zhang. 2015. THCHS-30 : A free chinese speech corpus. *CoRR*, abs/1512.01882.
- Lin Wu, Michele Haynes, Andrew Smith, Tong Chen, and Xue Li. 2017. Generating life course trajectory sequences with recurrent neural networks and application to early detection of social disadvantage. In *Advanced Data Mining and Applications - 13th International Conference, ADMA 2017, Singapore, November 5-6, 2017, Proceedings*, volume 10604 of *Lecture Notes in Computer Science*, pages 225–242. Springer.
- Liang Xu, Xuanwei Zhang, and Qianqian Dong. 2020. Cluecorpus2020: A large-scale chinese corpus for pre-training language model. *CoRR*, abs/2003.01355.
- Jiali Yao, Raphael Shu, Xinjian Li, Katsutoshi Ohtsuki, and Hideki Nakayama. 2018. Real-time neural-based input method. *CoRR*, abs/1810.09309.

Sen Zhang and Yves Laprie. 2003. [Text-to-pinyin conversion based on contextual knowledge and d-tree for mandarin](#). In *IEEE International Conference on Natural Language Processing and Knowledge Engineering, NLP-KE 2003, Beijing, China, 2003*.

Yu Zhang and Inwhee Joe. 2020. A pre-trained language model for chinese pinyin-to-character task based on bert. *Thesis for the Master of Science*, pages 197–198.

Zhuosheng Zhang, Yafang Huang, and Hai Zhao. 2019. [Open vocabulary learning for neural chinese pinyin IME](#). In *Proceedings of the 57th Conference of the Association for Computational Linguistics, ACL 2019, Florence, Italy, July 28- August 2, 2019, Volume 1: Long Papers*, pages 1584–1594. Association for Computational Linguistics.

Jinhua Zhu, Yingce Xia, Lijun Wu, Di He, Tao Qin, Wengang Zhou, Houqiang Li, and Tie-Yan Liu. 2020. [Incorporating BERT into neural machine translation](#). In *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net.

## A Comparison with BERT-P2C

We compare the performance of PERT with BERT-P2C (Zhang and Joe, 2020) in this section. Like BERT, BERT-P2C is firstly pre-trained on the CLUECorpus2020 corpus (Xu et al., 2020) which contains about 100G texts. Then the pinyin-character parallel corpus is extracted from two open-source Mandarin speech corpus, named AISHELL-1 (Bu et al., 2017) and THCHS-30 (Wang and Zhang, 2015). They are combined together and further divided into the training corpus and the test corpus. BERT-P2C is then fine-tuned on the P2C task on the training corpus. Evaluated on the test corpus, BERT-P2C achieves 94.6% character-level precision.

We choose PERT-base for comparison. We continue the settings in Section 3 and train PERT directly on the training corpus containing about 9.7G News texts. Evaluated directly on the test corpus of BERT-P2C, it gets 93.06% character-level precision which is slightly lower than 94.6% of BERT-P2C. Then, we continue to train PERT on the training corpus of BERT-P2C. The batch size is 32, the learning rate is  $3e^{-4}$  and the epoch number is 20. At this time, PERT achieves 97.77% precision which is much higher than BERT-P2C. Besides, considering the scale of training corpus of PERT is much less (about one tenth) than that of BERT-P2C, and the parameter number of PERT is also much less (about one third) than BERT-P2C, PERT can

be trained more efficiently and effectively. In summary, it is proven that PERT is the better choice to the P2C task than BERT-P2C is.

## B Error Analysis

In this section, we choose some cases from the experiments and get in-depth analysis.

Table 6 compares Bigram with LSTM. In Case 1, the conversion of *dai* is determined by the last word of “墨镜 (sunglasses)”. Bigram can not capture such a long context and it gets an incorrect conversion of “带 (bring)”. Whereas, LSTM can model the whole sentence and get the correct conversion of “戴 (wear)”. It’s similar for the pinyin *shi* in Case 2 which can be predicted by the word of “应对 (handle)”. Moreover, LSTM can also recognize some fix collocation like “既...又... (both...and...)”, and get the result correctly, as shown in Case 3. In a word, Bigram can only captures local context, which limits its performance on the P2C task. However, LSTM can take the whole sequence into consideration, and get improvement from Bigram.

Table 7 compares LSTM with PERT. In Case 1, both conversions are grammatically correct. However, from the semantic point of view, the result of PERT makes more sense. In Case 2, the city name of “重庆(chongqing)” acts as an adjective which means *the style or fashion like Chongqing* in the context. PERT can capture these semantic information and get the correct conversion, whereas LSTM can not. Moreover, we also find that PERT can handle named entity in sentence much better than LSTM, as shown in Case 3. All these cases prove that PERT can better understand the semantic information in sentence and thus get better performance.

<b>Case 1</b>	
Pinyin Sequence	zhi shi <b>dai</b> le yi fu mo jing
Bigram Result	只是带了一副墨镜 (Only <b>bring</b> a sunglasses)
LSTM Result	只是戴了一副墨镜 (Only <b>wear</b> a sunglasses)
<b>Case 2</b>	
Pinyin Sequence	<b>shi</b> wan jia neng gou qing song ying dui
Bigram Result	是玩家能够轻松应对 ( <b>Is</b> player handle it easily)
LSTM Result	使玩家能够轻松应对 ( <b>Enable</b> player handle it easily)
<b>Case 3</b>	
Pinyin Sequence	<b>ji</b> qing liang <b>you</b> shi shang
Bigram Result	及清凉有很时尚 ( <b>And</b> cool <b>has</b> fashion)
LSTM Result	既清凉又很时尚 ( <b>Both</b> cool <b>and</b> fashion)

Table 6: Case Studies on Comparing Bigram with LSTM

<b>Case 1</b>	
Pinyin Sequence	<b>er shi</b> gong gong wei sheng fang kong de wen ti
LSTM Result	二十公共卫生防控的问题 ( <b>Twenty problems</b> of public health prevention and control)
PERT Result	二是公共卫生防控的问题 ( <b>The second problem</b> is about public health prevention and control)
<b>Case 2</b>	
Pinyin Sequence	zhe ge shi pin hen <b>chong qing</b>
LSTM Result	这个视频很宠情 (This video is very <b>pampering</b> )
PERT Result	这个视频很重庆 (This video is very <b>chongqing-style</b> )
<b>Case 3</b>	
Pinyin Sequence	man wei zhong <b>gu yi fa shi</b> ban yan zhe tai li hai le
LSTM Result	漫威中故意发誓扮演者太厉害了 (The role of <b>intentional pledge</b> in Marvel is awesome)
PERT Result	漫威中古一法师扮演者太厉害了 (The role of <b>Ancient One</b> in Marvel is awesome)

Table 7: Case Studies on Comparing LSTM with PERT