# DFM: Dialogue Foundation Model for Universal Large-Scale Dialogue-Oriented Task Learning

Zhi Chen¹, Jiabao Ji¹, Lu Chen¹, Yuncong Liu¹, Da Ma¹, Bei Chen²,
Mengyue Wu¹, Su Zhu³, Xin Dong³, Fujiang Ge³, Qingliang Miao³, Jian-Guang Lou² and Kai Yu¹

¹X-LANCE Lab, Department of Computer Science and Engineering
MoE Key Lab of Artificial Intelligence, AI Institute, Shanghai Jiao Tong University
State Key Lab of Media Convergence Production Technology and Systems, Beijing, China

²Microsoft Research Asia

³AISpeech Co., Ltd., Suzhou, China

#### **Abstract**

Building a universal conversational agent has been a long-standing goal of the dialogue research community. Most previous works only focus on a small set of dialogue tasks. In this work, we aim to build a unified dialogue foundation model (DFM) which can be used to solve massive diverse dialogue tasks. To achieve this goal, a large-scale wellannotated dialogue dataset with rich task diversity (DialogZoo) is collected. We introduce a framework to unify all dialogue tasks and propose novel auxiliary self-supervised tasks to achieve stable training of DFM on the highly diverse large scale DialogZoo corpus. Experiments show that, compared with models of the same size, DFM can achieve state-of-the-art or competitive performance on very rich cross-domain downstream dialogue tasks. This demonstrates that DFM largely extends the ability of unified dialogue pre-trained model.

# 1 Introduction

Nowadays, dialogue systems are widely applied in various scenarios, such as intelligent personal assistants, customer service centers, smart speakers and so on. These applications have extensively promoted dialogue researches, with various dialogue tasks being proposed, e.g. intent classification, dialogue state tracking, conversational question answering, chit-chat, etc. For each task, multiple dialogue datasets are collected and carefully annotated. Consequently, we have witnessed rapid developments of dialogue models and methods (Gao et al., 2019). However, most of them are targeted at a single task, sometimes even a single dataset. This phenomenon has limited the possibility to transfer knowledge between tasks and datasets, which hence undermined the development of unified and well-generalized dialogue systems.

Thanks to the development of pre-trained language models (PLMs) (Qiu et al., 2020), more and




Figure 1: The number distribution of the training samples on 73 dialog corpora, which span 15 supervised dialogue-oriented tasks.

more research focus on building unified models for different natural language processing tasks. In the dialogue area, there are also some attempts to build unified dialogue models. However, previous works only focus on a small subset of dialogue tasks, e.g. dialogue understanding (Chen et al., 2022), and task-oriented dialogue (Su et al., 2021). Building unified dialogue models for massive diverse dialogue tasks has been a long-standing goal in the community.

In this paper, we aim to train a unified **D**ialogue Foundation Model (DFM) for a plethora of dialogue tasks. Such a model should be entitled to two types of skills: 1) Superb dialogue understanding capability, no matter the dialogue is a single utterance or long conversation with multi-turns. It should correctly extract useful information from the dialogue, e.g. entities, dialogue state, user's intent and emotion. 2) Being able to leverage external knowledge, which can be plain text, semistructured description, and structured knowledge graph (KG) or databases. These skills can not be achieved by traditional self-supervised training.

Therefore, we collect a large-scale dialogue

dataset, **DialogZoo**, with rich diversified tasks from publicly available datasets. The dataset consists of 15 dialogue tasks, involving as many as 73 datasets. These tasks include *intent detection*, slot filling, dialogue state tracking, dialogue emotion recognition, KG-guided dialogue, Text-to-SQL, etc. Both the input and output of these tasks are very diverse. The distribution of training samples supporting each task is shown in Figure 1.

In order to train a unified model, the primary prerequisite is to translate data of different tasks into a unified form. Motivated by instruction tuning (Wei et al., 2021) and prompt learning (Liu et al., 2021b), we restructure the input of each dialogue task into three parts: dialogue content, external knowledge, and task description, and normalize all data into text-to-text format. With this unified format, we can directly train the dialogue model initialized from a typical seq2seq PLM, e.g BART (Lewis et al., 2020) and T5 (Raffel et al., 2020). However, our preliminary experiments suggest that straightforward supervised training is not stable for these extremely diverse dialog tasks. Therefore, we further propose two dialogue-oriented self-supervised tasks, and finally use the mixture of supervised and self-supervised methods to successfully train our Dialogue Foundation Model (DFM). The supervised learning paradigm enables the model to learn task-specific skills, while the self-supervised tasks are tailored for dialogue recovery skill. Upon the inclusion of rich diverse datasets and a hybrid training procedure, DFM can be readily used in various downstream dialogue tasks. Extensive experimental results indicate that DFM not only improves seq2seq generation performance, but also enhances the dialogue representation ability.

The contribution of this paper comes three folds:

- We collect a large-scale dialogue dataset (DialogZoo) across 15 dialogue tasks and 73 dialogue datasets, and design a unified text-to-text input/output format for all tasks. It provides a new benchmark which can facilitate researching on unified dialogue models. To the best of our knowledge, this is by far the largest and richest form-unified dialogue dataset supporting as many as 15 different dialogue tasks. We will make it publicly available.
- We introduce two dialogue-oriented selfsupervised tasks as complementary tasks with other supervised tasks. A unified dialogue

- foundation model (DFM) can then be stably trained with multi-task learning on the Dialog-Zoo dataset.
- Extensive experimental results show that our pre-trained DFM outperforms the state-of-theart models on three aspects including dialogue representation, knowledge distillation and generation.

#### 2 Related Work

# 2.1 Pre-trained Dialogue Models

Pre-trained dialogue models usually refer to pretrained language models (PLMs) designed for dialogue tasks. Recent years have witnessed remarkable progress in PLMs. Most of them fall into three categories. The first is training language models on large-scale dialogue corpus using typical selfsupervised objectives, i.e. mask language modeling (MLM) (Devlin et al., 2019) and autoregressive generation (Brown et al., 2020). Representative works that fall into this category include Meena (Adiwardana et al., 2020), Blender (Roller et al., 2020), and DialoGPT (Zhang et al., 2020), which mainly utilize large-scale open-domain dialogues as the training corpus, and TOD-BERT (Wu et al., 2020) which use task-oriented dialogues as the training corpus. The utilization of dialogue corpus significantly boosts the dialogue understanding and generation ability of language models. The second category is training language models on welllabeled dialogues using task-specific supervised objectives. Most works that fall into this category focus on the task-oriented dialogue area, such as SOLOIST (Peng et al., 2021), PPTOD (Su et al., 2021), and GALAXY (He et al., 2022). The usage of dialogue annotations not only improves the performance of related downstream tasks but also improves the transferability of dialogue models in few-shot scenarios. The third is to design dialogueoriented self-supervised training objectives (Bao et al., 2020; Xu and Zhao, 2021). These works try to minimize the gap between self-supervised tasks and downstream dialogue tasks.

Different from the above works, we collect a large scale well-annotated dialogue corpus of very diverse dialogue tasks and formulate all of them into a unified text-to-text format. With this supervised corpus, we further propose two dialogue-oriented self-supervised tasks to jointly pre-train our unified dialogue model.

DOTs	Dialog History	External Knowledge	Output Format	#Dataset
Dialogue Rewrite (REW)	Multiple Turns	None	Single Utterance	3
Natural Language Generation (NLG)	None	Semi-structured Description	Single Utterance	5
Dialogue Summary (SUM)	Multiple Turns	None	Summary Text	3
Slot Filling (FILL)	Single Turn	Semi-structured Description	Logical Form	7
Intent Detection (INTENT)	Single Turn	Semi-structured Description	Classification Name	4
Dialogue State Tracking (DST)	Multiple Turns	Semi-structured Description	Logical Form	6
Commonsense QA (COMM)	Single Turn	Unstructured Text	Fact of Phrase	5
Emotion Detection (EMO)	Single Turn	Semi-structured Description	Classification Name	5
Document QA (DOCQA)	Multiple Turns	Unstructured Text	Fact of Phrase	7
Dialogue QA (DIALQA)	Multiple Turns	Unstructured Text	Fact of Phrase	6
Chitchat (CHAT)	Multiple Turns	Unstructured Text	Single Utterance	5
Knowledge-graph Dialogue (KGDIAL)	Multiple Turns	Structured Knowledge	Single Utterance	2
Text-to-SQL (TXT2SQL)	Multiple Turns	Structured Knowledge	Logical Form	3
User Simulator (SIM)	Multiple Turns	Semi-structured Description	Single Utterance	6
Task-oriented Dialogue (TOD)	Multiple Turns	Semi-structured Description	Single Utterance	6

Table 1: The detailed introduction of 15 dialogue-oriented tasks (DOTs) under the unified generative framework. "#Dataset" means the number of datasets used in corresponding task.

# 2.2 Multi-task Learning for Pre-trained Language Models

Recently, multi-task learning of pre-trained language models has attracted spotlight research interests. Aghajanyan et al. (2021) proposes the concept of pre-finetuning, which is massive multi-task learning on 50 tasks. They show that pre-finetuning consistently improves performance for pre-trained models on various classification and generation tasks. FLAT (Wei et al., 2021) and T0 (Sanh et al., 2021) scale to more tasks (i.e. 62 and 171 respectively) for multi-task learning, and translate all samples to text-to-text formats based on task instructions. The most recent proposed ExT5 (Aribandi et al., 2021) is a model pre-trained using multi-task learning of self-supervised span denoising and supervised datasets.

In the dialogue research field, there are also a few works on multi-task learning of pre-trained language models. Su et al. (2021) proposes a multi-task pre-training framework that allows a unified dialogue model to solve different sub-tasks in task-oriented dialogue systems. Chen et al. (2022) investigates different multi-task training strategies for a set of dialogue understanding tasks. Our work distinguishes from the above by not limiting to a subset of dialogue tasks. We explore large-scale multi-task learning of enormous yet diverse supervised dialogue tasks as well as two newly proposed dialogue-oriented self-supervised tasks.

#### 3 DialogZoo

As we know, dialogue always happens on specific scenarios, which is also called dialogue content (Deriu et al., 2021). In existing dialogue tasks, the dialogue content mainly contains di-

alogue history and the corresponding grounded knowledge. For example, the knowledge in text-to-SQL is schema of database and the knowledge in task-oriented dialogue task is dialogue ontology designed by domain experts. However, dialogue corpus with paired dialogue and knowledge is hard to collect from daily conversations, like Reddit. Instead, we choose to collect the existing well-annotated dialogue corpora to train a unified dialog model.

#### 3.1 Dialogue-Oriented Tasks

All the collected corpora in this paper are dialogueoriented. Our main principle is to cover as many diverse dialogue formats as possible. We finally collect 73 dialogue datasets, named DialogZoo, which span 15 different dialogue-oriented tasks. DialogZoo contains various dialogue types: singleturn utterance or question, sequential questions, multi-turn chitchat and task-oriented dialogue. The formats of external knowledge in DialogZoo are also diverse. They include world knowledge, unstructured text, semi-structured description and structured knowledge. Note that world knowledge means the knowledge is not given, which needs the dialogue model to reason, like dialogue summary task. Due to rich diversity of dialogue-oriented tasks, DialogZoo contains a wide variety of outputs formats including classification names (like in intent detection), plain text utterance (like in dialogue rewrite), logical forms (like in text-to-SQL) and so on. The details are shown in Table 1.

# 3.2 Knowledge-Grounded Dialogue

One intrinsic characteristic of dialogue is that the dialogue system is knowledge-intensive. Dialogue




Figure 2: All of the collected dialogue datasets in DialogZoo. The upper right means that the dialog tasks need stronger understanding ability on both dialogue and knowledge levels.

understanding and generation heavily rely on the given external knowledge. For example, all available intents need be explicitly designed by experts before performing dialogue intent detection. Hence, a unified dialogue model needs to integrate external knowledge in addition to dialogue content.

In this paper, the unified dialogue model is expected to have rich abilities of dialogue understanding and knowledge understanding. Hence, we differentiate the datasets of DialogZoo according to these two dimensions, as shown in Figure 2. The x-axis of dialog understanding measures the complexity of dialogue content. The dialogue turns become longer from left to right. The y-axis of external knowledge measures the difficulty of extracting useful information. At the bottom of the quadrant diagram, external knowledge is usually well-organised and structured. At the top, external knowledge may just be document text, which contains large amounts of redundant information and increases the difficulty of understanding than well-labelled structured knowledge. Specially, in this paper, we put the chitchat task at the top, where the external knowledge is not given. The chitchat task requests the dialogue agent to remember the related world knowledge by itself. Note that the size of circles in Figure 2 is proportional to the scale of annotated samples.

# 4 Dialogue Foundation Model

In this section, we first design a framework to formulate all the dialogue-oriented tasks into text-to-text format, named dialogue foundation model (DFM). To enhance representation ability of DFM, we further design two self-supervised tasks (named REO and CLO). Last but not least, we introduce an

effective training strategy for large-scale highlydiverse dialogue-oriented tasks, where the training samples of different tasks are unbalanced.

#### 4.1 Unified Generative Framework

As shown in Figure 3, dialogue corpora always connect with the diverse external knowledge. For example, the external knowledge of QA data is normally sourced from document and the task-oriented dialog (TOD) is associated with a database, which is defined by the expert-designed dialog ontology. In DialogZoo, all dialogue types are included in the dialogue history, e.g., single turn QA, sequential QA (SQA), task-oriented dialogue (TOD) and chitchat (Chat). The types of corresponding external knowledge are also diverse, including unstructured document, semi-structured scene description, structured database etc.

Given this circumstance, we split the input of dialogue-oriented tasks (DOTs) into three components: dialogue history, connected external knowledge and task definition. The output format under the unified generative framework is dependent on the task definition. The unified generative template is shown in third part of Figure 3, where "[TI]" is the special token of dialogue-oriented tasks, e.g., "[rew]" represents the task identification of dialogue rewrite (REW) task. The dialogue history and the corresponding external knowledge have various input formats across 15 dialogue-oriented tasks. The input dialogue content consists of three categories: single turn, multiple turns and "None", where "None" dialogue content exists in NLG task, whose input is the logical form. The external knowledge span four categories: unstructured text, semi-structured description, structured knowledge and "None". Here, the special case "None" exists in the general dialogue-oriented tasks, e.g, dialogue summary. The task definition is the custom description with only one sentence. The output formats are also diverse, which consist of unstructured text (e.g., in INTENT and SUM), single utterance (e.g., in REW and NLG), structured knowledge (e.g., in TXT2SQL). Note that the output of these supervised tasks never involves complete dialogue content. The detailed introduction of the input and output on all DOTs are shown in Table 1, with specific instances shown in Appendix.

#### 4.2 Self-supervised Tasks

As mentioned in Section 4.1, the complete dialogue content is never covered by the output of the ex-

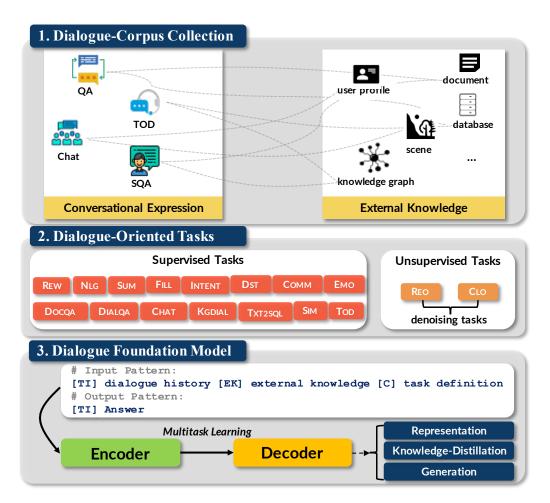


Figure 3: The 3-step construction pipeline for dialogue foundation model (DFM): 1) dialogue-corpus collection: collecting the popular dialogue datasets; 2) dialogue-oriented tasks: designing two unsupervised denoising tasks; 3) unified DOT modeling: training the unified DFM with multitask learning method.

isting supervised tasks in DialogZoo. Therefore, the decoder of DFM is limited to learn information at turn-level, which may restrict its dialog-level content representation capability. To alleviate this problem, we design two self-supervised dialogue tasks: REO and CLO, which are both dialogue-level denoising tasks.

**REO Task** Under the DFM framework, the dialogue content in REO is the aggregation of the multiple-turn dialogue data in all supervised corpora. We randomly permute the order of mult-turn dialogue at turn level. The REO task aims to recover the original order of the permuted dialogue. The input external knowledge of REO is "None".

CLO Task Similarly, the dialogue content in CLO is the aggregation of single-turn and multi-turn dialogue data in all supervised corpora. We leverage the entity extraction tool (spaCy) <sup>1</sup> to extract all meaningful entities in the dialogue content. The extracted entities are replaced by masking tokens in

the dialogue content and the set of extracted entities are permuted, working as external knowledge. The CLO task aims to recover the complete dialogue content given the entities from external knowledge and the masked dialogue content.

#### 4.3 Task-iterative Training Strategy

As shown in Figure 1, the distribution of training samples is extremely unbalanced. Our preliminary results show that direct mix-up training makes the model converge to the dominant tasks, e.g., dialogue state tracking (DST).

Therefore, we apply a task-iterative training strategy, where a hyperparameter is used to control the task iteration step (e.g., 512 samples in our experiments). In the multi-task training process, we iterate the dialogue-oriented tasks (including supervised and self-supervised tasks) at each 512 samples. The epoch ends until the data of the largest task are all swept. The rest tasks may be trained more than one time. This task-iterative training

<sup>1</sup>https://github.com/explosion/spaCy

strategy can guarantee that every DOT is trained by the same steps at each epoch, purposefully applied to achieve comparable results on all DOTs. The detailed training strategies are shown in Algorithm 1 of Appendix. After multi-task pre-training, DFM can be directly used for tasks in DialogZoo, or further fine-tuned on specific downstream datasets.

# 5 Experiments

We train the unified dialogue foundation model (DFM) on DialogZoo with the 15 existing supervised dialog-oriented tasks and the 2 newly proposed self-supervised tasks. The DFM can be used in three primary ways: representation, knowledgedistillation and generation. Representation means that DFM can be directly initialized as a dialogue encoding model and then be fine-tuned in downstream tasks. Knowledge-distillation indicates that DFM can serve as a dialogue understanding or information/knowledge extraction model. Generation means that it is also a dialogue response model, which can generate fluent and reasonable text expression. Compared with previous pre-trained dialogue models, DFM is the only one that can achieve strong performance on all the three aspects.

#### 5.1 Implementation

We respectively use BART-Base (Lewis et al., 2020) and T5-Base (Raffel et al., 2020) as the backbones for DFM. All the Transformer-based pretrained language models are loaded from Hugging-Face library (Wolf et al., 2019). We train the DFM models on 8 V100 GPUs with 32G memory. The batch size is 256 with gradient accumulation strategy (updated per 8 steps). The max token length of input and output sets as 350. The learning rate is 1e-5 with AdamW optimizer. DFM models are trained with 200K steps. We finally involved 10,661,579 training samples, including supervised instances and self-supervised instances, which extract from only training sets of collected datasets. The detailed proportion of training samples is illustrated in Figure 4.

#### 5.2 Usage 1: Representation

We conduct all the representation experiments on the standard DialoGLUE benchmark (Mehri et al., 2020), which consists of four dialogue-oriented tasks: slot filling (FILL), intent detection (INTENT), semantic parsing and dialogue state tracking (DST). TOP (Gupta et al., 2018) is semantic parsing task




Figure 4: The proportion of the training samples on unsupervised tasks and supervised tasks. The top 4 supervised tasks that have more training samples are DST, CHAT, TOD and SIM.

in DialoGLUE, which is unseen in DialogZoo. The strong baseline model ConvBERT (Mehri et al., 2020) is pre-trained on over 70 million Reddit data with MLM method (Devlin et al., 2019). To fairly compare with our proposed DFM, we also pre-train the comparable ConvBERT\* with our collected dialogue corpora. The 4.6 million DialogZoo data used to train ConvBERT\* is substantially less than the original corpus in ConvBERT. We rerun ConvBERT and ConvBERT\* on DialoGLUE with their released source code. All the test results are based on the checkpoints that achieve the best evaluation performance on development set. As shown in Table 2, we can see that the representation ability of ConvBERT\* is absolutely worse than the ConvBERT. The main reason is that the scale of pre-training corpus is less in an order of magnitude, which is the main factor affecting unsupervised learning performance.

We directly replace the ConvBERT model with our DFM, where we do not adjust any hyperparameters during the fine-tuning process. The designed models for downstream tasks in DialoGLUE are also unchanged, e.g, DST used Trippy model (Heck et al., 2020). DFM<sub>bart</sub> and DFM<sub>t5</sub> means that the backbones of DFM are BART-Base and T5-Base, respectively. Compared with original backbones, two DFMs achieved better performance on all DialoGLUE tasks. DFM $_{\rm bart}$ enjoys the best performance on intent detection tasks. However, there is a large performance decrease in slot filling tasks compared to ConvBERT. DFM<sub>t5</sub> surpasses ConvBERT on all tasks, where the average score gets absolute 0.88 points gain. It indicates that the multitask learning method is another way to enhance the representation ability of the pre-trained model with the same scale cor-

DialoGLUE			PLMs			
DialogLoE	ConvBERT	ConvBERT*	$BART_{\mathrm{base}}$	$DFM_{\rm bart}$	$T5_{\rm base}$	$DFM_{\rm t5}$
<b>Intent Detection</b>						
BANKING77 (ACC.)	92.89	92.08	93.15	93.32	92.31	93.02
CLINC150 (ACC.)	97.04	95.58	96.20	97.33	96.49	97.31
HWU64 (ACC.)	91.82	90.89	91.17	94.42	91.26	93.16
Slot Filling						
RESTUARANT8K (F1)	96.04	95.29	92.29	93.89	95.98	96.07
DSTC8 (F1)	89.45	86.71	86.77	88.53	90.56	90.76
Semantic Parsing						
TOP (EM)	81.43	80.80	80.71	81.24	81.81	82.04
Dialog State Tracking						
MULTIWOZ2.1 (JGA)	58.11	56.21	56.57	59.19	57.21	60.58
Average Score	86.68	85.37	85.27	86.85	86.73	87.56

Table 2: The representation ability of six different pre-trained language models on DialoGLUE benchmark. All metrics are the higher the better.




Figure 5: The average scores of DFMs with and without two self-supervised denoising tasks.

Knowledge	Methods			
Distillation	SOTA	$DFM_{\rm t5}$	w/FT	
<b>Intent Detection</b>				
BANKING77 (ACC.)	<b>93.86</b> (2021)	92.82	93.63	
CLINC150 (ACC.)	97.16 (2020a)	100	100	
HWU64 (ACC.)	92.94 (2020)	98.70	98.42	
Slot Filling				
RESTUARANT8K (F1)	98.00 (2021)	95.95	99.28	
DSTC8 (F1) <sup>†</sup>	89.45 (2020)	47.85	89.69	
Semantic Parsing	•			
TOP (EM) <sup>‡</sup>	86.67 (2020)	/	87.10	
Dialogue State Tracking				
MULTIWOZ2.2 (JGA)	57.70 (2022b)	58.52	59.20	

Table 3: The performance on knowledge distillation tasks. † means the corresponding dataset on slot filling task is unseen in DialogZoo. ‡ means the task is unseen in DialogZoo.

pus. Compared with DFM $_{bart}$ , DFM $_{t5}$  has obvious performance gain in DialoGLUE.

Ablation Study We remove two self-supervised tasks in DialogZoo to investigate their effects on representation ability. As shown in Figure 5, "w/o SST" means the unified model is trained on only supervised dialogue-oriented tasks with backbone of BART-Base. We can see that the average scores on DialoGLUE are unstable during the training process. DFM with two unsupervised tasks can achieve stable growth on average score.

# 5.3 Usage 2: Knowledge-Distillation

In addition to using DFM as representation model, we can also leverage DFM as knowledge distillation model to directly parse the structured knowledge in a generative way. Note that knowledge distillation here means the outputs of DOTs are structured logical form, which is well-organized knowledge. Due to the advance representation performance of DFM $_{t5}$  and content limitation, we just evaluate pre-trained DFM $_{t5}$  model on the task of DialoGLUE. Note that we replace MULTIWOZ2.1 with MULTIWOZ2.2, which is the clean-annotation version used in DialogZoo. As shown in Table 3,  $DFM_{\mathrm{t5}}$  can achieve new state-of-the-arts on three knowledge distillation tasks. On CLINC15, DFM<sub>t5</sub> even reaches 100% accuracy. "w/FT" means that DFM<sub>t5</sub> continues to be fine-tuned on the corresponding tasks. The fine-tuned DFM<sub>t5</sub> achieve another four SOTA performance on the distillation tasks. Note that DSTC8 on slot filling task is unseen on DialogZoo, which is a zero-shot setting. DFM<sub>t5</sub> can get 47.85 F1 score. It indicates that DFM has strong generalization capability. On DST task, DFM can also surpass the well-designed SOTA model. For DialogZoo, TOP is an unseen task, which is firstly formulated as a generation task and then fine-tuned on DFM $_{
m t5}$ . For the new task, our DFM $_{
m t5}$  can still surpass SOTA with absolute 0.33 points. To further validate the efficiency of DFM, we leverage our DFM on more challenging TXT2SQL benchmarks.

Application in TXT2SQL We conduct the experiments on Spider and CoSQL benchmarks. The database schema on development set are unseen in training data, which is challenging zero-shot text-to-SQL setup. Compared with single-turn Spider benchmark, CoSQL is a sequential multi-

Datasets		Methods	
Datasets	$T5_{\mathrm{base}}$	$UNISKG_{\rm base}$	$DFM_{\rm t5}$
With Beam Search	Decodir	ng	
Spider (EM)	57.20	59.86	59.96
CoSQL (QEM)	42.30	45.68	46.57
With PICARD Dec	oding		
Spider (EM)	65.80	/	68.47
CoSQL (QEM)	47.90	/	52.04

Table 4: The performance on development sets of text-to-SQL benchmarks: Spider and CoSQL, where EM and QEM are exact match accuracy and question match accuracy.

Generation	Methods			
Generation	SOTA	$DFM_{\rm t5}$	w/FT	
Chitchat				
PERSONALCHAT (R-L)	15.22 (2021)	23.53	25.79	
Question Answering				
COQA (ACC.)	90.70 (2019)	65.20	80.30	
Dialog Summary	•			
SAMSUM (R-L)	45.20 (2020)	47.36	49.59	
Dialog Rewrite				
CANARD (R-L)	74.70 (2021a)	83.91	83.87	

Table 5: The performance on generation tasks with more free and larger output space than knowledge distillation tasks.

turn text-to-SQL benchmark. There are lots of co-reference and information ellipse in dialogue content. To fairly compare to DFM $_{t5}$ , we leverage UNISKG $_{\rm base}$  (Xie et al., 2022) as the baseline, which is a special pre-trained model for structured inputs with T5-base as backbone. As shown in Table 4, DFM $_{t5}$  has comparable performance on Spider with UNISKG $_{\rm base}$ . However, on difficult CoSQL benchmark, our DFM $_{t5}$  has a distinct advantage compared to vanilla T5 $_{\rm base}$  and UNISKG $_{\rm base}$  with beam search decoding method. DFM $_{t5}$  still maintains the advantages on these two benchmarks with PICARD decoding (Scholak et al., 2021), which is a grammar-constrained decoding method.

#### 5.4 Usage 3: Generation

Different from structured semantic space in knowledge distillation, generation tasks support free and large output space, where our DFM also shows splendid efficiency. As shown in Table 5, DFM $_{\rm t5}$  achieves comparable performance on dialogue generation tasks, which include two typical dialogue systems (Chitchat and QA). DFM $_{\rm t5}$  outperforms SOTA on three general generative tasks (chitchat, dialogue summary and dialogue rewrite). On QA task, the SOTA method leverages the data augmentation method, which is compatible with our method. In the future, we will try it on our model.

		~		~	
Model	Inform	Success	BLEU	Combined	
With Predicted Dia	alogue St	tate			
SimpleTOD (2020)	84.40	70.10	15.01	92.26	
SOLOIST (2021)	85.50	72.90	16.54	95.74	
MinTL (2020)	84.88	74.91	17.89	97.78	
UBAR (2021)	91.50	77.40	17.00	101.50	
NCM (2021c)	86.90	76.20	20.58	102.13	
HTER (2021)	91.72	75.80	19.05	102.81	
PPTOD (2021)	89.20	79.40	18.62	102.92	
BORT (2022a)	93.80	85.80	18.50	108.30	
GALAXY (2022)	94.40	85.30	20.50	110.35	
$\mathrm{DFM_{t5}}$	91.50	84.70	22.86	110.96	
With Golden Dialogue State					
UBAR (2021)	94.00	83.60	17.20	106.00	
GALAXY (2022)	94.80	85.70	19.93	110.18	
$\mathrm{DFM_{t5}}$	93.20	85.60	23.38	112.78	

Table 6: The performance on end-to-end TOD MULTIWOZ2.0 benchmark.

To further validate the efficiency of DFM, we evaluate DFM<sub>t5</sub> on well-studied end-to-end TOD task. Application in E2ETOD We conduct the experiments on MULTIWOZ2.0 benchmark. As shown in Table 6, there are four metrics: **Inform**, **Success**, BLEU and Combined. Inform and Success measure whether system response contains the user's constraints and matched entities. These two metrics measure the task completion ability of dialogue system. BLEU is BLEU-4 score, which measures the response consistency. Combined score equals to 0.5\*(Inform+Success)+BLEU. The dialogue state tracking is an indispensable part of TOD system, whose results are used to get database state. With predicted dialogue state, which is another DST model fine-tuned from DFM<sub>t5</sub>, our DFM<sub>t5</sub> can achieve comparable results with SOTA methods. There is absolute 0.61 **Combined** score gain. However, with golden dialogue states, DFM<sub>t5</sub> reaches over 112 Combined score.

#### 6 Conclusion

In this paper, we collect 73 dialog datasets across 15 supervised dialog-oriented tasks (DialogZoo) to pre-train a unified dialog foundation model (DFM). To enhance dialogue-level representation ability of DFM, we further propose two unsupervised dialog denoising tasks to jointly pre-train the DFM with multitask learning. The experimental results show that DFM can obtain strong performance on three aspects: representation, knowledge distillation and generation. DFM contributes the first multi-purposed cross-domain pre-trained model with superior performance on numerous downstream tasks.

# References

- Daniel Adiwardana, Minh-Thang Luong, David R So, Jamie Hall, Noah Fiedel, Romal Thoppilan, Zi Yang, Apoorv Kulshreshtha, Gaurav Nemade, Yifeng Lu, et al. 2020. Towards a human-like open-domain chatbot. *arXiv preprint arXiv:2001.09977*.
- Armen Aghajanyan, Anchit Gupta, Akshat Shrivastava, Xilun Chen, Luke Zettlemoyer, and Sonal Gupta. 2021. Muppet: Massive multi-task representations with pre-finetuning. *arXiv preprint arXiv:2101.11038*.
- Vamsi Aribandi, Yi Tay, Tal Schuster, Jinfeng Rao, Huaixiu Steven Zheng, Sanket Vaibhav Mehta, Honglei Zhuang, Vinh Q Tran, Dara Bahri, Jianmo Ni, et al. 2021. Ext5: Towards extreme multitask scaling for transfer learning. *arXiv preprint arXiv:2111.10952*.
- Siqi Bao, Huang He, Fan Wang, Hua Wu, and Haifeng Wang. 2020. Plato: Pre-trained dialogue generation model with discrete latent variable. In *Proceedings* of the 58th Annual Meeting of the Association for Computational Linguistics, pages 85–96.
- Chandra Bhagavatula, Ronan Le Bras, Chaitanya Malaviya, Keisuke Sakaguchi, Ari Holtzman, Hannah Rashkin, Doug Downey, Scott Wen-tau Yih, and Yejin Choi. 2019. Abductive commonsense reasoning. *CoRR*, abs/1908.05739.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901.
- Bill Byrne, Karthik Krishnamoorthi, Chinnadhurai Sankar, Arvind Neelakantan, Daniel Duckworth, Semih Yavuz, Ben Goodrich, Amit Dubey, Kyu-Young Kim, and Andy Cedilnik. 2019. Taskmaster-1: Toward a realistic and diverse dialog dataset.
- Jon Ander Campos, Arantxa Otegi, Aitor Soroa, Jan Deriu, Mark Cieliebak, and Eneko Agirre. 2019. Conversational qa for faqs. In 3rd Conversational AI: "Today's Practice and Tomorrow's Potential" workshop at NeurIPS.
- Iñigo Casanueva, Tadas Temčinas, Daniela Gerz, Matthew Henderson, and Ivan Vulić. 2020a. Efficient intent detection with dual sentence encoders. In Proceedings of the 2nd Workshop on Natural Language Processing for Conversational AI, pages 38– 45.
- Inigo Casanueva, Tadas Temčinas, Daniela Gerz, Matthew Henderson, and Ivan Vulić. 2020b. Efficient intent detection with dual sentence encoders. *arXiv preprint arXiv:2003.04807*.

- Debanjan Chaudhuri, Md Rony, Rashad Al Hasan, Simon Jordan, and Jens Lehmann. 2019. Using a kg-copy network for non-goal oriented dialogues. In *International Semantic Web Conference*, pages 93–109. Springer.
- Yulong Chen, Yang Liu, and Yue Zhang. 2021. Dialogsum challenge: Summarizing real-life scenario dialogues. In *Proceedings of the 14th International Conference on Natural Language Generation*, pages 308–313.
- Zhi Chen, Lu Chen, Bei Chen, Libo Qin, Yuncong Liu, Su Zhu, Jian-Guang Lou, and Kai Yu. 2022. Unidu: Towards a unified generative dialogue understanding framework. *arXiv preprint arXiv:2204.04637*.
- Eunsol Choi, He He, Mohit Iyyer, Mark Yatskar, Wentau Yih, Yejin Choi, Percy Liang, and Luke Zettlemoyer. 2018. Quac: Question answering in context. *CoRR*, abs/1808.07036.
- Sam Coope, Tyler Farghly, Daniela Gerz, Ivan Vulić, and Matthew Henderson. 2020. Span-convert: Fewshot span extraction for dialog with pretrained conversational representations. ACL.
- Alice Coucke, Alaa Saade, Adrien Ball, Théodore Bluche, Alexandre Caulier, David Leroy, Clément Doumouro, Thibault Gisselbrecht, Francesco Caltagirone, Thibaut Lavril, et al. 2018. Snips voice platform: an embedded spoken language understanding system for private-by-design voice interfaces. *arXiv* preprint arXiv:1805.10190.
- Leyang Cui, Yu Wu, Shujie Liu, Yue Zhang, and Ming Zhou. 2020. Mutual: A dataset for multi-turn dialogue reasoning. In *Proceedings of the 58th Conference of the Association for Computational Linguistics*. Association for Computational Linguistics.
- Dorottya Demszky, Dana Movshovitz-Attias, Jeongwoo Ko, Alan Cowen, Gaurav Nemade, and Sujith Ravi. 2020. GoEmotions: A Dataset of Fine-Grained Emotions. In 58th Annual Meeting of the Association for Computational Linguistics (ACL).
- Jan Deriu, Alvaro Rodrigo, Arantxa Otegi, Guillermo Echegoyen, Sophie Rosset, Eneko Agirre, and Mark Cieliebak. 2021. Survey on evaluation methods for dialogue systems. *Artificial Intelligence Review*, 54(1):755–810.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. Bert: Pre-training of deep bidirectional transformers for language understanding. In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers), pages 4171–4186.
- Ahmed Elgohary, Denis Peskov, and Jordan Boyd-Graber. 2019. Can you unpack that? learning to rewrite questions-in-context. In *Empirical Methods in Natural Language Processing*.

- Jianfeng Gao, Michel Galley, Lihong Li, et al. 2019. Neural approaches to conversational ai. *Foundations and trends® in information retrieval*, 13(2-3):127–298.
- Bogdan Gliwa, Iwona Mochol, Maciej Biesek, and Aleksander Wawer. 2019. Samsum corpus: A human-annotated dialogue dataset for abstractive summarization. *arXiv* preprint arXiv:1911.12237.
- Ian J Goodfellow, Dumitru Erhan, Pierre Luc Carrier, Aaron Courville, Mehdi Mirza, Ben Hamner, Will Cukierski, Yichuan Tang, David Thaler, Dong-Hyun Lee, et al. 2013. Challenges in representation learning: A report on three machine learning contests. In *International conference on neural information processing*, pages 117–124. Springer.
- Sonal Gupta, Rushin Shah, Mrinal Mohit, Anuj Kumar, and Mike Lewis. 2018. Semantic parsing for task oriented dialog using hierarchical representations. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2787–2792.
- Wanwei He, Yinpei Dai, Yinhe Zheng, Yuchuan Wu, Zheng Cao, Dermot Liu, Peng Jiang, Min Yang, Fei Huang, Luo Si, et al. 2022. Galaxy: A generative pre-trained model for task-oriented dialog with semi-supervised learning and explicit policy injection. *Proceedings of the AAAI Conference on Artificial Intelligence*.
- Michael Heck, Carel van Niekerk, Nurul Lubis, Christian Geishauser, Hsien-Chin Lin, Marco Moresi, and Milica Gasic. 2020. Trippy: A triple copy strategy for value independent neural dialog state tracking. In *Proceedings of the 21th Annual Meeting of the Special Interest Group on Discourse and Dialogue*, pages 35–44.
- Matthew Henderson, Blaise Thomson, and Jason D Williams. 2014a. The second dialog state tracking challenge. In *Proceedings of the 15th annual meeting of the special interest group on discourse and dialogue (SIGDIAL)*, pages 263–272.
- Matthew Henderson, Blaise Thomson, and Jason D Williams. 2014b. The third dialog state tracking challenge. In 2014 IEEE Spoken Language Technology Workshop (SLT), pages 324–329. IEEE.
- Ehsan Hosseini-Asl, Bryan McCann, Chien-Sheng Wu, Semih Yavuz, and Richard Socher. 2020. A simple language model for task-oriented dialogue. *arXiv* preprint arXiv:2005.00796.
- Lifu Huang, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. 2019. Cosmos qa: Machine reading comprehension with contextual commonsense reasoning. *arXiv preprint arXiv:1909.00277*.
- Qi Jia, Hongru Huang, and Kenny Q Zhu. 2020. Ddrel: A new dataset for interpersonal relation classification in dyadic dialogues. *arXiv preprint arXiv:2012.02553*.

- Qingnan Jiang, Lei Chen, Ruifeng Xu, Xiang Ao, and Min Yang. 2019. A challenge dataset and effective models for aspect-based sentiment analysis. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 6280–6285.
- Ying Ju, Fubang Zhao, Shijie Chen, Bowen Zheng, Xuefeng Yang, and Yunfeng Liu. 2019. Technical report on conversational question answering. *CoRR*, abs/1909.10772.
- Tomás Kociský, Jonathan Schwarz, Phil Blunsom, Chris Dyer, Karl Moritz Hermann, Gábor Melis, and Edward Grefenstette. 2018. The narrativeqa reading comprehension challenge. *Transactions of the Association for Computational Linguistics*.
- Guokun Lai, Qizhe Xie, Hanxiao Liu, Yiming Yang, and Eduard Hovy. 2017. Race: Large-scale reading comprehension dataset from examinations. *arXiv* preprint arXiv:1704.04683.
- Stefan Larson, Anish Mahendran, Joseph J. Peper, Christopher Clarke, Andrew Lee, Parker Hill, Jonathan K. Kummerfeld, Kevin Leach, Michael A. Laurenzano, Lingjia Tang, and Jason Mars. 2019. An evaluation dataset for intent classification and out-of-scope prediction. In Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP).
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020. Bart: Denoising sequence-to-sequence pretraining for natural language generation, translation, and comprehension. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7871–7880.
- Jiaqi Li, Ming Liu, Min-Yen Kan, Zihao Zheng, Zekun Wang, Wenqiang Lei, Ting Liu, and Bing Qin. 2020. Molweni: A challenge multiparty dialogues-based machine reading comprehension dataset with discourse structure. In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 2642–2652, Barcelona, Spain (Online). International Committee on Computational Linguistics.
- Xiujun Li, Sarah Panda, Jingjing Liu, and Jianfeng Gao. 2018. Microsoft dialogue challenge: Building end-to-end task-completion dialogue systems. *arXiv* preprint arXiv:1807.11125.
- Yanran Li, Hui Su, Xiaoyu Shen, Wenjie Li, Ziqiang Cao, and Shuzi Niu. 2017. DailyDialog: A manually labelled multi-turn dialogue dataset. In *Proceedings of the Eighth International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 986–995, Taipei, Taiwan. Asian Federation of Natural Language Processing.

- Zhaojiang Lin, Andrea Madotto, Genta Indra Winata, and Pascale Fung. 2020. Mintl: Minimalist transfer learning for task-oriented dialogue systems. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 3391–3405.
- Junpeng Liu, Yanyan Zou, Hainan Zhang, Hongshen Chen, Zhuoye Ding, Caixia Yuan, and Xiaojie Wang. 2021a. Topic-aware contrastive learning for abstractive dialogue summarization. *arXiv preprint arXiv:2109.04994*.
- Pengfei Liu, Weizhe Yuan, Jinlan Fu, Zhengbao Jiang, Hiroaki Hayashi, and Graham Neubig. 2021b. Pretrain, prompt, and predict: A systematic survey of prompting methods in natural language processing. arXiv preprint arXiv:2107.13586.
- Qi Liu, Lei Yu, Laura Rimell, and Phil Blunsom. 2021c. Pretraining the noisy channel model for task-oriented dialogue. *Transactions of the Association for Computational Linguistics*, 9:657–674.
- Qian Liu, Bei Chen, Jian-Guang Lou, Bin Zhou, and Dongmei Zhang. 2020. Incomplete utterance rewriting as semantic segmentation. *arXiv* preprint *arXiv*:2009.13166.
- Xingkun Liu, Arash Eshghi, Pawel Swietojanski, and Verena Rieser. 2021d. Benchmarking natural language understanding services for building conversational agents. In *Increasing Naturalness and Flexibility in Spoken Dialogue Interaction*, pages 165–183. Springer.
- Kaixin Ma, Tomasz Jurczyk, and Jinho D. Choi. 2018. Challenging reading comprehension on daily conversation: Passage completion on multiparty dialog. In Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers), pages 2039–2048, New Orleans, Louisiana. Association for Computational Linguistics.
- Scott Martin, Shivani Poddar, and Kartikeya Upasani. 2020. Mudoco: corpus for multidomain coreference resolution and referring expression generation. In *Proceedings of the 12th language resources and evaluation conference*, pages 104–111.
- Shikib Mehri, Mihail Eric, and Dilek Hakkani-Tur. 2020. Dialoglue: A natural language understanding benchmark for task-oriented dialogue. *arXiv* preprint arXiv:2009.13570.
- Nikola Mrkšić, Diarmuid O Séaghdha, Tsung-Hsien Wen, Blaise Thomson, and Steve Young. 2016. Neural belief tracker: Data-driven dialogue state tracking. *arXiv preprint arXiv:1606.03777*.
- Jekaterina Novikova, Ondrej Dušek, and Verena Rieser. 2017. The E2E dataset: New challenges for endto-end generation. In *Proceedings of the 18th* Annual Meeting of the Special Interest Group on

- Discourse and Dialogue, Saarbrücken, Germany. ArXiv:1706.09254.
- Baolin Peng, Chunyuan Li, Jinchao Li, Shahin Shayandeh, Lars Liden, and Jianfeng Gao. 2021. Soloist: Building task bots at scale with transfer learning and machine teaching. *Transactions of the Association for Computational Linguistics*, 9:807–824.
- Denis Peskov, Nancy Clarke, Jason Krone, Brigi Fodor, Yi Zhang, Adel Youssef, and Mona Diab. 2019. Multi-domain goal-oriented dialogues (MultiDoGO): Strategies toward curating and annotating large scale dialogue data. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 4526–4536, Hong Kong, China. Association for Computational Linguistics.
- Soujanya Poria, Devamanyu Hazarika, Navonil Majumder, Gautam Naik, Erik Cambria, and Rada Mihalcea. 2018. Meld: A multimodal multi-party dataset for emotion recognition in conversations. arXiv preprint arXiv:1810.02508.
- Soujanya Poria, Navonil Majumder, Devamanyu Hazarika, Deepanway Ghosal, Rishabh Bhardwaj, Samson Yu Bai Jian, Pengfei Hong, Romila Ghosh, Abhinaba Roy, Niyati Chhaya, et al. 2021. Recognizing emotion cause in conversations. *Cognitive Computation*, 13(5):1317–1332.
- Xipeng Qiu, Tianxiang Sun, Yige Xu, Yunfan Shao, Ning Dai, and Xuanjing Huang. 2020. Pretrained models for natural language processing: A survey. *Science China Technological Sciences*, 63(10):1872–1897.
- Jun Quan, Deyi Xiong, Bonnie Webber, and Changjian Hu. 2019. Gecor: An end-to-end generative ellipsis and co-reference resolution model for task-oriented dialogue. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 4539–4549.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21:1–67.
- Pranav Rajpurkar, Robin Jia, and Percy Liang. 2018. Know what you don't know: Unanswerable questions for squad. *arXiv preprint arXiv:1806.03822*.
- Hannah Rashkin, Eric Michael Smith, Margaret Li, and Y-Lan Boureau. 2019. Towards empathetic opendomain conversation models: a new benchmark and dataset. In *ACL*.

- Abhinav Rastogi, Xiaoxue Zang, Srinivas Sunkara, Raghav Gupta, and Pranav Khaitan. 2020. Towards scalable multi-domain conversational agents: The schema-guided dialogue dataset. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 8689–8696.
- Siva Reddy, Danqi Chen, and Christopher D. Manning. 2018. Coqa: A conversational question answering challenge. *CoRR*, abs/1808.07042.
- Stephen Roller, Emily Dinan, Naman Goyal, Da Ju, Mary Williamson, Yinhan Liu, Jing Xu, Myle Ott, Kurt Shuster, Eric M Smith, et al. 2020. Recipes for building an open-domain chatbot. *arXiv* preprint *arXiv*:2004.13637.
- Subendhu Rongali, Luca Soldaini, Emilio Monti, and Wael Hamza. 2020. Don't parse, generate! a sequence to sequence architecture for task-oriented semantic parsing. In *Proceedings of The Web Conference* 2020, pages 2962–2968.
- Marzieh Saeidi, Guillaume Bouchard, Maria Liakata, and Sebastian Riedel. 2016. Sentihood: Targeted aspect based sentiment analysis dataset for urban neighbourhoods. *CoRR*, abs/1610.03771.
- Victor Sanh, Albert Webson, Colin Raffel, Stephen H Bach, Lintang Sutawika, Zaid Alyafeai, Antoine Chaffin, Arnaud Stiegler, Teven Le Scao, Arun Raja, et al. 2021. Multitask prompted training enables zero-shot task generalization. arXiv preprint arXiv:2110.08207.
- Bishal Santra, Potnuru Anusha, and Pawan Goyal. 2021. Hierarchical transformer for task oriented dialog systems. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5649–5658.
- Maarten Sap, Hannah Rashkin, Derek Chen, Ronan Le-Bras, and Yejin Choi. 2019. Socialiqa: Commonsense reasoning about social interactions. *CoRR*, abs/1904.09728.
- Torsten Scholak, Nathan Schucher, and Dzmitry Bahdanau. 2021. Picard: Parsing incrementally for constrained auto-regressive decoding from language models. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 9895–9901.
- Hannes Schulz, Adam Atkinson, Mahmoud Adada, Kaheer Suleman, and Shikhar Sharma. 2019. Metalwoz: A dataset of multi-domain dialogues for the fast adaptation of conversation models.
- Pararth Shah, Dilek Hakkani-Tür, Gokhan Tür, Abhinav Rastogi, Ankur Bapna, Neha Nayak, and Larry Heck. 2018. Building a conversational agent overnight with dialogue self-play. *arXiv preprint arXiv:1801.04871*.

- Yixuan Su, Lei Shu, Elman Mansimov, Arshit Gupta, Deng Cai, Yi-An Lai, and Yi Zhang. 2021. Multitask pre-training for plug-and-play task-oriented dialogue system. *arXiv preprint arXiv:2109.14739*.
- Haipeng Sun, Junwei Bao, Youzheng Wu, and Xiaodong He. 2022a. Bort: Back and denoising reconstruction for end-to-end task-oriented dialog. *arXiv* preprint arXiv:2205.02471.
- Kai Sun, Dian Yu, Jianshu Chen, Dong Yu, Yejin Choi, and Claire Cardie. 2019. DREAM: A challenge dataset and models for dialogue-based reading comprehension. *CoRR*, abs/1902.00164.
- Zhoujian Sun, Zhengxing Huang, and Nai Ding. 2022b. On tracking dialogue state by inheriting slot values in mentioned slot pools. *arXiv preprint* arXiv:2202.07156.
- Alon Talmor, Jonathan Herzig, Nicholas Lourie, and Jonathan Berant. 2018. Commonsenseqa: A question answering challenge targeting commonsense knowledge. *CoRR*, abs/1811.00937.
- Alon Talmor, Ori Yoran, Ronan Le Bras, Chandra Bhagavatula, Yoav Goldberg, Yejin Choi, and Jonathan Berant. 2022. Commonsenseqa 2.0: Exposing the limits of ai through gamification. *arXiv preprint arXiv:2201.05320*.
- Yi Tay, Dara Bahri, Donald Metzler, Da-Cheng Juan, Zhe Zhao, and Che Zheng. 2021. Synthesizer: Rethinking self-attention for transformer models. In *International conference on machine learning*, pages 10183–10192. PMLR.
- Jason Wei, Maarten Bosma, Vincent Y Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M Dai, and Quoc V Le. 2021. Finetuned language models are zero-shot learners. arXiv preprint arXiv:2109.01652.
- Tsung-Hsien Wen, Milica Gašić, Nikola Mrkšić, Lina M. Rojas-Barahona, Pei-Hao Su, David Vandyke, and Steve Young. 2016. Multi-domain neural network language generation for spoken dialogue systems. In *Proceedings of the 2016 Conference on North American Chapter of the Association for Computational Linguistics (NAACL)*. Association for Computational Linguistics.
- Tsung-Hsien Wen, Milica Gasic, Nikola Mrksic, Pei-Hao Su, David Vandyke, and Steve Young. 2015. Semantically conditioned lstm-based natural language generation for spoken dialogue systems. *arXiv* preprint arXiv:1508.01745.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, et al. 2019. Huggingface's transformers: State-of-the-art natural language processing. *arXiv* preprint arXiv:1910.03771.

- Chien-Sheng Wu, Steven C.H. Hoi, Richard Socher, and Caiming Xiong. 2020. TOD-BERT: Pre-trained natural language understanding for task-oriented dialogue. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 917–929, Online. Association for Computational Linguistics.
- Tianbao Xie, Chen Henry Wu, Peng Shi, Ruiqi Zhong, Torsten Scholak, Michihiro Yasunaga, Chien-Sheng Wu, Ming Zhong, Pengcheng Yin, Sida I Wang, et al. 2022. Unifiedskg: Unifying and multi-tasking structured knowledge grounding with text-to-text language models. *arXiv preprint arXiv:2201.05966*.
- Lu Xu, Yew Ken Chia, and Lidong Bing. 2021. Learning span-level interactions for aspect sentiment triplet extraction. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 4755–4766, Online. Association for Computational Linguistics.
- Yi Xu and Hai Zhao. 2021. Dialogue-oriented pretraining. arXiv preprint arXiv:2106.00420.
- Yunyi Yang, Yunhao Li, and Xiaojun Quan. 2021. Ubar: Towards fully end-to-end task-oriented dialog system with gpt-2. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 14230–14238.
- Zhengzhe Yang and Jinho D. Choi. 2019. FriendsQA: Open-domain question answering on TV show transcripts. In *Proceedings of the 20th Annual SIGdial Meeting on Discourse and Dialogue*, pages 188–197, Stockholm, Sweden. Association for Computational Linguistics.
- Dian Yu, Kai Sun, Claire Cardie, and Dong Yu. 2020. Dialogue-based relation extraction. In *Proceedings* of the 58th Annual Meeting of the Association for Computational Linguistics.
- Tao Yu, Rui Zhang, Heyang Er, Suyi Li, Eric Xue, Bo Pang, Xi Victoria Lin, Yi Chern Tan, Tianze Shi, Zihan Li, et al. 2019a. Cosql: A conversational text-to-sql challenge towards cross-domain natural language interfaces to databases. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 1962–1979.
- Tao Yu, Rui Zhang, Kai Yang, Michihiro Yasunaga, Dongxu Wang, Zifan Li, James Ma, Irene Li, Qingning Yao, Shanelle Roman, et al. 2018. Spider: A large-scale human-labeled dataset for complex and cross-domain semantic parsing and text-to-sql task. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 3911–3921.

- Tao Yu, Rui Zhang, Michihiro Yasunaga, Yi Chern
  Tan, Xi Victoria Lin, Suyi Li, Heyang Er, Irene Li,
  Bo Pang, Tao Chen, et al. 2019b. Sparc: Cross-domain semantic parsing in context. In *Proceedings* of the 57th Annual Meeting of the Association for Computational Linguistics, pages 4511–4523.
- Xiaoxue Zang, Abhinav Rastogi, Srinivas Sunkara, Raghav Gupta, Jianguo Zhang, and Jindong Chen. 2020. Multiwoz 2.2: A dialogue dataset with additional annotation corrections and state tracking baselines. *arXiv preprint arXiv:2007.12720*.
- Saizheng Zhang, Emily Dinan, Jack Urbanek, Arthur Szlam, Douwe Kiela, and Jason Weston. 2018. Personalizing dialogue agents: I have a dog, do you have pets too? *arXiv preprint arXiv:1801.07243*.
- Yizhe Zhang, Siqi Sun, Michel Galley, Yen-Chun Chen, Chris Brockett, Xiang Gao, Jianfeng Gao, Jingjing Liu, and William B Dolan. 2020. Dialogpt: Large-scale generative pre-training for conversational response generation. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics: System Demonstrations*, pages 270–278.
- Kangyan Zhou, Shrimai Prabhumoye, and Alan W Black. 2018. A dataset for document grounded conversations. *arXiv preprint arXiv:1809.07358*.
- Pei Zhou, Karthik Gopalakrishnan, Behnam Hedayatnia, Seokhwan Kim, Jay Pujara, Xiang Ren, Yang Liu, and Dilek Hakkani-Tur. 2021. Commonsensefocused dialogues for response generation: An empirical study. In *Proceedings of the 22nd Annual Meeting of the Special Interest Group on Discourse and Dialogue*, Singapore and Online. Association for Computational Linguistics.

# A Appendix

```
Algorithm 1: Task-iterative Training
 Initialize the DFM \Theta with backbone model.
 Set the max number of epoch: E.
 Task number of DOTs: N.
 Sample counts of DOTs: C = \{c_i\}_{i=1}^N.
 Initialize training step: s = 0.
 // Prepare training data for DFM
 for i in 1, \ldots, N do
     Reformulate dialogue-oriented samples
       of i-th task into text-to-text format as
       D_i.
 end
 // Start task-iterative training
 for e in 1, \ldots, E do
     while not the final mini-batch of \max C
          for i in 1, \ldots, N do
              Sample a mini-batch in i-th task:
               b_i.
              Calculate loss:
               L(\Theta) = \text{NLLLoss}(b_i).
              Compute gradient: \nabla L(\Theta).
              Update: \Theta \longleftarrow \Theta - \alpha \nabla L(\Theta)
          end
     end
 end
```

DOTs	Datasets
REW	Task (Quan et al., 2019), Canard (Elgohary et al., 2019), Mudoco (Martin et al., 2020)
NLG	Sclstm (Wen et al., 2015), E2E (Novikova et al., 2017), Rnnlg (Wen et al., 2016), E2E-
NEG	challenge (Li et al., 2018), Google-SIM (Shah et al., 2018)
SUM	Samsum (Gliwa et al., 2019), Dialogsum (Chen et al., 2021), ReadingComprehension (Ma et al.,
SOM	2018)
FILL	Restaurant8k (Coope et al., 2020), Snips (Coucke et al., 2018), HWU64 (Liu et al., 2021d),
1122	MAMS (Jiang et al., 2019), ASTE (Xu et al., 2021), Sentihood (Saeidi et al., 2016)
INTENT	Banking 77 (Casanueva et al., 2020b), Snips (Coucke et al., 2018), HWU64 (Liu et al., 2021d),
	Clinc (Larson et al., 2019)
DST	SGD (Rastogi et al., 2020), TaskMaster2 (Byrne et al., 2019), WOZ (Mrkšić et al., 2016),
	MultiWOZ2.2 (Zang et al., 2020), MultiDogo (Peskov et al., 2019), DSTC2 (Henderson et al.,
	2014a), DSTC3 (Henderson et al., 2014b)
COMM	Alphanli (Bhagavatula et al., 2019), Commonsense-qa (Talmor et al., 2018), Cosmosqa (Huang
	et al., 2019), Csqa2 (Talmor et al., 2022), SocialIQA (Sap et al., 2019)
EMO	Emory (Goodfellow et al., 2013), Go-emotion (Demszky et al., 2020), Meld (Poria et al., 2018),
	Reccon (Poria et al., 2021)
DOCQA	CoQA (Reddy et al., 2018), CMUDoG (Zhou et al., 2018), DoQA (Campos et al., 2019), Narra-
	tiveQA (Kociský et al., 2018), QuAC (Choi et al., 2018), Race (Lai et al., 2017), Squad (Rajpurkar
	et al., 2018)
DIALQA	DDrel (Jia et al., 2020), FriendsQA (Yang and Choi, 2019), Molweni (Li et al., 2020), Dialo-
	gRE (Yu et al., 2020), Mutual (Cui et al., 2020), Dream (Sun et al., 2019)
CHAT	DailyDialog (Li et al., 2017), PersonaChat (Zhang et al., 2018), MetalWOZ (Schulz et al., 2019),
	EmpatheticDialog (Rashkin et al., 2019), CommonsenseDialog (Zhou et al., 2021)
KGDIAL	Soccer-kgdial, Incar-kgdial (Chaudhuri et al., 2019)
TXT2SQL	Spider (Yu et al., 2018), Sparc (Yu et al., 2019b), CoSQL (Yu et al., 2019a)
SIM	SGD (Rastogi et al., 2020), Task-master2 (Byrne et al., 2019), WOZ (Mrkšić et al., 2016),
	MultiWOZ2.2 (Zang et al., 2020), MultiDogo (Peskov et al., 2019), DSTC2 (Henderson et al.,
TOD	2014a), DSTC3 (Henderson et al., 2014b)
TOD	SGD (Rastogi et al., 2020), Task-master2 (Byrne et al., 2019), WOZ (Mrkšić et al., 2016),
	MultiWOZ2.2 (Zang et al., 2020), MultiDogo (Peskov et al., 2019), DSTC2 (Henderson et al., 2014a), DSTC2 (Henderson et al., 2014b)
	2014a), DSTC3 (Henderson et al., 2014b)

Table 7: All the collected datasets for each dialogue-oriented tasks in DialogZoo.

Task	Source Dataset	Example (Input/Output)
REW	Canard	[rew] ernie kovacs [T] death [T] when did he die ? [EK] none [C] Semantically complete sentence 'when did he die ?' [rew] when did ernie kovacs die ?
NLG	Google-Sim	[nlg] [EK] movies.notify_success(theatre_name=camera_7; time=6:00_pm; movie=a_man_called_ove; date=march_08) [C] With current system act, write a system response. [nlg] purchase is confirmed for march 08 at 6:00 pm to see a man called ove at camera 7
SUM	Samsum	[sum] #Person1#: I am confused by what he said. [T] #Person2#: Why do you say that? [T] #Person1#: I don't know what he wants to do. Does he want help me or just scold me? [T] #Person2#: Think a little. I think he means well at the bottom of his heart. [EK] none [C] Give a summary of this dialogue. [sum] #Person1# tells #Person2# #Person1#'s confused by the man's words.
FILL	Restaurant8k	[fill] Please book this hotel for 10 people and on Sun, 05 Aug 2018 [EK] restaurant.date [C] Give the value of the slot. [fill] Sun, 05 Aug 2018
INTENT	HWU64	[intent] it's dirty here make some noise [EK] domain.home_assistant [C] Give the user's intent on the domain. [intent] iot cleaning
DST	SGD	[dst] USER: I need to find an apartment please. [T] SYSTEM: In what area? [T] USER: Something in San Jose. [EK] home.area [C] Give the user's constraint on the slot. [dst] San Jose
COMM	CSQA2	[comm] Consider the argument, is the argument correct? [EK] argument: Science has found a cure for cancer [C] With given argument, answer the question. [comm] no
ЕМО	Emory	[emo] Marsha: Well, she has issues. [T] How does Marsha feel? [EK] possible choices: Joyful   Neutral   Powerful   Mad   Sad   Scared   Peaceful [C] With given possible emotions, select the correct answer.  [emo] Sad
DOCQA	CoQA	[docqa] When was the Vat formally opened? [EK] The Vatican Apostolic Library (), more commonly called the Vatican Library or simply the Vat, is the library of the Holy See, located in Vatican City. Formally established in 1475, although it is much older, it is one of the oldest libraries in the world and contains one of the most significant collections of historical texts. It has 75,000 codices from throughout history, as well as 1.1 million printed books, which include some 8,500 incunabula. · · · [C] With given background, context and previous questions, answer the question. [docqa] It was formally established in 1475
DIALQA	Dream	[dialqa] W: Well, I'm afraid my cooking isn't to your taste. [T] M: Actually, I like it very much. [T] W: I'm glad you enjoy it. Let me serve you some more fish. [T] M: No, thank you. I've had enough fish, but I'd like some soup. [T] W: Here it is. Help yourself! [T] M: Thanks. I didn't know you were so good at cooking. If only my wife could learn to cook from you. [T] W: Why not bring your wife next time? I haven't seen her for quite a while. [T] M: OK, I will. She will be very glad to see you, too. Thank you for the wonderful meal. [T] What does the man think of the woman's cooking?? [EK] possible choices: It's really terrible.   It's very good indeed.   It's better than what he does. [C] With given dialogue and choices, select the correct answer. [dialqa] It's very good indeed.
СНАТ	PersonaChat	[chat] other: Hi, how are you doing? I'm getting ready to do some cheetah chasing to stay in shape. [T] speaker: You must be very fast. Hunting is one of my favorite hobbies. [T] other: I am! For my hobby I like to do canning or some whittling. [EK] Speaker's personality is following: I like to remodel homes.   I like to go hunting.   I like to shoot a bow.   My favorite holiday is halloween. [C] With given speaker's personality and previous dialogue, give a speaker response. [chat] I also remodel homes when I am not out bow hunting.
KGDIAL	Incar-Kgdial	[kgdial] i m in need of coffee is there any near my current location [EK] starbucks.distance.4_miles   starbucks.traffic_info.moderate_traffic   starbucks.poi_type.coffee_or_tea_place   starbucks.address.792_bedoin_street   home.distance.4_miles   home.traffic_info.moderate_traffic   home.poi_type.home   home.address.5671_barringer_street [C] Please answer the user's question accordding to the knowledge graph. [kgdial] starbucks and teavana are close

TXT2SQI	L CoSQL	[txt2sql] Find out the average salary of professors? [T] Find the average salary of the professors of each department? [EK] *   classroom.building   classroom.room_number   classroom.capacity   department.dept_name   department.building   department.budget   course.course_id   course.title   course.dept_name   course.credits   instructor.ID   instructor.name   instructor.dept_name   instructor.salary   section.course_id   section.sec_id   section.semester   section.year   section.building   section.room_number   section.time_slot_id   teaches.ID   teaches.course_id   teaches.sec_id   teaches.semester   teaches.year   student.ID   student.name   student.dept_name   student.tot_cred   takes.ID   takes.course_id   takes.sec_id   takes.semester   takes.year   takes.grade   advisor.s_ID   advisor.i_ID   time_slot.time_slot_id   time_slot.day   time_slot.start_hr   time_slot.start_min   time_slot.end_hr   time_slot.end_min   prereq.course_id   prereq.prereq_id [C] Translate the user's question into SQL query.  [txt2sql] SELECT AVG(instructor.salary) , instructor.dept_name FROM instructor GROUP BY instructor.dept_name
SIM	WOZ	[sim] USER: Hi, I'm looking for a nice German restaurant. [T] SYSTEM: There are no German restaurants listed, do you have another preference? [EK] final dialogue state: (restaurant_search.food.european   restaurant_search.area.dontcare   restaurant_search.price_range.expensive   restaurant_search.request.phone   restaurant_search.request.address   restaurant_search.request.area) [C] With given dialogue history and final dialogue state, give a user utterance. [sim] How about European yeah?
TOD	TaskMaster2	[tod] SYSTEM: Hello user. How can I help you? [T] USER: Can you play music for me? [T] SYSTEM: Can you please name the artist? [T] USER: Can you play something by Whitney Houston. [EK] current dialogue state: (music.name_artist.Whitney_Houston) [C] With given dialogue history and current dialogue state, write a system response.  [tod] Whitney Houston, let me find you something.
CLO	DialogZoo	[clo] USER: hi,good <mask> [T] USER: I need a copy of insurance for my car [T] SYSTEM: Hey there! How may I help you <mask>? [T] SYSTEM: Absolutely! I'll get that done for you. May I know your <mask> and last name and the <mask> digits of your <mask> number please? [T] USER: name: sofia and ssn no: <mask> [EK] 3468   first   last 4   morning   today   SSN [C] Please cloze the dialogue content. [clo] USER: hi,good morning [T] USER: I need a copy of insurance for my car [T] SYSTEM: Hey there! How may I help you today? [T] SYSTEM: Absolutely! I'll get that done for you. May I know your first and last name and the last 4 digits of your SSN number please? [T] USER: name: sofia and ssn no: 3468</mask></mask></mask></mask></mask></mask>
REO	DialogZoo	[reo] Find the physicians who prescribe this medication. [T] Which medication has brand X? [T] What are their name and position? [EK] none [C] Please reorder the dialogue content. [reo] Which medication has brand X? [T] Find the physicians who prescribe this medication. [T] What are their name and position?

Table 8: Reformulated text-to-text examples of all the dialogue-oriented tasks used to train the dialogue foundation models.