

Programming molecular systems to emulate a learning spiking neuron

Jakub Fil,^{*,†} Neil Dalchau,[‡] and Dominique Chu[¶]

[†]*APT Group, School of Computer Science, The University of Manchester, Manchester, M13 9PL, UK*

[‡]*Microsoft Research, Cambridge, CB1 2FB, UK*

[¶]*CEMS, School of Computing, University of Kent, Canterbury, CT2 7NF, UK*

E-mail: jakub.fil@manchester.ac.uk

Abstract

Hebbian theory seeks to explain how the neurons in the brain adapt to stimuli, to enable learning. An interesting feature of Hebbian learning is that it is an unsupervised method and as such, does not require feedback, making it suitable in contexts where systems have to learn autonomously. This paper explores how molecular systems can be designed to show such proto-intelligent behaviours, and proposes the first chemical reaction network (CRN) that can exhibit autonomous Hebbian learning across arbitrarily many input channels. The system emulates a spiking neuron, and we demonstrate that it can learn statistical biases of incoming inputs. The basic CRN is a minimal, thermodynamically plausible set of micro-reversible chemical equations that can be analysed with respect to their energy requirements. However, to explore how such chemical systems might be engineered de novo, we also propose an extended version based on enzyme-driven compartmentalised reactions. Finally, we also show how a purely DNA system, built upon the paradigm of DNA strand displacement, can realise neuronal dynamics. Our analysis provides a compelling blueprint for exploring

autonomous learning in biological settings, bringing us closer to realising real synthetic biological intelligence.

Keywords

Hebbian learning, Spiking neurons, DNA strand displacement, Autonomous learning, Biochemical intelligence

Introduction

While intelligent behaviours are usually associated with higher organisms that have a nervous system, adaptive and proto-intelligent behaviours are well documented in unicellular organisms. Examples include sensing¹⁻³, chemotaxis^{4,5} or diauxic growth⁶⁻⁸. This begs the question whether it is possible to rationally build molecular systems that show proto-intelligent behaviours and can be used as machines to monitor or control their chemical environment at a microscopic scale. Systems of this type could find applications in areas such as drug delivery, bioprocessing or biofabrication.

As a step in this direction, we will probe how artificial intelligence can be realised in molecular systems. More specifically, we will show how to realise *artificial neurons*, as they are widely used in computer science as components of neural networks⁹. Individual artificial neurons are simple machines, but nevertheless show a remarkable ability to learn from observation. For the purpose of this article, we will consider a particular type of neuron, a *spiking neuron* (SN). SNs are widely used in machine learning^{10,11} and it is well known that they have significant learning capabilities^{12,13} including principal component analysis¹⁴, recognition of handwriting¹⁵ or classification of fighter-planes¹⁶. There are a number of different models of SNs in the literature. Commonly a SN has an internal state, usually represented by a positive real number. The internal state may decay, which means that it reduces over time with some rate. The internal state variable increases when the SN

receives a stimulus (an input *spike*) via one of its N input channels. Importantly, these input channels are weighted. The higher the weight, the more the internal state variable increases following an input spike through this channel. This weighting is crucial for the behaviours of the neuron. Consequently, “learning,” in the context of neural networks, normally means adjusting the weights.

There have been numerous attempts to build neurons in chemical systems. The earliest dates back to the 1980s by Okamoto and collaborators¹⁷ who showed that certain biochemical systems implement the McCulloch-Pitts neuron equations. Later, a mathematical description of a neuron has been proposed¹⁸, but this system had no ability to learn. Banda *et al.*¹⁹ used an artificial chemistry to emulate an artificial neuron and a fully fledged feed-forward neural network²⁰ which could solve the XOR problem. Their model requires regular interventions by outside operators, however. Beside these simulation studies, there have also been attempts to implement learning *in vivo*^{21–24}, but again, these systems are not autonomous: they rely on iterative measurement and manipulation protocols, which limit their practical deployment as computing machines within a molecular environment.

An attractive concept of learning that avoids the need to monitor the molecular neurons is *Hebbian learning*. This concept originated from neuroscience but is now widely used in artificial intelligence to train neural networks. The basic idea of Hebbian learning is that the connection between neurons that fire at the same time is strengthened. This update scheme is attractive, because unlike many other learning algorithms, it does not require evaluating an objective function, which would be difficult to achieve in general with chemical networks.

To illustrate the basic idea of Hebbian learning — or associative learning, as it is often called when there are only two input channels — consider a neuron with two inputs A_1 and A_2 . Let the weights associated with the inputs be set such that (an output firing of) the neuron is triggered whenever A_1 fires, but not when A_2 fires. Assume now that A_2 fires usually at around the same time as A_1 . Then its weights will be strengthened by the Hebbian rule because of the coincidence of A_1 and A_2 . Eventually, the weights of the second channel

will have increased sufficiently such that firing of A_2 on its own will be sufficient to trigger an output.

Molecular models of Hebbian learning have been proposed before. A biochemical model of associative learning was proposed by Fernando and co-workers²⁵. Their model is fully autonomous, but it is also inflexible. Association is learned after just a single coincidence, and hence the model is unable to detect statistical correlations robustly. Moreover, the system cannot forget the association between the inputs. McGregor *et al.*²⁶ introduced an improved design with systems that were found by evolutionary processes. A biochemically more plausible system was proposed by Solé and co-workers²⁷, but this system is also limited to learning two coinciding inputs and relies on an explicit operator manipulation in order to forget past associations.

In this article we will propose a fully autonomous chemical artificial neuron, henceforth referred to as *CN*, that goes beyond the state of the art in that it can learn statistical relations between an arbitrary number of inputs. The CN is also able to forget learned associations and as such can adapt to new observations without any intervention by an external observer. Via each of its input channels the CN can accept *boli*, that is the injection of a certain amount of chemical species, representing the input spikes of simulated neurons. The CN will “learn” the statistical biases of the input boli in the sense that the abundance of some of its constituent species, which play an analogous role to neuronal weights, reflect statistical biases of the boli. In particular we consider two types of biases: (i) *Frequency biases* (FB): one or more input channels of the CN receive boli at different rates. (ii) *Time correlations* (TC): two or more input channels are correlated in time. The TC task can be understood as a direct generalisation of associative learning with an arbitrary number of input channels.

We will propose three different versions of the CN. The first (basic) version will be the CN itself, which is a minimal set of chemical reactions. It is also thermodynamically consistent in that it comprises only micro-reversible reactions with mass-action kinetics. This first version, while compact, assumes a high degree of enzymatic multiplicity which is unlikely

to be realisable. Therefore, we shall propose a second version of the model, which is not thermodynamically explicit, but biologically plausible in the sense that it can be formulated in terms of known bio-chemical motifs. The main difference between this and the previous system is that the former is compartmentalised. Henceforth, this compartmentalised system will be referred to as *c-CN*.

We also propose *d-CN*, a version of the CN that is formulated using DNA strand displacement (DSD)²⁸, a type of DNA-based computing. DSD is a molecular computing paradigm based entirely on interactions of DNA strands and Watson-Crick complementarity, and is *bio-compatible*. By this we mean that DSD computers can, in principle, be injected into organisms and interact with their biochemistry²⁹, and therefore have potential to be used to control molecular systems. It has been shown that DSD systems are capable of universal computation³⁰ and indeed that any chemical reaction network can be emulated in DSD^{31,32}. From a practical point of view, it is relatively easy to experimentally realise DSD systems and their behaviour can also be accurately predicted^{33,34} using simulation software such as Visual DSD²⁸ or Peppercorn³⁵. There is now also a wealth of computational methods and tools for designing DNA-based circuits^{36,37}.

Given these properties, there have been a number of attempts to build intelligent DSD systems. Examples include linear-threshold circuits, logic gates^{30,38}, switches³⁹, oscillators⁴⁰, and consensus algorithms³².

There were also some attempts to emulate neural networks in DSD: Qian *et al.*⁴¹ proposed a Hopfield network which has the ability to complete partially shown patterns. However, because the weights connecting individual neurons were hard-coded into the system, the system was unable to learn. Networks of perceptron-like neurons with competitive winner-take-all architectures have also been proposed^{42,43}, and shows how to use DSD reaction networks to classify patterns, such as MNIST handwritten digits⁴⁴. However, learning is external to these systems; weights have to be determined before building the DNA circuit and are then hard-coded into the design.

Supervised learning in DSD was proposed by Lakin and collaborators⁴⁵. They used a two-concentration multiplier circuit motif in order to model the gradient descent weight update rule. However, this approach requires an external observer to provide constant feedback. From the perspective of implementing artificial proto-intelligence in biochemistry, none of the above approaches can be used as a fully autonomous component of a molecular learning system, in the sense that they can operate independently of constant external maintenance.

Table 1: List of acronyms.

| Acronym | Definition |
|---------|-----------------------------------|
| CN | Chemical neuron |
| c-CN | Compartmentalised chemical neuron |
| d-CN | DNA chemical neuron |
| FB | Frequency biases |
| TC | Time correlations |
| DSD | DNA strand displacement |

Results

In the first part of this section we describe the micro-reversible chemical reactions that constitute the CN. Next we demonstrate that the system of reactions behaves like a spiking neuron, and we analyse the key parameters that determine the performance of the system. In the subsequent section we describe c-CN, which lends itself more easily to experimental implementation. Finally, we discuss how DNA strand displacement can be used to construct the d-CN.

The chemical neuron — minimal model

Overview We model the CN as a set of micro-reversible elementary chemical reactions obeying mass-action kinetics (Table 2). Micro-reversibility makes the model thermodynamically consistent. The system is best understood by thinking of each molecular species A_i as an input to the system via channel i . The inputs are provided in a form of *boli*, which is

defined as a fixed amount of molecules introduced to the system at the time of the input. The weight equivalent of the i -th input channel of the CN is the abundance of the species H_i . The species \mathcal{E} is the activated form of E and plays a dual role. It is (i) the learning signal, which indicates that a weight update should take place, and (ii) it is the output of the CN, which could be coupled to further neurons downstream. The internal state of the CN, which acts as a memory for the system, is represented by the abundance of the molecular species B . We now proceed by discussing each reaction in Table 2 in turn.

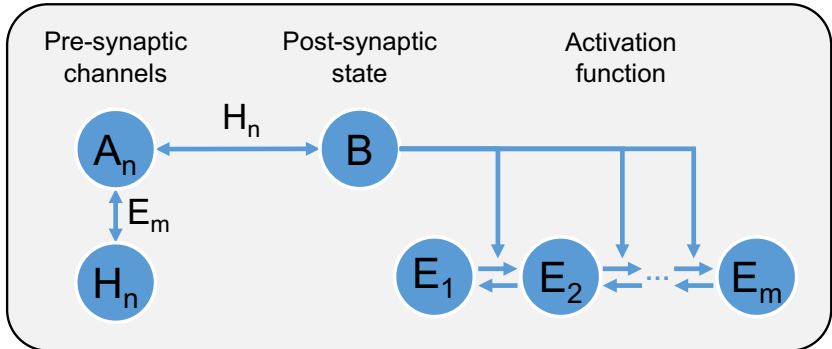


Figure 1: Graphical representation of the minimal model of the CN.

Table 2: List of chemical reactions constituting the CN.

| Function | Reaction(s) |
|---------------------|--|
| Input | $I_n \xrightleftharpoons[k_{AI}]{k_{IA}} A$ |
| | $A_n \xrightleftharpoons[k_{BA}]{k_{AB}} B$ |
| Activation function | $B + E_i \xrightleftharpoons[k^-]{k^+} E_{i+1}, \quad i < m - 1$ |
| | $B + E_{m-1} \xrightleftharpoons[k_{last}^-]{k^+} \mathcal{E}$ |
| Learning | $A_n + \mathcal{E} \xrightleftharpoons[k_{EA}]{k_{AE}} A\mathcal{E}_n \xrightleftharpoons[k_{HE}]{k_{EH}} H_n + \mathcal{E}$ |
| | $A_n + H_n \xrightleftharpoons[k_{HA}]{k_{AH}} AH_n \xrightleftharpoons[k_{BH}]{k_{HB}} B + H_n$ |
| Leak | $H_n \xrightarrow{k_{H\emptyset}} \emptyset$ |
| | $B \xrightarrow{k_{B\emptyset}} \emptyset$ |

Input We assume here that the CN has N different species of input molecules A_1, \dots, A_N . These represent the N input channels each of which is associated with a corresponding weight H_1, \dots, H_N . The weight molecules are the interpretable output of the neuron, in the sense that the abundance of the H_i molecules will reflect statistical biases in the input. The input is always provided as an exponentially decaying bolus at a particular time t_i^s , where s is a label for individual spikes. Concretely, this means that at time $t = t_i^s$ the CN is brought into contact with a reservoir consisting of β (un-modelled) precursor molecules I_i that then decay into A_i molecules with a rate constant $\kappa > 0$. A particular consequence of this is that the A_i are not added instantaneously, but will enter the system over a certain time. This particular procedure is a model choice that has been made for convenience. Different choices are possible and would not impact on the results to be presented. The important point is that the input signal to channel i is a bolus of quantity A_i and occurs at a particular time t . This enables the system to reach a steady state provided that the input is stationary.

The basic idea of the CN is that input boli A_i are converted into internal state molecules B . This reaction takes a catalysed, as well as an uncatalysed form. The uncatalysed reaction $A_n \xrightleftharpoons[k_{BA}]{k_{AB}} B$ is necessary in order to allow the system to learn to react in response to new stimulus, even when the weight associated with a given channel decayed to 0. In the case of the catalysed reaction the channel specific H_i molecules play the role of the catalyst. Thus the speed of conversion depends on the amount of weight H_i . If at any one time there is enough of B in the system then the learning signal \mathcal{E} is created by activating E molecules. Once the learning signal is present then some of the A_i are converted into weight molecules, such that the weight of the particular input channel increases. This realises Hebbian learning in the sense that the coincidence of inputs A_i and output \mathcal{E} activates weight increases, following the well known Hebbian tenet "What fires together, wires together".

Activation function The link between the internal state molecules B and the learning signal is often called the *activation function*. In spiking neurons, as they are used in artificial

intelligence, this activation is usually a threshold function. The neuron triggers an output if the internal state crosses a threshold value. In chemical realisations, such a threshold function is difficult to realise. Throughout this contribution, our systems are parametrised such that the dynamics of the system is dominated by noise. Molecular abundances are therefore noisy. As a consequence, the activation function has to be seen as the *probability* to observe the activated form \mathcal{E} as a function of the abundance of B .

An ideal activation function would be a step function, but physical realisations will necessarily need to approximate the step function by a continuous function, for example a sigmoid. In the CN, this is realised as follows: Each of the E molecules has m binding sites for the internal state molecules B . Once all m binding sites are occupied, then E is converted into its active form \mathcal{E} . We make the simplifying assumption that the conversion from E to \mathcal{E} is instantaneous once the last B binds. Similarly, if a B molecule unbinds, then the \mathcal{E} changes immediately to E . In this model, the balance between \mathcal{E} and E molecules depends on the binding and unbinding rates of B . We assume that there is a cooperative interaction between the B molecules such that unbinding of B from \mathcal{E} is much slower than unbinding from E . With an appropriate choice of rate constants, this system is known to display ultrasensitivity, i.e. the probability for the fully occupied form of the ligand chain (\mathcal{E}) to exist transitions rapidly from close to 0 to close to 1 as the concentration of ligands approaches a threshold value $\vartheta \approx k_+/k_-$. The dynamics of such systems is often approximated by the so-called Hill kinetics. It can be shown that the maximal Hill exponent that can be achieved by such a system is m^{46} . This means that the chain-length m , which we henceforth shall refer to as the “non-linearity”, controls the steepness of the activation function of \mathcal{E} . In the limiting case of $m = \infty$, this will be a step function, whereby the probability to observe \mathcal{E} is 0 if the abundance of B is below a threshold and 1 otherwise. We are limited here to finite values of $m > 0$. In this case, the function is sigmoidal, or a saturating function in the case of $m = 1$. The parameter m and hence the steepness of the activation function will turn out to be a crucial factor determining the computational properties of the CN.

Learning In neural networks, “learning” is usually associated with the update of weights. Accordingly, in the case of the CN, learning is the change of abundances H_i . The abundance can only increase if two conditions are fulfilled: (i) the learning signal \mathcal{E} is present and (ii) there are still input molecules A_i in the system. In short, learning can only happen if input and output coincide, which is precisely the idea of Hebbian learning. For an illustrative example of how Hebbian learning works in the CN, see Fig. 2.

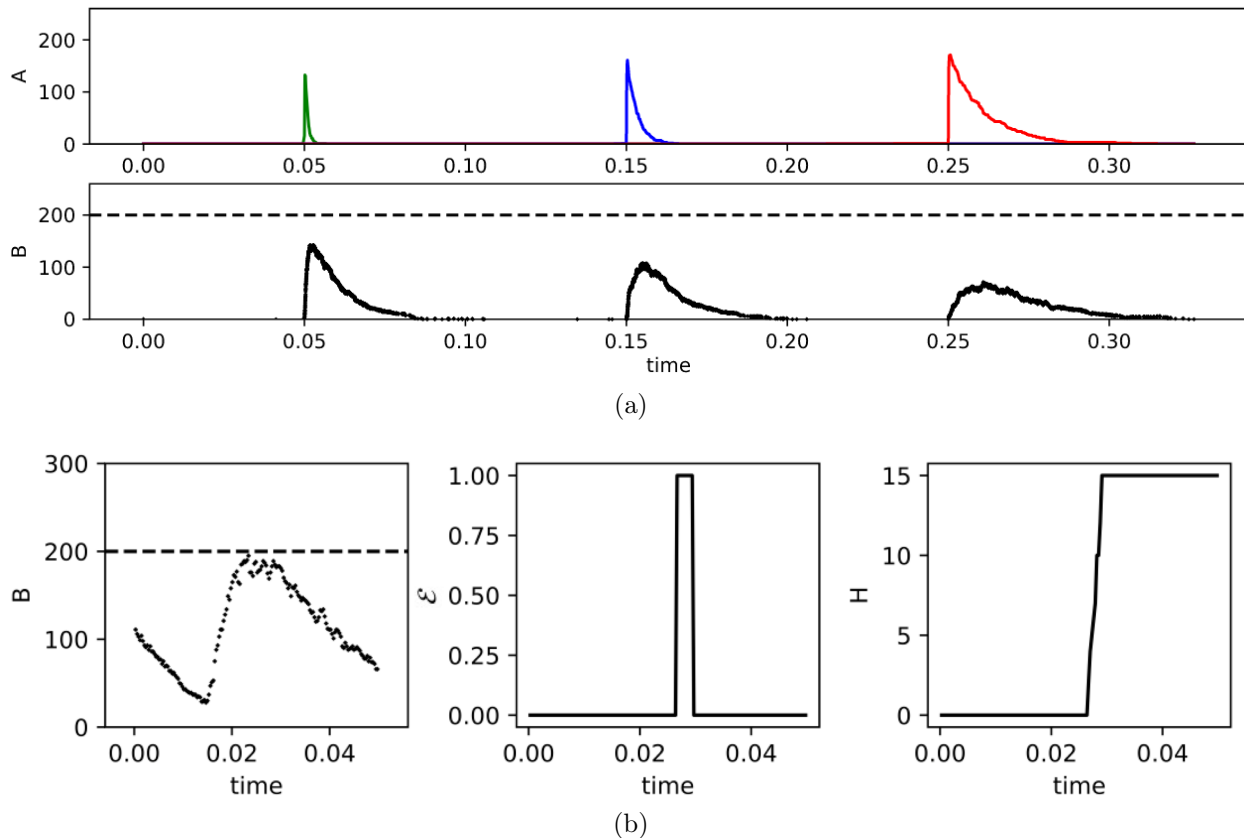


Figure 2: (a) Example of three inputs of uniform size received from 3 different channels. Each input shown in the second graph has a different weight associated it: $H_{\text{green}} = 250$, $H_{\text{blue}} = 50$, and $H_{\text{red}} = 0$. H molecules act as a catalyst in $A_n \xrightleftharpoons{H_n} B$ reaction, hence the change in the function of B molecules over time for each of the inputs. The higher the amount of H , the higher is the peak of B molecules caused by a particular input. Moreover, with the increase in weights, the function of inputs also changes. The higher the amount of H , the quicker its corresponding A dissipates. (b) Example simulation showing the core idea of the CN dynamics. The graphs show the internal state B , the learning signal \mathcal{E} and the weight H for a single channel. We assume a bolus provided at time $t = 0.015$. This causes the internal state to go up and reach the threshold. A learning signal is triggered at around $t = 0.03$ and consequently the weight is increased by (in this case) 15 molecules of H .

Leak Finally, we assume that the weight molecules H_i and the internal state molecules B decay, albeit at different rates. This is so that the weight abundances can reach a steady state; additionally it enables the CN to forget past inputs and to adapt when the statistics of the input changes. We will assume that the decay of H_i is slow compared to the typical rate of input boli.

Throughout this paper we will assume that the dynamics of A , B and E are fast compared to the change in concentration of H . This is a crucial assumption to allow the weights to capture long-term statistics of inputs; in particular, the weights should not be influenced by high frequency noise present in the system. Furthermore, we also assume that the lifetime of \mathcal{E} is short. For details of the parameters used see Table ??.

Associative learning

We first demonstrate that the CN is capable of associative learning (Fig. 3). To do this, we generate a CN with $N = 2$ input channels. Then, we initialise the CN with a high weight for the first channel ($H_1 = 100$) and a low weight for the second channel ($H_2 = 0$). Furthermore, we set the parameters of the model such that a bolus of A_1 is sufficient to trigger an output, but a bolus of A_2 , corresponding to stimulating the second channel is not. This also means that presenting simultaneously both A_1 and A_2 triggers a learning signal and increases H_1 and H_2 . If A_1 and A_2 coincide a few times, then the weights of A_2 have increased sufficiently so that a bolus of A_2 can push the internal state of the system over the threshold on its own. This demonstrates associative learning. Note that unlike some previous molecular models of associative learning (e.g. ref. 25), the CN requires several coincidences before it learns the association. It is thus robust against noise.

This means that the CN can also readily unlearn the correlation if input patterns change (see fig. ?? and ??). There are two mechanisms in the system that ensure that the neuron is able to continuously learn new input statistics. These are (i) the decay of the weights, which ensures a rate of forgetting, and (ii) the uncatalyzed reaction A_n to B which allows

the system to learn to react in response to new stimulus, even when the weight associated with a given channel decayed to 0.

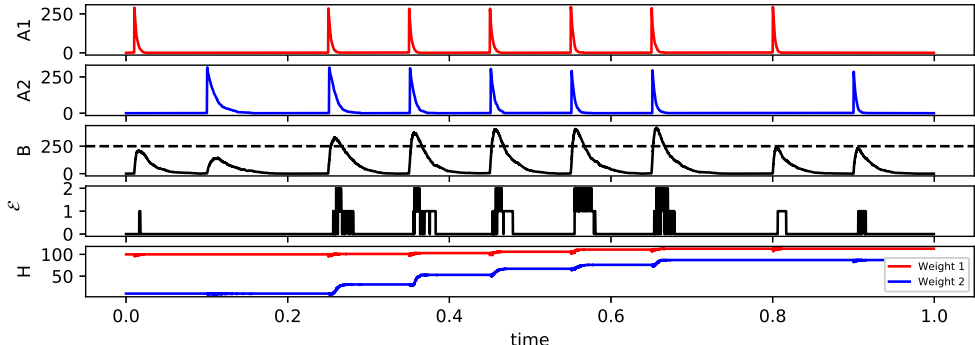


Figure 3: Associative learning in CN. The first two graphs show the inputs A_1 and A_2 . Clearly, a single A_2 does not lead to a sufficient increase of the internal state B , such that no learning signal is triggered. After a few coincidences of A_1 and A_2 the weights H_2 (last graph) have increased sufficiently for A_2 to trigger a signal in its own at time $t = 0.8$. Note the increase in weights for the second channel after each coincidence.

Full Hebbian learning

We now show that the ability of the CN to learn extends to full Hebbian learning with an arbitrary number of N input channels. First we consider the FB task, where the CN should detect input channels that fire at a higher frequency than others. To do this, we provide random boli to each of the N input channels. Random here means that the waiting time between two successive boli of A_i is distributed according to an exponential distribution with parameter $1/f_i$, where f_i is the frequency of the input boli to channel i . The CN should then detect the difference in frequencies f_i between input channels. We consider the FB task as solved if (after a transient period) the ordering of the abundances of weights reflects the input frequencies, i.e. the number of H_i should be higher than the number of H_j if $f_i > f_j$. Below we will show, using a number of example simulations, that the CN is indeed able to show the desired behaviour. Later on, we will probe in more detail how the response of the system depends on its parametrisation and the strength of the input signal.

In order to test a CN with multiple inputs ($N = 5$, $m = 1$), we consider 3 variants of

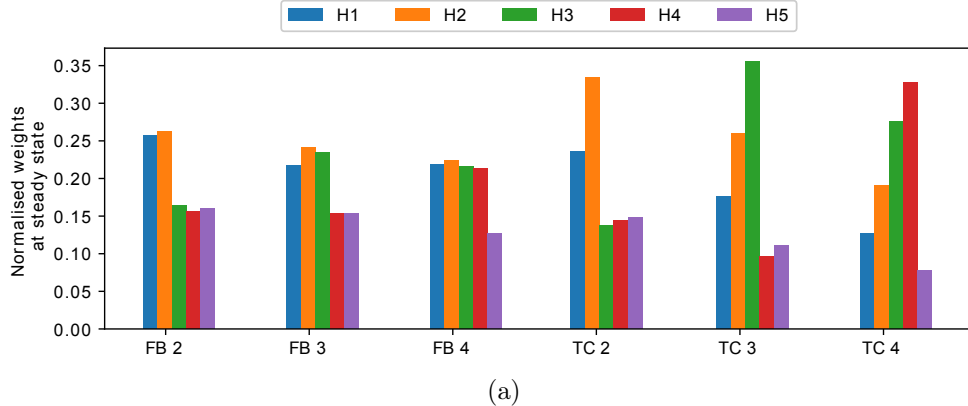


Figure 4: (a) Normalised weights for a variety of TC and FB tasks. The first (blue) bar refers to the first weight, the second (orange) to the weight for the second channel and so on. Each value represents the average over 300 time units of a single simulation. Data was only collected after the weights reached the steady state (after 700 time units). In all experiments we set the number of E_1 molecules at the start of the simulation to 40. The non-linearity was set to $m = 5$ for the TC, and $m = 1$ for FB.

the FB task. First, we assume that boli to the first *two* input channels come at a frequency of 4 Hz whereas channels 3, 4 and 5 fire at a frequency of 2 Hz; we call this variant FB 2. Similarly, for FB 3 and FB 4 the first 3 and 4 channels respectively fire at the higher frequency. Fig. 4a shows the steady state weights for each of the three tasks. As expected, in each of the experiments the weights of the high-frequency inputs are higher when compared to the low frequency inputs. We conclude that the CN can work as a frequency detector at least for some parametrisations.

The other scenario that we will investigate is the TC task, which is the direct generalisation of the associative learning task to an arbitrary number of input channels. For this problem we assume that all input frequencies are the same, i.e. $f_i = f_j$ for all $i, j \leq N$. Instead of differences in frequency, we allow temporal correlations between input boli of some channels. If A_1 and A_2 are temporally correlated then each bolus of A_1 is followed by a bolus of A_2 after a time period of $\delta + \xi$; with δ being a fixed number and ξ is a random variable drawn from a normal distribution with $\mu = 0$ and $\sigma^2 = 0.0001$ for each bolus. In all simulations, the input frequency of all channels is set to 2 Hz.

The CN can solve the TC task in the sense that, after a transient period, the weights

indicate which channels are correlated. They also indicate the temporal order implied by the correlation, i.e. if A_i tends to precede A_j , then the abundance of weight H_i should be lower than the abundance of H_j . Furthermore, if A_i is correlated with some other channel k , but A_j is not, then the abundance of H_i must be greater than that of H_j .

In order to test whether the system is indeed able to detect TC biases, we again simulated a CN with $N = 5$ input channels and all weight molecules initialised to $H_i = 0$. We then determined the steady state weights in four different scenarios: there are correlations between (i) A_1 and A_2 (TC 2), (ii) A_1, A_2, A_3 (TC 3), and (iii) A_1, A_2, A_3, A_4 (TC 4). The temporal order is always in ascending order of the index, such that in the last example, A_1 occurs before A_2 , which in turn occurs before A_3 . We find that the behaviour of the CN is as expected (Fig. 4a). At steady state the weights reflect the correlation between input channels, including the temporal ordering, thus allowing us to conclude that, at least for some parametrisations, the CN successfully identifies temporal correlations.

Analysis of activation function non-linearity

The ability of the CN to perform in the TC task depends on its ability to detect coincidences. In this section, we will now analyse in more detail how this coincidence detection depends on the non-linearity of the activation function, i.e. the parameter m . To do this, we consider two extreme cases: Firstly, the case of minimal non-linearity (i.e. $m = 1$) and secondly, the limiting (and hypothetical) case of maximal non-linearity (i.e. $m = \infty$). This latter case would correspond to an activation function that is a step function. While a *chemical* neuron cannot realise a pure step function, considering the limiting case provides valuable insight.

We consider first this latter scenario with a CN with two inputs A_1 and A_2 . In this case, there will be a learning signal \mathcal{E} in the CN if the abundance of B crosses the threshold ϑ . Let us now assume that the parameters are set such that a single bolus of either A_1 or A_2 is not sufficient to push the abundance of B over the threshold, but a coincidence of both is. In this scenario then we have:

- A single bolus of A_1 will not lead to a threshold crossing. No learning signal is generated and weights are not increased.
- If a bolus of A_1 coincides with a bolus of A_2 then this may lead to a crossing of the threshold of the internal state. A learning signal is generated. Weights for both input channels 1 and 2 are increased (although typically not by equal amounts).

Next consider an activation function tuned to the opposite extreme, i.e. $m = 1$. It will still be true that both A_1 and A_2 are required to push the abundance of B across the threshold. However, the learning behaviour of the CN will be different:

- A single bolus of A_1 will not lead to a threshold crossing. A learning signal may still be generated even below the threshold because the activation function is not a strict step function. The weight H_1 will increase by some amount, depending on the bolus size.
- If a bolus of A_1 coincides with a bolus of A_2 then this will lead to more learning signal being generated than in the case of A_1 only. As a result, the weights for both input channel 1 and 2 are increased by more than if they had occurred separately.

These two extreme cases illustrate how the CN integrates over input. In the case of low non-linearity the weights of a channel will be a weighted sum over all input events of this channel. The weights will be higher for channels whose boli coincide often. On the other hand, a step-like activation function will integrate only over those events where the threshold was crossed, thus specifically detect coincidences. From this we can derive two conjectures:

- The higher the non-linearity, the better the CN at detecting coincidences. Low non-linearity still allows coincidence detection, but in a much weaker form.
- As the bolus size increases, the CN will lose its ability to detect coincidences, especially when the bolus size is so large that a single bolus is sufficient to push the abundance

of B over the threshold. In this case, a single input spike can saturate the activation function, thus undermining the ability of the system to detect coincidences effectively.

In order to check these conjectures, we simulated a version of the CN with 3 inputs, where A_1 and A_2 are correlated and A_3 fires at twice the frequency of A_1 and A_2 . We considered the minimally non-linear case ($m = 1$) and a moderate non-linearity ($m = 4$), which shows the weights as a function of the bolus size (Fig. 5). The minimal non-linear CN detects both coincidences and frequency differences, but loses its ability to detect coincidences as the bolus size increases. This is consistent with the above formulated hypothesis. In contrast, for the non-linear CN and moderately low bolus-sizes the weights indicate the coincidences strongly (i.e. the weights H_2 are highest), and less so the FB. As the bolus size increases the non-linear CN loses its ability to detect coincidences and becomes a frequency detector, as conjectured.

Next, we check how the coincidence detection depends on the time-delay between the correlated signals. To do this we created a scenario where we provided two boli to the system. The first bolus A_1 comes at a fixed time and the second one a fixed time period δ thereafter. We then vary the length of δ and record the accumulation of weights H_2 as a fraction of the total weight accumulation. Fig. 6 shows the average weight accumulation per spike event. It confirms that the CN with the low non-linearity is less sensitive to short coincidences than the CN with higher m . However, it can detect coincidences over a wider range of lag durations. This means that for higher non-linearities the differential weight update becomes more specific, but also more limited in its ability to detect coincidences that are far apart. In the particular case, for a $\delta > 0.1$ the CN with $m > 1$ does not detect any coincidences any more, whereas the case of $m = 1$ shows some differential weight update throughout.

Next, we tested the conjecture that the TC can be solved more effectively by the CN when the non-linearity is higher. To do this, we generated a CN with $N = 5$ input channels on the TC 2 task. We then trained the CN for non-linearities $m = 1, \dots, 10$. As a measure of

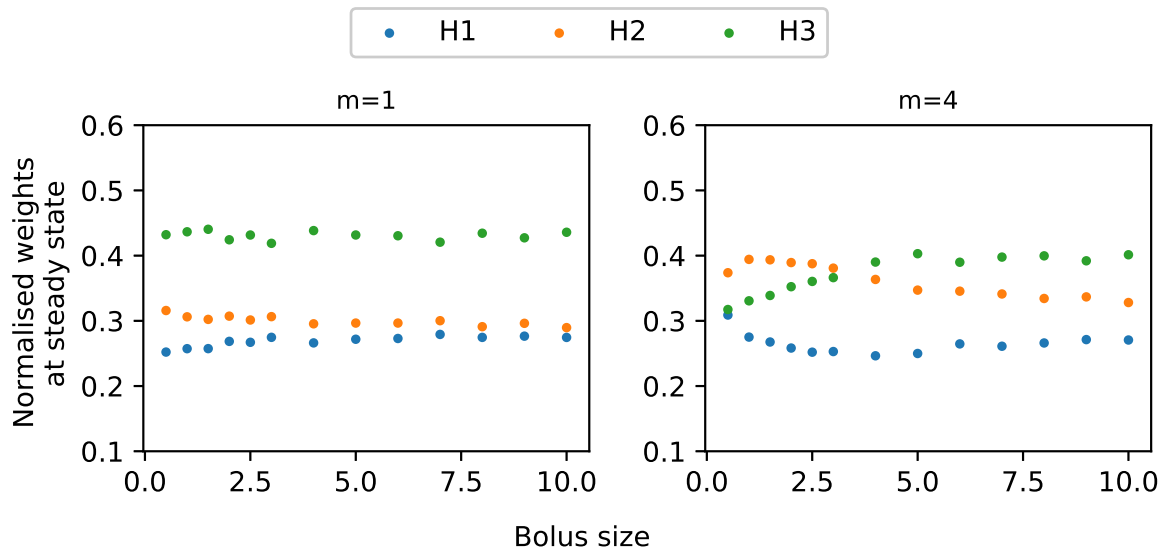


Figure 5: The steady state weights as a function of bolus size for a CN with 3 inputs. Input A_3 (green) is provided at 4Hz, A_1 and A_2 are correlated with a $\delta = 0.0047$ but they are only provided at 2Hz. The graph shows the normalised weights at steady state corresponding to the input channels for different bolus-sizes (here reported as a fraction of the threshold). From left to right, the bolus size increases. For $m = 1$ the system detects the higher frequency of A_1 as indicated by its high weight. It also differentiates between the correlated inputs, but with weaker signal. As the bolus size increases, the neuron maintains its ability to recognise FB, but can no longer detect TC, i.e. H_1 and H_2 have the same abundance. For the higher non-linearity ($m = 4$) the system detects the TC (H_2 has a higher abundance than H_1). As the bolus size increases, it detects the FB, but its ability to detect TC decreases.

the ability of the system to distinguish the weights, we used the index of dispersion, i.e. the standard deviation divided by the mean of the weights. A higher index of dispersion indicates more heterogeneity of the weights and hence a better ability of the system to discriminate between the biased and unbiased input channels.

Consistent with our hypothesis we found that the ability to distinguish temporarily correlated inputs increases with the non-linearity. However, it does so only up to a point (the optimal non-linearity), beyond which the index of dispersion reduces again (Fig. 7). Increasing the bolus size, i.e. increasing the number of A_i that are contained within a single bolus, shifts the optimal non-linearity to the right. This suggests that the decline in the performance of the CN for higher chain lengths is due to a resource starvation. The realisation of the sigmoidal function, i.e. the thresholding reactions in Table 2, withdraws m molecules of

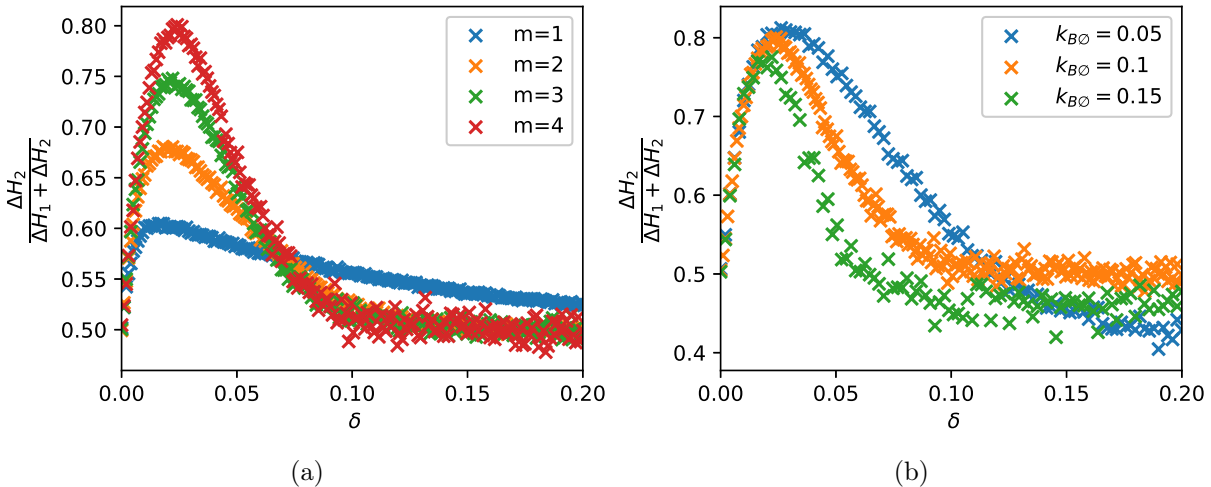


Figure 6: Differential weight increase for different non-linearities. For both graphs the points were computed as follows: We simulated a CN with two input channels only. We set the initial condition to $H_1, H_2 = 0$. At time $t = 0$ we provided a bolus of A_1 and after a time period of δ we provided the bolus A_2 . We then continued the simulation for another 0.2 time units. The y -axis records the relative increase of H_2 over 0.2 time units averaged over 1000 repetitions. (a) We stimulate channel 1 followed by channel 2 after a time period of δ . Then we measure the amount by which weights H_1 and H_2 were increased and record the fraction. A value of 1 means that only the second input channel received weight accumulation. A value of 0.5 means that the weights of both channels were updated equally. (b) Same, but for different removal rates of B . The faster the removal, the more specific the coincidence detection, i.e. inputs need to occur within a narrower window.

B from the system. As a consequence, the CN is no longer able to represent its internal state efficiently and the activation function is distorted. If the total abundance of B is high compared to E , then this effect is negligible. We conclude that there is a resource cost associated with computing non-linearity. The higher m , the higher the bolus size required to faithfully realise the activation function. As an aside we note that, other designs for the system are also possible. For example, B molecules could be used catalytically. Nevertheless, such systems would also face different trade-offs. The system presented here was one of many designs that we tested, and provided the most desirable properties for learning temporal patterns.

While the TC task requires a non-linearity, the FB task, does not. This can be understood acknowledging that the FB task is fundamentally about integrating over input, which can be done naturally in chemical systems. Indeed, it can be done by systems that are much

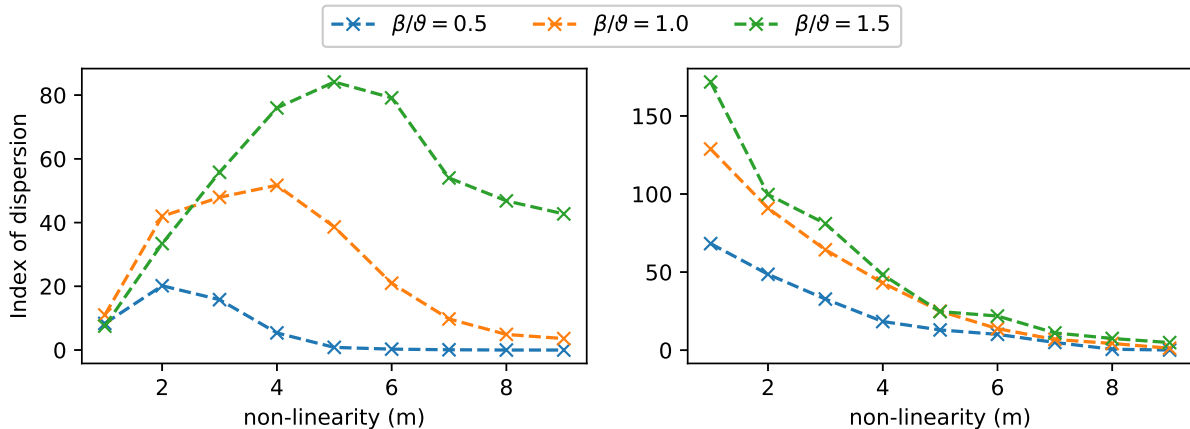


Figure 7: Index of dispersion for different bolus sizes β expressed as a fraction of the threshold ϑ . We show TC 2 (left) and FB 2 (right). The index of dispersion measures how different the steady state weights are from one another, and hence indicates how well the CN distinguished between input channels. Completely unbiased input would give an index of dispersion of ≈ 0 . The graph shows that for the TC task, there is an optimal non-linearity. Increasing the bolus size, increases the optimal non-linearity, which is consistent with the fact that the optimum is due to resource starvation.

simpler than the CN. For example, the minimal system to detect FB bias is $A_i \xrightarrow{d} \emptyset$. For appropriately chosen values of d , the steady state value of A_i would then reflect the input frequency. To understand this, note that the input frequency determines the rate of increase of A_i . This rate, divided by the decay rate constant d then determines the steady state abundance of A_i , such that A_i trivially records its own frequency. This system is the minimal and ideal frequency detector.

The CN itself is not an ideal frequency detector because all weight updates are mediated by the internal state B . Hence, the weights are always convolutions over all inputs. The weights thus reflect both frequency bias and temporal correlations. In many applications this may be desired, but sometimes it may not be. We now consider the conditions necessary to turn the CN into a pure frequency detector, i.e. a system that indicates only FB, but not TC. One possibility is to set the parameters such that the CN approximates the minimal system. This could be achieved by setting $k_{BA} \ll k_{AB}$ and all other rate constants very high in comparison to k_{AB} . The second possibility is to tune the CN such that a single bolus

saturates the threshold. In this case, the strength of the learning signal does not depend on the number of boli that are active at any one time. A single bolus will trigger the maximal learning signal. This is confirmed by Fig. 5, which shows that as the bolus size increases, the system becomes increasingly unable to detect temporal correlations, but remains sensitive to frequency differences.

c-CN: The CN with compartments

The CN, as presented in Table 2, is thermodynamically plausible and has the benefit of being easy to simulate and analyse. However, it is biologically implausible. As written in Table 2 the molecular species A_i , H_i and B would have to be interpreted as conformations of the same molecule with different energy levels. Additionally, we require that these different conformations have specific enzymatic properties. Molecules with the required properties are not known currently, and it is unlikely that they will be discovered or engineered in the near future.

As we will show now, it is possible to re-interpret the reaction network that constitutes the CN (Table 2) so as to get a model whose elements are easily recognisable as common biochemical motifs. This requires only relatively minor adjustments of the reactions themselves, but a fundamental re-interpretation of what the reactions mean.

The main difference we introduce is that the new model is compartmentalised (Fig. 8). While in the basic model the indices of A_i and H_i referred to different species that exist in the same volume, it should now be interpreted as the same species but living in different compartments. This means that A_i and A_j are the same type of molecule, but located in compartments i and j respectively. Similarly, H_i and H_j are the same species. All compartments i and j are themselves enveloped in a further compartment (the “extra-cellular space”). The internal state species B is the same as A_i but located in the extra-cellular space. From here on, we will refer to this re-interpreted model as the c-CN. It is formally described by the reactions in Table 3.

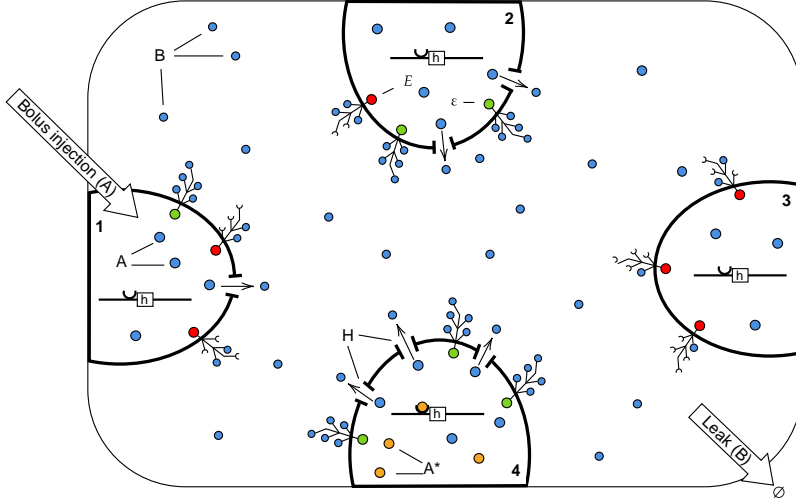


Figure 8: Graphical representation of a c-CN. A_i and A_j are the same molecular species but contained in different compartments i and j respectively. We allow for an activated form of A , denoted by A^* , which binds to the promotor site of h and activates its expression. H is an active transporter molecule for A . Once exported to the extracellular space, an A_i molecules becomes a molecule of B . We assume that each compartment has a trans-membrane protein E with m extra-cellular binding sites. If all m binding sites are occupied by B , then the internal site becomes active (indicated by green) and can catalyse the activation of A .

Input to channel i is provided by boli of the molecular species A into the compartment i . A novelty of c-CN when compared to CN is that it has an activated form of A , denoted by A^* . The conversion from A to A^* is catalysed by the learning signal \mathcal{E} . Also new is that each compartment contains a gene h that codes for the molecule H (we suppress the index indicating the compartment). Expression of the gene is activated by A^* binding to the promoter site of h . We also allow a low leak expression by the inactivated gene (denoted as h_0 in Table 3). Gene activation of this type is frequently modelled using Michaelis-Menten kinetics, thus reproducing in good approximation the corresponding enzyme kinetics in the CN. The molecules of type H are now transporters for A . We then interpret the conversion of A_i to B as export of A from compartment i to the extra-cellular space. The rate of export of A is specific to each compartment in that it depends on the abundance of H in this compartment. Finally, we interpret the E molecules as transmembrane proteins that are embedded in the membrane of each compartment. Their extra-cellular part has m binding sites for B molecules which bind cooperatively. When all sites are occupied then the intra-

Table 3: List of chemical reactions constituting the c-CN. Molecular species $A, E, \mathcal{E}, h_0, h$ and H are compartmentalised. Each compartment has a gene h_0 which when activated by A^* can express a transporter H .

| Function | Reaction(s) |
|---------------------|--|
| Input | $I_n \xrightleftharpoons[k_{AI}]{k_{IA}} A$ |
| | $A + H \xrightleftharpoons[k_{HA}]{k_{AH}} AH \xrightleftharpoons[k_{BH}]{k_{HB}} B + H$ |
| Activation function | $B + E_i \xrightleftharpoons[k^-]{k^+} E_{i+1}, \quad i < m - 1$ |
| | $B + E_{m-1} \xrightleftharpoons[k_{\text{last}}^-]{k^+} \mathcal{E}$ |
| Weight accumulation | $\mathcal{E} + A \xrightleftharpoons[k_{EA}]{k_{AE}} \mathcal{E}A \xrightleftharpoons[k_{EA^*}]{k_{A^*E}} \mathcal{E} + A^*$ |
| | $A^* \xrightleftharpoons[k_{AA^*}]{k_{A^*A}} A$ |
| | $h_0 + A^* \xrightleftharpoons[hA \cdot]{A \cdot h} h$ |
| | $h_0 \xrightarrow{k_{\text{leak}}} H_n + h_0$ |
| | $h \xrightarrow{k_h} H_n + h$ |
| Leak | $H \xrightarrow{k_{H\emptyset}} \emptyset$ |
| | $B \xrightarrow{k_{B\emptyset}} \emptyset$ |

cellular part is activated, i.e. becomes \mathcal{E} . In its activated form it can convert A to A^* .

Another difference between the two versions of the models is that the molecule E is now specific to each membrane. The minimum number of copies of E is thus N whereas in the basic model a single copy of E at time $t = 0$ could be sufficient. This has two consequences. Firstly, at any particular time the number of occupied binding sites will typically be different across the different N compartments. This is a source of additional variability. Moreover, since the number of copies of E is higher than in CN, the c-CN is more susceptible to starvation of B as a result of the extra-cellular binding sites withdrawing molecules from the outer compartment. Both of these potential problems can be overcome by tuning the model such that the abundance of B molecules is high in comparison to E molecules.

This highlights that the difference between the basic CN and c-CN are deeper than the list of reaction suggests. Our simulations, however, confirm that the c-CN supports associative learning (Fig. 9) and full Hebbian learning (Fig. 10) just as the basic CN, provided that the

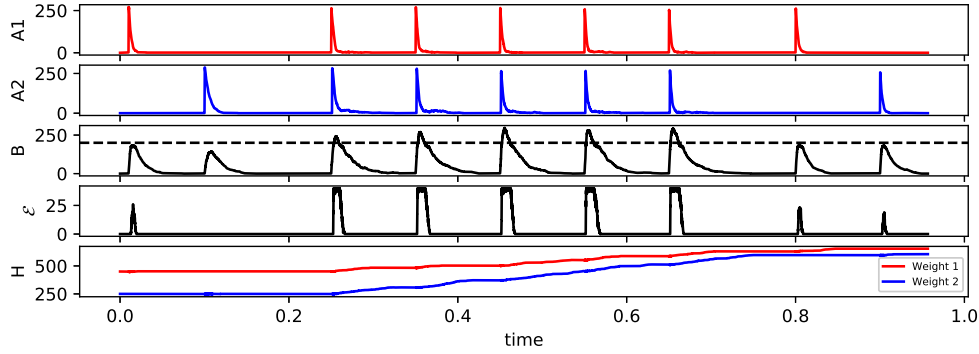


Figure 9: Same as fig. 3 but for c-CN. For the parameters used see Table ???. For this experiment we approximated the ligand kinetics by a Hill function, in order to speed up the simulations.

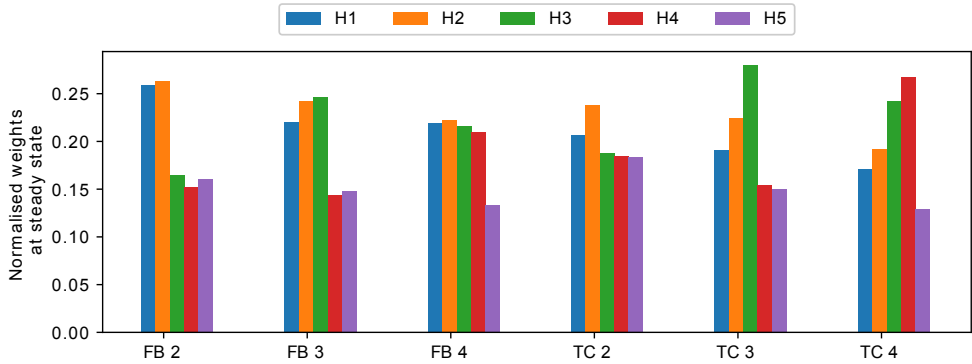


Figure 10: Same as fig. 4 but for c-CN. The experiments approximated the ligand dynamics by a Hill function, in order to speed up the simulations.

parameters are set appropriately.

d-CN: a neuron in DNA

We now show how to emulate the chemical reaction network of Table 2 using DNA strand displacement (DSD)²⁸. This is interesting, because the experimental realisation of DSD systems is straightforward and predictable when compared to bio-chemical reaction networks.

The basic idea of DNA-based computation is that double stranded DNA molecules with an overhang on one strand — often called the *toehold* — can interact with single stranded DNA that contains the Watson-Crick complement of the toehold via partial or total displacement of the existing complement. DNA-based systems are typically analysed on two levels:

sequence-level and domain-level. The former involves the study of interactions between individual nucleotide pairs, while the latter focuses on the interactions between *domains*. Here, domains are sequences of nucleotides of varied length. There are two types of domains which are differentiated by their length. Short domains or *toeholds* are between 4 to 10 nucleotides, and are assumed to be able to bind and unbind from complementary strands. Long domains, or *recognition* domains, are at least 20 nucleotides in length, and assumed to bind irreversibly. DSD is a domain-level mechanism for performing computational tasks with DNA via two basic operations: toehold mediated branch migration and strand displacement.

Implementing the d-CN using two-domain DNA strand displacement

In order to emulate the chemical neuron in DNA, we will focus here on two-domain strand displacement^{32,36}, where each molecular species comprises a toehold and a long domain only. These species can interact with double-stranded gates which facilitate the computation. Restricting computation to two-domain strands helps to protect against unexpected interactions between single stranded species, which can occur with more complex molecules. Also, as all double-stranded structures are stable, and can only change once a single-stranded component has bound, there is no possibility for gate complexes to polymerise and interact with each other.

Here, we will be using the standard syntax of the Visual DSD programming language²⁸ to describe the species present in our system. We denote double-stranded molecules as $[\mathbf{r}]$, where its upper strand $\langle \mathbf{r} \rangle$ is connected to a complementary lower strand $\{\mathbf{r}^*\}$. Each of the reactants and products in our system is an upper single-stranded molecule composed of a short toehold domain (annotated with a prefix \mathbf{t} and an identifier $\hat{}$) and a corresponding long domain: $\langle \mathbf{t}\hat{} \mathbf{r} \rangle$. We will refer to a short domain of a two-domain DSD strand A_n as $\mathbf{t}\hat{}$ and its corresponding long domain as \mathbf{a}_n , where n is a channel index. Note that the toehold is not specific to the species index n , and therefore the recognition of each input and weight strand is dependent on their long domains, rather than their toeholds. We will

use the same convention for all other channel specific two-domain species. For the detailed description of the nucleotide structure and binding rates; see Table ?? and ?? in the SI. The four main two-domain strands that enable communication between different modules of the d-CN are shown in Table 5.

While there is a theoretical guarantee that any chemical reaction network can be mimicked by a DSD circuit³², it is often difficult to find circuits. However, there are now a number of general design motifs with known behaviours in the literature. Here, we will make extensive use of the two-domain scheme, which introduces a *Join-Fork* motif to mimic a chemical reaction. While the abstract chemical system remains broadly similar to the CN model, there are some crucial differences, see Table 4. The general strategy we take to convert the CN to DSD is to translate each of the catalytic reactions in Table 4 into a Join-Fork gate^{32,36}. Subsequently, we will simulate the gates acting in concert.

Table 4: List of reactions that constitute the d-CN.

| Function | Reaction |
|---------------------|--|
| Signal integration | $Fsi_n + A_n \rightleftharpoons A_n + B$ |
| Weight accumulation | $A_n + E \rightleftharpoons E + H_n$ |
| Signal modulation | $A_n + H_n \rightleftharpoons H_n + B$ |
| | $B + E_0 \rightleftharpoons E_1$ |
| Activation function | ... |
| | $B + E_{m-1} \rightleftharpoons \mathcal{E}$ |

We first explain how we use the Join-Fork gates. For each reaction, a *Join* gate is able to bind the *reactants* and produces a translator strand. Then, the translator activates a *Fork* gate, which in turn releases the reaction *products*. Additional energy must be supplied to completely release all products from Fork gates, as the translator strand will only displace the first product. Appropriately designed *helper* strands are therefore placed in the solution to release subsequent products. After the first product has unbound, an exposed toehold is left, which can lead to unwanted side-effects. To address this, we follow³² and extend the original design from³⁶ by incorporating an additional long domain on the left-hand side of the Fork gate, which upon binding an appropriate auxiliary molecule, *seals* the gate to

prevent rebinding of its outputs. Here, we extend all Join gates in an equivalent way to prevent rebinding of the translator strand. This addition allows us to avoid interactions of the double-stranded complexes with waste molecules.

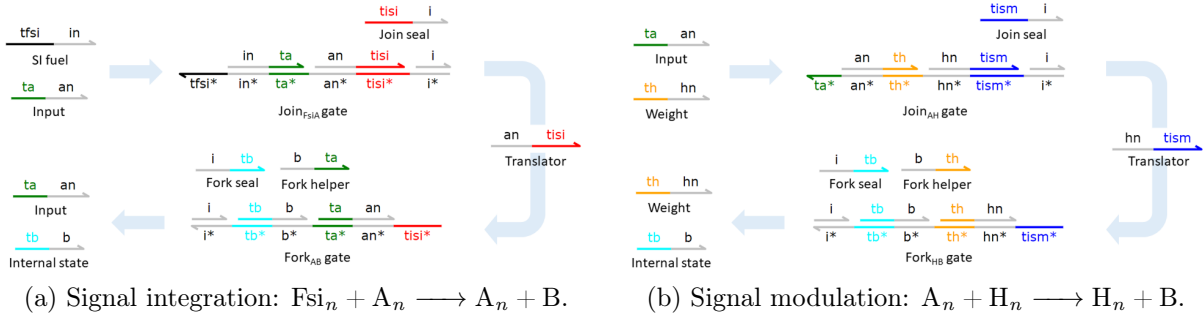


Figure 11: Mapping the CRN neuron to a DNA neuron. We use a two domain Join-Fork gate to emulate each of the catalytic reactions in the CN (Table 4). In each case, a Join gate binds the two reactants in sequence, first displacing a waste molecule, and secondly displacing a translator molecule, which triggers the corresponding Fork gate to release strands representing the reaction *products*. The translator displaces the first product, and then a Fork helper displaces the second product. Both Join and Fork gates can be *sealed* upon binding of an appropriate auxiliary strand (labelled Join seal and Fork seal), which displaces the final incumbent bound $\langle i \rangle$ strand.

In our design, binding of the translator immediately releases an A_n ($\langle ta \hat{ } an \rangle$) strand, the first of the reaction products. The second product, B ($\langle tb \hat{ } b \rangle$), is released upon binding of a *Fork helper* strand $\langle b \ ta \hat{ } \rangle$. Finally, the Fork_{AB} gate is sealed upon binding of the *Fork seal* strand $\langle i \ tb \hat{ } \rangle$. The pair of Join and Fork gates together consume 1 molecule for each of the reactants, and produce 1 molecule for each of the products, ensuring equivalent stoichiometry to the abstract reaction.


In order to illustrate the mapping from the CN to DSD, we describe now in detail the reaction $Fsi_n + A_n \longrightarrow A_n + B$ (Fig. 11a), which serves as a representative of all 3 catalytic reactions in the d-CN. A Join_{AFsi} gate is defined by a structure that enables the binding of Fsi_n and A_n ; the gate is only active if both input species are present. First, Fsi_n binds and displaces the incumbent bound $\langle in \ ta \hat{ } \rangle$ molecule, exposing the $ta \hat{ }$ toehold. This enables the binding of A_n ($\langle ta \hat{ } an \rangle$), which then displaces the $\langle an \ tisi \hat{ } \rangle$ translator strand, signalling that the reactants have been received and that the overall reaction can

fire. The $\text{Join}_{\text{FsiA}}$ gate is then sealed by the binding of $\langle \text{tisi}^{\wedge} \text{i} \rangle$, preventing rebinding of the translator, and producing a further waste molecule $\langle \text{i} \rangle$. The Fork_{AB} gate is designed in such a way that upon triggering by the translator strand of the corresponding Join gate, it is able to release both product molecules.


Table 5: List of key DNA strands which facilitate learning.

| Name | Signal | DSD Species |
|-------------------------|----------------|--|
| Input | A_n | $\langle \text{ta}^{\wedge} \text{an} \rangle$ |
| Weights | H_n | $\langle \text{th}^{\wedge} \text{hn} \rangle$ |
| Internal state | B | $\langle \text{tb}^{\wedge} \text{b} \rangle$ |
| Learning signal | \mathcal{E} | $\langle \text{b tem}^{\wedge} \text{b} \rangle$ |
| Signal integration fuel | Fsi_n | $\langle \text{tfsi}^{\wedge} \text{fsin} \rangle$ |

Controlling the activation function non-linearity with extended polymers

The only reaction which takes a different form than a combination of Join and Fork gates is the activation function. We first describe the simplest case of an activation function with minimal non-linearity, i.e. $m = 1$. In this case it takes the form: $\{\text{tb}^{\wedge}*\}[\text{b te0}^{\wedge}]:[\text{b te1}^{\wedge}]\langle \text{b} \rangle$, or graphically: . B molecules can bind to this compound; in doing so they expose the te0 short domain which allows for binding of E_0 . When E_0 binds to the complex, it displaces a long domain b and releases the learning signal \mathcal{E} , which in the case of $m = 1$ is represented by three-domain species: $\langle \text{b te1}^{\wedge} \text{b} \rangle$.

This system can now be generalised to arbitrary integer values of m , by extending the polymer with additional segments to accommodate for binding of more B and E_m molecules (Fig. 12). We use segments of the form $[\text{b tb}^{\wedge}]:[\text{b tek}^{\wedge}]$, where k is the index of the k -th extra segment in the complex. Each new segments should be added before the last fragment which contains \mathcal{E} : $[\text{b te1}^{\wedge}]\langle \text{b} \rangle$. In the case of $m = 2$ the activation function then is $\{\text{tb}^{\wedge}*\}[\text{b te0}^{\wedge}]:[\text{b tb}^{\wedge}]:[\text{b te1}^{\wedge}]:[\text{b te2}^{\wedge}]\langle \text{b} \rangle$ or graphically:



The weight accumulation function is distinguished from standard gates in that the first

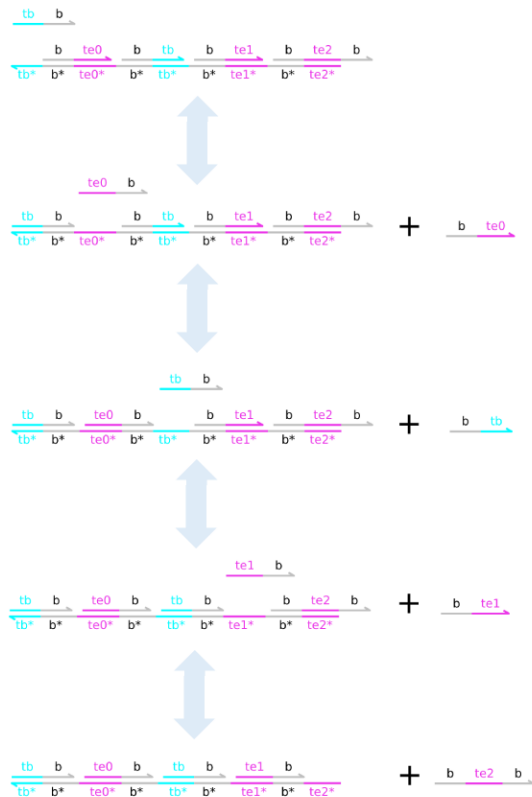


Figure 12: The activation function for $m = 2$ is modelled as a long polymer which accommodates for binding of B and subsequent E molecules to its surface. These two species can bind to the polymer in an alternate manner. First the binding of B frees up a $te0$ toehold, next the binding of E_1 frees up a tb toehold etc. Altogether, this process consumes B molecules. At the end of the process a three-domain learning signal molecule \mathcal{E} is produced. In the case of $m = 2$ this molecule takes the following form: $\langle b \ te2 \ b \rangle$. This mechanism can also run backwards to produce B molecules.

reactant of the Join gate, i.e. $\langle b \ te2 \ b \rangle$ representing the learning signal \mathcal{E} and the first product of the Fork gate are both three domain species. The initial form of the Fork gate complex has a long domain b branching out of the double-stranded structure (Fig. 13). This modification is necessary in order to allow for \mathcal{E} to catalyse the reaction.

An alternative way to implement this mechanism could be the use of a multi-step cascade of gates. This approach, however, would necessitate the use of additional toehold definitions, thus limiting the number of input channels that could be simulated.


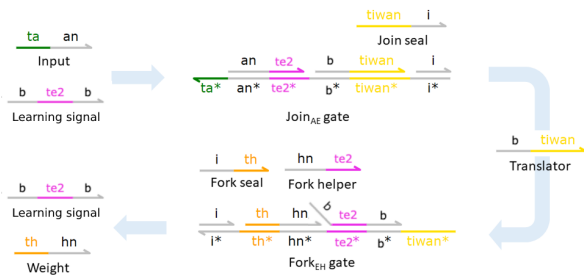


Figure 13: Weight accumulation ($m = 2$): $A_n + \mathcal{E} \longrightarrow \mathcal{E} + H_n$. The catalytic reaction that realises the weight accumulation function is a Join gate and a modified variant of the Fork gate. In this variation, the first reactant of the Join gate and the first product of the Fork gate is a three-domain species \mathcal{E} , which represents the learning signal. The initial Fork gate complex now has a long domain b branching out of the double-stranded structure. This modification is needed to ensure complementarity with the tunable activation function.

Computational Complexity

Extending the d-CN to accommodate additional input channels requires the user to define a single new toehold domain definition $tiwan$, which is responsible for weight accumulation in each of the N channels. Moreover, there are six toehold domains that remain the same regardless of the number of input channels (ta , th , tb , $tfsi$, $tism$, $tisi$). Therefore, the system with $N = 3$ input channels requires 9 toehold definitions ($6 + N$). Additionally, depending on the length of the polymer which facilitates the activation function there are at least two additional toehold domains: $te0$ and $te1$. We base the recognition of the inputs, as well as other two-domain strands in the system, on the long domains. There are two long domains which remain the same regardless of the number of channels (b , i), and three which need to be defined when adding another input channel (an , hn , $fsin$). Therefore, the system with $N = 3$ input channels requires 11 long domain definitions ($2 + 3N$).

Simulating the d-CN

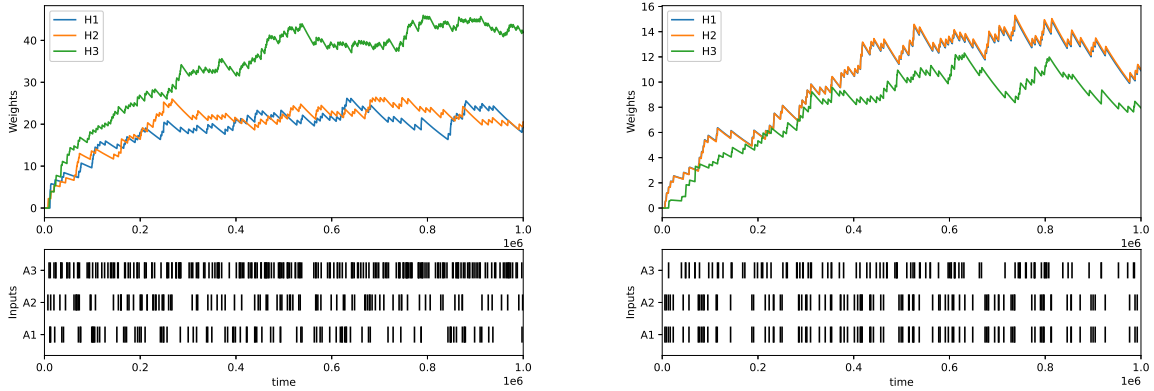

(a) Example of frequency bias learning ($m=1$). (b) Example of temporal correlation learning ($m=3$).

Figure 14: Examples of learning episodes in d-CN for (a) frequency bias task, and (b) temporal correlation task. For statistical data about the weight distributions obtained over multiple runs see fig. ??.

When simulating the d-CN, we initialise the system with different amounts of gate complexes and helper strands needed for the computation by both Join and Fork gates depending on their function. Signal modulation fuel molecules are initiated at $25000 \mu\text{M}$, signal integration at $50000 \mu\text{M}$, and weight accumulation at $10000 \mu\text{M}$. We also initialise the fuel molecules necessary for the signal integration mechanism Fsi_n with $50000 \mu\text{M}$. Lastly, in all of the experiments we choose to set the bolus size, i.e. the amount of A_n species injected to the system at each spike, to $\beta = 10 \mu\text{M}$. In order to model decay of H_n species we introduce garbage collection molecules $\{\text{th}^*\}[\text{hn}]$, which sequester and inactivate the molecular species H_n . We inject $12 \mu\text{M}$ and $0.1 \mu\text{M}$ of these species to the system periodically every 1000 s.

We have been careful to use strand displacement reaction rates that are within the range that has been measured experimentally⁴⁷. In order to reproduce the desired dynamical behaviours, the binding rates associated with the ta , th toeholds have been set to lower values than the other toeholds; see Table ?? for details on the parameters.

To determine whether the d-CN is capable of *learning*, we carried out a range of simula-

tions using Visual DSD. We found that both *infinite* and *detailed* mode compilation could produce the intended dynamical behaviours. Similarly, we found that these behaviours could be produced in both simulations at low copy numbers (using Gillespie’s stochastic simulation algorithm) and in the fluid limit (deterministic rate equations). Accordingly, we show infinite mode deterministic simulations in the main article, and other simulations in the SI (Fig. ??).

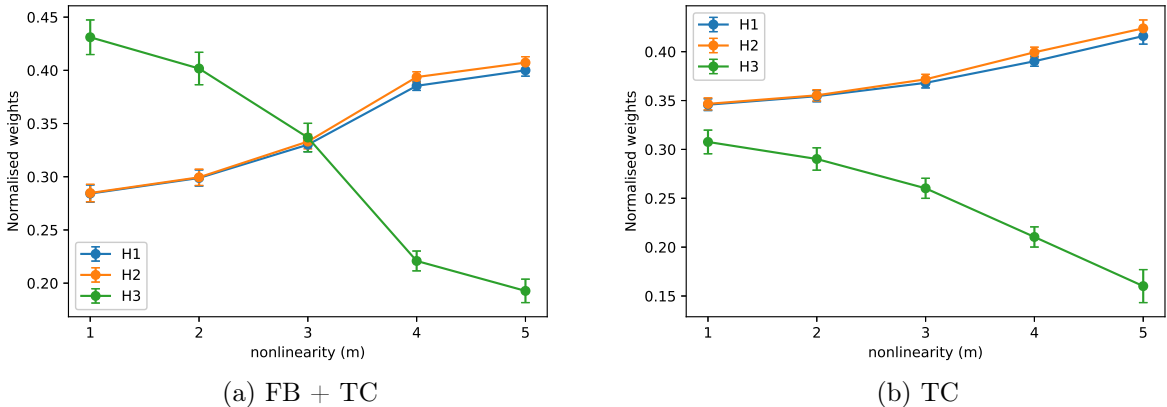


Figure 15: Normalised steady state weights as a function of the length of the activation function polymer. As the polymer is extended the activation function becomes steeper and therefore requires a correlation of at least two signals to trigger learning. Therefore, the DNA neuron becomes better at recognising temporal correlations when m is high.

To check whether the d-CN behaves as expected, we test its ability to distinguish the two types of biases on tasks where A_2 is temporally correlated with A_1 , and further analyse how this depends on non-linearity/polymer length (Fig. 15). First, we consider a scenario where A_3 is both uncorrelated with A_1/A_2 and additionally has a spiking frequency twice as high as the other input channels (0.0002 Hz; Fig. 15a). Consistent with the CN, the d-CN is sensitive to frequency bias when the non-linearity is low, corresponding to the weights of A_3 are high for $m = 1$. Vice versa, in the case of high non-linearity, the d-CN recognises the temporal correlations, corresponding to the weights of A_1 and A_2 being high. When removing the frequency bias of A_3 , the system still differentiates between uncorrelated and correlated inputs, but the ability to distinguish the two types of signal increases with m (see

Fig. 15b).

We also compared the ability of the d-CN directly with the CN. We found that the d-CN is able to detect both FB and TC biases (Fig. 16). However, in the TC task the indication of the temporal order of the input signals is subtle, in the sense that the steady state weights of the correlated channels are almost the same, with only a slight difference indicating temporal order.

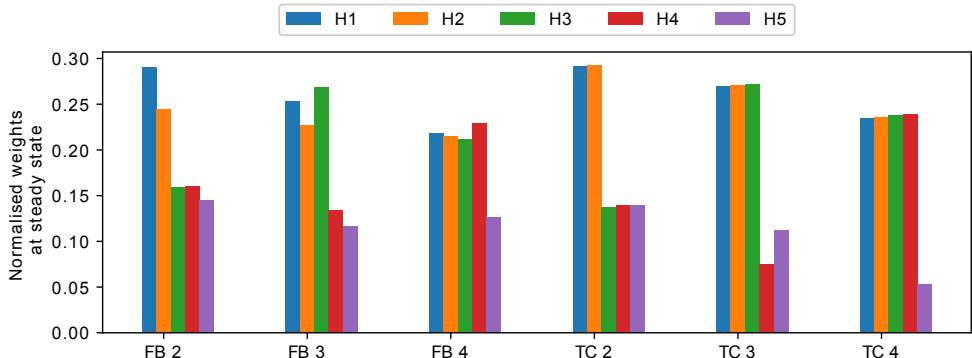


Figure 16: Same as fig. 4, but for the d-CN. Data was only collected after the weights reached the steady state (after 800000 time units).

Discussion

To the best of our knowledge, the CN is the first fully autonomous chemical model of a Hebbian spiking neuron. While it is unlikely that the basic model can be engineered as is, it has some features that make the system interesting from a fundamental point of view.

One of the attractive features of the (basic) CN neuron is that it is micro-reversible and therefore thermodynamically plausible. This makes it a useful theoretical tool to probe the thermodynamics of learning. While a thorough analysis of the energy requirements of the system is beyond the scope of this article, we note that the physical plausibility of the model has highlighted resource requirements of computation. In particular, we found that increasing the non-linearity comes at an additional cost in resource. The CN suffers from starvation of B molecules as m increases. For a sufficiently high number of m , this leads to

a breakdown of the mechanisms and the system loses its ability to detect coincidences, as illustrated in Fig. 7. This “starvation” effect can be alleviated by increasing the bolus size (while keeping the threshold fixed; Fig. 7). In a biological context, the increase of the bolus size comes at a direct synthesis cost, if the molecules that make up the bolus need to be made by the cell. Yet, even if we assume that the particles are, somehow, pre-existing, injecting a bolus requires chemical work, which is proportional to the number of particles, i.e. the bolus size. Hence, there is a fundamental thermodynamic cost involved in computing the non-linearity. We are not aware of any formal proofs that show that computing non-linearities necessarily requires an increased energy requirement. It therefore remains an open question whether or not this is a feature of the particular model choices, or the manifestation of a deeper constraint. Interestingly, the FB task, which does not rely on non-linearities, can be solved with much simpler, and thermodynamically cheaper, designs, e.g. a simple decaying particle.

While the basic CN does not lend itself to a direct implementation in biochemistry, we presented a compartmentalised interpretation of the system that is biologically more plausible. It interprets different input species, and indeed the internal state molecule B as one and the same species, but contained in different compartments. This makes the system feasible, in principle. Although creating many compartments with the required dynamics may remain challenging, significant progress has been made in recent years towards programming molecular systems in protocells⁴⁸.

Interestingly, there are structural similarities between the c-CN and the *lac* system in *E.coli*⁴⁹. The essence of the *lac* system is that it only switches on the lactose metabolism (the equivalent to the weight molecules in the compartment) when it is stimulated by lactose in the environment (i.e. B). The principle of operation of the *lac* system is similar to the c-CN, except that *E.coli* does of course not export lactose to the environment. Taking this analogy seriously, it would be interesting to consider whether catabolite repression, which is a moderately complex decision process, can be mapped to a simple neural network.

Amongst the three versions of the chemical neuron that we presented, we found that all could reproduce the same qualitative behaviours (Figs. 3 and ??). However, given that all three of them are different designs, each version required its own parametrisation, which had to be found by manual exploration in each case. It is thus not possible to reproduce the behaviour of one model with another one exactly. Qualitatively, however, we found the same behaviours in all models. The only major difference was on the TC task. Unlike the other two versions of the chemical neuron, the d-CN did not clearly highlight the temporal order of input signals (Fig. 16). While the d-CN indicates a strong difference between the correlated and non-correlated species, the weight difference between the correlated channels which should indicate the temporal order is marginal. Whether this can be improved with a better parametrisation, or whether this points to a fundamental limitation of the model must remain an open question.

From an engineering perspective, the d-CN is certainly the easiest to realise experimentally. DNA circuits are much less prone to crosstalk than more standard biochemical reaction networks. Synthesising DNA molecules is now a routine procedure. There are, however, several elements of the d-CN design that will require careful consideration before an implementation can be done. For any practical use, one would need to interface the DNA computer with the *in vivo* target systems. How to do this in a general way remains an open question, but there have been a number of previous systems that indicate possible pathways⁵⁰⁻⁵³.

More specifically for the d-CN, there are a number of experimental challenges that need to be addressed. In order to ensure that the kinetics of the d-CN are conserved throughout the learning and testing phases, we require the activation species B to decay. To remove the B species, we employ simple helper complexes, which are periodically replenished during the simulation. These complexes are capable of making B and H_n species unreactive, thereby removing them from the system. In order to achieve better reproducibility of the results the experimental realisation of this would necessitate a relatively frequent or continuous

supply of these DNA complexes. While difficult to achieve experimentally, there are known techniques to overcome the need for frequent replenishment, including the use of *buffered* gates⁴⁰ or timer circuits⁵⁴.

Scaling the system to more input channels requires an additional short domain sequences per additional channel. Prima facia the scaling up of the d-CN is therefore limited by the availability of orthogonal short domain sequences. A redesign based on localised design principles could be a feasible solution if the number of toeholds becomes a problem. Here, instead of using a different set of long and short domains, distinct channels could be implemented through physical separation of the species⁵⁵.

Describing the model as a neuron encourages the question of building networks capable of complex computational tasks. A major impediment for building networks of d-CN could be the immediate injection of A species to the neurons in the next layers of the network. This would necessitate an inclusion of a different activation function, or a mechanism which would allow for the signal propagation. Incorporating a buffered gate design⁴⁰ could allow for a programmed release of a certain number of input species, once the activation signal is produced. Nevertheless, we leave the question of constructing functional neural networks in DNA for future research.

Supporting Information

Supporting information includes the following items:

- detailed description of the reaction rate constants necessary to realise CN and c-CN,
- lists of nucleotide sequences and binding rates for d-CN,
- weight distributions for FB 2 and TC 2 tasks as a function of m ,
- statistical data about the weight distributions for d-CN,
- examples of d-CN training in other simulation modes and relearning of input statistics,

- study of signal modulation mechanism in the d-CN,
- examination of strategies for garbage collection and stability of the learnt solutions as a function of bolus size and abundance of gate molecules,
- analysis of performance of the CN and d-CN models on the FB and TC task,
- Visual DSD code for d-CN.

Author Contributions

Conceived the research: DC, ND, JF. Conducted the research: JF. Wrote the paper: DC, ND, JF.

Conflicts of Interest

None

Funding

None

References

- (1) Govern, C.; ten Wolde, P. Energy dissipation and noise correlations in biochemical sensing. *Physical Review Letters* **2014**, *113*, 258102.
- (2) Govern, C.; ten Wolde, P. Optimal resource allocation in cellular sensing systems. *PNAS* **2014**, *111*, 17486–17491.
- (3) Alon, U. *An Introduction to Systems Biology: Design Principles of Biological Circuits*; Chapman & Hall/CRC Computational Biology Series; CRC Press LLC, 2019.

- (4) Yi, T.; Huang, Y.; Simon, M.; Doyle, J. Robust perfect adaptation in bacterial chemotaxis through integral feedback control. *Proceedings of the National Academy of Sciences* **2000**, *97*, 4649–4653.
- (5) Hoffer, S. M.; Westerhoff, H. V.; Hellingwerf, K. J.; Postma, P. W.; Tommassen, J. Autoamplification of a two-component regulatory system results in "learning" behavior. *Journal of bacteriology* **2001**, *183*, 4914–4917.
- (6) Chu, D. Performance limits and trade-offs in entropy-driven biochemical computers. *Journal of Theoretical Biology* **2018**, *443*, 1–9.
- (7) Chu, D. Limited by sensing - A minimal stochastic model of the lag-phase during diauxic growth. *Journal of Theoretical Biology* **2017**, *414*, 137–146.
- (8) Chu, D.; Barnes, D. The lag-phase during diauxic growth is a trade-off between fast adaptation and high growth rate. *Scientific Reports* **2016**, *6*, 25191.
- (9) Aggarwal, C. *Neural networks and deep learning : a textbook*; Springer: Cham, Switzerland, 2018.
- (10) Sengupta, A.; Ye, Y.; Wang, R.; Liu, C.; Roy, K. Going Deeper in Spiking Neural Networks: VGG and Residual Architectures. *Frontiers in Neuroscience* **2019**, *13*, 95.
- (11) Afshar, S.; Ralph, N.; Xu, Y.; Tapson, J.; Schaik, A. v.; Cohen, G. Event-Based Feature Extraction Using Adaptive Selection Thresholds. *Sensors* **2020**, *20*.
- (12) Fil, J.; Chu, D. Minimal Spiking Neuron for Solving Multilabel Classification Tasks. *Neural Computation* **2020**, *32*, 1408–1429.
- (13) Gütig, R. Spiking neurons can discover predictive features by aggregate-label learning. *Science* **2016**, *351*, aab4113–aab4113.
- (14) Oja, E. Simplified neuron model as a principal component analyzer. *Journal of Mathematical Biology* **1982**, *15*, 267–273.

- (15) Diehl, P.; Cook, M. Unsupervised learning of digit recognition using spike-timing-dependent plasticity. *Frontiers in Computational Neuroscience* **2015**, *9*, 99.
- (16) Afshar, S.; Hamilton, R. J.; Tapson, J.; van Schaik, A.; Cohen, G. Investigation of Event-Based Surfaces for High-Speed Detection, Unsupervised Feature Extraction, and Object Recognition. *Frontiers in Neuroscience* **2019**, *12*, 1047.
- (17) Okamoto, M.; Sakai, T.; Hayashi, K. Biochemical Switching Device Realizing McCulloch-Pitts Type Equation. *Biol. Cybern.* **1988**, *58*, 296–299.
- (18) Hjelmfelt, A.; Weinberger, E. D.; Ross, J. Chemical implementation of neural networks and Turing machines. *Proceedings of the National Academy of Sciences* **1991**, *88*, 10983–10987.
- (19) Banda, P.; Teuscher, C.; Stefanovic, D. Training an asymmetric signal perceptron through reinforcement in an artificial chemistry. *Journal of The Royal Society Interface* **2014**, *11*, 20131100.
- (20) Blount, D.; Banda, P.; Teuscher, C.; Stefanovic, D. Feedforward Chemical Neural Network: An In Silico Chemical System That Learns xor. *Artificial Life* **2017**, *23*, 295–317.
- (21) Shirakawa, T.; Sato, H. Construction of a Molecular Learning Network. *Journal of Advanced Computational Intelligence and Intelligent Informatics* **2013**, *17*, 913–918.
- (22) Nesbeth, D.; Zaikin, A.; Saka, Y.; Romano, M.; Giuraniuc, C.; Kanakov, O.; Laptyeva, T. Synthetic biology routes to bio-artificial intelligence. *Essays in Biochemistry* **2016**, *60*, 381–391.
- (23) Chen, M.; Xu, J. Construction of a genetic conditional learning system in *Escherichia coli*. *Science China Information Sciences* **2015**, *58*, 1–6.
- (24) Racovita, A.; Jaramillo, A. Reinforcement learning in synthetic gene circuits. *Biochemical Society Transactions* **2020**, *48*, 1637–1643.

- (25) Fernando, C.; Liekens, A.; Bingle, L.; Beck, C.; Lenser, T.; Stekel, D.; Rowe, J. Molecular circuits for associative learning in single-celled organisms. *Journal of The Royal Society Interface* **2009**, *6*, 463–469.
- (26) McGregor, S.; Vasas, V.; Husbands, P.; Fernando, C. Evolution of Associative Learning in Chemical Networks. *PLOS Computational Biology* **2012**, *8*, 1–19.
- (27) Macia, J.; Vidiella, B.; Solé, R. Synthetic associative learning in engineered multicellular consortia. *Journal of The Royal Society Interface* **2017**, *14*, 20170158.
- (28) Lakin, M.; Youssef, S.; Polo, F.; Emmott, S.; Phillips, A. Visual DSD: a design and analysis tool for DNA strand displacement systems. *Bioinformatics (Oxford, England)* **2011**, *27*, 3211–3213.
- (29) Amir, Y.; Ben-Ishay, E.; Levner, D.; Ittah, S.; Abu-Horowitz, A.; Bachelet, I. Universal computing by DNA origami robots in a living animal. *Nature nanotechnology* **2014**, *9*, 353–357.
- (30) Seelig, G.; Soloveichik, D.; Zhang, D.; Winfree, E. Enzyme-Free Nucleic Acid Logic Circuits. *Science* **2006**, *314*, 1585–1588.
- (31) Soloveichik, D.; Seelig, G.; Winfree, E. DNA as a universal substrate for chemical kinetics. *Proceedings of the National Academy of Sciences* **2010**, *107*, 5393–5398.
- (32) Chen, Y.-J.; Dalchau, N.; Srinivas, N.; Phillips, A.; Cardelli, L.; Soloveichik, D.; Seelig, G. Programmable chemical controllers made from DNA. *Nature Nanotechnology* **2013**, *8*, 755–762.
- (33) Yurke, B.; Turberfield, A.; Mills, A.; Simmel, F.; Neumann, J. A DNA-fuelled molecular machine made of DNA. *Nature* **2000**, *406*, 605–608.
- (34) Fontana, W. Pulling Strings. *Science* **2006**, *314*, 1552–1553.

- (35) Badelt, S.; Grun, C.; Sarma, K. V.; Wolfe, B.; Shin, S. W.; Winfree, E. A domain-level DNA strand displacement reaction enumerator allowing arbitrary non-pseudoknotted secondary structures. *Journal of The Royal Society Interface* **2020**, *17*, 20190866.
- (36) Cardelli, L. Two-Domain DNA Strand Displacement. Proceedings Sixth Workshop on Developments in Computational Models: Causality, Computation, and Physics, DCM 2010, Edinburgh, Scotland, 9-10th July 2010. 2010; pp 47–61.
- (37) R., M.; Arbona, J.; Lad, A.; Mendoza, O.; Aimé, J.; Elezgaray, J. Connecting localized DNA strand displacement reactions. *Nanoscale* **2015**, *7*, 12970–12978.
- (38) Qian, L.; Winfree, E. Scaling up digital circuit computation with DNA strand displacement cascades. *Science* **2011**, *332*, 1196–1201.
- (39) Dalchau, N.; Szép, G.; Hernansaiz-Ballesteros, R.; Barnes, C. P.; Cardelli, L.; Phillips, A.; Csikász-Nagy, A. Computing with biological switches and clocks. *Natural Computing* **2018**, *17*, 761–779.
- (40) Lakin, M.; Youssef, S.; Cardelli, L.; Phillips, A. Abstractions for DNA circuit design. *Journal of The Royal Society Interface* **2012**, *9*, 470–486.
- (41) Qian, L.; Winfree, E.; Bruck, J. Neural network computation with DNA strand displacement cascades. *Nature* **2011**, *475*, 368–372.
- (42) Genot, A.; Fujii, T.; Rondelez, Y. Scaling down DNA circuits with competitive neural networks. *Journal of The Royal Society Interface* **2013**, *10*.
- (43) Cherry, K. M.; Qian, L. Scaling up molecular pattern recognition with DNA-based winner-take-all neural networks. *Nature* **2018**, *559*, 370–376.
- (44) LeCun, Y.; Cortes, C. MNIST handwritten digit database. **2010**,
- (45) Lakin, M.; Stefanovic, D. Supervised Learning in Adaptive DNA Strand Displacement Networks. *ACS Synthetic Biology* **2016**, *5*, 885–897.

- (46) Chu, D.; Zabet, N.; Mitavskiy, B. Models of transcription factor binding: Sensitivity of activation functions to model assumptions. *Journal of Theoretical Biology* **2009**, *257*, 419 – 429.
- (47) Zhang, D.; Winfree, E. Control of DNA Strand Displacement Kinetics Using Toehold Exchange. *Journal of the American Chemical Society* **2009**, *131*, 17303–17314.
- (48) Lyu, Y.; Peng, R.; Liu, H.; Kuai, H.; Mo, L.; Han, D.; Li, J.; Tan, W. Protocells programmed through artificial reaction networks. *Chemical Science* **2020**, *11*, 631–642.
- (49) Chu, D.; Barnes, D. The lag-phase during diauxic growth is a trade-off between fast adaptation and high growth rate. *Scientific Reports* **2016**, *6*, 25191.
- (50) Groves, B.; Chen, Y.; Zurla, C.; Pochekailov, S.; Kirschman, J.; Santangelo, P.; Seelig, G. Computing in mammalian cells with nucleic acid strand exchange. *Nature Nanotechnology* **2015**, *11*, 287–294.
- (51) Oesinghaus, L.; Simmel, F. Switching the activity of Cas12a using guide RNA strand displacement circuits. *Nature Communications* **2019**, *10*.
- (52) J., C.; Ellington, A. Diagnostic Applications of Nucleic Acid Circuits. *Accounts of Chemical Research* **2014**, *47*, 1825–1835.
- (53) Douglas, S. M.; Bachelet, I.; Church, G. M. A Logic-Gated Nanorobot for Targeted Transport of Molecular Payloads. *Science* **2012**, *335*, 831–834.
- (54) Fern, J.; Scalise, D.; Cangialosi, A.; Howie, D.; Potters, L.; Schulman, R. DNA Strand-Displacement Timer Circuits. *ACS Synthetic Biology* **2017**, *6*, 190–193.
- (55) Chatterjee, G.; Dalchau, N.; Muscat, R.; Phillips, A.; Seelig, G. A spatially localized architecture for fast and modular DNA computing. *Nature Nanotechnology* **2017**, *12*, 920.

Graphical TOC Entry

