
Exploring evolution-based & -free protein language models as protein function predictors

Mingyang Hu*

Westlake University
humingyang@westlake.edu.cn

Fajie Yuan*†

Westlake University
yuanfajie@westlake.edu.cn

Kevin K. Yang

Microsoft Research New England
yang.kevin@microsoft.com

Fusong Ju

Microsoft Research Asia
fusongju@microsoft.com

Jin Su

Westlake University
sujin@westlake.edu.cn

Hui Wang

Westlake University
wanghui@westlake.edu.cn

Fei Yang

Zhejiang Lab
yangf@zhejianglab.com

Qiuyang Ding

Westlake University
dingqiuyang@westlake.edu.cn

Abstract

Large-scale Protein Language Models (PLMs) have improved performance in protein prediction tasks, ranging from 3D structure prediction to various function predictions. In particular, AlphaFold [20], a ground-breaking AI system, could potentially reshape structural biology. However, the utility of the PLM module in AlphaFold, Evoformer, has not been explored beyond structure prediction. In this paper, we investigate the representation ability of three popular PLMs: ESM-1b (single sequence) [32], MSA-Transformer (multiple sequence alignment) [27] and Evoformer (structural), with a special focus on Evoformer. Specifically, we aim to answer the following key questions: (i) Does the Evoformer trained as part of AlphaFold produce representations amenable to predicting protein function? (ii) If yes, can Evoformer replace ESM-1b and MSA-Transformer? (iii) How much do these PLMs rely on evolution-related protein data? In this regard, are they complementary to each other? We compare these models by empirical study along with new insights and conclusions. Finally, we release code and datasets for reproducibility.

1 Introduction

Proteins perform the majority of biological activities. It is, therefore, crucial to decipher the mechanisms underlying their structural and functional properties. The canonical *sequence-structure-function* relationship enables the success of sequence-based machine learning methods that infer protein structure and function from amino acid (AA) sequence. Large-scale protein language models (PLMs) with self-supervised pretraining on tens of millions to billions of proteins (PLMs) [25, 32, 11, 4] are the current state-of-the-art in predicting function and fitness from sequences.

Meanwhile, AlphaFold [20], trained on experimental 3D protein structures from the Protein Data Bank (PDB) [36] can approach the resolution of experimental structures for most protein sequences.

*Equal Contribution

†Corresponding author. Fajie designed the idea and led the research. Mingyang performed the research and led all experiments. Kevin provided important guidance for this research and worked on a part of paper writing. Jin performed experiments for the MSA generation.

Its multiple sequence alignment representation module, Evoformer, combines new deep learning machinery, a PLM residue reconstruction task, and structural supervision in the form of a distogram. Like MSA-Transformer [27], Evoformer takes a family of evolutionarily-related and aligned protein sequences as input, in contrast to PLMs such as ESM-1b [32] and TAPE [25], which only take individual protein sequences. Thus, for short, we refer to the former two models as evolution-based PLMs and the latter two as evolution-free PLMs.

Despite the remarkable success of AlphaFold in predicting structure from sequence, it is unknown whether its Evoformer module can be applied to other problems, in particular predicting protein function and fitness. Deciphering AlphaFold rather than treating it as a black box is beneficial to both artificial intelligence and biology communities. Therefore, we attempt to answer the following key questions.

Q(i): Does the Evoformer trained during AlphaFold training learn general-purpose protein representations that can be used for various function prediction tasks? Unlike ESM-1b and MSA-Transformer, Evoformer is trained with supervision from 3D structures. In addition, the second part of AlphaFold, the Structure Module, built on top of the 48 Evoformer blocks, is much more complex and deeper than the traditional (linear) classification head used in ESM-1b and MSA-Transformer. These differences make the function representation ability of Evoformer an open question.

Q(ii): If Evoformer’s representation is general, does it outperform ESM-1b and MSA-Transformer on downstream tasks? While these three models are trained with different parameter sizes and datasets (see Table 1), we believe the comparison results are still valuable because they are currently the most advanced PLMs. Training these large models from scratch is out of the reach of most academic research groups due to the compute and cost involved. In addition, we also investigate the utility of ESM-1b and MSA-Transformer on function prediction tasks.

Q(iii): How much does the performance of evolution-based PLMs rely on the input MSAs? Can evolution-free PLMs assist evolution-based PLMs in terms of MSA construction? Both Evoformer and MSA-Transformer take sets of aligned sequences (MSAs) as input. We investigate the effect of MSA quality and depth on function prediction. On the other side, ESM-1b can simply formulate MSA construction as the remote homology detection task. Then, it is interesting to know whether ESM1b-constructed MSAs can be used as inputs to Evoformer and MSA-Transformer.

We address the above questions through comprehensive empirical studies on a variety of structure and function prediction tasks. Note although AlphaFold (i.e. Evoformer + Structure Module) can accurately predict protein 3D structures, we investigate the ability of Evoformer to perform other structure prediction tasks, such as secondary structure prediction and contact map prediction. We make the following key observations:

- (i) The AlphaFold-trained Evoformer produces representations that are useful for both structure and function prediction, as shown on two structure prediction tasks, two function annotation tasks [45], and two fitness score prediction tasks [25].
- (ii) Evoformer representations are useful for both protein-level and residue-level prediction tasks.
- (iii) Evoformer is superior to ESM-1b and MSA-Transformer for structure prediction and novel miniprotein stability prediction, but inferior to ESM-1b on other function prediction tasks. It performs poorly for zero-shot fitness prediction tasks [24] compared to ESM-1b and MSA-Transformer.
- (iv) Evolution-based PLMs are superior to evolution-free ESM-1b model only in the structure prediction tasks, but in general, are worse than ESM-1b in most function prediction tasks and datasets.
- (v) Consistent with structure prediction, evolution-based PLMs are also sensitive to the amount of MSAs when predicting protein function. In addition, their performance using ESM-1b-constructed MSAs as input is comparable to the performance using MSAs generated by Jackhmmer [19] or HHblits [29].

2 Related Work

Protein language models The volume of protein data has exploded over the last decade with the advancement of new DNA sequencing technologies. PLMs trained on these databases have been successfully applied for various protein related tasks, including secondary structure prediction [25],

Table 1: Model descriptions. ‘Para.’, ‘M’, & ‘seqs’ denotes parameters, million, & protein sequences.

Model	Embedding	Layers	Para.	Training database
ESM-1b	1280	33	650M	UniRef50 (27M seqs)
MSA-Transformer	768	12	100M	UniRef50 (26M MSAs)
Evoformer (No Template)	256 & 128	48	88M	PDB (190K structures + MSAs)

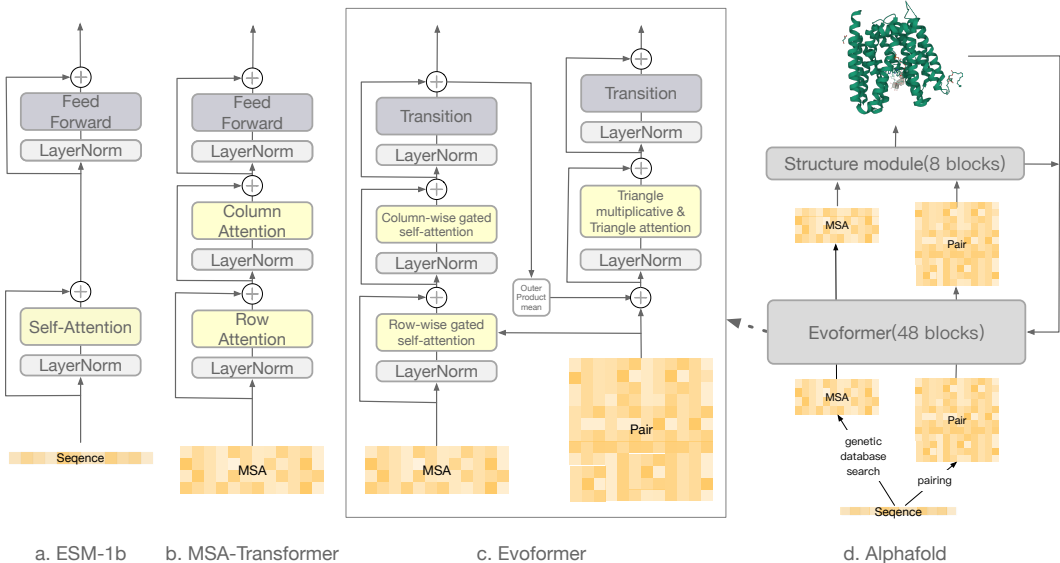


Figure 1: Core modules of the three PLMs.

contact prediction [26], structure prediction [20], annotation prediction [32], signal peptide prediction [37], intracellular localization prediction [38], protein-protein interaction prediction [12], and fitness prediction [8]. Early work by [3] learned protein structural representation with a bidirectional LSTM (biLSTM). [1] used an LSTM to learn diverse protein engineering-relevant properties from 24 million sequences. Recently, with the advent of big models in nature language processing (NLP) domain, large PLMs using the Transformer [40] architecture and BERT [10] denoising task have been widely adopted. ESM-1b found that residue-residue contacts can be recovered from the learned representation [41], identifying the close relationship between Transformer attention and biological features. ProtTrans [11] benchmarked a variety of BERT-like PLMs, including TAPE, ESM-1b, ProtTrans, and MSA-Transformer. Since ProtTrans with the BERT architecture does not exceed ESM-1b, we choose to compare ESM-1b, MSA-Transformer, and Evoformer for this study. Table 1 and Figure 1 provide more details about the three models.

Structure, function, and fitness prediction A protein’s primary structure (i.e. AA sequence) determines its 3D structure, which in turn determines its functional properties. This relationship underlies the success of PLMs, which infer protein structure and function from the raw sequence. Secondary structure (SS) prediction [35] is a easier task than predicting the 2D contact map [42] and 3D structure [20]. MSA-Transformer and ESM-1b can make accurate unsupervised contact predictions, which are an important input for the 3D structure generation.

While remarkable progress has been made in structure prediction, it is unknown whether this AlphaFold-triggered revolution transfers to other tasks, in particular function prediction. Protein function is a broad term that refers to any biological or biochemical roles in organisms. In this paper, we focus on functional annotation prediction (classification task) [45, 5] and fitness prediction (including both regression [8, 25] and zero-shot prediction [16, 24] tasks), as shown in Figure 2. Compared with annotation prediction, fitness prediction is more challenging since (1) there are routinely few or no laboratory labels for supervision; (2) protein AA sequences are highly similar given the same wild-type protein.

3 Preliminaries

3.1 Tasks and datasets

We evaluate models on two structure prediction tasks:

1. Secondary structure (SS): This is a residue-level sequence-to-sequence task where each residue x_i of a protein sequence $x = \{x_1, x_2, \dots, x_L\}$ is mapped to a label y_i corresponding to one of eight secondary structure tasks $y_i \in \{G, H, \dots, C\}$ [25]. SS prediction examines the degree to which a PLM learns local structure.
2. Contacts: For a given protein structure, two residues are considered to be in contact if their C_β carbons are within 8Å. We evaluate on pairs that are more than 6 positions apart in the primary structure [25]. We measure the results using Precision@ L , which stands for the precision for the top- L pairs with the highest predicted contact probability [44]. L is the length of the protein sequence.

For both contacts and secondary structure, we use the dataset in [32] which is constructed from SCOPe [13], and use the suggested split as the training and testing sets (see Table 2). One concern is that the dataset used here has been trained by AlphaFold as they are from Protein Data Bank (PDB) [2]. Hence, we investigate six additional protein sequences, among them three are from CASP14* competition and three are SARS-CoV-2 variants.

We also evaluate on two function classification tasks:

1. Metal ion binding: This is a binary classification task, where a PLM with a new classification layer is used to determine whether there are metal ion-binding sites in the protein. The dataset is also collected from PDB with annotation as metal ion binding. We randomly sample the same amount of proteins from the database as the negative class.
2. Antibiotic resistance: This is a multi-class classification task, where a PLM need to correctly determine which class of antibiotic a protein degrades. We construct the dataset from CARD [23] which contains 19 different antibiotic types (see Appendix A.5 for details).

And three fitness prediction tasks. Unlike functional annotation prediction, protein sequences in this task are all from the same wild-type a small number of mutated residues.

1. Stability: This is a protein-level regression task that predicts the protease concentration at which a protein can maintain its fold [33]. We use the data splits from TAPE.
2. Fluorescence: This is also a protein-level regression task, predicting the log-fluorescence intensity of the protein sequence [34]. We use the data splits from TAPE.
3. Zero-shot mutation effect prediction: This is a protein-level prediction task by comparing the difference between likelihoods assigned to the mutated residue and the likelihoods assigned to the wild-type (see [24] for details). We evaluate five protein mutation datasets from DeepSequence [31]. Only single point mutation data is considered in this sub-task.

3.2 Methods

For supervised function prediction tasks, we remove the original classification layer for ESM-1b and MSA-Transformer, and the Structure module for AlphaFold. These remaining parts are called

*<https://predictioncenter.org/casp14/>

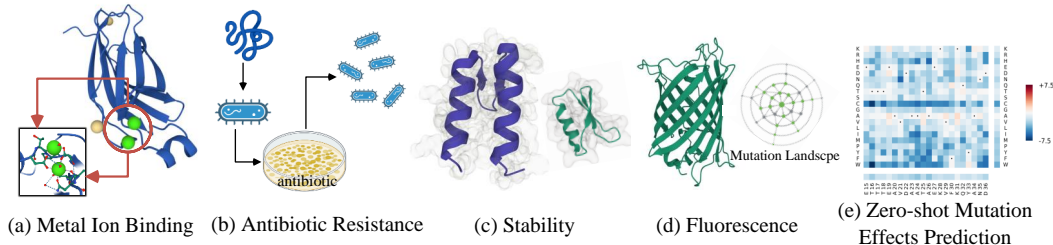


Figure 2: Protein function prediction tasks. (a) and (b) are annotation prediction tasks. (c)(d) and (e) are fitness prediction tasks.

Table 2: Dataset descriptions

Task	Source	Train	Test
Secondary Structure & Contact Prediction	SCOPe	11680	3617
Metal Ion Binding	PDB	6000	1332
Antibiotic Resistance	CARD	2072	530
Fluorescence	TAPE	21446	27217
Stability	TAPE	53679	12839

protein representations. We then add a linear layer on top of these representation models to perform new classification or regression tasks. We adopt the standard fine-tuning strategy by fine-tuning all parameters using Adamw optimizer with $1e-5$ as learning rate. For the zero-shot fitness prediction task, no training is needed. Instead, we obtain the softmax output at the corresponding mutation site in each protein sequence. The probability value is regarded as the fitness value for each amino acid following [16, 24]. As for structure predictions, we follow the same practice in [25]. Other details can be seen in Appendix A.1.

4 Results

4.1 Structure Prediction

In this section, we examine the structure representation ability of the three PLMs models discussed above. In general, the secondary structure and contact prediction tasks do not have significant practical values since there is already highly accurate 3D structure data by AlphaFold. The purpose instead is to provide a reference for function prediction, given that some tasks have similar formulation.

Table 3 and 4 show the results of SS prediction and contact prediction, respectively. For SS prediction, we consider two settings: pre-trained parameters and training from scratch. For Evoformer, pre-training means the training of AlphaFold. For contact prediction, all PLMs have been already pre-trained since there is no meaningful contact map without pre-training.

First, we can easily observe that with pre-training, Evoformer performs the best in both tasks. Particularly, Evoformer outperforms ESM-1b and MSA-Transformer by a large margin for contact

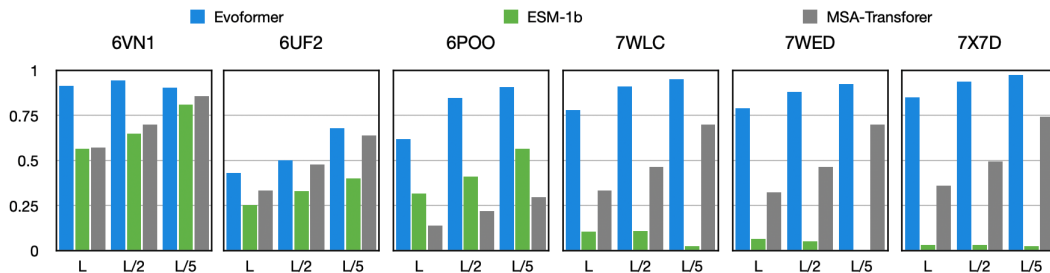


Figure 3: Contact map prediction results, Precision@L, L/5, L/2.

Table 3: SS prediction. 'Scratch' means training from scratch without pre-training.

Model	Pre-train	Scratch	Improv.
ESM-1b	0.703	0.500	40.6%
MSA-Transformer	0.748	0.634	18.0%
Evoformer	0.785	0.614	27.8%

Table 4: Contact map prediction, Precision@L, L/5, L/2.

Model	Precision@L	Precision@L/2	Precision@L/5
ESM-1b	0.540	0.668	0.783
MSA Transformer	0.660	0.784	0.872
Evoformer	0.946	0.970	0.978

prediction with over 94% accuracy on Precision@L. By contrast, it does not perform as accurately as the contact prediction task for SS prediction, which improves ESM-1b by 11.6% and MSA-Transformer by 5%. This is reasonable since SS prediction is very different from 3D structure prediction. Even though Evoformer has strong structure representation ability, it may not work well by just adding a linear classification layer. This suggests that a more complex structure module for SS prediction is necessary for higher accuracy. In comparison, since contact information can be directly extracted from the pairwise distance map, it is not surprising that Evoformer shows superb results in this task. In addition, we have also demonstrated additional results in Figure 3, where these proteins have not been trained by AlphaFold. In general, they are consistent with our above analysis.

Second, we observe that pre-training is important: all PLMs are remarkably improved with around 40% improvement for ESM-1b and 28% for Evoformer. Interestingly, we note that Evoformer performs worse than MSA-Transformer by training from scratch. We conjecture that Evoformer is much harder to be trained without good initialization as its network architecture is more complex and deeper than MSA-Transformer.

Finally, for structure prediction, evolution-based models are largely better than evolution-free ESM-1b. This is consistent with biological intuition and previous observation, such as in [27].

4.2 Supervised Function Prediction

AlphaFold predicts very accurate protein structures. However, it remains unknown whether its core representation module Evoformer can prediction function. Similarly, we investigate MSA-Transformer’s ability to predict protein function. Note that, unlike annotation prediction, evolution-based Evoformer and MSA-Transformer only take single sequences (rather than MSAs) as input since all protein variants share the same MSAs for this task.

The results of annotation prediction (protein-level classification) and fitness predictions (protein-level regression) are listed in Table 5 and 6 respectively. We use classification accuracy [25] for evaluating annotation prediction and Spearman rank correlation [24] for evaluating fitness prediction. First, we find that for annotation prediction, ESM-1b, the evolution-free PLM, exceeds the two evolution-based PLMs, although opposite observations are made for predicting structures. Specifically, pre-trained ESM-1b achieves 5.8% and 17.4% improvements over pre-trained Evoformer and MSA-Transformer. This is a bit surprising since the biological intuition is that protein functional properties are mediated by structures. An important conclusion we reached here is that **better structure PLMs do not mean they have a better representation for predicting function.**

Second, all pre-trained PLMs perform very well on the ABR task, a multi-class protein classification task. Despite that, we can still observe an obvious improvement between training-from-scratch and pre-training. Similar observation brought from pre-training can be obviously seen from all other function prediction tasks. This suggests that **both supervised and unsupervised pre-training on PLMs are very useful to obtain protein function representations.**

Third, we observe that the three pre-trained PLMs in general show better results than the one-hot [25] and ResNet [25, 15] baselines in Table 6. This observation is new since neither Evoformer nor

Table 5: Functional annotation prediction. 'scratch' means random initialization for parameters.

Model	Pre-train		Scratch	
	MIB	ABR	MIB	ABR
ESM-1b	0.840	0.979	0.628	0.945
MSA-Transformer	0.715	0.961	0.640	0.932
Evoformer	0.794	0.979	0.645	0.920

Table 6: Fitness prediction. Scores are |Spearman ρ | on each task.

Model	Pre-train		Scratch	
	Fluorescence	Stability	Fluorescence	Stability
One-hot [25]	0.14	0.19	-	-
ResNet [25]	0.21	0.73	0.28	0.61
ESM-1b	0.68	0.76	0.68	0.59
MSA-Transformer	0.64	0.67	0.67	0.61
Evoformer	0.67	0.79	0.36	0.52

MSA-Transformer have been investigated for supervised fitness prediction. In more detail, ESM-1b performs the best on the fluorescence task, whereas Evoformer is the best on the stability task. This may be because protein stability has a closer relationship with protein structure, or because sequence-only pretraining does not generalize as well as structural pretraining to *de novo* mini-proteins.

4.3 Zero-shot Mutation effects Prediction

Recent work revealed that PLMs are strong zero-shot learners in predicting potential viral mutations [16, 17]. We are interested in evaluating Evoformer’s masked-residue reconstruction ability in such a zero-shot setting given that it is trained on a BERT-like token prediction loss.

Figure 4 shows the results of all PLMs. First, we observe that ESM-1b and ESM-1v [24] yield the best results, and both of them are evolution-free models. ESM-1v shares an architecture with ESM-1b, but is an ensemble of 5 models trained on UniRef90 instead of UniRef50. MSA-Transformer in general performs well except on BLAT_ECOLX_Ostermeier2014. Our results here are slightly different from [24], which shows MSA-Transformer outperforms ESM-1v in average on 41 protein datasets. By examining [24] carefully, we notice that MSA-Transformer is highly affected by the quality and sequence identity thresholds of MSAs. For our experiments, we use the default setting by HHblits [30] searching from BFD[†] database (see Appendix A.3). This is also a key weakness of evolution-based PLMs.

The most surprising results are for Evoformer, which performs poorly in this task for all five datasets. One of the key difference is that both MSA-Transformer and ESM-1b are trained completely on masked token reconstruction. However, Evoformer or AlphaFold is trained with five loss functions, among which four are supervised by protein structures and only one is by masked token reconstruction. The second difference is that the amount of training protein sequences for Evoformer are 100× smaller than MSA-Transformer and ESM-1b (see Table 1).

Answer for Q(i): Yes. The answer is provided in Table 5 and 6. From these results, we can see that Evoformer with pre-trained parameters largely outperforms the non-pretrained version in four different function prediction tasks. Together with its structure representation ability, we conclude that **parameters learned by AlphaFold are general-purpose and useful to various structure and function prediction tasks.**

Answer for Q(ii): No. The answer is provided in Table 3, 4, 5, 6 and Figure 3. These results show that Evoformer indeed outperforms MSA-Transformer and ESM-1b when predicting structures, but it does not obviously outperform ESM-1b when predicting function. In particular, it does not work at all in the zero-shot mutation effect prediction task. Accordingly, we can conclude that

[†]<https://bfd.mmseqs.com/>

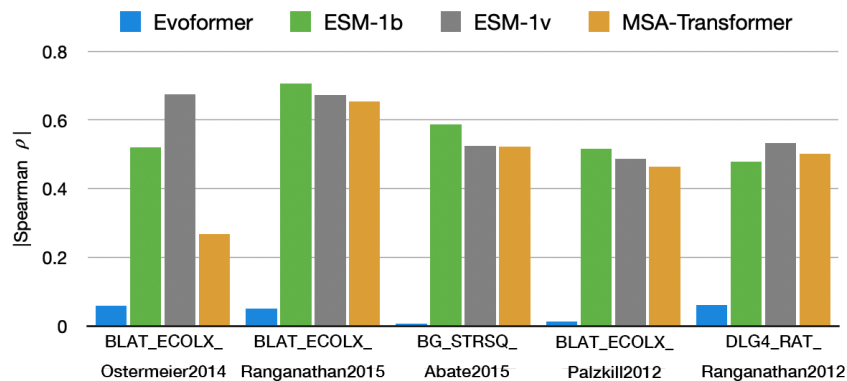


Figure 4: Zero-shot fitness prediction. ESM-1v’s results is the average performance of five models.

Table 7: Impact of MSAs. ‘Seq’ denotes an individual sequence, i.e., no MSAs.

Model	Pretrained	SSP		MIB		ABR	
		MSA	Seq	MSA	Seq	MSA	Seq
Evoformer	Yes	0.785	0.716	0.794	0.724	0.979	0.983
MSA-Transformer	Yes	0.748	0.631	0.715	0.707	0.961	0.908
Evoformer	No	0.614	0.624	0.645	0.632	0.920	0.875
MSA-Transformer	No	0.634	0.526	0.640	0.579	0.932	0.909

the AlphaFold-triggered revolution for structure prediction cannot be directly transferred to function predictions. ESM-1b is still the SOTA when predicting protein functions.

4.4 Effect of MSA

Here, we want to understand the influence of MSAs on evolution-based PLMs. Further, we explore the relationship between evolution-based and -free models. As mentioned in Section 4.2, evolution-based PLMs take only a single sequence as input for the supervised fitness prediction tasks, so we do not consider the affect of MSAs for these two tasks.

We report results on Table 7 and Figure 5. The MSA setting in Table 7 is consistent for both model training and inference. For Figure 5, we only consider the inference stage because it is a zero-shot task. Clearly, we observe that without MSAs, Evoformer, and MSA-Transformer both yield much worse results (with or without pre-training). Similarly, as shown in Figure 5, MSA-Transformer is also affected by the number of MSAs. In general, it performs much worse with few MSAs. These results show that **(Answer for Q(iii)) MSA data is a crucial input for evolution-based PLMs, for not only the structure prediction but also the function prediction tasks.**

4.5 Relationship between Evolution-based & -free PLMs

Evolution-based PLMs require MSA data as input for both training and inference. However, database search using HHblits [30] or Jackhmmmer [19] can take up to 10 minutes for a 1000-residue protein. On the other hand, given the powerful function representation of ESM-1b, we design a fast homology retrieval framework using Siamese ESM-1b, following [28]. Figure 6 is the schematic of the ESM-1b-constructed MSA generating and serving process, called ESM-MSA (see Appendix A.2 for details).

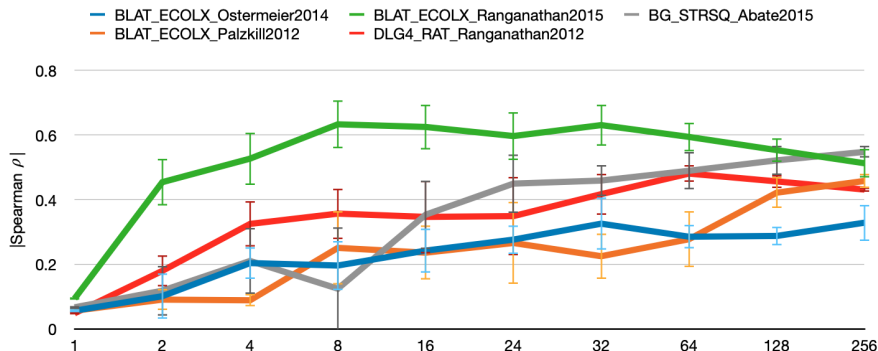


Figure 5: The effect of numbers of MSAs on the zero-shot fitness prediction task using MSA-Transformer. Error bars denote the standard deviation of six replicate experiments with randomly sampled k MSAs.

Table 8: MSA Impacts. ‘Seq’ denotes an individual sequence i.e. no MSAs.

Model	SS Prediction			MIB		
	Jackhmmer	ESM-MSA	Seq	Jackhmmer	ESM-MSA	Seq
Evoformer	0.785	0.776	0.716	0.794	0.766	0.724
MSA-Transformer	0.748	0.733	0.631	0.715	0.774	0.707

Table 8 shows the results by using different MSAs for Evoformer and MSA-Transformer. MSAs generated by ESM-1b are comparable to those found by Jackhmmer (or HHblits) while being much faster (see Appendix A.3.2), suggesting that **(Answer for Q(iii)) the function representation learned by evolution-free ESM-1b can be used to construct MSAs for evolution-based MSA-Transformer and Evoformer.**

5 Conclusions and Limitations

In the paper, we have presented empirical studies to characterize three successful PLMs. In particular, we focus on the function representation capacity of Evoformer. We draw several important conclusions: (i) Evoformer encodes not only structure, but also various protein functional properties; it provides an alternative choice when predicting protein functions, especially the stability prediction task; (ii) despite that AlphaFold dominates the structure prediction tasks, Evoformer is not yet able to substitute ESM-1b and MSA-Transformer when predicting protein functions; (iii) the functional predictability of evolution-based PLMs is also influenced by protein MSAs. Interestingly, evolution-free ESM-1b can generate sufficiently-accurate MSAs for evolution-based PLMs with much higher efficiency. Our work points out both strengths and weakness of three SOTA PLMs, which are potentially useful to many downstream biological tasks, including but not limited to protein engineering [6], cancer early detection [14], and drug discovery [21].

An important limitation is that we probe the representation capacity of these PLMs by only adding a linear head on top — a common practice in the deep learning community. While this verifies our findings, we believe such a linear layer is not sufficiently expressive to achieve SOTA results. That is the reason why Evoformer with a eight-layer Structure module achieves much higher 3D structure accuracy but with a linear layer it achieves less than 80% classification accuracy for the secondary structure prediction task. In addition, we do not fully disentangle the effects of the Evoformer architecture, training data, and loss function when comparing it to MSA-Transformer. Therefore, an important direction is to develop more advanced functional modules for higher prediction accuracy.

References

- [1] Ethan C Alley et al. “Unified rational protein engineering with sequence-based deep representation learning”. In: *Nature methods* 16.12 (2019), pp. 1315–1322.
- [2] Protein Data Bank. “Protein data bank”. In: *Nature New Biol* 233 (1971), p. 223.
- [3] Tristan Bepler and Bonnie Berger. “Learning protein sequence embeddings using information from structure”. In: (2019).
- [4] Tristan Bepler and Bonnie Berger. “Learning the protein language: Evolution, structure, and function”. In: *Cell systems* 12.6 (2021), pp. 654–669.
- [5] Maxwell L Bileschi et al. “Using deep learning to annotate the protein universe”. In: *Nature Biotechnology* (2022), pp. 1–6.
- [6] Surojit Biswas et al. “Low-N protein engineering with data-efficient deep learning”. In: *Nature methods* 18.4 (2021), pp. 389–396.
- [7] Anselm Blumer et al. “Occam’s razor”. In: *Information processing letters* 24.6 (1987), pp. 377–380.
- [8] Christian Dallago et al. “FLIP: Benchmark tasks in fitness landscape inference for proteins”. In: *Advances in Neural Information Processing Systems* (2021).
- [9] Sebastian Deorowicz, Agnieszka Debudaj-Grabysz, and Adam Gudyś. “FAMSA: Fast and accurate multiple sequence alignment of huge protein families”. In: *Scientific Reports* 6.1 (2016), p. 33964. ISSN: 2045-2322. DOI: 10.1038/srep33964. URL: <https://doi.org/10.1038/srep33964>.
- [10] Jacob Devlin et al. “Bert: Pre-training of deep bidirectional transformers for language understanding”. In: *arXiv preprint arXiv:1810.04805* (2018).
- [11] Ahmed Elnaggar et al. “ProtTrans: towards cracking the language of Life’s code through self-supervised deep learning and high performance computing”. In: *arXiv preprint arXiv:2007.06225* (2020).
- [12] Richard Evans et al. “Protein complex prediction with AlphaFold-Multimer”. In: *BioRxiv* (2021).
- [13] Naomi K. Fox, Steven E. Brenner, and John-Marc Chandonia. “SCOPE: Structural Classification of Proteins—extended, integrating SCOP and ASTRAL data and classification of new structures”. In: *Nucleic Acids Research* 42.D1 (Dec. 2013), pp. D304–D309. ISSN: 0305-1048. DOI: 10.1093/nar/gkt1240. eprint: <https://academic.oup.com/nar/article-pdf/42/D1/D304/3647135/gkt1240.pdf>.
- [14] Jonathan Frazer et al. “Disease variant prediction with deep generative models of evolutionary data”. In: *Nature* 599.7883 (2021), pp. 91–95.
- [15] Kaiming He et al. “Deep residual learning for image recognition”. In: *Proceedings of the IEEE conference on computer vision and pattern recognition*. 2016, pp. 770–778.
- [16] Brian Hie et al. “Learning the language of viral evolution and escape”. In: *Science* 371.6526 (2021), pp. 284–288.
- [17] Brian L. Hie, Kevin K. Yang, and Peter S. Kim. “Evolutionary velocity with protein language models predicts evolutionary dynamics of diverse proteins”. In: *Cell Systems* (Feb. 2022). ISSN: 24054712. DOI: 10.1016/j.cels.2022.01.003.
- [18] Jeff Johnson, Matthijs Douze, and Hervé Jégou. “Billion-scale similarity search with GPUs”. In: *IEEE Transactions on Big Data* 7.3 (2019), pp. 535–547.
- [19] L Steven Johnson, Sean R Eddy, and Elon Portugaly. “Hidden Markov model speed heuristic and iterative HMM search procedure”. In: *BMC bioinformatics* 11.1 (2010), pp. 1–8.
- [20] John Jumper et al. “Highly accurate protein structure prediction with AlphaFold”. In: *Nature* 596.7873 (2021), pp. 583–589.
- [21] Yogesh Kalakoti, Shashank Yadav, and Durai Sundar. “TransDTI: Transformer-Based Language Models for Estimating DTIs and Building a Drug Recommendation Workflow”. In: *ACS Omega* (2022).
- [22] Weizhong Li and Adam Godzik. “Cd-hit: a fast program for clustering and comparing large sets of protein or nucleotide sequences”. In: *Bioinformatics* 22.13 (2006), pp. 1658–1659.
- [23] Andrew G McArthur et al. “The comprehensive antibiotic resistance database”. In: *Antimicrobial agents and chemotherapy* 57.7 (2013), pp. 3348–3357.

- [24] Joshua Meier et al. “Language models enable zero-shot prediction of the effects of mutations on protein function”. In: *Advances in Neural Information Processing Systems* 34 (2021).
- [25] Roshan Rao et al. “Evaluating protein transfer learning with TAPE”. In: *Advances in neural information processing systems* 32 (2019).
- [26] Roshan Rao et al. “Transformer protein language models are unsupervised structure learners”. In: *International Conference on Learning Representations*. 2020.
- [27] Roshan M Rao et al. “MSA transformer”. In: *International Conference on Machine Learning*. PMLR. 2021, pp. 8844–8856.
- [28] Nils Reimers and Iryna Gurevych. “Sentence-bert: Sentence embeddings using siamese bert-networks”. In: *arXiv preprint arXiv:1908.10084* (2019).
- [29] Michael Remmert et al. “HHblits: lightning-fast iterative protein sequence searching by HMM-HMM alignment”. In: *Nature Methods* 9.2 (2012), pp. 173–175. ISSN: 1548-7105. DOI: 10.1038/nmeth.1818.
- [30] Michael Remmert et al. “HHblits: lightning-fast iterative protein sequence searching by HMM-HMM alignment”. In: *Nature methods* 9.2 (2012), pp. 173–175.
- [31] Adam J Riesselman, John B Ingraham, and Debora S Marks. “Deep generative models of genetic variation capture the effects of mutations”. In: *Nature Methods* 15.10 (2018), pp. 816–822.
- [32] Alexander Rives et al. “Biological structure and function emerge from scaling unsupervised learning to 250 million protein sequences”. In: *Proceedings of the National Academy of Sciences* 118.15 (2021).
- [33] Gabriel J Rocklin et al. “Global analysis of protein folding using massively parallel design, synthesis, and testing”. In: *Science* 357.6347 (2017), pp. 168–175.
- [34] Karen S Sarkisyan et al. “Local fitness landscape of the green fluorescent protein”. In: *Nature* 533.7603 (2016), pp. 397–401.
- [35] Søren Kaae Sønderby and Ole Winther. “Protein secondary structure prediction with long short term memory networks”. In: *arXiv preprint arXiv:1412.7828* (2014).
- [36] Joel L Sussman et al. “Protein Data Bank (PDB): database of three-dimensional structural information of biological macromolecules”. In: *Acta Crystallographica Section D: Biological Crystallography* 54.6 (1998), pp. 1078–1084.
- [37] Felix Teufel et al. “SignalP 6.0 achieves signal peptide prediction across all types using protein language models”. In: *bioRxiv* (2021).
- [38] Vineet Thumaluri et al. “DeepLoc 2.0: multi-label subcellular localization prediction using protein language models”. In: *Nucleic Acids Research* (2022).
- [39] Consortium UniProt. “The universal protein resource (UniProt)”. In: *Nucleic acids research* 36.Database issue (2008), pp. D190–D195. ISSN: 1362-4962 0305-1048.
- [40] Ashish Vaswani et al. “Attention is all you need”. In: *Advances in neural information processing systems* 30 (2017).
- [41] Jesse Vig et al. “Bertology meets biology: Interpreting attention in protein language models”. In: *arXiv preprint arXiv:2006.15222* (2020).
- [42] Sheng Wang et al. “Accurate de novo prediction of protein contact map by ultra-deep learning model”. In: *PLoS computational biology* 13.1 (2017), e1005324.
- [43] Fajie Yuan et al. “Lambdafm: learning optimal ranking with factorization machines using lambda surrogates”. In: *Proceedings of the 25th ACM international on conference on information and knowledge management*. 2016, pp. 227–236.
- [44] He Zhang et al. “Co-evolution Transformer for Protein Contact Prediction”. In: *Advances in Neural Information Processing Systems* 34 (2021).
- [45] Naihui Zhou et al. “The CAFA challenge reports improved protein function prediction and new functional annotations for hundreds of genes through experimental screens”. In: *Genome biology* 20.1 (2019), pp. 1–23.

A Appendix

A.1 Methodology Details.

For protein-level prediction tasks, we extract representation features from the [CLS] token of the last layer of ESM-1b and MSA-Transformer and add a new linear layer on top of it. Since there is no [CLS] token appended in AlphaFold, we average all residue embeddings from the last layer and add the same linear layer on top. For residue-level supervised prediction task (i.e. SS prediction), we add a linear layer on top of each residue embedding the last layer in all three PLMs. We train these models for each non-zero-shot task by fine-tuning all parameters, including both the new linear layer and the backbone representation model.

For contact prediction, we perform experiments differently for the three models given that the pairwise distance matrix of Evoformer can be directly extracted. For MSA-Transformer and ESM-1b, we follow the [25], extracting and normalizing the attention map from all hidden layers and then training a linear layer on these 2D maps and performing the regression task.

For zero-shot fitness prediction, MSAs are searched in the BFD dataset [20] using Jackhmmer [19] with the default parameters. For annotation prediction tasks, we search MSAs from Uniref90 [39] database with Jackhmmer. For SS and contact prediction, we use the MSAs provided by [32]. MSAs are not used in the two supervised fitness prediction tasks because all sequences are highly similar with only a few positions different. We report all results of Evoformer without template to avoid information leaking for the structure tasks.

A.2 ESM-MSA details

A.2.1 Training set construction

ESM-MSA is essentially a two-tower-based network following sentence-BERT [28] where each tower is represented by the ESM-1b encoder. Unlike sentence-BERT, we have developed an effective negative sampling method to choose more informative negative protein sequences rather than perform random sampling. The schematic of ESM-MSA is shown in Figure 6 and more details are given below:

We first collect high-quality homologous sequence datasets. We use the public trRosetta training set[‡] as the ground truth data in this work. Define $H = \{h_1, h_2, \dots, h_n\}$ as the entire protein sequence data set, where h_i represents the aligned homologous sequences for protein i , usually called an MSA. Define $h_i = \{q_1, q_2, \dots, q_n\}$, where q_i is an individual sequence in a same homologous family. Then define $D_{neg} = \{d_1, d_2, \dots, d_n\}$ as the data for negative sampling, where d_i also denotes an individual protein sequence. We use Uniclust30[§] for sampling non-homologous sequences, which include 200 million individual protein sequences. We then construct a training set including homologous sequence pairs and non-homologous sequence pairs to train the model. Specifically, for a protein sequence q_i belonging to set h_i , we randomly sample its homologous sequence $q_{pos} \in h_i$ from the same set

[‡]<https://github.com/gjoni/trRosetta>

[§]<https://uniclust.mmseqs.com/>

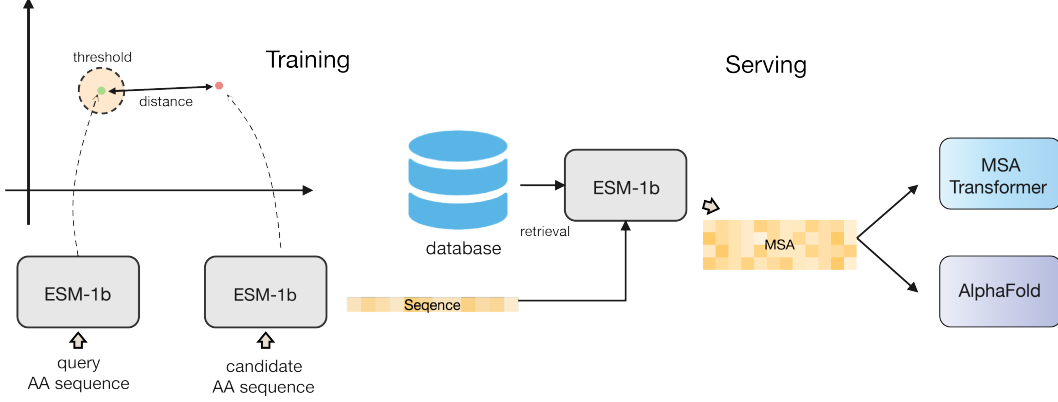


Figure 6: Training and serving schematic of ESM-MSA.

and calculate the biological identity $s \in [0, 1]$ between the two sequences. Finally, we construct a positive sample pair in the training set p^{pos} . Similarly, for the original sequence $q_i \in h_i$, we sample a sequence $q_{neg} \in D$ from the Uniclust30 database as a negative sample (non-homologous sequence), thus constructing a negative sample pair P^{neg} . We finally obtain the set of positive pairs $S_{pos} = \{p_1^{pos}, p_2^{pos}, \dots, p_n^{pos}\}$, and the set of negative pairs $S_{neg} = \{p_1^{neg}, p_2^{neg}, \dots, p_m^{neg}\}$, and then obtain the complete training set $S = S_{pos} \cup S_{neg}$.

A.2.2 Dynamic negative sampling

In this paper, we use dynamic negative sampling at the training stage, a.k.a. hard negative sampling [43]. That is, instead of randomly sampling sequences, we continuously select samples that are more difficult for the model to distinguish. By this way, the model convergence speed is greatly accelerated and the performance of the model is largely improved. Specifically, for the newly initialized model, we randomly select a batch of samples from the database as negative samples for training. After that, in every new round, for each sequence q_i , we randomly sample n sequences from the database and calculate the Euclidean distance between the original sequence and sampled sequences by the model. We select the sampled sequence with the closest Euclidean distance to the original sequence representation as the negative sample. Since the closest Euclidean distance means that the model is not able to distinguish it as negative. To reduce the computational cost, we use a sequence pooling approach, i.e., we first randomly sample N sequences ($N \gg n$) from the database as a sub-database, and then perform subsequent sampling operations on such sub-database after the corresponding scores are computed by the model.

A.2.3 Objective Function

For the positive sample pair, the loss function is defined as follows:

$$Loss(p, q)_{pos} = (dist(p, q) - (1 - s))^2$$

where p is the original sequence, q is the homologous sequence of p , and s is the biological identity of the two sequences. The definition is based on the hypothesis that the greater the biological sequence identity of the homologous sequences, the closer the Euclidean distance between the two should be through the representations given by the model. This means that between homologous sequences, the Euclidean distance also varies according to the biological sequence identity, and thus the model can obtain better generalization performance. Therefore, we used the mean square error loss function. Because $s \in [0, 1]$, setting the distance threshold to 1 not only conforms to Occam's razor principle [7], but also fits well with the loss function.

For the negative sample pair, the loss function is defined as follows:

$$Loss(p, q)_{neg} = -\log z(p, q)$$

where $z(p, q) = \frac{e^{dist(p, 1)}}{e^{dist(p, q)} + e^t}$, t is distance threshold. Actually, this is Cross Entropy function. For non-homologous sequences, we want the model to keep increasing the Euclidean distance between p and q , so it is reasonable to use the distance threshold t as a reference for the Cross Entropy, so that the Euclidean distance of the representations keeps moving away from the distance threshold.

A.2.4 MSA Retrieval and Alignment

First, we use the embedded vector of 'CLS' in ESM-1b (trained by the above approach) as the protein representation. We calculate all protein sequences in the database. Then we use Faiss [18], the library for quick embedding searching, to retrieve homologous sequences. Specifically, we calculate the Euclidean distance between sequence embeddings and keep those under the threshold as homologous to the query protein. Once we obtain a set of homologous sequences, we use Famsa[9] to efficiently align them and output an a3m format file.

A.3 HHblits setting

A.3.1 Search the BFD database HHblits setting

n_iter: int = 3, e_value: float = 0.001, maxseq: int = 1000000, realign_max: int = 100000, maxfilt: int = 100000, min_prefilter_hits: int = 1000, all_seqs: bool = False, p: 20, z: int = 500.

A.3.2 Compare with the running time of ESM-MSA vs HHblits

n_iter: int = 1, e_value: float = 0.0001, maxseq: int = 1000, realign_max: int = 100000, maxfilt: int = 100000, min_prefilter_hits: int = 1000, all_seqs: bool = False, p: 20, z: int = 500.

Table 9: HHblits speed compared with ESM-MSA (retrieval & alignment). The values means how many MSAs are searched in 12h with 12-core CPU.

Model	Number of MSAs
HHblits	1509
ESM-MSA	8800

A.4 Contact map dataset detail

7WLC: SARS-CoV-2 Omicron variant spike RBD in complex with Fab XGv282.
7WED: SARS-CoV-2 Omicron variant spike RBD in complex with Fab XGv347.
7X7D: SARS-CoV-2 Delta RBD and Nb22.

A.5 Antibiotic Resistance dataset detail

The Antibiotic Resistance dataset is derived from experimentally verified bacterial antibiotic resistance proteins from the Comprehensive Antibiotic Resistance Database (CARD), and redundant sequences with 100% identity are removed using the CD-HIT tool [22]. Finally, a total of 2602 protein sequences from 19 antibiotic classes are constructed for functional classification and analysis.

A.6 GPU cluster

All our experiments are performed on the NVIDIA A40 with 48G GPU memory.