Interactive Code Generation via Test-Driven User-Intent Formalization

Shuvendu K. Lahiri*¹, Aaditya Naik*^{†2}, Georgios Sakkas*^{†3}, Piali Choudhury¹, Curtis von Veh¹, Madanlal Musuvathi¹, Jeevana Priya Inala¹, Chenglong Wang¹, and Jianfeng Gao¹

¹Microsoft Research

{shuvendu, pialic, curtisvv, madanm, jinala, chenwang, jfgao}@microsoft.com

²University of Pennsylvania

asnaik@seas.upenn.edu

³University of California, San Diego

gsakkas@eng.ucsd.edu

August 12, 2022

ABSTRACT

Pre-trained large language models (LLMs) such as OpenAI Codex have shown immense potential in automating significant aspects of coding by producing natural code from informal natural language (NL) intent. However, the code produced does not have any correctness guarantees around satisfying users intent. In fact, it is hard to define a notion of correctness since natural language can be ambiguous and lacks a formal semantics.

In this paper, we take a first step towards addressing the problem above by proposing the workflow of *test-driven user-intent formalization* (TDUIF), which leverages lightweight user feedback to jointly (a) formalize the user intent as tests (a partial specification), and (b) generates code that meets the formal user intent. To perform a scalable and large-scale automated evaluation of the algorithms without requiring a user in the loop, we describe how to *simulate user interaction* with high-fidelity using a reference solution. We also describe and implement alternate implementations of several algorithmic components (including mutating and ranking a set of tests) that can be composed for efficient solutions to the TDUIF problem.

We have developed a system TiCoder that implements several solutions to TDUIF, and compare their relative effectiveness on the MBPP academic code generation benchmark. Our results are promising with using the OpenAI Codex LLM on MBPP: our best algorithm improves the pass@1 code generation accuracy metric from 48.39% to 70.49% with a single user query, and up to 85.48% with up to 5 user queries. Second, we can generate a non-trivial functional unit test consistent with the user intent within an average of 1.69 user queries for 90.40% of the examples in this dataset.

^{*}Equal Contribution

[†]Work done while at Microsoft Research

1 Introduction

Pre-trained *Large Language Models* (LLMs) have shown tremendous potential in generating natural looking programs from informal intent expressed in natural language. There has been surge in research on training large language models over programming language artifacts in just the last year (Chen et al., 2021; Chowdhery et al., 2022; Nijkamp et al., 2022; Fried et al., 2022; Xu et al., 2022). Most of these LLMs are based on recent advances in Transformer neural network architectures (Vaswani et al., 2017) and the availability of large corpus of source code in open source (say, GitHub). Commercial offerings such as Copilot (GitHub, 2022) are now commercially available, and are already known to generate non-trivial fraction of code in real-world developer scenarios (Ziegler et al., 2022).

However, the rise of code completion and code synthesis has also given rise to several interesting challenges and opportunities for generating correct code. First, natural language is ambiguous, unlike formal specifications, to express the *user intent*. As a simple example, the Python doestring """Sort a list of integers""" does not specify if the user wishes to sort the list in the ascending or descending order of the values. The lack of a precise intent means that one cannot even articulate the correctness of the code generated by a LLM. Second, users struggle to understand code suggestions presented to them without the ability to run or debug the code (Vaithilingam et al., 2022). This causes users to accept buggy code that they don't trust, or reject correct code that are too difficult to understand and therefore trust. Finally, LLMs often present a large list of suggestions (beyond the most likely one) that is hard to navigate for a user other than linearly scanning each code suggestion and rejecting the incorrect ones.

In this paper, we advocate *leveraging lightweight user-feedback* to improve trust in LLM-generated code. Specifically, we advocate the problem of *test-driven user-intent formalization* (or perhaps *test-driven user-intent discovery*) to create an *interactive* framework to (a) refine and formalize the user intent through generated tests, and (b) generating code that is consistent with such tests.

Let us demonstrate a simple instantiation of the framework using the example of sorting a list of integers in Python programming language. Consider the scenario when a user Alice prompts a LLM to generate code that satisfies their query expressed in natural language with some Python syntax for the method signature:

```
1 def sort(1):
2    """Sort a list of integers""
```

Instead of displaying a list of suggestions (that usually assumes the user expects the list to be sorted in an ascending order), our framework TICODER would query the user with a question:

```
Did you mean sort([3, 2, 4]) == [2, 3, 4]?
```

Let us assume that the user answers 'no'. The workflow would likely query the user again with the following question:

```
Did you mean sort([3, 2, 4]) == [4, 3, 2]?
```

If the user says 'yes', then the system would output the list of approved tests, as well as code suggestions that are consistent with the tests.

```
def sort(1):
    """Sort a list of integers"""
    sorted(1, reverse=True)

def test_sort():
    assert sort([3, 2, 4] == [4, 3, 2]

test_sort()
```

The simple interactive framework demonstrates several aspects to leverage LLMs to build more trusted and correct software (beyond code completion).

- 1. First, it can leverage user feedback from a test to prune a large fraction of likely suggestions that do not satisfy user intent, including suggestions that contain syntax or semantic errors. In its current form, a user has to linearly scan through the list of code suggestions and reject each one of them.
- 2. Second, the framework automatically generates tests (whenever possible) that help refine the user intent and make it precise (albeit partial). These (unit) tests are also useful for debugging individual functions early and detect errors (if the user manually changes the suggestions as they often do Ziegler et al. (2022)) faster.
- 3. Finally, the overhead of the interaction (compared to uni-directional use of LLMs) is offset whenever a test is generated that saves the effort of writing tests by a user. Although the tests for the above examples are simple, real-world unit tests often comprise of carefully selecting a sequence of statements to drive the system to an interesting state and writing a test-oracle to check the intended behavior at such a state Dinella et al. (2022).

While the framework appears an intuitive extension of current usage of LLMs, the utility of the interactive framework is contingent upon the cost-benefit trade-off of the overhead of user interaction versus the improvement in the quality of the generated code (and tests). In this paper, we contribute by studying the problem of *test-driven user-intent formalization* through the following steps:

- 1. First, we define the problem of *test-driven user-intent formalization* as the problem of generating code and tests satisfying the natural language intent with a user in the loop.
- 2. We describe a way to *simulate user response* with high-fidelity and establish a set of *offline metrics* that can enable us to automatically evaluate different solutions on a given benchmark without requiring a user in the loop.
- We describe an abstract workflow TestDrivenIntentDiscoveryWorkflow parameterized by various well-specified components that can be instantiated to cover a large spectrum of solutions.
- 4. We provide a programming language-agnostic approach by leveraging off-the-shelf LLMs for generating code and test from NL, and provide (rule-based) implementation of the several algorithmic components of the workflow, including alternate implementations.
- We evaluate the various algorithms across various metrics on an academic benchmark of simple Python programming benchmark MBPP, and demonstrate the effectiveness of some of the heuristics.

The preliminary results from our experiments are encouraging. Our results are promising with using the OpenAI Codex LLM on MBPP: our best algorithm improves the pass@1 code generation accuracy metric from 48.39% to 70.49% with a *single* user query, and up to 85.48% with up to 5 user queries. Second, we can generate a functional unit test¹ consistent with the user intent within an average of 1.69 user queries for 90.40% of the examples in this dataset.

Additionally, we establish that there is significant room to improve current algorithms given the best performance an ideal algorithm can have. We also establish that the baseline for a purely neural approach to test generation (Codex), and illustrate significant improvements using new execution-based test mutation and test and code ranking. We believe that the problem of TDUIF offers a rich area of research to not only leverage existing models and user interaction to generate correct code (i.e., code with some guarantees albeit weak), but also develop new neural models for correct code generation.

2 WORKFLOW AND PROBLEM FORMULATION

In this section, we outline the workflow for leveraging test generation and user feedback to formalize and refine user intent. Next we define metrics to evaluate different approaches that implement the workflow. Finally, we then discuss how to simulate the user feedback with high-fidelity to perform automated and scalable evaluation of approaches without a user in the loop.

¹We define a functional unit test as a test of the form f(i) == o, to distinguish from a unit test that only checks a weak assertion on the output state for a given input.

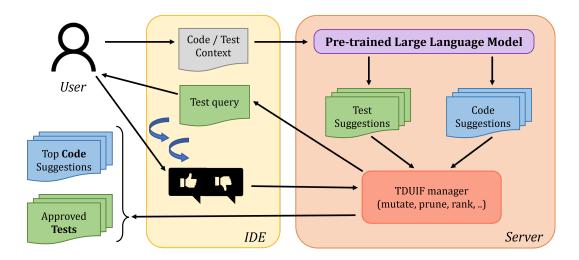


Figure 1: Workflow for test-driven user-intent formalization (TDUIF).

Metric	Meaning
pass@k@m	Syntactic sugar for (possibly ranked) pass@k metric after m
	user queries
pass@k@*	Syntactic sugar for (possibly ranked) pass@k metric after
	the first test has been accepted
NumQueriesToAccept	Number of queries for user to get the first accepted test

Table 1: Code and test generation metrics to evaluate the quality of a TDUIF solution.

2.1 HIGH-LEVEL WORKFLOW AND METRICS

Figure 1 describes the high-level workflow of *Test-Driven User-Intent Formalization* (TDUIF).

- 1. The human user prompts the agent for completing a function body given the prefix in a file, a natural language description and the function header/signature containing method name, parameters and returns.
- 2. The agent repeatedly queries the user (until a stopping criterion is reached) asking if a set of behaviors (or a test) is consistent with the user intent.
- 3. The user responds either YES, No, or DONTKNOW to each of the queries from the agent.
- 4. Once the interaction terminates, the agent outputs (a) a set of tests that the user has approved, and (b) a ranked list of code suggestions that are consistent with the user responses.

We allow a 3-valued user response that includes DONTKNOW since there are cases when the user may not be able to determine the evaluation of a test case. For example, if the test has parse error (e.g., assert (foo(), the question of the test being consistent with the user intent is not well defined. Similarly, a *flaky test* that depends on non-determinism within a function may not have a unique answer (e.g., assert (CurrentDayOfWeek() == Sunday)) Luo et al. (2014).

Table 1 describes various metrics to evaluate the quality of an agent over a benchmark set.

• For evaluating the *quality of the generated code suggestions*, one can use the $hidden^2$ unit tests to determine the correctness of the code suggestions, and appeal to the popular metric pass@k (Chen et al., 2021). A code suggestion is correct if it passes all the hidden tests for the function, and pass@k determines the fraction of cases where at least one code suggestion is correct given k tries. We define the syntactic sugar pass@k@m to denote the pass@k for the code suggestions in G after m user queries. For m=0, pass@k@0 coincides with pass@k.

²We say hidden to mean that the code or test generation algorithms do not have access to them.

- Alternately, one can also use a stopping criterion where the user is queried until she accepts a test suggestion. We define the metric pass@k@* to denote pass@k value using this stopping criterion.
- Finally, we also define a secondary metric for evaluating the *efficacy of test generation* using NumQueriesToAccept. This metric measures the number of user queries (or proposed tests) needed for the user to accept a single test; this is identical to the number of queries needed for the second stopping criterion.

Observe that the pass@k@m metric also indirectly serves to measure the quality of generated tests, by favoring tests that better distinguish correct code suggestions from incorrect ones. The test generation metric NumQueriesToAccept metric is not strong enough in isolation; a test generator that outputs trivial tests such as assert True can obtain optimal values.

2.2 ALGORITHM

We make the workflow more precise next in the setting of a class of simple programs containing a single function with a hidden reference implementation and hidden unit tests.

Definition 2.1. A program p is a tuple $\langle prfx_p, s_p, h_p, b_p, T_p \rangle$, where $prfx_p$ is a prefix that may contain definitions of other global variables and imports, s_p is a natural language string description, h_p is the function header or signature, b_p is the body of the function and T_p is a set of unit tests.

```
\begin{array}{lll} \text{import } * & \text{Prefix } prfx_p \\ \\ \text{def subject\_marks(subjectmarks):} & \text{Header } h_p \\ \\ \text{"""Sort a list of tuples using the 2nd value of each tuple"""} & \text{Description } s_p \\ \\ \text{subjectmarks.sort(key = lambda x: x[1])} & \text{Body } b_p \\ \\ \text{return subjectmarks} \end{array}
```

Figure 2: A simple Python program sample p and the provided test set T_p .

Figure 2 gives an example of a program p, where $prfx_p$, s_p , h_p , b_p , T_p are presented for a simple problem where the programmer has to "Sort a list of tuples using the 2nd value of each tuple".

We further simplify the notion of a test $t \in T$ to be an *input-output* pair (i, o). A function f satisfies a test (i, o) if and only if the result of executing f on i terminates with a value o, i.e., f(i) = o.

Definition 2.2. An implementation f' of a function f_p is correct with respect to the program p (or simply correct, when p is clear from the context) if it satisfies all the tests for p, i.e., for each test $(i, o) \in T_p$, f'(i) = o.

Algorithm 1 describes the workflow sketched previously in Figure 1. It takes as inputs the prefix prfx in a file containing imports and other global variables, the natural language description of intent s, the signature/header of a function h including the function name and parameters. The algorithm also takes as input a stopping criteria predicate StoppingCriteria to terminate the interaction with the user. Once terminated, the algorithm returns a set of tests approved by the user T^+ as well as a ranked list G of candidate implementations of f that satisfies all the tests in T^+ . There are different

stopping criteria including (a) terminating after a constant number of $MAX_{-}U$ queries to the user, or (b) terminating only after a test has been accepted by the user.

The algorithm is parameterized by a number of components that are underlined. The algorithm starts off by generating sets of code and test suggestions in to the variables G and U respectively. The quality of these sets will depend on the choice of the large language model \mathcal{M} as well as the code and test prompts constructed from the problem description³. We allow the test generation prompt to take the set of generated codes in G, to possibly improve the prompt. The algorithm maintains the invariant that the final set of code suggestions returned to the user is always a subset of the initial set of suggestions in G. On the other hand, we allow the set of tests in G to be modified or augmented through both syntactic and dynamic mutation techniques using SyntacticMutateTests and DynMutateTests components respectively. Notice the dynamic mutation technique DynMutateTests takes the set of code suggestions in G as an input (in addition to G) as G.

Finally, it iterates in a loop (spanning lines 6 to 18) until the stopping critera is satisfied and U is non-empty, ranking the tests in U using the method RankTests and presents the user with the top-ranked test. If the user accepts the test, the set T^+ is updated, and any code suggestion in G that disagrees with the test is pruned away. Conversely, if the user rejects the test, then any code suggestion in G that agrees with the test is pruned away. No action is taken if the user responds with DontKnow. Finally, the code suggestions in G are re-ranked with the remaining test suggestions in G after the pruning.

```
Algorithm 1 TestDrivenIntentDiscoveryWorkflow
```

```
Input: Prefix prfx, description s, header h of a function f
Input: A predicate for stopping criteria for the interaction StoppingCriteria
Output: A ranked list of candidate implementations for f G,
Output: A set of user-approved tests T^+
Output: f'(i) == o for each f' \in G and (i, o) in T^+
 1: G \leftarrow QueryLLM(\mathcal{M}, CodeGenPrompt(prfx, s, h))
                                                                                 2: U \leftarrow QueryLLM(\mathcal{M}, \overline{TestGenPrompt}(prfx, s, h, G))
                                                                                  Description > Query LLM for tests
 3: U \leftarrow SyntacticMutateTests(U)
                                                                                 ▶ Mutate tests statically
 4: U \leftarrow DynMutateTests(U, G)
                                                                ▶ Mutate tests using dynamic execution
 5: T^+, k \leftarrow \{\}, 0
 6: while \neg StoppingCriteria(k, T^+) and |U| > 0 do
        U \leftarrow RankTests(U, G)
                                                                             ▶ Rank the test suggestions
 8:
        (i, o) \leftarrow U.pop()

    Remove the top ranked test

 9:
        k \leftarrow k + 1
                                                                               Number of user queries
10:
        r \leftarrow SatisfiesUserIntent((i, o), f)
                                                                                  if r == YES then
11:
            T^+ \leftarrow T^+ \cup \{(i,o)\}
12:
            G \leftarrow G \setminus \{c \mid c(i) \neq o\}
13:
                                                                ▶ Prune codes that fail the accepted test
        else if r == No then
14:
15:
            G \leftarrow G \setminus \{c \mid c(i) == o\}
                                                                ▶ Prune codes that pass the rejected test
16:
        end if
        G \leftarrow RankCodes(G, U)
                                                                            ▶ Rank the code suggestions
17:
18: end while
19: return G, T^+
```

2.3 SIMULATING THE USER RESPONSE

The above formulation has one issue that makes it hard to study this problem with benchmark datasets — namely that it requires a user to determine if a test is consistent with their intent in the method SatisfiesUserIntent (in Algorithm 1). This creates a challenge for an automatic evaluation of different algorithms on large benchmarks without involving users. In this section, we provide

³Although there exists automated test generation tools such as Randoop Pacheco et al. (2007), our algorithm uses large language models to generate the initial seed tests as (a) we do not have the body of the method under test, and (b) these techniques are language-specific.

a problem formulation that allows high-fidelity simulation of the action of any user. Our key insight is to leverage the reference implementation (that contains b_p as the body) to be a proxy for a user and determine the user response by evaluating a test on the reference solution.

Definition 2.3. For a function f in a program p with a reference implementation f_p (comprising of h_p as header and h_p as body) of f, and a test (i, o),

- Satisfies UserIntent((i, o), f) returns YES if $f_p(i) == o$.
- SatisfiesUserIntent((i, o), f) returns No if $f_p(i)$ terminates successfully (without throwing any exceptions) with a value $o' \neq o$.
- Finally SatisfiesUserIntent((i, o), f) returns DONTKNOW if outcome of $f_p(i)$ is undefined either due to syntax errors or runtime exceptions.

In general case, a test itself can have syntax errors. Even for our restricted case of tests being inputoutput pairs, one can have syntax errors where the input (or output) are ill-formed (such as a string literal without a closing quote '"'). As discussed earlier, a user would answer DONTKNOW to such queries.

We leverage the above insight to design a problem that exploits the reference implementation and unit tests to simulate the user in the interaction.

Definition 2.4. The problem of *test-driven user-intent formalization* for a given program $p \doteq \langle prfx_p, s_p, h_p, b_p, T_p \rangle$ is to design an algorithm $A(prfx_p, s_p, h_p)$ that takes as input the prefix, header and natural language description of a function and co-generates (a) a set of tests U that are consistent with the hidden reference implementation (h_p, b_p) , and (b) a set of candidates for the function body that satisfy all the hidden unit tests in T_p .

2.4 THREATS TO VALIDITY TO SIMULATING USERS

Although the problem formulation above allows us to evaluate the quality of the solutions in a completely automated manner, it is a proxy for using a real user study.

First, we inherit the well known *false positive* issue in program synthesis related to the incompleteness of test suites as the correctness specification for code. It admits degenerate solutions f' that only satisfy the exact input output pairs in the unit tests in T_p , but do not generalize to satisfy the intent of the user for most other inputs.

Second, the use of non-exhaustive set of hidden tests also leads to unexpected situations where pruning incorrect code using user feedback can reduce the pass@1. Consider the case where the user wants to generate code satisfying the natural language description

```
1 def double(x):
2    """double an integer"""
```

Let us also assume that the reference implementation consists of

```
1 def double(x):
2    """double an integer"""
3    return x + x
```

The unit test suite T_p consists of a single test (2,4).

Let us assume that a model generates a code suggestion:

```
1 def double(x):
2    """double an integer"""
3    return 4
```

The pass@1 metric for this set of suggestions (without any interaction) is 1, since the code suggestion satisfies the hidden tests. Consider the case when the user is presented with a generated test (1,2). Since this test is consistent with user intent (and satisfied by the reference solution), a user

would respond 'yes'. This results in pruning the solution returning 4, resulting in pass@1@1 to be 0, lower than pass@1.

Finally, the idea of using the reference solution to determine user response may be either *optimistic* or be too *conservative*.

- Consider the case when a test t satisfies the reference solution f_p , and we simulate the user response as YES. However, consider the case when the test presents a query that is difficult for the user to determine say, asking the result of the 335th Fibonacci number, if the test asks Fib(335) == 1000043! A user may say DONTKNOW for such a query.
- Second, consider the case when asked about the Fibonacci on a negative number (e.g., Fib(-3) == 2). Again, a user may want to respond DONTKNOW as the test violates an implicit precondition. However, it may be that evaluating this test case on the reference solution does not throw a precondition violation exception, but simply fails the assertion resulting is us reporting a No for the user response.

Finally, real-world tests are often more than an input-output pair, and consists of a sequence of statements terminating in an assertion. In rare cases, the overhead of inspecting multiple such tests (although they seldom consists of conditional branches and loops) may outweigh the benefit of scanning through code suggestions directly when the code is relatively simple.

Although never a substitute for user-study, we still believe that in most cases where the unit tests are fairly complete and the code suggestions are relatively complex, using the test suite and the reference solution can serve as a good proxy for automatic and scalable evaluation of different solutions to the interactive workflow.

3 TICODER COMPONENTS

In this section, we describe a tool TICODER that implements the various components that are underlined in Algorithm 1. For each component (such as *CodeGenPrompt*, *RankTests*), we provide several possible alternate implementations to define the space of solutions.

3.1 Code and Test Generation Prompts

It is well-known that the choice of prompts that determine the actual string that is fed to a large language model has a substantial impact on the quality of output (Reynolds & McDonell, 2021). In this section, we outline several choices for implementing the prompt generation routines $\underline{CodeGenPrompt}$ and $\underline{TestGenPrompt}$ for generating code and test suggestions from the problem description consisting $\underline{of}(prfx_p, s_p, h_p)$.

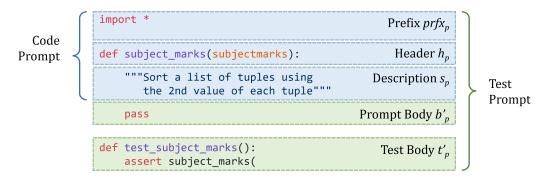


Figure 3: Example *code* and *test prompts* for the running example in Figure 2 that instantiate the algorithm $A(prfx_p, s_p, h_p)$ for the *test-driven user-intent formalization* problem.

Figure 3 presents a possible *code prompt* (in the blue boxes) that is generated by $A(prfx_p, s_p, h_p)$ and can be passed to a LLM to produce *code suggestions* for the given problem in Figure 2. Querying a LLM (say Codex) with the code generation prompt in Figure 3 will result in a set of *code*

suggestions as shown in Figure 4. Code suggestion c_2 is a valid solution to the problem, while c_1 is an incorrect code suggestion (since no output is returned by the function) and c_3 is also incorrect (since it returns only the second value of the tuples). Given the simple nature of our benchmarks (say, MBPP) and the relatively small size of the prompt, we do not expect much innovation in code generation prompts and therefore fix this prompt for all our experiments.

On the other hand, there are interesting choices for the test generation prompts for TestGenPrompt even for the simple setup. Given that we wish to generate a test for a function without an implementation, the problem of TestGenPrompt really boils down to completing the method body of f. The green boxes in Figure 3 show the "Prompt Body" and the subsequent "Test Body" that together constitute the test prompt. As an example completion of the method body, we use the statement pass that corresponds to a placeholder implementation in Python. The generated test suggestions (Figure 4) present the user with a set of tests. Some of these are consistent with the user intent (t_3) ; while others are either inconsistent with the user intent (t_2) , or contain syntax errors (t_1) .

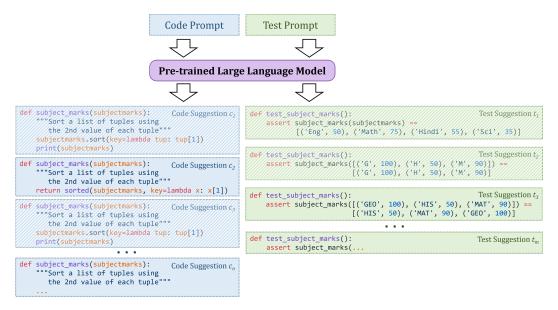


Figure 4: Code and test suggestions for the running example in Figure 2 generated from a LLM. Code suggestion c_2 and test suggestion t_3 are both correct, while code suggestions c_1 , c_3 and test suggestions t_1 , t_2 are incorrect (appear shaded), i.e. they don't satisfy the problem prompts in Figure 3.

There are several other interesting possibilities for designing *TestGenPrompt*. For instance, we can sample a code completion b'_p from the set of generated code suggestions G and use it as definition of f. We therefore explore two options for b_p in this work:

- pass: We can instantiate b_p to simply be pass to keep the prompt for the test generation syntactically correct, as illustrated in Figure 3.
- choose(G): Alternatively, we can sample a definition from the code suggestions and use it to instantiate the body of f. The choice of the code suggestion may impact the quality of the generated tests, and therefore can benefit from good heuristics. In our experiment, we choose the code suggestion that appears first in the (unordered) set of code suggestions in G.

3.2 STATIC MUTATION OF TESTS WITH Syntactic Mutate Tests

Given an initial set of candidate tests in U, one can perform various static mutations of a given test t to yield new test cases and prune away unnecessary test cases. For each test $t \in U$, we consider two options for statically mutating it:

• In case a test has a parsing error, we consider the longest prefix of t that parses.

• We consider the prefix of t up to the first assertion; since each assertion is a point of failure, considering only one assertion maximizes the chance of a test passing. We refer to this technique as single-assert.

Finally, we can safely prune a test t if (a) t has a syntax error, or (b) if t does not contain any assertions, in which case it will not help formalize the intent.

However, note that some of these decisions (such as single-assert) may also adversely impact the performance as it weakens the tests.

3.3 DYNAMIC MUTATION OF TESTS WITH DynMutateTests

In addition to statically mutating tests, one can also exploit the ability to execute the tests to obtain new tests.

Given a test (i,o) and a candidate implementation f', we can generate an alternate test (i,f'(i)) by modifying the output value observed by executing f' (if any). The intuition behind this is that if f' happens to be a correct solution, then we generate at least one test that is consistent with f'. On the other hand, this has the potential to create an explosion of tests; one can further devise heuristics to pick a subset of tests, or prune the original tests generated by LLMs. We have implemented assert-rewrite-all, where we augment U with all the tests obtained by rewriting each $(i,o) \in U$ with (i,f(i)) for each $f \in G$.

3.4 RANKING TEST SUGGESTIONS USING RankTests

Finally, we need a way to rank the set of tests in U to choose the order in which to present them to the user. We can choose from several options to implement <u>RankTests</u>, including:

- *Random* (random): We randomly choose a test from U.
- Discrimination-based (entropy): We can sort the tests in U by how well they discriminate the set of code suggestions in G. For a test t, we define sets G_t^+ and G_t^- that pass and fail an assertion, respectively, for the test t. Let min and max denote the minimum and maximum, respectively, of the pair (G_t^+, G_t^-) . We define the following metric:

$$score \doteq \left\{ \begin{array}{ll} 0 & \text{if } max \text{ is } 0 \\ min/max & \text{otherwise} \end{array} \right\}$$

and sort U in descending order of this score. The intuition is that the tests with higher score has a better chance of pruning a large number of suggestions in G, irrespective of the user response of YES or NO

There are several other variations of these heuristics that one can employ. For example, we do not account for the tests that throw an exception or syntax error as part of the equation above — our intuition is that the user would most likely respond with DONTKNOW. However, one alternative could be to consider any form of failure to define G_t^- .

3.5 RANKING CODE SUGGESTIONS USING RankCodes

Finally, our goal is to present the user with a ranked list of code suggestions in G. We currently define a single code ranking strategy (passing-tests) that uses the tests in U to determine an ordering on G as follows:

• Each generated code $c \in G$ is executed with every test $t \in U$ (after pruning and/or mutation) and gets assigned as a score the number of satisfied tests d_c . The codes are then ranked based on the decreasing order of d_c .

Other possible alternatives (not currently implemented in TICODER) include creating an equivalence class over the set of codes in G, where two suggestions c_1 and c_2 belong to the same class if they satisfy the same set of candidate tests in U, and then ordering the equivalence classes by the number of tests satisfied by codes in the class. Other variations of clustering and ranking code suggestions using tests have also been previously explored in recent works (Chen et al., 2022; Li et al., 2022).

4 EVALUATION

4.1 RESEARCH QUESTIONS

We pose the following research questions in order to evaluate different approaches and techniques for test-driven user-intent formalization problem:

- 1. RQ1: Does test-driven user-intent formalization workflow improve the accuracy of code suggestions?
- 2. RQ2: How does the quality of generated code and tests vary with the number of user-queries?
- 3. **RQ3**: How does each of the design decisions affect the metrics (ablation study)?

4.2 Dataset

We use the *sanitized* version of the *MBPP dataset* (Austin et al., 2021), an academic code generation dataset, to answer RQ1 through RQ3. This version consists of $427 \langle prfx_p, s_p, h_p, b_p, T_p \rangle$ tuples as per Definition 2.1 where b_p is the ground truth definition of the corresponding function. One example of such a tuple has been discussed in Figure 2.

4.3 EXPERIMENTAL SETUP AND TOOLS

For all experiments we use Codex's code-davinci-002 model for inference only. In each case, we query the Codex model for 100 code suggestions, with a temperature of 0.8 and a top p of 0.95. The maximum code generation length is 300 tokens. Additionally, we query the Codex model for 50 test suggestions using the same parameters as before. Results are reported using the pass@k@m metric described in subsection 2.1. Further, in order to account for the non-determinism of Codex, we only query Codex to generate the initial code and test suggestions into a cache of Codex responses and refer to the same cache for all experiments.

We have implemented our approach in TICODER (<u>Test-driven interactive Coder</u>) and we compare the performance of our approach with the Codex model for code generation that does not perform user interaction. We also consider a *Baseline* version of TICODER, where the tests to be presented to the user are generated by Codex with TestGenPrompt = pass with no further mutation, pruning or ranking while also disabling code ranking.

We also consider a few settings that help us establish an upper bound on the performance of any solution:

- 1. First, we define *IdealTests* where the tests presented to the user only consist of the hidden tests from T_p .
- 2. Second, we define *IdealRanking*, where the set of tests generated in *U* are ordered such that they result in the maximum number of incorrect code solutions to be pruned away. Since this knowledge requires knowing the (hidden) reference solution, it is not a realizable solution in practice. However, it helps determine the best ranking within a set of tests.

For the default TICODER, we set TestGenPrompt = pass, StaticMutateTests = single-assert, DynMutateTests = assert-rewrite-all, TestRanking = entropy, and CodeRanking = passing-tests. We chose this configuration as default empirically as it performs the best on the pass@1@1 metric on the MBPP dataset.

Finally, to ensure complete automation for our evaluation and avoid the need to inspect the impact of incompleteness of test suite T_p on pass@k@m, we ensure that the pass@k@m increases monotonically despite the incompleteness of test cases as outlined in Section 2.4. We enforce that a code suggestion is never removed from G if it satisfies all the hidden tests, even if it is non-equivalent to the reference solution.

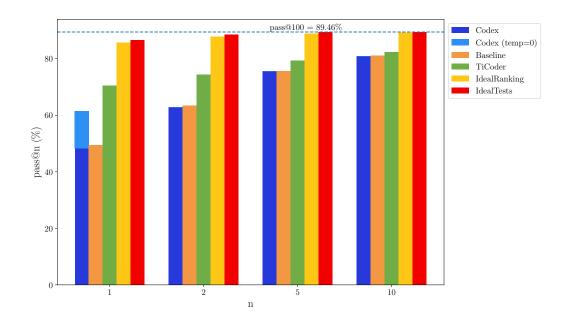


Figure 5: Results of the accuracy experiment

4.4 RQ1

To answer RQ1, we compare the accuracies of *Baseline, IdealTests*, *IdealRanking* and TICODER (default option) restricted to the case of a single user query. We use the pass@k@m metric, where $k \in \{1, 2, 5, 10\}$ and m = 1. We also compare the tools with Codex without any user interaction (m = 0). Additionally, to get the best possible result from Codex, we also show $\operatorname{Codex}_{t=0}$, where we query Codex for 1 suggestion with temperature 0. We do not show results for $\operatorname{Codex}_{t=0}$ for $k \geq 1$, since we query for only one suggestion.

From Figure 5, we observe that TICODER has a pass@1@1 of 70.49%, outperforming *Baseline* (48.61%), Codex (48.39%), and Codex $_{t=0}$ (61.36%). TICODER continues outperforming *Baseline* and Codex for the remaining values of k. However, it consistently falls short of *IdealTests*, trailing it by 11.52 percent points for pass@1@1 and 6.48 percent points for pass@10@1. This exhibits the potential improvement that can be made by further exploring various components of TICODER.

Note that the performance of *IdealTests* and *IdealRanking* are comparable, but *IdealRanking* is always slightly lower (as expected). This shows that our test generation strategies that include tests generated by Codex along with the static/dynamic mutations can for the most part generate tests that can capture user intent; coupled with an ideal ranking policy, the performance of TICODER can be close to optimal. However, such an ideal ranking policy is not realizable since it relies on the hidden reference implementation and tests.

4.5 RQ2

To answer RQ2, we evaluate the four configurations over both the stopping criteria: (1) by limiting the maximum number of user queries and (2) by stopping when the first test is accepted by the user. We show the results of stopping criteria (1) in Figure 6. In all cases, increasing the limit of the maximum number of queries increases the performance. However, this increase is very slight for the baseline, while it is substantial for TICODER and *IdealTests*. Note that *IdealTests* achieves the highest possible performance matching the pass@100 value (as expected), while *IdealRanking* closely follows it. This plot further reinforces the observations from RQ1; while TICODER achieves comparable performance with *IdealTests* and *IdealRanking* for pass@1@5, it is 15.16 percent points short of *IdealRanking* for pass@1@1, and *IdealRanking* with at most one user query does better than TICODER with at most five. Improvements to the ranking policy can result in substantial improvements in performance for TICODER and can require fewer user interactions.

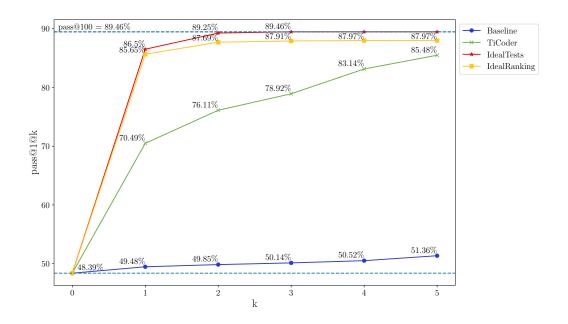


Figure 6: Results of user interaction experiments

Tool	pass@1@*	pass@2@*	pass@5@*
TICODER	75.87	79.85	83.37

Table 2: Results of the user interaction studies for stopping criteria (2). Here, the maximum possible number of user interactions is capped at 10.

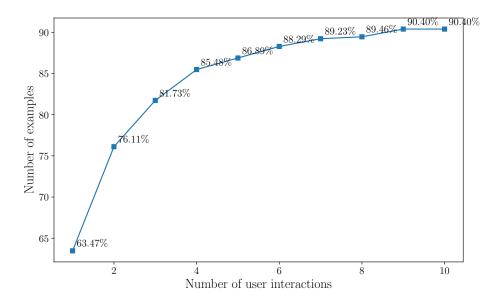


Figure 7: Plot showing fraction of examples (on y-axis) with NumQueriesToAccept $\leq m$ for different number of user queries m (on x-axis) for stopping criteria 2. The number of possible user queries was capped at 10.

Tool	pass@1@1	pass@2@1	pass@5@1	pass@1@2	pass@1@5
TiCoder	70.49	74.47	79.39	76.11	85.48
 code prompt 	69.09	75.17	80.09	77.28	83.61
 single assert 	70.27	75.33	79.39	76.01	80.85
- dyn. mutation	68.85	72.13	78.45	75.35	81.84
 test ranking 	62.06	65.10	72.36	64.87	71.89
- code ranking	67.52	75.00	81.39	74.44	82.88

Table 3: Results of the ablation studies

The results of stopping criteria (2) are shown in Table 2. For this stopping criteria, the pass@1@** value is 75.87%, more than pass@1@1 for stopping criteria 1, but less than pass@1@2. On average, the user performs an average of 1.69 interactions with TICODER, with 1 being the minimum, and 9 being the maximum number of interactions. While a larger threshold number of user interactions can result in better performance, it can also lead to overhead for a user.

Figure 7 shows the cumulative fraction of examples that produced an accepted test within m user queries, i.e. NumQueriesToAccept $\leq m$. We observe that TICODER is able to propose a test that is consistent with the user intent for 90.40% of examples within 10 queries, whereas the first query provides such a consistent test for 63.47% of examples. We notice that beyond 5 user interactions, the improvements to performance become marginal as compared to the improvements seen for less than 5 interactions. The results demonstrate significant room for improvement in test ranking strategies that will affect the overall performance of TICODER.

4.6 RQ3

In order to examine the effects of various TICODER components, we conduct ablation studies for each component individually. Specifically, we evaluate the performance of TICODER with pass@k@1 for $k \in \{1,2,5\}$, as well as pass@1@m for $m \in \{2,5\}$. We consider the following ablations:

- TICODER: This is the default configuration as described in subsection 4.3, chosen due to its performance on the pass@1@1 metric.
- Code Prompt: TestGenPrompt = choose(G).
- Single Assert: StaticMutateTests = none.
- Dynamic Mutation: DynMutateTests = none.
- Test Ranking: TestRanking = random.
- Code Ranking: CodeRanking = none.

For each metric, the cell corresponding to the highest performing configuration is marked in bold. Each configuration contributes differently to the evaluation, as we can see from the different metrics. The default configuration was chosen to be the configuration that performed best on the pass@1@1 metric. We prioritize the pass@1@1 metric since it is the most practical metric for code generation in an interactive setting, since it relies on at most one user interaction and produces only one code suggestion as the final output. Note that the default configuration also performs best on pass@1@5.

Some components that have a significant impact on the performance over all metrics include the test and code ranking components. Presenting the user with randomly picked tests from the set of test suggestions, rather than the top-ranked test, performs uniformly worse than the default configuration. This indicates the importance of the test-ranking policy as a component. Another component that is uniformly helpful for the default configuration is dynamic test mutation; removing it results in a dip in performance (e.g., 3.5% for pass@1@5), though it is a smaller dip than removing test ranking.

Code ranking is clearly useful in the default configuration for the pass@1@m metrics, but performs worse for the pass@k@1 metrics for $k \geq 2$. In other words, if we sample 1 suggestion from the code suggestions, it is beneficial to select the top-ranked code suggestion. However, if we sample more, ranking the code suggestions can decrease performance, since the ranking policy may result in cases where the correct suggestion is never sampled. We believe other heuristics for code ranking (described in Section 3.5) may help improve these numbers uniformly.

The ablations also demonstrate that other components have non-trivial effect on the evaluation metrics. For example, disabling the static test mutation heuristic improves pass@2@1, while using the code suggestions in the test generation prompt improves performance on pass@1@2. However, these configurations were not chosen to be the default since they all perform worse on the pass@1@1 metric.

5 RELATED WORK

Our work aims to improve the trust in code generated through large language models. Recent years have seen steady progress in the space of training larger and more powerful pre-trained language models for code generation, with sizes up to about 12 billion (Chen et al., 2021). These language models are variants of the decoder-only generational model such as GPT-3 (Brown et al., 2020). OpenAl's Codex (Chen et al., 2021) fine-tunes GPT-3 on source code from GitHub. Google's large language model (Austin et al., 2021) trains a model and introduced the crowdsourced MBPP benchmark for evaluation. Saleforce's CodeGen (Nijkamp et al., 2022) fine-tunes a transformer decoder model to optimize for scenarios where a user decomposes the larger coding task into smaller subtasks. Facebook's InCoder (Fried et al., 2022) can not only complete code, but also edit code. Although these language models achieve impressive accuracy on benchmarks such as MBPP and HumanEval, the generated code has no verifiable guarantees. TDUIF can augment any of these language models in an interactive setting to obtain tests that can serve as explanation of code generated as well as help formalize user intent, and also helps users to prune the space of incorrect suggestions.

Both AlphaCode (Li et al., 2022) and CodeT (Chen et al., 2022) exploit generated tests from models to improve the quality of code generation. Both these approaches generate tests using LLMs (Alpha-Code trains a new test-generation model) and then groups code suggestions by the set of tests they satisfy. When suggesting code suggestions, only a single suggestion from each group is reported. CodeT (Chen et al., 2022) refines the approach by scoring tests and code suggestions simultaneously by prioritizing tests that satisfy many code suggestions, and prioritizing codes that satisfy many tests. Unlike TDUIF, these approaches still target the same metric as any code generation models (namely, pass@k) and do not account for user interaction or provide any guarantees on suggested code. On the other hand, our test and code ranking components can benefit from the algorithms in CodeT — we leave it as future work.

Scalable test generation for software has a rich history, and a comprehensive coverage is outside the scope of this work. The dominating approaches for real-world code are based on variants of *feedback-driven random testing* (Pacheco et al., 2007) or on genetic programming (Fraser & Arcuri, 2011). These non-neural approaches presume the method under test is present and derive high-coverage tests by executing the method under test. These approaches are optimized for maximizing code coverage and finding runtime crashes. The non-neural approaches are not directly applicable in TDUIF scenario for two primary reasons (a) we do not start with an implementation of method under test but instead have a set of candidate implementations, and (b) it is critical to generate test oracles (or expected output) without access to the method definition. Neural approaches have shown promise recently in either addressing the test oracle (Tufano et al., 2022; Dinella et al., 2022) or generating an entire test (Tufano et al., 2020), Of these, TOGA (Dinella et al., 2022) attempts to generate the test oracle for a test prefix (or expected output for a given input) without relying on a method implementation. We expect to harness both these approaches to generate the *seed tests* that can be further mutated and ranked using suitable extensions to the algorithms presented in this work.

Finally, work on program synthesis (Gulwani et al., 2017; Solar-Lezama, 2009) generates code that satisfies a formal specification either expressed as a logical specification or input-output examples (Gulwani, 2011). Unlike program synthesis, LLM generates code from informal specifications (our setup) and evaluated through hidden tests or specifications. However, it would be interesting future work to leverage user-provided tests to improve the quality of code generation, as explored in recent works (Jain et al., 2022; Rahmani et al., 2021). Finally, the work on interactive program synthesis (Le et al., 2017; Ji et al., 2020) has similarity with our work in querying users about possible constraints on the code, in addition to initial specification. However, work in this space has been mostly been performed for restricted domains and does not directly apply to general code generation.

6 Conclusions

In this paper, we have articulated the problem of *test-driven user-intent formalization* (or test-driven user-intent discovery) to create an interactive framework to (a) refine and formalize the user intent through generated tests, and (b) generate code that is consistent with such tests. We proposed an interactive workflow to address this problem and formalized an algorithm with well-defined components that can be instantiated in various manners to solve the given problem. Finally, we presented our approach for tackling this problem, that we called TICODER. We performed a quantitative evaluation on TICODER and we showed that our best algorithm improves the pass@1 code generation accuracy metric from 48.39% to 70.49% with a *single* user feedback, and up to 85.48% with up to 5 user feedback. TICODER also generates a functional test consistent with the user intent within an average of 1.69 user queries for 90.40% of the examples in the sanitized *MBPP dataset*. Finally, we conducted an *ablation study* to highlight the importance of our algorithm's different components.

We leave a more thorough investigation of our approach on (a) the *HumanEval dataset* (Chen et al., 2021) and (b) real-world benchmarks possibly collected from open-source projects on GitHub. While Codex (Chen et al., 2021) has been shown to be one of the most effective LLM for code generation, we would like to leverage and possibly fine-tune neural models in the future for both code and test generation, including models such as INCODER (Fried et al., 2022), CODEGEN (Nijkamp et al., 2022), POLYCODER (Xu et al., 2022). We also leave as future work a *user study* of TICODER in place of the simulated quantitative evaluation to further explore the usefulness of our approach. Finally, we use tests as an instance of a partial specification of intent for a function; we believe one can easily extend the framework to richer forms of formal specifications (e.g., procedure summaries) provided we have a scalable generator and checker of likely specifications.

Acknowledgements. We are grateful to Todd Mytkowicz for initial discussions on the idea of simulating user response and initial implementation of the dynamic mutation algorithm, and Johannes Gehrke, Mark Encarnación, Andres Codas, Mei Yang and Rahee Ghosh Peshawaria for fruitful discussions and feedback on this work.

REFERENCES

Jacob Austin, Augustus Odena, Maxwell Nye, Maarten Bosma, Henryk Michalewski, David Dohan, Ellen Jiang, Carrie Cai, Michael Terry, Quoc Le, and Charles Sutton. Program synthesis with large language models, 2021. URL https://arxiv.org/abs/2108.07732.

Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners, 2020. URL https://arxiv.org/abs/2005.14165.

Bei Chen, Fengji Zhang, Anh Nguyen, Daoguang Zan, Zeqi Lin, Jian-Guang Lou, and Weizhu Chen. Codet: Code generation with generated tests, 2022. URL https://arxiv.org/abs/2207.10397.

Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, Alex Ray, Raul Puri, Gretchen Krueger, Michael Petrov, Heidy Khlaaf, Girish Sastry, Pamela Mishkin, Brooke Chan, Scott Gray, Nick Ryder, Mikhail Pavlov, Alethea Power, Lukasz Kaiser, Mohammad Bavarian, Clemens Winter, Philippe Tillet, Felipe Petroski Such, Dave Cummings, Matthias Plappert, Fotios Chantzis, Elizabeth Barnes, Ariel Herbert-Voss, William Hebgen Guss, Alex Nichol, Alex Paino, Nikolas Tezak, Jie Tang, Igor Babuschkin, Suchir Balaji, Shantanu Jain, William Saunders, Christopher Hesse, Andrew N. Carr, Jan Leike, Josh Achiam, Vedant Misra, Evan Morikawa, Alec Radford, Matthew Knight, Miles Brundage, Mira Murati, Katie Mayer, Peter Welinder, Bob McGrew, Dario Amodei, Sam McCandlish, Ilya Sutskever, and Wojciech Zaremba. Evaluating large language models trained on code, 2021. URL https://arxiv.org/abs/2107.03374.

- Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, Parker Schuh, Kensen Shi, Sasha Tsvyashchenko, Joshua Maynez, Abhishek Rao, Parker Barnes, Yi Tay, Noam Shazeer, Vinodkumar Prabhakaran, Emily Reif, Nan Du, Ben Hutchinson, Reiner Pope, James Bradbury, Jacob Austin, Michael Isard, Guy Gur-Ari, Pengcheng Yin, Toju Duke, Anselm Levskaya, Sanjay Ghemawat, Sunipa Dev, Henryk Michalewski, Xavier Garcia, Vedant Misra, Kevin Robinson, Liam Fedus, Denny Zhou, Daphne Ippolito, David Luan, Hyeontaek Lim, Barret Zoph, Alexander Spiridonov, Ryan Sepassi, David Dohan, Shivani Agrawal, Mark Omernick, Andrew M. Dai, Thanumalayan Sankaranarayana Pillai, Marie Pellat, Aitor Lewkowycz, Erica Moreira, Rewon Child, Oleksandr Polozov, Katherine Lee, Zongwei Zhou, Xuezhi Wang, Brennan Saeta, Mark Diaz, Orhan Firat, Michele Catasta, Jason Wei, Kathy Meier-Hellstern, Douglas Eck, Jeff Dean, Slav Petrov, and Noah Fiedel. Palm: Scaling language modeling with pathways, 2022. URL https://arxiv.org/abs/2204.02311.
- Elizabeth Dinella, Gabriel Ryan, Todd Mytkowicz, and Shuvendu Lahiri. Toga: A neural method for test oracle generation. In *ICSE* 2022. ACM, May 2022. URL https://www.microsoft.com/en-us/research/publication/toga-a-neural-method-for-test-oracle-generation/.
- Gordon Fraser and Andrea Arcuri. Evolutionary generation of whole test suites. In *International Conference On Quality Software (QSIC)*, pp. 31–40, Los Alamitos, CA, USA, 2011. IEEE Computer Society. doi: http://doi.ieeecomputersociety.org/10.1109/QSIC.2011.19.
- Daniel Fried, Armen Aghajanyan, Jessy Lin, Sida Wang, Eric Wallace, Freda Shi, Ruiqi Zhong, Wen-tau Yih, Luke Zettlemoyer, and Mike Lewis. Incoder: A generative model for code infilling and synthesis, 2022. URL https://arxiv.org/abs/2204.05999.
- GitHub. Github copilot, 2022. Accessed August 5, 2022. https://github.com/features/copilot/.
- Sumit Gulwani. Automating string processing in spreadsheets using input-output examples. In PoPL'11, January 26-28, 2011, Austin, Texas, USA, January 2011.

 URL https://www.microsoft.com/en-us/research/publication/automating-string-processing-spreadsheets-using-input-output-examples/.
- Sumit Gulwani, Oleksandr Polozov, and Rishabh Singh. Program synthesis. *Found. Trends Program. Lang.*, 4(1-2):1–119, 2017. doi: 10.1561/2500000010. URL https://doi.org/10.1561/2500000010.
- Naman Jain, Skanda Vaidyanath, Arun Iyer, Nagarajan Natarajan, Suresh Parthasarathy, Sriram Rajamani, and Rahul Sharma. Jigsaw: Large language models meet program synthesis. In *International Conference on Software Engineering (ICSE)*, May 2022. URL https://www.microsoft.com/en-us/research/publication/jigsaw-large-language-models-meet-program-synthesis/.
- Ruyi Ji, Jingjing Liang, Yingfei Xiong, Lu Zhang, and Zhenjiang Hu. Question selection for interactive program synthesis. In *Proceedings of the 41st ACM SIGPLAN Conference on Programming Language Design and Implementation*, PLDI 2020, pp. 1143–1158, New York, NY, USA, 2020. Association for Computing Machinery. ISBN 9781450376136. doi: 10.1145/3385412.3386025. URL https://doi.org/10.1145/3385412.3386025.
- Vu Le, Daniel Perelman, Oleksandr Polozov, Mohammad Raza, Abhishek Udupa, and Sumit Gulwani. Interactive program synthesis, 2017. URL https://arxiv.org/abs/1703.03539.
- Yujia Li, David Choi, Junyoung Chung, Nate Kushman, Julian Schrittwieser, Rémi Leblond, Tom Eccles, James Keeling, Felix Gimeno, Agustin Dal Lago, Thomas Hubert, Peter Choy, Cyprien de Masson d'Autume, Igor Babuschkin, Xinyun Chen, Po-Sen Huang, Johannes Welbl, Sven Gowal, Alexey Cherepanov, James Molloy, Daniel J. Mankowitz, Esme Sutherland Robson, Pushmeet Kohli, Nando de Freitas, Koray Kavukcuoglu, and Oriol Vinyals. Competition-level code generation with alphacode, 2022. URL https://arxiv.org/abs/2203.07814.

- Qingzhou Luo, Farah Hariri, Lamyaa Eloussi, and Darko Marinov. An empirical analysis of flaky tests. In Shing-Chi Cheung, Alessandro Orso, and Margaret-Anne D. Storey (eds.), *Proceedings of the 22nd ACM SIGSOFT International Symposium on Foundations of Software Engineering, (FSE-22), Hong Kong, China, November 16 22, 2014*, pp. 643–653. ACM, 2014. doi: 10.1145/2635868.2635920. URL https://doi.org/10.1145/2635868.2635920.
- Erik Nijkamp, Bo Pang, Hiroaki Hayashi, Lifu Tu, Huan Wang, Yingbo Zhou, Silvio Savarese, and Caiming Xiong. A conversational paradigm for program synthesis, 2022. URL https://arxiv.org/abs/2203.13474.
- Carlos Pacheco, Shuvendu K. Lahiri, Michael D. Ernst, and Thomas Ball. Feedback-directed random test generation. In *ICSE 2007, Proceedings of the 29th International Conference on Software Engineering*, pp. 75–84, Minneapolis, MN, USA, May 2007.
- Kia Rahmani, Mohammad Raza, Sumit Gulwani, Vu Le, Daniel Morris, Arjun Radhakrishna, Gustavo Soares, and Ashish Tiwari. Multi-modal program inference: a marriage of pre-trained language models and component-based synthesis. *Proc. ACM Program. Lang.*, 5(OOPSLA):1–29, 2021. doi: 10.1145/3485535. URL https://doi.org/10.1145/3485535.
- Laria Reynolds and Kyle McDonell. Prompt programming for large language models: Beyond the few-shot paradigm, 2021. URL https://arxiv.org/abs/2102.07350.
- Armando Solar-Lezama. The sketching approach to program synthesis. In Zhenjiang Hu (ed.), *Programming Languages and Systems*, pp. 4–13, Berlin, Heidelberg, 2009. Springer Berlin Heidelberg. ISBN 978-3-642-10672-9.
- Michele Tufano, Dawn Drain, Alexey Svyatkovskiy, Shao Kun Deng, and Neel Sundaresan. Unit test case generation with transformers and focal context, 2020. URL https://arxiv.org/abs/2009.05617.
- Michele Tufano, Dawn Drain, Alexey Svyatkovskiy, and Neel Sundaresan. Generating accurate assert statements for unit test cases using pretrained transformers. In *IEEE/ACM International Conference on Automation of Software Test, AST@ICSE 2022, Pittsburgh, PA, USA, May 21-22, 2022*, pp. 54–64. ACM/IEEE, 2022. doi: 10.1145/3524481.3527220. URL https://doi.org/10.1145/3524481.3527220.
- Priyan Vaithilingam, Tianyi Zhang, and Elena L. Glassman. Expectation vs. experience: Evaluating the usability of code generation tools powered by large language models. In *Extended Abstracts of the 2022 CHI Conference on Human Factors in Computing Systems*, CHI EA '22, New York, NY, USA, 2022. Association for Computing Machinery. ISBN 9781450391566. doi: 10.1145/3491101.3519665. URL https://doi.org/10.1145/3491101.3519665.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Proceedings of the 31st International Conference on Neural Information Processing Systems*, NIPS'17, pp. 6000–6010, Red Hook, NY, USA, 2017. Curran Associates Inc. ISBN 9781510860964.
- Frank F. Xu, Uri Alon, Graham Neubig, and Vincent Josua Hellendoorn. A systematic evaluation of large language models of code. In *Proceedings of the 6th ACM SIGPLAN International Symposium on Machine Programming*, MAPS 2022, pp. 1–10, New York, NY, USA, 2022. Association for Computing Machinery. ISBN 9781450392730. doi: 10.1145/3520312.3534862. URL https://doi.org/10.1145/3520312.3534862.
- Albert Ziegler, Eirini Kalliamvakou, X. Alice Li, Andrew Rice, Devon Rifkin, Shawn Simister, Ganesh Sittampalam, and Edward Aftandilian. Productivity assessment of neural code completion. In Swarat Chaudhuri and Charles Sutton (eds.), MAPS@PLDI 2022: 6th ACM SIGPLAN International Symposium on Machine Programming, San Diego, CA, USA, 13 June 2022, pp. 21–29. ACM, 2022. doi: 10.1145/3520312.3534864. URL https://doi.org/10.1145/3520312.3534864.