# Improved proteasomal cleavage prediction with positive-unlabeled learning

Emilio Dorigatti

EDO@STAT.UNI-MUENCHEN.DE

Ludwig Maximilian Universität München, Helmholtz Zentrum München

Bernd Bischl

BERND.BISCHL@STAT.UNI-MUENCHEN.DE

Ludwig Maximilian Universität München, Munich Center for Machine Learning

Benjamin Schubert

BENJAMIN.SCHUBERT@HELMHOLTZ-MUENCHEN.DE

Helmholtz Zentrum München, Technical University of Munich

## Abstract

Accurate in silico modeling of the antigen processing pathway is crucial to enable personalized epitope vaccine design for cancer. An important step of such pathway is the degradation of the vaccine into smaller peptides by the proteasome, some of which are going to be presented to T cells by the MHC complex. While predicting MHC-peptide presentation has received a lot of attention recently, proteasomal cleavage prediction remains a relatively unexplored area in light of recent advances in high-throughput mass spectrometrybased MHC ligandomics. Moreover, as such experimental techniques do not allow to identify regions that cannot be cleaved, the latest predictors generate decoy negative samples and treat them as true negatives when training, even though some of them could actually be positives. In this work, we thus present a new predictor trained with an expanded dataset and the solid theoretical underpinning of positive-unlabeled learning, achieving a new state-of-theart in proteasomal cleavage prediction. The improved predictive capabilities will in turn enable more precise vaccine development improving the efficacy of epitope-based vaccines. Pretrained models are available on GitHub.<sup>1</sup>

**Keywords:** Epitope Vaccine, Proteasomal Cleavage, Antigen-Processing Pathway, Positive-Unlabeled Learning

#### 1. Introduction

Epitope-based cancer vaccines (EV) target necepitopes that arise in tumors as a result of somatic mutations. Such vaccines are designed by identifying a subset of neoepitopes with maximal immunogenicity that can be joined by short linker sequences designed ad hoc to facilitate processing of the resulting polypeptide by the antigen processing pathway of the human immune system (Dorigatti and Schubert, 2020b, a; Toussaint et al., 2011) A core step of such pathway (Figure 1a) is the digestion of the polypeptide by the proteasome, a protein complex which degrades old or damaged proteins into fragments, some of which are then loaded onto the Major Histocompatibility Complex (MHC) and transported to the surface of the cell for presentation to T cells (Blum et al., 2013). To ensure effectiveness at low doses, the design of EVs has to balance immunogenicity of the chosen neoepitopes with the likelihood that such neoepitopes will be correctly recovered after proteasomal cleavage. In order to increase efficiency and reduce production costs of EVs it is thus of paramount importance to model proteasomal cleavage in

https://github.com/SchubertLab/ proteasomal-cleavage-puupl

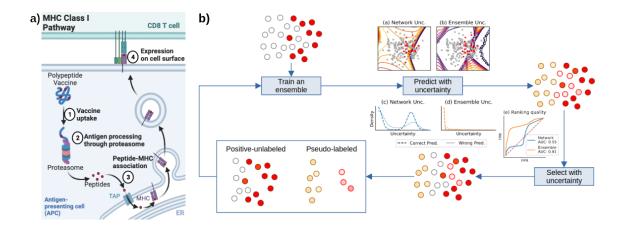


Figure 1: a) The antigen-processing pathway: after uptake of the vaccine (1), the proteasome cleaves it into smaller pieces (2), some of which are loaded onto a MHC molecule (3) and subsequently presented on the surface of the cell (4). b) The iterative PUUPL framework for positive-unlabeled learning. The confident predictions of an ensemble are mostly correct, and are thus used as pseudo-labels for for the next training iterations, continuously improving the model's performance.

order to predict the resulting fragments, and design the vaccine so that these fragments correspond to the desired neoepitopes (Dorigatti and Schubert, 2020b).

Although it is possible to conduct in vitro experiments to collect data on proteasomal cleavage, such process is timeconsuming, expensive, and low-throughput, thus only scarce data has been collected so far. At the same time, the development of high-throughput pipelines for mass spectrometry-based MHC ligandomics produces vast amount of data on peptide presentation by the MHC (Purcell et al., 2019; Vita et al., 2018). Crucially, all peptides detected in such a way must have resulted from proteasomal cleavage, providing indirect information on that process. However, peptides with low MHC binding affinity are often not detected, and information about missed cleavage sites is also unavailable, thus complicating the development of cleavage predictors from this kind of data. Positiveunlabeled learning (PUL) is a branch of semi-supervised learning which is concerned with learning from datasets missing negative labeled examples, but having only positives and unlabeled data (Bekker and Davis, 2020). PUL is thus a natural fit for training proteasomal cleavage predictors based on MHC ligandomics data.

In this work, we combine the newly available MHC ligandomics datasets with our recent PUL framework PUUPL (Dorigatti et al., 2022) to develop an updated proteasomal cleavage predictor with considerably higher performance than currently available.

### 2. Related work

Epitope vaccine design was first approached by optimization frameworks that approached epitope selection and assembly separately (Lundegaard et al., 2010; Toussaint et al., 2008), first using pre-determined spacer sequences (Velders et al., 2001) then spacers specifically optimized for each epitope pair to maximize their cleavage likelihood(Schubert and Kohlbacher, 2016). The

latest EV design frameworks approach both stages concurrently as a multi-objective optimization where vaccine immunogenicity is optimized jointly with cleavage likelihood (Dorigatti and Schubert, 2020a,b).

Proteasomal cleavage prediction was approached with neural network models (Keşmir et al., 2002; Kuttler et al., 2000) as well as linear predictors while jointly modeling all steps of the antigen processing pathway (Dönnes and Kohlbacher, 2005). Subsequently, predictors were developed for other proteases (Lawless and Hubbard, 2012; Yang et al., 2021), however they are not applicable to immune proteasomal cleavage prediction as the underlying biology is different.

NetChop (Nielsen et al., 2005) is a multilayer-perceptron (MLP)-based cleavage predictor trained in a traditionally supervised setting on a similar, albeit much smaller, dataset consisting of two *in vitro* proteasomally digested proteins as well as another dataset consisting of MHC-I ligands, and requiring a window of 17 amino acids around the potential cleavage site. Net-Cleave (Amengual-Rigo and Guallar, 2021), also based on MLPs was presented recently and provides prediction for specific MHC classes or alleles while requiring a window of only seven amino acids.

Positive-unlabeled learning was first introduced as a variant of binary classification (Liu et al., 2003) and approached with a variety of methods (Bekker and Davis, 2020). An unbiased risk estimator supported by solid theoretical foundations was introduced by Du Plessis et al. (2014) and later improved by Kiryo et al. (2017) for deep learning methods. In this work, we use PUUPL (Dorigatti et al., 2022), a recently proposed general framework for PUL that is suitable for sequence data, has competitive performance on imbalanced datasets and provides natu-

rally well-calibrated predictions while being easily usable.

## 3. Methods

In the following we provide a brief overview of PUUPL and direct the reader to Dorigatti et al. (2022) for a comprehensive description.

PUUPL (Figure 1b) is a PUL framework based on an iterative pseudo-labeling loop where the predictions of a baseline model on unlabeled samples, so-called pseudo-labels, are used as training targets to train a new model. As this model is trained on a larger dataset with more labeled examples, it will perform better than the original model, as long as the pseudo-labels are correct. PU-UPL ensures this by choosing which samples to pseudo-label based on the predictive epistemic uncertainty of an ensemble of deep neural networks, since low uncertainty predictions are likely correct. By iteratively repeating this loop of training a model and expanding the training set by pseudo-labeling some unlabeled examples it is possible to eventually improve the predictive performance.

One such scenario is when a dataset is highly imbalanced, i.e., it contains few labeled positive samples and most of the unlabeled samples belong to the negative class. Cleavage prediction suffers from this issue, as the length of MHC-I-bound peptides suggests a cleavage probability of about 10%. In this situation, Dorigatti et al. (2022) showed that PUUPL can greatly improve both predictive accuracy and calibration over PU risk estimators specialized for imbalanced data (Su et al., 2021) thus motivating our choice for this framework.

## 4. Experimental protocol

Dataset We collected a dataset of 294,615 MHC-I epitopes from IEDB (Vita et al.,

	N-terminal		C-terminal	
	AUROC	AUPRC	AUROC	AUPRC
NC 20S	$52.72 \pm 0.02$	$18.85{\scriptstyle\pm0.02}$	$66.07 \pm 0.02$	$27.51{\scriptstyle\pm0.01}$
NC C term	$50.99{\scriptstyle~ \pm 0.02}$	$18.68{\scriptstyle\pm0.02}$	$81.53 \pm 0.01$	$46.39{\pm0.04}$
NetCleave	$49.27 \pm 0.02$	$17.54{\pm}0.02$	$79.61 \pm 0.01$	$42.06{\pm0.02}$
imbnnPU	$75.15 \pm 0.06$	$40.01{\scriptstyle\pm0.39}$	$83.99 \pm 0.06$	$57.37{\pm}0.33$
PUUPL	$78.00 \pm 0.06$	$44.91 \pm 0.03$	$87.20 \pm 0.04$	$61.07 \pm 0.44$

Table 1: Average standard error of area under the ROC curve (AUROC) and area under the precision-recall curve (AUPRC) on both datasets for three baselines (above), a PUL risk estimator and PUUPL.

2018) and 89,853 from the Human MHC Ligand Atlas (Marcu et al., 2019). identify the potential progenitor protein of each epitope, we used BLAST (Altschul et al., 1990) and filtered for epitopes with an unique progenitor protein resulting in 258,424 data points. Through the progenitor protein, we recovered the residues preceding the N-terminus and following the Cterminus of the epitope, thus providing context for the cleavage predictor. We generated two separate datasets based exclusively on N- or C-termini cleavage sites, as it is known that the biological signal differs in these two situations (Schatz et al., 2008). We extracted "decoy" samples by considering cleavage sites located within three residues of the experimentally-determined terminus. As discussed previously, it is unknown whether cleavage could or could not have happened at those positions, hence we treat such decoys as unlabeled in our PUL training procedure. As they were all natural sequences, these decoys were unlikely to bias the models in any way. The final datasets were then composed of 1,285,659 and 1,277,344 samples with 229,163 and 222,181 positives for the Nand C-terminus datasets respectively.

**Model** Each sample contains ten residues, six to the left and four to the right of the cleavage site. The amino acids were one-

hot encoded, resulting in a binary vector of 240 components for each cleavage site in the dataset. We used an ensemble of multilayer perceptrons (MLPs) with batch normalization layers and relu activation.

Optimization We used Hyperband (Li et al., 2017) with  $\eta=3$  and S=4 to optimize PUUPL's hyperparameters, as well as the number and size of hidden layers and training regime of the MLPs on the C-terminus dataset. Each hyperparameter combination was tested with ten-fold cross-validation, where a validation set of 50,000 samples was used for early stopping and a separate test set of the same size for the final scoring.

Evaluation As evaluation criterion we used the AUROC between positive and unlabeled samples (PU-AUROC), as previous work (Menon et al., 2015; Jain et al., 2017) has shown that higher PU-AUROC directly translates to higher AUROC on fully labeled data. Note that, as we do not know true negatives, traditional metrics to evaluate classification performance such as accuracy, F1, precision, recall, etc. are not applicable in this case. For imbnnPU and PUUPL we ran ten-folds cross-validation and used the statistical test proposed by LeDell et al. (2015)

to estimate the AUROC, its standard error and confidence intervals.

As external baselines we consider NetChop (Nielsen et al., 2005) and Net-Cleave (Amengual-Rigo and Guallar, 2021), evaluating their predictions on ten random bootstraps of our dataset. We also show evaluation scores for the imbnnPU loss (Su et al., 2021), commonly used for PUL on imbalanced datasets.

# 5. Results

Both PUUPL and the imbalanced nnPU loss achieved lower performance on the Nterminals dataset, confirming previous observations that this predictive task is harder due to the biological processes involved (Schatz et al., 2008). On the C-terminal dataset, the imbalanced nnPU loss improved performance by 2.5 and 4.4 points compared to NetChop and NetCleave respectively, and PUUPL added a further 3.2 points reaching 87.2% AUROC (Table 1). In both datasets the difference in AUROC between imbnnPU and PUUPL was statistically significant at a significance of 1%: the confidence intervals are [74.99, 75.32] and [77.85, 78.15] for N-terminals, and [83.85, 84.14] and [87.08, 87.32] for C-terminals. Note that both NetChop and NetCleave were only trained on C-terminals cleavage sites in the original publication, thus explaining their random predictions on the N-terminals dataset. While the area under the precisionrecall curve (AUPRC) is difficult to interpret in a PU setting, in an imbalanced scenario such as ours it can be used to ensure that the AUROC is not misleadingly overinflated.

# 6. Conclusion

We constructed a new dataset for proteasomal cleavage on both N- and C-terminals based on MHC-I ligands and trained an en-

semble of MLP predictors with a pseudolabeling framework for PUL (Dorigatti et al., 2022).

This improved performance by 5.6 points reaching 87% AUROC on C-terminal cleavage sites and enabled novel cleavage predictions for N-terminals, which were not considered by the previous state-of-the-art. Furthermore, our predictor only uses ten residues around the cleavage site, thus being more efficient in and requiring less data for generating predictions compared to NetChop.

In conclusion, accurate and efficient proteasomal cleavage predictors can be incorporated in epitope-based cancer vaccine design frameworks to improve vaccine efficacy at low doses, reducing deployment costs of personalized immunotherapies for cancer.

# Acknowledgments

E. D. was supported by the Helmholtz Association under the joint research school "Munich School for Data Science - MUDS" (Award Number HIDSS-0006). B. S. acknowledges financial support by the Postdoctoral Fellowship Program of the Helmholtz Zentrum Müunchen.

### References

Stephen F. Altschul, Warren Gish, Webb Miller, Eugene W. Myers, and David J. Lipman. Basic local alignment search tool. *Journal of Molecular Biology*, 215 (3):403–410, October 1990. doi: 10.1016/s0022-2836(05)80360-2.

Pep Amengual-Rigo and Victor Guallar. NetCleave: an open-source algorithm for predicting c-terminal antigen processing for MHC-i and MHC-II. *Scientific Reports*, 11(1), June 2021. doi: 10.1038/s41598-021-92632-y.

- Jessa Bekker and Jesse Davis. Learning from positive and unlabeled data: A survey. *Machine Learning*, 109(4):719–760, 2020.
- Janice S. Blum, Pamela A. Wearsch, and Peter Cresswell. Pathways of antigen processing. Annual Review of Immunology, 31(1):443–473, March 2013. doi: 10.1146/annurev-immunol-032712-095910.
- Pierre Dönnes and Oliver Kohlbacher. Integrated modeling of the major events in the MHC class i antigen processing pathway. *Protein Science*, 14(8):2132–2140, August 2005. doi: 10.1110/ps.051352405.
- Emilio Dorigatti and Benjamin Schubert. Graph-theoretical formulation of the generalized epitope-based vaccine design problem. *PLOS Computational Biology*, 16(10):e1008237, October 2020a. doi: 10. 1371/journal.pcbi.1008237.
- Emilio Dorigatti and Benjamin Schubert. Joint epitope selection and spacer design for string-of-beads vaccines. *Bioinformatics*, 36(Supplement\_2):i643–i650, December 2020b. doi: 10.1093/bioinformatics/btaa790.
- Emilio Dorigatti, Jann Goschenhofer, Benjamin Schubert, Mina Rezaei, and Bernd Bischl. Positive-unlabeled learning with uncertainty-aware pseudo-label selection. ArXiv, abs/2201.13192, 2022.
- Marthinus C Du Plessis, Gang Niu, and Masashi Sugiyama. Analysis of learning from positive and unlabeled data. Advances in neural information processing systems, 27:703–711, 2014.
- Shantanu Jain, Martha White, and Predrag Radivojac. Recovering true classifier performance in positive-unlabeled learning. *Proceedings of the AAAI Conference on Artificial Intelligence*, 31(1), Feb. 2017.

- Can Keşmir, Alexander K. Nussbaum, Hansjörg Schild, Vincent Detours, and Søren Brunak. Prediction of proteasome cleavage motifs by neural networks. *Pro*tein Engineering, Design and Selection, 15 (4):287–296, April 2002. doi: 10.1093/ protein/15.4.287.
- Ryuichi Kiryo, Gang Niu, Marthinus C du Plessis, and Masashi Sugiyama. Positive-unlabeled learning with nonnegative risk estimator. Advances in Neural Information Processing Systems, 2017.
- Christina Kuttler, Alexander K Nussbaum, Tobias P Dick, Hans-Georg Rammensee, Hansjörg Schild, and Karl-Peter Hadeler. An algorithm for the prediction of proteasomal cleavages. *Journal of Molecular Biology*, 298(3):417–429, May 2000. doi: 10.1006/jmbi.2000.3683.
- Craig Lawless and Simon J. Hubbard. Prediction of missed proteolytic cleavages for the selection of surrogate peptides for quantitative proteomics. *OMICS: A Journal of Integrative Biology*, 16(9):449–456, September 2012. doi: 10.1089/omi.2011. 0156.
- Erin LeDell, Maya L. Petersen, and Mark J. van der Laan. Computationally efficient confidence intervals for cross-validated area under the roc curve estimates. *Electronic journal of statistics*, 9 1:1583–1607, 2015.
- Lisha Li, Kevin G. Jamieson, Giulia De-Salvo, Afshin Rostamizadeh, and Ameet S. Talwalkar. Hyperband: A novel bandit-based approach to hyperparameter optimization. *Journal of Machine Learning Research*, 18:185:1–185:52, 2017.
- Bing Liu, Yang Dai, Xiaoli Li, Wee Sun Lee, and Philip S Yu. Building text classifiers

- using positive and unlabeled examples. In *Third IEEE International Conference on Data Mining*, pages 179–186. IEEE, 2003.
- C. Lundegaard, M. Buggert, Ac Karlsson, O. Lund, Carina Perez, and M. Nielsen. PopCover: a method for selecting of peptides with optimal population and pathogen coverage. In Proceedings of the First ACM International Conference on Bioinformatics and Computational Biology - BCB '10, page 658, Niagara Falls, New York, 2010. ACM Press. ISBN 978-1-4503-0438-2. doi: 10.1145/1854776. 1854905.
- Ana Marcu, Leon Bichmann, Leon Kuchenbecker, Daniel Johannes Kowalewski, Lena Katharina Freudenmann, Linus Backert, Lena Mühlenbruch, András Szolek, Maren Lübke, Philipp Wagner, Tobias Engler, Sabine Matovina, Jian Wang, Mathias Hauri-Hohl, Roland Martin, Konstantina Kapolou, Juliane Sarah Walz, Julia Velz, Holger Moch, Luca Regli, Manuela Silginer, Michael Weller, Markus W. Löffler, Florian Erhard, Andreas Schlosser, Oliver Kohlbacher, Stefan Stevanović, Hans-Georg Rammensee, and Marian Christoph Neidert. The HLA ligand atlas - a resource of natural HLA ligands presented on benign tissues. September 2019. doi: 10.1101/778944.
- Aditya Menon, Brendan Van Rooyen, Cheng Soon Ong, and Bob Williamson. Learning from corrupted binary labels via class-probability estimation. In Francis Bach and David Blei, editors, Proceedings of the 32nd International Conference on Machine Learning, volume 37 of Proceedings of Machine Learning Research, pages 125–134, Lille, France, 07–09 Jul 2015. PMLR.
- Morten Nielsen, Claus Lundegaard, Ole Lund, and Can Keşmir. The role of the

- proteasome in generating cytotoxic t-cell epitopes: insights obtained from improved predictions of proteasomal cleavage. Immunogenetics, 57(1-2):33-41, mar 2005. doi: 10.1007/s00251-005-0781-7.
- Anthony W. Purcell, Sri H. Ramarathinam, and Nicola Ternette. Mass spectrometry–based identification of MHC-bound peptides for immunopeptidomics. *Nat Protoc*, 14(6):1687–1707, may 2019. doi: 10.1038/s41596-019-0133-y.
- Mark M. Schatz, Björn Peters, Nadja Akkad, Nina Ullrich, Alejandra Nacarino Martinez, Oliver Carroll, Sascha Bulik, Hans-Georg Rammensee, Peter van Endert, Hermann-Georg Holzhütter, Stefan Tenzer, and Hansjörg Schild. Characterizing the n-terminal processing motif of MHC class i ligands. The Journal of Immunology, 180(5):3210–3217, February 2008. doi: 10.4049/jimmunol.180.5. 3210. URL https://doi.org/10.4049/jimmunol.180.5.3210.
- Benjamin Schubert and Oliver Kohlbacher. Designing string-of-beads vaccines with optimal spacers. *Genome Medicine*, 8(1), December 2016. ISSN 1756-994X. doi: 10.1186/s13073-016-0263-6.
- Guangxin Su, Weitong Chen, and Miao Xu. Positive-unlabeled learning from imbalanced data. In *Proceedings of the Thirtieth International Joint Conference on Artificial Intelligence*. International Joint Conferences on Artificial Intelligence Organization, aug 2021. doi: 10.24963/ijcai. 2021/412.
- Nora C. Toussaint, Pierre Dönnes, and Oliver Kohlbacher. A Mathematical Framework for the Selection of an Optimal Set of Peptides for Epitope-Based Vaccines. *PLoS Computational Biology*, 4(12):

- e1000246, December 2008. ISSN 1553-7358. doi: 10.1371/journal.pcbi.1000246.
- Nora C. Toussaint, Yaakov Maman, Oliver Kohlbacher, and Yoram Louzoun. Universal peptide vaccines Optimal peptide vaccine design based on viral sequence conservation. *Vaccine*, 29(47):8745–8753, November 2011. ISSN 0264410X. doi: 10.1016/j.vaccine.2011.07.132.
- Markwin Р. Velders. Sanne Weijzen, Gretchen L. Eiben, Amira G. Elmishad, Peter-M. Kloetzel. Terry Higgins, Richard B. Ciccarelli, Mererid Evans, Stephen Man, Larry Smith, and W. Martin Kast. Defined Flanking Spacers and Enhanced Proteolysis Is Essential for Eradication of Established Tumors by an Epitope String DNA Vaccine. The Journal of Immunology, 166(9):5366-5373, 2001. ISSN 0022-1767, 1550-6606. doi: 10.4049/jimmunol.166.9.5366.
- Randi Vita, Swapnil Mahajan, James A Overton, Sandeep Kumar Dhanda, Sheridan Martini, Jason R Cantrell, Daniel K Wheeler, Alessandro Sette, and Bjoern Peters. The Immune Epitope Database (IEDB): 2018 update. *Nucleic Acids Re*search, 47(D1):D339–D343, 10 2018. ISSN 0305-1048. doi: 10.1093/nar/gky1006.
- Jinghan Yang, Zhiqiang Gao, Xiuhan Ren, Jie Sheng, Ping Xu, Cheng Chang, and Yan Fu. DeepDigest: Prediction of protein proteolytic digestion with deep learning. *Analytical Chemistry*, 93(15):6094–6103, April 2021. doi: 10.1021/acs.analchem. 0c04704.