

---

# KGP: AN R PACKAGE WITH METADATA FROM THE 1000 GENOMES PROJECT

---

**Stephen D. Turner**  
Independent Scientist  
Charlottesville, Virginia

October 2, 2022

## Abstract

The 1000 Genomes Project provides sequencing data on 3,202 samples from 26 populations spanning five continental regions with no access or use restrictions. The **kgp** R package provides consistent and comprehensive metadata about samples and populations in the 1000 Genomes Project and other population sequencing data in the International Genome Sample Resource collection. The **kgp** package is distributed via the Comprehensive R Archive Network (CRAN) at <https://cran.r-project.org/package=kgp>. Source code is available on GitHub at <https://github.com/stephenturner/kgp>. Further documentation is online at <https://stephenturner.github.io/kgp/>.

**Keywords** 1000 Genomes Project · R package · Population genetics

## 1 Introduction

The 1000 Genomes Project sequenced 2,504 individuals across 26 populations spanning five continental regions in the final Phase 3 release (Auton et al. 2015). The cohort was expanded to 3,202 individuals to include 602 trios all sequenced to 30X coverage (Byrska-Bishop et al. 2022), making the 1000 Genomes Project the largest fully open resource with whole genome sequencing data where samples are consented for public distribution without access or use restrictions (Rotimi et al. 2007). In addition to the samples from the 1000 Genomes Project, International Genome Sample Resource (IGSR) collections include over 800 samples from 186 populations collected as part of the Simons Genome Diversity Project, Human Genome Diversity Project, and Gambian Genome Variation Project (Mallick et al. 2016; Cavalli-Sforza 2005; Fairley et al. 2019).

The free and unfettered accessibility of this data has led to widespread use for method development in bioinformatics and population genetics (Zheng-Bradley and Flicek 2016), with applications including variant calling (Mills et al. 2011), imputation (Das et al. 2016), haplogrouping (Weissensteiner et al. 2016), variant prioritization (Khurana et al. 2013), population genetics (Pybus et al. 2013; Fagny et al. 2014; Enard, Messer, and Petrov 2014), and simulation for method development (Nagraj et al. 2022; Turner et al. 2022a).

All of the 1000 Genomes Project data is freely and easily accessible on the 1000 Genomes FTP site (<http://ftp.1000genomes.ebi.ac.uk/vol1/ftp/>). This includes sequence data, alignments, and variant call format (VCF) files with genotype calls for the 2,504 samples in the phase 3 release and for the 3,202 samples in the expanded high-coverage set. Metadata is also available on these samples and populations, but is spread across multiple files, requiring additional data manipulation to create a consistent and comprehensive metadata resource which may be used downstream in annotation or method development. Here I describe the **kgp** R package which provides a unified metadata and annotation resource for all 3,202 samples and all 26 populations in the 1000 Genomes Project collection.

## 2 The `kgp` package

### 2.1 Implementation

The `kgp` package is implemented as an R package with no additional external dependencies, following best practices for R data package development (Wickham 2015). Raw data is downloaded from the 1000 Genomes Project FTP site and saved to `inst/extdata` in the R package root. The commands needed to acquire these files are version controlled in a README in `inst/extdata`. A script in `data-raw` reads in each of the installed raw data files, performs necessary joins, data cleaning, and verification, following standard “tidyverse” principles (Wickham et al. 2019). Final parsed data are exposed as R data objects when the package is installed and loaded.

### 2.2 Demonstration

The `kgp` package exports four data objects. The `kgp3` object includes sample, pedigree, and population data for 2,504 samples in the Phase 3 release of the 1000 Genomes Project data. The `kgpe` object contains information for all 3,202 samples from the expanded high-coverage data. Both `kgp3` and `kgpe` contain pedigree information (family, individual, paternal, and maternal IDs), sex, population, and continental region annotations. The `kgpmeta` object contains population metadata from 26 populations across five continental regions for the 1000 Genomes Project samples in `kgp3` and `kgpe`. The `allmeta` object contains population metadata from 212 populations from the 1000 Genomes Project, Simons Genome Diversity Project, Human Genome Diversity Project, and Gambian Genome Variation Project. Both `kgpmeta` and `allmeta` contain population short codes (e.g., YRI, CEU), population names (e.g., Yoruba in Ibadan Nigeria, Utah residents with Northern and Western European ancestry); region short codes (e.g., AFR, EUR), region names (e.g., Africa, Europe), and latitude and longitude coordinates.

Table 1 shows the 1000 Genomes Project metadata available in `kgpmeta`.

Table 1: 1000 Genomes Project population metadata in `kgpmeta`.

pop	population	reg	region	lat	lng
ACB	African Caribbean in Barbados	AFR	Africa	13.10	-59.62
ASW	African Ancestry in Southwest US	AFR	Africa	35.48	-97.53
ESN	Esan in Nigeria	AFR	Africa	9.07	7.48
GWD	Gambian in Western Division, The Gambia	AFR	Africa	13.45	-16.58
LWK	Luhya in Webuye, Kenya	AFR	Africa	-1.27	36.61
MSL	Mende in Sierra Leone	AFR	Africa	8.48	-13.23
YRI	Yoruba in Ibadan, Nigeria	AFR	Africa	7.40	3.92
CLM	Colombian in Medellin, Colombia	AMR	America	4.58	-74.07
MXL	Mexican Ancestry in Los Angeles, California	AMR	America	34.05	-118.24
PEL	Peruvian in Lima, Peru	AMR	America	-12.04	-77.03
PUR	Puerto Rican in Puerto Rico	AMR	America	18.40	-66.10
CDX	Chinese Dai in Xishuangbanna, China	EAS	East Asia	22.00	100.78
CHB	Han Chinese in Beijing, China	EAS	East Asia	39.92	116.38
CHS	Southern Han Chinese, China	EAS	East Asia	23.13	113.27
JPT	Japanese in Tokyo, Japan	EAS	East Asia	35.68	139.68
KHV	Kinh in Ho Chi Minh City, Vietnam	EAS	East Asia	10.78	106.68
CEU	Utah residents with Northern and Western European ancestry	EUR	Europe	40.77	-111.89
FIN	Finnish in Finland	EUR	Europe	60.17	24.93
GBR	British in England and Scotland	EUR	Europe	52.49	-1.89
IBS	Iberian populations in Spain	EUR	Europe	40.38	-3.72
TSI	Tosceni in Italy	EUR	Europe	42.10	12.00
BEB	Bengali in Bangladesh	SAS	South Asia	23.70	90.35
GIH	Gujarati Indian in Houston, TX	SAS	South Asia	29.76	-95.37
ITU	Indian Telugu in the UK	SAS	South Asia	52.49	-1.89
PJL	Punjabi in Lahore, Pakistan	SAS	South Asia	31.55	74.36
STU	Sri Lankan Tamil in the UK	SAS	South Asia	52.49	-1.89

The latitude and longitude coordinates in `kgpmeta` can be used to plot a map of the locations of the 1000 Genomes populations. Not shown in Table 1 but also included in `kgpmeta` is a region color, which provides a hexadecimal color code to enable reproduction of the population data map as shown on the IGSR population data page (<https://www.internationalgenome.org/data-portal/population>). Figure 1 shows a static map produced using `ggplot2`, but interactive maps such as that shown on the IGSR population data portal can be created with the `leaflet` package.

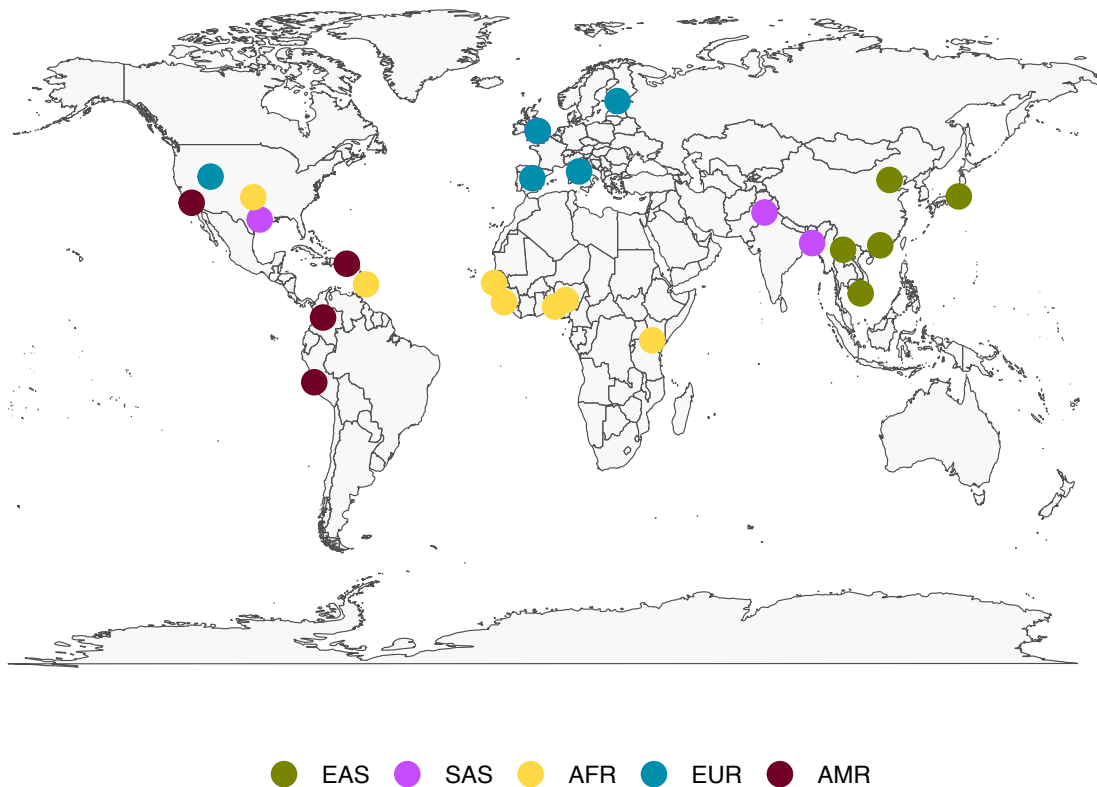


Figure 1: Map showing locations of the 1000 Genomes Phase 3 populations.

Table 2 shows a selection of samples from `kgpe` showing pedigree information for each sample. This pedigree information could be used in downstream analysis to filter out related individuals, select only trios, or to visualize family structure using pedigree analysis packages such as `kinship2` (Sinnwell, Therneau, and Schaid 2014), `skater` (Turner et al. 2022b), or `pedtools` (Vigeland 2021).

Table 2: A selection of samples from `kgpe` showing pedigree information available for each sample.

fid	id	pid	mid	sex	pop	reg
BB01	HG01881	HG01879	HG01880	2	ACB	AFR
2367	NA19702	NA19700	NA19701	1	ASW	AFR
NG06	HG02924	HG02923	HG02922	1	ESN	AFR
GB15	HG02463	HG02461	HG02462	1	GWD	AFR
SL02	HG03056	HG03054	HG03055	1	MSL	AFR
CLM03	HG01114	HG01112	HG01113	2	CLM	AMR
SH001	HG00405	HG00403	HG00404	2	CHS	EAS
VN046	HG02015	HG02017	HG02016	1	KHV	EAS
1341	NA06991	NA06993	NA06985	2	CEU	EUR
IBS001	HG01502	HG01500	HG01501	1	IBS	EUR
BD01	HG03008	HG03006	HG03007	1	BEB	SAS
IT002	HG03719	HG03725	HG03722	2	ITU	SAS

Figure 2 shows an example of a pedigree plot made by parsing the pedigree information using `skater` (Turner et al. 2022b) and plotting using `kinship2` (Sinnwell, Therneau, and Schaid 2014). The `skater` package provides documentation, examples, and a vignette demonstrating how to iteratively plot all pedigrees in a given data set.

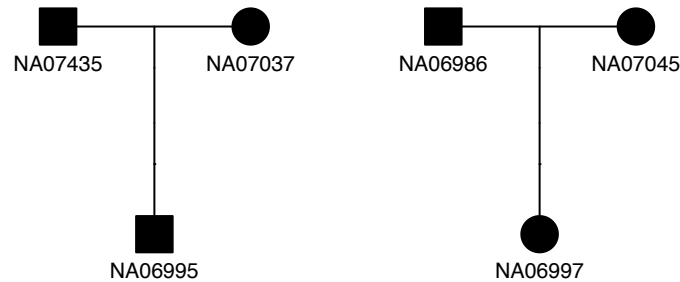


Figure 2: Trios in 1000 Genomes Project family 13291.

### 2.3 Availability

The `kgp` package is freely available as an open-source R package, available on the Comprehensive R Archive Network (CRAN) at <https://cran.r-project.org/package=kgp>.

The `kgp` package source code is available at <https://github.com/stephenturner/kgp>. Documentation is available at <https://stephenturner.github.io/kgp/> and in the R package PDF manual.

## References

- Auton, Adam, Gonçalo R. Abecasis, David M. Altshuler, Richard M. Durbin, Gonçalo R. Abecasis, David R. Bentley, Aravinda Chakravarti, et al. 2015. “A Global Reference for Human Genetic Variation.” *Nature* 526 (7571): 68–74. <https://doi.org/10.1038/nature15393>.
- Byrska-Bishop, Marta, Uday S. Evani, Xuefang Zhao, Anna O. Basile, Haley J. Abel, Allison A. Regier, André Corvelo, et al. 2022. “High-Coverage Whole-Genome Sequencing of the Expanded 1000 Genomes Project Cohort Including 602 Trios.” *Cell* 185 (18): 3426–3440.e19. <https://doi.org/10.1016/j.cell.2022.08.004>.
- Cavalli-Sforza, L. Luca. 2005. “The Human Genome Diversity Project: Past, Present and Future.” *Nature Reviews Genetics* 6 (4): 333–40. <https://doi.org/10.1038/nrg1596>.
- Das, Sayantan, Lukas Forer, Sebastian Schönherr, Carlo Sidore, Adam E Locke, Alan Kwong, Scott I Vrieze, et al. 2016. “Next-Generation Genotype Imputation Service and Methods.” *Nature Genetics* 48 (10): 1284–87. <https://doi.org/10.1038/ng.3656>.
- Enard, David, Philipp W. Messer, and Dmitri A. Petrov. 2014. “Genome-Wide Signals of Positive Selection in Human Evolution.” *Genome Research* 24 (6): 885–95. <https://doi.org/10.1101/gr.164822.113>.
- Fagny, Maud, Etienne Patin, David Enard, Luis B. Barreiro, Lluís Quintana-Murci, and Guillaume Laval. 2014. “Exploring the Occurrence of Classic Selective Sweeps in Humans Using Whole-Genome Sequencing Data Sets.” *Molecular Biology and Evolution* 31 (7): 1850–68. <https://doi.org/10.1093/molbev/msu118>.
- Fairley, Susan, Ernesto Lowy-Gallego, Emily Perry, and Paul Flicek. 2019. “The International Genome Sample Resource (IGSR) Collection of Open Human Genomic Variation Resources.” *Nucleic Acids Research* 48 (D1): D941–47. <https://doi.org/10.1093/nar/gkz836>.
- Khurana, Ekta, Yao Fu, Vincenza Colonna, Xinmeng Jasmine Mu, Hyun Min Kang, Tuuli Lappalainen, Andrea Sboner, et al. 2013. “Integrative Annotation of Variants from 1092 Humans: Application to Cancer Genomics.” *Science* 342 (6154). <https://doi.org/10.1126/science.1235587>.
- Mallick, Swapan, Heng Li, Mark Lipson, Iain Mathieson, Melissa Gymrek, Fernando Racimo, Mengyao Zhao, et al. 2016. “The Simons Genome Diversity Project: 300 Genomes from 142 Diverse Populations.” *Nature* 538 (7624): 201–6. <https://doi.org/10.1038/nature18964>.
- Mills, Ryan E., W. Stephen Pittard, Julianne M. Mullaney, Umar Farooq, Todd H. Creasy, Anup A. Mahurkar, David M. Kemeza, et al. 2011. “Natural Genetic Variation Caused by Small Insertions and Deletions in the Human Genome.” *Genome Research* 21 (6): 830–39. <https://doi.org/10.1101/gr.115907.110>.
- Nagraj, V P, Matthew Scholz, Shakeel Jessa, Jianye Ge, Meng Huang, August E Woerner, Dixie Peters, Bruce Budowle, Michael D Coble, and Stephen D Turner. 2022. “Relationship Inference with Low-

- Coverage Whole Genome Sequencing on Forensic Samples.” *Forensic Genomics* 2 (3): 81–91. <https://doi.org/10.1089/forensic.2022.0009>.
- Pybus, Marc, Giovanni M. Dall’Olio, Pierre Luisi, Manu Uzkuudun, Angel Carreño-Torres, Pavlos Pavlidis, Hafid Laayouni, Jaume Bertranpetit, and Johannes Engelken. 2013. “1000 Genomes Selection Browser 1.0: A Genome Browser Dedicated to Signatures of Natural Selection in Modern Humans.” *Nucleic Acids Research* 42 (D1): D903–9. <https://doi.org/10.1093/nar/gkt1188>.
- Rotimi, Charles, Mark Leppert, Ichiro Matsuda, Changqing Zeng, Houcan Zhang, Clement Adebamowo, Ike Ajayi, et al. 2007. “Community Engagement and Informed Consent in the International HapMap Project.” *Public Health Genomics* 10 (3): 186–98. <https://doi.org/10.1159/000101761>.
- Sinnwell, Jason P., Terry M. Therneau, and Daniel J. Schaid. 2014. “The Kinship2 R Package for Pedigree Data.” *Human Heredity* 78 (2): 91–93. <https://doi.org/10.1159/000363105>.
- Turner, Stephen D., V. P. Nagraj, Matthew Scholz, Shakeel Jessa, Carlos Acevedo, Jianye Ge, August E. Woerner, and Bruce Budowle. 2022a. “Evaluating the Impact of Dropout and Genotyping Error on SNP-Based Kinship Analysis With Forensic Samples.” *Frontiers in Genetics* 13.
- . 2022b. “Skater: An R Package for SNP-Based Kinship Analysis, Testing, and Evaluation.” *F1000Research* 11 (January): 18. <https://doi.org/10.12688/f1000research.76004.1>.
- Vigeland, Magnus Dehli. 2021. *Pedigree Analysis in R*. Academic Press.
- Weissensteiner, Hansi, Dominic Pacher, Anita Kloss-Brandstätter, Lukas Forer, Günther Specht, Hans-Jürgen Bandelt, Florian Kronenberg, Antonio Salas, and Sebastian Schönherr. 2016. “HaploGrep 2: Mitochondrial Haplogroup Classification in the Era of High-Throughput Sequencing.” *Nucleic Acids Research* 44 (W1): W58–63. <https://doi.org/10.1093/nar/gkw233>.
- Wickham, Hadley. 2015. *R Packages*. 1 edition. Sebastopol, CA: O’Reilly Media.
- Wickham, Hadley, Mara Averick, Jennifer Bryan, Winston Chang, Lucy McGowan, Romain François, Garrett Grolemond, et al. 2019. “Welcome to the Tidyverse.” *Journal of Open Source Software* 4 (43): 1686. <https://doi.org/10.21105/joss.01686>.
- Zheng-Bradley, Xiangqun, and Paul Flicek. 2016. “Applications of the 1000 Genomes Project Resources.” *Briefings in Functional Genomics*, July, elw027. <https://doi.org/10.1093/bfpg/elw027>.