Communication between agents in dynamic epistemic logic *

Fernando R. Velázquez-Quesada

Department of Information Science and Media Studies, Universitetet i Bergen Fernando.VelazquezQuesada@uib.no

Abstract

This manuscript studies actions of *communication* between epistemic logic agents. It starts by looking into actions through which *all/some* agents share all their information, defining the model operation that transforms the model, discussing its properties, introducing a modality for describing it and providing an axiom system for the latter. The main part of the manuscript focusses on an action through which some agents share *part* of their information: they share all that they know about a topic defined by a given formula. Once again, the manuscript defines the model operation that transforms the model, discusses its properties, introduces a modality for describing it and provides an axiom system for the latter.

Keywords: epistemic logic · distributed knowledge · dynamic epistemic logic · full communication · partial communication

1 Introduction

Epistemic logic (*EL*; Hintikka 1962) is a logical system for reasoning about the knowledge a set of agents might have. On the syntactic side, its language extends propositional logic with a modality K_i for every agent i, with formulas of the form $K_i \varphi$ read as "agent i knows that φ is the case". On the semantic side, it typically relies on relational 'Kripke' models, assigning to each agent an *indistinguishability relation* among epistemic possibilities.¹ The crucial idea is that knowledge is defined in terms of *uncertainty*: agent i knows that φ is the case when φ holds in all situations she considers possible.² Despite its simplicity (or maybe because of it), *EL* has become a widespread tool, contributing to the formal study of complex multi-agent epistemic notions in philosophy (Hendricks 2006), computer science (Fagin et al. 1995, Meyer and van der Hoek 1995) and economics (de Bruin 2010, Perea 2012).

One of the reasons for the success of *EL* and its variations is that it allows a natural representation of *actions* that affect the agents' information (e.g.,

^{*}comm-2022-10-10-arXiv.tex, compiled 11th October 2022, 00:53. To appear in Revista Mexicana de Lógica 1(1).

¹There are other alternatives; see Footnote 5.

²This is the "information as *range*" discussed in van Benthem and Martínez (2008).

knowledge and beliefs). The two paradigmatic examples are *public announcements* (Plaza 1989, Gerbrandy and Groeneveld 1997), representing the effect of agents receiving truthful information, and *belief revision* (van Ditmarsch 2005, van Benthem 2007, Baltag and Smets 2008), representing actions of agents receiving information that is reliable and yet potentially fallible. These two frameworks are part of what is known as *dynamic epistemic logic* (*DEL*; van Ditmarsch et al. 2008, van Benthem 2011), a field whose main feature is that actions are semantically represented not as relations (as done, e.g., in *propositional dynamic logic*, Harel et al. 2000), but rather as operations that transform the underlying semantic model.

The mentioned *DEL* frameworks have been used for representing communication *between agents* (e.g., Ågotnes et al. 2010, van Ditmarsch 2014, Baltag and Smets 2013, Galimullin and Alechina 2017). Yet, they were originally designed to represent the effect of *external* communication, with the information's source being some entity that is not part of the system. This can be observed by noticing that, in these settings, the incoming information χ does not need to be known/believed by any of the involved agents.

This manuscript studies epistemic actions in which the information that is being shared is information some of the agents already have. In this sense, the actions studied here are true actions of *inter-agent* communication. For this, the crucial notion is that of *distributed knowledge* (Hilpinen 1977, Halpern and Moses 1984, 1985, 1990), representing what a group of agents *would* know by putting all their information together. Distributed knowledge thus 'pre-encodes' the information a group of agents would have if they were to share their individual pieces. Then, the actions studied here can be seen as (variations of) actions that fulfil this promise, doing so by defining the model that is obtained *after* communication takes place.

In defining these communication actions, it is important to emphasise that, under relational 'Kripke' models, epistemic logic defines knowledge in terms of uncertainty. This is because these models only represent the epistemic uncertainty of the agent, without 'explaining' why some uncertainty (i.e., epistemic possibility) has been discarded and why some other remains. This has two important consequences.

- First, as discussed in van der Hoek et al. (1999), distributed knowledge does not satisfy the "principle of full communication": there are situations in which a group knows distributively a formula φ , and yet φ does not follow from the individual knowledge of the groups' members. Thus, *under relational models*, distributed knowledge is better understood as what a group of agents would know (in the "information as range" sense) if they indicated to one another *which epistemic possibilities they have already discarded*.
- Second, recall that an agent's uncertainty is represented by her indistinguishability relation. Thus, although changes in uncertainty can be represented by changing what each epistemic possibility describes (technically, by changing the model's atomic valuation), they are more naturally represented by changes in the relation itself.³

³Note that changing the model's domain (removing worlds, as when representing public announcements, or adding them, as when representing non-public forms of communication) is an indirect way of changing indistinguishability relations.

This text is organised as follows. Section 2 recalls the basics of *EL*, including the semantic model representing the agents' uncertainty, the formal language used for describing them and an axiom system characterising validities. Then, while Section 3 discusses communication actions through which *all/some* agents share all their information with everybody (comparing them with proposals in the literature), Section 4 discusses a novel action through which some agents share *part* of their information with everybody. Section 5 is a brief discussion of the issues arising when only *some agents receive* the shared information. Finally, Section 6 summarises the work, discussing also further research lines. While the proofs of propositions are found within the text, the proofs of theorems can be found in the appendix.

2 Basic system

Throughout this text, let **A** be a finite non-empty set of agents, and let P be a non-empty enumerable set of atomic propositions.

Definition 2.1 (Multi-agent relational model) A *multi-agent relational model* (or, simply, a model) is a tuple $M = \langle W, R, V \rangle$ where W (also denoted as $\mathfrak{D}(M)$) is a non-empty set of objects called *possible worlds*, $R = \{R_i \subseteq W \times W \mid i \in A\}$ contains a binary *indistinguishability* relation on W for each agent in A, and $V : P \rightarrow \wp(W)$ is the atomic valuation indicating the set of possible worlds in which each atom holds. The class of (multi-agent relational) models is denoted by \mathbf{M}_A . A pair (M, w) with M in \mathbf{M}_A and $w \in \mathfrak{D}(M)$ is called a *pointed* \mathbf{M}_A *model* (or, simply, a pointed model), with w being the evaluation point.

Let $M = \langle W, R, V \rangle$ be a model. For $\mathbf{G} \subseteq \mathbf{A}$, define $R_{\mathbf{G}}^{\mathbf{D}} := \bigcap_{\mathbf{k} \in \mathbf{G}} R_{\mathbf{k}}$, with edges in $R_{\mathbf{G}}^{\mathbf{D}}$ called **G**-edges. For $S \subseteq W \times W$ and $w \in W$, define $S(w) := \{u \in W \mid Swu\}$.

Note: in a model, the indistinguishability relations are arbitrary binary relations. In particular, they need to be neither reflexive nor symmetric nor Euclidean nor transitive, and hence knowledge here is neither truthful nor positively/negatively introspective. The notion of knowledge used here corresponds simply to "what is true in all the agent's epistemic possibilities".

Pointed models are described by the following language.

Definition 2.2 (Language \mathcal{L}_D) Formulas φ, ψ of the language \mathcal{L}_D are given by

$$\varphi, \psi ::= p \mid \neg \varphi \mid \varphi \land \psi \mid \mathsf{D}_{\mathsf{G}} \varphi$$

for $p \in P$ and $\emptyset \subset G \subseteq A$. Boolean constants (\top, \bot) and other Boolean operators $(\lor, \rightarrow, \leftrightarrow)$ are defined as usual. Additionally, define $K_i \varphi := D_{\{i\}} \varphi$.

Note how \mathcal{L}_D contains a modality $D_{\mathbf{G}}$ for each non-empty set of agents $\mathbf{G} \subseteq \mathbf{A}$, thanks to which one can build formulas of the form $D_{\mathbf{G}} \varphi$, read as "the agents in **G** have distributed knowledge of φ ". Thus, $K_{\mathbf{i}} \varphi$ is read as "agent **i** has distributed knowledge of φ " or, in other words, "agent **i** knows φ ".

Formulas of \mathcal{L}_D are semantically interpreted in pointed models.

Definition 2.3 (Interpreting $\mathcal{L}_{\mathbf{D}}$ **on pointed models)** Let (M, w) be a pointed model with $M = \langle W, R, V \rangle$. The satisfiability relation \Vdash between (M, w) and a formula in $\mathcal{L}_{\mathbf{D}}$ is defined inductively. Boolean cases are as usual; for the rest,

 $\begin{array}{ll} (M,w) \Vdash p & \text{iff}_{def} & w \in V(p), \\ (M,w) \Vdash \mathsf{D}_{\mathsf{G}} \varphi & \text{iff}_{def} & \text{for all } u \in W, \text{ if } R^{\mathsf{D}}_{\mathsf{G}} wu \text{ then } (M,u) \Vdash \varphi. \end{array}$

A formula φ is valid on $\mathbf{M}_{\mathbf{A}}$ (notation: $\Vdash \varphi$) if and only if $(M, w) \Vdash \varphi$ for every $w \in \mathfrak{D}(M)$ of every M in $\mathbf{M}_{\mathbf{A}}$. By defining the truth-set of a formula as $\llbracket \varphi \rrbracket^{M} := \{w \in W \mid (M, w) \Vdash \varphi\}$ (so $\llbracket \varphi \rrbracket^{M}$ is the set of φ -worlds in M, that is, the worlds in M where φ holds), one can state equivalently that φ is valid on $\mathbf{M}_{\mathbf{A}}$ if and only if $\llbracket \varphi \rrbracket^{M} = \mathfrak{D}(M)$ for every M in $\mathbf{M}_{\mathbf{A}}$.

The semantic interpretation of $D_{\mathbf{G}} \varphi$ deserves some comments. Recall: $R_{\mathbf{G}}^{\mathrm{D}}$ is the *intersection* of the relations of agents in **G**. Thus, $R_{\mathbf{G}}^{\mathrm{D}}wu$ holds if and only if $R_{\mathbf{i}}wu$ holds for *every* **i** in **G**, that is, if and only if *every* agent in **G** considers u possible when at w or, equivalently, if and only if *no* agent in **G** can discard u when at w. Using the notation $\llbracket \cdot \rrbracket$, the semantic interpretation of $D_{\mathbf{G}}\varphi$ is equivalently stated as

$$(M, w) \Vdash D_{\mathbf{G}} \varphi \quad \text{iff} \quad R_{\mathbf{c}}^{\mathrm{D}}(w) \subseteq \llbracket \varphi \rrbracket^{M}$$


Note also that the abbreviation $K_i \varphi$ behaves as expected:

 $(M,w) \Vdash \mathsf{K}_{\mathbf{i}} \varphi \quad \text{iff} \quad (M,w) \Vdash \mathsf{D}_{\{\mathbf{i}\}} \varphi \quad \text{iff} \quad R^{\mathsf{D}}_{\{\mathbf{i}\}}(w) \subseteq [\![\varphi]\!]^M \quad \text{iff} \quad R_{\mathbf{i}}(w) \subseteq [\![\varphi]\!]^M \,,$

so agent **i** knows φ at (*M*, *w*) if and only if every world she cannot distinguish from *w* is a φ -world.

Example 2.1 Here are some examples of this setting.

(*i*) Take $\mathbf{A} = \{\mathbf{a}, \mathbf{b}, \mathbf{c}\}$ and $\mathbf{P} = \{p, q, r\}$. Consider $M_1 = \langle \{w_0, w_1, w_2, w_3\}, R, V \rangle$, a model whose indistinguishability relations and valuation function are as in the diagram below (each world shows exactly the atoms true at it); take w_0 to be the evaluation point (double-circled in the diagram).



At (M_1, w_0) all atoms are true; yet, no agent knows this. First, agent **a** knows that *p* holds, but knows the truth value of neither *q* nor *r*:

$$(M_1, w_0) \Vdash \mathbf{K}_{\mathbf{a}} p \land (\neg \mathbf{K}_{\mathbf{a}} q \land \neg \mathbf{K}_{\mathbf{a}} \neg q) \land (\neg \mathbf{K}_{\mathbf{a}} r \land \neg \mathbf{K}_{\mathbf{a}} \neg r).$$

Then, **b** knows that *q* holds, but knows the truth value of neither *p* nor *r*:

$$(M_1, w_0) \Vdash (\neg \mathbf{K}_{\mathbf{b}} p \land \neg \mathbf{K}_{\mathbf{b}} \neg p) \land \mathbf{K}_{\mathbf{b}} q \land (\neg \mathbf{K}_{\mathbf{b}} r \land \neg \mathbf{K}_{\mathbf{b}} \neg r).$$

Finally, **c** knows that *r* holds, but knows the truth value of neither *p* nor *q*:

$$(M_1, w_0) \Vdash (\neg \mathbf{K_c} p \land \neg \mathbf{K_c} \neg p) \land (\neg \mathbf{K_c} q \land \neg \mathbf{K_c} \neg q) \land \mathbf{K_c} r.$$


Still, each agent knows that **a** knows *p*'s truth-value, that **b** knows *q*'s truth-value, and that **c** knows *r*'s truth-value:

$$(M_1, w_0) \Vdash \bigwedge_{\mathbf{i} \in [\mathbf{a}, \mathbf{b}, \mathbf{c}]} \mathbf{K}_{\mathbf{i}} \left((\mathbf{K}_{\mathbf{a}} \, p \lor \mathbf{K}_{\mathbf{a}} \, \neg p) \land (\mathbf{K}_{\mathbf{b}} \, q \lor \mathbf{K}_{\mathbf{b}} \, \neg q) \land (\mathbf{K}_{\mathbf{c}} \, r \lor \mathbf{K}_{\mathbf{c}} \, \neg r) \right).$$

Finally, agents would benefit from sharing their individual information. In particular, if they all shared, they would know which the real situation is:

 $(M_1, w_0) \Vdash \mathcal{D}_{\{\mathbf{a}, \mathbf{b}\}}(p \land q) \land \mathcal{D}_{\{\mathbf{a}, \mathbf{c}\}}(p \land r) \land \mathcal{D}_{\{\mathbf{b}, \mathbf{c}\}}(q \land r) \land \mathcal{D}_{\{\mathbf{a}, \mathbf{b}, \mathbf{c}\}}(p \land q \land r).$

(*ii*) Let **A** and **P** be as in Item (*i*); consider the pointed model depicted below.



Again, all atoms are true in the real situation; yet, no agent knows this. On the one hand, **a** knows $p \lor q$ without knowing the truth-value of p or q,

$$(M_2, w_0) \Vdash K_{\mathbf{a}}(p \lor q) \land (\neg K_{\mathbf{a}} p \land \neg K_{\mathbf{a}} \neg p) \land (\neg K_{\mathbf{a}} q \land \neg K_{\mathbf{a}} \neg q).$$

On the other hand, **b** knows $q \lor r$ without knowing the truth-value of q or r:

$$(M_2, w_0) \Vdash \mathbf{K}_{\mathbf{b}}(q \lor r) \land (\neg \mathbf{K}_{\mathbf{b}} q \land \neg \mathbf{K}_{\mathbf{b}} \neg q) \land (\neg \mathbf{K}_{\mathbf{b}} r \land \neg \mathbf{K}_{\mathbf{b}} \neg r).$$


Agent **c** has slightly more information, as she knows that *q* is true but still ignores the truth-value of *p* and *r*:

$$(M_2, w_0) \Vdash (\neg \operatorname{K}_{\mathbf{c}} p \land \neg \operatorname{K}_{\mathbf{c}} \neg p) \land \operatorname{K}_{\mathbf{c}} q \land (\neg \operatorname{K}_{\mathbf{c}} r \land \neg \operatorname{K}_{\mathbf{c}} \neg r).$$

This time, while communicating would help **a** and **b**, it would not help **c**. In fact, collectively, the agents do not have enough information to find out which the real situation is:

$$(M_2, w_0) \Vdash \mathcal{D}_{\{\mathbf{a}, \mathbf{b}\}} q \land \mathcal{D}_{\{\mathbf{a}, \mathbf{c}\}} q \land \mathcal{D}_{\{\mathbf{b}, \mathbf{c}\}} q \land \neg \mathcal{D}_{\{\mathbf{a}, \mathbf{b}, \mathbf{c}\}}(p \land r).$$

(*iii*) Take $\mathbf{A} = \{\mathbf{a}, \mathbf{b}\}$ and $\mathbf{P} = \{p, q\}$; consider (M_3, w_0) depicted below.



In the pointed model, both p and q are true. Both agents have partial information about this: while agent **a** knows p but does not know whether q, agent **b** does not know whether p but knows q:

$$(M_3, w_0) \Vdash \mathbf{K}_{\mathbf{a}} p \land (\neg \mathbf{K}_{\mathbf{a}} q \land \neg \mathbf{K}_{\mathbf{a}} \neg q) \land (\neg \mathbf{K}_{\mathbf{b}} p \land \neg \mathbf{K}_{\mathbf{b}} \neg p) \land \mathbf{K}_{\mathbf{b}} q.$$

However, both agents have misleading information about what the other knows: **a** thinks **b** knows *p* without knowing whether *q*, and **b** thinks **a** does not know whether *p* but knows *q*:

$$(M_3, w_0) \Vdash \mathbf{K}_{\mathbf{a}}(\mathbf{K}_{\mathbf{b}} p \land (\neg \mathbf{K}_{\mathbf{b}} q \land \neg \mathbf{K}_{\mathbf{b}} \neg q)) \land \mathbf{K}_{\mathbf{b}}((\neg \mathbf{K}_{\mathbf{a}} p \land \neg \mathbf{K}_{\mathbf{a}} \neg p) \land \mathbf{K}_{\mathbf{a}} q).$$

If they were to share their (partially misleading) information, they would believe inconsistencies:

$$(M_3, w_0) \Vdash \mathcal{D}_{\{\mathbf{a}, \mathbf{b}\}} \perp.$$

4

Axiom system As the reader can imagine, there are other alternatives for defining a logical framework describing the individual and distributed knowledge a set of agents might have. The epistemic logic framework recalled in this section is based on some concrete choices (e.g., relying on a model that represents uncertainty [via relations], and then defining knowledge in terms of it), and these choices define the properties of the notions of knowledge that arise. Still, some properties might not be easy to identify just from the model and the language's semantic interpretation. In such cases, it is useful to look for an axiom system characterising the formulas in \mathcal{L}_D that are valid in pointed (multi-agent relational) models. By doing so, the axiom system provides a list of the essential laws governing the behaviour and interaction of individual and distributed knowledge in this setting.

It is well-known (e.g., Halpern and Moses 1985, Fagin et al. 1995, Baltag and Smets 2020) that the axiom system L_D , whose axioms and rules are shown on Table 1, characterise the formulas in \mathcal{L}_D that are valid in pointed M_A -models. While PR and MP characterise the behaviour of Boolean operators, axioms K_D , M_D and rule G_D characterise distributed knowledge: D_G contains all validities (rule G_D), it is closed under modus ponens (axiom K_D) and it is monotone on the set of agents (axiom M_D : if φ is distributively known by the agents in G, then it is also distributively known by any larger group G').

$PR: \vdash \varphi$	for φ a propositionally valid scheme	$MP \colon \mathrm{If} \vdash \varphi \text{ and } \vdash \varphi \to \psi \text{ then } \vdash \psi$

$K_{D}\!\!:\vdashD_{G}(\varphi\rightarrow\psi)\rightarrow(D_{G}\varphi\rightarrowD_{G}\psi)$	G_{D} : If $\vdash \varphi$ then $\vdash D_{G}\varphi$
$M_{D}: \vdash D_{G} \varphi \to D_{G'} \varphi \text{for } G \subseteq G'$	

Table 1: Axiom system L_D , for \mathcal{L}_D w.r.t. models in M_A .

Theorem 1 The axiom system L_D (*Table 1*) is sound and strongly complete for formulas in \mathcal{L}_D w.r.t. models in $M_{\mathbf{A}}$.⁴

3 Sharing everything with everybody

As discussed before, the concept of distributed knowledge relies on the idea of agents communicating their individual information. Indeed, the fact that a set of agents **G** has distributed knowledge of φ (D_G φ) encodes the intuition that, if they all would share their information, then afterwards each one of them would know that φ is the case. This 'encoding' can be made explicit by following the *DEL* approach: define an operation that, when receiving an initial model representing the agents' individual information, returns the model that results from the agents sharing their information. The current section explores two variations of this idea: an operation representing an action through which *all* agents share all her information with everybody (Subsection 3.1), and an operation with everybody (Subsection 3.2).

3.1 *Everybody* shares everything with everybody

The simplest form of communication among *EL* agents is one through which *every* agent shares everything with everybody. This will be called an act of $\forall \forall \forall$ -communication.

Operation and modality Recall that a multi-agent relational model represents not the knowledge of each agent, but rather her uncertainty: the worlds she considers possible from a given one. Thus, in this setting, an action through which every agent shares everything she knows with everybody corresponds, formally, to a model operation through which every agent discards every possibility that has been already discarded by any agent. Such a operation is straightforward: the indistinguishability relation of each agent in the new model is defined as the intersection of the relations of all agents in the original model.

⁴Recall that D_{\emptyset} is *not* a modality in \mathcal{L}_{D} . If it were, then L_{D} would need further axioms and rules. In fact, since $R_{\emptyset}^{D}(w) = \mathfrak{D}(M)$ for any $w \in \mathfrak{D}(M)$ and any $M \in \mathbf{M}_{\mathbf{A}}$, it follows that $(M, w) \Vdash D_{\emptyset} \varphi$ if and only if $(M, u) \Vdash \varphi$ for all $u \in \mathfrak{D}(M)$. In other words, D_{\emptyset} is nothing but the *global universal modality* (Goranko and Passy 1992). Because of this, an axiom system for D_{\emptyset} requires not only extending K_{D} , G_{D} and M_{D} to allow $\mathbf{G} = \emptyset$, but also the use of three additional axioms: $\vdash D_{\emptyset} \varphi \to \varphi$, $\vdash D_{\emptyset} D_{\emptyset} \varphi \to D_{\emptyset} \varphi$ and $\vdash D_{\emptyset} \neg D_{\emptyset} \varphi \to \neg D_{\emptyset} \varphi$.

Definition 3.1 (VV-communication) Let $M = \langle W, R, V \rangle$ be in **M**_A. The relations in the **M**_A-model $M^! = \langle W, R^!, V \rangle$ are given, for each $\mathbf{i} \in \mathbf{A}$, as

$$R^!_{\mathbf{i}} := R^{\mathbf{D}}_{\mathbf{A}}.$$

Thus, after the operation an agent **i** cannot distinguish *u* from *w* (that is, $R^{!}_{i}wu$) if and only if, before the operation, *no agent* in **A** could distinguish *u* from *w* (that is, $R_{j}wu$ for all $\mathbf{j} \in \mathbf{A}$).

It should be emphasised that, despite the given intuition, the just defined operation is not one through which the agents share *the information that has allowed them to discard certain possibility*. As discussed in the introduction, relational models only represent the epistemic uncertainty of the agents (the edges). Thus, an agent's communication amounts to sharing the epistemic possibilities she has already discarded (by indicating which edges are *not* in her indistinguishability relation), so others can discard them too.⁵

Here are some small yet useful observations.

- Each new relation $R_{i}^{!}$ can be equivalently defined as $R_{i} \cap R_{A \setminus \{i\}}^{D}$.
- Since $R_{\mathbf{i}}^{!}(w) = R_{\mathbf{A}}^{\mathsf{D}}(w)$ is a subset of $R_{\mathbf{i}}(w)$ for any world w in any model M, it follows that the action of $\forall \forall \forall$ -communication can only *reduce* the uncertainty of each agent.
- The operation preserves universal relational properties: if all relations in {*R*_j | j ∈ A} are, e.g., reflexive/transitive/symmetric/Euclidean, then so is each resulting *R*[!]_i. Thus, in particular, the operation preserves equivalence relations.

Here is a modality for describing the effects of $\forall \forall \forall$ -communication.

Definition 3.2 (Modality [!]; language $\mathcal{L}_{D, [!]}$) The language $\mathcal{L}_{D, [!]}$ extends \mathcal{L}_{D} with a modality [!], semantically interpreted in a pointed model (M, w) as

 $(M, w) \Vdash [!] \varphi \quad \text{iff}_{def} \quad (M^!, w) \Vdash \varphi.$


Using $\llbracket \cdot \rrbracket$, observe how $w \in \llbracket [!] \varphi \rrbracket^M$ if and only if $w \in \llbracket \varphi \rrbracket^{M^!}$. Thus,

$$\llbracket \llbracket ! \rrbracket \varphi \rrbracket^{M} = \llbracket \varphi \rrbracket^{M'}.$$

Example 3.1 Here are examples of this operation at work.

(*i*) Recall the model *M*₁ from Example 2.1.(*i*) (diagram below on the left).


⁵Other proposals for representing an agent's knowledge do keep track of the justifications (Artëmov 2008), evidence (van Benthem and Pacuit 2011, Baltag et al. 2016, Özgün 2017) or arguments (Shi et al. 2017, 2021) this knowledge is based on. In such settings, the 'reasons' each agent has for her knowledge are present, and thus one can define model operations through which this information is shared.

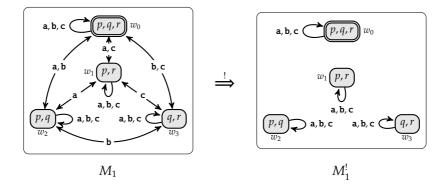

As shown in the diagram above on the right, the $\forall \forall \forall$ operation removes those edges that were not in the indistinguishability relation of *every* agent (i.e., it preserves only **A**-edges). Thus,


$$(M_1, w_0) \Vdash \mathcal{D}_{\{\mathbf{a}, \mathbf{b}, \mathbf{c}\}}(p \land q \land r) \land [!] \bigwedge_{\mathbf{i} \in \{\mathbf{a}, \mathbf{b}, \mathbf{c}\}} \mathcal{K}_{\mathbf{i}}(p \land q \land r).$$

(ii) Analogously, recall M₂ from Example 2.1.(ii), shown below on the left.

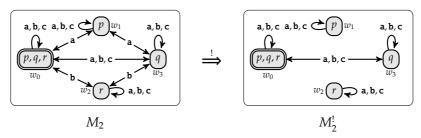

Hence,
$$(M_2, w_0) \Vdash D_{\{\mathbf{a}, \mathbf{b}, \mathbf{c}\}} q \land [!] \bigwedge_{\mathbf{i} \in \{\mathbf{a}, \mathbf{b}, \mathbf{c}\}} K_{\mathbf{i}} q.$$

(iii) Finally, recall M₃ (Example 2.1.(iii)), shown below on the left.

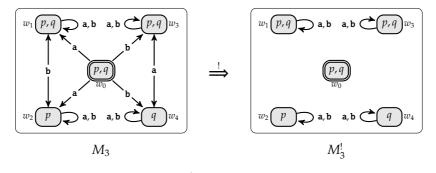

Thus, $(M_3, w_0) \Vdash D_{\{\mathbf{a}, \mathbf{b}\}} \perp \land [!] \bigwedge_{\mathbf{i} \in \{\mathbf{a}, \mathbf{b}\}} K_{\mathbf{i}} \perp.$

Properties Here are some properties describing the effects of the $\forall \forall \forall$ operation. First, intuitively, the action turns distributive knowledge of the whole group into individual knowledge. The following proposition shows that this is true only up to a certain extent.

Proposition 3.1 Let (M, w) be a pointed $\mathbf{M}_{\mathbf{A}}$ model; take $\mathbf{i} \in \mathbf{A}$. Then, $(M, w) \Vdash D_{\mathbf{A}} \varphi \rightarrow [!] \mathbf{K}_{\mathbf{i}} \varphi$ holds when M and φ are such that $\llbracket \varphi \rrbracket^{M} \subseteq \llbracket \varphi \rrbracket^{M^{!}}$ (i.e., when applying "!" to M does not reduce φ 's truth-set). However, $\Vdash D_{\mathbf{A}} \varphi \rightarrow [!] \mathbf{K}_{\mathbf{i}} \varphi$.

Proof. By semantic interpretation, $(M, w) \Vdash D_{\mathbf{A}} \varphi$ holds for a given (M, w) if and only if $R_{\mathbf{A}}^{\mathrm{D}}(w) \subseteq \llbracket \varphi \rrbracket^{M}$. But, by the definition of $R^{!}_{\mathbf{i}}$ (Definition 3.1), $R^{!}_{\mathbf{i}}(w) \subseteq R_{\mathbf{A}}^{\mathrm{D}}(w)$ (∀∀∀ can only reduce uncertainty), so $R^{!}_{\mathbf{i}}(w) \subseteq \llbracket \varphi \rrbracket^{M}$. Hence, by the assumption, $R^{!}_{\mathbf{i}}(w) \subseteq \llbracket \varphi \rrbracket^{M^{!}}$ and therefore $(M^{!}, w) \Vdash \mathrm{K}_{\mathbf{i}} \varphi$, that is, $(M, w) \Vdash [!] \mathrm{K}_{\mathbf{i}} \varphi$. However, $\nvDash D_{\mathbf{A}} \varphi \rightarrow [!] \mathrm{K}_{\mathbf{i}} \varphi$, as shown by taking $\varphi := \neg \mathrm{K}_{\mathbf{b}} p$ and observing that, on M_{1} in Example 3.1.(*i*), $(M_{1}, w_{0}) \Vdash \mathrm{D}_{[\mathbf{a}, \mathbf{b}, \mathbf{c}]} \neg \mathrm{K}_{\mathbf{b}} p \land \neg [!] \mathrm{K}_{\mathbf{a}} \neg \mathrm{K}_{\mathbf{b}} p$. In general, there is not guarantee that every world making φ true in a given M (a world in $\llbracket \varphi \rrbracket^{M}$) is also a world making φ true *in* $M^{!}$ (a world in $\llbracket \varphi \rrbracket^{M^{!}}$).

The fact that $D_{\mathbf{A}} \varphi \rightarrow [!] K_{\mathbf{i}} \varphi$ is not valid should not be taken to mean that $\forall \forall \forall$ is flawed. First, this formula one intuitively expects to be valid is so in those situations one intuitively considers: those in which φ describes *ontic* (i.e., propositional) facts.⁶ The formula is in fact valid for a larger class of formulas in \mathcal{L}_D including, e.g., those describing knowledge about propositional formulas $\{K_{\mathbf{j}} \gamma \mid \gamma \text{ is propositiona}\}^7$ and more. Second, the formula is not valid for an arbitrary $\varphi \in \mathcal{L}_D$ because \mathcal{L}_D can express not only an agent's (distributed) knowledge but also her *ignorance*, which might be reduced by the operation. This is used in the counterexample in Proposition 3.1, as $\neg K_{\mathbf{b}} p$ states that "agent **b** does not know that *p* holds".

Here are two further results.

Proposition 3.2 Let $M = \langle W, R, V \rangle$ be in $\mathbf{M}_{\mathbf{A}}$; let $M^! = \langle W, R^!, V \rangle$ and $(M^!)^! = \langle W, (R^!)^!, V \rangle$ be as indicated in Definition 3.1. Then,

(i)
$$(R^!)^{\mathrm{D}}_{\mathbf{G}} = R^{\mathrm{D}}_{\mathbf{A}}$$
 for every $\mathbf{G} \subseteq \mathbf{A}$; (ii) $(R^!)^!_{\mathbf{i}} = R^!_{\mathbf{i}}$ for every $\mathbf{i} \in \mathbf{A}$.

Proof. (*i*) For any $\mathbf{G} \subseteq \mathbf{A}$, the relation $(R^!)_{\mathbf{G}}^{\mathrm{D}}$ is $\bigcap_{\mathbf{k}\in\mathbf{G}} R^!_{\mathbf{k}}$ (def. of $(R^!)_{\mathbf{G}}^{\mathrm{D}}$), equal to $\bigcap_{\mathbf{k}\in\mathbf{G}} R^{\mathrm{D}}_{\mathbf{A}}$ (def. of $(R^!)_{\mathbf{G}}^{\mathrm{D}}$), equal to $R^{\mathrm{D}}_{\mathbf{A}}$. (*ii*) For any $\mathbf{i} \in \mathbf{A}$, the relation $(R^!)_{\mathbf{i}}^!$ is $(R^!)_{\mathbf{A}}^{\mathrm{D}}$ (def. of $(R^!)$), equal to $R^{\mathrm{D}}_{\mathbf{A}}$ (Item (*i*)), equal to $R^!_{\mathbf{i}}$ for any $\mathbf{i} \in \mathbf{A}$ (def. of $R^!_{\mathbf{i}}$).

Proposition 3.2 provides two interesting observations. First, the relation for interpreting $D_{\mathbf{G}}$ in the new model, $(R^!)_{\mathbf{G}}^{\mathrm{D}}$, is the same as the relation for interpreting $D_{\mathbf{A}}$ in the original model, $R_{\mathbf{A}}^{\mathrm{D}}$. Thus, for talking about distributed knowledge after $\forall \forall \forall$ communication (what $(R^!)_{\mathbf{G}}^{\mathrm{D}}$ encodes), the modality [!] is not needed: it is enough to use the modality $D_{\mathbf{A}}$ (the one for $R_{\mathbf{A}}^{\mathrm{D}}$) *in the appropriate way* (see the translation of Definition A.1, used for the completeness argument).

The second observation states that each relation $(R^!)^!_{\mathbf{i}}$ in the model after two $\forall \forall \forall$ acts is exactly as $R^!_{\mathbf{i}}$, its matching relation in the model after a single $\forall \forall \forall$ act. Since $M^!$ and $(M^!)^!$ have the same domain and atomic valuation, this implies that the $\forall \forall \forall$ operation is idempotent: $M^! = (M^!)^!$ for any M in $\mathbf{M}_{\mathbf{A}}$.

Thus,

⁶The $\forall \forall \forall$ -act does not affect atomic valuations, so $\llbracket \gamma \rrbracket^M = \llbracket \gamma \rrbracket^{M^!}$ for every M and every propositional γ . Thus, by Proposition 3.1, $\Vdash D_{\mathbf{A}} \gamma \rightarrow [!] \mathbf{K}_{\mathbf{i}} \gamma$.

⁷By definition, $w \in \llbracket K_j \gamma \rrbracket^M$ if and only if $R_j(w) \subseteq \llbracket \gamma \rrbracket^M$. But $R_j^!(w) \subseteq R_j$ and $\llbracket \gamma \rrbracket^M = \llbracket \gamma \rrbracket^{M^!}$, so $R_j^!(w) \subseteq \llbracket \gamma \rrbracket^{M^!}$ and thus $w \in \llbracket K_j \gamma \rrbracket^{M^!}$. Hence, $\llbracket K_j \gamma \rrbracket^M \subseteq \llbracket K_j \gamma \rrbracket^{M^!}$ so $\Vdash D_{\mathbf{A}} K_j \gamma \to [!] K_i K_j \gamma$.

Proposition 3.3 (*i*) \Vdash [!] $D_{\mathsf{G}}\varphi \leftrightarrow D_{\mathsf{A}}$ [!] φ ; (*ii*) \Vdash [!] [!] $\varphi \leftrightarrow$ [!] φ .

Proof. Let $M = \langle W, R, V \rangle$ be in $\mathbf{M}_{\mathbf{A}}$. (*i*) By definition, $w \in \llbracket [!] \mathbf{D}_{\mathbf{G}} \varphi \rrbracket^{M}$ holds if and only if $w \in \llbracket \mathbf{D}_{\mathbf{G}} \varphi \rrbracket^{M^{!}}$, which holds if and only if $(R^{!})_{\mathbf{G}}^{\mathbf{D}}(w) \subseteq \llbracket \varphi \rrbracket^{M^{!}}$. But, from Proposition 3.2.(*i*) and semantic interpretation, the latter is equivalent to $R_{\mathbf{A}}^{\mathbf{D}}(w) \subseteq \llbracket [!] \varphi \rrbracket^{M}$, which holds if and only if $w \in \llbracket \mathbf{D}_{\mathbf{A}} [!] \varphi \rrbracket^{M}$. (*ii*) By definition, $w \in \llbracket [!] [!] \varphi \rrbracket^{M}$ if and only if $w \in \llbracket [!] \varphi \rrbracket^{M^{!}}$, i.e., if and only if $w \in \llbracket \varphi \rrbracket^{(M^{!})^{!}}$. Then, as a consequence of Proposition 3.2.(*ii*), the latter holds if and only if $w \in \llbracket \varphi \rrbracket^{M^{!}}$, that is, if and only if $w \in \llbracket [!] \varphi \rrbracket^{M}$.

In particular, the first item of Proposition 3.3 provides a characterisation of the knowledge any agent **i** has after an act of $\forall \forall \forall$ -communication:

$$\Vdash [!] \mathbf{K}_{\mathbf{i}} \varphi \leftrightarrow \mathbf{D}_{\mathbf{A}} [!] \varphi.$$

Axiom system To axiomatise a modality whose semantic interpretation relies on a model operation, a common *DEL* strategy is to provide *recursion axioms*: valid formulas and validity-preserving rules defining a translation that takes a formula with model-changing modalities (a formula in the 'dynamic' language) and returns one without them (a formula in the initial 'static' language). To prove soundness within this strategy, it is enough to show that the new axioms and rules are valid and preserve validity; this also shows that a formula and its translation are *semantically* equivalent. To prove completeness, notice that the recursion axioms make a formula and its translation *provably* equivalent, and thus one can rely on the completeness of the axiom system for the 'static' language. The reader is referred to van Ditmarsch et al. (2008, Chapter 7) and Wang and Cao (2013) for an extensive explanation of this technique.

For the case at hand, the recursion axioms appear on Table 2. Axiom A_1^p states that [!] does not affect the truth value of atomic propositions, and axioms A_1^- and A_1^h state, respectively, that [!] commutes with negation and distributes over conjunction. Axiom A_1^D (Proposition 3.3) indicates that what a group **G** knows distributively after the operation is exactly what the whole group **A** knew distributively about [!]'s effects. Finally, RE₁ states that replacing logical equivalents within the scope of [!] preserves logical equivalence. As detailed in the proof of Theorem 2 (Subsection A.1), these axioms and rule define an "inside-out' translation (see Plaza 1989 and Gerbrandy 1999, Section 4.4) that, when dealing with nested [!], works first with the deepest occurrence before dealing with the rest.

$A^p_!: \ \vdash [!] p \leftrightarrow p$	$A^{\mathrm{D}:}_{!} \vdash [!] D_{G} \varphi \leftrightarrow D_{\mathtt{A}} [!] \varphi$
$A^{\neg}_{!}: \vdash [!] \neg \varphi \leftrightarrow \neg [!] \varphi$	$RE_{!}: \text{ If } \vdash \varphi_1 \leftrightarrow \varphi_2 \text{ then } \vdash [!] \varphi_1 \leftrightarrow [!] \varphi_2$
$A^{\wedge}_{!}: \vdash [!](\varphi_{1} \land \varphi_{2}) \leftrightarrow ([!]\varphi_{1} \land [!]\varphi_{2})$	

Table 2: Additional axioms and rules for $L_{D,[!]}$, which characterises the formulas in $\mathcal{L}_{D,[!]}$ that are valid on models in $M_{\mathbb{A}}$.

Theorem 2 The axiom system $L_{D,[!]}$ (L_D [Table 1]+Table 2) is sound and strongly complete for formulas in $\mathcal{L}_{D,[!]}$ valid over models in $M_{\mathbb{A}}$.

3.2 *Somebody* shares everything with everybody

A simple generalisation of the act of $\forall \forall \forall$ communication is one where only *some* agents share everything they know with everybody. This will be called an act of $\exists \forall \forall$ -communication.

Operation and modality The operation representing $\exists \forall \forall$ communication is a simple variation of the $\forall \forall \forall$ -case. First, worlds and valuation are preserved, as before. Then, the indistinguishability relation of each agent in the new model is defined as the intersection of her original relation with those of the agents that share their information (the *senders*).

Definition 3.3 (\exists \forall \forall-communication) Let $M = \langle W, R, V \rangle$ be in $\mathbf{M}_{\mathbf{A}}$; take $\mathbf{S} \subseteq \mathbf{A}$. The relations in the $\mathbf{M}_{\mathbf{A}}$ -model $M^{\mathbf{S}!} = \langle W, R^{\mathbf{S}!}, V \rangle$ are given, for each $\mathbf{i} \in \mathbf{A}$, as

$$R^{\mathbf{S}!}_{\mathbf{i}} := R_{\mathbf{i}} \cap R^{\mathbf{D}}_{\mathbf{S}}.$$

Thus, after the operation, an agent **i** cannot distinguish *u* from *w* (that is, $R^{s!}{}_{i}wu$) if and only if, before the operation, neither she nor any agent *in* **S** could distinguish *u* from *w* (that is, $R_{i}wu$ and $R_{s}^{D}wu$). Here are some small and yet useful observations.

- Obviously, $R^{\mathbf{S}!}_{\mathbf{i}} = R^{\mathbf{D}}_{\mathbf{S} \cup \{\mathbf{i}\}}$ and, moreover, $\mathbf{i} \in \mathbf{S}$ implies $R^{\mathbf{S}!}_{\mathbf{i}} = R^{\mathbf{D}}_{\mathbf{S}}$.
- For any world w in any model M, the set $R^{\mathsf{S!}}_{\mathbf{i}}(w) = R_{\mathbf{i}}(w) \cap R^{\mathsf{D}}_{\mathsf{S}}(w)$ is a subset of $R_{\mathbf{i}}(w)$. Hence, just as $\forall \forall \forall$, the action of $\exists \forall \forall$ -communication can only *reduce* the uncertainty of each agent.
- As one might expect, an $\exists \forall \forall$ -communication with **A** the communicating agents is exactly an $\forall \forall \forall$ -communication, as $R^{\mathbf{A}!}_{\mathbf{i}} = R^!_{\mathbf{i}}$ for every $\mathbf{i} \in \mathbf{A}$ in any model $M = \langle W, R, V \rangle$.
- If R_i and the relations in $\{R_j \mid j \in S\}$ are all reflexive (resp., transitive, symmetric, Euclidean), then so is the resulting $R_i^!$. In particular, the $\exists \forall \forall$ operation preserves equivalence relations.

Here is the associated modality.

Definition 3.4 (Modality [S!]; language $\mathcal{L}_{D, [S!]}$) The language $\mathcal{L}_{D, [S!]}$ extends \mathcal{L}_D with a modality **[S!]** for each set of agents **S** \subseteq **A**. Its semantic interpretation in a pointed model (*M*, *w*) is given by


$$(M,w) \Vdash [\mathbf{S}!] \varphi \quad \text{iff}_{def} \quad (M^{\mathbf{S}!},w) \Vdash \varphi.$$

Using the alternative notation, $w \in \llbracket [S!] \varphi \rrbracket^M$ if and only if $w \in \llbracket \varphi \rrbracket^{M^{S!}}$. Thus,

$$\llbracket [\mathbf{S}!] \varphi \rrbracket^{M} = \llbracket \varphi \rrbracket^{M^{\mathbf{S}!}}$$

Example 3.2 Here are examples of this operation at work.

(*i*) Recall the model *M*₁ from Example 2.1.(*i*) (diagram below on the left).

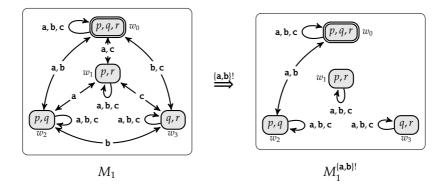


The action {**a**, **b**}! produces the model depicted by the diagram above on the right. The new uncertainty of each sharing agent is given by the old uncertainty of the sharers (thus, e.g., $R^{[\mathbf{a},\mathbf{b}]!}_{\mathbf{a}} = R^{D}_{[\mathbf{a},\mathbf{b}]}$), and the new uncertainty of each non-sharing agent is given by the old uncertainty of the sharers *and herself* (thus, e.g., $R^{[\mathbf{a},\mathbf{b}]!}_{\mathbf{c}} = R^{D}_{[\mathbf{a},\mathbf{b},\mathbf{c}]}$). Thus,

$$(M_1, w_0) \Vdash \bigwedge \left\{ \begin{array}{l} D_{[\mathbf{a}, \mathbf{b}]}(p \land q) \land K_{\mathbf{c}} r, \\ \left[\{\mathbf{a}, \mathbf{b}\}! \right] \left(\bigwedge \left\{ \begin{array}{l} \bigwedge (K_{\mathbf{i}}(p \land q) \land (\neg K_{\mathbf{i}} r \land \neg K_{\mathbf{i}} \neg r)), \\ \mathbf{i} \in [\mathbf{a}, \mathbf{b}] \\ K_{\mathbf{c}}(p \land q \land r) \end{array} \right\} \right) \right\}.$$

In words, while **a** and **b** know $p \land q$ distributively, **c** knows *r*. Then, after **a** and **b** share all their information to everyone, they both get to know $p \land q$ but still do not know whether *r*. However, *c* gets to know what the real situation is. Analogous situations result if the communicating agents are $\{\mathbf{a}, \mathbf{c}\}$ or $\{\mathbf{b}, \mathbf{c}\}$.

(*ii*) Now recall *M*₂ from Example 2.1.(*ii*) (diagram below on the left).

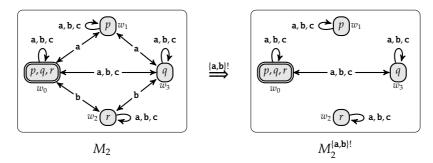

The model $M_2^{[\mathbf{a},\mathbf{b}]!}$, which results from **a** and **b** sharing all their information to everyone, appears above on the right. Note that the same model results if **c** is the only communicating agent (i.e., $M_2^{[\mathbf{a},\mathbf{b}]!} = M_2^{[\mathbf{c}]!}$), and also if the communication is $\forall \forall \forall (\text{i.e.}, M_2^{[\mathbf{a},\mathbf{b}]!} = M_2^!$; see Example 3.1.(*ii*)). Thus,

$$(M_2, w_0) \Vdash \big([\{\mathbf{a}, \mathbf{b}\}!] \varphi \leftrightarrow [\{\mathbf{c}\}!] \varphi \big) \land \big([\{\mathbf{a}, \mathbf{b}\}!] \varphi \leftrightarrow [!] \varphi \big).$$

The reason for this is that what agents in $\{a, b\}$ know distributively is exactly what **c** knows individually (i.e., $R^{D}_{[a,b]} = R_{c}$).

Properties What is the effect of a $\exists \forall \forall$ operation? Intuitively, the action turns distributive knowledge of a group into individual knowledge of the group's members. Just as in the $\forall \forall \forall$ case, this is true only up to a certain extent.

Proposition 3.4 Let (M, w) be a pointed $\mathbf{M}_{\mathbf{A}}$ model; take $\mathbf{S} \subseteq \mathbf{A}$ and $\mathbf{i} \in \mathbf{A}$. Then, $(M, w) \Vdash D_{\mathbf{S}} \varphi \to [\mathbf{S}!] \mathbf{K}_{\mathbf{i}} \varphi$ holds when M and φ are such that $[\![\varphi]\!]^M \subseteq [\![\varphi]\!]^{M^{\mathbf{S}!}}$. However, $\nvDash D_{\mathbf{S}} \varphi \to [\mathbf{S}!] \mathbf{K}_{\mathbf{i}} \varphi$.

Proof. As that of Proposition 3.1, here using $R^{S!}_{\mathbf{i}}(w) \subseteq R_{\mathbf{i}}(w)$ (**S**! can only reduce uncertainty). For showing \mathbb{F} D_S $\varphi \to [\mathbf{S}!] \operatorname{K}_{\mathbf{i}} \varphi$ for $\mathbf{i} \in \mathbf{S}$, take $\varphi := \neg \operatorname{K}_{\mathbf{b}} p$ and note that, on M_1 in Example 3.2.(*i*), $(M_1, w_0) \Vdash D_{[\mathbf{a},\mathbf{b}]} \neg \operatorname{K}_{\mathbf{b}} p \land \neg [\{\mathbf{a},\mathbf{b}\}!] \operatorname{K}_{\mathbf{a}} \neg \operatorname{K}_{\mathbf{b}} p$. Again, there is not guarantee that every world making φ true in a given M (a world in $\llbracket \varphi \rrbracket^{M}$) is also a world making φ true *in* $M^{S!}$ (a world in $\llbracket \varphi \rrbracket^{M^{S!}}$).

As in the $\forall \forall \forall \forall$ case, \nvDash D_S $\varphi \rightarrow [S!] K_i \varphi$ for $i \in S$ should not be taken as a drawback for the $\exists \forall \forall$ operation: the formula is valid for the situations one intuitively considers (i.e., when φ is propositional) and also for further fragments of \mathcal{L}_D (see the discussion after Proposition 3.1).

Here are two further results.

Proposition 3.5 Let $M = \langle W, R, V \rangle$ be in $\mathbf{M}_{\mathbf{A}}$: take $\mathbf{S}, \mathbf{S}_1, \mathbf{S}_2 \subseteq \mathbf{A}$. Let $M^{\mathbf{S}!} = \langle W, R^{\mathbf{S}!}, V \rangle$ and $(M^{\mathbf{S}!})^{\mathbf{S}'!} = \langle W, (R^{\mathbf{S}!})^{\mathbf{S}'!}, V \rangle$ be as indicated in Definition 3.3. Then, (i) $(R^{\mathbf{S}!})^{\mathbf{D}}_{\mathbf{G}} = R^{\mathbf{D}}_{\mathbf{S}||\mathbf{G}}$ for $\mathbf{G} \subseteq \mathbf{A}$; (ii) $(R^{\mathbf{S}_1!})^{\mathbf{S}_2!}_{\mathbf{i}} = R^{(\mathbf{S}_1 \cup \mathbf{S}_2)!}_{\mathbf{i}}$ for $\mathbf{i} \in \mathbf{A}$.

Proof. (*i*) For any $\mathbf{G} \subseteq \mathbf{A}$, the relation $(R^{\mathbf{S}!})_{\mathbf{G}}^{\mathbf{D}}$ is $\bigcap_{\mathbf{k}\in\mathbf{G}} R^{\mathbf{S}!}_{\mathbf{k}}$ (def. of $(R^{\mathbf{S}!})_{\mathbf{G}}^{\mathbf{D}}$), equal to $\bigcap_{\mathbf{k}\in\mathbf{G}} R^{\mathbf{S}}_{\mathbf{S}\cup\{\mathbf{k}\}}$ (def. of $(R^{\mathbf{S}!})_{\mathbf{G}}^{\mathbf{D}}$), equal to $R^{\mathbf{D}}_{\mathbf{S}\cup\mathbf{G}}$. (*ii*) For any $\mathbf{i} \in \mathbf{A}$, the relation $(R^{\mathbf{S}_1!})_{\mathbf{S}_2!}^{\mathbf{D}}_{\mathbf{i}}$ is $(R^{\mathbf{S}_1!})_{\mathbf{S}_2\cup\{\mathbf{i}\}}^{\mathbf{D}}$ (def. of $(R^{\mathbf{S}_1!})_{\mathbf{S}_2\cup\{\mathbf{i}\}}^{\mathbf{D}}$), equal to $\bigcap_{\mathbf{k}\in\mathbf{S}_2\cup\{\mathbf{i}\}} R^{\mathbf{S}_1!}_{\mathbf{k}}$ (def. of $(R^{\mathbf{S}_1!})_{\mathbf{S}_2\cup\{\mathbf{i}\}}^{\mathbf{D}}$), equal to $\bigcap_{\mathbf{k}\in\mathbf{S}_2\cup\{\mathbf{i}\}} R^{\mathbf{S}_1!}_{\mathbf{S}_1\cup\mathbf{S}_2\mid\mathbf{i}\}}$ (def. of $R^{\mathbf{S}_1!}_{\mathbf{S}_1\cup\mathbf{S}_2\mid\mathbf{i}\}}$ (def. of $R^{\mathbf{S}_1!}_{\mathbf{S}_1\cup\mathbf{S}_2\mid\mathbf{i}\}$), equal to $R^{(\mathbf{S}_1\cup\mathbf{S}_2)!}_{\mathbf{S}_1\cup\mathbf{S}_2\mid\mathbf{i}\}}$, equal to $R^{(\mathbf{S}_1\cup\mathbf{S}_2)!}_{\mathbf{S}_1\cup\mathbf{S}_2\mid\mathbf{i}\}}$ (def. of $R^{(\mathbf{S}_1\cup\mathbf{S}_2)!}_{\mathbf{S}_1\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S}_2\mid\mathbf{S$

Analogous to Proposition 3.2 for the $\forall\forall\forall\forall$ -case, Proposition 3.5 states two facts. First, it states that the relation for interpreting D_G in the new model, $(R^{S!})_{G}^{D}$, is the same as the relation for interpreting D_{SUG} in the original model, R_{SUG}^{D} . As in the $\forall\forall\forall\forall$ case, this provides a validity (Proposition 3.6.(*i*)) that is crucial for an axiomatisation by translation.

The second fact is relative to how two consecutive $\exists \forall \forall$ acts can be 'comprised' into a single one. More precisely, it indicates how a ' $\exists \forall \forall$ -conversation' in which group S_1 shares first and group S_2 shares second can be replaced by a single $\exists \forall \forall$ -act in which the sharing agents are those in $S_1 \cup S_2$. Given that $(M^{S_1!})^{S_2!}$ and $M^{(S_1\cup S_2)!}$ have the same domain and atomic valuation, this implies that $(M^{S_1!})^{S_2!} = M^{(S_1\cup S_2)!}$ holds for any M in $M_{\mathbf{A}}$.

Thus,

Proposition 3.6 (*i*) \Vdash [S!] $D_{\mathsf{G}} \varphi \leftrightarrow D_{\mathsf{S} \cup \mathsf{G}}$ [S!] φ ; (*ii*) \Vdash [S₁!] [S₂!] $\varphi \leftrightarrow$ [(S₁ \cup S₂)!] φ .

Proof. Let $M = \langle W, R, V \rangle$ be in $\mathbf{M}_{\mathbf{A}}$. (*i*) By definition, $w \in \llbracket [S!] D_{\mathbf{G}} \varphi \rrbracket^{M}$ holds if and only if $w \in \llbracket D_{\mathbf{G}} \varphi \rrbracket^{M^{S!}}$, which holds if and only if $(R^{\mathbf{S}!})^{\mathbf{D}}_{\mathbf{G}}(w) \subseteq \llbracket \varphi \rrbracket^{M^{\mathbf{S}!}}$. But, from Proposition 3.5.(*i*) and semantic interpretation, the latter is equivalent to $R^{\mathbf{D}}_{(\mathbf{S}\cup\mathbf{G})}(w) \subseteq \llbracket [\mathbf{S}!] \varphi \rrbracket^{M}$, which holds if and only if $w \in \llbracket D_{(\mathbf{S}\cup\mathbf{G})}[\mathbf{S}!] \varphi \rrbracket^{M}$. (*ii*) By

definition, $w \in \llbracket[\mathbf{S}_{1}!] [\mathbf{S}_{2}!] \varphi \rrbracket^{M}$ if and only if $w \in \llbracket[\mathbf{S}_{2}!] \varphi \rrbracket^{M^{\mathbf{S}_{1}!}}$, i.e., if and only if $w \in \llbracket \varphi \rrbracket^{(M^{\mathbf{S}_{1}!})^{\mathbf{S}_{2}!}}$. Then, as a consequence of Proposition 3.5.(*ii*), the latter holds if and only if $w \in \llbracket \varphi \rrbracket^{M^{(\mathbf{S}_{1} \cup \mathbf{S}_{2})!}}$, that is, if and only if $w \in \llbracket [[\mathbf{S}_{1} \cup \mathbf{S}_{2})!] \varphi \rrbracket^{M}$.

Thanks to these validities and previous observations, one can find further validities describing properties of an act of $\exists \forall \forall$ communication. First, as it was mentioned, the $\forall \forall \forall$ operation of the previous subsection is the particular case of the $\exists \forall \forall$ operation in which all agents share. Thus,

$$\Vdash [!] \varphi \leftrightarrow [\mathbf{A}!] \varphi.$$

From Proposition 3.6.(*i*), it follows that the knowledge any agent **i** has after an act of $\exists \forall \forall$ -communication is what was distributively known among her and the sharing agents about the effects of the action:

$$\Vdash [\mathbf{S}!] \mathbf{K}_{\mathbf{i}} \varphi \leftrightarrow \mathbf{D}_{\{\mathbf{i}\} \cup \mathbf{S}} [\mathbf{S}!] \varphi.$$

From Proposition 3.6.(*ii*) it follows that an act of $\exists \forall \forall$ -communication by the same group is idempotent:

$$\Vdash [S!][S!]\varphi \leftrightarrow [S!]\varphi.$$

Moreover, it also follows that, when two groups communicate, the order in which they do so is irrelevant:

$$\Vdash [\mathbf{S}_1!][\mathbf{S}_2!]\varphi \leftrightarrow [\mathbf{S}_2!][\mathbf{S}_1!]\varphi.$$

Thus, repeated $\exists \forall \forall$ -sharing by the same group does not provide anything new, regardless of whether it is immediate or after some other groups have shared:

$$\Vdash [\mathbf{S}_1!] \cdots [\mathbf{S}_m!] [\mathbf{S}_1!] \varphi \leftrightarrow [\mathbf{S}_1!] \cdots [\mathbf{S}_m!] \varphi.$$

Axiom system The axiom system for the extended language $\mathcal{L}_{D, [S!]}$ relies again on the *DEL* reduction axioms technique, with the axioms and rule for the case at hand being those on Table 3. Axioms $A_{S!}^p$, $A_{S!}^-$, $A_{S!}^{\wedge}$ and rule $RE_{S!}$ are as in the $\forall \forall \forall$ case, indicating respectively that [S!] does not affect atomic propositions, commutes with negation, distributes over conjunction and 'preserves' logical equivalence. Axiom $A_{S!}^D$ is the one that distinguishes $\exists \forall \forall$ from $\forall \forall \forall$, indicating that what a group **G** knows distributively after [S!] is exactly what the group $\mathbf{S} \cup \mathbf{G}$ knew distributively about [S!]'s effects. Together, these axioms and rule define an "inside-out' translation from $\mathcal{L}_{D, [S!]}$ to \mathcal{L}_D such that a formula and its translation are both semantically and provably equivalent (see the proof of Theorem 3 on Subsection A.2).

Theorem 3 The axiom system $L_{D,[S!]}$ (L_D [Table 1]+Table 3) is sound and strongly complete for formulas in $\mathcal{L}_{D,[S!]}$ valid over models in M_A .

3.3 Other operations for communication in the literature

The operations proposed in this section are not the first ones representing actions of agents sharing their individual information. The action of "tell

$A^p_{S!}: \vdash [S!] p \leftrightarrow p$	$A^{\mathrm{D}}_{S!} \vdash [S!] \mathrm{D}_{G} \varphi \leftrightarrow \mathrm{D}_{S \cup G} [S!] \varphi$
$A_{S!}^{\neg}: \vdash [S!] \neg \varphi \leftrightarrow \neg [S!] \varphi$	$RE_{\mathbf{S}!}: \text{ If } \vdash \varphi_1 \leftrightarrow \varphi_2 \text{ then } \vdash [\mathbf{S}!] \varphi_1 \leftrightarrow [\mathbf{S}!] \varphi_2$
$A^{\wedge}_{S!}:\vdash[S!](\varphi\wedge\psi)\leftrightarrow([S!]\varphi\wedge[S!]\psi)$	

Table 3: Additional axioms and rules for $L_{D, [S!]}$, which characterises the formulas in $\mathcal{L}_{D, [S!]}$ that are valid on models in M_{A} .

us all you know" of Baltag (2010) is one through which a single agent $\mathbf{a} \in \mathbf{A}$ shares all her information with every agent. Thus, the new indistinguishability relation of each agent $\mathbf{i} \in \mathbf{A}$ is defined as $R_{\mathbf{i}} \cap R_{\mathbf{a}}$. This action can be seen as the particular instance of the act of $\exists \forall \forall$ -communication (Subsection 3.2) in which only one agent communicates (thus corresponding to the modality [{i}!]). Then there is the action for 'resolving the distributed knowledge of a group' studied in Agotnes and Wáng (2017). Through it, agents *in a group* **G** share *all* their information only within G itself. Thus, while the new indistinguishability relation of every agent not in G remains exactly as before, that of each agent in **G** is defined as $R_{\mathbf{G}}^{\mathbf{D},8}$. This action can be also seen as an instance of the act of $\exists \forall \forall$ -communication (Subsection 3.2) (only agents in **G** share), but note that only agents in **G** receive the information. In the terminology of this manuscript, this action is better described as an act of '∃∀∃-communication' (Section 5 will discuss briefly $\exists \exists \exists$ -communication). Finally, there is the more general action of 'semi-public reading events' of Baltag and Smets (2020), where each agent **i** gets a set $\alpha(\mathbf{i}) \subseteq \mathbf{A}$ satisfying $\mathbf{i} \in \alpha(\mathbf{i})$. Intuitively, $\alpha(\mathbf{i})$ contains those agents whose information i will receive when communication occurs. Thus, for each agent **i**, the operation defines her new indistinguishability relation as $R^{D}_{\alpha(\mathbf{i})}$. Note again that this form of communication is semi-public: even though each agent **i** only 'hears' what agents in $\alpha(\mathbf{i})$ 'say', the definition implies that **i** still learns that every agent j receives the information provided by j's sources (agents in $\alpha(\mathbf{j})$). This can be seen as a generalisation of a ' $\exists \forall \forall'$ -communication: while some agents (those in $\alpha(\mathbf{i})$ for some agent \mathbf{i}) share all their information, every agent receives information from potentially different agents (each agent **i** only 'listen to' those agents in $\alpha(\mathbf{i})$).

4 Sharing something with everybody

Section 3 discussed model operations for actions through which all/some agents share all the information with everybody; thus, the actions represent acts of full communication (from a subset of agents). As discussed, the operations are small variations of proposals already present in the literature.

This section, which constitutes the core of this contribution, discusses a variation of the $\exists \forall \forall$ case: one in which the sharing agents communicate *only part of their information*. This action makes the process of communication between

⁸With this definition, it is interesting to notice that, while agents not in **G** do not receive the information that is being shared, they still get to know that agents in **G** shared their information within themselves. Thus, using the terminology of Baltag and Smets (2020), 'resolving distributed knowledge' is a *semi-public* form of communication.

agents a more realistic one. Indeed, there are natural restrictions on the 'amount' of information an agent can communicate at once, and operations with such restrictions can represent more realistic 'conversations'. In defining this operation, probably the most important question is the following: what defines what each agent will communicate? There are indeed several possibilities (see the discussion in Section 6), but a natural one is to assume that the 'conversation' is relative to a given *subject/topic*. This manuscripts uses this idea, assuming that this subject/topic is defined by a formula χ . Following the previous notation, this action through which *some* agents share *some* of their information (that relative to the given subject χ) with everybody will be called an act of $\exists \exists \forall$ -communication.

Operation and modality For the definitions, the following will be useful.

Definition 4.1 (Relations \nsim_{χ} **and** \sim_{χ}) Let *M* be in **M**_A; let χ be a formula that can be evaluated at worlds in *M*. The relation $\nsim_{\chi}^{M} \subseteq \mathfrak{D}(M) \times \mathfrak{D}(M)$ is given by

$$\mathscr{F}^{M}_{\chi} := \left(\llbracket \chi \rrbracket^{M} \times \llbracket \neg \chi \rrbracket^{M} \right) \cup \left(\llbracket \neg \chi \rrbracket^{M} \times \llbracket \chi \rrbracket^{M} \right).$$

Its complement, the (note: equivalence) relation $\overline{\mathscr{A}_{\chi}^{M}}$ given by $(\llbracket \chi \rrbracket^{M} \times \llbracket \chi \rrbracket^{M}) \cup (\llbracket \neg \chi \rrbracket^{M} \times \llbracket \neg \chi \rrbracket^{M})$, will be denoted rather as \sim_{χ}^{M} .

Note how \mathscr{A}_{χ}^{M} describes the indistinguishability of an agent that has full *uncertainty* about χ (worlds differing on χ 's truth-value cannot be distinguished) while also having full *certainty* about everything else (all other worlds can be distinguished). Analogously, \mathscr{A}_{χ}^{M} describes the indistinguishability of an agent that has full *certainty* about χ (worlds differing on χ 's truth-value can be distinguished) while also having full *uncertainty* about everything else (worlds agreeing on χ 's truth-value are indistinguishable). In other words, while the relation \mathscr{A}_{χ}^{M} contains the pairs of worlds in $\mathfrak{D}(M) \times \mathfrak{D}(M)$ that would be indistinguishable if the available information allowed to tell apart any pair of formulas but χ and $\neg \chi$, the relation \mathscr{A}_{χ}^{M} contains the pairs of worlds in $\mathfrak{D}(M) \times \mathfrak{D}(M)$ that would be indistinguishable if the available information allowed to tell apart any pair of formulas but χ and $\neg \chi$, and nothing else. Thus, while \mathscr{A}_{χ}^{M} can be seen as a relation of *full ignorance on* χ , \mathscr{A}_{χ}^{M} can be seen as a relation of *knowing only* χ *fully*.

Here is, then, the definition of the operation for $\exists \exists \forall$ -communication.

Definition 4.2 (\exists \exists \forall-communication) Let $M = \langle W, R, V \rangle$ be in $\mathbf{M}_{\mathbf{A}}$; take $\mathbf{S} \subseteq \mathbf{A}$ and let χ be a formula. The relations in $M^{\mathbf{S}_{\chi}!} = \langle W, R^{\mathbf{S}_{\chi}!}, V \rangle$ (a structure in $\mathbf{M}_{\mathbf{A}}$) are given, for each $\mathbf{i} \in \mathbf{A}$, as

$$R^{\mathbf{S}_{\chi}!}_{\mathbf{i}} := R_{\mathbf{i}} \setminus \bigcup_{\mathbf{j} \in \mathbf{S}} (\overline{R_{\mathbf{j}}} \cap \mathscr{F}_{\chi}^{M}).$$

In order to understand the intuition behind the definition, note how the set $\overline{R_j} \cap \mathscr{L}_{\chi}^M$ can be seen as the *epistemic contribution* of agent **j** about formula χ in model M, as it contains those pairs in the M-uncertainty about χ (the set \mathscr{L}_{χ}^M) that **j** has already discarded (the set $\overline{R_j}$). With this in mind, the definition states that agent **i**'s uncertainty after agents in **S** share all their information *on*

subject χ (i.e., her uncertainty in the new model, $R^{\mathbf{S}_{\chi}!}_{\mathbf{i}}$) is given by her previous uncertainty (i.e., $R_{\mathbf{i}}$) minus the sum (\bigcup) of the epistemic contribution (i.e., $\overline{R_{\mathbf{j}}} \cap \mathscr{I}_{\chi}^{M}$) of each agent \mathbf{j} in \mathbf{S} .⁹

Note also how, through the operation, agents in **S** communicate all they know *about* χ : intuitively, they share all the information that has allowed them to discard *any* uncertainty between χ - and $\neg \chi$ -worlds, and thus only edges in τ_{χ}^{M} can be eliminated. This emphasises the fact that χ is taken to be the *subject/topic* of the conversation, with agents intuitively sharing what has allowed them to discard edges between worlds disagreeing on χ 's truth-value.¹⁰

The relations in the model resulting from $\exists \exists \forall$ -communication can be described in a simpler way.

Proposition 4.1 Let $M = \langle W, R, V \rangle$ be in $\mathbf{M}_{\mathbf{A}}$; take $\mathbf{S} \subseteq \mathbf{A}$ and let χ be a formula. *Then,*


$$R^{\mathbf{S}_{\chi}!}_{\mathbf{i}} = R_{\mathbf{i}} \cap (R^{\mathbf{D}}_{\mathbf{S}} \cup \sim^{M}_{\chi}).$$

Proof. By definition, $R^{\mathbf{S}_{\chi}!}_{\mathbf{i}} := R_{\mathbf{i}} \setminus \bigcup_{\mathbf{j} \in \mathbf{S}} (\overline{R_{\mathbf{j}}} \cap \mathscr{X}_{\chi}^{M})$, Then, from the definitions of both set subtraction and \sim_{χ}^{M} , the right-hand side becomes $R_{\mathbf{i}} \cap \bigcap_{\mathbf{j} \in \mathbf{S}} (R_{\mathbf{j}} \cup \sim_{\chi}^{M})$. On the latter, using $\bigcap_{\mathbf{j} \in \mathbf{S}} (R_{\mathbf{j}} \cup \sim_{\chi}^{M}) = R_{\mathbf{S}}^{\mathrm{D}} \cup \sim_{\chi}^{M}$ produces the required $R_{\mathbf{i}} \cap (R_{\mathbf{S}}^{\mathrm{E}} \cup \sim_{\chi}^{M})$.

Before discussing the $\exists \exists \forall$ operation further, here are some examples.

Example 4.1 Recall the model M_1 from Example 2.1.(*i*), where each agent knows the truth-value of one atom (**a** knows whether p, **b** knows whether q, **c** knows whether r) but does not know the truth-value of the others.

(*i*) The diagrams below (reflexivity assumed) depict M_1 three times. They show, respectively, the partition generated by the (recall: equivalence) relations \sim_p^M , \sim_q^M and \sim_r^M .

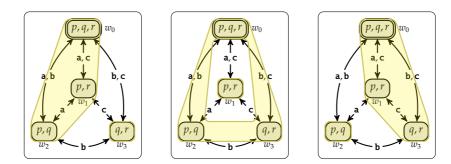


The diagrams further below (reflexivity assumed) show the result of three communication acts, all with $\mathbf{S} = \{\mathbf{a}, \mathbf{b}, \mathbf{c}\}$: the first on topic *p*, the second on topic *q* and the third on topic *r*. When building the relations of the

⁹The definition might be easier to grasp by taking a 'knowledge' perspective. Intuitively, the knowledge of the agent after a conversation in which agents in **S** share what they know about χ is her initial knowledge plus the knowledge any agent in **S** has about χ . The provided definition describes exactly the same idea, stating it in terms of the agent's uncertainty.


¹⁰There is a natural alternative in which χ is rather taken to be the *content* of the conversation. In this asymmetric version, agents intuitively share only what has allowed them to discard $\neg \chi$ as a possibility, and thus only edges *pointing to* $\neg \chi$ *-worlds* can be eliminated.

new model, the operation looks *at the original model*, focussing only on edges between worlds disagreeing on the topic's truth-value (edges across partition cells in the diagrams above) and leaving the rest as they are. For example, for topic *p*, the operation focuss on edges between worlds in $\{w_0, w_1, w_2\}$ and worlds in $\{w_3\}$, disregarding (i.e., not affecting) the rest. When all agent share, as in this case, the operation simply removes the edges *under consideration* (i.e., across partition cells) that are not in $R_{\mathbf{A}}^{\mathrm{D}}$.

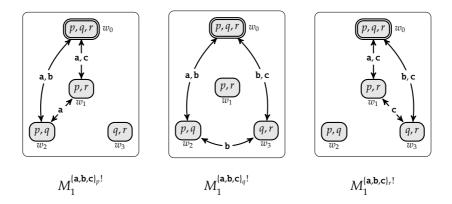


As the diagrams show, the operation behaves as expected. For example, a conversation among all agents about p (leftmost model) benefits **b** and **c** (they get to know p's truth-value) but does not benefit the only agent who knew p's truth-value before, namely **a**.¹¹

(*ii*) Again, below are three copies of M_1 (reflexivity assumed), this time showing (respectively) the partition generated by the relations $\sim_{p\wedge q}^{M}$, $\sim_{p\wedge r}^{M}$ and $\sim_{q\wedge r}^{M}$.

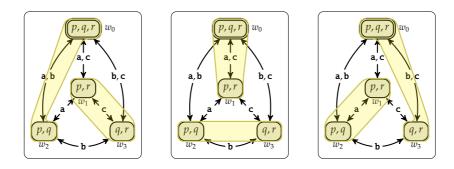

The diagrams further below (reflexivity assumed) show the result of three communication acts: $\{\mathbf{a}, \mathbf{b}\}_{p \land q}!$, $\{\mathbf{a}, \mathbf{b}\}_{p \land r}!$ and $\{\mathbf{a}, \mathbf{b}\}_{q \land r}!$.

¹¹To be more precise, the action does not give **a** any *factual* information. Yet, she gets information, as after the conversation she knows that both **b** and **c** know p's truth-value.

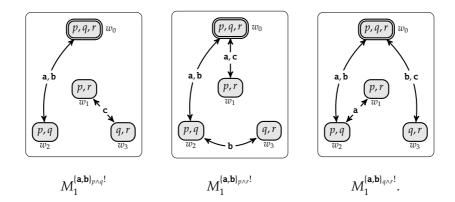

In all these cases, only agents in $\mathbf{S} = \{\mathbf{a}, \mathbf{b}\}$ communicate. The operation again looks only at edges across partition cells, with each agent $\mathbf{i} \in \mathbf{S}$ keeping only those in $R_{\mathbf{S}}^{\mathrm{D}}$ and each agent $\mathbf{i} \notin \mathbf{S}$ keeping only those in $R_{\mathbf{S}\cup\{\mathbf{i}\}}^{\mathrm{D}}$. For example, after $\{\mathbf{a}, \mathbf{b}\}$ exchange (recall: publicly) information about $p \land q$ (leftmost model), every agent will know the truth-value of both p and q (since \mathbf{c} additionally knew r's, now she knows which the real situation is). But if \mathbf{a} and \mathbf{b} 's conversation is rather about $q \land r$ (rightmost model), then less information is shared (neither of them knew whether r, and \mathbf{a} did not get the chance to talk about what she knew: p). In fact, afterwards no agent knows the truth-value of all atoms, and only two agents (\mathbf{a} and \mathbf{c}) know the truth-value of two of them (q and, respectively, p and r).

After the examples, here are some observations.

- As $R^{\mathbf{S}_{\chi}!}_{\mathbf{i}} = R_{\mathbf{i}} \cap (R^{\mathbf{D}}_{\mathbf{S}} \cup \sim^{M}_{\chi}) \subseteq R_{\mathbf{i}}$, an $\exists \exists \forall$ act can only *reduce* uncertainty.
- Since $\sim_{\chi}^{M} = \sim_{\neg\chi'}^{M}$ it follows that $M^{\mathbf{S}_{\chi}!} = M^{\mathbf{S}_{\neg\chi'}!}$.
- If $\mathbf{i} \in \mathbf{S}$, then $R^{\mathbf{S}_{\chi}!}_{\mathbf{i}} = R^{\mathbf{D}}_{\mathbf{S}} \cup (R_{\mathbf{i}} \cap \sim_{\chi}^{M})$.
- An $\exists \exists \forall$ act is *not* a generalisation of $\exists \forall \forall$: there is no formula χ such that, for every model $M = \langle W, R, V \rangle$ and every set of agents **S**, an '**S**-conversation about χ' (producing $R^{\mathbf{S}_{\chi}!}_{\mathbf{i}} = R_{\mathbf{i}} \cap (R_{\mathbf{S}}^{\mathrm{D}} \cup \sim_{\chi}^{M})$) has the same effects as an '**S**-conversation' about everything (producing $R^{\mathbf{S}!}_{\mathbf{i}} = R_{\mathbf{i}} \cap R_{\mathbf{S}}^{\mathrm{D}}$). For that, one would need a χ such that $R_{\mathbf{i}} \cap (R_{\mathbf{S}}^{\mathrm{D}} \cup \sim_{\chi}^{M}) = R_{\mathbf{i}} \cap R_{\mathbf{S}}^{\mathrm{D}}$ (and thus, $\sim_{\chi}^{M} \subseteq R_{\mathbf{S}}^{\mathrm{D}}$) for every *M* and every **S**.¹² Still, one can find specific situations (a model *M*, a set of agents **S** and a formula χ) an '**S**-conversation about χ' has the same effects as an '**S**-conversation about χ '
- If R_i and the relations in $\{R_j \mid j \in S\}$ are all reflexive/symmetric, then so is the resulting $R_i^!$.¹³ However, the operation does not preserve transitivity and neither 'Euclideanity' (see, e.g., Example 4.1.(*ii*), in particular the effects of the action $\{a, b\}_{p \wedge r}$! on the relation for agent **a**).

¹²There is no χ satisfying $\sim_{\chi}^{M} \subseteq R_{S}^{D}$ for every M and S: there are M and S with $R_{S}^{D} = \emptyset$, and yet the (reflexive) relation \sim_{χ}^{M} is never empty (domains are non-empty). But even when working with equivalence relations, no χ satisfies the requirement *for every* M *and every* S. ¹³For reflexivity, take any $w \in W$. By the assumption, $R_{i}ww$ and $R_{S}^{D}ww$; moreover, $w \sim_{\chi}^{M} w$. Thus,

¹³For reflexivity, take any $w \in W$. By the assumption, $R_i ww$ and $R_s^D ww$; moreover, $w \sim_{\chi}^M w$. Thus, $R_i^i ww$. For symmetry, if $R_{\chi}^{s_{\chi}!} wu$ then $R_i wu$ and either $R_s^D wu$ or $w \sim_{\chi}^M u$. But, by the assumptions and $\sim_{\chi}^{M'} s$ symmetry, $R_i uw$ and either $R_s^D uw$ or $u \sim_{\chi}^M w$. Thus, $R_i^! uw$.

Now, the modality.

Definition 4.3 (Modality $[S_{\chi}!]$; **language** $\mathcal{L}_{D, [S_{\chi}!]}$) The language $\mathcal{L}_{D, [S_{\chi}!]}$ extends \mathcal{L}_{D} with modalities $[S_{\chi}!]$ for each set of agents $S \subseteq A$ and each formula χ . For their semantic interpretation,

$$(M,w) \Vdash [\mathbf{S}_{\chi}!] \varphi \quad \text{iff}_{def} \quad (M^{\mathbf{S}_{\chi}!},w) \Vdash \varphi.$$

Using $\llbracket \cdot \rrbracket$, note that $w \in \llbracket [\mathbf{S}_{\chi} !] \varphi \rrbracket^M$ if and only if $w \in \llbracket \varphi \rrbracket^{M^{\mathbf{S}_{\chi}!}}$. Thus,

$$\llbracket[\mathbf{S}_{\chi}!]\varphi\rrbracket^{M} = \llbracket\varphi\rrbracket^{M^{\mathbf{S}_{\chi}!}}$$

Properties Here are some observations about the $\exists \exists \forall$ operation, starting again with a caveat.

Proposition 4.2 Let (M, w) be a pointed $\mathbf{M}_{\mathbf{A}}$ model; take $\mathbf{S} \subseteq \mathbf{A}$ and $\mathbf{i} \in \mathbf{A}$. Then, $(M, w) \Vdash D_{\mathbf{S}} \varphi \to [\mathbf{S}_{\varphi}!] \mathbf{K}_{\mathbf{i}} \varphi$ holds when M and φ are such that $[\![\varphi]\!]^M \subseteq [\![\varphi]\!]^{M^{\mathbf{S}_{\varphi}!}}$ and the relations in M are reflexive. However, $\nvDash D_{\mathbf{S}} \varphi \to [\mathbf{S}_{\varphi}!] \mathbf{K}_{\mathbf{i}} \varphi$.

Proof. Since $(M, w) \Vdash D_{\mathbf{S}} \varphi$, then $R_{\mathbf{S}}^{\mathrm{D}}(w) \subseteq \llbracket \varphi \rrbracket^{M}$ and thus, by the assumption, $R_{\mathbf{S}}^{\mathrm{D}}(w) \subseteq \llbracket \varphi \rrbracket^{M^{\mathbf{S}_{\varphi^{!}}}}$. To obtain $(M, w) \Vdash [\mathbf{S}_{\varphi^{!}}] \mathbf{K}_{\mathbf{i}} \varphi$, one requires $(M^{\mathbf{S}_{\varphi^{!}}}, w) \Vdash \mathbf{K}_{\mathbf{i}} \varphi$; since $\mathbf{i} \in \mathbf{S}$, this boils down to $(R_{\mathbf{S}}^{\mathrm{D}} \cup (R_{\mathbf{i}} \cap \sim_{\varphi}^{M}))(w) \subseteq \llbracket \varphi \rrbracket^{M^{\mathbf{S}_{\varphi^{!}}}}$, that is, to both $R_{\mathbf{S}}^{\mathrm{D}}(w) \subseteq \llbracket \varphi \rrbracket^{M^{\mathbf{S}_{\varphi^{!}}}}$ and $(R_{\mathbf{i}} \cap \sim_{\varphi}^{M})(w) \subseteq \llbracket \varphi \rrbracket^{M^{\mathbf{S}_{\varphi^{!}}}}$. The first has been obtained. For the second, take any $u \in (R_{\mathbf{i}} \cap \sim_{\varphi}^{M})(w)$, so w and u coincide in φ 's truth-value in M. By reflexivity, $w \in R_{\mathbf{S}}^{\mathrm{D}}(w)$, so $w \in \llbracket \varphi \rrbracket^{M}$ (the antecedent $D_{\mathbf{S}} \varphi$) and hence $u \in \llbracket \varphi \rrbracket^{M}$. Therefore, by the assumption, $u \in \llbracket \varphi \rrbracket^{M^{\mathbf{S}_{\varphi^{!}}}}$, as required.

Both requirements are essential. In Fact 4.1 it will be shown that reflexivity without $\llbracket \varphi \rrbracket^M \subseteq \llbracket \varphi \rrbracket^{M^{\mathbf{S}_{\varphi}!}}$ is not enough. For $\llbracket \varphi \rrbracket^M \subseteq \llbracket \varphi \rrbracket^{M^{\mathbf{S}_{\varphi}!}}$ without reflexivity, consider a model $M = \langle W, R, V \rangle$ with $W = \{w_0, w_1, w_2\}$, $R_{\mathbf{a}} = \{(w_0, w_2)\}$, $R_{\mathbf{b}} = R_{\mathbf{a}} \cup \{(w_0, w_1)\}$ and $V(p) = \{w_2\}$. Note how $(M, w_0) \Vdash D_{[\mathbf{a}, \mathbf{b}]_p}$; yet, $(M, w_0) \nvDash [\{\mathbf{a}, \mathbf{b}\}_p!] \operatorname{K}_{\mathbf{b}} p$ as $(M^{[\mathbf{a}, \mathbf{b}]_p!}, w_0) \nvDash \operatorname{K}_{\mathbf{b}} p$ because M and $M^{[\mathbf{a}, \mathbf{b}]_p!}$ are identical.

The following proposition provides the two useful observations.

Proposition 4.3 Let $M = \langle W, R, V \rangle$ be in $\mathbf{M}_{\mathbf{A}}$; take $\mathbf{S}, \mathbf{S}_1, \mathbf{S}_2 \subseteq \mathbf{A}$ and let χ, χ_1, χ_2 be formulas. Let $M^{\mathbf{S}_{\chi}!} = \langle W, R^{\mathbf{S}_{\chi}!}, V \rangle$ and $(M^{\mathbf{S}_{1\chi_1}!})^{\mathbf{S}_{2\chi_2}!} = \langle W, (R^{\mathbf{S}_{1\chi_1}!})^{\mathbf{S}_{2\chi_2}!}, V \rangle$ be as indicated in Definition 4.2. Then,

(i)
$$(R^{\mathbf{S}_{\lambda}!})_{\mathbf{G}}^{\mathbf{D}} = R_{\mathbf{S}\cup\mathbf{G}}^{\mathbf{D}} \cup (R_{\mathbf{G}}^{\mathbf{D}} \cap \sim_{\chi}^{M})$$
 for every $\mathbf{G} \subseteq \mathbf{A}$;
(ii) $(R^{\mathbf{S}_{1\chi_{1}}!})^{\mathbf{S}_{2\chi_{2}}!}_{\mathbf{i}} = R_{\mathbf{i}} \cap \left(R_{\mathbf{S}_{1}\cup\mathbf{S}_{2}}^{\mathbf{D}} \cup \left(R_{\mathbf{S}_{1}}^{\mathbf{D}} \cap \sim_{[\mathbf{S}_{1\chi_{1}}!]\chi_{2}}^{M} \right) \cup \left(R_{\mathbf{S}_{2}}^{\mathbf{D}} \cap \sim_{\chi_{1}}^{M} \right) \cup \left(\sim_{\chi_{1}}^{M} \cap \sim_{[\mathbf{S}_{1\chi_{1}}!]\chi_{2}}^{M} \right) \right)$

for every
$$\mathbf{i} \in \mathbf{A}$$
.

Proof.

(*i*) For any $\mathbf{G} \subseteq \mathbf{A}$, the relation $(R^{\mathbf{S}_{\chi}!})_{\mathbf{G}}^{\mathbf{D}}$ is $\bigcap_{\mathbf{k}\in\mathbf{G}} R^{\mathbf{S}_{\chi}!}_{\mathbf{k}}$ (def. of $(R^{\mathbf{S}_{\chi}!})_{\mathbf{G}}^{\mathbf{D}}$), equal to $\bigcap_{\mathbf{k}\in\mathbf{G}} \left(R_{\mathbf{k}} \cap (R_{\mathbf{S}}^{\mathbf{D}} \cup \sim_{\chi}^{M})\right)$ (def. of $R^{\mathbf{S}_{\chi}!}_{\mathbf{k}}$) and thus to $(R_{\mathbf{S}}^{\mathbf{D}} \cup \sim_{\chi}^{M}) \cap \bigcap_{\mathbf{k}\in\mathbf{G}} R_{\mathbf{k}}$, which is $(R_{\mathbf{S}}^{\mathbf{D}} \cup \sim_{\chi}^{M}) \cap R_{\mathbf{G}}^{\mathbf{D}}$. Then, the De Morgan's laws and $R_{\mathbf{S}}^{\mathbf{D}} \cap R_{\mathbf{G}}^{\mathbf{D}} = R_{\mathbf{S}\cup\mathbf{G}}^{\mathbf{D}}$ yield the required $R_{\mathbf{S}\cup\mathbf{G}}^{\mathbf{D}} \cup (R_{\mathbf{G}}^{\mathbf{D}} \cap \sim_{\chi}^{M})$.

(ii) By algebraic manipulations starting from

$$(R^{\mathbf{S}_{1_{\chi_{1}}}!})^{\mathbf{S}_{2_{\chi_{2}}}!}_{\mathbf{i}} = R^{\mathbf{S}_{1_{\chi_{1}}}!}_{\mathbf{i}} \cap \left((R^{\mathbf{S}_{1_{\chi_{1}}}!})^{\mathbf{D}}_{\mathbf{S}_{2}} \cup \sim_{\chi_{2}}^{\mathcal{M}^{\mathbf{S}_{1_{\chi_{1}}}!}} \right),$$

using the fact that $\sim_{\chi_{2}}^{\mathcal{M}^{\mathbf{S}_{1_{\chi_{1}}}!}} = \sim_{[\mathbf{S}_{1_{\chi_{1}}}!]_{\chi_{2}}}^{\mathcal{M}}$.¹⁴

On the one hand, the second result of the previous proposition shows the indistinguishability relation of an agent **i** after two $\exists \exists \forall$ operations in a row. By comparing it with the same relation after a single $\exists \exists \forall$ operation, $R^{\mathbf{s}_{\chi}!}_{\mathbf{i}} = R_{\mathbf{i}} \cap (R_{\mathbf{s}}^{\mathsf{D}} \cup \sim_{\chi}^{\mathsf{M}})$, one understands why, different from the two previous cases, two successive $\exists \exists \forall$ actions cannot be compressed into a single one.

On the other hand, the first result indicates that the relation for interpreting $D_{\mathbf{G}}$ in the new model, $(R^{\mathbf{S}_{\chi}!})^{\mathrm{D}}_{\mathbf{G}}$ can be described as $R^{\mathrm{D}}_{\mathbf{S}\cup\mathbf{G}} \cup (R^{\mathrm{D}}_{\mathbf{G}} \cap \sim_{\chi}^{\mathcal{M}})$. This, together with the abbreviation

$$\mathbf{D}_{\mathbf{G}}^{\boldsymbol{\chi}} \varphi := (\boldsymbol{\chi} \to \mathbf{D}_{\mathbf{G}}(\boldsymbol{\chi} \to \varphi)) \land (\neg \boldsymbol{\chi} \to \mathbf{D}_{\mathbf{G}}(\neg \boldsymbol{\chi} \to \varphi))$$

(so $(M, w) \Vdash D_{\mathbf{G}}^{\chi} \varphi$ if and only if $(R_{\mathbf{G}}^{\mathbf{D}} \cap \sim_{\chi}^{M})(w) \subseteq \llbracket \varphi \rrbracket^{M}$) provides the following validity, which will be useful for the axiomatisation.

Proposition 4.4 \Vdash $[\mathbf{S}_{\chi}!] D_{\mathbf{G}} \varphi \leftrightarrow (D_{\mathbf{S} \cup \mathbf{G}} [\mathbf{S}_{\chi}!] \varphi \wedge D_{\mathbf{G}}^{\chi} [\mathbf{S}_{\chi}!] \varphi)$

Proof. Let $M = \langle W, R, V \rangle$ be in $\mathbf{M}_{\mathbf{A}}$. By definition, $w \in \llbracket[\mathbf{S}_{\chi}!] \mathbf{D}_{\mathbf{G}} \varphi \rrbracket^{M}$ if and only if $w \in \llbracket \mathbf{D}_{\mathbf{G}} \varphi \rrbracket^{M^{\mathbf{S}_{\chi}!}}$, which holds if and only if $(R^{\mathbf{S}_{\chi}!})_{\mathbf{G}}^{\mathbf{D}}(w) \subseteq \llbracket \varphi \rrbracket^{M^{\mathbf{S}_{\chi}!}}$. But, from Proposition 4.3.(*i*) and semantic interpretation, the latter is equivalent to $(R^{\mathbf{D}}_{\mathbf{S}\cup\mathbf{G}} \cup (R^{\mathbf{D}}_{\mathbf{G}} \cap \sim_{\chi}^{M}))(w) \subseteq \llbracket [\mathbf{S}_{\chi}!] \varphi \rrbracket^{M}$, that is, to the conjunction $R^{\mathbf{D}}_{\mathbf{S}\cup\mathbf{G}}(w) \subseteq \llbracket [\mathbf{S}_{\chi}!] \varphi \rrbracket^{M}$) and $(R^{\mathbf{D}}_{\mathbf{G}} \cap \sim_{\chi}^{M})(w) \subseteq \llbracket [\mathbf{S}_{\chi}!] \varphi \rrbracket^{M}$), whose conjuncts are equivalent, respectively, to $w \in \llbracket \mathbf{D}_{\mathbf{S}\cup\mathbf{G}} [\mathbf{S}_{\chi}!] \varphi \rrbracket^{M}$ and $w \in \llbracket \mathbf{D}_{\mathbf{G}}^{\chi} [\mathbf{S}_{\chi}!] \varphi \rrbracket^{M}$.

This validity yields immediately the following one, characterising the knowledge of an agent after $\exists \exists \forall$ communication:

$$\Vdash [\mathbf{S}_{\chi}!] \mathbf{K}_{\mathbf{i}} \varphi \leftrightarrow (\mathbf{D}_{\mathbf{S} \cup \{\mathbf{i}\}} [\mathbf{S}_{\chi}!] \varphi \wedge \mathbf{D}_{\{\mathbf{i}\}}^{\chi} [\mathbf{S}_{\chi}!] \varphi).$$

Here is another useful validity, a consequence of an earlier observation:

$$\Vdash [\mathbf{S}_{\chi}!] \varphi \leftrightarrow [\mathbf{S}_{\neg \chi}!] \varphi.$$


In the actions of Section 3, each relation in the new model is defined in terms of relations in the initial one. However, the $\exists \exists \forall$ operation defines each 'new' relation in terms of 'old' ones *and the relation of only knowing* χ *fully*, \sim_{χ} (with χ the communication's topic). This and the fact that model operations can change the truth-set of a formula is what makes $\exists \exists \forall$ behaves less similar to the $\forall \forall \forall$ -and $\exists \forall \forall$ -actions, and more similar to public announcements.

 $[\]begin{split} & \overbrace{}^{14} \text{Indeed, by definition, } \sim_{\chi_{2}}^{M^{\mathbf{S}_{1\chi_{1}}!}} = \left(\llbracket\chi_{2}\rrbracket^{M^{\mathbf{S}_{1\chi_{1}}!}} \times \llbracket\chi_{2}\rrbracket^{M^{\mathbf{S}_{1\chi_{1}}!}}\right) \cup \left(\llbracket\neg\chi_{2}\rrbracket^{M^{\mathbf{S}_{1\chi_{1}}!}} \times \llbracket\neg\chi_{2}\rrbracket^{M^{\mathbf{S}_{1\chi_{1}}!}}\right). \text{ But recall: } \\ & \llbracket\varphi\rrbracket^{M^{\mathbf{S}_{\chi}!}} = \llbracket[\mathbf{S}_{\chi}!] \varphi\rrbracket^{M}; \text{ moreover, } \llbracket\neg\varphi\rrbracket^{M^{\mathbf{S}_{\chi}!}} = W \setminus \llbracket\varphi\rrbracket^{M^{\mathbf{S}_{\chi}!}} = W \setminus \llbracket[\mathbf{S}_{\chi}!] \varphi\rrbracket^{M} = \llbracket\neg[\mathbf{S}_{\chi}!] \varphi\rrbracket^{M}. \\ & \text{Then, } \sim_{\chi_{2}}^{M^{\mathbf{S}_{1\chi_{1}}!}} = \left(\llbracket[\mathbf{S}_{1\chi_{1}}!] \chi_{2}\rrbracket^{M} \times \llbracket[\mathbf{S}_{1\chi_{1}}!] \chi_{2}\rrbracket^{M}\right) \cup \left(\llbracket\neg[\mathbf{S}_{1\chi_{1}}!] \chi_{2}\rrbracket^{M} \times \llbracket\neg[\mathbf{S}_{1\chi_{1}}!] \chi_{2}\rrbracket^{M}\right) = \sim_{[\mathbf{S}_{1\chi_{1}}!] \chi_{2}}^{M}. \end{split}$

Fact 4.1


- (*i*) $\mathbb{F} [\mathbf{S}_{\chi}!] [\mathbf{S}_{\chi}!] \varphi \leftrightarrow [\mathbf{S}_{\chi}!] \varphi$: two successive $\exists \exists \forall$ -acts by the same group and on the same topic cannot be collapsed into a single one on the same topic.
- (*ii*) \nvdash [$\mathbf{S}_{1\chi_1}!$] [$\mathbf{S}_{2\chi_2}!$] $\varphi \leftrightarrow$ [$\mathbf{S}_{2\chi_2}!$] [$\mathbf{S}_{1\chi_1}!$] φ : $\exists \exists \forall$ -acts do not commute.
- *(iii)* $\mathbb{F} [\mathbf{S}_{1\chi}!] [\mathbf{S}_{2\chi}!] \varphi \leftrightarrow [(\mathbf{S}_1 \cup \mathbf{S}_2)_{\chi}!] \varphi$: successive $\exists \exists \forall$ -acts by different groups on the same topic cannot be 'compressed' by using the union of the groups.
- (*iv*) \nvdash $[\mathbf{S}_{\chi_1}!][\mathbf{S}_{\chi_2}!]\varphi \leftrightarrow [\mathbf{S}_{\chi_1 \wedge \chi_2}!]\varphi$: successive $\exists \exists \forall$ -acts by the same group on different topic cannot be 'compressed' by using the conjunction of the topics.

Proof. In the model below (with equivalence relations), each world indicates the truth-value of atoms m_a, m_b, m_c (in that order) by using "•" (the atom holds) or "•" (the atom fails).¹⁵



Define $\chi_{\mathbf{i}} := K_{\mathbf{i}} m_{\mathbf{i}} \vee K_{\mathbf{i}} \neg m_{\mathbf{i}}$ for each $\mathbf{i} \in \mathbf{A} = \{\mathbf{a}, \mathbf{b}, \mathbf{c}\}$, stating that agent \mathbf{i} knows $m_{\mathbf{i}}$'s truth-value. Define their disjunction $\chi^{\vee} := \chi_{\mathbf{a}} \vee \chi_{\mathbf{b}} \vee \chi_{\mathbf{c}}$. Note how, at worlds in $\{w_0, w_2, w_3, w_6\}$, every agent \mathbf{i} has uncertainty about whether $m_{\mathbf{i}}$ holds (i.e., $\chi_{\mathbf{i}}$ fails for every \mathbf{i} , and thus so does χ^{\vee}). However at worlds in $\{w_1, w_4, w_5, w_7\}$, at least one agent \mathbf{i} knows whether $m_{\mathbf{i}}$ (so χ^{\vee} is the case).¹⁶

(*i*) Since $[\![\chi^{\vee}]\!]^{M_1} = \{w_0, w_2, w_3, w_6\}$, applying $\mathbf{A}_{\chi^{\vee}}!$ to M_1 (note the generated partition) yields M_2 below. Then, since $[\![\chi^{\vee}]\!]^{M_2} = \{w_2\}$, a further application of $\mathbf{A}_{\chi^{\vee}}!$ yields M_3 .

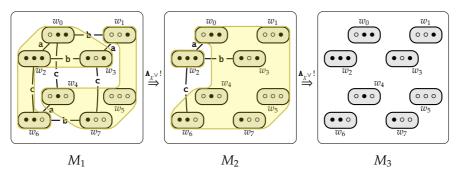


Thus, $(M_1, w_2) \Vdash [\mathbf{A}_{\chi^{\vee}}!] [\mathbf{A}_{\chi^{\vee}}!] \chi_{\mathbf{a}}$ and yet $(M_1, w_2) \nvDash [\mathbf{A}_{\chi^{\vee}}!] \chi_{\mathbf{a}}$. Note also how $(M_1, w_2) \Vdash D_{\mathbf{A}} \neg \chi^{\vee} \land \neg [\mathbf{A}_{\neg \chi^{\vee}}!] K_{\mathbf{a}} \neg \chi^{\vee}$, thus showing that $\nvDash D_{\mathbf{S}} \varphi \rightarrow [\mathbf{S}_{\varphi}!] K_{\mathbf{i}} \varphi$ for $\mathbf{i} \in \mathbf{S}$, even when the model is reflexive (cf. the discussion in the proof of Proposition 4.2).


¹⁵Thus, e.g., at $(\cdot \cdot \cdot)$ atom m_a is true, m_b is false and m_c is true.

¹⁶As a visual aid, in this model each atom χ_i holds in those worlds *without* outgoing **i**-edges (other than the implicitly present reflexive ones).

(*ii*) On the one hand, $[\![\chi_{\mathbf{a}}]\!]^{M_1} = \{w_5, w_7\}$, so applying $\{\mathbf{a}\}_{\chi_{\mathbf{a}}}$! to M_1 yields M'_2 below. Then, $[\![\chi_{\mathbf{c}}]\!]^{M'_2} = \{w_1, w_3, w_5, w_7\}$ so a further $\{\mathbf{b}, \mathbf{c}\}_{\chi_{\mathbf{c}}}$! yields M'_3 .

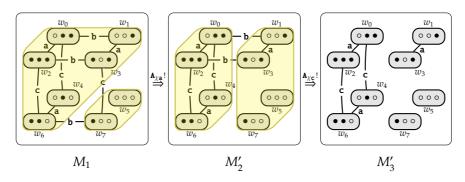

On the other hand, $\llbracket \chi_{\mathbf{c}} \rrbracket^{M_1} = \{w_1, w_5\}$, so applying $\{\mathbf{b}, \mathbf{c}\}_{\chi_{\mathbf{c}}}!$ to M_1 yields M_2'' below. Then, $\llbracket \chi_{\mathbf{a}} \rrbracket^{M_2''} = \{w_1, w_3, w_5, w_7\}$ so a further $\{\mathbf{a}\}_{\chi_{\mathbf{a}}}!$ yields M_3'' .

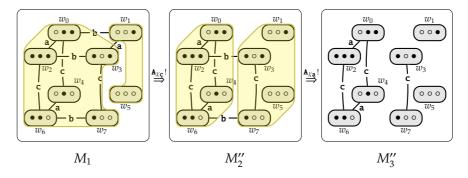

Thus, $(M_1, w_3) \Vdash [\{a\}_{\chi_a}!] [\{b, c\}_{\chi_c}!] \chi_c$ and yet $(M_1, w_3) \nvDash [\{b, c\}_{\chi_c}!] [\{a\}_{\chi_a}!] \chi_c$.

- (*iii*) As it can be seen from Item (*i*), $(M_1, w_2) \Vdash [\{\mathbf{a}, \mathbf{b}\}_{\chi^{\vee}}!][\{\mathbf{c}\}_{\chi^{\vee}}!]\chi_{\mathbf{a}}$ (the model that results from $\{\mathbf{a}, \mathbf{b}\}_{\chi^{\vee}}!$ is also M_2 , and a further application of $\{\mathbf{c}\}_{\chi^{\vee}}!$ yields a model M_3''' differing from M_3 in having an additional **c**-edge between w_2 and w_6), and yet $(M_1, w_2) \nvDash [\{\mathbf{a}, \mathbf{b}, \mathbf{c}\}_{\chi^{\vee}}!]\chi_{\mathbf{a}}$.
- (*iv*) As it can be seen from Item (*ii*), $(M_1, w_3) \Vdash [\mathbf{A}_{\chi_a}!] [\mathbf{A}_{\chi_c}!] \chi_{\mathbf{b}}$ (the model that results from $\mathbf{A}_{\chi_a}!$ is also M'_2 , and a further $\mathbf{A}_{\chi_c}!$ yields M'_3 too). However, $[\![\chi_{\mathbf{a}} \land \chi_{\mathbf{c}}]\!]^{M_1} = \{w_5\}$, so applying $\mathbf{A}_{(\chi_{\mathbf{a}} \land \chi_{\mathbf{c}})}!$ on M_1 has no effect, and thus $(M_1, w_3) \nvDash [\mathbf{A}_{(\chi_{\mathbf{a}} \land \chi_{\mathbf{c}})}!] \chi_{\mathbf{b}}$.

The provided counterexamples show that the given formulas are not valid, even under equivalence relations.

Axiom system Once again, the axiom system for $\mathcal{L}_{D,[S_{\chi}!]}$ relies on reduction axioms (Table 4). Axioms $A_{S_{\chi}!}^{p}$, $A_{S_{\chi}!}^{\neg}$, $A_{S_{\chi}!}^{\wedge}$, and rule $RE_{S_{\chi}!}$ are similar to their previous matching cases. Axiom $A_{S_{\chi}!}^{D}$ is the important one, indicating that a group **G** knows φ distributively after the action ($[S_{\chi}!] D_{G} \varphi$) if and only if the group $S \cup G$ knew, distributively, that φ would hold after the action ($D_{S \cup G} [S_{\chi}!] \varphi$) and the group **G** knew, distributively *and relative to similarity on* χ , that φ would hold after the action ($D_{G}^{\chi} [S_{\chi}!] \varphi$).

$A^p_{\mathbf{S}_{\chi}!} \vdash [\mathbf{S}_{\chi}!] p \leftrightarrow p$	$A^{\mathrm{D}}_{S_{\chi} !} \vdash [S_{\chi} !] D_{G} \varphi \leftrightarrow (D_{S \cup G} [S_{\chi} !] \varphi \wedge D^{\chi}_{G} [S_{\chi} !] \varphi)$
$A_{S_{\chi}!}^{\neg}: \vdash [S_{\chi}!] \neg \varphi \leftrightarrow \neg [S_{\chi}!] \varphi$	$RE_{\mathbf{S}_{\chi}!}: \text{ If } \vdash \varphi_1 \leftrightarrow \varphi_2 \text{ then } \vdash [\mathbf{S}_{\chi}!] \varphi_1 \leftrightarrow [\mathbf{S}_{\chi}!] \varphi_2$
$A^{\wedge}_{S_{\chi} !} \vdash [S_{\chi} !](\varphi \land \psi) \leftrightarrow ([S_{\chi} !]\varphi \land$	$(\mathbf{S}_{\chi}!]\psi)$

Table 4: Additional axioms and rules for $L_{D,[S_{\chi}!]}$, which characterises the formulas in $\mathcal{L}_{D,[S_{\chi}!]}$ that are valid on models in $M_{\mathbf{A}}$.

Theorem 4 The axiom system $L_{D,[\mathbf{S}_{\chi}:]}$ (L_D [Table 1]+Table 4) is sound and strongly complete for formulas in $\mathcal{L}_{D,[\mathbf{S}_{\chi}:]}$ valid over models in $\mathbf{M}_{\mathbf{A}}$.

5 Coda: sharing with *somebody*

Section 3 introduced two forms of inter-agent communication: $\forall \forall \forall$, through which *all* agents share *all* their information with *everybody*, and $\exists \forall \forall$, through which *some* agents share *all* their information with *everybody*. Then, Section 5 introduced $\exists \forall \forall \forall$, a form of communication through which *some* agents share *some* of their information with *everybody*. The next natural step is defining a form of communication through which *some* agents share *some* of their information, which *some* agents share *some* of their information with *somebody*. This operation, which could be denoted by $\exists \exists \exists$, will not be studied in this manuscript. Instead, the text will only discuss some of the modelling options that arise.

First, when defining the $\exists \exists \exists$ operation, one might decide that the shared information is received only by agents in a given group $\mathbf{R} \subseteq \mathbf{A}$. This would represent a scenario similar to a round table with a potentially distracted audience: the people on 'the table' get to talk about a given topic, with some members of the audience listening and the distracted ones missing the information. However, one could also think of a different scenario, one in which every sharing agent **i** has a specific set of listeners $\mathbf{R_i}$. This is closer to what happens in some online social networks, where only 'friends' or 'followers' can receive what a given agent sends (cf. with Baltag and Smets 2020, discussed in Subsection 3.3). In fact, the scenario with a single set **R** can be seen as the special case of the scenario with { $\mathbf{R_i}$ }_{i \in A} in which all sets $\mathbf{R_i}$ are the same.

A further possibility is to take the social networks idea seriously, and work with models that represent explicitly the social connections each agent has. These structures have been used by the logic community (Seligman et al. 2011 is one of the earliest proposals), either for studying information flow in social networks (peer pressure: Zhen and Seligman 2011; reflexive influence: Christoff et al. 2016; diffusion and prediction: Baltag et al. 2019) or for studying social network formation (as a side effect of peer pressure: Pedersen and Slavkovik 2017; by similarity: Smets and Velázquez-Quesada 2018, 2017, 2019).

A second decision to make when defining an $\exists\exists\exists$ operation is the following: what information, if any, obtain the agents that do not 'hear' the communication? On one extreme, these agents might be oblivious, not only to the content of the communication, but also to the fact that a communication took place. On the technical side, representing this form of 'private' communication requires an operation that changes not only the model's indistinguishability relations, but also its domain. Indeed, while the 'real' part of the model would change as the communication takes place (the receiving agents might learn something), for non-receiving agents one should keep 'a copy' of the original model, to indicate that they see no change at all.¹⁷ On the other extreme, non-receiving agents might not hear the content of the communication, but they might notice that the communication takes place (the *semi-public* form of communication from Ågotnes and Wáng 2017 and Baltag and Smets 2020 discussed in Subsection 3.3). Even more, they might know the *topic* of the conversation. Combining this with some previous knowledge about what the communicating agents know, the non-receivers might get to know part of what is being shared, and thus they might get to know (part of) the new epistemic state of the communicating agents.

6 Summary and further research lines

This paper has discussed three communication actions. Different from most epistemic acts present in the literature, they truly describe processes of interagent communication: those in which the information that is being shared is information some of the agents already have. Through the first two actions, $\forall \forall \forall$ and $\exists \forall \forall$, all/some agents share all their information with everybody. Through the third, $\exists \exists \forall$, the core of this contribution, some agents share some of their information with everybody. The text has presented examples of these actions at work, discussing some of their basic properties and providing, in all cases, a sound and complete axiom system for modalities describing their effects.

There are several research lines that arise from the current proposal. Here are some of them.

- Distributed knowledge has played a crucial role in this manuscript. Yet, the equally important notion of *common knowledge* (referring to the infinite iteration including everybody knows, everybody knows that everybody knows, and so on; Lewis 1969, Vanderschraaf and Sillari 2014) has been absent. Common knowledge is an important piece when discussing communication between agents, as one would like to know not only what each individual agent gets from the action (their individual knowledge), but also what a group as a whole learns from it (the group's common knowledge). Adding the common knowledge operator to the studied languages involves the use of additional tools, in particular for the axiomatisation.
- In a $\exists \exists \forall$ action, what each sharing agent communicates is given by a formula χ , understood as the *subject/topic* of the conversation. This is the reason why the operation only considers for elimination edges between worlds differing in χ 's truth-value. However, as mentioned, there are other alternatives. One can understand χ as the *content* of the conversation instead; in such case, the operation should consider for elimination only edges *pointing to* $\neg \chi$ *-worlds*. One could also take a *set* of formulas. If this represents the set of topics then, under some reasonable restrictions on the class of models, such variation could turn out to be a generalisation of one of the other actions: an $\exists \exists \forall$ -communication *on all topics* could be equivalent to an $\exists \forall \forall$ communication.

¹⁷This is how the *action models* of Baltag et al. (1998, 1999) deal with private announcements.

In any of these alternatives, one can also look for a less uniform treatment, assigning to each sharing agent (and even to sets of of them) a potentially different (set of) formula(s) (cf. van Benthem and Minica 2012, Baltag et al. 2018). All these options deserve a proper exploration.

- In the communication actions studied in this text, each agent **i** communicates by sharing (some of) the possibilities she has already discarded (those in $\overline{R_i}$). Thus, it has been implicitly assumed that, while agents might not share 'everything that they know', what they share is 'something that they do know' (in other words, they 'communicate' a set $S \subseteq \overline{R_i}$). But one can also find agents that share 'more than what they know' (they communicate a set $S \supset \overline{R_i}$), and even only 'things they do not know' (they communicate a set S with $S \cap \overline{R_i} = \emptyset$). These alternatives can be used for studying acts of *lying*, which so far have been modelled only by adapting tools from public announcement logic (van Ditmarsch 2014).
- The success of public announcement logic comes from the fact that it provides formal tools for studying different epistemic change phenomena. Among them, one can find studies on *arbitrary announcements*. Indeed, some proposals (e.g., Balbiani et al. 2008, Galimullin and Ågotnes 2021) have worked with modalities of the form $\langle \star ! \rangle \varphi$, read as "there is a formula that can be truthfully announced, and after doing so φ will be the case". The setting presented here offers a further alternative for quantifying over information change: one can define an operation through which a given agent (and eventually a set of them) shares an *arbitrary* set $S \subseteq \overline{R_1}$. Thus, one can study what a set of agents can get to know (i.e., a form of *knowability*) by sharing their information.

A Appendix

In the proofs, IH abbreviates "inductive hypothesis".

A.1 Proof of Theorem 2 (System L_{D,[!]})

Soundness The soundness of axioms and rules in L_D is well-known. For those in Table 2, the case of A_1^p is straightforward (the operation does not affect atomic valuations), the cases for A_1^{\neg} and A_1^{\wedge} follow from the inductive hypotheses, and A_1^D has been proved valid already (Proposition 3.3). For RE₁, suppose $\llbracket \varphi_1 \leftrightarrow \varphi_2$, that is, suppose $\llbracket \varphi_1 \rrbracket^M = \llbracket \varphi_2 \rrbracket^M$ for every M in M_A . Take any pointed model (M, w) with $M = \langle W, R, V \rangle$. Then, $(M, w) \Vdash [!] \varphi_1$ if and only if $w \in \llbracket \varphi_1 \rrbracket^{M^1}$. But $M^!$ is a model in M_A , so the latter holds if and only if $w \in \llbracket \varphi_2 \rrbracket^{M^1}$, which holds if and only if $(M, w) \Vdash [!] \varphi_2$. Thus, $(M, w) \Vdash [!] \varphi_1 \leftrightarrow [!] \varphi_2$.

Completeness The argument relies on a translation from $\mathcal{L}_{D,[!]}$ to \mathcal{L}_{D} , which is defined as follows.

Definition A.1 (Translation) The translation τ is given by

$\tau(p):=p,$	$\tau([!]p) := \tau(p),$	
$\tau(\neg \varphi) := \neg \tau(\varphi),$	$\tau([!]\neg\varphi) := \tau(\neg [!]\varphi),$	
$\tau(\varphi_1 \land \varphi_2) := \tau(\varphi_1) \land \tau(\varphi_2),$	$\tau([!](\varphi_1 \land \varphi_2)) := \tau([!] \varphi_1 \land [!] \varphi_2),$	
$\tau(D_{G}\varphi) := D_{G}\tau(\varphi),$	$\tau([!] D_{\mathbf{G}} \varphi) := \tau(D_{\mathbf{A}} [!] \varphi),$	
	$\tau([!][!]\varphi) := \tau([!]\tau([!]\varphi)).$	-

This translation works with formulas of the form [!] [!] φ in an "inside-out' fashion, dealing first with the deepest occurrence of [!] (i.e., translating [!] φ) before dealing with the rest (i.e., before translating [!] τ ([!] φ)). Because of this, the strategy proving strong completeness is as follows (cf. Plaza 1989 and Gerbrandy 1999, Section 4.4): (*i*) show that τ is a proper recursive translation that returns formulas in \mathcal{L}_D (Proposition A.1), (*ii*) show that a formula and its translation are both provably and semantically equivalent (Proposition A.2), and (*iii*) use τ and the completeness of L_D to show that, if $\Psi \cup {\varphi} \subseteq \mathcal{L}_{D, [!]}$, then from $\Psi \Vdash \varphi$ it follows that φ is derivable from Ψ in L_{D,[!]}.

It is clear that the domain of τ is $\mathcal{L}_{D,[!]}$: cases on the leftmost column take care of formulas that do not start with [!], and cases on the rightmost column take care of formulas that start with [!]. Still, one needs to show not only that, if φ is in $\mathcal{L}_{D,[!]}$, then $\tau(\varphi)$ is in \mathcal{L}_{D} , but also that the calculation of $\tau(\varphi)$ actually ends. In doing so, the following notion of complexity will play a crucial role.

Definition A.2 (Complexity for $\mathcal{L}_{D, [!]}$) The functions nsc : $\mathcal{L}_{D, [!]} \to \mathbb{N} \setminus \{0\}$ (nested 'static' complexity, focussing on operators in \mathcal{L}_D) and ndc : $\mathcal{L}_{D, [!]} \to \mathbb{N}$ (nested 'dynamic' complexity, focussing on [!]) are defined as follows.

$\operatorname{nsc}(p) := 1,$	ndc(p) := 0,
$\operatorname{nsc}(\neg \varphi) := 1 + \operatorname{nsc}(\varphi),$	$ndc(\neg \varphi) := ndc(\varphi),$
$\operatorname{nsc}(\varphi_1 \wedge \varphi_2) := 1 + \max \{\operatorname{nsc}(\varphi_1), \operatorname{nsc}(\varphi_2)\},\$	$\operatorname{ndc}(\varphi_1 \wedge \varphi_2) := \max \{\operatorname{ndc}(\varphi_1), \operatorname{ndc}(\varphi_2)\},\$
$\operatorname{nsc}(D_{G}\varphi) := 1 + \operatorname{nsc}(\varphi),$	$ndc(D_{G} \varphi) := ndc(\varphi),$
$\operatorname{nsc}([!]\varphi) := 2\operatorname{nsc}(\varphi).$	$ndc([!]\varphi) := 1 + ndc(\varphi).$

Then, for any $\varphi_1, \varphi_2 \in \mathcal{L}_{D,[!]}$, write $c(\varphi_1) > c(\varphi_2)$ if and only if

 $\operatorname{ndc}(\varphi_1) > \operatorname{ndc}(\varphi_2)$ or $\operatorname{ndc}(\varphi_1) = \operatorname{ndc}(\varphi_2)$ and $\operatorname{nsc}(\varphi_1) > \operatorname{nsc}(\varphi_2)$.

Thus, while nsc counts a formula's nested Boolean and modal operators, ndc counts a formula's nested dynamic operators. The complexity ordering c relies on both nsc and ndc, with the latter taking precedence: φ_1 is more complex than φ_2 (i.e., $c(\varphi_1) > c(\varphi_2)$) if and only if either φ_1 's 'dynamic' complexity is greater than that of φ_2 (i.e., $ndc(\varphi_1) > ndc(\varphi_2)$), or else both have the same 'dynamic' complexity but φ_1 's 'static' complexity is greater than that of φ_2 (i.e., $ndc(\varphi_1) > ndc(\varphi_2)$).

Relying on the complexity ordering c, the following proposition states that τ is a proper recursive translation from $\mathcal{L}_{D,[!]}$ to \mathcal{L}_{D} .

Proposition A.1 For every $\varphi \in \mathcal{L}_{D,[!]}$,

(τ **1**) *if* $\tau(\varphi)$ *is defined in terms of* $\tau(\psi)$ *, then* $c(\varphi) > c(\psi)$ *. Thus, the calculation of* $\tau(\varphi)$ *will eventually end.*

($\tau 2$) $\tau(\varphi) \in \mathcal{L}_D$.

Proof. The following lemma will be useful.

Lemma A.1 Define the strict subformula function ssub : $\mathcal{L}_{D,[!]} \rightarrow \wp(\mathcal{L}_{D,[!]})$ as

Let φ be an $\mathcal{L}_{D,[!]}$ -formula. Then, $c(\varphi) > c(\psi)$ for every $\psi \in ssub(\varphi)$.

Proof. The proof is by structural induction on φ . Here are the cases.

- **Base case (***p***)**. Immediate, as $ssub(p) = \emptyset$.
- **Inductive case** ($\neg \varphi$). Note that, by definition,

(i) $\operatorname{ndc}(\neg \varphi) = \operatorname{ndc}(\varphi)$, (ii) $\operatorname{nsc}(\neg \varphi) > \operatorname{nsc}(\varphi)$.

Take any $\psi \in \operatorname{ssub}(\neg \varphi) = \{\varphi\} \cup \operatorname{ssub}(\varphi)$, and consider the cases.

- *Case* $\psi = \varphi$. By Item (*i*) and Item (*ii*), it follows that $c(\neg \varphi) > c(\psi)$.
- − *Case* $\psi \in ssub(\varphi)$. By IH, $c(\varphi) > c(\psi)$ for any such ψ . By definition of c, this implies either
- · $ndc(\varphi) > ndc(\psi)$, so $ndc(\neg \varphi) > ndc(\psi)$ (Item (*i*)) hence $c(\neg \varphi) > c(\psi)$, or
- $\operatorname{ndc}(\varphi) = \operatorname{ndc}(\psi)$ and $\operatorname{nsc}(\varphi) > \operatorname{nsc}(\psi)$, so $\operatorname{ndc}(\neg \varphi) = \operatorname{ndc}(\psi)$ (by Item (*i*)) and $\operatorname{nsc}(\neg \varphi) > \operatorname{nsc}(\psi)$ (by Item (*ii*)); hence, $\operatorname{c}(\neg \varphi) > \operatorname{c}(\psi)$.
- Inductive case ($\varphi_1 \land \varphi_2$). Note that, by definition, for $i \in \{1, 2\}$,

(*i*) $\operatorname{ndc}(\varphi_1 \land \varphi_2) \ge \operatorname{ndc}(\varphi_i)$, (*ii*) $\operatorname{nsc}(\varphi_1 \land \varphi_2) > \operatorname{nsc}(\varphi_i)$.

Take any $\psi \in \operatorname{ssub}(\varphi_1 \land \varphi_2) = \{\varphi_1, \varphi_2\} \cup \operatorname{ssub}(\varphi_1) \cup \operatorname{ssub}(\varphi_2)$.

- *Case* $\psi = \varphi_i$. By Item (*i*), ndc($\varphi_1 \land \varphi_2$) \geq ndc(ψ). If ndc($\varphi_1 \land \varphi_2$) > ndc(ψ), then c($\varphi_1 \land \varphi_2$) > c(ψ) follows immediately; otherwise, ndc($\varphi_1 \land \varphi_2$) = ndc(ψ) and nsc($\varphi_1 \land \varphi_2$) > nsc(ψ) (Item (*ii*)), so c($\varphi_1 \land \varphi_2$) > c(ψ) again.
- − *Case* $\psi \in ssub(\varphi_i)$. By IH, $c(\varphi_i) > c(\psi)$ for any such ψ . Thus, either
- · $ndc(\varphi_i) > ndc(\psi)$, so $ndc(\varphi_1 \land \varphi_2) > ndc(\psi)$ (by Item (*i*)) and hence $c(\varphi_1 \land \varphi_2) > c(\psi)$, or
- $\operatorname{ndc}(\varphi_i) = \operatorname{ndc}(\psi)$ and $\operatorname{nsc}(\varphi_i) > \operatorname{nsc}(\psi)$. By Item (*i*), either $\operatorname{ndc}(\varphi_1 \land \varphi_2) >$ $\operatorname{ndc}(\varphi_i)$ or $\operatorname{ndc}(\varphi_1 \land \varphi_2) = \operatorname{ndc}(\varphi_i)$. In the first case, $\operatorname{ndc}(\varphi_1 \land \varphi_2) > \operatorname{ndc}(\psi)$ and thus $\operatorname{c}(\varphi_1 \land \varphi_2) > \operatorname{c}(\psi)$; in the second case, $\operatorname{ndc}(\varphi_1 \land \varphi_2) = \operatorname{ndc}(\psi)$ and $\operatorname{nsc}(\varphi_1 \land \varphi_2) > \operatorname{nsc}(\psi)$ (using Item (*ii*)), so $\operatorname{c}(\varphi_1 \land \varphi_2) > \operatorname{c}(\psi)$.
- Inductive case ($D_{G} \varphi$). Note that, by definition,

(*i*) $\operatorname{ndc}(D_{\mathbf{G}}\varphi) = \operatorname{ndc}(\varphi)$, (*ii*) $\operatorname{nsc}(D_{\mathbf{G}}\varphi) > \operatorname{nsc}(\varphi)$.

Take any $\psi \in \operatorname{ssub}(D_{G} \varphi) = \{\varphi\} \cup \operatorname{ssub}(\varphi)$. Thus, there are two cases.

- *Case* $\psi = \varphi$. By Item (*i*) and Item (*ii*), it follows that $c(D_{G}\varphi) > c(\psi)$.

- − *Case* ψ ∈ ssub(φ). By IH, c(φ) > c(ψ) for any such ψ . This implies either
- $\operatorname{ndc}(\varphi) > \operatorname{ndc}(\psi)$, so $\operatorname{ndc}(D_{\mathsf{G}}\varphi) > \operatorname{ndc}(\psi)$ (Item (*i*)) then $\operatorname{c}(D_{\mathsf{G}}\varphi) > \operatorname{c}(\psi)$, or
- $\operatorname{ndc}(\varphi) = \operatorname{ndc}(\psi) \text{ and } \operatorname{nsc}(\varphi) > \operatorname{nsc}(\psi), \text{ so } \operatorname{ndc}(D_{\mathbf{G}}\varphi) = \operatorname{ndc}(\psi) \text{ (by Item (i))}$ and $\operatorname{nsc}(D_{\mathbf{G}}\varphi) > \operatorname{nsc}(\psi) \text{ (by Item (ii))}; \text{ hence, } \operatorname{c}(D_{\mathbf{G}}\varphi) > \operatorname{c}(\psi).$
- Inductive case ([!] φ). Note that, by definition,

(*i*) $ndc([!] \varphi) > ndc(\varphi)$.

Take any $\psi \in \operatorname{ssub}([!]\varphi) = \{\varphi\} \cup \operatorname{ssub}(\varphi)$. Thus, there are two cases.

- *Case* $\psi = \varphi$. By Item (*i*), it follows that $c([!] \varphi) > c(\psi)$.
- − *Case* ψ ∈ ssub(φ). By IH, c(φ) > c(ψ) for any such ψ . Then, either
- · $ndc(\varphi) > ndc(\psi)$, so $ndc([!] \varphi) > ndc(\psi)$ (Item (*i*)) then $c([!] \varphi) > c(\psi)$, or
- · $ndc(\varphi) = ndc(\psi)$ and $nsc(\varphi) > nsc(\psi)$, so $ndc([!]\varphi) > ndc(\psi)$ (by Item (*i*)) and hence $c([!]\varphi) > c(\psi)$. ■

Now, for the actual proposition, the proof proceeds by induction on $c(\varphi)$, the complexity of φ , with both Item (τ 1) and Item (τ 2) proved simultaneously.

- Base case (φ such that $c(\varphi)$ is minimum). A φ with the minimum c should be minimum at both ndc (i.e., $ndc(\varphi) = 0$, so any φ without observation operators) and nsc (i.e., $nsc(\varphi) = 1$). The only such formula is *p*. Proving Item (τ 1) is immediate, as the definition of τ (*p*) does not use τ ; proving Item (τ 2) is also immediate, as τ (*p*) = *p* is a formula in \mathcal{L}_D .
- Inductive case (φ such that $c(\varphi)$ is not minimum), case $\neg \varphi$. For Item ($\tau 1$), the definition of $\tau(\neg \varphi)$ uses $\tau(\varphi)$. But $\varphi \in \operatorname{ssub}(\neg \varphi)$ so, by Lemma A.1, $c(\neg \varphi) > c(\varphi)$. For Item ($\tau 2$), the same $c(\neg \varphi) > c(\varphi)$ implies that, by IH, $\tau(\varphi) \in \mathcal{L}_D$; hence, so is $\neg \tau(\varphi) = \tau(\neg \varphi)$.
- Inductive case (φ such that $c(\varphi)$ is not minimum), case $\varphi_1 \land \varphi_2$. For Item ($\tau 1$), the definition of $\tau(\varphi_1 \land \varphi_2)$ uses both $\tau(\varphi_1)$ and $\tau(\varphi_2)$. But $\varphi_i \in ssub(\varphi_1 \land \varphi_2)$ for $i \in \{1, 2\}$ so, by Lemma A.1, $c(\varphi_1 \land \varphi_2) > c(\varphi_i)$. For Item ($\tau 2$), the same $c(\varphi_1 \land \varphi_2) > c(\varphi_i)$ implies that, by IH, $\tau(\varphi_i) \in \mathcal{L}_D$; hence, so is $\tau(\varphi_1) \land \tau(\varphi_2) = \tau(\varphi_1 \land \varphi_2)$.
- Inductive case (φ such that $c(\varphi)$ is not minimum), case $D_{G} \varphi$. For Item (τ 1), the definition of $\tau(D_{G} \varphi)$ uses $\tau(\varphi)$. But $\varphi \in \text{ssub}(D_{G} \varphi)$ so, by Lemma A.1, $c(D_{G} \varphi) > c(\varphi)$. For Item (τ 2), the same $c(D_{G} \varphi) > c(\varphi)$ implies that, by IH, $\tau(\varphi) \in \mathcal{L}_{D}$; hence, so is $D_{G} \tau(\varphi) = \tau(D_{G} \varphi)$.
- Inductive case (φ such that $c(\varphi)$ is not minimum), case [!] p. For Item (τ 1), $\tau([!]p)$ uses $\tau(p)$. But $p \in ssub([!]p)$, so c([!]p) > c(p) (Lemma A.1). For Item (τ 2), from the same c([!]p) > c(p) and IH, $\tau(p) = \tau([!]p) \in \mathcal{L}_D$.
- Inductive case (φ such that c(φ) is not minimum), case [!] ¬φ. For Item (τ1), the definition of τ([!] ¬φ) uses τ(¬[!] φ). Now, on the one hand,

 $- \operatorname{ndc}([!] \neg \varphi) = 1 + \operatorname{ndc}(\varphi), \qquad - \operatorname{ndc}(\neg [!] \varphi) = 1 + \operatorname{ndc}(\varphi),$

but, on the other hand,

 $-\operatorname{nsc}([!] \neg \varphi) = 2 + 2\operatorname{nsc}(\varphi),$

 $-\operatorname{nsc}(\neg [!] \varphi) = \mathbf{1} + 2\operatorname{nsc}(\varphi).$

Thus, $c([!] \neg \varphi) > c(\neg [!] \varphi)$. For Item (72), take the just obtained $c([!] \neg \varphi) > c(\neg [!] \varphi)$; then, by IH, $\tau(\neg [!] \varphi) = \tau([!] \neg \varphi) \in \mathcal{L}_{D}$.

- Inductive case (φ such that $c(\varphi)$ is not minimum), case [!]($\varphi_1 \land \varphi_2$). For Item ($\tau 1$), the definition of $\tau([!](\varphi_1 \land \varphi_2))$ uses $\tau([!] \varphi_1 \land [!] \varphi_2)$. Now note that, on the one hand, by taking max {ndc(φ_1), ndc(φ_2)} = ndc(φ_i),
 - $\operatorname{ndc}([!](\varphi_1 \land \varphi_2)) = \mathbf{1} + \operatorname{ndc}(\varphi_i), \quad \operatorname{ndc}([!]\varphi_1 \land [!]\varphi_2) = \mathbf{1} + \operatorname{ndc}(\varphi_i),$

but, on the other hand, by taking max { $nsc(\varphi_1), nsc(\varphi_2)$ } = $nsc(\varphi_i)$,

 $- \operatorname{nsc}([!](\varphi_1 \land \varphi_2)) = 2 + 2 \operatorname{nsc}(\varphi_i), \qquad - \operatorname{nsc}([!] \varphi_1 \land [!] \varphi_2) = 1 + 2 \operatorname{nsc}(\varphi_i).$

Thus, $c([!](\varphi_1 \land \varphi_2)) > c([!]\varphi_1 \land [!]\varphi_2)$. For Item ($\tau 2$), take the same $c([!](\varphi_1 \land \varphi_2)) > c([!]\varphi_1 \land [!]\varphi_2)$; then, by IH, $\tau([!]\varphi_1 \land [!]\varphi_2) = \tau([!](\varphi_1 \land \varphi_2)) \in \mathcal{L}_D$.

• Inductive case (φ such that $c(\varphi)$ is not minimum), case [!] $D_{\mathsf{G}} \varphi$. For Item ($\tau 1$), $\tau([!] D_{\mathsf{G}} \varphi)$ uses $\tau(D_{\mathtt{A}} [!] \varphi)$. Now, on the one hand,

 $- \operatorname{ndc}([!] D_{\mathsf{G}} \varphi) = 1 + \operatorname{ndc}(\varphi), \qquad - \operatorname{ndc}(D_{\mathsf{A}}[!] \varphi) = 1 + \operatorname{ndc}(\varphi),$

but, on the other hand,

 $-\operatorname{nsc}([!] D_{\mathsf{G}} \varphi) = 2 + 2\operatorname{nsc}(\varphi), \qquad -\operatorname{nsc}(D_{\mathsf{A}}[!] \varphi) = 1 + 2\operatorname{nsc}(\varphi).$

Thus, $c([!] D_{\mathbf{G}} \varphi) > c(D_{\mathbf{A}} [!] \varphi)$. For Item ($\tau 2$), the just obtained $c([!] D_{\mathbf{G}} \varphi) > c(D_{\mathbf{A}} [!] \varphi)$ implies that, by IH, $\tau(D_{\mathbf{A}} [!] \varphi) = \tau([!] D_{\mathbf{G}} \varphi) \in \mathcal{L}_{D}$.

- Inductive case (φ such that $c(\varphi)$ is not minimum), case [!][!] φ . For Item (τ 1), the definition of τ ([!][!] φ) uses two instances of τ , namely τ ([!] φ) and τ ([!] τ ([!] φ)). For the first, [!] $\varphi \in ssub$ ([!][!] φ) so, by Lemma A.1, c([!][!] φ) > c([!] φ). For the second, note that
 - $\operatorname{ndc}([!][!]\varphi) = 2 + \operatorname{ndc}(\varphi),$
 - $\operatorname{ndc}([!] \tau([!] \varphi)) = 1 + \operatorname{ndc}(\tau([!] \varphi))$. But, as it has been shown, $\operatorname{c}([!] [!] \varphi) > \operatorname{c}([!] \varphi)$; thus, by IH, $\tau([!] \varphi) \in \mathcal{L}_{D}$ and therefore $\operatorname{ndc}([!] \varphi) = 0$. Hence, $\operatorname{ndc}([!] \tau([!] \varphi)) = 1$.

Thus, $c([!][!]\varphi) > c([!]\tau([!]\varphi))$. For Item (τ 2), the just obtained $c([!][!]\varphi) > c([!]\tau([!]\varphi))$ and IH imply $\tau([!]\tau([!]\varphi)) = \tau([!][!]\varphi) \in \mathcal{L}_{D}$.

Using the ordering c, the proposition below shows that a formula $\varphi \in \mathcal{L}_{D,[!]}$ and its translation $\tau(\varphi) \in \mathcal{L}_D$ are both provably and semantically equivalent.

Proposition A.2 For every $\varphi \in \mathcal{L}_{D,[!]}$,

 $(\tau 1) \vdash \varphi \leftrightarrow \tau(\varphi) \text{ under } \mathsf{L}_{\mathsf{D},[!]}, \qquad (\tau 2) \Vdash \varphi \leftrightarrow \tau(\varphi)$

Proof. By induction on $c(\varphi)$. The following rule will be useful.

Lemma A.2 Let φ_1, φ_2 be formulas in $\mathcal{L}_{D,[!]}$. Then, when using the system L_D ,

if
$$\vdash \varphi_1 \leftrightarrow \varphi_2$$
 then $\vdash D_{\mathbf{G}} \varphi_1 \leftrightarrow D_{\mathbf{G}} \varphi_2$.

Proof. Suppose $\vdash \varphi_1 \leftrightarrow \varphi_2$. By propositional reasoning and modus ponens, $\vdash \varphi_1 \rightarrow \varphi_2$ and $\vdash \varphi_2 \rightarrow \varphi_1$, so $\vdash D_{\mathsf{G}}(\varphi_1 \rightarrow \varphi_2)$ and $\vdash D_{\mathsf{G}}(\varphi_2 \rightarrow \varphi_1)$ (by rule G_{D}). Then, from K_{D} and modus ponens, $\vdash D_{\mathsf{G}}\varphi_1 \rightarrow D_{\mathsf{G}}\varphi_2$ and $\vdash D_{\mathsf{G}}\varphi_2 \rightarrow D_{\mathsf{G}}\varphi_1$. Hence, by propositional reasoning and modus ponens, $\vdash D_{\mathsf{G}}\varphi_1 \leftrightarrow D_{\mathsf{G}}\varphi_2$. Here is the proof of the proposition.

(τ **1**) Here are the cases.

- **Base case** (*p*). By propositional reasoning, $\vdash p \leftrightarrow p$. But $\tau(p) = p$, so the required $\vdash p \leftrightarrow \tau(p)$ follows.
- **Inductive case** $(\neg \varphi)$. Since $c(\neg \varphi) > c(\varphi)$ (same case in Proposition A.1), from IH it follows that $\vdash \varphi \leftrightarrow \tau(\varphi)$. Then $\vdash \neg \varphi \leftrightarrow \neg \tau(\varphi)$ (propositional reasoning) and thus, by τ 's definition, $\vdash \neg \varphi \leftrightarrow \tau(\neg \varphi)$.
- **Inductive case** $(\varphi_1 \land \varphi_2)$. Since $c(\varphi_1 \land \varphi_2) > c(\varphi_i)$ for $i \in \{1, 2\}$ (same case in Proposition A.1), from IH it follows that $\vdash \varphi_i \leftrightarrow \tau(\varphi_i)$. Then $\vdash (\varphi_1 \land \varphi_2) \leftrightarrow (\tau(\varphi_1) \land \tau(\varphi_2))$ (propositional reasoning) and thus, by τ 's definition, $\vdash (\varphi_1 \land \varphi_2) \leftrightarrow \tau(\varphi_1 \land \varphi_2)$.
- **Inductive case** ($D_{G} \varphi$). Since $c(D_{G} \varphi) > c(\varphi)$ (same case in Proposition A.1), from IH it follows that $\vdash \varphi \leftrightarrow \tau(\varphi)$. Then $\vdash D_{G} \varphi \leftrightarrow D_{G} \tau(\varphi)$ (Lemma A.2, since L_{D} is a subsystem of $L_{D,[!]}$) and thus, by τ 's definition, $\vdash D_{G} \varphi \leftrightarrow \tau(D_{G} \varphi)$.
- **Inductive case** ([!] *p*). Since c([!]p) > c(p) (see same case in Proposition A.1), from IH it follows that $\vdash p \leftrightarrow \tau(p)$. But $\vdash [!]p \leftrightarrow p$ (axiom $A_!^p$) so, by propositional reasoning, $\vdash [!]p \leftrightarrow \tau(p)$. Hence, by τ 's definition, $\vdash [!]p \leftrightarrow \tau([!]p)$.
- **Inductive case** ([!] $\neg \varphi$). Since $c([!] \neg \varphi) > c(\neg [!] \varphi)$ (same case in Proposition A.1), from IH it follows that $\vdash \neg [!] \varphi \leftrightarrow \tau(\neg [!] \varphi)$. But $\vdash [!] \neg \varphi \leftrightarrow \neg [!] \varphi$ (axiom $A_!^{\neg}$) so, by propositional reasoning, $\vdash [!] \neg \varphi \leftrightarrow \tau(\neg [!] \varphi)$. Hence, by τ 's definition, $\vdash [!] \neg \varphi \leftrightarrow \tau([!] \neg \varphi)$.
- **Inductive case** ([!]($\varphi_1 \land \varphi_2$)). Since $c([!](\varphi_1 \land \varphi_2)) > c([!]\varphi_1 \land [!]\varphi_2)$ (same case in Proposition A.1), from IH it follows that \vdash ([!] $\varphi_1 \land$ [!] φ_2) $\leftrightarrow \tau([!]\varphi_1 \land [!]\varphi_2)$. But \vdash [!]($\varphi_1 \land \varphi_2$) \leftrightarrow ([!] $\varphi_1 \land [!]\varphi_2$) (axiom $A_{!}^{\land}$) so, by propositional reasoning, \vdash [!]($\varphi_1 \land \varphi_2$) $\leftrightarrow \tau([!]\varphi_1 \land [!]\varphi_2$). Hence, by τ 's definition, \vdash [!]($\varphi_1 \land \varphi_2$) $\leftrightarrow \tau([!](\varphi_1 \land \varphi_2)$).
- **Inductive case** ([!] $D_{G} \varphi$). Since $c([!] D_{G} \varphi) > c(D_{A}[!] \varphi)$ (same case in Proposition A.1), from IH it follows that $\vdash D_{A}[!] \varphi \leftrightarrow \tau(D_{A}[!] \varphi)$. But $\vdash [!] D_{G} \varphi \leftrightarrow D_{A}[!] \varphi$ (axiom $A^{D}_{!}$) so, by propositional reasoning, \vdash [!] $D_{G} \varphi \leftrightarrow \tau(D_{A}[!] \varphi)$. Hence, by τ 's definition, $\vdash [!] D_{G} \varphi \leftrightarrow \tau([!] D_{G} \varphi)$.
- **Inductive case** ([!] [!] φ). Since $c([!] [!] \varphi) > c([!] \varphi)$ and $c([!] [!] \varphi) > c([!] \tau([!] \varphi))$ (same case in Proposition A.1), from IH it follows that $\vdash [!] \varphi \leftrightarrow \tau([!] \varphi)$ and $\vdash [!] \tau([!] \varphi) \leftrightarrow \tau([!] \tau([!] \varphi))$. From the first and rule RE₁, it follows that $\vdash [!] [!] \varphi \leftrightarrow t([!] \tau([!] \varphi))$. Hence, from the last two and propositional reasoning, $\vdash [!] [!] \varphi \leftrightarrow \tau([!] \tau([!] \varphi))$ and thus, by τ 's definition, $\vdash [!] [!] \varphi \leftrightarrow \tau([!] [!] \varphi)$.
- (τ 2) By the previous item, $\vdash \varphi \leftrightarrow \tau(\varphi)$. But, as it has been shown, $L_{D,[!]}$ is sound for pointed M_{A} -models; therefore, $\Vdash \varphi \leftrightarrow \tau(\varphi)$.

Finally, the argument for strong completeness, which has three steps.

(*i*) Take $\Psi \cup {\varphi} \subseteq \mathcal{L}_{D,[!]}$ and suppose $\Psi \Vdash \varphi$, i.e., suppose that, for every pointed $\mathbf{M}_{\mathbf{A}}$ -model (M, w), if $(M, w) \Vdash \Psi$ then $(M, w) \Vdash \varphi$ or, in other words,

for every such (M, w),

$$(M, w) \Vdash \psi$$
 for all $\psi \in \Psi$ implies $(M, w) \Vdash \varphi$.

Since $\Vdash \varphi' \leftrightarrow \tau(\varphi')$ for every $\varphi' \in \mathcal{L}_{D,[!]}$ (Proposition A.2.(τ 2)), it follows that, for every (M, w),

- $(M, w) \Vdash \tau(\psi)$ for all $\psi \in \Psi$ if and only if $(M, w) \Vdash \psi$ for all $\psi \in \Psi$, and
- $(M, w) \Vdash \varphi$ if and only if $(M, w) \Vdash \tau(\varphi)$.

Thus, for every (M, w),

 $(M, w) \Vdash \tau(\psi)$ for all $\psi \in \Psi$ implies $(M, w) \Vdash \tau(\varphi)$.

By defining $\tau(\Psi) := \{\tau(\psi) \mid \psi \in \Psi\}$, it follows that $(M, w) \Vdash \tau(\Psi)$ implies $(M, w) \Vdash \tau(\varphi)$ for every (M, w); in other words, $\tau(\Psi) \Vdash \tau(\varphi)$.

- (*ii*) Since $\tau(\varphi') \in \mathcal{L}_D$ for every $\varphi' \in \mathcal{L}_{D,[!]}$ (Proposition A.1.(τ 2)), it follows that $\tau(\Psi) \cup \{\tau(\varphi)\} \subseteq \mathcal{L}_D$; therefore, the just obtained $\tau(\Psi) \Vdash \tau(\varphi)$ and Theorem 1 imply $\tau(\Psi) \vdash \tau(\varphi)$ under L_D . Since L_D is a subsystem of $L_{D,[!]}$, it follows that $\tau(\Psi) \vdash \tau(\varphi)$ under $L_{D,[!]}$.
- (*iii*) Since $\tau(\Psi) \vdash \tau(\varphi)$ under $L_{D,[!]}$, there are $\psi'_1, \ldots, \psi'_n \in \tau(\Psi)$ such that

$$\vdash \left(\psi_1' \wedge \cdots \wedge \psi_n'\right) \to \tau(\varphi)$$

under $L_{D,[!]}$. Then, from the definition of $\tau(\Psi)$, there are $\psi_1, \ldots, \psi_n \in \Psi$ such that

$$\vdash (\tau(\psi_1) \land \cdots \land \tau(\psi_n)) \to \tau(\varphi).$$

under $L_{D,[!]}$. But $\vdash \varphi' \leftrightarrow \tau(\varphi')$ for every $\varphi' \in \mathcal{L}_{D,[!]}$ (Proposition A.2.(τ 1)); hence, from $\Psi \cup \{\varphi\} \subseteq \mathcal{L}_{D,[!]}$ (and using propositional reasoning for the first),

$$\vdash (\psi_1 \land \dots \land \psi_n) \to (\tau(\psi_1) \land \dots \land \tau(\psi_n)) \quad \text{and} \quad \vdash \tau(\varphi) \to \varphi.$$

under $L_{D,[!]}$. Therefore,

$$\vdash (\psi_1 \land \cdots \land \psi_n) \to \varphi$$

and hence $\Psi \vdash \varphi$ under $L_{D,[!]}$, as required.

A.2 Proof of Theorem 3 (System L_D, [S!])

Soundness Again, the soundness of axioms and rules in L_D is well-known. For those in Table 3, the soundness of $A_{S!}^p$, $A_{S!}^-$, $A_{S!}^\wedge$ and $RE_{S!}$ is as in the $\forall \forall \forall \forall$ case (for the latter, recall that $M^{S!}$ is a model in M_A), and $A_{S!}^D$ has been proved valid already (Proposition 3.6).

Completeness The argument relies on the following translation.

Definition A.3 (Translation) The translation τ is given by

$$\begin{split} \tau(p) &:= p, & \tau([\mathbf{S}!]p) := \tau(p), \\ \tau(\neg \varphi) &:= \neg \tau(\varphi), & \tau([\mathbf{S}!] \neg \varphi) := \tau(\neg [\mathbf{S}!]\varphi), \\ \tau(\varphi_1 \land \varphi_2) &:= \tau(\varphi_1) \land \tau(\varphi_2), & \tau([\mathbf{S}!](\varphi_1 \land \varphi_2)) := \tau([\mathbf{S}!]\varphi_1 \land [\mathbf{S}!]\varphi_2), \\ \tau(\mathsf{D}_{\mathbf{G}}\varphi) &:= \mathsf{D}_{\mathbf{G}}\tau(\varphi), & \tau([\mathbf{S}!] \mathsf{D}_{\mathbf{G}}\varphi) := \tau(\mathsf{D}_{\mathbf{S}\cup\mathbf{G}}[\mathbf{S}!]\varphi), \\ \tau([\mathbf{S}!!][\mathbf{S}_2!]\varphi) &:= \tau([\mathbf{S}_1!]\tau([\mathbf{S}_2!]\varphi)). \end{split}$$

This translation works again in an "inside-out' fashion, dealing first with the deepest occurrence of [S!] before dealing with the rest. The strategy for proving strong completeness is as in the $\forall \forall \forall \forall$ case: (*i*) show that τ is a proper recursive translation that returns formulas in \mathcal{L}_D (Proposition A.3), (*ii*) show that a formula and its translation are both provably and semantically equivalent (Proposition A.4), and (*iii*) use τ and the completeness of L_D to show that, if $\Psi \cup \{\varphi\} \subseteq \mathcal{L}_{D, [S!]}$, then from $\Psi \Vdash \varphi$ it follows that φ is derivable from Ψ in $L_{D, [S!]}$.

Here is the notion of complexity on which the proofs of Proposition A.3 and Proposition A.4 rely.

Definition A.4 (Complexity for $\mathcal{L}_{D, [S!]}$) The functions nsc : $\mathcal{L}_{D, [S!]} \to \mathbb{N} \setminus \{0\}$ and ndc : $\mathcal{L}_{D, [S!]} \to \mathbb{N}$ are defined, for atoms, Boolean operators and the modality D_{G} , as in the $\forall \forall \forall \forall$ case (Definition A.2). For the dynamic operator [S!], the cases are as for [!]:

 $\operatorname{nsc}([\mathbf{S}!]\varphi) := 2\operatorname{nsc}(\varphi), \qquad \operatorname{ndc}([\mathbf{S}!]\varphi) := 1 + \operatorname{ndc}(\varphi).$

Then define c as before: given $\varphi_1, \varphi_2 \in \mathcal{L}_{D,[S!]}$, write $c(\varphi_1) > c(\varphi_2)$ if and only if

 $\operatorname{ndc}(\varphi_1) > \operatorname{ndc}(\varphi_2)$ or $\operatorname{ndc}(\varphi_1) = \operatorname{ndc}(\varphi_2)$ and $\operatorname{nsc}(\varphi_1) > \operatorname{nsc}(\varphi_2)$.

First, τ is a proper recursive translation from $\mathcal{L}_{D,[S!]}$ to \mathcal{L}_{D} .

Proposition A.3 For every $\varphi \in \mathcal{L}_{D,[S!]}$,

(τ **1**) *if* $\tau(\phi)$ *is defined in terms of* $\tau(\psi)$ *, then* $c(\phi) > c(\psi)$ *.*

($\tau 2$) $\tau(\varphi) \in \mathcal{L}_{D}$.

Proof. The following lemma will be useful.

Lemma A.3 Let ssub : $\mathcal{L}_{D,[S!]} \to \wp(\mathcal{L}_{D,[S!]})$ be the strict subformula function for the language $\mathcal{L}_{D,[S!]}$ (defined in the expected way); let φ be an $\mathcal{L}_{D,[S!]}$ -formula. Then, $c(\varphi) > c(\psi)$ for every $\psi \in ssub(\varphi)$.

Proof. The proof is by structural induction on φ . Given that nsc, ndc and c are defined as for the $\forall \forall \forall$ instance, all cases here are exactly as in their $\forall \forall \forall$ counterpart (Lemma A.1).

The proof of the proposition is by induction on $c(\varphi)$ relying on Lemma A.3, just as in the $\forall \forall \forall \forall$ case. Again, Item (τ 1) and Item (τ 2) are proved simultaneously. Given that nsc, ndc, *c* and τ are defined as for the $\forall \forall \forall$ instance, all cases here are exactly as in their $\forall \forall \forall$ counterpart (Proposition A.1).

Then, a formula $\varphi \in \mathcal{L}_{D,[S!]}$ and its translation $\tau(\varphi) \in \mathcal{L}_D$ are both provably and semantically equivalent.

Proposition A.4 For every $\varphi \in \mathcal{L}_{D,[S!]}$,

 $(\tau 1) \vdash \varphi \leftrightarrow \tau(\varphi), \qquad (\tau 2) \Vdash \varphi \leftrightarrow \tau(\varphi)$

Proof. Here are the arguments.

- (τ 1) The proof proceeds by induction on c(φ). Given Proposition A.3 and the fact that τ is defined as in the $\forall \forall \forall$ instance, the base case (p) and inductive cases $\neg \varphi$, $\varphi_1 \land \varphi_2$ and $D_G \varphi$ are as in Proposition A.2.(τ 1), the latter using Lemma A.2 and the fact that L_D is a subsystem of $L_{D,[S!]}$. The inductive cases [S!] p, [S!] $\neg \varphi$, [S!]($\varphi_1 \land \varphi_2$), [S!] $D_G \varphi$ and [S₁!] [S₂!] φ are also as in Proposition A.2.(τ 1) (relying on Proposition A.3 and τ 's definition), this time using axioms $A_{S_1}^{P}$, $A_{S_1}^{D}$, $A_{S_1}^{D}$, $A_{S_1}^{D}$, and rule RE_{S1}, respectively.
- (τ 2) Exactly as in Proposition A.2.(τ 2).

Finally, the argument for strong completeness is as the $\forall \forall \forall$ case (page 32), relying on Proposition A.3 and Proposition A.4 instead.

A.3 Proof of Theorem 4 (System $L_{D,[S_{\chi}!]}$)

Soundness The soundness of axioms and rules in L_D is well-known. For those in Table 4, soundness of $A_{s_{\chi^{!}}}^{p}$, $A_{s_{\chi^{!}}}^{\gamma}$, $A_{s_{\chi^{!}}}^{\wedge}$ and $RE_{s_{\chi^{!}}}$ is as in the previous cases (for the latter, recall that $M^{s_{\chi^{!}}}$ is a model in M_{A}), and $A_{s_{\chi^{!}}}^{D}$ has been proved valid already (Proposition 4.4).

Completeness The argument uses the following "inside-out" translation.

Definition A.5 (Translation) The translation τ is given by

$\tau(p) := p,$	$\tau([\mathbf{S}_{\chi}!]p) := \tau(p),$	
$\tau(\neg \varphi) := \neg \tau(\varphi),$	$\tau([\mathbf{S}_{\chi}!]\neg\varphi):=\tau(\neg[\mathbf{S}_{\chi}!]\varphi),$	
$\tau(\varphi_1 \land \varphi_2) := \tau(\varphi_1) \land \tau(\varphi_2),$	$\tau([\mathbf{S}_{\chi}!](\varphi_1 \land \varphi_2)) := \tau([\mathbf{S}_{\chi}!] \varphi_1 \land [\mathbf{S}_{\chi}!] \varphi_2),$	
$\tau(D_{G}\varphi):=D_{G}\tau(\varphi),$	$\tau([\mathbf{S}_{\chi}!] \mathbf{D}_{\mathbf{G}} \varphi) := \tau(\mathbf{D}_{\mathbf{S} \cup \mathbf{G}} [\mathbf{S}_{\chi}!] \varphi \wedge \mathbf{D}_{\mathbf{G}}^{\chi} [\mathbf{S}_{\chi}!] \varphi),$	
	$\tau([\mathbf{S}_{1\chi_1}!] [\mathbf{S}_{2\chi_2}!] \varphi) := \tau([\mathbf{S}_{1\chi_1}!] \tau([\mathbf{S}_{2\chi_2}!] \varphi)).$	◄

Here is the notion of complexity on which the proofs of Proposition A.5 and Proposition A.6 will rely.

Definition A.6 (Complexity for $\mathcal{L}_{D, [S_1]}$) The functions nsc : $\mathcal{L}_{D, [S_{\chi}!]} \to \mathbb{N} \setminus \{0\}$ and ndc : $\mathcal{L}_{D, [S_{\chi}!]} \to \mathbb{N}$ are defined, for atoms, Boolean operators and the modality D_G, as in the $\forall \forall \forall$ case (Definition A.2). The case of dynamic operator $[S_{\chi}!]$, though, is different:

 $\operatorname{nsc}([\mathbf{S}_{\chi}!]\varphi) := (8 + \operatorname{nsc}(\chi))\operatorname{nsc}(\varphi), \qquad \operatorname{ndc}([\mathbf{S}_{\chi}!]\varphi) := 1 + \operatorname{ndc}(\chi) + \operatorname{ndc}(\varphi).$

Define c as before: given $\varphi_1, \varphi_2 \in \mathcal{L}_{D, [S_{\lambda'}]}$, write $c(\varphi_1) > c(\varphi_2)$ if and only if

 $\operatorname{ndc}(\varphi_1) > \operatorname{ndc}(\varphi_2)$ or $\operatorname{ndc}(\varphi_1) = \operatorname{ndc}(\varphi_2)$ and $\operatorname{nsc}(\varphi_1) > \operatorname{nsc}(\varphi_2)$.

First, τ is a proper recursive translation from $\mathcal{L}_{D_r[S_r!]}$ to \mathcal{L}_{D} .

Proposition A.5 For every $\varphi \in \mathcal{L}_{D,[S_{\chi}!]}$,

(τ **1**) *if* $\tau(\phi)$ *is defined in terms of* $\tau(\psi)$ *, then* $c(\phi) > c(\psi)$ *.*

($\tau 2$) $\tau(\varphi) \in \mathcal{L}_{D}$.

Proof. The following lemma will be useful.

Lemma A.4 Let ssub : $\mathcal{L}_{D,[\mathbf{S}_{\lambda}!]} \to \varphi(\mathcal{L}_{D,[\mathbf{S}_{\lambda}!]})$ be the strict subformula function for the language $\mathcal{L}_{D,[\mathbf{S}_{\lambda}!]}$ (defined for atoms, Boolean operators and the $D_{\mathbf{G}}$ modality as before, and for $[\mathbf{S}_{\lambda}!]$ as $ssub([\mathbf{S}_{\lambda}!]\varphi) := \{\chi, \varphi\} \cup ssub(\chi) \cup ssub(\varphi)$); let φ be an $\mathcal{L}_{D,[\mathbf{S}_{\lambda}!]}$ -formula. Then, $c(\varphi) > c(\psi)$ for every $\psi \in ssub(\varphi)$.

Proof. The proof is by structural induction on φ . For atoms, Boolean operators and the D_G modality, the functions nsc, ndc and c are all defined as for the $\forall \forall \forall$ instance; thus, the cases for p, $\neg \varphi$, $\varphi_1 \land \varphi_2$ and D_G φ are exactly as in Lemma A.1. For the inductive case [**S**_{*x*}!] φ note that, by definition,

(*i*) $\operatorname{ndc}([\mathbf{S}_{\chi}!]\varphi) > \operatorname{ndc}(\chi)$ and $\operatorname{ndc}([\mathbf{S}_{\chi}!]\varphi) > \operatorname{ndc}(\varphi)$.

Thus, take any $\psi \in \operatorname{ssub}([S_{\chi}!]\varphi) = \{\chi, \varphi\} \cup \operatorname{ssub}(\chi) \cup \operatorname{ssub}(\varphi)$, and consider the cases.

- *Cases* $\psi = \varphi$ *and* $\psi = \chi$. By Item (*i*), it follows that $c([S_{\chi}!] \varphi) > c(\psi)$.
- *Case* $\psi \in ssub(\chi)$. By IH, $c(\chi) > c(\psi)$ for any such ψ . Then, by definition of c, either
 - $ndc(\chi) > ndc(\psi)$, so $ndc([S_{\chi}!]\varphi) > ndc(\psi)$ (by Item (*i*)) and therefore $c([S_{\chi}!]\varphi) > c(\psi)$, or
 - $\operatorname{ndc}(\chi) = \operatorname{ndc}(\psi)$ and $\operatorname{nsc}(\chi) > \operatorname{nsc}(\psi)$, so $\operatorname{ndc}([\mathbf{S}_{\chi}!]\chi) > \operatorname{ndc}(\psi)$ (by Item (*i*)) and hence $\operatorname{c}([\mathbf{S}_{\chi}!]\varphi) > \operatorname{c}(\psi)$.
- *Case* $\psi \in ssub(\varphi)$. Exactly as the previous one.

The proof of the proposition is by induction on $c(\varphi)$ relying on Lemma A.4, analogous to the $\forall \forall \forall \forall$ case. Again, Item ($\tau 1$) and Item ($\tau 2$) are proved simultaneously. For atoms, Boolean operators and formulas of the form D_G φ , the functions nsc, ndc, c *and the translation* τ are defined as for the $\forall \forall \forall$ instance; thus, cases p, $\neg \varphi$, $\varphi_1 \land \varphi_2$ and D_G φ are exactly as in Proposition A.1. Here are the remaining cases.

- Inductive case (φ such that $c(\varphi)$ is not minimum), case $[S_{\chi}!]p$. For Item ($\tau 1$), the definition of $\tau([S_{\chi}!]p)$ uses $\tau(p)$. But $p \in ssub([S_{\chi}!]p)$ so, by Lemma A.4, $c([S_{\chi}!]p) > c(p)$. For Item ($\tau 2$), take the just obtained $c([S_{\chi}!]p) > c(p)$; then, by IH, $\tau(p) = \tau([S_{\chi}!]p) \in \mathcal{L}_{D}$.
- Inductive case (φ such that $c(\varphi)$ is not minimum), case $[S_{\chi}!] \neg \varphi$. For Item ($\tau 1$), the definition of $\tau([S_{\chi}!] \neg \varphi)$ uses $\tau(\neg [S_{\chi}!] \varphi)$. Now note that, on the one hand,
 - $\operatorname{ndc}([\mathbf{S}_{\chi}!] \neg \varphi) = \mathbf{1} + \operatorname{ndc}(\chi) + \operatorname{ndc}(\varphi),$
 - $\operatorname{ndc}(\neg [S_{\chi}!]\varphi) = 1 + \operatorname{ndc}(\chi) + \operatorname{ndc}(\varphi),$

but, on the other hand,

- $\operatorname{nsc}([\mathsf{S}_{\chi}!] \neg \varphi) = 8 + 8 \operatorname{nsc}(\varphi) + \operatorname{nsc}(\chi) + \operatorname{nsc}(\chi) \operatorname{nsc}(\varphi),$
- $\operatorname{nsc}(\neg [S_{\chi}!] \varphi) = 1 + 8 \operatorname{nsc}(\varphi) + \operatorname{nsc}(\chi) \operatorname{nsc}(\varphi).$

Thus, $c([\mathbf{S}_{\chi}!] \neg \varphi) > c(\neg [\mathbf{S}_{\chi}!] \varphi)$. For Item ($\tau 2$), the just obtained $c([\mathbf{S}_{\chi}!] \neg \varphi) > c(\neg [\mathbf{S}_{\chi}!] \varphi)$ implies, by IH, $\tau(\neg [\mathbf{S}_{\chi}!] \varphi) = \tau([\mathbf{S}_{\chi}!] \neg \varphi) \in \mathcal{L}_{D}$.

- Inductive case (φ such that $c(\varphi)$ is not minimum), case $[S_{\chi}!](\varphi_1 \land \varphi_2)$. For Item ($\tau 1$), the definition of $\tau([S_{\chi}!](\varphi_1 \land \varphi_2))$ uses $\tau([S_{\chi}!]\varphi_1 \land [S_{\chi}!]\varphi_2)$. Now, on the one hand, by taking max {ndc(φ_1), ndc(φ_2)} = ndc(φ_i),
 - $\operatorname{ndc}([\mathbf{S}_{\chi}!](\varphi_1 \wedge \varphi_2)) = 1 + \operatorname{ndc}(\chi) + \operatorname{ndc}(\varphi_i),$
 - $\operatorname{ndc}([\mathbf{S}_{\chi}!]\varphi_1 \wedge [\mathbf{S}_{\chi}!]\varphi_2) = \mathbf{1} + \operatorname{ndc}(\chi) + \operatorname{ndc}(\varphi_i),$

but, on the other hand, by taking max {nsc(φ_1), nsc(φ_2)} = nsc(φ_i)

- $\operatorname{nsc}([\mathbf{S}_{\chi}!](\varphi_1 \wedge \varphi_2)) = \mathbf{8} + \mathbf{8}\operatorname{nsc}(\varphi_i) + \operatorname{nsc}(\chi) + \operatorname{nsc}(\chi)\operatorname{nsc}(\varphi_i),$
- $\operatorname{nsc}([\mathbf{S}_{\chi}!]\varphi_1 \wedge [\mathbf{S}_{\chi}!]\varphi_2) = \mathbf{1} + \mathbf{8}\operatorname{nsc}(\varphi_i) + \operatorname{nsc}(\chi)\operatorname{nsc}(\varphi_i).$

Thus, $c([\mathbf{S}_{\chi}!](\varphi_1 \land \varphi_2)) > c([\mathbf{S}_{\chi}!]\varphi_1 \land [\mathbf{S}_{\chi}!]\varphi_2)$. For Item (τ 2), take the just obtained $c([\mathbf{S}_{\chi}!](\varphi_1 \land \varphi_2)) > c([\mathbf{S}_{\chi}!]\varphi_1 \land [\mathbf{S}_{\chi}!]\varphi_2)$; then, by IH, $\tau([\mathbf{S}_{\chi}!]\varphi_1 \land [\mathbf{S}_{\chi}!]\varphi_2) = \tau([\mathbf{S}_{\chi}!](\varphi_1 \land \varphi_2)) \in \mathcal{L}_D$.

- Inductive case (φ such that $c(\varphi)$ is not minimum), case $[S_{\chi}!] D_{G} \varphi$. For Item ($\tau 1$), the definition of $\tau([S_{\chi}!] D_{G} \varphi)$ uses $\tau(D_{S \cup G} [S_{\chi}!] \varphi \land D_{G}^{\chi} [S_{\chi}!] \varphi)$. Now note that, on the one hand,
 - $\operatorname{ndc}([\mathbf{S}_{\chi}!] \operatorname{D}_{\mathbf{G}} \varphi) = \mathbf{1} + \operatorname{ndc}(\chi) + \operatorname{ndc}(\varphi),$
 - $\operatorname{ndc}(\operatorname{D}_{\mathsf{S}\cup\mathsf{G}}[\mathsf{S}_{\chi}!]\varphi \wedge \operatorname{D}_{\mathsf{G}}^{\chi}[\mathsf{S}_{\chi}!]\varphi) = 1 + \operatorname{ndc}(\chi) + \operatorname{ndc}(\varphi),$

but, on the other hand,

- $\operatorname{nsc}([S_{\chi}!]D_{G}\varphi) = 8 + 8\operatorname{nsc}(\varphi) + \operatorname{nsc}(\chi) + \operatorname{nsc}(\chi)\operatorname{nsc}(\varphi),$
- $-\operatorname{nsc}(\mathrm{D}_{\mathsf{S}\cup\mathsf{G}}[\mathsf{S}_{\chi}!]\varphi\wedge\mathrm{D}_{\mathsf{G}}^{\chi}[\mathsf{S}_{\chi}!]\varphi)=8+8\operatorname{nsc}(\varphi)+\operatorname{nsc}(\chi)\operatorname{nsc}(\varphi).$

Thus, $c([\mathbf{S}_{\chi}!] D_{\mathbf{G}} \varphi) > c(D_{\mathbf{A}} [\mathbf{S}_{\chi}!] \varphi)$. This also yields Item (τ 2), as from it and IH it follows that $\tau(D_{\mathbf{A}} [\mathbf{S}_{\chi}!] \varphi) = \tau([\mathbf{S}_{\chi}!] D_{\mathbf{G}} \varphi) \in \mathcal{L}_{D}$.

- Inductive case (φ such that $c(\varphi)$ is not minimum), case $[S_{1\chi_1}!][S_{2\chi_2}!]\varphi$. For Item (τ 1), the definition of $\tau([S_{1\chi_1}!][S_{2\chi_2}!]\varphi)$ uses two instances of τ , namely $\tau([S_{2\chi_2}!]\varphi)$ and $\tau([S_{1\chi_1}!]\tau([S_{2\chi_2}!]\varphi))$. For the first, $[S_{2\chi_2}!]\varphi \in ssub([S_{1\chi_1}!][S_{2\chi_2}!]\varphi)$ so, by Lemma A.4, $c([S_{1\chi_1}!][S_{2\chi_2}!]\varphi) > c([S_{2\chi_2}!]\varphi)$. For the second, note that
 - $\operatorname{ndc}([S_{1\chi_1}!][S_{2\chi_2}!]\varphi) = 2 + \operatorname{ndc}(\chi_1) + \operatorname{ndc}(\chi_2) + \operatorname{ndc}(\varphi),$
 - ndc([**S**_{1_{*λ*1}}!] τ([**S**_{2_{*λ*2}}!]*φ*)) = 1 + ndc(*χ*₁) + ndc(τ([**S**_{2_{*λ*2}}!]*φ*)). But, as it has been shown, c([**S**_{1_{*λ*1}}!] [**S**_{2_{*λ*2}!]*φ*) > c([**S**_{2_{*λ*2}!]*φ*); thus, by IH, τ([**S**_{2_{*λ*2}!]*φ*) ∈ *L*_D and therefore ndc([**S**_{2_{*λ*2}!]*φ*) = 0. Hence, ndc([**S**_{1_{*λ*1}!] τ([**S**_{2_{*λ*2}!]*φ*)) = **1** + ndc(*χ*₁).}}}}}}

Thus, $c([\mathbf{S}_{1\chi_1}!][\mathbf{S}_{2\chi_2}!]\varphi) > c([\mathbf{S}_{1\chi_1}!]\tau([\mathbf{S}_{2\chi_2}!]\varphi))$. This also yields Item (τ 2) as, from it and IH, $\tau([\mathbf{S}_{1\chi_1}!]\tau([\mathbf{S}_{2\chi_2}!]\varphi)) = \tau([\mathbf{S}_{1\chi_1}!][\mathbf{S}_{2\chi_2}!]\varphi) \in \mathcal{L}_D$.

Then, a formula $\varphi \in \mathcal{L}_{D,[\mathbf{S}_{\chi}!]}$ and its translation $\tau(\varphi) \in \mathcal{L}_{D}$ are both provably and semantically equivalent.

Proposition A.6 For every $\varphi \in \mathcal{L}_{D,[S_r!]}$

 $(\tau 1) \vdash \varphi \leftrightarrow \tau(\varphi), \qquad (\tau 2) \Vdash \varphi \leftrightarrow \tau(\varphi)$

Proof. Here are the arguments.

(τ 1) The proof proceeds by induction on c(φ). Given Proposition A.5 and the fact that τ is defined as in the $\forall \forall \forall$ instance, the base case (p) and inductive cases $\neg \varphi$, $\varphi_1 \land \varphi_2$ and $D_G \varphi$ are as in Proposition A.2.(τ 1), the latter

using Lemma A.2 and the fact that L_D is a subsystem of $L_{D,[S_{\chi}!]}$. The inductive cases $[S_{\chi}!] p$, $[S_{\chi}!] \neg \varphi$, $[S_{\chi}!] (\varphi_1 \land \varphi_2)$, $[S_{\chi}!] D_G \varphi$ and $[S_{1\chi_1}!] [S_{2\chi_2}!] \varphi$ are also as in Proposition A.2.($\tau 1$) (relying on Proposition A.5 and τ 's definition), this time using axioms $A_{S_{\chi'}!}^p$, $A_{S_{\chi'}!}^{\neg}$, $A_{S_{\chi'}!}^{\wedge}$, $A_{S_{\chi'}!}^{\circ}$ and rule $\mathsf{RE}_{S_{\chi'}!}$ respectively.

(τ 2) Exactly as in Proposition A.2.(τ 2).

Finally, the argument for strong completeness is as the $\forall \forall \forall \forall case (page 32)$, relying on Proposition A.5 and Proposition A.6 instead.

References

- T. Ågotnes and Y. N. Wáng. Resolving distributed knowledge. *Artificial Intelligence*, 252: 1–21, 2017. DOI: 10.1016/j.artint.2017.07.002. Cited on pages 16 and 26.
- T. Ågotnes, P. Balbiani, H. van Ditmarsch, and P. Seban. Group announcement logic. *Journal of Applied Logic*, 8(1):62–81, 2010. DOI: 10.1016/j.jal.2008.12.002. Cited on page 2.
- S. N. Artëmov. The logic of justification. *The Review of Symbolic Logic*, 1(4):477–513, Dec. 2008. DOI: 10.1017/S1755020308090060. Cited on page 8.
- P. Balbiani, A. Baltag, H. van Ditmarsch, A. Herzig, T. Hoshi, and T. de Lima. 'Knowable' as 'known after an announcement'. *Review of Symbolic Logic*, 1(3):305–334, 2008. DOI: 10.1017/S1755020308080210. Cited on page 27.
- A. Baltag. What is del good for? Presentation at the ESSLLI 2010 workshop on Logic, Rationality and Intelligent Interaction, 2010. URL: http://ai.stanford.edu/~epacuit/lograt/esslli2010-slides/copenhagenesslli.pdf. Cited on page 16.
- A. Baltag and S. Smets. A qualitative theory of dynamic interactive belief revision. In G. Bonanno, W. van der Hoek, and M. Wooldridge, editors, *Logic and the Foundations of Game and Decision Theory (LOFT7)*, volume 3 of *Texts in Logic and Games*, pages 13–60. Amsterdam University Press, Amsterdam, The Netherlands, 2008. ISBN 978-90 8964 026 0. Cited on page 2.
- A. Baltag and S. Smets. Protocols for belief merge: Reaching agreement via communication. *Logic Journal of the IGPL*, 21(3):468–487, 2013. DOI: 10.1093/jigpal/jzs049. Cited on page 2.
- A. Baltag and S. Smets. Learning what others know. In E. Albert and L. Kovács, editors, LPAR 2020: 23rd International Conference on Logic for Programming, Artificial Intelligence and Reasoning, Alicante, Spain, May 22-27, 2020, volume 73 of EPiC Series in Computing, pages 90–119. EasyChair, 2020. DOI: 10.29007/plm4. URL: https://easychair.org/publications/paper/V8Jp. Cited on pages 6, 16, 25, and 26.
- A. Baltag, L. S. Moss, and S. Solecki. The logic of public announcements, common knowledge, and private suspicions. In I. Gilboa, editor, *TARK*, pages 43–56, San Francisco, CA, USA, 1998. Morgan Kaufmann. ISBN 1-55860-563-0. URL: http://dl.acm.org/citation.cfm?id=645876.671885. Cited on page 26.

- A. Baltag, L. S. Moss, and S. Solecki. The logic of public announcements, common knowledge and private suspicions. Technical Report SEN-R9922, CWI, Amsterdam, 1999. url: https://ir.cwi.nl/pub/4497. Cited on page 26.
- A. Baltag, N. Bezhanishvili, A. Özgün, and S. Smets. Justified belief and the topology of evidence. In J. A. Väänänen, Å. Hirvonen, and R. J. G. B. de Queiroz, editors, Logic, Language, Information, and Computation 23rd International Workshop, WoLLIC 2016, Puebla, México, August 16-19th, 2016. Proceedings, volume 9803 of Lecture Notes in Computer Science, pages 83–103. Springer, 2016. ISBN 978-3-662-52920-1. DOI: 10.1007/978-3-662-52921-8'6. Extended version available at https://www.illc.uva.nl/Research/Publications/Reports/PP-2016-21.text.pdf. Cited on page 8.
- A. Baltag, R. Boddy, and S. Smets. Group knowledge in interrogative epistemology. In H. van Ditmarsch and G. Sandu, editors, *Jaakko Hintikka on Knowledge and Game-Theoretical Semantics*, volume 12 of *Outstanding Contributions to Logic*, pages 131– 164. Springer, 2018. ISBN 978-3-319-62863-9. DOI: 10.1007/978-3-319-62864-6'5. URL: http://www.illc.uva.nl/Research/Publications/Reports/PP-2017-15.text.pdf. Cited on page 27.
- A. Baltag, Z. Christoff, R. K. Rendsvig, and S. Smets. Dynamic epistemic logics of diffusion and prediction in social networks. *Studia Logica*, 107:489–531, June 2019. DOI: 10.1007/s11225-018-9804-x. URL: https://www.illc.uva.nl/Research/Publications/Reports/PP-2015-22.text.pdf. Cited on page 25.
- J. van Benthem. Dynamic logic for belief revision. Journal of Applied Non-Classical Logics, 17(2):129–155, 2007. DOI: 10.3166/jancl.17.129-155. URL: http://www.illc.uva.nl/Publications/ResearchReports/PP-2006-11.text.pdf. Cited on page 2.
- J. van Benthem. *Logical Dynamics of Information and Interaction*. Cambridge University Press, 2011. ISBN 978-0-521-76579-4. Cited on page 2.
- J. van Benthem and M. Martínez. The stories of logic and information. In P. Adriaans and J. van Benthem, editors, *Philosophy of Information*, volume 8 of *Handbook of the Philosophy of Science*, pages 217– 280. North-Holland, Amsterdam, 2008. ISBN 978-0-444-51726-5. URL: http://www.illc.uva.nl/Publications/ResearchReports/PP-2008-04.text.pdf. Cited on page 1.
- J. van Benthem and S. Minica. Toward a dynamic logic of questions. *Journal of Philosophical Logic*, 41(4):633–669, 2012. DOI: 10.1007/s10992-012-9233-7. Cited on page 27.
- J. van Benthem and E. Pacuit. Dynamic logics of evidence-based beliefs. *Studia Logica*, 99(1):61–92, 2011. DOI: 10.1007/s11225-011-9347-x. Cited on page 8.
- B. de Bruin. *Explaining Games: The Epistemic Programme in Game Theory*, volume 346 of *Synthese Library Series*. Springer, Dordrecht, 2010. ISBN 978-1-4020-9905-2. DOI: 10.1007/978-1-4020-9906-9. Cited on page 1.
- Z. Christoff, J. U. Hansen, and C. Proietti. Reflecting on social influence in networks. *Journal of Logic, Language and Information*, 25(3-4):299–333, 2016. DOI: 10.1007/s10849-016-9242-y. Cited on page 25.

- H. van Ditmarsch. Prolegomena to dynamic logic for belief revision. *Synthese*, 147(2):229–275, 2005. ISSN 0039-7857. DOI: 10.1007/s11229-005-1349-7. URL: http://personal.us.es/hvd/oldpubs/prolegomenaKRA.ps. Cited on page 2.
- H. van Ditmarsch. Dynamics of lying. *Synthese*, 191(5):745–777, 2014. ISSN 0039-7857. DOI: 10.1007/s11229-013-0275-3. Cited on pages 2 and 27.
- H. van Ditmarsch, W. van der Hoek, and B. Kooi. *Dynamic Epistemic Logic*, volume 337 of *Synthese Library Series*. Springer, Dordrecht, The Netherlands, 2008. ISBN 978-1-4020-5838-7. por: 10.1007/978-1-4020-5839-4. Cited on pages 2 and 11.
- R. Fagin, J. Y. Halpern, Y. Moses, and M. Y. Vardi. *Reasoning about knowledge*. The MIT Press, Cambridge, Mass., 1995. ISBN 0-262-06162-7. Cited on pages **1 and 6**.
- R. Galimullin and T. Ågotnes. Quantified announcements and common knowledge. In F. Dignum, A. Lomuscio, U. Endriss, and A. Nowé, editors, AAMAS '21: 20th International Conference on Autonomous Agents and Multiagent Systems, Virtual Event, United Kingdom, May 3-7, 2021, pages 528–536. ACM, 2021. ISBN 978-1-4503-8307-3. URL: https://dl.acm.org/doi/10.5555/3463952.3464018. Cited on page 27.
- R. Galimullin and N. Alechina. Coalition and group announcement logic. In Lang (2017), pages 207–220. DOI: 10.4204/EPTCS.251.15. Cited on page 2.
- J. Gerbrandy. *Bisimulations on Planet Kripke*. PhD thesis, Institute for Logic, Language and Computation (ILLC), Universiteit van Amsterdam (UvA), Amsterdam, The Netherlands, 1999. ILLC Dissertation Series DS-1999-01. Cited on pages **11 and 28**.
- J. Gerbrandy and W. Groeneveld. Reasoning about information change. *Journal of Logic, Language, and Information,* 6(2):147–196, 1997. DOI: 10.1023/A:1008222603071. Cited on page **2**.
- V. Goranko and S. Passy. Using the universal modality: Gains and questions. *Journal of Logic and Computation*, 2(1):5–30, 1992. DOI: 10.1093/logcom/2.1.5. Cited on page 7.
- J. Y. Halpern and Y. Moses. Knowledge and common knowledge in a distributed environments. In PODC '84: Proceedings of the third annual ACM symposium on Principles of distributed computing, pages 50–61, New York, N.Y., U.S.A., 1984. ACM. ISBN 0-89791-143-1. DOI: 10.1145/800222.806735. Cited on page 2.
- J. Y. Halpern and Y. Moses. A guide to the modal logics of knowledge and belief: Preliminary draft. In A. K. Joshi, editor, *Proceedings of the 9th International Joint Conference on Artificial Intelligence. Los Angeles, CA, USA, August 1985*, pages 480–490. Morgan Kaufmann, 1985. URL: http://ijcai.org/Proceedings/85-1/Papers/094.pdf. Cited on pages 2 and 6.
- J. Y. Halpern and Y. Moses. Knowledge and common knowledge in a distributed environment. *Journal of the ACM*, 37(3):549–587, 1990. DOI: 10.1145/79147.79161. Cited on page 2.
- D. Harel, D. Kozen, and J. Tiuryn. *Dynamic Logic*. MIT Press, Cambridge, USA, 2000. ISBN 0-262-08289-6. DOI: 10.7551/mitpress/2516.001.0001. Cited on page 2.
- V. F. Hendricks, editor. 8 Bridges between Formal and Mainstream Epistemology, 2006. Philosophical Studies, 128(1). Cited on page 1.
- R. Hilpinen. Remarks on personal and impersonal knowledge. *Canadian Journal of Philosophy*, 7(1):1–9, 1977. DOI: 10.1080/00455091.1977.10716173. Cited on page 2.

- J. Hintikka. *Knowledge and Belief: An Introduction to the Logic of the Two Notions*. Cornell University Press, Ithaca, N.Y., 1962. ISBN 1-904987-08-7. Cited on page 1.
- W. van der Hoek, B. van Linder, and J.-J. Meyer. Group knowledge is not always distributed (neither is it always implicit). *Mathematical Social Sciences*, 38(2):215–240, 1999. ISSN 0165-4896. DOI: 10.1016/S0165-4896(99)00013-X. Cited on page 2.
- J. Lang, editor. Proceedings Sixteenth Conference on Theoretical Aspects of Rationality and Knowledge, TARK 2017, Liverpool, UK, 24-26 July 2017, volume 251 of Electronic Proceedings in Theoretical Computer Science, 2017. Open Publishing Association. DOI: 10.4204/EPTCS.251. Cited on pages 40 and 41.
- D. Lewis. Convention: A Philosophical Study. Harvard University Press, Cambridge, Massachusetts, 1969. Cited on page 26.
- J.-J. C. Meyer and W. van der Hoek. *Epistemic Logic for AI and Computer Science*. Cambridge University Press, New York, N.Y., U.S.A., 1995. ISBN 0-521-46014-7. DOI: 10.1017/CBO9780511569852. Cited on page 1.
- A. Özgün. Evidence in Epistemic Logic: A Topological Perspective. PhD thesis, Institute for Logic, Language and Computation (ILLC), Universiteit van Amsterdam, Amsterdam, The Netherlands, Oct. 2017. URL: http://www.illc.uva.nl/Research/Publications/Dissertations/DS-2017-07.text.pdf. ILLC Dissertation series DS-2017-07. Cited on page 8.
- T. Pedersen and M. Slavkovik. Formal models of conflicting social influence. In B. An, A. L. C. Bazzan, J. Leite, S. Villata, and L. W. N. van der Torre, editors, *PRIMA* 2017: Principles and Practice of Multi-Agent Systems - 20th International Conference, Nice, France, October 30 - November 3, 2017, Proceedings, volume 10621 of Lecture Notes in Computer Science, pages 349–365. Springer, 2017. ISBN 978-3-319-69130-5. DOI: 10.1007/978-3-319-69131-2'21. Cited on page 25.
- A. Perea. Epistemic Game Theory: Reasoning and Choice. Cambridge University Press, Cambridge, 2012. ISBN 978-1-107-40139-6. Cited on page 1.
- J. A. Plaza. Logics of public communications. In M. L. Emrich, M. S. Pfeifer, M. Hadzikadic, and Z. W. Ras, editors, *Proceedings of the 4th International Symposium on Methodologies for Intelligent Systems*, pages 201–216, Tennessee, USA, 1989. Oak Ridge National Laboratory, ORNL/DSRD-24. Republished as Plaza (2007). Cited on pages 2, 11, and 28.
- J. A. Plaza. Logics of public communications. *Synthese*, 158(2):165–179, 2007. DOI: 10.1007/s11229-007-9168-7. Cited on page **41**.
- J. Seligman, F. Liu, and P. Girard. Logic in the community. In M. Banerjee and A. Seth, editors, *Logic and Its Applications - 4th Indian Conference, ICLA 2011, Delhi, India, January 5-11, 2011. Proceedings,* volume 6521 of *Lecture Notes in Computer Science,* pages 178–188. Springer Berlin Heidelberg, 2011. ISBN 978-3-642-18025-5. DOI: 10.1007/978-3-642-18026-2'15. Cited on page 25.
- C. Shi, S. Smets, and F. R. Velázquez-Quesada. Argument-based belief in topological structures. In Lang (2017), pages 489–503. DOI: 10.4204/EPTCS.251.36. URL: http://www.illc.uva.nl/Research/Publications/Reports/PP-2017-18.text.pdf. Cited on page 8.
- C. Shi, S. Smets, and F. R. Velázquez-Quesada. Logic of justified beliefs based on argumentation. *Erkenntnis*, June 2021. ISSN 0165-0106. DOI: 10.1007/s10670-021-00399-5. URL: https://bit.ly/3bfT0ds. Cited on page 8.

- S. Smets and F. R. Velázquez-Quesada. How to make friends: A logical approach to social group creation. In A. Baltag, J. Seligman, and T. Yamada, editors, *Logic, Rationality, and Interaction - 6th International Workshop, LORI 2017, Sapporo, Japan, September 11-14,* 2017, *Proceedings*, volume 10455 of *Lecture Notes in Computer Science*, pages 377–390. Springer, 2017. ISBN 978-3-662-55664-1. DOI: 10.1007/978-3-662-55665-8'26. URL: http://www.illc.uva.nl/Research/Publications/Reports/PP-2017-16.text.pdf. URL: http://bit.ly/2uwfBMw. Cited on page 25.
- S. Smets and F. R. Velázquez-Quesada. A logical perspective on social group creation. In P. Arazim and T. Lávička, editors, *The Logica Yearbook 2017*, pages 271–288. College Publications, London, UK, 2018. ISBN 978-1-84890-281-7. URL: http://bit.ly/2FCYb5X. Cited on page 25.
- S. Smets and F. R. Velázquez-Quesada. A logical study of group-size based social network creation. *Journal of Logical and Algebraic Methods in Programming*, 106:117–140, Aug. 2019. DOI: 10.1016/j.jlamp.2019.05.003. URL: http://bit.ly/2ZpVIWc. Cited on page 25.
- P. Vanderschraaf and G. Sillari. Common knowledge. In E. N. Zalta, editor, *The Stanford Encyclopedia of Philosophy*. Metaphysics Research Lab, Stanford University, spring 2014 edition, 2014. URL: https://plato.stanford.edu/archives/spr2014/entries/common-knowledge/. Cited on page 26.
- Y. Wang and Q. Cao. On axiomatizations of public announcement logic. *Synthese*, 190 (1):103–134, 2013. DOI: 10.1007/s11229-012-0233-5. Cited on page **11**.
- L. Zhen and J. Seligman. A logical model of the dynamics of peer pressure. *Electronic Notes in Theoretical Computer Science*, 278:275–288, 2011. DOI: 10.1016/j.entcs.2011.10.021. Cited on page 25.