

GriT-DBSCAN: A Spatial Clustering Algorithm for Very Large Databases

Xiaogang Huang, Tiefeng Ma, Conan Liu, and Shuangzhe Liu

Abstract—DBSCAN is a fundamental spatial clustering algorithm with numerous practical applications. However, a bottleneck of the algorithm is in the worst case, the run time complexity is $O(n^2)$. To address this limitation, we propose a new grid-based algorithm for exact DBSCAN in Euclidean space called GriT-DBSCAN, which is based on the following two techniques. First, we introduce a grid tree to organize the non-empty grids for the purpose of efficient non-empty neighboring grids queries. Second, by utilising the spatial relationships among points, we propose a technique that iteratively prunes unnecessary distance calculations when determining whether the minimum distance between two sets is less than or equal to a certain threshold. We theoretically prove that the complexity of GriT-DBSCAN is linear to the data set size. In addition, we obtain two variants of GriT-DBSCAN by incorporating heuristics, or by combining the second technique with an existing algorithm. Experiments are conducted on both synthetic and real-world data sets to evaluate the efficiency of GriT-DBSCAN and its variants. The results of our analyses show that our algorithms outperform existing algorithms.

Index Terms—DBSCAN, clustering, indexing methods, spatial databases.



1 INTRODUCTION

SPATIAL clustering is a fundamental technique in data analysis, and has extensive applications in data mining [1], information retrieval [2], image segmentation [3], pattern recognition [4], [5], etc. Generally speaking, the objective of spatial clustering is to divide a given data set into several clusters, such that objects in the same cluster are homogeneous, and objects from different clusters are heterogeneous. A large number of algorithms have been proposed for spatial clustering.

Among all the spatial clustering algorithms, DBSCAN [6] is perhaps one of the most widely used algorithms since it can discover clusters of arbitrary shapes and noises. However, the worst case running time complexity of DBSCAN is $O(n^2)$ [7], regardless of the parameters ϵ (radius) and $MinPts$ (density threshold). This is because DBSCAN uses pointwise ϵ -neighborhood queries. When all points are within an ϵ -ball, the running time for all of these queries is $O(n^2)$. Many improved algorithms have been proposed to reduce the complexity of DBSCAN.

In general, there are three main strategies to reduce the complexity of DBSCAN: grid-based, ball-based, and sampling-based strategies. The grid-based algorithms, such as G13 introduced by Gunawan and de Berg [7], use the grid structure to reduce the range query time by considering the neighboring grids. They proved that the running time of G13 is $O(n \log n)$ for 2-dimensional data. G13 was extended by Gan and Tao [8], [9] to higher dimensions with

sub-quadratic complexity, and a linear time approximate algorithm was proposed. On the other hand, the ball-based algorithms, such as NQ-DBSCAN [10], use 2ϵ -ball (the d -dimensional ball with radius 2ϵ) to perform local neighborhood searching so as to reduce the time of range query. However, the ball-based algorithms require $O(n^2)$ time in the worst case. Unlike the two strategies just mentioned, the sampling-based algorithms improve DBSCAN by reducing the number of range queries. For example, IDBSCAN [11] expands the cluster by performing range queries on some representatives sampled inside a core point's neighborhood. Although sampling-based algorithms are faster, their results may be inconsistent with those of DBSCAN. To the best of our knowledge, there is no algorithm that can produce the same results as DBSCAN does, while exhibiting complexity that is linear to the number of data points.

In this paper, we propose a simple and efficient grid-based DBSCAN algorithm. The main contributions of this paper are as follows:

- We introduce a novel tree-like data structure, namely, grid tree, to organize the non-empty grids. Using the grid tree, we propose an efficient non-empty neighboring grids query technique. For each non-empty grid, the running time to find its non-empty neighboring grids is linear to the number of non-empty neighboring grids in the best case.
- We propose an efficient technique, namely, FastMerging, to determine whether the minimum distance between two sets is less than or equal to a certain threshold, which iteratively prunes unnecessary distance calculations by considering the spatial relationships among points. We also show that the complexity of FastMerging is linear to the number of points.
- Based on the above two techniques, we propose a new grid-based DBSCAN algorithm called GriT-

- Xiaogang Huang and Tiefeng Ma are with School of Statistics, Southwestern University of Finance and Economics, Chengdu 611130, China.
E-mail: 1200202J8001@smail.swufe.edu.cn and matiefeng@swufe.edu.cn
- Conan Liu is with UNSW Business School, University of New South Wales, Sydney, NSW 2052, Australia.
E-mail: conan.liu88@gmail.com
- Shuangzhe Liu is with Faculty of Science and Technology, University of Canberra, Canberra, ACT 2601, Australia.
E-mail: Shuangzhe.Liu@canberra.edu.au

Manuscript received April 6, 2022.

DBSCAN, whose complexity is linear to the number of points.

- We conduct extensive experiments to evaluate the performance of GriT-DBSCAN and its two variants as well. The results show the superiority of our algorithm and its variants.

The rest of this paper is organized as follows. Section 2 presents the related work. Section 3 revisits the existing algorithms that are related to our proposed algorithm. Section 4 presents our proposed algorithm, including a detailed description of our algorithm and analysis of its theoretical properties. Section 5 compares the performance of our algorithm and its variants with those existing algorithms. Finally, the conclusions are given in Section 6.

2 RELATED WORK

In order to reduce the complexity of DBSCAN, many algorithms have been proposed. This section briefly reviews the existing algorithms, that are related to our algorithm we propose in Section 4.

2.1 Grid-based Algorithms

Grid-based algorithms try to reduce the complexity of DBSCAN by partitioning the feature space into grids so as to reduce the range query time by only considering the neighboring grids. GriDBSCAN [12] partitions the feature space into equally sized grids. The points in each grid and the points in the ϵ -enclosure around the grid are considered a group. Then, for each point in a certain grid, its ϵ -neighbors are inside the corresponding group, which reduces the time for range query. However, GriDBSCAN requires one more parameter given by the user. Recently, Gunawan and de Berg [7] proposed a grid-based algorithm called G13, which in the worst case has run time complexity $O(n \log n)$ for 2-dimensional data, where the side length of each grid is $\epsilon/\sqrt{2}$. G13 improves DBSCAN in three aspects. First, if a grid contains at least $MinPts$ points, all points in that grid are core points because the distance between any two points in the grid is not greater than ϵ . This saves a lot of unnecessary distance calculations when identifying core points. Second, by using the grid structure, only the points in the neighboring grids are considered when finding the ϵ neighbors of a certain point. Third, the Voronoi diagram is used to merge the core grids, which dominates the complexity of G13. Nonetheless, G13 is only suitable for 2-dimensional data. Gan and Tao [8], [9] extended G13 to higher dimensions. To be specific, Gan and Tao proposed an exact DBSCAN algorithm that runs in sub-quadratic time and an approximate DBSCAN algorithm that runs in $O(n)$ expected time. When merging the core grids, the approximate DBSCAN algorithm proposed by Gan and Tao exploits a quadtree-like hierarchical grid structure for approximate range count, resulting in an expected complexity of $O(n)$ for the entire algorithm. As pointed out in Boonchoo et al. [13], that different order of forming clusters in the exact DBSCAN algorithm proposed by Gan and Tao [8], [9] leads to different running time, so they proposed two strategies, namely, uniform random order and low density first order, to reduce the running time of forming clusters. However, the

results of [13] do not improve the theoretical running time of previous work. To further improve the running time, Wang et al. [14] parallelized the algorithms proposed by Gan and Tao [8], [9], and recommended new parallel algorithms for exact DBSCAN and approximate DBSCAN that match the complexity of their sequential counterparts.

To summarise, there is no known grid-based DBSCAN that can obtain the same results as DBSCAN while exhibiting complexity linear to the data set size.

2.2 Ball-based Algorithms

Ball-based algorithms divide the data set into several subsets using d-dimensional ball. Both AnyDBC [15] and IncAnyDBC [16] use ϵ -ball to divide the data set into primitive clusters. Then, the cluster structure of the data set is iteratively and actively learned. In each iteration, a small set of most promising points are selected for refining clusters. G-DBSCAN [25] employs the group method based on ϵ -ball to obtain a set of groups and runs DBSCAN using groups to accelerate range queries. NQ-DBSCAN [10] uses a local neighborhood searching technique based on 2ϵ -ball to reduce the time of range query. By using k NN-ball (k -nearest neighbors ball), KNN-BLOCK DBSCAN [17] can quickly identify the core points and partition the data set into core-blocks, noncore-blocks, and noise-blocks. Then the core blocks are merged into clusters. It is worth pointing out that KNN-BLOCK DBSCAN is an approximate algorithm because it utilizes a fast approximate k NN algorithm, namely, FLANN [18], to find k -nearest neighbors. Moreover, the complexity of KNN-BLOCK DBSCAN is $O(n^2)$ if there is no core-block, and k -nearest neighbors queries runs in $O(n)$. Recently, BLOCK-DBSCAN [19] employs $\epsilon/2$ -ball to quickly identify inner core blocks, within which all points are core points, and applies a fast approximate algorithm to classify whether two inner core blocks are density reachable from each other. However, when there is no inner core block and the complexity of finding the ϵ -neighborhood of each point is $O(n)$, the complexity of BLOCK-DBSCAN is $O(n^2)$.

Although the ball-based algorithms improve the performance of DBSCAN to some extent, their worst-case time complexity is still $O(n^2)$ [10], [16], [17], [19], [25].

2.3 Sampling-based Algorithms

DBSCAN expands clusters by performing range query for each point in the data set, which is particularly time consuming. The sampling-based algorithms are designed to perform range queries on a subset of the data set or reduce the range query time by finding ϵ -neighbors on a subset, thereby reducing the complexity of DBSCAN. SDBSCAN [20] selects a small number of representative points from the data set to perform DBSCAN. l -DBSCAN [21] obtains prototypes from the data set by leaders algorithm [22] and runs DBSCAN on the prototypes to form clusters. Rough-DBSCAN [23] also uses the leaders algorithm to select representative points, but uses rough set theory [24] to analyze the quality of clustering results. Unlike the sampling-based algorithms mentioned above, IDBSCAN [11] reduces the number of range queries by selecting representatives inside the ϵ -neighborhood of each core point when expanding clusters. FDBSCAN [26] omits the unnecessary range queries

TABLE 1
Notations used in this paper

Notation	Description
P	Data set
p, q	The points
n	Number of points
d	Number of dimensions
$dist(\cdot, \cdot)$	Distance function
$MinDist(\cdot, \cdot)$	Minimum distance between two sets
$\epsilon, MinPts$	Parameters of DBSCAN
$N_\epsilon(p)$	p 's ϵ -neighborhood
G	An undirected graph
G_s	The set of non-empty grids
g	The grid
$\mathcal{N}_\epsilon(g)$	The set of g 's neighboring grids
$Nei(g)$	The set of g 's non-empty neighboring grids
m	Number of core points in a grid
η	Maximum interval number in the feature space
T	A grid tree
$root$	The root of T
t	A node in T
h	The hash table of T
$\gamma, \omega, \theta, \lambda$	The angles
κ	Number of iterations

by selecting representatives outside the ϵ -neighborhood of a core point. NG-DBSCAN [27] is an approximate density-based algorithm which first creates an approximate k NN graph by computing the distance of points at a 2-hop distance, and then utilizes the approximate k NN graph to form clusters. Recently, Jang and Jiang [28] suggested DBSCAN++, which reduces the complexity of DBSCAN by performing range query on a subset of the data set obtained by uniform sampling or k -center algorithm [29]. For each point, SNG-DBSCAN [30] finds its ϵ -neighborhood on a subset of the data set to reduce the range query time.

Nevertheless, the sampling-based improved algorithms still have the drawback that the clustering results may be inconsistent with the results of DBSCAN.

3 PRELIMINARIES

This section covers the definitions and basic clustering processes of the existing algorithms that are related to our proposed algorithm, which facilitates the comprehension of our proposed algorithm. Section 3.1 summarizes the key notations used throughout this paper in Table 1, and reviews the original DBSCAN algorithm in [6]. Section 3.2 reviews the G13 proposed by Gunawan and de Berg [7] that improves the performance of DBSCAN in the 2-dimensional space. Section 3.3 reviews the state of the art approximate algorithm— ρ -approximate DBSCAN in [8], [9]—that solves the problem with slight inaccuracy in $O(n)$ expected time.

3.1 DBSCAN

Consider a set of n points P in a d -dimensional space with a distance function $dist: R^d \times R^d \rightarrow R$ giving the

Euclidean distance $dist(p, q)$ between $p, q \in P$. $N_\epsilon(p)$ denotes the ϵ -neighborhood of $p \in P$ with radius ϵ , i.e. $N_\epsilon(p) = \{q | dist(p, q) \leq \epsilon, q \in P\}$.

Some important concepts of DBSCAN are defined as follows.

Definition 1. A point $p \in P$ is a core point if its ϵ -neighborhood satisfies $|N_\epsilon(p)| \geq MinPts$.

Definition 2. A point $p \in P$ is directly density-reachable from a point $q \in P$ wrt. $\epsilon, MinPts$ if q is a core point and $p \in N_\epsilon(q)$.

Note that point p does not need to be a core point in Definition 2. Consequently, direct density-reachability is not symmetric if p is a non-core point.

Definition 3. A point $p \in P$ is density-reachable from a point $q \in P$ wrt. $\epsilon, MinPts$ if there is a sequence of points $p_1, p_2, \dots, p_z \in P$ such that $p_1 = q, p_z = p$, and p_{i+1} is directly density-reachable from p_i , where $i = 1, 2, \dots, z - 1$.

Definition 4. A point $p \in P$ is density-connected to a point $q \in P$ wrt. $\epsilon, MinPts$ if there is a point $b \in P$ such that p and q are density-reachable from b wrt. $\epsilon, MinPts$.

Definition 5. A non-empty set C is a cluster wrt. $\epsilon, MinPts$ if C satisfies the following conditions:

- 1) If $p \in C$ and p is a core point, then all points density-reachable from p wrt. $\epsilon, MinPts$ also belong to C . (Maximality)
- 2) $\forall p, q \in C, p$ is density-connected to q wrt. $\epsilon, MinPts$. (Connectivity)

Given two parameters ϵ and $MinPts$, DBSCAN algorithm aims to find all clusters in P . DBSCAN algorithm randomly selects an unprocessed core point from P , and then finds all points that are density-reachable from p wrt. $\epsilon, MinPts$ to form a cluster. The algorithm repeats the above step until all clusters are found.

A cluster found by DBSCAN contains not only core points but also non-core points. A non-core point is called a border point if it belongs to at least one cluster. And points do not belong to any cluster are called noise points.

3.2 G13

G13 solves the exact DBSCAN with $O(n \log n)$ time complexity using the grid structure. The algorithm consists of four major steps. First, partition the feature space into equal-sized grids. Second, identify core points in the data set. Third, merge core points to form clusters. Lastly, assign non-core points to clusters according to density reachability.

In the first step, the feature space is divided into multiple grids of the same size with side length $\epsilon/\sqrt{2}$, and then each point will be assigned to the grid it lies in. A grid is called an empty grid if there are no points inside it. Otherwise, it is a non-empty grid.

The second step is to identify all core points in the data set. A grid containing at least one core point is called a core grid. Recall that the side length of each grid is $\epsilon/\sqrt{2}$, which ensures the distance between any two points in the same grid will not be greater than ϵ . Therefore, if there are more than $MinPts$ points in the same grid, then all those points are core points.

For a grid g_i with points less than $MinPts$, the algorithm checks each point p in g_i and determines whether it is a core point. Let $\mathcal{N}_\epsilon(g_i)$ denote the neighboring grids of g_i , where $\mathcal{N}_\epsilon(g_i) = \{g' | distance(g', g_i) \leq \epsilon\}$ and $distance(g', g_i)$ is the minimum distance between g' and g_i . To determine whether p is a core point or not, the algorithm detects its neighbors in the non-empty grids of $\mathcal{N}_\epsilon(g_i)$.

The third step, namely the merging step, is to find clusters formed by core points. To seek out clusters, we need to iterate through all core grids.

Initially, each core grid can be treated as an individual cluster based on the fact that all points in the same core grid are density-reachable from each other and the definition of a cluster.

Then those core grids that are density-reachable from each other will be merged into one cluster. Let $G = (V, E)$ be a graph, where each vertex $v \in V$ corresponds to a core grid, and each edge $(g_i, g_j) \in E$ represents that g_i and g_j can be merged. Given two core grids g_i and g_j , the algorithm determines whether they can be merged by the following definition.

Definition 6. For two core grids g_i and g_j , they can be merged if and only if there are core points $p \in g_i$ and $q \in g_j$ such that $dist(p, q) \leq \epsilon$.

Given a core grid g_i , for each core grid $g_j \in \mathcal{N}_\epsilon(g_i)$, we explain in detail how to verify whether G has an edge between g_i and g_j . For each core point $p \in g_i$, G13 uses the Voronoi diagram to find the core point $q \in g_j$ closest to p . If the distance between p and q is not greater than ϵ , then edge (g_i, g_j) can be added to G . If all core points $p \in g_i$ have been traversed and edge (g_i, g_j) has not been added to G , then g_i and g_j can not be merged according to Definition 6. After the graph G has been created, each connected component of G represents a cluster.

The last step is to assign non-core points to clusters according to density reachability. For each non-core point p , if there is at least one core point in p 's ϵ -neighborhood, p is called a border point. Otherwise, it is a noise point.

As shown in [7], the time complexity of the merging step is $O(n \log n)$ if the Voronoi diagram is used, and the rest of the algorithm's time complexity is $O(MinPts \cdot n)$. Hence, the overall complexity of G13 is $O(n \log n)$ which is dominated by the merging step.

3.3 ρ -approximate DBSCAN

ρ -approximate DBSCAN is an approximate algorithm that extends G13 to higher dimensions, and its complexity is linear to the data set size.

To ensure the distance between any two points in the same grid is not greater than ϵ , the side length of the grid is set to be ϵ/\sqrt{d} . In addition to the different setting of the side length of grid, the rule of merging core grids is different as well. ρ -approximate DBSCAN uses a quadtree-like hierarchical grid structure for approximate range count query when merging core grids. Formally, we fix a core grid g_i and check each non-empty neighboring grid g_j of g_i . An edge (g_i, g_j) is added to G if there is a core point $p \in g_i$ and the approximate range count query on the core points of g_j return yes. Gan and Tao [8], [9] showed that

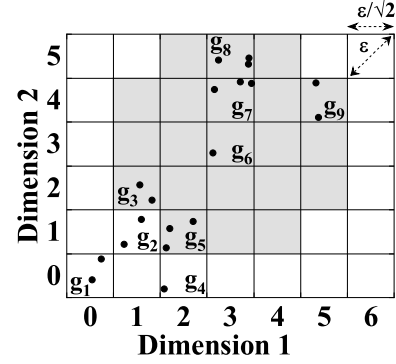


Fig. 1. Grids in 2-dimensional space ($\mathcal{N}_\epsilon(g_6)$ is shown in gray).

the overall complexity of ρ -approximate DBSCAN is $O(n)$ in expectation, regardless of the constant dimension d , the constant approximation ratio ρ , and the parameter ϵ .

4 THE PROPOSED ALGORITHM

In this section, we propose our algorithm which aims at solving the exact DBSCAN with time complexity linear to the data set size. Firstly, we present a new approach to construct grids. Secondly, we introduce grid tree which allows us to efficiently find the non-empty neighboring grids for each grid. Thirdly, we introduce a critical new technique to swiftly determine whether any two core grids should be merged. Finally, we combine the above techniques to obtain our proposed algorithm called GridT-DBSCAN, which stands for **Grid Tree DBSCAN**.

4.1 Constructing the Grids

When constructing the grids, each dimension of the feature space is divided into equal size intervals of length ϵ/\sqrt{d} . Then, the feature space is divided into multiple equally sized grids and each grid g_i is uniquely determined by a d -dimensional vector $(g_{i1}, g_{i2}, \dots, g_{ij}, \dots, g_{id}) \in N^d$ denoted as identifier. A point p lies in g_i if and only if for all $j = 1, 2, \dots, d$, the following formula holds:

$$g_{ij} = \lfloor \frac{p_j - mn_j}{\epsilon/\sqrt{d}} \rfloor \quad (1)$$

where $mn_j = \min_{p \in P} p_j$ and $\lfloor \cdot \rfloor$ is the floor function.

We can now cover how to construct grids.

First, for each point $p \in P$, the identifier of the grid it lies in is calculated by (1).

Second, the n points are sorted using radix sort [31] according to their identifiers. Initially, the n points are sorted according to the value of their identifiers on dimension d . Then, the n points are sorted according to the value of their identifiers on dimension $d - 1$. Repeat this process for each dimension. After sorting, the points in the same grid are placed adjacently.

Finally, we traverse the sorted points and find all non-empty grids denoted as G_s . Moreover, for any two grids $g_i, g_j \in G_s$ with $i < j$, there exists an integer $z \in [1, d)$ such that $g_{iz} < g_{jz}$ and $g_{iw} = g_{jw}$, for each $w \leq z - 1$.

The detailed partitioning technique is shown in Algorithm 1.

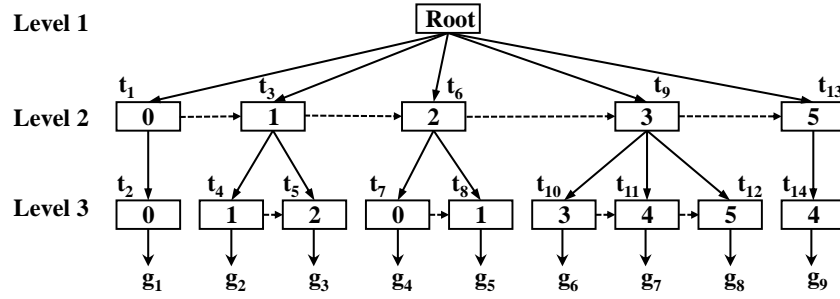


Fig. 2. Grid tree for the non-empty grids in Fig. 1.

Algorithm 1 Partitioning

Input: point set P ; ϵ .

Output: G_s : non-empty grids.

- 1: Calculate the identifiers by (1).
 - 2: Sort P based on their identifiers using radix sort.
 - 3: Initialize G_s as an empty set.
 - 4: $p =$ the 1st point in P
 - 5: $gs = \{p\}$
 - 6: **for** $i = 2 : n$ **do**
 - 7: $q =$ the i th point in P
 - 8: **if** q and p not in the same grid **then**
 - 9: $G_s = G_s \cup \{gs\}$
 - 10: $gs = \emptyset$
 - 11: $p = q$
 - 12: $gs = gs \cup \{p\}$
 - 13: $G_s = G_s \cup \{gs\}$
 - 14: **return** G_s
-

It's easy to verify that the second step runs in $O(n + \eta)$, where $\eta = \max\{g_{ij} | g_i \in G_s, 1 \leq j \leq d\}$ is a constant associated with ϵ , d , the maximum and minimum coordinates in each dimension. The rest of the algorithm's time complexity is $O(n)$. Therefore, the complexity of Algorithm 1 is $O(n + \eta)$.

To illustrate, Fig. 1 shows the grid structure on a set with 19 points, where $\eta = 5$. There are 9 non-empty grids in the feature space, and the set of non-empty grids is $G_s = \{g_1, g_2, \dots, g_9\}$. In addition, the neighboring grids of g_6 are shown in gray.

4.2 Indexing the Grids

G13 and ρ -approximate DBSCAN significantly improve the performance of DBSCAN using the grid structure. However, for a given grid g_i , the number of neighboring grids of g_i increases exponentially with the dimension [13]. One important innovation of this paper is to introduce the grid tree as a structure to organize the non-empty grids G_s . Given a non-empty grid g_i , the grid tree enables us to find all non-empty grids in $\mathcal{N}_\epsilon(g_i)$ more efficiently. We first describe the definition of the grid tree. Then, we introduce an algorithm for finding non-empty neighboring grids using the grid tree. Finally, we present theoretical evidence showing the grid tree is an effective structure for non-empty neighboring grids queries.

4.2.1 Grid Tree

Grid tree is a tree-like structure built to organize non-empty grids. Denoted as T , a grid tree has $d + 1$ levels. At the 1st level, there is a root node (*root*) which contains child pointers to child nodes. And the j th child pointer of *root* will be denoted as $CHILD_j(\text{root})$. All nodes in the i th level, where $1 < i \leq d$, are called internal nodes. In addition to the child pointers, each internal node t contains one key denoted as $KEY(t)$, and a next pointer $NEXT(t)$ which is either null or points to another node in the same level. If the next pointer is not null, then we have $KEY(t) < KEY(NEXT(t))$. Each leaf node t is in the $(d + 1)$ th level, containing a key, a next pointer, and a pointer to a non-empty grid denoted as $GRID(t)$. For each node t in the grid tree, if it has more than $MinPts$ child nodes, then there are many items associated with t in the hash table h of T that can be used to tell which child node to visit at the next level when searching the non-empty neighboring grids for a particular grid. Let $\lceil \cdot \rceil$ denote the ceiling function. Each item of h is a $\{t, key\} - pt$ pair, where pt is the node with the smallest key among the child nodes of t whose keys are between $key - \lceil \sqrt{d} \rceil$ and $key + \lceil \sqrt{d} \rceil$. Furthermore, for each path $t_{(1)}, t_{(2)}, \dots, t_{(d+1)}$ from the root node to leaf node, where $t_{(1)}$ is the root node and $t_{(i+1)}$ is a child of $t_{(i)}$, $i = 1, 2, \dots, d$, the identifier of the non-empty grid that $t_{(d+1)}$ points to is equal to $(KEY(t_{(2)}), KEY(t_{(3)}), \dots, KEY(t_{(d+1)}))$.

Algorithm 2 describes a method to construct a grid tree for non-empty grids. First, we initially create a tree with one node. Then, for each non-empty grid in G_s , nodes are inserted to form a path from the root node to leaf node which identifies the grid. Finally, for each node in the grid tree, if it has more than $MinPts$ child nodes, then the algorithm will generate items associated with it into h (Lines 17-27).

To illustrate, Fig. 2 shows the grid tree for the non-empty grids in Fig. 1. Suppose that $MinPts = 3$. Then there are six items associated with the root node in h : $\{\text{root}, 0\} - t_1$, $\{\text{root}, 1\} - t_1$, $\{\text{root}, 2\} - t_1$, $\{\text{root}, 3\} - t_3$, $\{\text{root}, 4\} - t_6$, and $\{\text{root}, 5\} - t_9$.

4.2.2 Non-empty Neighboring Grids Query

With a grid tree in place, we are now ready to describe the algorithm using the grid tree to identify all non-empty neighboring grids for each grid.

Given a grid g_i , to find its non-empty neighboring grids, the algorithm recursively traverses down the tree

Algorithm 2 BuildingGridTree**Input:** G_s : non-empty grids.**Output:** T : a grid tree.

```

1: Initialize  $T$  with a root node and an empty hash table.
2: for  $i = 1 : |G_s|$  do
3:    $t = T.root$ 
4:   for  $j = 1 : d$  do
5:      $tc = t$ 's last child
6:     if  $tc = null$  or  $KEY(tc) \neq g_{ij}$  then
7:       /*Generate a path from  $t$  to leaf node that identifies  $g_i$ .*/
8:       for  $l = j : d$  do
9:         Create a new node  $nd$  with key  $g_{il}$ .
10:         $t$ 's last child =  $nd$ 
11:        if  $tc \neq null$  and  $l = j$  then
12:           $NEXT(tc) = nd$ 
13:           $t = nd$ 
14:        break
15:       $t = tc$ 
16:  $h = T.h$ 
17: for all node  $t \in T$  do
18:   if  $t$  has more than  $MinPts$  child nodes then
19:     /*Insert items associated with  $t$  into  $h$ .*/
20:      $nd = CHILD_1(t)$ ;  $pos = 0$ 
21:     while  $nd \neq null$  do
22:        $pos = \max\{pos, KEY(nd) - \lceil \sqrt{d} \rceil\}$ 
23:       while  $pos \leq KEY(nd) + \lceil \sqrt{d} \rceil$  and  $pos \leq \eta$  do
24:         Insert  $\{t, pos\} - nd$  into  $h$ .
25:          $pos = pos + 1$ 
26:        $nd = NEXT(nd)$ 
27: return  $T$ 

```

starting from the root node. The algorithm first finds all child nodes of the root node with keys between $g_{i1} - \lceil \sqrt{d} \rceil$ and $g_{i1} + \lceil \sqrt{d} \rceil$. If the root node has more than $MinPts$ child nodes, the item whose $\{t, key\}$ is equal to $\{root, g_{i1}\}$ in h is used to identify the child node with the smallest key that meets the condition, and then iteratively call $NEXT$ to find all nodes with keys between $g_{i1} - \lceil \sqrt{d} \rceil$ and $g_{i1} + \lceil \sqrt{d} \rceil$. Otherwise, these nodes are found by examining each child node of the root node. Denote these nodes as Φ . For each node $t \in \Phi$, the current $offset$ of t is $t.offset = \max\{|KEY(t) - g_{i1}| - 1, 0\}^2$. The offset of t indicates that the minimum distance between g_i and any grid in this subtree will not less than $\sqrt{t.offset} \cdot \epsilon / \sqrt{d}$. Therefore, all non-empty neighboring grids of g_i are in the subtrees of nodes in Φ . This is because, for each grid g_j not in the subtrees of the nodes in Φ , we have $g_{j1} - g_{i1} > \lceil \sqrt{d} \rceil$. It follows that the minimum distance between g_i and g_j is greater than $\epsilon ((\lceil \sqrt{d} \rceil + 1) \cdot \epsilon / \sqrt{d} > \epsilon)$. Therefore, there is no need to consider all nodes not in the subtrees of the nodes in Φ . As a result, a lot of redundant computations can be avoided. This significantly improves the performance of our algorithm.

After that, for each node $t \in \Phi$, its child nodes with keys between $g_{i2} - \lceil \sqrt{d} \rceil$ and $g_{i2} + \lceil \sqrt{d} \rceil$ are found. For each such node t' , its offset is calculated by

$$t'.offset = t.offset + \max\{|KEY(t) - g_{i2}| - 1, 0\}^2. \quad (2)$$

All these nodes will be stored in the set $temp$. Nodes in $temp$ with $offset$ greater than or equal to d will be further excluded. Then, Φ is updated to $temp$. This procedure is repeated until all nodes in Φ are leaf nodes.

To sum up, we find all non-empty neighboring grids of g_i by calling $NeighboringGridsQuery(T, g_i)$. The procedure $NeighboringGridsQuery$ is summarized in Algorithm 3. We denote the non-empty neighboring grids of g_i as $Nei(g_i)$.

It is worth noting that the non-empty neighboring grids are sorted in ascending order using counting sort according to their offset. This will significantly accelerate the performance of identifying core points. For one thing, a point's neighbors are more likely to be in the grid close to it. For another, given a point, once we confirm that it has more than $MinPts$ neighbors, it will be identified as a core point without finding all its neighbors. This saves a lot of unnecessary calculations.

Algorithm 3 NeighboringGridsQuery**Input:** T : a grid tree; g_i : a grid.**Output:** N : the non-empty neighboring grids of g_i .

```

1:  $T.root.offset = 0$ 
2:  $\Phi = \{T.root\}$ 
3: for  $j = 1 : d$  do
4:    $temp = \emptyset$ 
5:   for all  $nd \in \Phi$  do
6:      $childNodes =$  all child nodes of  $nd$  with keys between  $g_{ij} - \lceil \sqrt{d} \rceil$  and  $g_{ij} + \lceil \sqrt{d} \rceil$ 
7:     for all  $child \in childNodes$  do
8:       Calculate  $child$ 's offset by (2).
9:       if  $child.offset \geq d$  then
10:        Remove  $child$  from  $childNodes$ .
11:      $temp = temp \cup childNodes$ 
12:    $\Phi = temp$ 
13:  $N = \emptyset$ 
14: for all  $nd \in \Phi$  do
15:    $N = N \cup \{GRID(nd)\}$ 
16: Sort  $N$  by radix sort according to their offsets.
17: return  $N$ 

```

For example, consider the query of $g_6 = (3, 3)$ in Fig. 2. Start from the root node; the algorithm first finds its child nodes with keys between 1 and 5, and the result is $\Phi = \{t_3, t_6, t_9, t_{13}\}$. Then for t_3 , the algorithm first finds the child nodes of t_3 with keys between 1 and 5. Clearly, both child nodes of t_3 meet the condition. But $t_4.offset = 2$, so it is excluded. Other nodes in Φ are processed in a similar way. Finally, Φ is updated to $\{t_5, t_8, t_{11}, t_{12}, t_{14}\}$. Therefore, the non-empty neighboring grids of g_6 are g_3, g_5, g_7, g_8, g_9 .

4.2.3 Complexity Analysis

A grid tree has $d + 1$ levels, and each level contains at most $|G_s|$ nodes. In addition, the space complexity of the hash table is $O(d \cdot \sqrt{d} \cdot |G_s|) = O(d^{3/2} \cdot |G_s|)$. So the overall space complexity of grid tree is $O(d^{3/2} \cdot |G_s|)$. To build a grid tree, we only need to scan G_s once and update the hash table. Obviously, the expected complexity of updating the hash table is $O(d^{3/2} \cdot |G_s|)$. Therefore, Algorithm 2 runs in $O(d \cdot |G_s| + d^{3/2} \cdot |G_s|) = O(d^{3/2} \cdot |G_s|)$ expected time.

The reasoning is that for every point $y \in s_j$, the distance between x and y satisfies

$$\begin{aligned} \text{dist}(x, y) &\geq \text{dist}(p, y) - \text{dist}(x, p) \\ &> \text{dist}(p, q) - \sigma \\ &= \epsilon. \end{aligned} \quad (4)$$

The first inequality is based on the triangle inequality. As a result, all points inside the σ -ball centered at p can be pruned.

The second pruning strategy is angle-based pruning strategy. We first introduce our findings, then explain in detail our angle-based pruning strategy.

As shown in Fig. 3, C is a circle with radius ϵ and y as its center. l_1 and l_2 are the two tangent lines of circle C passing through p . Evidently, the distance from y to any point on the tangent line is greater than or equal to ϵ . Let D denote the region surrounded by the two tangent lines l_1 and l_2 . It is simple to verify that, for every point in $x \in s_i$, if it is outside D , the distance between x and y is greater than ϵ . The reasoning is that the line xy must intersect one of the tangent lines, and the distance from the intersection point to y is not less than ϵ .

For example: in Fig. 3, the line segment xy intersects l_1 at h , it can be concluded that $\text{dist}(x, y)$ is greater than ϵ since

$$\text{dist}(x, y) = \text{dist}(x, h) + \text{dist}(y, h)$$

where $\text{dist}(y, h) \geq \epsilon$ and $\text{dist}(x, h) > 0$.

For each point $y \in s_j$, the maximum angle of y used to determine which points in s_i are not in the $N_\epsilon(y)$ is defined as follows.

Definition 8. Given s_i, s_j , and $p \in s_i$, the maximum angle of $y \in s_j$ wrt. p is defined as

$$\lambda_y = \arcsin \frac{\epsilon}{\text{dist}(p, y)} + \arccos \frac{\vec{pq} \cdot \vec{py}}{\text{dist}(p, q) \times \text{dist}(p, y)} \quad (5)$$

where $q = \arg \min_{y \in s_j} \text{dist}(p, y)$.

The following theorem shows that for $\forall x \in s_i$, if the angle between \vec{pq} and \vec{px} is greater than the maximum angle of y , then x is not in the ϵ -neighborhood of y .

Theorem 1. Given s_i, s_j , and a point $p \in s_i$ such that $\min_{z \in s_j} \text{dist}(p, z) > \epsilon$. Let $q = \arg \min_{z \in s_j} \text{dist}(p, z)$. For each $x \in s_i$, if the angle between \vec{pq} and \vec{px} is greater than λ_y , then

$$\text{dist}(x, y) > \epsilon. \quad (6)$$

Furthermore, if s_i and s_j are the sets of core points in g_i and g_j , respectively, where $g_i \in \text{Nei}(g_j)$, then, for each point $y \in s_j$, the maximum angle of y wrt. p is less than $5\pi/6$.

Proof. For convenience, we use $\langle \vec{pq}, \vec{px} \rangle$ to represent the angle between \vec{pq} and \vec{px} .

First, we prove that for every point $x \in s_i$ satisfies $\text{dist}(x, y) \leq \epsilon$, then

$$\theta_2 \leq \arcsin \frac{\epsilon}{\text{dist}(p, y)} \quad (7)$$

where $\theta_2 = \langle \vec{px}, \vec{py} \rangle$ and $0 \leq \theta_2 \leq \pi$. Let C be the hypersphere with radius ϵ and y as its center. Denote by l the straight line defined by p and x . Clearly, l intersects

with C . If l intersects with C at two points, then the distance from y to l , denoted by $d_{l,y}$, will not greater than ϵ since the distance from the chord to the centre will be less than the radius. If l intersects with C at one points, then $d_{l,y} = \epsilon$. Therefore, the distance from y to l does not exceed ϵ . So

$$\begin{aligned} \theta_2 &= \arcsin \frac{d_{l,y}}{\text{dist}(p, y)} \\ &\leq \arcsin \frac{\epsilon}{\text{dist}(p, y)}. \end{aligned}$$

Second, we prove that if $\langle \vec{pq}, \vec{px} \rangle > \lambda_y$, then $\text{dist}(x, y)$ is greater than ϵ . Let $\theta_1 = \langle \vec{pq}, \vec{py} \rangle$, $\gamma = \langle \vec{pq}, \vec{px} \rangle$. Clearly, $0 \leq \theta_1, \gamma \leq \pi$. According to the spherical law of cosines [32], the following equation holds:

$$\cos \gamma = \cos \theta_1 \cos \theta_2 + \sin \theta_1 \sin \theta_2 \cos \omega$$

where ω is the angle between two intersecting planes. One of the planes is determined by p, x, y , and the surface of the unit sphere centered at p . The other plane is determined by p, q, y , and the surface of the unit sphere centered at p . Further, we have

$$\begin{aligned} \cos \gamma &\geq \cos \theta_1 \cos \theta_2 - \sin \theta_1 \sin \theta_2 \\ &= \cos(\theta_1 + \theta_2) \end{aligned} \quad (8)$$

since $\cos \omega \geq -1$ and $\sin \theta_1 \sin \theta_2 \geq 0$. Based on (8), we have

$$\begin{aligned} \theta_2 &\geq \gamma - \theta_1 \\ &> \lambda_y - \theta_1 \\ &= \arcsin \frac{\epsilon}{\text{dist}(p, y)}. \end{aligned} \quad (9)$$

According to the first step of the proof and (9), we can conclude that $\text{dist}(x, y) > \epsilon$.

If s_i and s_j are the sets of core points in g_i and g_j , respectively, where $g_i \in \text{Nei}(g_j)$. Since q and y are in the same grid, hence $\text{dist}(q, y) \leq \epsilon$. Let $a = \text{dist}(p, q)$, $b = \text{dist}(p, y)$. We have $\epsilon < a \leq b \leq 2\epsilon$ since $g_i \in \text{Nei}(g_j)$. Then, we have

$$\begin{aligned} \lambda_y &= \arcsin \frac{\epsilon}{b} + \langle \vec{pq}, \vec{py} \rangle \\ &< \arcsin 1 + \arccos \frac{a^2 + b^2 - \text{dist}(q, y)^2}{2ab} \\ &\leq \frac{\pi}{2} + \arccos \frac{a^2 + b^2 - \epsilon^2}{2ab} \\ &< \frac{\pi}{2} + \arccos \frac{1}{2} \\ &= \frac{5\pi}{6} \end{aligned}$$

where the third inequality holds since $(a^2 + b^2 - \epsilon^2)/(2ab) > 1/2$. This completes the proof. \square

Based on the above findings, we propose the angle-based pruning strategy to further prune trivial points. Let

$$\lambda = \max_{y \in s_j} \lambda_y. \quad (10)$$

Then, if the angle between \vec{pq} and \vec{px} is greater than λ , we can conclude that x is a trivial point without calculating the exact minimum distance between set $\{x\}$ and s_j .

Moreover, if s_i and s_j are the sets of core points in g_i and g_j , respectively, then by combining Theorem 1, we have $\lambda < 5\pi/6$. It follows that there is always a non-empty area

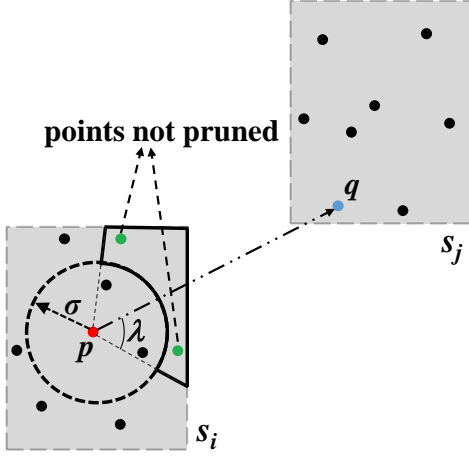


Fig. 4. An example of pruning trivial points in s_i .

in the g_i such that the points in this area are all trivial points. This allows us to further prune some trivial points in s_i to reduce unnecessary distance calculations.

Based on the above two pruning strategies, we propose the pruning method which removes trivial points using the triangle inequality and the angle relationship among points. For each point x in s_i , x is a trivial point if it lies in the σ -neighborhood of p or the angle between \vec{pq} and \vec{px} is greater than λ . The pruning method based on spatial relationships, is summarized in Algorithm 4.

Algorithm 4 Pruning

Input: point sets s_i, s_j ; points p, q ; ϵ .

Output: Remove trivial points in s_i .

- 1: $\lambda = 0$
 - 2: **for all** $y \in s_j$ **do**
 - 3: Compute λ_y by (5).
 - 4: **if** $\lambda_y > \lambda$ **then**
 - 5: $\lambda = \lambda_y$
 - 6: **for all** $x \in s_i$ **do**
 - 7: compute $dist(x, p)$
 - 8: **if** $dist(x, p) < dist(p, q) - \epsilon$ **then**
 - 9: remove x from s_i /*Prune trivial points in s_i using the triangle inequality pruning strategy.*/
 - 10: **else**
 - 11: $\theta = \arccos \frac{\vec{pq} \cdot \vec{px}}{dist(p, q) \times dist(p, x)}$ /*Compute the angle between \vec{pq} and \vec{px} .*/
 - 12: **if** $\lambda < \theta$ **then**
 - 13: remove x from s_i /*Prune trivial points in s_i using the angle-based pruning strategy.*/
 - 14: **return** s_i
-

Consider the sets in Fig. 3. The result of pruning trivial points in s_i is illustrated in Fig. 4. Points inside the region surrounded by solid lines won't be pruned. This is because the region is surrounded by vectors whose angle to \vec{pq} equals λ and an arc whose radius is σ and center is p . It follows that a point x lying in this region is not a trivial point since $dist(p, x) \geq \sigma$ and the angle between \vec{pq} and \vec{px} is less than λ . Ultimately, seven of nine points in s_i have been pruned, with three pruned by the angle-based pruning strategy and four pruned by the triangle inequality pruning

strategy. It is easier to determine whether $MinDist(s_i, s_j)$ is greater than ϵ when there are only two points in s_i .

We can now state the fast merging algorithm. The fast merging algorithm uses the pruning method to remove trivial points when checking whether two grids can be merged, so as to reduce unnecessary distance calculations. The pseudocode of the fast merging algorithm is summarized in Algorithm 5.

Algorithm 5 FastMerging

Input: point sets s_i, s_j ; ϵ .

Output: If $MinDist(s_i, s_j) \leq \epsilon$, return yes. Otherwise, return no.

- 1: Randomly selected a point from s_i , denoted by p .
 - 2: **repeat**
 - 3: $q = \arg \min_{y \in s_j} dist(p, y)$
 - 4: **if** $dist(p, q) \leq \epsilon$ **then**
 - 5: **return** yes
 - 6: **else**
 - 7: /*Remove trivial points in s_i by Algorithm 4.*/
 - 8: $s_i = Pruning(s_i, s_j, p, q, \epsilon)$
 - 9: $p = \arg \min_{x \in s_i} dist(x, q)$
 - 10: **if** $dist(p, q) \leq \epsilon$ **then**
 - 11: **return** yes
 - 12: **else**
 - 13: /*Remove trivial points in s_j by Algorithm 4.*/
 - 14: $s_j = Pruning(s_j, s_i, q, p, \epsilon)$
 - 15: **until** $|s_i| = 0$ **or** $|s_j| = 0$
 - 16: **return** no
-

As Algorithm 5 shows, the fast merging algorithm consists of four steps:

- 1) Let p be a random point in s_i .
- 2) The algorithm finds p 's nearest point $q \in s_j$, and checks whether $dist(p, q) \leq \epsilon$. If so, the algorithm returns yes. Otherwise, the algorithm removes all trivial points in s_i by Algorithm 4.
- 3) Update p to q 's nearest point in s_i . If $dist(p, q) \leq \epsilon$, the algorithm returns yes. Otherwise, all trivial points in s_j will be removed using Algorithm 4.
- 4) If one of the sets is empty, then return no. Otherwise, go back to step 2.

Clearly, FastMerging is an iterative algorithm. In each iteration, trivial points are removed, and the distance from these points will not be calculated in the subsequent steps. This ensures that our algorithm runs efficiently.

Theorem 2. Algorithm 5 returns yes if and only if there are points $p \in s_i$ and $q \in s_j$ such that $dist(p, q) \leq \epsilon$.

Proof. Obviously, Algorithm 5 returns yes only if there are core points p and q satisfying $dist(p, q) \leq \epsilon$. Therefore, if Algorithm 5 returns yes, grids g_i and g_j are density reachable from each other.

On the contrary, if Algorithm 5 returns no, then there are no p and q such that $dist(p, q) \leq \epsilon$. This is because Algorithm 5 returns no only when one of the sets is empty, and recall that only the trivial points will be removed. \square

4.3.3 Complexity Analysis

Obviously, the complexity of the fast merging algorithm depends on two factors: (i) the number of distance calculations in each iteration, and (ii) how many iterations it takes to terminate.

First, we show that the algorithm calculates the distance at most $m_i + m_j$ times in each iteration. Let $r_{1,i}$ and $r_{2,i}$ be the number of points in s_i and s_j at the beginning of i th iteration respectively. In each iteration, the algorithm calculates the distance $r_{1,i} + 3r_{2,i} + 2r_{1,i+1}$ times. Then, we can conclude that, in each iteration, the algorithm calculates the distance at most $3(m_i + m_j)$ times since at least one point is removed from each set in each iteration.

Then, the complexity of the fast merging algorithm satisfies

$$\begin{aligned} O\left(\sum_{i=1}^{\kappa_{g_i g_j}} (r_{1,i} + 3r_{2,i} + 2r_{1,i+1})\right) &< O\left(\sum_{i=1}^{\kappa_{g_i g_j}} (m_i + m_j)\right) \\ &= O(\kappa_{g_i g_j} (m_i + m_j)) \end{aligned}$$

where $\kappa_{g_i g_j}$ is the number of iterations.

Second, the following theorem gives the upper bound on the number of iterations.

Theorem 3. *Given two core grids g_i, g_j , where $g_i \in \text{Nei}(g_j)$, let s_i and s_j be the sets of core points in g_i and g_j , respectively. Let s'_i denote the points in s_i whose distances from each point in s_j are all greater than ϵ . If s'_i is empty, then $\kappa_{g_i g_j} = 1$. Otherwise, let*

$$\tau = \min_{x \in s'_i, y \in s_j} \text{mindist}(x, y) - \epsilon.$$

Then $\kappa_{g_i g_j}$ is at most $V_g/V_{\tau/2}$, where V_g is the volume of a grid which extends τ units to each side and $V_{\tau/2}$ is the volume of a ball with radius $\tau/2$.

Proof. If s'_i is empty, then in the 1th iteration $p \notin s'_i$. Based on the definition of s'_i , there is at least one point $q \in s_j$ such that $\text{dist}(p, q) \leq \epsilon$. Therefore, the algorithm returns yes in the 1th iteration, and $\kappa_{g_i g_j} = 1$ holds.

On the contrary, s'_i is non-empty. If $p \in s'_i$, all points inside the σ -ball centered at p or whose angle exceeds λ will be removed. By the definition of τ , we have $\sigma \geq \tau$. As a result, in each iteration, if $\text{dist}(p, q) > \epsilon$, at least the points inside the τ -ball centered at p are removed. Assume that in each iteration, only the points inside the τ -ball centered at p are removed. Then the number of iterations $\kappa_{g_i g_j}$ is not greater than the number of leaders in s'_i using τ as parameter. According to the analysis of [23], we have $\kappa_{g_i g_j} \leq V_g/V_{\tau/2}$. This completes the proof. \square

Remark 1. *It should be noted that the upper bound on $\kappa_{g_i g_j}$ is exponential to the dimension d . Nevertheless, there are two reasons that $\kappa_{g_i g_j}$ will not meet the upper bound. First, it should be noted that if $s_i \setminus s'_i$ is non-empty, the algorithm will return yes quickly. The reason is that $q(p)$ is updated to the nearest point to $p(q)$ in $s_j(s_i)$, so the algorithm will obtain local optimal value quickly and return yes immediately if the local optimal value is not greater than ϵ . Second, in each iteration, the volume of the non-empty area from which the points will be removed is greater than the volume of a ball with radius τ , so the algorithm will terminate*

faster than the version described in the proof of Theorem 3 which only removes the points inside the τ -ball centered at p .

Remark 2. *If slight inaccuracy in the results is acceptable, then there is an approximate FastMerging algorithm which runs in $O(1)$, regardless of the value of ϵ and the dimension d . For an arbitrary constant $\delta > 0$. The approximate FastMerging algorithm differs from FastMerging only in line 4 and line 10. In approximate FastMerging, it returns yes if $\text{dist}(p, q) \leq \epsilon + \delta$. It follows that $\tau > \delta$ and the upper bound on the number of iterations satisfies $V_g/V_{\tau/2} < V_g/V_{\delta/2} = O(1)$, regardless of the value of ϵ and the dimension d .*

In summary, the complexity of the fast merging algorithm is linear to $m_i + m_j$.

4.4 Overall Algorithm

Algorithm 6 GriT-DBSCAN

Input: point sets P ; parameters: $MinPts, \epsilon$.

Output: C : the clustering result.

```

1: /*step 1: partitioning*/
2:  $Gs = \text{Partitioning}(P, \epsilon)$ 
3:  $T = \text{BuildingGridTree}(Gs)$ 
4: For each non-empty grid  $g_i \in Gs$ , use Algorithm 3 to
   find its non-empty neighboring grids  $\text{Nei}(g_i)$ .
5: /*step 2: identify core points*/
6: Identify all core points in the data set like G13.
7: /*step 3: merging*/
8: Each core grid is marked as unclassified.
9: for all core grid  $g \in Gs$  do
10:   if  $g$  is unclassified then
11:     Mark  $g$  as classified.
12:      $seeds = \{g\}$ 
13:      $pos = 1$ 
14:     while  $pos \leq seeds.size()$  do
15:        $cur = seeds[pos]$ 
16:       for all unclassified core grid  $g' \in \text{Nei}(cur)$  do
17:          $s$  and  $s'$  are the sets of core points in  $cur$  and
            $g'$ , respectively.
18:         if  $\text{FastMerging}(s, s') = \text{yes}$  then
19:           Mark  $g'$  as classified.
20:            $seeds = seeds \cup \{g'\}$ 
21:         All grids in  $seeds$  form a cluster.
22: /*step 4: assign non-core points*/
23: For each non-core point, check whether it is a noise or a
   border point.
24: return  $C$ 

```

Now, we can introduce the GriT-DBSCAN algorithm with complexity linear to the data set size by combining the above techniques. Our algorithm consists of four steps as below.

First, the data set P is partitioned using Algorithm 1. All non-empty grids are organized in a grid tree constructed by Algorithm 2. For each grid, its non-empty neighboring grids are found by Algorithm 3 and stored in a vector.

Second, all core points in the data set are identified like G13.

Third, merge core grids to form clusters. In this step, we use Algorithm 5 to check whether two core grids can be merged.

At last, non-core points are identified as border points or noise points. A non-core point is identified as a border point if and only if there is at least one core point in its ϵ -neighborhood. A non-core point is a noise point if it is not a border point.

The exact DBSCAN algorithm with complexity linear to the data set size is summarized in Algorithm 6.

For the correctness and the time complexity of the GriT-DBSCAN algorithm, we present the following theorem.

Theorem 4. *The GriT-DBSCAN algorithm runs in $O(\kappa n + \eta)$ expected time, regardless of the value of $MinPts$ and the dimension d , where $\kappa = \max\{\kappa_{g_i, g_j} | g_i, g_j \in G_s, g_j \in Nei(g_i)\}$ is the maximum number of iterations in the merging step. In addition, the clustering result of GriT-DBSCAN is consistent with the result of DBSCAN.*

Proof. First, we prove the correctness of our algorithm, that is, the clustering result of GriT-DBSCAN is consistent with the result of DBSCAN. Let c be an arbitrary cluster found by the GriT-DBSCAN.

- 1) For every core point $p \in c$ and any point $q \in P$ such that q is density-reachable from p wrt. $\epsilon, MinPts$. By the definition of density-reachable, there is a sequence of points $p_1, p_2, \dots, p_o \in P$ such that $p_1 = p, p_o = q$, and p_{i+1} is directly density-reachable from p_i for each $1 \leq i \leq o - 1$. Furthermore, p_1, p_2, \dots, p_{o-1} are core points and $dist(p_i, p_{i+1}) \leq \epsilon$ for $1 \leq i \leq o - 1$. Denote by $g_{(i)}$ the grid in which p_i lies, where $i = 1, 2, \dots, o$. It follows from the definition of G that $g_{(i)}$ and $g_{(i+1)}$ must be in the same connected component for $1 \leq i \leq o - 2$. Hence, p_1, p_2, \dots, p_{o-1} are in c . If p_o is a non-core point, then in the last step of GriT-DBSCAN, p_o will also be assigned to c . Otherwise, $g_{(o)}$ and $g_{(o-1)}$ must be in the same connected component of G . It thus follows that $p_o \in c$. Therefore, p and q are in the same cluster of GriT-DBSCAN.
- 2) Let p and q be two arbitrary points in c . We will show that p is density-connected to q . If p is a non-core point, based on the last step of GriT-DBSCAN, there is a core point $p' \in c$ such that p is directly density-reachable from p' . Otherwise, we set $p' = p$. Similarly, let q' be a core point in c such that q is directly density-reachable from q' . Denote by $g_{p'}$ and $g_{q'}$ the grids covering p' and q' , respectively. Since $p', q' \in c$, $g_{p'}$ and $g_{q'}$ must be in the same connected component of G . Then, there is a sequence $g_{(1)}, g_{(2)}, \dots, g_{(o)}$ such that $g_{(1)} = g_{p'}, g_{(o)} = g_{q'}$. For each $i \in [1, o - 1]$, $g_{(i)}$ and $g_{(i+1)}$ can be merged, which means that there are two core points $p_i^2 \in g_{(i)}$ and $p_{i+1}^1 \in g_{(i+1)}$ satisfying $dist(p_i^2, p_{i+1}^1) \leq \epsilon$. Moreover, we have $dist(p_i^1, p_i^2) \leq \epsilon$ since p_i^1, p_i^2 in the same grid. Therefore, p' and q' are density-reachable from each other wrt. $\epsilon, MinPts$. It follows that p is density-connected to q wrt. $\epsilon, MinPts$.

This completes the proof of the correctness.

Next, we will show that the GriT-DBSCAN algorithm runs in $O(\kappa n + \eta)$. According to the analysis of [7], the

second step and the fourth step of Algorithm 6 runs in $O(n \cdot MinPts)$. It takes $O(n + \eta)$ to partition the feature space. For any fixed d , the expected time complexity of building the grid tree is $O(|Gs|)$. And the worst case time complexity of finding non-empty neighboring grids is $O(d \cdot (2\lceil\sqrt{d}\rceil + 1)^d) = O(1)$. It follows that the expected complexity of finding the non-empty neighboring grids for all grids is $O(|Gs|)$. So the first step runs in $O(n)$ expected time since $|Gs| \leq n$. In the third step, for any two core grids g_i, g_j , where $g_j \in Nei(g_i)$, we need to check whether they can be merged. It follows from the analysis of Section 4.3.3 that the time complexity of the third step is less than

$$\begin{aligned} \sum_{\substack{g_i \in G_s \\ g_j \in Nei(g_i)}} O(\kappa(m_i + m_j)) &= \sum_{\substack{g_i \in G_s \\ g_j \in Nei(g_i)}} O(2\kappa m_i) \\ &= \sum_{g_i \in G_s} \sum_{g_j \in Nei(g_i)} O(\kappa m_i) \\ &= \sum_{g_i \in G_s} O(\kappa m_i) \\ &\leq O(\kappa n) \end{aligned}$$

where m_i and m_j are the number of core points in g_i and g_j , respectively. And the third equality is based on the fact that g_i has $O(1)$ neighboring grids as long as d is fixed.

In summary, the GriT-DBSCAN algorithm runs in $O(n + \eta + \kappa n + MinPts \cdot n) = O(\kappa n + \eta)$ expected time, regardless of the value of $MinPts$ and the dimension d . This completes the proof. \square

Remark 3. *It is worth noting that the constant in the expected complexity of GriT-DBSCAN is at the order of $d \cdot (2\lceil\sqrt{d}\rceil + 1)^d$, which is exponential to d . Therefore, our algorithm is only suitable for low-dimensional data. Moreover, in the experiments, $\kappa \leq 11$ is much smaller than the number of data points.*

Remark 4. *Here we present our theoretical findings. First, there is an exact DBSCAN algorithm that runs in $O(\kappa n)$ expected time, regardless of the value of $MinPts$ and the dimension d . The algorithm differs from ρ -approximate DBSCAN only in the merging step. We use the third step in GriT-DBSCAN to merge core grids. Following the analysis of [9] and Theorem 4, the algorithm runs in $O(\kappa n)$ expected time and the clustering result is consistent with the result of DBSCAN. Second, if small inaccuracy in the clustering results are acceptable, this algorithm can be further modified to be an approximate DBSCAN algorithm running in $O(n)$ expected time according to Remark 2, regardless of the value of $\epsilon, MinPts$, and the dimension d .*

5 EXPERIMENTS

Extensive experiments are conducted to evaluate GriT-DBSCAN and its two variants defined in Section 5.2 by comparing with existing algorithms. All the experiments are implemented on a machine equipped with a 2.5GHz CPU and 16GB memory using C++. The operation system is Windows 10 64-bit.

5.1 Data Sets and Parameter Settings

In order to investigate the performance of the proposed algorithms, we conducted experiments on synthetic and

real-world data sets. In all data sets, we normalize each column to the integer domain of $[0, 10^5]$.

The synthetic data sets are generated using the seed spreader (SS) generator produced by Gan and Tao [8], [9]. The seed spreader maintains a location when generating a synthetic data set. It generates points uniformly in the neighborhood of the current location, and jumps to a random location with a certain probability. In addition, seed spreader can generate data sets with either similar or variable density clusters. We denote data sets with similar density clusters and variable density clusters as SS-simden and SS-variden, respectively. Each synthetic data set contains 2 million points (unless specified otherwise), and $d \in \{2, 3, 5, 7\}$.

We also use three real-world data sets to evaluate the performance of our algorithm. PAM4D is a 4-dimensional data set with 3,850,505 points, obtained by taking the first 4 principle components after performing PCA on the PAMAP2 data set [33]. Farm is a 5-dimensional data set with 3,627,086 points containing the VZ-features [34] of a satellite image of a farm in Saudi Arabia¹. House is a 7-dimensional data set with 2,049,280 points obtained from UCI [33], excluding date and time information.

For the synthetic data sets, we select the default values of ϵ and $MinPts$ to be those that produce the correct clustering results. The default parameters for real-world data sets are similar to those found by Gan and Tao [9]. Unless specified otherwise, we use $\rho = 0.01$ in the appr-DBSCAN algorithm.

5.2 Experiments for $d \geq 3$

For $d \geq 3$, we compare the performance of the following algorithms:

- gan-DBSCAN [9] is a grid-based exact DBSCAN for $d \geq 3$.
- appr-DBSCAN [9] is the state-of-the-art grid-based approximation DBSCAN reviewed in Section 3.3.
- BLOCK-DBSCAN [19] is an approximation DBSCAN algorithm. It first uses $\epsilon/2$ -norm ball to identify inner core blocks, outer core points, and border points. Second, it merges density-reachable inner core blocks into one cluster by an approximation algorithm. Then, each outer core point is merged into a cluster which it is density-reachable. Finally, border points will be assigned to corresponding clusters.
- BLOCK-DBSCAN-FM is a variant of our algorithm obtained by combining FastMerging with BLOCK-DBSCAN. BLOCK-DBSCAN-FM differs from BLOCK-DBSCAN only in the second step. BLOCK-DBSCAN-FM utilizes cover tree [35] to index touch inner core points for fast 2ϵ -neighborhood queries. Furthermore, our FastMerging algorithm developed in Section 4.3 is used to merge density-reachable inner core blocks. Based on Theorem 2, BLOCK-DBSCAN-FM is an exact DBSCAN algorithm.
- GriT-DBSCAN is the exact DBSCAN algorithm we proposed in Section 4.4.

- GriT-DBSCAN-LDF is another variant of our algorithm by incorporating heuristics. GriT-DBSCAN-LDF is an exact DBSCAN algorithm that differs from GriT-DBSCAN only in the merging step. In GriT-DBSCAN-LDF, core grids are organized using union-find data structure [36]. In addition, the core grids are sorted in ascending order according to the number of core points using radix sort. Then, these core grids are traversed in ascending order. Fix a core grid g_i . For each core grid $g_j \in Nei(g_i)$, we first check whether they are in the same set in the union-find data structure. If so, we do nothing. Otherwise, we perform a "union" operation if they can be merged. Finally, the core grids that belong to the same set in the union-find data structure belong to the same cluster. (The reason why these core grids are traversed in ascending order is that we first perform merging checks on low-density core grids such that the cluster established soon. Consequently, high-density core grids can skip the merging checks since the cluster is already established [13]. This reduces redundant merging checks.)

For gan-DBSCAN and appr-DBSCAN, we use the binary code which is written in C++ [37]. For BLOCK-DBSCAN, we use the source code written in C++ and publicly available [38].

Influence of ϵ . The first set of experiments aim to determine how ϵ affects the running time of each algorithm. We fix $MinPts$ to the default value corresponding to the correct clustering result, and vary the parameter ϵ from 500 to 5000. Fig. 5 shows the running time of GriT-DBSCAN, GriT-DBSCAN-LDF, gan-DBSCAN, appr-DBSCAN, BLOCK-DBSCAN, and BLOCK-DBSCAN-FM with different ϵ .

For BLOCK-DBSCAN and BLOCK-DBSCAN-FM, as discussed in [19], there is a trade off between the number of points filtered and the cost of range query: a large ϵ can filter large number of points, while the cost of range query get more expensive with ϵ increasing. From Fig. 5, the first effect dominates in most cases. Therefore, the running time of BLOCK-DBSCAN and BLOCK-DBSCAN-FM tended to decrease as ϵ increases. Particularly, BLOCK-DBSCAN-FM, with our FastMerging algorithm for fast merging check and the cover tree to index touch inner core points, obtains the accurate clustering results with nearly the same running time as BLOCK-DBSCAN or even less. BLOCK-DBSCAN-FM's superiority to BLOCK-DBSCAN primarily depended on two factors. The first factor is whether ϵ is small or large. BLOCK-DBSCAN becomes slower as ϵ decreases because there are more touch inner core point, which increases the running time of using linear search to find the 2ϵ -neighborhood of each touch inner core point. On the contrary, BLOCK-DBSCAN-FM benefits from applying a cover tree index, thus small ϵ has limited impact on its runtime. Another factor is whether the density of clusters are similar or variable. For a data set with variable density, the number of inner core blocks will be relatively large for the dense clusters; this makes BLOCK-DBSCAN slower. For the SS-variden-7D data set as an example, with $\epsilon = 2000$, BLOCK-DBSCAN took 14.4834 seconds and discovered 5096 clus-

1. <http://www.satimagingcorp.com/gallery/ikonos/ikonos-tadco-farms-saudi-arabia>.

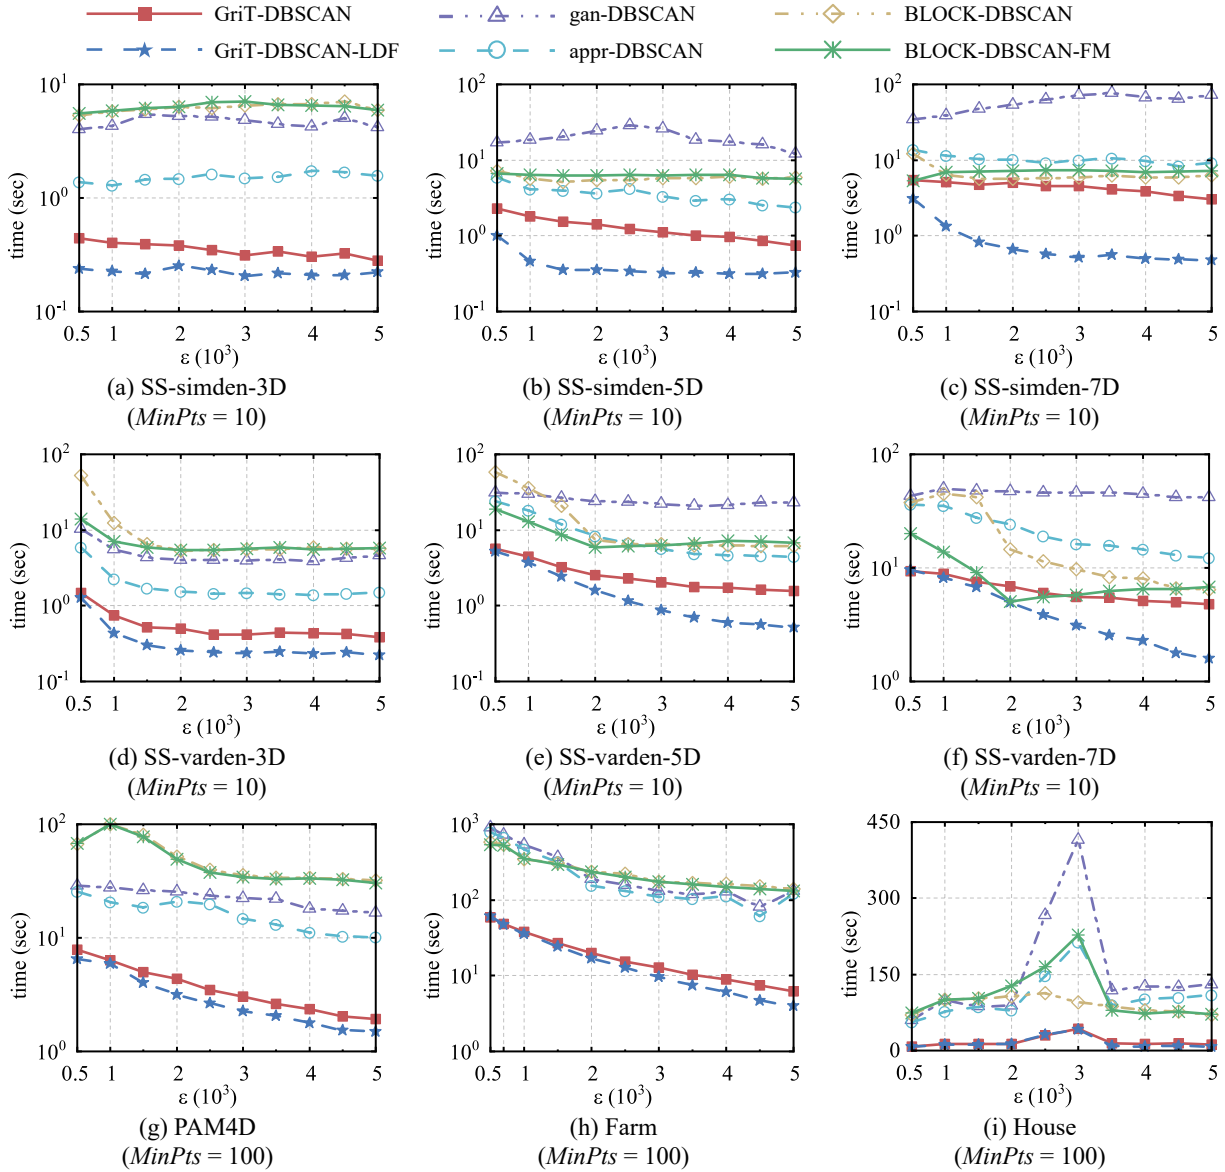


Fig. 5. Running time vs. ϵ .

ters. BLOCK-DBSCAN-FM took 5.0483 seconds to produce 1563 clusters like other exact DBSCAN algorithms, which is around 200% faster than BLOCK-DBSCAN. However, the superiority disappeared when $\epsilon = 4500$; BLOCK-DBSCAN took 6.6477 seconds and discovered 1117 clusters, while BLOCK-DBSCAN-FM took 6.5353 seconds to produce 15 clusters. The superiority also disappeared in data set with similar density clusters. For the SS-simden-7D data set, with $\epsilon = 2000$, BLOCK-DBSCAN took 5.7127 seconds and discovered 166 clusters, while BLOCK-DBSCAN-FM took 7.2591 seconds to produce 15 clusters.

For GriT-DBSCAN, GriT-DBSCAN-LDF, gan-DBSCAN, and appr-DBSCAN, they tend to perform better as ϵ increases since there are fewer non-empty grids, which speeds up the merging step. It can be observed that GriT-DBSCAN and GriT-DBSCAN-LDF outperform gan-DBSCAN, appr-DBSCAN, and BLOCK-DBSCAN on all data sets. In particular, GriT-DBSCAN-LDF benefits from the union-find data

structure and the low density first traverse strategy for reducing redundant merging checks, significantly outperforming GriT-DBSCAN in most cases. However, the improvement is negligible when ϵ is small. The reason is that the number of non-empty grid is large when ϵ is small and most non-empty grids have one or two points, making the low density first traverse strategy ineffective. Alternatively, GriT-DBSCAN-LDF is more competitive with big ϵ .

In addition, gan-DBSCAN and appr-DBSCAN outperform BLOCK-DBSCAN and BLOCK-DBSCAN-FM when $d \leq 4$, but the improvement diminishes as d increases. This shows that BLOCK-DBSCAN and BLOCK-DBSCAN-FM are more scalable with dimension compared to gan-DBSCAN and appr-DBSCAN. The reason is that the number of possible neighboring grids of gan-DBSCAN and appr-DBSCAN grows exponentially with d , this makes the cost of finding neighboring grids expensive. In contrast, GriT-DBSCAN and GriT-DBSCAN-LDF use the grid tree

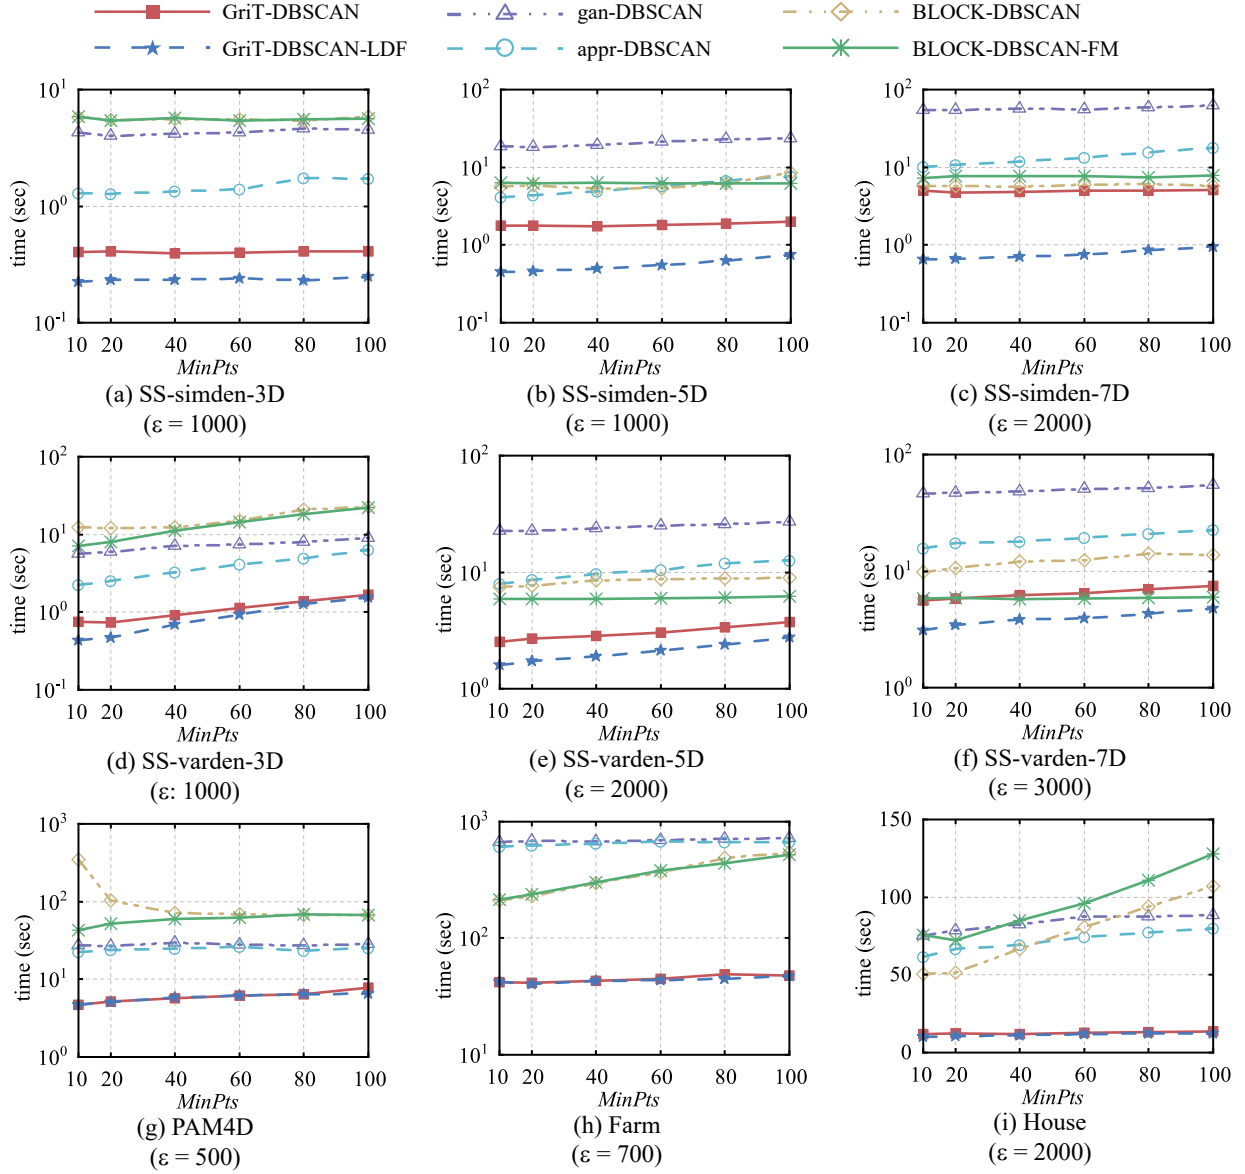


Fig. 6. Running time vs. $MinPts$.

to find the non-empty neighboring grids, with complexity $O(d \cdot (\sum_{i=1}^{|Gs|} |Nei(g_i)|) / |Gs|)$ in the best case, which alleviates the influence of d on the running time to some extent.

Influence of $MinPts$. The next set of experiments aims to inspect how $MinPts$ influences the running time of each algorithm. Therefore, we fix ϵ of each data set to the default value and vary $MinPts$ from 10 to 100. Fig. 6 shows the effects of $MinPts$ on the performance of different algorithms. In general, GriT-DBSCAN, GriT-DBSCAN-LDF, gan-DBSCAN, and appr-DBSCAN become slower as $MinPts$ increases. This is because the running time to identify all core points is $O(n \cdot MinPts)$. However, as illustrated in Fig. 6, the influence of $MinPts$ was limited. For BLOCK-DBSCAN and BLOCK-DBSCAN-FM, there is a trade off between the number of points filtered and the number of inner core blocks: a large $MinPts$ filter fewer points, while the number of inner core blocks decreases with increasing $MinPts$ leading to a reduction in the cost of merging

density-reachable inner core blocks. From Fig. 6, the first effect dominates except PAM4D and House. Apparently, GriT-DBSCAN and GriT-DBSCAN-LDF outperform gan-DBSCAN, appr-DBSCAN, BLOCK-DBSCAN, and BLOCK-DBSCAN-FM on all data sets.

Scalability with n . In the last set of experiments, we investigate the scalability of each algorithm with n using the synthetic data sets. To this end, we vary the number of points from 100k to 10m. Other parameters are given their default values. The resulting running times are presented against n in Fig. 7. It can be seen that GriT-DBSCAN-LDF consistently outperforms all other algorithms. Once again, BLOCK-DBSCAN and BLOCK-DBSCAN-FM become competitive as d increases, and BLOCK-DBSCAN is considerably slower than BLOCK-DBSCAN-FM on data sets with variable density clusters, which confirm our analysis in the first set of experiments.

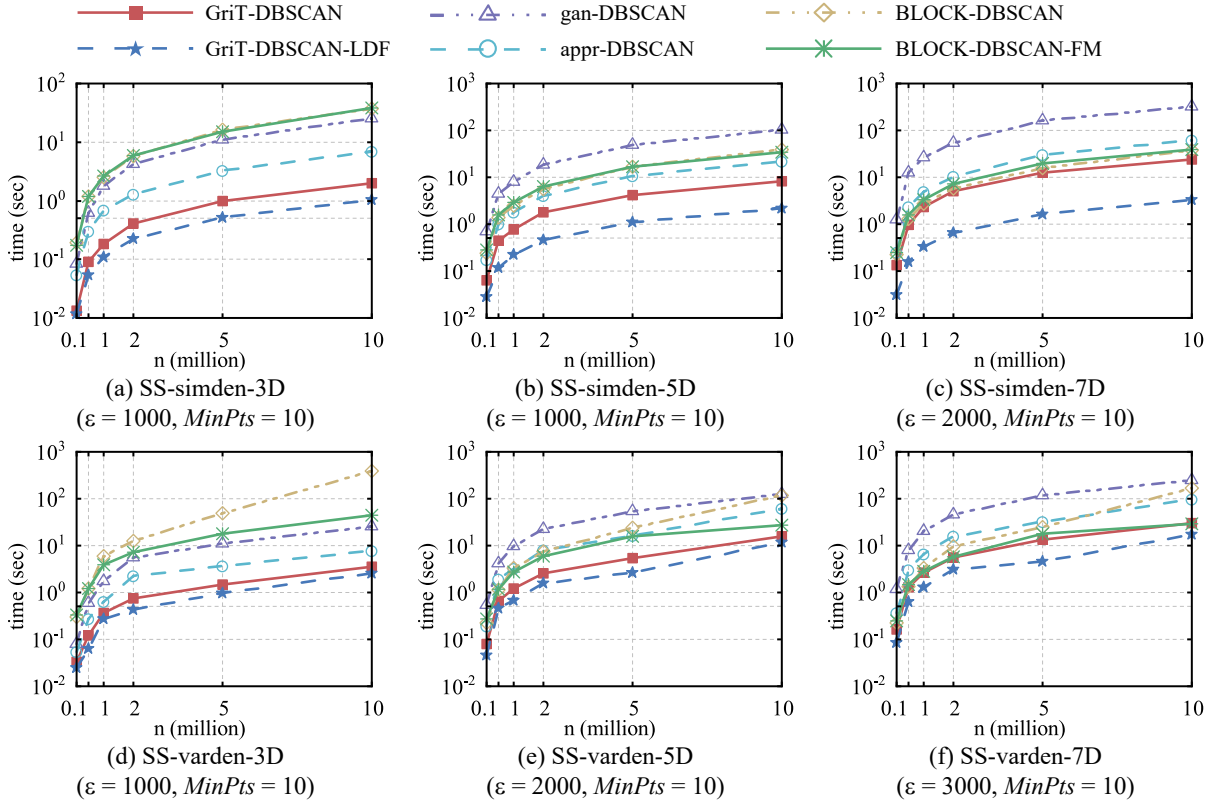


Fig. 7. Running time vs. n .

5.3 Experiments for $d = 2$

Next, we perform a set of experiments to compare the efficiency of our algorithms with existing algorithms in $d = 2$. In particular, we compare the performance of GriT-DBSCAN, GriT-DBSCAN-LDF, and BLOCK-DBSCAN-FM, to BLOCK-DBSCAN and Wavefront [9]. For Wavefront, we use the binary code which is written in C++ [37].

Influence of ϵ . We compare the performance of the five algorithms by varying ϵ . As shown in Fig. 8, the performance of the five algorithms improves as ϵ grows. GriT-DBSCAN and GriT-DBSCAN-LDF outperform the other three algorithms in all cases, while Wavefront is comparable to BLOCK-DBSCAN and BLOCK-DBSCAN-FM.

Influence of $MinPts$. We investigate the influence of $MinPts$ on the running time of each algorithm. Fig. 9 shows the results. The relative superiorities of all algorithms remain unchanged. In addition, the performance of BLOCK-DBSCAN is consistent with the observations we made in the experiments for $d \geq 3$.

Scalability with n . We vary the number of points in the data sets to examine how each algorithm scales with n . The results are shown in Fig. 10. It can be seen that the relative superiorities of all algorithms remain the same. However, in this set of experiments, BLOCK-DBSCAN is considerably slower than BLOCK-DBSCAN-FM on SS-simden-2D. The reason is that a small ϵ leads to a large number of inner core blocks, which makes the cost of forming clusters expensive. However, BLOCK-DBSCAN-FM uses a cover tree index, thus a small ϵ has little effect on its performance.

5.4 Efficiency of Grid Tree

To demonstrate the efficiency of grid tree, experiments are conducted on the three real-world data sets. In this set of experiments, we compare the running time of grid tree and R-tree as neighboring grid query techniques by varying ϵ from 500 to 5000 and fixing $MinPts$ to the default value. The results are shown in Fig. 11. In general, following an increase in ϵ , both grid tree and R-tree become faster. The reason is that the number of non-empty grids decreases with the increase of ϵ , resulting in fewer neighboring grid queries. On the other hand, the average number of non-empty neighboring grids increases with larger ϵ , making the neighboring grid query more expensive, thereby increasing the running time. Specifically, when ϵ is less than 3000, both grid tree and R-tree become slower with the increase of ϵ on the House data set. In addition, it is obvious from Fig. 11 that grid tree significantly outperforms R-tree on all data sets. We can conclude that grid tree clearly speeds up the neighboring grid query.

6 CONCLUSIONS

In this paper, we introduce a new exact DBSCAN algorithm with complexity linear to the number of data points called GriT-DBSCAN. The key idea of GriT-DBSCAN is to utilize the spatial relationships among points to efficiently determine whether two core grids can be merged in the merging step. More specifically, when judging whether two core grids can be merged, the trivial points in each grid are iteratively removed through the triangle inequality and

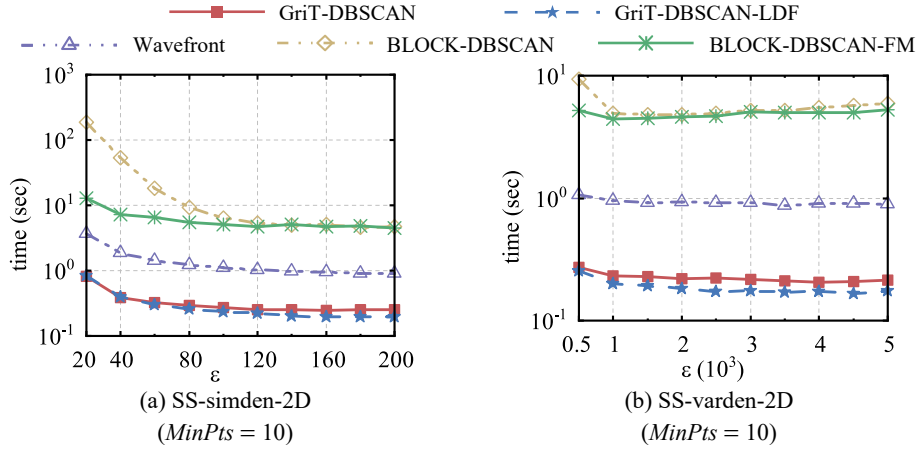


Fig. 8. Running time vs. ϵ .

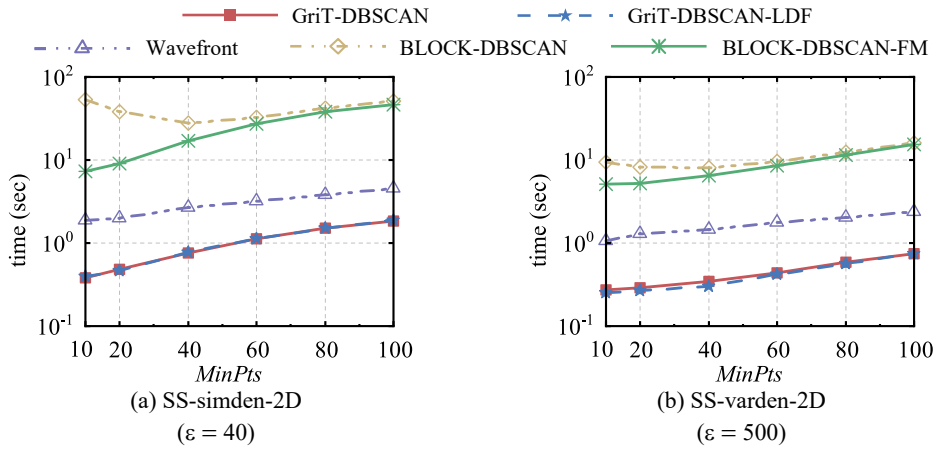


Fig. 9. Running time vs. $MinPts$.

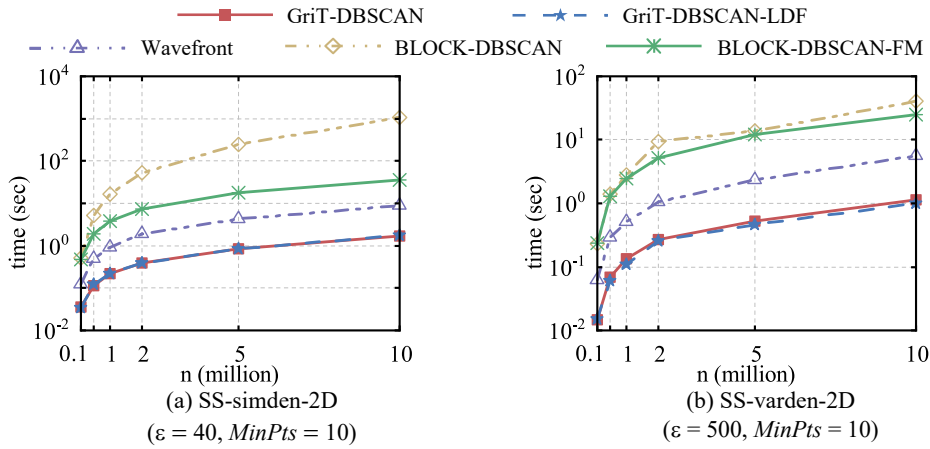


Fig. 10. Running time vs. n .

the angle information, so as to reduce unnecessary distance calculations. In addition, we introduce a grid tree to organize non-empty grids and an algorithm using it for efficient non-empty neighboring grids queries. We prove theoretically that GriT-DBSCAN presents excellent improvement in terms of computational efficiency.

We also obtain two variants of GriT-DBSCAN, namely,

GriT-DBSCAN-LDF and BLOCK-DBSCAN-FM. To further improve the performance of GriT-DBSCAN, GriT-DBSCAN-LDF incorporates the union-find data structure and the low density first traverse strategy to reduce redundant merging checks: once two core grids are in the same set, it is unnecessary to check whether they can be merged. By combining Algorithm 5 with BLOCK-DBSCAN, we obtain the

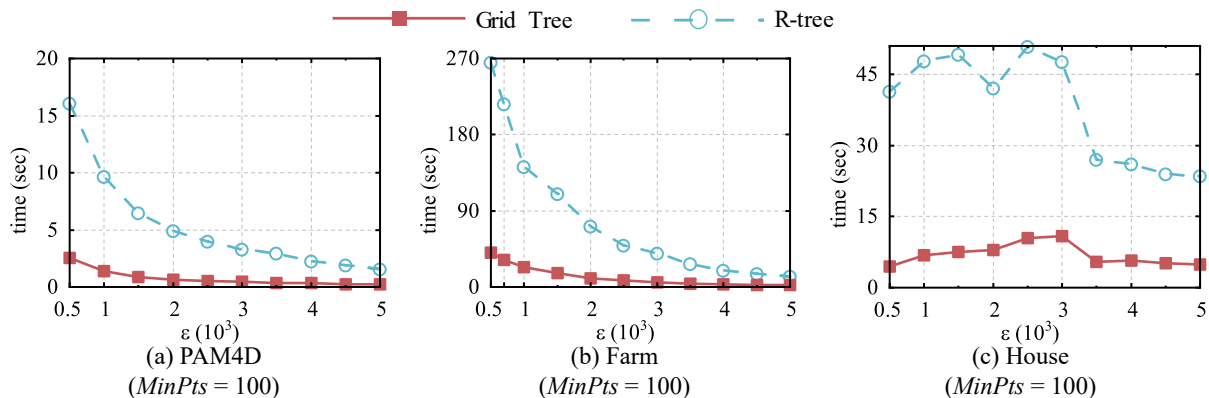


Fig. 11. The efficiency of grid tree.

second variant BLOCK-DBSCAN-FM. Due to the accuracy and efficiency of Algorithm 5, BLOCK-DBSCAN-FM obtains accurate clustering results with almost the same running time as BLOCK-DBSCAN or even less.

We conduct extensive experiments to evaluate the performance of GriT-DBSCAN and its two variants. The results demonstrate that our algorithms are more efficient than existing algorithms.

REFERENCES

- [1] D. T. Larose and C. D. Larose, *Discovering Knowledge in Data*, 2nd ed. John Wiley & Sons, 2014.
- [2] S. K. Bhatia and J. S. Deogun, "Conceptual clustering in information retrieval," *IEEE Trans. Syst., Man, Cybern. B*, vol. 28, no. 3, pp. 427–436, 1998.
- [3] A. Rosenfeld and A. C. Kak, *Digital Picture Processing*, 2nd ed. Academic Press, 1982.
- [4] C. M. Bishop, *Pattern Recognition and Machine Learning*. Springer-Verlag, 2006.
- [5] A. K. Jain, R. P. W. Duin, and J. Mao, "Statistical pattern recognition: A review," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 22, no. 1, pp. 4–37, 2000.
- [6] M. Ester, H.-P. Kriegel, J. Sander, and X. Xu, "A density-based algorithm for discovering clusters in large spatial databases with noise." in *Proc. 2nd ACM Int. Conf. Knowl. Discovery and Data Mining*, 1996, pp. 226–231.
- [7] A. Gunawan and M. de Berg, "A faster algorithm for DBSCAN," Msc Thesis, TU Eindhoven, 2013.
- [8] J. Gan and Y. Tao, "DBSCAN revisited: Mis-claim, un-fixability, and approximation," in *Proc. ACM SIGMOD Int. Conf. Manag. Data*, 2015, pp. 519–530.
- [9] —, "On the hardness and approximation of Euclidean DBSCAN," *ACM Trans. Database Syst.*, vol. 42, no. 3, pp. 1–45, 2017.
- [10] Y. Chen, S. Tang, N. Bouguila, C. Wang, J. Du, and H. Li, "A fast clustering algorithm based on pruning unnecessary distance computations in DBSCAN for high-dimensional data," *Pattern Recognit.*, vol. 83, pp. 375–387, 2018.
- [11] B. Borah and D. K. Bhattacharyya, "An improved sampling-based DBSCAN for large spatial databases," in *Proc. Int. Conf. Intell. Sens. Inf. Process.*, 2004, pp. 92–96.
- [12] S. Mahran and K. Mahar, "Using grid for accelerating density-based clustering," in *Proc. IEEE Int. Conf. Comput. Inf. Technol.*, 2008, pp. 35–40.
- [13] T. Boonchoo, X. Ao, Y. Liu, W. Zhao, F. Zhuang, and Q. He, "Grid-based DBSCAN: Indexing and inference," *Pattern Recognit.*, vol. 90, pp. 271–284, 2019.
- [14] Y. Wang, Y. Gu, and J. Shun, "Theoretically-efficient and practical parallel DBSCAN," in *Proc. ACM SIGMOD Int. Conf. Manag. Data*, 2020, pp. 2555–2571.
- [15] S. T. Mai, I. Assent, and M. Storgaard, "AnyDBC: An efficient anytime density-based clustering algorithm for very large complex datasets," in *Proc. ACM SIGKDD Int. Conf. Knowl. Discovery and Data Mining*, 2016, pp. 1025–1034.
- [16] S. Mai, J. Jacobsen, S. Amer-Yahia, I. Spence, P. Tran, I. Assent, and Q. V. H. Nguyen, "Incremental density-based clustering on multicore processors," *IEEE Trans. Pattern Anal. Mach. Intell.*, 2020.
- [17] Y. Chen, L. Zhou, S. Pei, Z. Yu, Y. Chen, X. Liu, J. Du, and N. Xiong, "KNN-BLOCK DBSCAN: Fast clustering for large-scale data," *IEEE Trans. Syst., Man, Cybern., Syst.*, 2019.
- [18] M. Muja and D. G. Lowe, "Scalable nearest neighbor algorithms for high dimensional data," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 36, no. 11, pp. 2227–2240, 2014.
- [19] Y. Chen, L. Zhou, N. Bouguila, C. Wang, Y. Chen, and J. Du, "BLOCK-DBSCAN: Fast clustering for large scale data," *Pattern Recognit.*, vol. 109, p. 107624, 2021.
- [20] S. Zhou, A. Zhou, J. Cao, J. Wen, Y. Fan, and Y. Hu, "Combining sampling technique with DBSCAN algorithm for clustering large spatial databases," in *Proc. Pacific-Asia Conf. Knowl. Discovery and Data Mining*, 2000, pp. 169–172.
- [21] P. Viswanath and R. Pinkesh, "I-DBSCAN: A fast hybrid density based clustering method," in *Proc. 18th Int. Conf. Pattern Recognit.*, 2006, pp. 912–915.
- [22] J. A. Hartigan, *Clustering Algorithms*. John Wiley & Sons, 1975.
- [23] P. Viswanath and V. S. Babu, "Rough-DBSCAN: A fast hybrid density based clustering method for large data sets," *Pattern Recognit. Lett.*, vol. 30, no. 16, pp. 1477–1488, 2009.
- [24] Z. Pawlak, *Rough Sets*. Springer Science & Business Media, 1991, vol. 9.
- [25] K. M. Kumar and A. R. M. Reddy, "A fast DBSCAN clustering algorithm by accelerating neighbor searching using groups method," *Pattern Recognit.*, vol. 58, pp. 39–48, 2016.
- [26] B. Liu, "A fast density-based clustering algorithm for large databases," in *Proc. 5th Int. Conf. Mach. Learn. and Cybern.*, 2006, pp. 996–1000.
- [27] A. Lulli, M. Dell'Amico, P. Michiardi, and L. Ricci, "NG-DBSCAN: Scalable density-based clustering for arbitrary data," *Proc. VLDB Endow.*, vol. 10, no. 3, pp. 157–168, 2016.
- [28] J. Jang and H. Jiang, "DBSCAN++: Towards fast and scalable density clustering," in *Int. Conf. Mach. Learn.*, 2019, pp. 3019–3029.
- [29] T. F. Gonzalez, "Clustering to minimize the maximum intercluster distance," *Theor. Comput. Sci.*, vol. 38, pp. 293–306, 1985.
- [30] H. Jiang, J. Jang, and J. Lacki, "Faster DBSCAN via subsampled similarity queries," in *Proc. Adv. Neural Inf. Process. Syst.*, vol. 33, 2020, pp. 22 407–22 419.
- [31] D. E. Knuth, *The Art of Computer Programming, Volume 3: Sorting and Searching*, 3rd ed. Addison-Wesley, 1997.
- [32] I. Todhunter, *Spherical Trigonometry*. Macmillan, 1863.
- [33] D. Dua and C. Graff, "UCI machine learning repository," 2017. [Online]. Available: <http://archive.ics.uci.edu/ml>
- [34] M. Varma and A. Zisserman, "Texture classification: Are filter banks necessary?" in *Proc. IEEE Comput. Soc. Conf. Comput. Vis. Pattern Recognit.*, vol. 2, 2003, pp. II–691.
- [35] A. Beygelzimer, S. Kakade, and J. Langford, "Cover trees for nearest neighbor," in *Proc. 23rd Int. Conf. Mach. Learn.*, 2006, pp. 97–104.
- [36] R. E. Tarjan, "A class of algorithms which require nonlinear time to maintain disjoint sets," *J. Comput. Syst. Sci.*, vol. 18, no. 2, pp. 110–127, 1979.

- [37] J. Gan, "APPROXIMATE DBSCAN." [Online]. Available: <http://sites.google.com/view/approxdbscan>
- [38] Y. Chen, "BLOCK-DBSCAN." [Online]. Available: <https://github.com/XFastDataLab/BLOCK-DBSCAN>