

Nish: A Novel Negative Stimulated Hybrid Activation Function

Yildiray Anagun^{a*} and Sahin Isik^a

^aDepartment of Computer Engineering, Eskisehir Osmangazi University, Eskisehir, Turkey

*Corresponding author: yanagun@ogu.edu.tr

Abstract

Activation functions play a crucial role in the performance and stability of neural networks. In this study, we propose a novel non-monotonic activation function is called Negative Stimulated Hybrid Activation Function (Nish). It behaves like a Rectified Linear Unit (ReLU) function for values greater than zero, and a sinus-sigmoidal function for values less than zero. The proposed function incorporates the sigmoid and sine wave, allowing new dynamics over traditional ReLU activations. We evaluate robustness of the Nish for different combinations of well-established architectures as well as recently proposed activation functions using on various well-known benchmarks. The results indicate that the accuracy rates obtained by the proposed activation function are slightly higher than those obtained using the set of weights calculated by Mish activation.

Keywords: Activation Function, Convolutional Neural Network, Deep Learning

1. Introduction

Rectified Linear Unit ($\text{ReLU}(x) = \max(0, x)$) [1, 2] has been used extensively as a non-linear activation function on deep neural networks, moreover it is one of the most preferred functions due to better convergence and gradient propagation compared to tanh, logistic and sigmoid. ReLU also suffers from the existence of certain three important cases such as non-zero mean, negative loss and unlimited output. Although ReLU ensures training speed in the learning phase, since the derivative of the zero value region is also zero, learning does not occur in backpropagation (Dying ReLU problem). ReLU-n [3] is another rectifier based activation functions proposed to improve the performance of CNNs. ReLU-n is a limited ReLU at n . When the value of

n is chosen as 6 empirically, it is called ReLU6. This provides the model to learn sparse input earlier. This is equivalent to assuming that each ReLU unit consists of only 6 replicated bias-shift Bernoulli units rather than an infinite amount [4]. Leaky ReLU (LReLU) [5], Parametric ReLU (PReLU) [6], and Randomized Leaky ReLU (RReLU) [7] are variants of ReLU and they make the slope of the negative part non-zero. In other words, they provide learning for values in the negative region as well. Leaky ReLU activates the dying gradients in ReLU at values close to zero but not zero. In other words, it provides learning for values in the negative region as well.

In recent years, several activation functions have been proposed to replace ReLU and its variants

(Exponential Linear Unit (ELU) [8], Scaled Exponential Linear Unit (SELU) [9], Gaussian Error Linear Unit (GELU) [10], Sigmoid Linear Unit (SiLU) [11], Swish [12], Mish [13]) and they exhibited good accuracy rates despite mentioned above learning challenges. Exponential Linear Unit (ELU) activation function exponentially reduces the slope from a fixed and predefined threshold to zero and includes a negative saturation curve to control the forward propagating variance. It takes a binary value and therefore often used as an output layer. Inspired by ELU, SELU is its parametric activation function variant and does not have a vanishing gradient problem like ReLU. SELU is defined for self-normalizing neural networks and deal with internal normalization. In other words, each layer preserves the mean and variance coming from previous layers. It ensures this normalization by adjusting both the mean and the variance so that the network converges faster. However, in deeper neural networks it is possible to say that SELU suffers from gradient explosion or loses its self-normalization property. GELU performs element-wise activation function on a given input tensor. The GELU nonlinearity weights the inputs by magnitude, rather than orienting the inputs according to their sign as in ReLUs and deals with the cumulative density function of the inputs normal distribution. SiLU is calculated with the sigmoid function multiplied by its input, while the Swish activation function is obtained by adding a trainable β parameter, with slight modification to SiLU. They consistently outperformed previous activation functions. Although, they considerably outperformed previous activation functions when

trained in 3 deep models, they are slower to converge as compared to ReLU, Leaky ReLU and PReLU. Based on the Swish's self-gating property, a new self-regulating non-monotonic activation function Mish tends to improve performance of computer vision tasks. Besides providing better empirical results than Swish under most experimental conditions, in [13], authors specified that Swish has some drawbacks, especially in large and complex architectures such as ResNet-based models and it cannot be used in every architecture.

2. Related Works

The research of new heuristics/strategies that can outperform classical activation functions is nowadays one of the key points to find solutions to image and signal processing problems with advanced deep learning mechanism [14]. There is a close and complex relationship between an activation function and the neural network design. The rectified unit family has been widely used in the recent popular deep CNNs [15-19]. After the activation function is defined for a specific deep learning model, activation is the same for neurons in all activation layers in that network. For instance, flexible ReLU has restated the rectified point of ReLU with a learnable parameter [20]. [21] developed an extension of dropout, which is called as alpha dropout and used with SELU. Thus, they provided distinct improvements in tasks such as speech and object recognition. In order to learn best activation function, a different methodology toward genetic algorithm was suggested in [22]. Activation functions and normalization layers are key components in deep learning models and typically

interact with each other. Another recent advance in this area is the evolution which revealed the general form of the function [23, 24]. While the gradient descent optimizes the parameters of the function during training, it generates custom functions that outperform general functions for different architectures such as Wide ResNet [25], ResNet [26] and Pre-activation ResNet [27] as well as the ability to customize activation functions according to the architectures.

In deep learning models, hidden layers and activation functions that make artificial neural networks non-linear. Basically, it is applied to all neurons of a layer and the output value of a neuron is determined according to the input value. In this way, the process of artificial neuronal firing takes place as a communication between neurons. In neural science, lateral inhibition (LI) [28] is a mechanism by which excitatory neurons inhibit the activity of nearby neurons. Thus, it increases the contrast and sharpness in visual or audio sensory perception by reducing the activity of its neighbor neurons. If there are three neurons and one is the center, in this neural activity if the center neuron receives a stimuli, this is called point of stimulation. On the other hand, we can see at this point the dendrites of surrounding neurons also get stimulated. In this case, although they are less getting stimulated, LI is occurred. In other words, LI involves the suppression of neurons by other neurons. For example, visual LI is the process in which photoreceptor cells improve edge perception while increasing contrast in visual images. Considering that the inhibition of a neuron is essentially independent of the training data and

parameters, it is necessary to distinguish between informative and noisy signals, as large-scale datasets often contain several types of noise. We aim to design a novel activation function called as Negative Stimulated Hybrid Activation Function (Nish), which is adaptive to non-linear transformation and inputs as well as robust to noise.

The key contributions of the paper can be summarized as follows:

- 1 We develop non-monotonic activation to combine the basic activation role in a data-driven way in a linear and non-linear fashion, respectively.
- 2 As an extension of ReLU activation, it further enhances the ability of a CNN architecture to learn non-linear transformation and is designed with the ability of being adaptive to the inputs.
- 3 In order to evaluate the performance of the proposed function, the standard activation functions employed in modern deep CNN architectures were replaced with the proposed activation function. Thus, it provides performance gains in benchmarks at various scales, including robust and accurate learning in the optimization process.
- 4 In terms of accuracy and loss values, the performance of the proposed Nish shows the superiority of the function presented over the alternative recent activation functions in the literature such as SiLU (or Swish) and Mish.

The rest of this paper is organized as follows: the proposed activation function explained in Section 3. The experimental results and comparisons are

presented in Section 4. Finally, Section 5 contains conclusions drawn from these results.

3. Definition of Nish

In this section, we briefly introduced three state-of-the-art activation functions (i.e. ReLU, SiLU and Mish) and then described the design of the proposed activation function Nish. Although ReLU makes the network run faster by taking zero values on the negative axis, it has vanishing gradient problem, since if value is less than zero the derivative is simply set to zero. For the sake of preventing of this problem, SiLU and Mish provides learning of non-linear transformations for the negative axis. The SiLU is formulated by the sigmoid function multiplied by its input and it appears a continuous

and undershooting version of the ReLU. Mish is inspired by the self-gating property of Swish, furthermore it has been achieved through systematic analysis and experimentation on the effective features of Swish. It includes many features such as unlimited positive domain, limited negative domain, non-monotonic shape and smooth derivative with Swish and GELU. Regarding the experiments of the Mish, under many conditions it achieved better results than Swish and ReLU. The formula of SiLU is expressed as

$$f_{SiLU}(x) = x * \sigma(x) = x * \frac{1}{1 + e^{-x}} \quad (1)$$

where $\sigma(\cdot)$ is the logistic sigmoid function and for x values of large magnitude, the activation of SiLU is approximately equal to the ReLU.

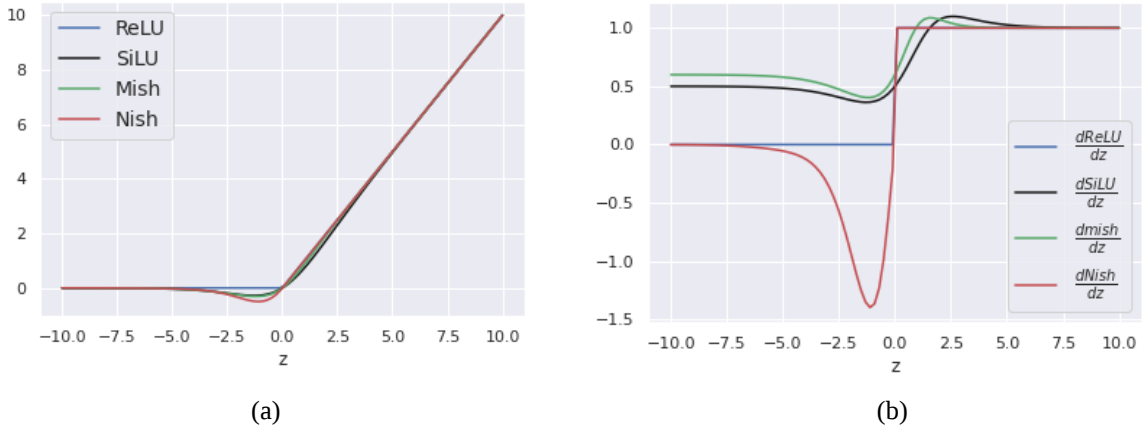


Figure 1. (a) The activation functions of the Nish, Mish, SiLU and ReLU. Unlike Mish and SiLU, Nish has slightly more convexity to preserve small weights in negative axis. (b) The 1st derivative of selected activation functions.

Similar to SiLU, continuous, self-regulating, non-monotonic Mish is mathematically formulated as

$$f_{Mish}(x) = x * \tanh(\text{softplus}(x)) \quad (2)$$

where $\text{softplus}(x) = \ln(1 + e^x)$ and due to the preservation of a small amount of negative information, it aims to eliminate the dying ReLU

problem and reduce the activity of the neighbors of an excited neuron by increasing LI.

In order to preserve these characteristics of a deep neural network, we propose Nish activation. Our aim is to improve learning accuracy and adaptation of the activation operation to the model by

increasing slightly more convexity of the function on negative axis. As shown in Fig. 1 (a), Nish is a novel non-monotonic activation function and mathematically formulated as

$$f_{Nish}(x) = \begin{cases} x & \text{if } x \geq 0 \\ \text{sigmoid}(x) * (x + \sin(x)) & \text{if } x < 0, \end{cases} \quad (3)$$

Similar to both SiLU and Mish, it is bounded below and unbounded above with a range of $[\approx -0.31, \infty)$. The 1st derivative of Nish, as shown in Fig. 1 (b), can be denoted as

$$\frac{\partial f_{Nish}(x)}{\partial x} = \begin{cases} 1 & \text{if } x \geq 0 \\ x * (1 - x) * (1 + \cos(x)) & \text{if } x < 0, \end{cases} \quad (4)$$

Meanwhile, in the ReLU activation function, the output of a neuron is multiplied by 1 or 0. Although this makes the training process faster, the hard gating property often results in some minor data deficiencies. Nish restricts the dying ReLU phenomenon due to the small amount of gradient being retained in the negative region, especially close to origin.

4. Experimental Analyses

This section presents a series of experiments to demonstrate that the proposed Nish activation function improves performance of image classification task. Without loss of generality, we first introduce the training methodology and different datasets, and then present the comparison with recent state-of-the-art deep architectures, as well as statistical analysis and detailed evaluation.

4.1 MNIST Dataset

In the first experiment, we show performance of the ReLU, Swish, Mish and Nish activation functions corresponding test accuracy using MNIST dataset [29] which consists of a training set of 60,000 examples and a test set of 10,000 examples. Each sample is a 28×28 grayscale image, associated with a label from 10 classes. For this task, we used fully connected networks with linearly increasing depth as implemented in Mish. Batch normalization [20] is used to reduce internal covariate shift with 25% dropout [30]. Also, the network is optimized using Stochastic Gradient Descent (SGD) [31] with a batch size of 128. To hold a fair comparison, a comparative study is performed between the proposed Nish and other activation functions as shown in Fig. 2a. It is clear that the stability of the network on test accuracy in case of using the Nish is better than that of using ReLU, Swish and Mish in the large models. Interestingly, after fifteen layers, there was a sharp drop in test accuracy for other activation functions, while Nish preserved a significantly higher accuracy. The other inherent shortcoming in activation functions is that they may fail as inputs are degraded by random noise. The reason is that linear or nonlinear weights do not adapt the learning process to deal with random noise. For this purpose, the input MNIST data is degraded by additive zero-centered gaussian noise with linearly increasing standard deviation. Then, to evaluate the performance of activation functions perceptually, two experiments were conducted to show test losses, respectively, corresponding to 5-layered (Fig. 2b) and 10-layered (Fig. 2c) CNN architectures optimized using SGD.

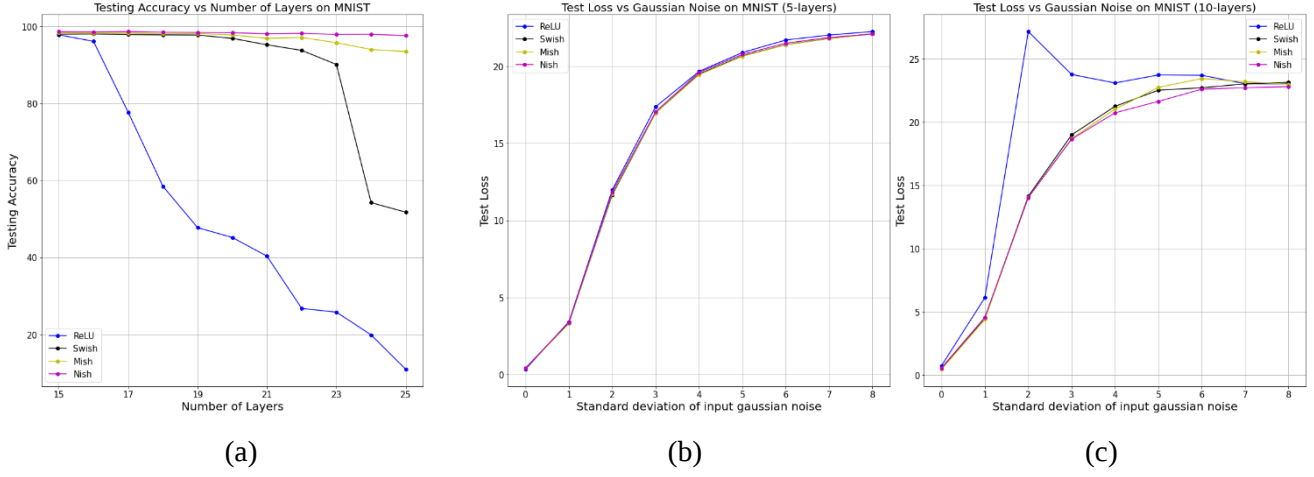


Figure 2. Comparison of Mish, Swish, ReLU and Nish (a) in terms of test accuracy with increasing depth of the neural network, (b) test loss with increasing input gaussian noise corresponding to 5-layered architecture and (c) test loss with increasing input gaussian noise corresponding to 10-layered architecture.

As seen in Fig. 2b, the Swish, Mish and Nish functions show similar and better test loss compared to ReLU and proceed in a similar manner against varying intensity of increasing input gaussian noise. On the contrary, Fig. 2c demonstrates that the activation functions fluctuates in test loss due to increased noise intensity in deeper architecture. Especially, Nish acts as a more sensitive stimulus routine of neurons, cutting off the noise than the Swish, Mish and ReLU. At this point it is worth mentioning that, the major aim of this work is to gain LI to the models without compromising heavily on learning accuracy.

4.2 CIFAR Dataset

The second experiment was performed on CIFAR-10 [32] dataset which has 10 classes, with 6,000 images per class. In this experiment, the statistical significance and consistency improvement of Nish was evaluated and compared according to test loss, test accuracy and standard deviation for the classification task in SqueezeNet [33], ResNet18 [27], EfficientNetB0 [34], EfficientNetv2s [35] and

MobileNetv2 [36]. For a fair comparison, the experiments utilized same training setup that has 10 runs and each for 50, 100 and 150 epochs with the Adam optimizer [37]. On the other hand, to verify the test accuracy of the Nish, only the corresponding activation function was changed while keeping all other network parameters constant. Table 1 gives the final highest mean accuracy (μ_{acc}), second lowest mean loss (μ_{loss}) and third lowest standard deviation of accuracy (σ_{acc}) at each run compared with the top specialized activation function Mish. As seen in the table, when we examine the difference between 50 and 150 epochs from the table, SqueezeNet, ResNet18 and EfficientNetv2s require more epochs to achieve the greater level of μ_{acc} . Since the value of μ_{loss} is very high for all the 50 epoch cases, it does not establish for concerned model very close to the learning behavior. We observe that the performance of the proposed activation function is accurate enough to provide approximately learning performance independent of the various models.

Table 1. Statistical comparison of Mish and Nish activation functions in image classification task on CIFAR-10 dataset using various models at 50, 100 and 150 epoch and 10 runs.

Model Name		Mish			Nish		
		50	100	150	50	100	150
SqueezeNet [33]	μ_{acc}	86.07%	90.98%	91.36%	86.17%	91.06%	91.51%
	μ_{loss}	0.4204	0.2738	0.3448	0.4189	0.2771	0.3420
	σ_{acc}	0.6281	0.2201	0.2567	0.4730	0.1293	0.2696
ResNet18 [27]	μ_{acc}	85.98%	90.93%	91.22%	86.01%	91.04%	91.38%
	μ_{loss}	0.4288	0.2738	0.3296	0.4323	0.2731	0.3343
	σ_{acc}	0.8765	0.1638	0.2905	0.5970	0.1844	0.1496
EfficientNetB0 [34]	μ_{acc}	85.25%	88.13%	88.45%	85.59%	88.55%	88.57%
	μ_{loss}	0.4373	0.3538	0.3818	0.4285	0.3452	0.3850
	σ_{acc}	0.2374	0.2085	0.2783	0.2651	0.1177	0.2255
EfficientNetv2s [35]	μ_{acc}	85.39%	90.31%	90.67%	84.10%	90.34%	90.76%
	μ_{loss}	0.4435	0.2934	0.3489	0.5015	0.2987	0.3727
	σ_{acc}	1.2926	0.2807	0.2183	0.6429	0.0057	0.2054
MobileNetv2 [36]	μ_{acc}	86.06%	89.06%	89.59%	86.01%	89.33%	89.64%
	μ_{loss}	0.4115	0.3227	0.3430	0.4162	0.3201	0.3491
	σ_{acc}	0.4694	0.0945	0.1693	0.3737	0.1755	0.0996

Upon inspecting the results, another important point is that the standard deviation σ_{acc} of Nish at 150 epoch are less than Mish for almost all models, except for SqueezeNet. Thus, we showed further that the Nish is more robust than Mish when the model is close to convergence or fully converged. As the number of epoch increases, Nish activation continues to offer noteworthy better performance in terms of test accuracy than Mish.

4.3 ImageNet Dataset

In order to validate the capability of our activation function, we should test it on unbalanced and substantial data sets. This is essential in order for us to arrive at inferences about the reliability and contribution of it. In order to accomplish this goal, analyses were conducted by using a variety of

activation functions on the ImageNet-100 [38] dataset, which was chosen since it is both extensive and imbalanced. Our hypothesis is that the Nish activation function has the potential to deliver good performance over multi-class and huge datasets. In this study, it was underlined that activation methods such as classical ReLU disregard the information close to zero. To tackle this problem, a combination of sinus-sigmoidal approaches was used by preserving the discriminative information. The purpose of this research is to highlight the fact that negative values that are relatively near to zero carry meaningful information after neurons have been triggered. In Table 2, we compare the Top-1 accuracy of Nish against Mish. We have used only two augmentation Random Horizontal Flip and Random Vertical Flip with 0.5 probability rate. For all models batch size is selected 32.

Table 2. Top1 scores for ImageNet-100.

Metric	Augmentation	Pretrained	Mish	Nish
mobilenetv2 [36]	yes	no	46.17%	46.54%
tinynet_c [39]	yes	no	66.69%	66.77%
effnetb0_ap [40]	yes	yes	80.96%	80.64%
tinynet_b [39]	yes	yes	83.98%	83.92%

In spite of the fact that it was seen that the Mish approach performs comparatively worse than the Nish in the absence of pretrained weights, however, one can say that the Mish method is more effective when there are weights that have been pretrained on ImageNet-1k with different activation functions. It demonstrates that Mish has limitations when it comes to embedding for developing a model without pretrained CNN models,

5. Conclusions

Due to the presence of multiple layers, the repeated multiplication results in the gradient becoming smaller and smaller thereby “vanishing” leading to a saturation in the network. Therefore, considering activations in deep learning algorithm as a means for picking a stable solution is very useful. To effectively handle this problem, which is encountered based on gradients in both shallow and deep architectures, a new analytics activation function capable of providing LI must be developed and applied for fulfilling prediction in the negative region with reasonable accuracy. This study proposes a new activation function is called Nish in connection with image classification task. Thereby, the main focus lies on activation functions that are better suited for image classification than the default activation functions of recent deep network models. After a brief introduction to the most frequently used activation functions such as Mish and Swish, a detailed general formulation of the Nish is given.

Deep learning architectures and their compatibility with different datasets are also examined. It turned out that the Nish yielded the best empirical performance among all other activations such as ReLU, Swish and Mish for image classification. One of the advantages of the Nish is its ability to better converge at high epochs count in deep architectures such as EfficientNetB0 and EfficientNetv2s. This is important since, if presence of noise, a model can be overfitted and the model does not make accurate predictions on testing data. Nish has proven to be more robust under noisy circumstances, and the performance degrades gracefully compared to ReLU, Swish and Mish when noise intensity increases. As discussed in before, there are still many possibilities for future improvement. For example, optimizing Nish to reduce the computational cost and to speed up the training time, in addition evaluating performance of Nish in various image processing tasks and other state-of-the-art models in regression. We also hope that our results motivate developers of future deep network models to provide appropriate training mechanism that could be used to implement layers such as the one proposed in this paper.

Acknowledgements

This research did not receive any specific grant from funding agencies in the public, commercial, or not-for-profit sectors.

References

- [1] A. Krizhevsky, I. Sutskever, G.E. Hinton, ImageNet classification with deep convolutional neural networks, *Commun. ACM*, 60 (2017) 84–90.
- [2] V. Nair, G. Hinton, Rectified Linear Units Improve Restricted Boltzmann Machines Vinod Nair, 2010.
- [3] A. Krizhevsky, Convolutional Deep Belief Networks on CIFAR-10, (2012).
- [4] L. Lu, Y. Shin, Y. Su, G.E. Karniadakis, Dying ReLU and Initialization: Theory and Numerical Examples, *ArXiv*, abs/1903.06733 (2019).
- [5] A.L. Maas, Rectifier Nonlinearities Improve Neural Network Acoustic Models, 2013.
- [6] K. He, X. Zhang, S. Ren, J. Sun, Delving Deep into Rectifiers: Surpassing Human-Level Performance on ImageNet Classification, *IEEE International Conference on Computer Vision (ICCV 2015)*, 1502 (2015).
- [7] B. Xu, N. Wang, T. Chen, M. Li, Empirical Evaluation of Rectified Activations in Convolutional Network, *CoRR*, abs/1505.00853 (2015).
- [8] D.-A. Clevert, T. Unterthiner, S. Hochreiter, Fast and Accurate Deep Network Learning by Exponential Linear Units (ELUs), 2016.
- [9] G. Klambauer, T. Unterthiner, A. Mayr, S. Hochreiter, Self-normalizing neural networks, *Proceedings of the 31st International Conference on Neural Information Processing Systems*, Curran Associates Inc., Long Beach, California, USA, 2017, pp. 972–981.
- [10] D. Hendrycks, K. Gimpel, Gaussian Error Linear Units (GELUs), *arXiv: Learning*, (2016).
- [11] S. Elfving, E. Uchibe, K. Doya, Sigmoid-weighted linear units for neural network function approximation in reinforcement learning, *Neural Networks*, 107 (2018) 3–11.
- [12] P. Ramachandran, B. Zoph, Q.V. Le, Searching for Activation Functions, *ArXiv*, abs/1710.05941 (2018).
- [13] D. Misra, Mish: A Self Regularized Non-Monotonic Activation Function, *BMVC2020*.
- [14] C. Nwankpa, W. Ijomah, A. Gachagan, S. Marshall, Activation Functions: Comparison of trends in Practice and Research for Deep Learning, 2020.
- [15] M.D. Zeiler, R. Fergus, Visualizing and Understanding Convolutional Networks, in: D. Fleet, T. Pajdla, B. Schiele, T. Tuytelaars (Eds.) *Computer Vision – ECCV 2014*, Springer International Publishing, Cham, 2014, pp. 818–833.
- [16] K. He, X. Zhang, S. Ren, J. Sun, Spatial Pyramid Pooling in Deep Convolutional Networks for Visual Recognition, in: D. Fleet, T. Pajdla, B. Schiele, T. Tuytelaars (Eds.) *Computer Vision – ECCV 2014*, Springer International Publishing, Cham, 2014, pp. 346–361.
- [17] P. Sermanet, D. Eigen, X. Zhang, M. Mathieu, R. Fergus, Y. LeCun, OverFeat: Integrated Recognition, Localization and Detection using Convolutional Networks, *CoRR*, abs/1312.6229 (2014).
- [18] D.-A. Clevert, T. Unterthiner, S. Hochreiter, Fast and Accurate Deep Network Learning by Exponential Linear Units (ELUs), *Under Review of ICLR2016 (1997)*, (2015).
- [19] K. He, X. Zhang, S. Ren, J. Sun, Delving Deep into Rectifiers: Surpassing Human-Level Performance on ImageNet Classification, *2015 IEEE International Conference on Computer Vision (ICCV)2015*, pp. 1026–1034.
- [20] S. Lofe, C. Szegedy, Batch normalization: accelerating deep network training by reducing internal covariate shift, *Proceedings of the 32nd International Conference on International Conference on Machine Learning - Volume 37*, *JMLR.org*, Lille, France, 2015, pp. 448–456.
- [21] G. Hinton, N. Srivastava, A. Krizhevsky, I. Sutskever, R. Salakhutdinov, Improving neural networks by preventing co-adaptation of feature detectors, *arXiv preprint*, *arXiv* (2012).
- [22] M. Basirat, P.M. Roth, The Quest for the Golden Activation Function, *ArXiv*, abs/1808.00783 (2018).
- [23] G. Bingham, W. Macke, R. Miikkulainen, Evolutionary optimization of deep learning activation functions, 2020.
- [24] H. Liu, A. Brock, K. Simonyan, Q. Le, Evolving Normalization-Activation Layers, 2020.
- [25] S. Zagoruyko, N. Komodakis, Wide Residual Networks, (2016).
- [26] K. He, X. Zhang, S. Ren, J. Sun, Deep Residual Learning for Image Recognition, 2016.
- [27] K. He, X. Zhang, S. Ren, J. Sun, Identity Mappings in Deep Residual Networks, in: B. Leibe, J. Matas, N. Sebe, M. Welling (Eds.) *Computer Vision – ECCV 2016*, Springer International Publishing, Cham, 2016, pp. 630–645.
- [28] J. Edwin Dickinson, R.A. Martin, D.R. Badcock, Lateral inhibition between banks of orientation selective channels predicts shape context effects: A tilt-illusion field, *Vision Research*, 192 (2022) 107975.
- [29] Y. LeCun, C. Cortes, C. Burges, MNIST handwritten digit database, *ATT Labs [Online]*. Available: <http://yann.lecun.com/exdb/mnist>, 2 (2010).
- [30] N. Srivastava, G. Hinton, A. Krizhevsky, I. Sutskever, R. Salakhutdinov, Dropout: A Simple Way to Prevent Neural Networks from Overfitting, *Journal of Machine Learning Research*, 15 (2014) 1929–1958.
- [31] L. Bottou, Large-Scale Machine Learning with Stochastic Gradient Descent, in: Y. Lechevallier, G. Saporta (Eds.) *Proceedings of COMPSTAT'2010*, Physica-Verlag HD, Heidelberg, 2010, pp. 177–186.
- [32] A. Krizhevsky, Learning Multiple Layers of Features from Tiny Images, *University of Toronto*, (2012).
- [33] J. Hu, L. Shen, G. Sun, Squeeze-and-Excitation Networks, *2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition2018*, pp. 7132–7141.
- [34] M. Tan, Q.V. Le, EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks, *ArXiv*, abs/1905.11946 (2019).
- [35] M. Tan, Q. Le, EfficientNetV2: Smaller Models and Faster Training, 2021.
- [36] M. Sandler, A. Howard, M. Zhu, A. Zhmoginov, L.-C. Chen, MobileNetV2: Inverted Residuals and Linear Bottlenecks, 2018.
- [37] D. Kingma, J. Ba, Adam: A Method for Stochastic Optimization, *International Conference on Learning Representations*, (2014).
- [38] J. Deng, W. Dong, R. Socher, L.J. Li, L. Kai, F.-F. Li, ImageNet: A large-scale hierarchical image database, *2009 IEEE Conference on Computer Vision and Pattern Recognition2009*, pp. 248–255.
- [39] G. Chen, Y. Wang, H. Li, W. Dong, TinyNet: A Lightweight, Modular, and Unified Network Architecture for The Internet of Things, 2019.
- [40] R. Wightman, Pytorch image models, Available: <https://github.com/rwightman>, (2009).