
Learning to Navigate Wikipedia by Taking Random Walks

Manzil Zaheer, Kenneth Marino, Will Grathwohl, John Schultz, Wendy Shang,
Sheila Babayan, Arun Ahuja, Ishita Dasgupta, Christine Kaeser-Chen, Rob Fergus
DeepMind New York

{manzilzaheer, kmarino, wgrathwohl, jhtschultz, wendyshang,
sbabayan, arahuja, idg, christinech, robfergus}@google.com

Abstract

A fundamental ability of an intelligent web-based agent is seeking out and acquiring new information. Internet search engines reliably find the correct vicinity but the top results may be a few links away from the desired target. A complementary approach is navigation via hyperlinks, employing a policy that comprehends local content and selects a link that moves it closer to the target. In this paper, we show that behavioral cloning of randomly sampled trajectories is sufficient to learn an effective link selection policy. We demonstrate the approach on a graph version of Wikipedia with 38M nodes and 387M edges. The model is able to efficiently navigate between nodes 5 and 20 steps apart 96% and 92% of the time, respectively. We then use the resulting embeddings and policy in downstream fact verification and question answering tasks where, in combination with basic TF-IDF search and ranking methods, they are competitive results to the state-of-the-art methods.

1 Introduction

The ability to gather new knowledge about the world is a fundamental aspect of intelligence. Based only on a few words, a fact, question, or even vague idea, humans have the ability to use the internet to find extremely specific information about the world. From the important (how to administer CPR) to the trivial (the LA Raiders won the 1983 SuperBowl), virtually any knowledge is a click away.

In this work, we focus in one particular aspect of this ability: web navigation. In general, navigation is a key component of an embodied agent: the ability to move efficiently toward a target. In known environments, where map information is available, shortest-path algorithms provide a viable solution. However, in novel settings, the agent lacks such global information and must instead *navigate* to the target, using its understanding of the local environment to select actions.

Other approaches to web agents have focused mostly on retrieval or search engines. These, however, only provide a partial solution, typically getting close to a desired target but often not exactly to the right page. In this work, we present an approach for navigation on graph-structured web data that uses hyperlinks within articles to navigate toward a target. It complements search engines, using them to provide a sensible starting point for a local search for specific information.

To be able to navigate on the web effectively, we must read the text of the page, see how concepts in the current page are related to a possible next page, and use our understanding to learn a policy to make the right navigation decision. Consider the scenario shown in Figure 1. The agent is trying to navigate to the target node NORTH AMERICA while currently at the node PRESIDENTS OF THE UNITED STATES containing two hyperlinks: BARACK OBAMA and USA. Our approach learns an embedding from the text of the current page and the text for each hyperlink node and passes these

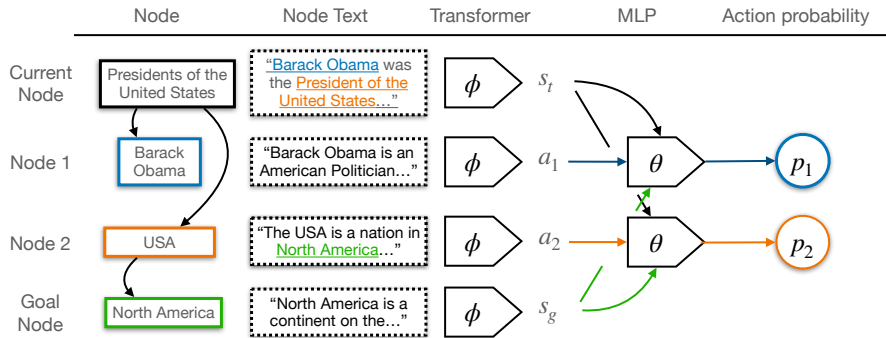


Figure 1: Our agent navigates through hyperlinks on a Wikipedia graph towards a target node. It first embeds the text at each link node using Transformer $\phi(\cdot)$ and then evaluates different actions/links a_1, a_2 with a policy θ , conditioned on the current and target embeddings s_t and s_g , respectively.

to a goal-conditioned policy that selects the best possible action. To make the correct choice in this example, the agent should associate USA with NORTH AMERICA.

The particular web environment we consider here is Wikipedia, converted into a graph form. Each of the 38M paragraphs is represented by a node; edges are links within and between articles. We introduce an approach for navigation on this graph based on behavioral cloning of automatically generated trajectories. This allows for unsupervised pre-training of both web page embeddings and navigation policy. We explore different trajectory distributions for training the model, the best practical choice being equivalent to random walks on the graph.

Contributions: Our work presents the first viable solution to the problem of web navigation¹, as demonstrated by reliable (>90% success) navigation on a graph of size 10^7 . Previous attempts such as Nogueira and Cho [2016] show a far inferior performance, well below that needed for practical utility. Furthermore, as there is nothing Wikipedia-specific about our approach and it scales gracefully, the method is applicable to general web settings. We also demonstrate the relevance of the pre-train + fine-tune paradigm to the web domain, showing that pre-training for navigation is a suitable objective to aid downstream tasks with limited data such as Q&A. We demonstrate this by applying our navigation approach on two challenging tasks: fact verification (FEVER; Thorne et al. [2018]) and Q&A (Natural Questions; Lee et al. [2019]) for evidence gathering. In both settings, we show a jump in performance over existing search-based approaches that rely on retrieval followed by re-ranking, matching state-of-the-art methods despite using far simpler retrieval and re-ranking mechanisms.

2 Background

Wikipedia as a navigation environment: Human behavior on Wikipedia [West and Leskovec, 2012a] was collected via the Wikispeedia game [West et al., 2009], which asked the players to move between a pair of arbitrarily chosen articles in the fewest steps. This rule allows the emergence of a semantic distance between concepts that facilitates retrieval. West and Leskovec [2012b] conducted initial studies on this dataset for navigation, using supervised learning and reinforcement learning methods on a small subset of articles (4.6K) with simple TF-IDF features.

Most relevantly, Nogueira and Cho [2016] explore the same problem of navigation on a large Wikipedia graph (12M nodes). They train LSTM agents to perform navigation on the graph, using Bag-of-Word features for each article. The trained agent is then applied to a Jeopardy Q&A task. Our approach revisits this framing but with a number of important differences: (i) training on a significantly larger graph (38M vs 12M nodes, 51.5M vs 380M edges); (ii) using Transformer-based architectures for paragraph encodings and for the navigation policy; (iii) they use a single fixed start node, whereas ours is able to navigate from any start node; (iv) removal of beam search, or other complex search mechanisms at evaluation time. Collectively, our approach boosts the navigation success rate from 12.5% in Nogueira and Cho [2016] to over 90%,² despite a much larger graph.

¹A demo of our agent navigating is shown here <https://www.youtube.com/watch?v=LVq0aPKpC2c>

²Exact comparisons are infeasible given idiosyncrasies in graph construction and other differences in setup.

Fact verification and Q&A using Wikipedia: Wikipedia is a rich resource for evaluating language understanding through Q&A tasks. [Chen et al. \[2017\]](#) combine TF-IDF retrieval with an LSTM document reader to find answers to free-form questions within Wikipedia documents. Contemporary Q&A systems [[Semnani and Pandey, 2020](#), [Qu et al., 2020](#)] extend this general approach to more complex pipelines, combining traditional and neural methods with inverted index search/retrieval schemes, followed by document readers that perform re-ranking. We demonstrate our navigation approach in conjunction with very basic retrieval and re-ranking approaches, so as to clearly demonstrate the value of navigation. In common with our approach, [Wang et al. \[2021\]](#) also use a graph version of Wikipedia, but with the goal of aligning it to a knowledge base, rather than navigation. [Stammach and Neumann \[2019\]](#) propose a scheme for finding evidence for the FEVER [[Thorne et al., 2018](#)] benchmark that explores all links one step away from an initial retrieval set. This can be viewed as a 1-step navigation operation, in contrast to our scheme that permits an arbitrary number of steps.

Navigation in knowledge bases: Graph navigation is a key element in utilizing knowledge bases (KB), where facts are represented as tuples of entity nodes connected by a labelled edge corresponding to relation between the two nodes. For example, [Das et al. \[2017\]](#) answer complex queries by navigating the graph, inferring missing edges along the way, and finding a valid path to the answer node. In our case, the graph is fixed but consists of natural language text and is partially observed. This makes the task much harder on two fronts. First, the policy must comprehend the natural language actions, without access to crisply labelled relation actions. Second, the action space is open and varying in size, unlike in a KB which typically has a fixed schema, i.e. relations/actions come from a fixed size set. Perhaps the closest work involving natural language actions, [Fu et al. \[2019\]](#) augment a KB with textual nodes. However, it still operates under the fixed KB schema. Further improvements on navigation in KB have been shown by incorporating tricks like reward-shaping [[Xiong et al., 2017](#)] and action dropout [[Lin et al., 2018](#)]. We adopted the action dropout where some outgoing edges are masked during training to enable more effective path exploration. Pushing more on exploration, inspired by AlphaGo, [Shen et al. \[2018\]](#), [He et al. \[2022\]](#) combine the policy with Monte-Carlo tree search to navigate KB. We find that no search method is necessary for our approach at evaluation time, with good performance obtained from the policy alone.

Internet powered Q&A: Several recent works have attempted complex question answering using the internet. [Talmor and Berant \[2018\]](#) retrieve snippets of information from the web with a search engine to answer a structured decomposition of the question with a simpler Q&A model. The recent WebGPT [[Nakano et al., 2021](#)] system takes a broadly similar approach to long-form question answering. WebGPT accrues information from the Bing search API as well as some navigation, and passes it to an LM to generate the answer text. The complexity of the system necessitates the use of human demonstrations for training. Related work from [Lazaridou et al. \[2022\]](#) utilizes a few-shot supervision of an LM to perform Google queries, which are then used by the LM to generate an answer. They show that by incorporating information from Google queries, the answers are more factual than those generated directly from LMs. Another line of work, has leveraged link structure of webpages found on the internet to improve Q&A. In LinkBERT [[Yasunaga et al., 2022](#)] is pretrained to capture dependencies between documents and results in improvement for multi-hop reasoning and few-shot reading comprehension. [Asai et al. \[2020\]](#) use the link structure to enhance open domain Q&A by learning to retrieve according to reasoning paths. In contrast to these works, we focus on mastering navigation rather than any combination with search/retrieval, albeit in more limited domain (Wikipedia vs the internet). However, our approach could potentially act as a core component in a general web navigation, being more versatile on account of not requiring supervision.

3 Approach

We consider navigation in a web environment $\mathcal{W} = \{\mathbf{N}, \mathbf{L}\}$, where $\mathbf{N} := \{n_i\}_{i=1}^N$ is the set of nodes, each n_i representing a web page with content s_i . The links between pages are represented by $\mathbf{L} := \{l_i\}_{i=1}^N$, where $l_i = \{l_i^1, \dots, l_i^j, \dots, l_i^{M_i}\}$ are the set of M_i (directed) out-links from node i . We define $\text{NH}(n_i)$ as the set of nodes reached by following all links l_i from node n_i , where the j th neighbor is given by $l_i^j(n_i)$.

We assume some target node n_g and some starting node n_0 are given, and wish to train an agent that can navigate from n_0 to n_g by walking along the edges of the graph within T steps. To accomplish this, we construct a parametric policy $p_\theta(n_{t+1}|n_t, n_g)$ which, at time step t , parameterizes a distribution over $n_{t+1} \in \text{NH}(n_t)$. We train this model via behavioral cloning to maximize

$$\mathcal{L}(\theta) = \mathbf{E}_{\mathcal{E}(n_0, \dots, n_T)} \left[\sum_{t=0}^{T-1} \log p_\theta(n_{t+1} | n_t, n_g) \right] \quad (1)$$

where $\mathcal{E}(n_0, \dots, n_T)$ is our trajectory distribution which generates trajectories (n_0, \dots, n_T) that we would like our model to replicate (i.e. setting $n_g = n_T$).

3.1 Trajectory distribution

This framework opens up many choices for \mathcal{E} . Clearly some will result in ineffective navigation strategies while others may enable us to train a policy which is capable of generalizing to new graphs and downstream applications. We elaborate on some choices below.

Reverse trajectories: We define $\mathcal{E}(n_T) = \text{Uniform}(\mathbf{N})$ (the uniform distribution over nodes in the graph). Now we can define

$$\mathcal{E}(n_t | n_{t+1}) = \frac{1}{|\{n_i; n_i \in \text{NH}(n_t)\}|} \quad \text{if } n_{t+1} \in \text{NH}(n_t), \quad \text{else } 0 \quad (2)$$

or, a distribution which uniformly walks the *reverse* graph (with transposed adjacency matrix). We begin with some uniformly chosen target node and walk backward randomly to n_0 in such a way that we can reach the target by walking forward from n_0 .

Intuitively, training with the reverse trajectories defined above should allow our model to be able to reach any node in the graph from any node it is connected to. Unfortunately, in realistic web graph data, there exist many “dead-ends” or nodes with no in-going edges. The trajectories get stuck at these nodes leading to low-diversity training data.

Random forward trajectories: In our real-world knowledge graph data, there are far fewer nodes which have no out-going edges. Thus we propose an alternative method to generate target nodes based on randomly walking forward. We define $\mathcal{E}(n_0)$ to be the $\text{Uniform}(\mathbf{N})$ and

$$\mathcal{E}(n_{t+1} | n_t) = \frac{1}{|\text{NH}(n_t)|} \quad \text{if } n_{t+1} \in \text{NH}(n_t), \quad \text{else } 0. \quad (3)$$

or, a distribution which uniformly picks a starting node and randomly walks the *forward* graph for T steps. Training in this way should encourage our model to be able to reach any node which is reachable from some uniformly chosen start. We note that the target node distribution $\mathcal{E}(n_T)$ will not be uniform and instead be a function of the graph structure. We also note that while this generates a T -step trajectory, because it is generated by random walk, the shortest path distance between start and target nodes may be smaller.

Random shortest paths: We define $\mathcal{E}(n_T) = \text{Uniform}(\mathbf{N})$ and let $\mathcal{E}(n_0 | n_T)$ be the uniform distribution of nodes whose shortest path length to n_T is T steps. We then define $\mathcal{E}(n_t | n_0, n_T)$ to be the delta distribution that n_t is the t -th node of this shortest path. While it can be challenging to compute the probabilities of this distribution efficiently we can draw samples from it using a shortest path finding algorithm such as Dijkstra’s algorithm.

3.2 Model parameterization

From above, we can see the core of our model is the $p_\theta(n_{t+1} | n_t, n_T)$ distribution. Given a sampled trajectory that begins at n_0 , this is the distribution which attempts to choose the correct action to take at timestep $t + 1$ starting at node n_t in order to get to target node n_T . We parameterize this distribution as a function of the text available at node n_t .

$$p_\theta(n_{t+1} | n_t, n_g) \propto \exp(f_\theta(s_{t+1}, s_t, s_g, t)) \quad (4)$$

where f_θ embeds the text s_g, s_t and s_{t+1} of the target, current and destination nodes, respectively. Further details on how we apply this general model to Wikipedia are given in Section 4.2 and an alternative interpretation of this approach based on variational inference in a latent-variable model is presented in Appendix D.

4 Application to Wikipedia

4.1 Navigation and sentence search tasks

Data processing: We convert a snapshot of English Wikipedia into a graph but split each article ($\bar{\mu} = 1000$ words) into paragraph-sized blocks ($\bar{\mu} = 100$ words), which form the *nodes*. *Edges* in the graph are the union of (i) organic hyperlinks, (ii) additional entity linking and (iii) next/previous paragraph links. We consider two snapshots from year 2017 and 2018, which produces large full graphs with $\sim 37\text{M}$ nodes and $\sim 370\text{M}$ edges. For initial experiments, we also use a smaller subsampled graph, for which we sub-sample disjoint sets of 200k train / 200k evaluation nodes from the 2018 graph. All the obtained graphs are well connected with median path length of 15. Further details have been relegated to the Appendix (full graphs in Appendix A.1, the 200k graph in Appendix A.2, and graph statistics in Appendix A.3).

T-step navigation: The most basic task is T -step navigation. At the start of the episode, we randomly sample a start node and generate a T -step random walk trajectory. We then take the last node of this trajectory as the target n_g . The agent is then given a time budget B (in most experiments, we fix max steps to $B = 100$), and succeeds if it reaches the target node within B steps. In our experiments, we show results on various graphs and splits with $T = \{5, 10, 20\}$ -step navigation.

1-T Multistep navigation: The Multistep task is much like the previous setting, except that instead of generating fixed T -step trajectories, we sample from $\text{Uniform}(1, T)$, $T = 20$.

T-step sentence search: This is the same setup as T -step navigation, except that rather than provide the full text for the target node n_g , only one sentence within that text is selected at random to compute the target embeddings from. Thus agents have the more challenging task of locating the correct node, given only a small snippet of its text (see Section 4.2 for details on target representation). We include this task because one of the difficulties of web navigation is establishing which page should be the target in the first place. It also has direct relevance to our downstream fact verification task.

4.2 Model architecture

State representation: For each node n_i we embed its text s_i using a Transformer $\phi(\cdot)$ to produce $\phi(s_i)$. By basing the state representation on semantic content, rather than i.e. node index, the agent is able to learn about the relationships between entities in a manner that allows for generalization to new graphs at evaluation time, instead of memorizing the structure of the training graph. Following Karpukhin et al. [2020], we append to the node text the title of the Wikipedia article to which it belongs. This often provides context to the node that might otherwise be missing – in many articles, the subject of the article will be referred to indirectly (e.g. it might state that “she” was born in 1945 instead of repeating the subject’s name).

For those experiments where the node embeddings are kept fixed, $\phi(\cdot)$ is a pre-trained RoBERTa [Liu et al., 2019] model that encodes the node text & title. However, in our large-scale experiments, we pre-train the Transformer $\phi(\cdot)$ directly using the text & title (see Appendix B.1). In both cases, we apply the Transformer to the tokenized text, take the mean over the input tokens, and apply a \tanh nonlinearity to produce $\phi(s_i)$.

Target representation: Similarly, we use the article text s_g of the target node as input to the Transformer model ϕ to compute its representation $\phi(s_g)$. For some tasks, such as sentence search or fact verification, the target representation instead relies on a single sentence from each node or other text specific to the task and a separate transformer model ϕ_{target} is trained to embed the target.

Navigation policy network: The network operates on the target node n_g and the current node n_t , and outputs a distribution over the possible actions that can be taken at n_t . As the nodes in the graph have a variable number of outgoing edges, the policy must produce a distribution with a variable number of outcomes. To do this, we first concatenate the embeddings of s_g and s_t , and pass them through a 1-layer feed-forward network to produce a combined embedding $e_{tg} = FF[\phi(s_t), \phi(s_g)]$. Next we embed each possible action a_i . When we use a fixed ϕ , we directly use $a_i = \phi(s_i)$ for $n_i \in \text{NH}(n_t)$. However this is not feasible when pre-training our embedding model due to memory concerns. Instead, we compute $a_i = \phi(s_t[l_t^i])$ where $s[l^i]$ selects the words in s which belong to hyperlink i – see Appendix B.1 for more details. We then define the probability of moving to n_i from

n_t with target n_g as $p(n_i | n_t, n_g) \propto \exp(e_{tg} \cdot a_i)$ which is normalized to produce a distribution over the $|\text{NH}(n_t)|$ actions.

In our larger-scale model, we also include the trajectory leading up to the current node (n_0, \dots, n_t) . We pass their embeddings, combined with the target embedding, $[\phi(s_0), \dots, \phi(s_t), \phi(s_g)]$, through a 4-layer transformer and use the output as e_{tg} when computing the transition probabilities above. We explore these two policy architecture choices, feed-forward and Transformer in Table 4.

4.3 Downstream tasks

Finally, we use our navigation approach to gather information for the tasks of fact verification on the FEVER benchmark [Thorne et al., 2018] and question answering on Natural Questions (NQ) [Lee et al., 2019] which also use Wikipedia as a knowledge base. One important difference from our earlier navigation task is that the target node n_g is not specified at evaluation time. Instead, we are given a claim whose veracity must be established or a question that must be answered by finding information in a particular node in the graph. To determine which node this is, we use a target encoder which maps the claim or question to an embedding vector that can be used in place of $\phi(s_g)$ in Section 4.2.

Due to the limited size of the downstream training sets, we pre-train our graph embeddings, navigation policy and target encoder on the similar sentence search task. We then freeze the embeddings and policy and fine-tune the target encoder on (n_g, s_g) pairs from the downstream task’s training set. To avoid over-fitting, we add an auxiliary loss which enforces the similarity between our target embedding and the embedding of the ground truth node containing the sentence needed to resolve the claim or question. Training and evaluation on FEVER and NQ required alignment between our version of Wikipedia and the one used to compile the benchmark and details of this can be found in Appendix C.1 and C.2.

Next, our navigation method requires a starting node. To put our agent close to the articles we need in the downstream tasks, we run a popular variant of TF-IDF, called BM25 [Robertson and Zaragoza, 2009]. We first create an index over all of the nodes in the graph, then take the top-5 BM25 matches as the starting nodes, and run navigation for 20 steps on each. Note that BM25 often does not find the exact text (i.e. the hits@1 is not high) but matches are in the right vicinity, usually the same or similar article. Thus the agent only has to navigate a few steps to reach the target: in FEVER and NQ datasets, the mean length of shortest path between start and target node is 4.3 and 5.1 steps respectively.

The final component is a re-ranker that takes all the sentences from all nodes visited by the agent and assigns a match score between each one and the claim. The ranked list of sentences can then be used for benchmark evaluation. We explore two types of ranker: (a) basic TF-IDF and (b) a transformer based model like BERT or BigBird, fine tuned using hard negatives mined from the TF-IDF ranker. See Appendix C.1 and C.2 for more details.

Evaluation of our approach thus consists of: (i) given a claim/question, use BM-25 to return a list of promising start locations; (ii) from the top $N = 10$ of these, run our navigation model for 20 steps, using the target encoder to embed the claim/question, (iii) use the re-ranker to score sentences visited against the claim/question and (iv) select the top 5 for computing the recall, precision, or F1 score, for comparison on the benchmarks.

5 Experiments

5.1 Investigation of training trajectory distribution

On the smaller 200k node graph, we investigate different choices for the trajectory policy distributions \mathcal{E} described in Section 3: (i) **Random Forward Trajectories**, where we randomly sample start nodes and do a random walk to get a target, (ii) **Reverse Trajectories**, where we randomly sample a target node and do a random walk on the reverse graph to get a start node, and (iii) **Random Shortest Paths** where we randomly sample a start node and take a random walk and then compute the shortest path between the start and target nodes. For each of these we trained policies on 5, 10, and 20 step navigation tasks. We evaluate these in two different ways: (i) forward sampling of source and target in the disjoint evaluation graph, (ii) reverse sampling of source and target. The results of this experiment are shown in Table 1. Unsurprisingly, we can see that forward and reverse trained policies both do better when evaluated in the way that matches training. However, forward trajectory policies

Table 1: Different trajectory distributions on small graph (200k nodes)

Trajectory Policy	Navigation (Forward)			Navigation (Reverse)		
	5	10	20	5	10	20
Forward	85.3	76.4	67.5	31.1	32.6	19.9
Reverse	2.3	0.5	0.2	91.3	87.9	87.3
Shortest path	86.7	85.0	84.6	74.3	31.6	28.4

generalize much better to reverse navigation. When we analyze the traces of these experiments, we see that in the reverse sampling, many target nodes are in “dead-ends” where many target nodes do not have long random trajectories to sample. This results in easier navigation (as we can see from higher accuracy in reverse trajectory trained policies on reverse navigation) and more extreme overfitting, leading to poor performance of reverse trajectory on forward navigation.

Not surprisingly, we also see that training on a shortest path trajectories leads to better performance both in the forward and reverse sampling. This advantage is especially seen in the 20-step navigation task. Ideally, we would always train on shortest paths. However, the time complexity of pre-computing all shortest paths in a graph using Dijkstra’s algorithm is $O(V(E + V \log V))$ for the number of nodes V and number of edges E in the graph. On the full 38M Wikipedia graph, this computation would be completely intractable. Luckily, the random forward trajectories perform almost as well and can be computed in constant time with respect to the size of the graph and only linear time with respect to the trajectory length. For all subsequent experiments, we use the **Random Forward Trajectories** for our trajectory policy and evaluate on the forward version of the navigation tasks, where we call our approach **Random Forward Behavioral Cloning (RFBC)**.

5.2 Navigation

We next do a more thorough set of experiments on the smaller 200k Wikipedia graph. Because the graph is much smaller than the full Wikipedia and thus prone to overfitting, for all of our methods and baselines we use the fixed RoBERTA embeddings $\phi(s_i)$, the simplest 1-layer feed-forward network, and MiniBERT [Turc et al., 2019] for target sentence embedding $\phi(s_g)$.

Alongside our approach, we employ the following baselines/ablations:

- RFBC: Random-forward behavioral cloning (our approach).
- RFBC + RF: RFBC but with random features sampled from the unit sphere instead of ϕ
- RL + RF: RL with random features.
- Random: policy that chooses random action (out-link) at each timestep.
- Greedy: selects the action embedding which has the smallest cosine distance with the target.
- Random DFS: DFS of depth equal to number of steps, choosing actions at random.
- Greedy DFS: DFS but select action with smallest cosine distance to the target.

More training details are in Appendix B.2 and computational cost of each in Appendix E.

The results evaluated on the held-out graph are shown in columns 1-4 of Table 2. Our approach (RFBC) performs well, achieving 77% in the multistep case. Performance also drops as the distance to the target increases. In contrast, the RL agent performs poorly (around 40% on navigation tasks). Because we generate virtually infinite expert trajectories with RFBC, RL performs worse as it is trained with essentially the same amount of exploration, but with a more sparse signal than behavioral cloning. Using random features in place of $\phi(\cdot)$ caused the performance to drop to near chance, showing that the models are utilizing the semantics at each node and are not relying on a general search strategy of some kind. Random methods also do quite poorly, even when adding a DFS. Greedy methods do a bit better than random, especially with DFS, but still well below our method.

We also consider the more challenging sentence search task described in Section 4.1. This task requires not only finding a known target node, but learning to find a target node given only a single random sentence from that node, more closely matching our downstream task and the way humans tend to approach finding information on the web. Columns 5-7 of Table 2 show performance on this task for our approach and RL. Our method has reduced performance on the task due to the extra difficulty of learning the target embedding, but still performs reasonably. RL, however, degrades to near chance performance.

Table 2: Small graph navigation (200k nodes) – Success rate (%)

Method	Navigation				Sentence Search		
	5	10	20	multistep	5	10	20
RFBC (ours)	85.3	76.4	67.5	77.4	60.7	47.6	34.6
RL	41.4	40.2	41.6	43.6	14.0	1.5	8.9
RFBC + RL (ours)	85.1	77.6	68.1	78.3	-	-	-
RFBC + RF	17.4	16.3	16.6	17.1	-	-	-
RL + RF	6.0	7.5	7.0	6.7	-	-	-
Random	12.3	14.9	12.3	14.0	-	-	-
Greedy	19.7	16.7	21.7	23.4	-	-	-
Random DFS	10.0	9.5	8.3	10.0	-	-	-
Greedy DFS	31.1	23.8	22.7	51.8	-	-	-

Table 3: Wikipedia graph statistics

Year	# Articles	# Nodes	# Edges	# Words / Node	Median Path Length
2017	4.92M	36.3M	359M	110	15
2018	5.27M	38.5M	387M	109	15

5.3 Navigation on full 38M node Wikipedia graph:

Our method scales naturally to much larger graphs, which we demonstrate by training on the entire Wikipedia 2017 graph. We evaluate on the entire Wikipedia 2018 graph. Each graph is $\sim 37M$ nodes and $\sim 370M$ edges (see Table 3 for details). We would like to point out there is significant evolution (difference) between the 2017 and 2018 graph as analysed in Appendix A.3 along with further statistics.

We explore both architectures described in Section 4.2 for the policy network: (i) the single feed-forward layer (as used in the smaller graph) and (ii) the 4-layer Transformer model. We also compare using a fixed RoBERTA model for ϕ versus pre-training a text transformer directly on the navigation task (see Appendix B.3). DistillBERT [Sanh et al., 2019] is used for $\phi(n_g)$.

Table 4 shows the results on the full graph, evaluating on $\{5, 10, 20\}$ step tasks, for both navigation and sentence search. Figure 2 shows example trajectories of the trained agent. The first thing to note is that the overall navigation and sentence search performance of our methods is high. The 2018 Wikipedia graph we use for evaluation contains over 5 million articles, over 38 million nodes and 387 million edges. On this graph (which we generalize to from the previous year’s graph) our best method can find an article 20 steps away 92.2% percent of the time and can locate it given just a single sentence of that article 90.2% of the time. This compares favorably with a similar evaluation performed in Nogueira and Cho [2016], where their WebNav approach achieved a 12.5% success rate for 16 step tasks on a 12M node graph. Compared to the performance of our method on the smaller 200k graph, we see that performance has greatly improved, most likely due to the addition of orders of magnitude more training data. In particular we see that sentence search performance on 20-step improves greatly from 34.6% to a best performance of 90.2%.

Additionally, in all cases, our learned embeddings perform better than using the fixed features, derived from large language models. In general, feed-forward policies perform best, except for 20 step navigation tasks. For longer trajectories, the Transformer policy network achieves slightly better performance, while on sentence search, the feed-forward model is consistently superior.

Table 4: Full graph navigation (38M nodes) - Success rate (%)

Embedding + Policy	Navigation			Sentence Search		
	5	10	20	5	10	20
RoBERTA + Feed-forward	85.5	80.1	71.5	91.2	88.9	77.5
RoBERTA + Transformer	85.3	88.3	87.9	81.6	75.4	70.9
Embed train (ours) + Feed-forward	96.1	94.1	89.8	96.3	92.8	90.2
Embed train (ours) + Transformer	93.5	90.6	92.2	93.9	86.3	79.7

5.4 Application to fact verification

We now evaluate the ability of our navigation approach to select evidence on the FEVER development set [Thorne et al., 2018] with results shown in Table 5. The primary metric used is F1@top5 but we also give precision and recall. Paired with a basic retrieval (BM25) and re-ranker (TF-IDF), the approach obtains a respectable F1 of 0.46. If we remove our navigation component then this drops substantially to 0.36, demonstrating its utility. Swapping to a more powerful re-ranker (BigBird) boosts the F1 to 0.731, which is competitive with the state-of-the-art (FEVER leaderboard [2022] rank #6; rank #1 F1 is 0.799). We also compare to a leading approach [Stammach, 2021] that similarly relies on the BigBird re-ranker, with our approach having a significantly better F1 score.

Table 5: Results on the FEVER benchmark (evidence retrieval only). The first two rows show the effect of adding our navigation scheme to the simple BM25 retrieval and TF-IDF re-ranker combination. Switching to a more powerful re-ranker (BigBird) results in a significant boost in F1 score, surpassing Stammach [2021] who also use BigBird [Zaheer et al., 2020].

Method	Precision@5	Recall@5	F1@5
BM25 + TF-IDF [Thorne et al., 2018]	0.33	0.40	0.36
BM25 + RFBC (Ours) + TF-IDF	0.38	0.55	0.46
BM25 + RFBC (Ours) + BigBird	0.71	0.75	0.73
Stammach [2021]	0.26	0.94	0.41

Riselda Selaj	Wallonia	Key ceremony	Vladimir Padwa	56th Training Squadron
Mycenaean Greece	Field (mathematics)	Metaphysics	Reproduction	Word
0: Riselda Selaj 1: Champion 2: Latin 3: Greece 4: Greece 5: Athens 6: Attica 7: Ancient Greek 8: Ancient Greek 9: Medieval Greek 10: Medieval Greek 11: Ottoman Empire 12: Anatolia 13: Medieval Greek 14: Medieval Greek 15: Language 16: Ancient Greece 17: Archaic Greece 18: Second Persian invasion of Greece 19: Ancient Greece 20: Ancient Greece	0: Wallonia (20) 1: Chemistry 2: Property (philosophy) 3: Extensionality 4: Extensionality (1) 5: Extensionality 6: Extensionality 7: Extensionality 8: Equality (mathematics) 9: Quantity 10: Magnitude (mathematics) 11: Magnitude (mathematics) 12: Mathematical object 13: Field (mathematics) 14: Addition 15: Addition 16: Operation (mathematics) 17: Operand 18: Operator (mathematics) 19: Space (mathematics) 20: Mathematical structure	0: Key ceremony (4) 1: Communication 2: Symbol 3: Belief 4: Pistis 5: Belief 6: Concept 7: Thought 8: Goal 9: Idea 10: Philosopher 11: Meaning of life 12: Metaphysics 13: Potentiality and actuality 14: Four causes 15: Four causes 16: Explanation 17: Fact 18: Reality 19: Philosophy 20: Philosophy	0: Vladimir Padwa (5) 1: Plan 2: Business 3: Product (business) 4: System 5: System (1) 6: System (2) 7: Biologist 8: Life 9: Cell signaling 10: Disease 11: Function (biology) 12: Fitness (biology) 13: Sexual selection 14: Reproductive success 15: Genotype 16: Genotype 17: Gene 18: Biology 19: Cell (biology) 20: Embryo	0: 56th Training Squadron (11) 1: 56th Training Squadron (11) 2: 56th Training Squadron (11) 3: 56th Training Squadron (11) 4: 56th Training Squadron (10) 5: Squadron (naval) 6: Warship 7: Navy 8: Power projection 9: Power projection 10: Sovereign state 11: Centralisation 12: Forms of government 13: Definition 14: Word 15: Word 16: Word 17: Word 18: Morpheme 19: Word 20: Word

Figure 2: Example navigation trajectories in the 38M node Wikipedia graph. The start and target nodes are shown in the first two rows. Parentheses indicate paragraph block (zero-indexed) within article. Note that in cases where the agent fails to find the target node (cols 1 & 3), it visits ones that are very close by.

The X-Files starred an actress.	Solanum contains the horse nettles.	CHiPs was written by Dax Shepard in 2011.	Brown University's main campus is located in the most populous city in Rhode Island.	The World Trade Center featured one building.
The X-Files	List of plants known as nettle	Dax Shepard	John Brown (Rhode Island)	One World Trade Center
Gillian Anderson	Solanum	CHiPs (film)	Providence, Rhode Island	World Trade Center (1973-2001)
Introduction. Gillian Leigh Anderson, OBE (born August 9, 1968), is an American-British film, television and theatre actress, activist and writer. Her credits include the roles of FBI Special Agent Dana Scully in the long-running and widely popular series "The X-Files",	Solanum is a large and diverse Genus of Flowering plants, which include two food crops of high economic importance, the Potato and the Tomato. It also contains the nightshades and horse nettles,...	CHiPs is a 2011 American action comedy Buddy cop film written and directed by Dax Shepard, ...	Providence is the capital of and most populous city in the U.S. state of Rhode Island, founded in 1636, and one of the oldest cities in the United States. It is located in Providence County and is the third most populous city in New England.	The World Trade Center was a large complex of seven buildings in Lower Manhattan, New York City, United States. It featured landmark twin towers, which opened on April 4, 1973, and were destroyed as a result of the September 11 attacks. At the time of their completion, the "Twin Towers"–the original 1 World Trade Center, at 7 and 2 World Trade Center, at –were the tallest buildings in the world...
0: The X-Files (84) 1: Humberg (The X-Files) 2: Humberg (The X-Files) 3: Gillian Anderson 4: Gillian Anderson 5: Gillian Anderson 6: Gillian Anderson 7: Gillian Anderson 8: Gillian Anderson 9: Gillian Anderson 10: Gillian Anderson 11: Gillian Anderson 12: Gillian Anderson 13: Gillian Anderson 14: Gillian Anderson	0: List of plants known as nettle (1) 1: List of plants known as nettle (1) 2: List of plants known as nettle (1) 3: List of plants known as nettle 4: List of plants known as nettle (1) 5: List of plants known as nettle (1) 6: Solanum rostratum 7: Solanum	0: Dax Shepard 1: Dax Shepard 2: Dax Shepard 3: Dax Shepard 4: Dax Shepard 5: CHiPs (film) 6: CHiPs (film) 7: CHiPs (film) 8: CHiPs (film) 9: CHiPs (film) 10: Dax Shepard 11: Dax Shepard 12: Dax Shepard 13: Dax Shepard 14: Dax Shepard	0: John Brown (Rhode Island) 1: Brown University 2: Brown University 3: Brown University 4: Brown University 5: Brown University 6: Brown University 7: Providence, Rhode Island 8: Providence, Rhode Island 9: Providence, Rhode Island 10: Providence, Rhode Island 11: Providence, Rhode Island 12: Providence, Rhode Island 13: Providence, Rhode Island 14: Providence, Rhode Island	0: One World Trade Center 1: One World Trade Center (1) 2: One World Trade Center (1) 3: One World Trade Center (1) 4: One World Trade Center (1) 5: One World Trade Center (2) 6: One World Trade Center (2) 7: One World Trade Center (2) 8: One World Trade Center (3) 9: One World Trade Center (3) 10: One World Trade Center (3) 11: One World Trade Center (3) 12: World Trade Center (1973-2001) 13: One World Trade Center 14: One World Trade Center (1)

Figure 3: Successful navigation trajectories on the FEVER [Thorne et al., 2018] evaluation set. Rows from top: claim to be verified; starting node (from BM25); ground truth target (not visible to agent); target node text; agent trajectory.

A possible explanation is that their approach overwhelms the re-ranker with all possible hyperlinks whereas, navigation being inherently sparse, our model presents a more refined set for re-ranking. We note that our approach: (a) is significantly simpler than many top ranked approaches and (b) selects evidence over a much larger set than the curated version of Wikipedia used in FEVER (38M vs 5M). Examples of successful navigation traces are shown in Figure 3.

5.5 Application to question answering

Finally, we present results on another downstream task where navigation helps. In particular, we consider the task of finding correct evidence passage for open domain question answering. We use the Natural Question (NQ) open-domain dataset presented in Lee et al. [2019]. Since we target navigating to the exact evidence passage required to answer the question, we use $\text{recall}@\{1,2,3,4,5\}$ for finding the gold evidence passage as our metric. More commonly the metric marks a retrieved passage to be correct if it contains the answer string, but this causes a lot of false positives, e.g. the answer string appears in a totally irrelevant context.

Table 6: Results on the Natural Questions open domain benchmark (evidence retrieval only). Third and fourth rows show the effect of adding our navigation scheme to the simple BM25 retrieval and BigBird re-ranker. First row is a reference re-training of state-of-the-art method on our setup.

	Recall@1	Recall@2	Recall@3	Recall@4	Recall@5
RocketQA [Qu et al., 2021]	32.7	43.8	51.7	58.3	62.5
BM25	11.1	17.3	21.8	24.9	27.3
BM25 + BigBird ReRank	22.2	30.2	35.1	38.7	41.2
BM25 + RFBC (Ours) + BigBird ReRank	31.6	41.3	46.6	49.8	51.6
Improvement	+42.3%	+36.7%	+32.7%	+28.7%	+25.2%

The results are tabulated in Table 6. Paired with a basic retrieval (BM25) and re-ranker (BigBird), the approach obtains a respectable Recall@1 of 31.6. If we remove our navigation component then this drops substantially to 22.2, demonstrating its utility. As a reference, we also ran a state-of-the-art system RocketQA [Qu et al., 2021] on our setup and evaluated it using our harder metric. It is worthwhile to note that our approach (a) is significantly simpler than state-of-the-art approaches like RocketQA which employ 4 stages of dual-encoder and cross-attention models, and (b) selects evidence over a larger set than the commonly used preprocess Wikipedia passages (38M vs 21M).

6 Discussion

We have presented a simple and effective scheme for navigating a large Wikipedia graph that is applicable to more general web navigation problems. We show that behavioral cloning of random trajectories is a viable approach to learning both entity embeddings and a navigation policy. When applied to the fact verification task on FEVER dataset and the open-domain question answering task on NQ dataset, they offer highly competitive performance, whilst being complementary to existing approaches. Another advantage worth highlighting is that the navigating agent provides a provenance on how it arrived at the relevant evidence, which many other methods (like dense passage retrieval) do not provide. One limitation of our approach when we move from Wikipedia to the wider Internet is that our scheme relies on a good target encoder. For navigation and our downstream tasks, there was a clear ground-truth target node available training, but in other settings this might not be the case. Another limitation is that we require a re-ranker to decide on the final retrieved sentence, but ideally the agent would decide for itself when it has reached the correct node.

References

- A. Asai, K. Hashimoto, H. Hajishirzi, R. Socher, and C. Xiong. Learning to retrieve reasoning paths over wikipedia graph for question answering. In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=SJgVHkrYDH>.
- D. Chen, A. Fisch, J. Weston, and A. Bordes. Reading wikipedia to answer open-domain questions. *CoRR*, abs/1704.00051, 2017.

- H. Dai, R. Singh, B. Dai, C. Sutton, and D. Schuurmans. Learning discrete energy-based models via auxiliary-variable local exploration. *Advances in Neural Information Processing Systems*, 2020.
- R. Das, S. Dhuliawala, M. Zaheer, L. Vilnis, I. Durugkar, A. Krishnamurthy, A. J. Smola, and A. McCallum. Go for a walk and arrive at the answer: Reasoning over paths in knowledge bases using reinforcement learning. *CoRR*, abs/1711.05851, 2017.
- L. Espeholt, H. Soyer, R. Munos, K. Simonyan, V. Mnih, T. Ward, Y. Doron, V. Firoiu, T. Harley, I. Dunning, S. Legg, and K. Kavukcuoglu. Impala: Scalable distributed deep-rl with importance weighted actor-learner architectures. *ArXiv*, abs/1802.01561, 2018.
- C. Fu, T. Chen, M. Qu, W. Jin, and X. Ren. Collaborative policy learning for open knowledge graph reasoning. *CoRR*, abs/1909.00230, 2019.
- L. He, B. Shao, Y. Xiao, Y. Li, T.-Y. Liu, E. Chen, and H. Xia. Neurally-guided semantic navigation in knowledge graph. *IEEE Transactions on Big Data*, 8(3):607–615, 2022.
- J. Ho, A. Jain, and P. Abbeel. Denoising diffusion probabilistic models. *Advances in Neural Information Processing Systems*, 33:6840–6851, 2020.
- S. Hofstätter, S. Althammer, M. Schröder, M. Sertkan, and A. Hanbury. Improving efficient neural ranking models with cross-architecture knowledge distillation. *CoRR*, abs/2010.02666, 2020.
- V. Karpukhin, B. Oguz, S. Min, L. Wu, S. Edunov, D. Chen, and W. Yih. Dense passage retrieval for open-domain question answering. *CoRR*, abs/2004.04906, 2020.
- D. P. Kingma and J. Ba. Adam: A method for stochastic optimization. *CoRR*, abs/1412.6980, 2014.
- D. P. Kingma and M. Welling. Auto-encoding variational bayes. *CoRR*, abs/1312.6114, 2013.
- A. Lazaridou, E. Gribovskaya, W. Stokowiec, and N. Grigorev. Internet-augmented language models through few-shot prompting for open-domain question answering, 2022.
- F. leaderboard. FEVER development set leaderboard. <https://competitions.codalab.org/competitions/18814#results>, 2022.
- K. Lee, M.-W. Chang, and K. Toutanova. Latent retrieval for weakly supervised open domain question answering. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 6086–6096, 01 2019. doi: 10.18653/v1/P19-1612.
- X. V. Lin, R. Socher, and C. Xiong. Multi-hop knowledge graph reasoning with reward shaping. *CoRR*, abs/1808.10568, 2018.
- Y. Liu, M. Ott, N. Goyal, J. Du, M. Joshi, D. Chen, O. Levy, M. Lewis, L. Zettlemoyer, and V. Stoyanov. Roberta: A robustly optimized BERT pretraining approach. *CoRR*, abs/1907.11692, 2019.
- R. Nakano, J. Hilton, S. Balaji, J. Wu, L. Ouyang, C. Kim, C. Hesse, S. Jain, V. Kosaraju, W. Saunders, X. Jiang, K. Cobbe, T. Eloundou, G. Krueger, K. Button, M. Knight, B. Chess, and J. Schulman. Webgpt: Browser-assisted question-answering with human feedback. *CoRR*, abs/2112.09332, 2021.
- R. Nogueira and K. Cho. Webnav: A new large-scale task for natural language based sequential decision making. *CoRR*, abs/1602.02261, 2016.
- Y. Qu, Y. Ding, J. Liu, K. Liu, R. Ren, X. Zhao, D. Dong, H. Wu, and H. Wang. Rocketqa: An optimized training approach to dense passage retrieval for open-domain question answering. *CoRR*, abs/2010.08191, 2020.
- Y. Qu, Y. Ding, J. Liu, K. Liu, R. Ren, W. X. Zhao, D. Dong, H. Wu, and H. Wang. Rocketqa: An optimized training approach to dense passage retrieval for open-domain question answering. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5835–5847, 2021.

- S. Robertson and H. Zaragoza. The probabilistic relevance framework: Bm25 and beyond. *Foundations and Trends® in Information Retrieval*, 3(4):333–389, 2009. ISSN 1554-0669. doi: 10.1561/1500000019. URL <http://dx.doi.org/10.1561/1500000019>.
- V. Sanh, L. Debut, J. Chaumond, and T. Wolf. Distilbert, a distilled version of bert: smaller, faster, cheaper and lighter. *ArXiv*, abs/1910.01108, 2019.
- S. J. Semnani and M. Pandey. Revisiting the open-domain question answering pipeline. *CoRR*, abs/2009.00914, 2020.
- Y. Shen, J. Chen, P.-S. Huang, Y. Guo, and J. Gao. M-walk: Learning to walk over graphs using monte carlo tree search. *Advances in Neural Information Processing Systems*, 31, 2018.
- D. Stambach. Evidence selection as a token-level prediction task. In *Proceedings of the Fourth Workshop on Fact Extraction and VERification (FEVER)*, pages 14–20, Dominican Republic, Nov. 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.fever-1.2. URL <https://aclanthology.org/2021.fever-1.2>.
- D. Stambach and G. Neumann. Team DOMLIN: Exploiting evidence enhancement for the FEVER shared task. In *Proceedings of the Second Workshop on Fact Extraction and VERification (FEVER)*, pages 105–109, Hong Kong, China, Nov. 2019. Association for Computational Linguistics. doi: 10.18653/v1/D19-6616. URL <https://aclanthology.org/D19-6616>.
- A. Talmor and J. Berant. The web as a knowledge-base for answering complex questions. *CoRR*, abs/1803.06643, 2018.
- J. Thorne, A. Vlachos, C. Christodoulopoulos, and A. Mittal. FEVER: a large-scale dataset for fact extraction and VERification. In *Association for Computational Linguistics; dataset released under Apache license.*, June 2018.
- I. Turc, M. Chang, K. Lee, and K. Toutanova. Well-read students learn better: The impact of student initialization on knowledge distillation. *CoRR*, abs/1908.08962, 2019. URL <http://arxiv.org/abs/1908.08962>.
- A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, and I. Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- L. Wang, Y. Li, Ö. Aslan, and O. Vinyals. Wikigraphs: A wikipedia text - knowledge graph paired dataset. *CoRR*, abs/2107.09556, 2021.
- R. West and J. Leskovec. Human wayfinding in information networks. In *WWW*, page 619–628, 2012a.
- R. West and J. Leskovec. Automatic versus human navigation in information networks. In *ICWSM*, 2012b.
- R. West, J. Pineau, and D. Precup. Wikispeedia: An online game for inferring semantic distances between concepts. In *Proceedings of the 21st International Joint Conference on Artificial Intelligence (IJCAI)*, 2009.
- W. Xiong, T. Hoang, and W. Y. Wang. Deeppath: A reinforcement learning method for knowledge graph reasoning. *CoRR*, abs/1707.06690, 2017.
- M. Yasunaga, J. Leskovec, and P. Liang. Linkbert: Pretraining language models with document links. *CoRR*, abs/2203.15827, 2022.
- Q. Ye, B. Wu, and B. Wang. Distance distribution and average shortest path length estimation in real-world networks. In *International Conference on Advanced Data Mining and Applications*, pages 322–333. Springer, 2010.
- M. Zaheer, G. Guruganesh, K. A. Dubey, J. Ainslie, C. Alberti, S. Ontanon, P. Pham, A. Ravula, Q. Wang, L. Yang, et al. Big bird: Transformers for longer sequences. *Advances in Neural Information Processing Systems*, 33:17283–17297, 2020.

A Data / Environment details

A.1 Wikipedia data processing

We start by downloading English Wikipedia snapshot (the pages-articles.xml.bz2 file) from Wikimedia³ or Internet Archive.⁴ We extract text from English Wikipedia for a given snapshot using Gensim’s WikiCorpus class.⁵ For each page, this tool extracts the plain text and hyperlinks, and strips out all structured data such as lists and figures. To avoid pages without sufficient textual content, we filter out categories, listical, disambiguation pages and any other page with less than 200 characters. Each article ($\mu = 1000$ words) is split into paragraph-sized blocks ($\mu = 100$ words), which form the *nodes* in our Wikipedia Graph. This was done both for conceptual reasons (humans don’t read an entire article at once but look at bits and pieces of it at one go) and for modeling reasons (most language models have an upper input token length that is smaller than the average Wikipedia page). The *edges* in the graph are formed in three ways:

1. for nodes in the same article, we add “previous node” and “next node” links to connect them in a chain;
2. organic hyperlinks – the internal links connecting Wikipedia pages to each other; and
3. we additionally run entity linking⁶ because repeat mentions of an entity in Wikipedia lack hyperlinks, which is problematic when articles are split up.

This constitutes our Wikipedia graph construction, where the text blocks act as vertices and the organic hyperlinks along with entity links are the edges. We store the graph as an adjacency list with metadata, using a memory mapped key-value data-structure to enable fast random access during navigation.

We run the above graph generation pipeline for two different snapshots of Wikipedia:

1. June 01 2017⁷: This corresponds to FEVER fact verification dataset.
2. December 2018⁸: This corresponds to Natural Questions open dataset.

A.2 Smaller 200k node graph construction

We construct smaller train and eval graphs with 200k nodes each for the following reasons:

1. Checking strict generalization by making train and eval graphs to be totally disjoint, i.e. no common nodes or edges. The full 2017 and 2018 are sufficiently different but not entirely disjoint.
2. Running experiments on full graphs are expensive, so for more thorough evaluation across multiple baselines we constructed the smaller graphs.

To construct these two smaller graphs, we start with the full 2018 graph. We sort the nodes by their in-degrees. We mark nodes with odd ranks to be in train and even ranks to be in eval, which ensures complete separation between the two. For the train graph we start with rank 1 node (and for eval with rank 2 node) and then select all its neighbors which have odd rank (even rank). Then all the odd (even) nodes connected to the selected ones are picked. This process is continued until the desired number of nodes are selected.

³<https://dumps.wikimedia.org/enwiki/>

⁴<https://archive.org/search.php?query=Wikimedia%20database%20dump%20of%20the%20English%20Wikipedia>

⁵<https://github.com/RaRe-Technologies/gensim/blob/master/gensim/corpora/wikicorpus.py>

⁶We use a standard linker from <https://cloud.google.com/natural-language/docs/analyzing-entities>

⁷<https://archive.org/download/enwiki-20170601/enwiki-20170601-pages-articles.xml.bz2>

⁸<https://archive.org/download/enwiki-20181220/enwiki-20181220-pages-articles.xml.bz2>

A.3 Graph statistics

We construct two versions of the full Wikipedia graph following the method outlined in Appendix A.1. The main summary statistics (number of articles, nodes, edges, words per node, median path length) of the resulting graphs are listed in Table 3.

A more detailed picture of the graph can be obtained by looking at its degree distribution, which is presented in Figure 4. It shows the graph has tell-tale sign of web-graph: it has a power-law distribution with a few hub nodes.

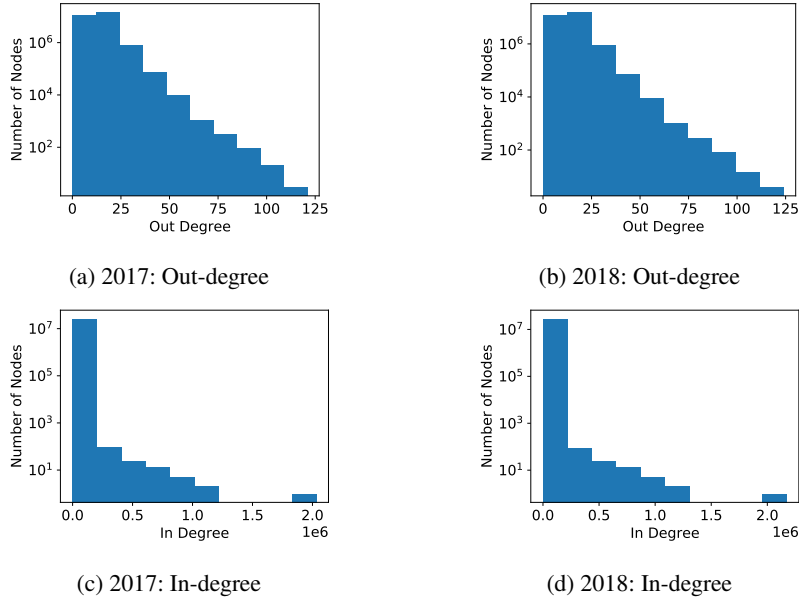


Figure 4: Degree Distribution

We try to estimate how far are two nodes in the graph. Calculating the entire distribution of shortest path length is prohibitively expensive for such large graph. We follow [Ye et al. \[2010\]](#) method to get an approximation. We start by selecting 250k nodes having highest in-degree, which is a good approximation of the giant component in a web graph as required by [Ye et al. \[2010\]](#). We then perform a single source to all shortest paths on each of these 250k nodes using Dijkstra’s algorithm for sparse graphs. This resulted in computing approximately 1 trillion shortest paths based on which the estimated distribution of shortest path length is shown in Figure 5.

Finally, we would like to point out that there is significant evolution (difference) between the 2017 and 2018 graph. Some important statistics reflecting the changes across the two graphs are:

- New articles: 404,773 (7.5%)
- New nodes: 3,871,578 (10%)
- Deleted articles: 58,476 (1.1%)
- Deleted nodes: 874,372 (2.3%)

Further in Figure 6, we show histogram of changes in edges among the common nodes between the two graphs. Apart from addition/deletion of organic hyperlinks, just modifications of text would yield to differences as the chunking will be different. This shows significant generalization is needed to successfully navigate across the two graphs, simply memorization will not work.




Figure 6: Number changes in edges among common nodes between 2017 and 2018

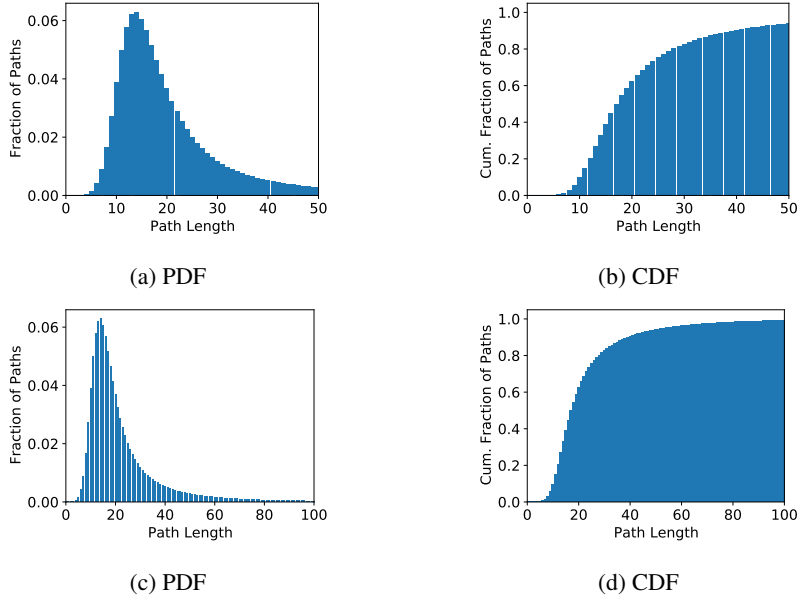


Figure 5: Distribution of Short Path Length estimated by computing shortest path between 1 trillion pairs of random nodes in the 2018 graph.

B Experimental details

B.1 Embedding pretraining

This section details our embedding pretraining procedure, as introduced in Section 3.

Model details The transformer is fine-tuned from a pre-trained RoBERTa [Liu et al., 2019] model. As in Equation 1 our model is trained to optimize

$$\mathcal{L}(\theta) = \mathbf{E}_{\mathcal{E}(n_0, \dots, n_T)} \left[\sum_{t=1}^{T-1} \log p_\theta(n_t | n_t, n_g) \right] \quad (5)$$

where we set $n_g = n_T$. We parameterize this distribution as

$$p_\theta(n_{t+1} | n_t, n_g) \propto \exp(f_\theta(s_\phi(n_g), s_\phi(n_t), a_\phi(n_t, n_{t+1}))) \quad (6)$$

where $s_\phi(\cdot)$ and $a_\phi(\cdot, \cdot)$ are functions which extract embeddings for an entire node and a node-action combination, respectively and $f_\theta(\cdot, \cdot, \cdot)$ is a function which combines these embeddings to produce action probabilities. At their core, s_ϕ and a_ϕ are based on the same transformer model. We tokenize the text at node n to produce L tokens and pass these tokens through the transformer to produce L embeddings.

The state representation $s_\phi(n)$ is produced by taking the mean of these embeddings and passing this vector through a \tanh nonlinearity. The node-action embedding $a_\phi(n, n')$ embeds the action of moving from node n to its neighbor n' . Let us assume the text at node n is “Barack Obama was the President of the United States during...” where the substrings “Barack Obama” and “President of the United States” correspond to hyperlinks to other neighboring articles n' and n'' . Then we construct the node-action embedding $a_\phi(n, n')$ by passing the tokenized text of node n through our transformer, again producing L transformed token embeddings. Then we take the transformed tokens which correspond to the text “Barack Obama” and take their mean and pass this through the \tanh nonlinearity. If we instead wanted to produce $a_\phi(n, n'')$ we would take the transformed tokens which correspond to the text “President of the United States” instead, take the mean and apply the nonlinearity. This is visualized in Figure 7.

The function f_θ which combines these embeddings first concatenates them and passes the combined input through a simple neural network with a single hidden layer and 1 output neuron.

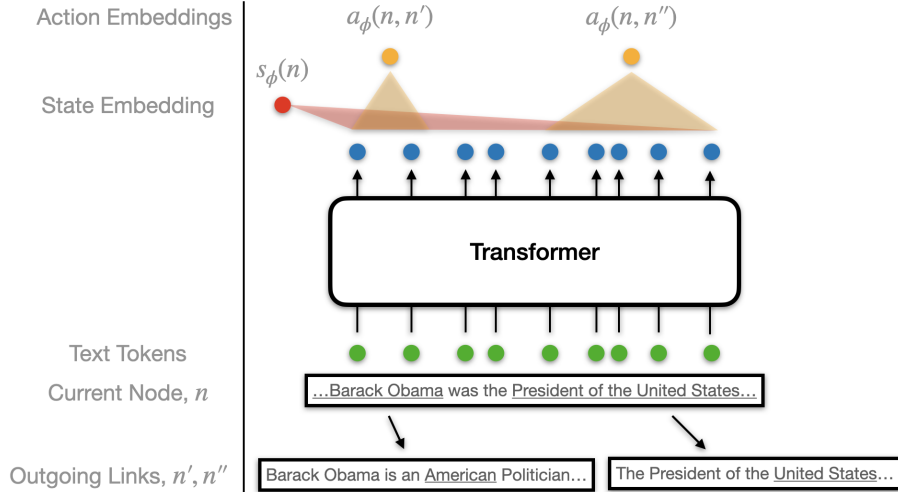


Figure 7: Description of how embeddings are extracted for navigation pretraining.

Training details We train these models to optimize Equation 5. The objective is optimized with the Adam [Kingma and Ba, 2014] optimizer using an initial learning rate of 10^{-5} with a one-cycle cosine decay schedule and linear warm up of 10K steps. The training batch size is 512 and the model is trained over 3M iterations. Node text is clipped (or padded) to 200 tokens. The weights of the transformer are initialized from a pretrained RoBERTa [Liu et al., 2019] masked language model.

B.2 Small graph experiments

Model details In the small graph experiments, we use the simple policy network FF as described in Section 4.2. As discussed, we use a 1-layer MLP (meaning a single learned linear layer with no activation function). We use a hidden size of 768 to match the size of ϕ . Because the final logits are the result of an inner product between each state and action embedding of size 768, to aid network training, we add a normalization layer (`jax.nn.normalize`) before the inner product.

For the action embedding $a_i = \phi(s_i)$ we also concatenate a 1-hot vector that represents the action type (e.g. whether it was a link action, or a next action, or a prev action). We also concatenate another bit that indicates whether the state s_i of the particular action has been visited before.

For the purposes of the RL baseline, we can view graph navigation as a goal-conditioned MDP.⁹ Our observation is the same as the inputs to the RFBC models. The reward function R for current node n and goal node n_g we can write simply as:

$$R = \begin{cases} 1 & n = n_g \\ 0 & otherwise \end{cases} \quad (7)$$

For the RL baseline, we used IMPALA [Espenholt et al., 2018], which is a kind of policy gradient approach, and thus has a policy network π and a “baseline” or value function network. Since the policy network has the same output space as our RFBC models, we use an identical architecture for this. For the value network, we use a very similar architecture. We again use ϕ as our encoding of the current node and the target node, again concatenate them together. We then feed this through a 1-layer MLP to compute the value.

Training details The procedure for generating the trajectories we use for the BC loss is described in Section 3.1. Except for our experiment in Section 5.1, we always use the random forward trajectories. Following Lin et al. [2018], in the navigation experiments, we randomly drop out edges in the training graph with probability 0.5 to reduce over-fitting. As stated in Section 4.1, we set max steps

⁹On a known fixed graph, we can formulate this as an MDP. However, in the case where the graph changes or in a setting where there are multiple possible graphs it is trivial to reformulate this as a POMDP where we only can see the current node and neighboring nodes

to $B = 100$. For RFBC training on the small graph, we use RMSProp with a learning rate of 0.01, a decay of 0.9 and an epsilon of 10^{-10} .

For the sentence search tasks, our models train a separate ϕ for the target embedding. As we stated, we use MiniBERT for this embedding ϕ_{target} and train it with the same optimization settings, except that we reduce the learning rate for these weights to 10^{-4} . We use a batch size of 512 and we train for 50,000 network update steps.

For RL training, we use VTRACE [Espenholt et al., 2018] loss, using the reward above. We again use RMSProp with a learning rate of 0.01, a decay of 0.9 and an epsilon of 10^{-10} . We set the baseline cost to 0.5, trajectory length (the number of timesteps the RL loss backprops through) to 100, batch size again to 512 and max update steps to 50,000. We did a parameter sweep for entropy costs of 0.1, 0.01, 0.001 and gamma of 0.8, 0.9. To give RL the best chance possible, we choose the maximum over this sweep for each experiment (but still none of these match RFBC performance).

B.3 Full Wikipedia navigation experiments

On the full Wikipedia training experiments in Section 5.3, we evaluate on navigation and sentence search using either our feed-forward or transformer model and using either RoBERTA fixed embeddings, or our trained embeddings described in Appendix B.1.

The feed-forward model is identical to the one described in Appendix B.2. The transformer model is the standard transformer model from Vaswani et al. [2017] with 4 layers, an attention size of 64, 12 heads, and mlp hidden size of 3072 and dropout rate of 0. DistillBERT [Sanh et al., 2019] is used for $\phi(n_g)$ for the sentence search experiments.

The learning parameters and all other relevant training parameters for all models are identical to those in Appendix B.2 except that the learning rate for the transformer model is lower (10^{-4}) as the earlier learning rate was too high for transformer models.

B.4 RFBC + RL

We additionally try finetuning an RL policy starting from our RFBC-trained navigation policies. We use the same network and learning settings as we did in the other RL experiments. We train for an additional 10,000 network updates (512M environment steps). We add the final numbers in Table 2 and show the training curve in Figure 8. We can see from the training curve that RL training accuracy fluctuates around the point where RFBC training left off. From the results in Table 2 we see little statistically significant difference (about 1 point in either direction).

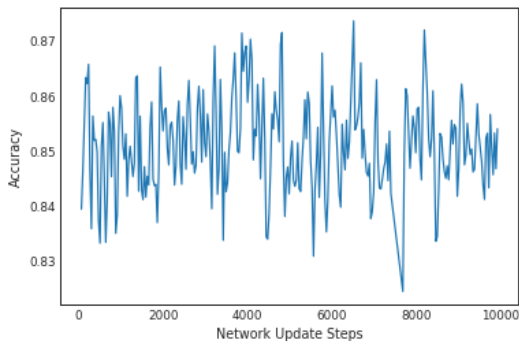


Figure 8: Training curve for RFBC with RL finetuning.

C Downstream task details

C.1 FEVER experiments

FEVER [Thorne et al., 2018] is a dataset containing 185,445 claims labeled as SUPPORTED, REFUTED, or NOTENOUGHINFO. Verifiable claims (i.e. SUPPORTED or REFUTED) are annotated with

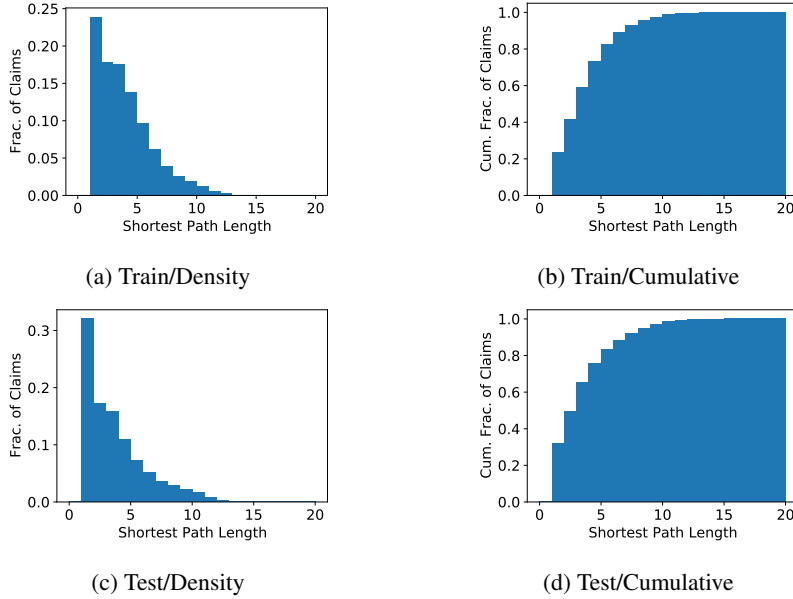


Figure 9: Distribution of Short Path Length from starting node computed by BM25 to target node on FEVER dataset on 2017 graph.

evidence sentences supporting this classification, which are drawn from a preprocessed version of the June 2017 Wikipedia snapshot. Notably, only the article introductions are retained, and claims are generated from a curated set of approximately 50,000 popular pages.

Data processing To make an aligned navigation graph for FEVER, we start with the June 01 2017 snapshot of Wikipedia and build the graph using the procedure described in Section A.1. Because of differences in text preprocessing, FEVER’s version of Wikipedia does not precisely align to our own. We then try to match FEVER’s Wikipedia articles to our graph, relying on Wikipedia URL redirections for handling disambiguations. This resulted in 99.5% matching of articles between our navigation graph and the FEVER version of Wikipedia. Second, we align the evidence sentences in FEVER to sentences from our text blocks using a fuzzy string match. Specifically, we use the token set ratio to score the similarity between an evidence sentence and the text in a graph node. If the score between a sentence and a node is ≥ 80 , the node is added as an evidence node for the given claim. This threshold is sufficiently high to minimize the chances of a false positive, while also matching a high percentage of evidence sentences. Some sentences are difficult to match, particularly those that are split between two text blocks. Ultimately, 93.1% of all evidence sentences were matched to a node. This gives us an augmented FEVER dataset, where for each claim we have a corresponding set of evidence nodes in the graph. These nodes are then used as navigation targets for fine-tuning during the training phase. We generate trajectories for BC by running BM25 over all nodes in the graph, taking the top 10 matches as starting nodes, and finding shortest paths to evidence nodes.

Data statistics We compute the shortest-path distance between top-1 retrieval of BM25 and target node in this graph in Figure 9. As can be seen that most path lengths are relatively short, which implies that BM25 lands us in the right vicinity and by a small amount of navigation around we will be able to find the right evidence passage.

Training details For the FEVER benchmark, our model uses learned embeddings for ϕ with a single feed-forward layer for the policy network. The model is pretrained on the 5-step sentence search task, and finetuned on trajectories generated from the augmented FEVER dataset using the following loss function:

$$\mathcal{L}(\theta) = \mathcal{L}_{BC}(\theta) + 0.1 \|\phi_{\text{target}}(\text{claim}) - \phi(s_g)\|_2 \quad (8)$$

where \mathcal{L}_{BC} is the normal BC loss we use in our other experiments.

Only the ϕ_{target} weights are finetuned for this task. We use AdamW with a constant learning rate of 10^{-6} , $\beta_1 = 0.9$, $\beta_2 = 0.999$, and $\epsilon = 10^{-6}$. The model is finetuned for 100,000 update steps with a batch size of 512. No edge dropout is used during finetuning.

Evaluation details For each claim in the FEVER development dataset, we first run BM25 over all nodes in the graph and take the top 5 matches as starting nodes. From each node, the finetuned model then navigates for 20 steps. We collect all sentences in all nodes visited by the agent over the 100 total navigation steps, and match them to FEVER evidence sentences using the WRatio function in the fuzzywuzzy package.¹⁰ Two sentence ranking methods are explored: Gensim’s TF-IDF implementation,¹¹ and the BigBird re-ranker of Stammbach [2021], using their open source model and weights.¹² Finally, the top-5 evidence sentences are then submitted to the official FEVER scorer¹³ to compute the accuracy, recall, and F1 scores.

C.2 NQ experiments

Natural Questions (NQ) is a dataset collected from real users asking questions on the Google search engine which are answerable using Wikipedia. We use the Natural Question open-domain subset presented in Lee et al. [2019] which has been aligned to Wikipedia dump of December 20, 2018 by Karpukhin et al. [2020]. In this split it has 58,880 questions for training and another 8,757 questions as development set for evaluation. (The test set is not aligned to Wikipedia passages so we do not evaluate on it.)

Data processing Most prior works in literature utilize the processed collection of 21M passages provided by Karpukhin et al. [2020], but unfortunately we cannot use it as it has no hyperlink information which is crucial for our graph building. So we re-align the questions in NQ to our 2018 graph with 38M passages (i.e. nodes) which has different text blocks than Karpukhin et al. [2020]. As the article title corresponding to the passage was given as part of the dataset, the alignment task was local to the document. We could find all the article titles, i.e. 100% match in locating the document in our dump. As before, to align the evidence passage in NQ to our text blocks, we first used a fuzzy string match. Then in the ranked list of fuzzy string matches, we searched for exact answer string. The highest ranked node with answer string was labelled as the ground truth. Some answer strings were difficult to match, particularly those that are split between two text blocks. Ultimately, 99.3% of all evidence passages were matched to a node. This gives the re-aligned NQ dataset, where for each question we have a corresponding set of evidence nodes in our graph. These nodes are then used as navigation targets for fine-tuning during the training phase. We generate trajectories for BC by running BM25 over all nodes in the graph, taking the top 10 matches as starting nodes, and finding shortest paths to evidence nodes.

Data statistics We compute the shortest-path distance between top-1 retrieval of BM25 and target node in this graph in Figure 10. As can be seen that most path lengths are relatively short, which implies that BM25 lands us in the right vicinity and by a small amount of navigation around we will be able to find the right evidence passage.

Training details For the NQ benchmark, our model uses learned embeddings for ϕ with a single feed-forward layer for the policy network. The model is pretrained on the 5-step sentence search task, and finetuned on trajectories generated from the NQ dataset using the the following loss function:

$$\mathcal{L}(\theta) = \mathcal{L}_{\text{BC}}(\theta) + 0.1 \|\phi_{\text{target}}(\text{question}) - \phi(s_g)\|_2 \quad (9)$$

where \mathcal{L}_{BC} is the normal BC loss we use in our other experiments.

Only the ϕ_{target} weights are finetuned for this task. We use AdamW with a constant learning rate of 10^{-6} , $\beta_1 = 0.9$, $\beta_2 = 0.999$, and $\epsilon = 10^{-6}$. The model is finetuned for 100,000 update steps with a batch size of 512. No edge dropout is used during finetuning.

¹⁰<https://pypi.org/project/fuzzywuzzy/>

¹¹<https://radimrehurek.com/gensim/models/tfidfmodel.html>

¹²<https://github.com/dominiksinsaarland/document-level-FEVER>

¹³<https://github.com/sheffieldnlp/fever-scorer/blob/9d9ed27637addf73bc2f8e38c436bdc032c9f1f/src/fever/scorer.py>

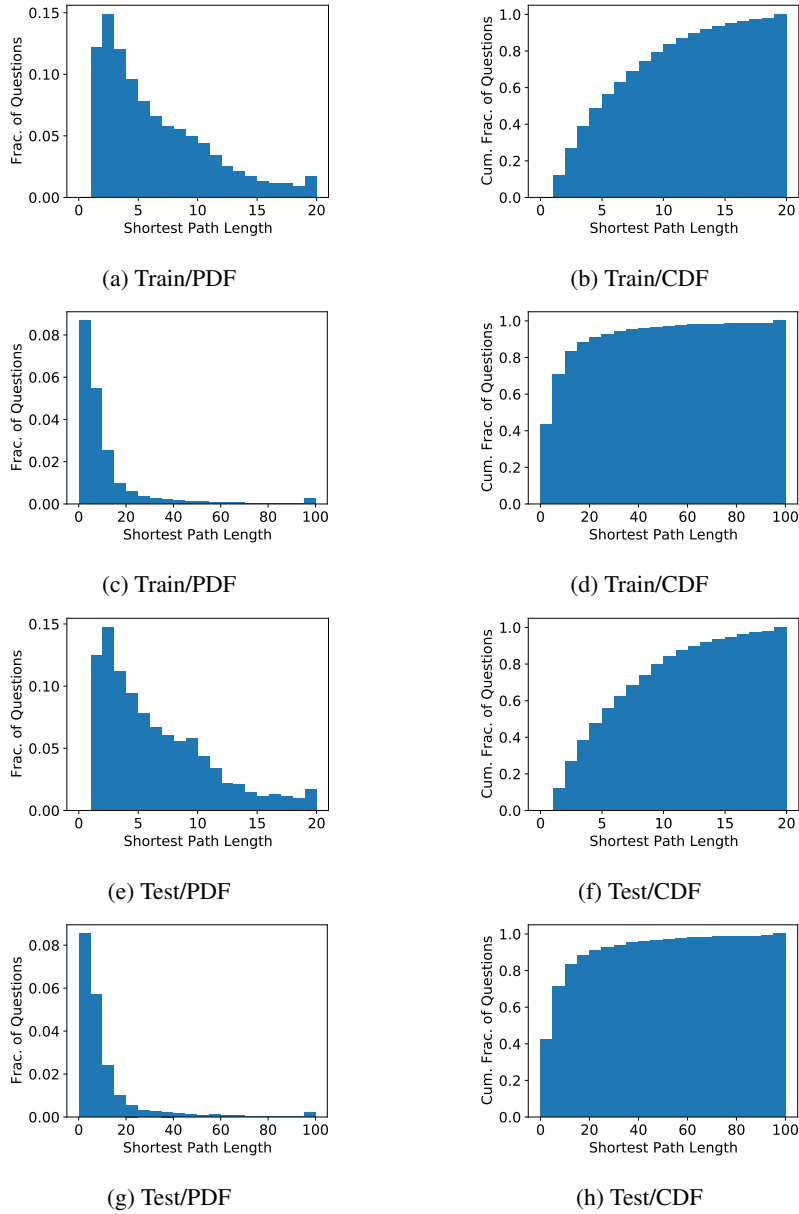


Figure 10: Distribution of Short Path Length from starting node computed by BM25 to target node on Natural Questions dataset on 2018 graph.

Evaluation details For each question, we first run BM25 over all nodes in the graph and take the top-5 matches as starting nodes. From each starting node, the agent then navigates for 20 steps. All the 100 nodes visited by the agent is then ranked by a simple cross-attention model. For the cross-attention model, we follow Hofstätter et al. [2020] to train 6-layer BigBird [Zaheer et al., 2020]. Since we target navigating to the exact evidence passage required to answer the question, we use $\text{recall}@\{1,2,3,4,5\}$ for finding the gold evidence passage as our metric. More commonly the metric marks a retrieved passage to be correct if it contains the answer string, but this causes a lot of false positives, e.g. the answer string appears in a totally irrelevant context.

D Variational Interpretation of our Approach

We present an alternative motivation of our method based on variational inference in a latent variable model of states. Assume we are given some goal node n_g . We would like to parameterize a model $p_\theta(n_T|n_g)$ which will generate a trajectory of states n_0, n_1, \dots, n_T such that $n_T = n_g$. We define our model as a latent variable model

$$\begin{aligned} p_\theta(n_T|n_g) &= \sum_{n_0, n_1, \dots, n_{T-1}} p_\theta(n_T, n_{T-1}, \dots, n_1, n_0|n_g) \\ &= \sum_{n_0, n_1, \dots, n_{T-1}} p(n_0) \prod_{t=1}^T p_\theta(n_t|n_{t-1}, n_g) \end{aligned} \quad (10)$$

i.e an autoregressive model which samples an initial state from $n_0 \sim p(n_0)$ and then samples subsequent states $n_t \sim p_\theta(n_t|n_{t-1}, n_g)$. The transition distribution samples the next node n_t from the neighbors of n_{t-1} in our graph. We would like the probability that $n_T = n_g$ to be large, thus we will train our model to maximize $\log p_\theta(n_T = n_g|n_g)$.

For latent-variable models such as this, we can rewrite the marginal likelihood as

$$\log p_\theta(n_T|n_g) = \mathbf{E}_{p_\theta(n_0, \dots, n_{T-1}|n_T, n_g)} \left[p(n_0) \prod_{t=1}^T p_\theta(n_t|n_{t-1}, n_g) - \log p_\theta(n_0, \dots, n_{T-1}|n_T, n_g) \right] \quad (11)$$

and can obtain a lower-bound on this quantity by replacing the intractable posterior $p_\theta(n_0, \dots, n_{T-1}|n_T, n_g)$ with a variational approximation $q(n_0, \dots, n_{T-1}|n_T, n_g)$, i.e

$$\begin{aligned} \mathcal{L}_\theta(n_T, n_g; q) &:= \log p_\theta(n_T|n_g) \\ &\geq \mathbf{E}_{q(n_0, \dots, n_{T-1}|n_T, n_g)} \left[p(n_0) \prod_{t=1}^T p_\theta(n_t|n_{t-1}, n_g) - \log q(n_0, \dots, n_{T-1}|n_T, n_g) \right]. \end{aligned} \quad (12)$$

The above bound becomes tight when $q(n_0, \dots, n_{T-1}|n_T, n_g) = p_\theta(n_0, \dots, n_{T-1}|n_T, n_g)$. Thus, we can optimize our model parameters θ to maximize $\mathcal{L}_\theta(n_T, n_g; q)$. This approach has had a long history of successfully training latent-variable generative models [Kingma and Welling, 2013, Ho et al., 2020].

In the context of this work, we can view $q(n_0, \dots, n_{T-1}|n_T, n_g)$ as a distribution over trajectories of nodes which end at our goal node. We can interpret the various trajectory generation methods introduced in Section 3.1 as different variational approximations q . Ideally, the option which most closely approximates the true posterior $p_\theta(n_0, \dots, n_{T-1}|n_T, n_g)$ would be the most desirable but in general this distribution is intractable.

We find that using simple random trajectories provides a good-enough approximation to the posterior to enable us to train a model which reliably finds the goal state. This result is not completely surprising in context of prior work [Dai et al., 2020] which successfully trains latent-variable models using random trajectories as an inference model.

E Efficiency Analysis

In this section we analyze the asymptotic runtime of our method and baselines. In Table 7 we show the asymptotic runtime and whether or not it is scalable for each method. We also show the 5-step accuracy from Table 2 for quick reference.

T is the trajectory length (either the length of the trajectory for BC methods or the maximum allowed trajectory for other methods. For BC, T is guaranteed to be shorter than the max, but this is a constant factor difference. E_{out} is the average number of outgoing edges (i.e. actions) at a node. (small - 10^1) E is the total edges in the graph (very large - 10^8). V is the number of nodes in the graph (large - 10^7).

Table 7: Asmptotic runtime analysis of RFBC and baselines.

Method	Cost (Big-O)	Scalable	Accuracy (5-step 200k graph)
RFBC (ours)	$O(E_{out}T)$	Yes	85.3
Backwards BC	$O(E_{out}T)$	Yes	2.3
Shortest path BC	$O(E \log V + E_{out}T)$	No	86.7
RL	$O(E_{out}T)$	Yes	41.4
Random	$O(T)$	Yes	12.3
Greedy	$O(E_{out}T)$	Yes	19.7
Random DFS	$O(T)$	Yes	10.0
Greedy DFS	$O(E_{out}T)$	Yes	31.1
V	nodes in the graph [large – 10^7]		
E	total edges in the graph [very large – $10^8 - 10^9$]		
E_{out}	average out degree of node (# of actions) [small – 10^1]		
T	length of trajectory, i.e. the maximum steps agents can run. [small – 10^1]		

For most methods, the runtime is $O(E_{out}T)$ because the method does some constant amount of work for each possible actions E_{out} for $O(T)$ steps. For the random methods it is $O(T)$ because the work is constant per step (choose randomly). Shortest path distance has the worst runtime. The $O(E \log V)$ term is the runtime of finding a shortest path (Dijkstra’s algorithm with Fibonacci heap). As the graph gets larger, this term because infeasible (we could not even run this on the full Wikipedia graph). DFS might seem like it should be larger than $O(E_{out}T)$ or $O(T)$, but because we restrict the maximum allowable steps, it is only proportional to T and (for greedy) E_{out} .

From this Table, we see that all methods (except shortest path) have scalable runtimes. The dominant factor is E_{out} , which theoretically grows slowly with graph size. Moreover, in practice, there is a natural upper bound on the number of links one can have in a paragraph of text, and the runtime difference in our experiments going from 200k nodes to 38M nodes is only 1.5x despite the 200-fold increase in graph size.