Efficacy of MRI data harmonization in the age of machine learning. A multicenter study across 36 datasets

Chiara Marzi¹, Marco Giannelli², Andrea Barucci¹, Carlo Tessa³, Mario Mascalchi⁴, Stefano Diciotti^{5,6}

¹"Nello Carrara" Institute of Applied Physics (IFAC), National Research Council (CNR),
⁵50019 Sesto Fiorentino (Firenze), Italy
²Unit of Medical Physics, Pisa University Hospital "Azienda Ospedaliero-Universitaria Pisana", 56126 Pisa, Italy
³Radiology Unit Apuane e Lunigiana, Azienda USL Toscana Nord Ovest, 54100 Massa, Italy
⁴Department of Experimental and Clinical Biomedical Sciences "Mario Serio", University of Florence, 50139 Florence Italy
⁵Department of Electrical, Electronic, and Information Engineering "Guglielmo Marconi" -DEI, University of Bologna, 47522 Cesena, Italy
⁶Alma Mater Research Institute for Human-Centered Artificial Intelligence, University of Bologna, 40121 Bologna, Italy

Corresponding Author: Prof. Stefano Diciotti, Department of Electrical, Electronic, and Information Engineering "Guglielmo Marconi", University of Bologna, Via dell'Università 50, 47521, Cesena, Italy. E-mail: stefano.diciotti@unibo.it

Abstract

Pooling publicly-available MRI data from multiple sites allows to assemble extensive groups of subjects, increase statistical power, and promote data reuse with machine learning techniques. The harmonization of multicenter data is necessary to reduce the confounding effect associated with non-biological sources of variability in the data. However, when applied to the entire dataset before machine learning, the harmonization leads to data leakage, because information outside the training set may affect model building, and potentially falsely overestimate performance. We propose a 1) measurement of the efficacy of data harmonization allowing its encapsulation among the preprocessing steps of a machine learning pipeline, avoiding data leakage. We tested these tools using brain T₁-weighted MRI data from 1740 healthy subjects acquired at 36 sites. After harmonization, the site effect was removed or reduced, and we measured the data leakage effect in predicting individual age from MRI data, highlighting that introducing the *harmonizer* transformer into a machine learning pipeline allows for avoiding data leakage.

1. Background & Summary

In recent years there has been an increasing trend toward data sharing in neuroimaging research communities, leading to a rising number of public neuroimaging databases and collaborative multicenter initiatives^{1–4}. Indeed, pooling MRI data from multiple sites provides an opportunity to assemble more extensive and diverse groups of subjects^{2,3,5,6}, increase statistical power^{3,7–10}, and study rare disorders and subtle effects^{11,12}. However, a major drawback of combining neuroimaging data across sites is the introduction of confounding effects due to non-biological variability in the data, typically related to image acquisition hardware and protocol. Indeed, properties of MRI such as scanner field strength, radiofrequency coil type, gradients coil characteristics, hardware, image reconstruction algorithm, and non-standardized acquisition protocol parameters can introduce unwanted technical variability, also reflected in MRI-derived features^{13–15}.

The harmonization of multicenter data, defined as applying mathematical and statistical concepts to reduce unwanted site variability while maintaining the biological content, is, therefore, necessary to ensure the success of cooperative analyses. Currently, among the harmonization methods available to the neuroimaging scientific community (e.g., functional normalization¹⁶, RAVEL, global scaling, adjusted residuals harmonization¹⁷), ComBat is one of the most widely used^{7,12,18–27}. The ComBat model was first introduced in gene expression analysis as a batch-effect correction tool to remove unwanted variation associated with the site and preserve biological associations in the data²⁸. In general, ComBat applies to situations where multiple features of the same type are measured for each participant, i.e., expression levels for different genes or imaging-derived metrics from different voxels or anatomical regions. The success of ComBat and derivatives has been measured compared to other harmonization techniques^{3,5,6} and through simulations of the site effect from single-center data². Previous literature has primarily focused on assessing the maintenance of biological variability in harmonized data^{2,3,5}. However, less effort has been put into quantitative measurements of the efficacy of harmonization in removing the unwanted site effect.

Moreover, the pooling of multicenter data and the consequent availability of large sample sizes paves the way for data reuse with machine and deep learning techniques^{19,21,24,25,27}. In the case of multicenter data, harmonization is thus added to conventional data preprocessing steps, including, e.g., data cleaning and imputation, feature extraction, and reduction. Similar to other procedures, the harmonization parameters should be optimized on training data only and subsequently applied to test data. Indeed, this approach avoids data leakage, which happens when information from outside the training set is used to create the model, potentially leading to falsely overestimated performance. Crucially, this aspect has sometimes been overlooked in previous applications of ComBat by harmonizing the entire data sample before data splitting (training and test sets) used for training and testing machine or deep learning techniques^{2,5,19,21,24,25,27,29–34}.

To the best of our knowledge, the harmonization techniques for neuroimaging data have not been applied to pay attention to avoid data leakage, and this effect has not been quantified. In addition, despite the Python package *neuroHarmonize*² and the R code provided by Radua and colleagues³ include functions that estimate the harmonization model on the training data and apply it separately to the test data, they have not been conceived to be executed on a machine learning *pipeline*, i.e., an end-to-end framework that orchestrates the flow of data into a machine learning model and allows to speed-up the development and test of machine learning systems, natively avoiding data leakage.

For these reasons, in this study, we propose 1) a measurement of the efficacy of data harmonization in reducing the site effect by the performance of a machine learning classifier trained to identify the imaging site, 2) a ComBat implementation using a harmonizer transformer, i.e., a method that, combined with a classifier/regressor, forms a composite estimator, to be used in a machine learning pipeline, thus simplifying data analysis and avoiding data leakage (the source code of the efficacy measurement and harmonizer transformer are publicly available in a GitHub repository at https://github.com/Imaging-AIfor-Health-virtual-lab/harmonizer). We tested these tools using brain T₁-weighted MRI data from 1787 healthy subjects aged 5 - 87 years acquired at 36 imaging sites. The morphological features of cortical thickness (CT) and fractal dimension (FD), a descriptor of the structural complexity of objects with self-similarity properties³⁵, are extracted to characterize brain morphology. To the best of our knowledge, this is the first time that measures of brain structural complexity, such as FD, have been studied on such a large, multicenter, and harmonized data sample. Finally, we investigated the age prediction using neuroimaging variables harmonized in the entire dataset before machine learning and using the *harmonizer* transformer to quantify the effect of data leakage.

2. Materials and methods

2.1. MRI datasets

We gathered brain MR T₁-weighted images of 1787 healthy subjects aged 5 - 87 years belonging to 36 single-center datasets of various studies. These include the *Autism Brain*

Imaging Data Exchange (ABIDE)³⁶ first and second initiatives (ABIDE I and ABIDE II, respectively)^{37,38}, the Information eXtraction from Images (IXI) study³⁹, the 1000 Functional Connectomes Project (FCP)⁴⁰, and the Consortium for Reliability and Reproducibility $(CoRR)^{41}$. From each study, we drew several specific datasets of brain MR T₁-weighted images acquired in the same place with the same scanner and acquisition protocol (see Supplementary Table 1). Both ABIDE I, and II initiatives contributed with 17 datasets, and we named them with the initiative prefix (ABIDEI or ABIDEII) followed by the institution name that collected the images (e.g., ABIDEI-CALTECH and ABIDEII-BNI_1). For the institution names, we used the same nomenclature as reported online³⁶ with the following exceptions: (i) we merged LEUVEN_1 and LEUVEN_2 data in ABIDEI-LEUVEN, UCLA_1, and UCLA_2 data in ABIDEI-UCLA, UM_1 and UM_2 data in ABIDEI-UM, because the acquisition parameters were the same, (ii) we split the data from ABIDEII-KKI_1 into ABIDEII-KKI_8ch and ABIDEII-KKI_32ch, because the acquisitions were performed using an 8-channel or a 32-channel phased-array head coil, respectively. The IXI study provided three different datasets named with the prefix IXI followed by the institution name that collected the images (e.g., IXI-Guys). From the 1000 FCP and CoRR studies, we used the International Consortium for Brain Mapping (ICBM) and the Nathan Kline Institute - Rockland Sample Pediatric Multimodal Imaging Test-Retest Sample (NKI2) datasets, respectively.

In each single-center dataset, baseline MRI scans of typically developing and aging brain (one for each subject) with available age and sex information were included. The lack of a recognized neurological or psychiatric disorder diagnosis was used to define normal development and aging. The leading institutions, at each site where the MR images were collected, had obtained informed consent from all participants, and were authorized by the local Ethics Committees. Supplementary Table 2 shows the general characteristics of each single-center dataset. In this study, we grouped the single-center datasets into three multicenter meta-datasets based on age and the amount of overlap between age distributions. We have considered the following age ranges: childhood (5 - 13 years), adolescence (11 - 20years), and adulthood (18 - 87 years). We measured the overlap between age distributions by the n-distribution Bhattacharyya coefficient (BC)⁴², an extension of the 2-distribution BC⁴³. The BC coefficient is 0 when there is no overlap and 1 when the overlap is complete. In our study, n is the number of the single-center datasets grouped in the meta-dataset covering the abovementioned age ranges and may be different in every meta-dataset. Therefore, we constructed the CHILDHOOD meta-dataset containing 11 single-center datasets, whose

5

subjects' age varies between 5 and 13 years, and age distributions have a BC = 0.71. The ADOLESCENCE meta-dataset includes 9 single-center datasets whose subjects' age ranges from 11 to 20 years, and age distributions have an overlap amount equal to 0.45. Finally, the ADULTHOOD meta-dataset consists of all data belonging to subjects aged between 18 and 87 years old (12 single-center datasets), whose age distributions have a BC = 0. A detailed description of the composition of each meta-dataset and their age distributions are shown in Table 1 and Figure 1, respectively. In addition, we also merged all single-center datasets, creating a meta-dataset, called LIFESPAN, that covers the entire age range (5 – 87 years). In this meta-dataset, composed of 36 imaging sites, the single-center age distributions have a null overlap (Supplementary Figure 1).

2.2. MR image processing

For each brain MR T₁-weighted image, we performed a cortical reconstruction and a volumetric segmentation (see details in section 2.2.1). In this work, we analyzed cerebral structures only, and we extracted neuroimaging features from various regions of the cerebral cortex: the entire cerebral cortex, separately the left/right hemispheres of the cerebral cortex, and left/right frontal, temporal, parietal, and temporal lobes. In particular, for each region, we computed the average cortical thickness (CT) and the fractal dimension (FD) (see details in section 2.2.2). The harmonization process of the neuroimaging features was reported in section 2.3, and the statistical and machine learning analyses in section 2.4.

2.2.1. Cortical reconstruction and volumetric segmentation

We used the FreeSurfer package to perform completely automated cortical reconstruction and volumetric segmentation of each subject's structural T₁-weighted scan. We used version 7.1.1, except in a few cases: (i) for T₁-weighted images belonging to ICBM and NKI2 datasets, we used FreeSurfer version 5.3, and (ii) for the ABIDEI datasets, we used the FreeSurfer version 5.1 outputs previously made available online by Cameron and colleagues⁴⁴ (http://preprocessed-connectomes-project.org/abide/index.html). Even though different FreeSurfer versions may affect neuroimaging variables^{45–49}, such variability is considered part of the site variability and handled by the harmonization procedure. Indeed, all subjects in each center have been processed with the same version of FreeSurfer. FreeSurfer is extensively documented (see Ref.⁵⁰ for a review) and publicly accessible (http://surfer.nmr.mgh.harvard.edu/). Briefly, cortical reconstruction and volumetric segmentation entail removing non-brain tissue using a hybrid watershed/surface deformation

procedure, automated Talairach transformation, segmentation of the subcortical white matter and deep gray matter volumetric structures, intensity normalization, tessellation of the gray/white matter boundary, automated topology correction⁵¹, and surface deformation following intensity gradients to optimally place the gray/white and gray/cerebrospinal fluid borders at the location where the greatest shift in intensity defines the transition to the other tissue class. Once the cortical models are complete, several deformable procedures are performed for further data processing and analysis, including surface inflation, registration to a spherical atlas which is based on individual cortical folding patterns to match cortical geometry across subjects, parcellation of the cerebral cortex into units with respect to gyral and sulcal structure⁵², and creation of surface-based data including maps of curvature and sulcal depth. In addition to the standard FreeSurfer outputs, we performed a parcellation of the cortical lobes using the *mri_annotation2label* tool with the *--lobesStrict* option.

All Freesurfer outputs used in this study were visually inspected for quality assurance following an improved version of the ENIGMA Cortical Quality Control Protocol 2.0 (http://enigma.ini.usc.edu/protocols/imaging-protocols/). Firstly, we created an HTML file for each single-center dataset showing, for each subject, the segmentation of the cortical regions overlayed on the T₁-weighted images. Then, we scrolled the HTML file to determine gross segmentation errors in any cortical regions visually. For each single-center dataset, we estimated the statistical outliers for CT features (see section 2.2.2 for details about CT features extraction), defined as any data points below or above the mean by 2.698 standard deviations. For each subject, we carefully inspected the cortical segmentations that showed features values labeled as statistical outliers to assess whether the outlier was an actual segmentation error. In this case, the subject was excluded from further analyses.

2.2.2. Extraction of cortical thickness and fractal dimension features

For each subject, using FreeSurfer tools, we computed the average CT of each cortical region as the average distance measured from each vertex of the gray/white boundary surface to the pial surface⁵³.

The FD is a numerical representation of shape complexity⁵⁴. The FD is normally a fractional value and is considered a dimension because it gives a measure of space-filling capacity⁵⁵. An FD value between 2 and 3 is typical of a complex and heavily folded 2-D surface buried in a 3-D region, such as the human cerebral cortex. The FD is a very compact measure of shape complexity, combining cortical thickness, sulcal depth, and folding area into a single numeric value^{56,57}. In this study, the fractal analysis was carried out using the

fractalbrain toolkit version 1.0 (freely available at

https://github.com/chiaramarzi/fractalbrain-toolkit) and described in detail in Marzi et al., 2020⁵⁷. The *fractalbrain* toolkit processes FreeSurfer outputs directly, computing the FD of various regions of the cerebral cortex: the entire cerebral cortex, separately the left/right hemispheres, and left/right frontal, temporal, parietal, and temporal lobes. *Fractalbrain* performs the 3D box-counting algorithm⁵⁸, adopting an automated selection of the fractal scaling window⁵⁷ – a crucial step for establishing the FD for non-ideal fractals^{57,59}.

Briefly, let I(x, y, z) be a 3D binary segmentation of a brain structure. Using a 3D boxcounting algorithm, a grid composed of 3D cubes of side s is overlapped to I(x, y, z), and the number of 3D cubes (N(s)) needed to fully enclose I(x, y, z) is recorded. This process is iterated for different s values, uniformly distributed in a logarithmic scale (where $s = 2^k$ voxels, and k = 0, 1, ..., 8). To prevent any systematic influence of the grid placement⁶⁰, for each s value, we applied 20 uniformly distributed random offsets to the grid origin, and the relative box count was averaged to obtain a single N(s) value⁶¹. For a fractal object, the data points of N(s) vs. s in the log-log plane can be modeled through a linear regression within a range of spatial scales called fractal scaling window. This linear relationship in the log-log plane corresponds, in the natural scale, to a power-law $N(s) = K \times s^{-FD}$, where FD is the exponent (with a negative sign), and K is the prefactor³⁵. Fractalbrain automatically selects the optimal fractal scaling window by searching for the interval of spatial scales in which the linear regression shows the best fit, as measured by the rounded coefficient of determination adjusted for the number of data points (R^{2}_{adj}). Given that wider intervals in the log-log plot are preferable to justify the presence of fractal properties, in the case of equal rounded R^{2}_{adj} coefficients, fractalbrain selects the widest interval (i.e., the interval that contains the highest number of data points in the log-log plot)⁵⁷. As an example, in Figure 2, we reported a loglog plot of the 3D box-counting algorithm optimized for the automatic selection of the best fractal scaling window of the cerebral cortex of one subject.

2.3. Harmonization of brain cortical features

We harmonized cortical features using ComBat, a model that builds upon the statistical harmonization technique proposed by Johnson and colleagues²⁸ for location and scale (L/S) adjustments to the data while preserving between-subject biological variability. Briefly, let y_{ijf} be the one-dimensional array of *n* neuroimaging features for the single-center *i*, participant *j*, and feature *f*, for a total of *k* single-center datasets, *n* participants, and *V*

features. Still, let *X* be the $n \times p$ matrix of biological covariates of interest, and Z be the $n \times k$ matrix of single-center labels. The ComBat harmonization model can be written as follows:

$$y_{ijf} = f_f(X_{ij}) + Z_{ij}\vartheta_f + \delta_{if}\varepsilon_{ijf} \quad , \tag{1}$$

where $f_f(X_{ij})$ denotes the variation of y_{ijf} captured by the biologically relevant covariates X_{ij} , ϑ_f is the one-dimensional array of the *k* coefficients associated with the single-center labels Z_{ij} for the feature *f*. We assume that the residual terms ε_{ijf} have mean 0. The parameters δ_{if} describe the multiplicative site effect of the *i*-th site on the feature *f*, i.e., the scale (S) adjustment, while the location (L) parameter for the *i*-th site on the feature *f*, is represented by γ_{if} (the empirical Bayes estimates of the term $Z_{ij}\vartheta_f$). Consistent with the ComBat model notation used in Fortin et al. (2017), the harmonized y_{ijf}^* become:

$$y_{ijf}^{*} = \frac{y_{ijf} - f_f(X_{ij}) - \gamma_{if}}{\delta_{if}} + f_f(X_{ij}) \quad .$$
⁽²⁾

In this study, we used the ComBat model implemented in the *neuroHarmonize* v. 2.1.0 package (freely available at https://github.com/rpomponio/neuroHarmonize) – an opensource and easy-to-use Python module². In particular, *neuroHarmonize* extends the *neuroCombat* package^{5,6} with the possibility of specifying covariates with generic nonlinear effects on the neuroimaging feature to harmonize. In particular, the $f_f(X_{ij})$ term in Equation (1) is a Generalized Additive Model (GAM) function of the specific covariates². Indeed, MRI-derived features are known to be influenced by demographic factors, such as age^{2,3,5,57,62–68} and sex⁶⁹. In our study, these variables were included in the harmonization process as sources of inter-subject biological variability. Finally, since it is not evident that the site effect affects all MRI-derived measures in the same way³, we performed a separate harmonization for each feature group of the same type (i.e., CT and FD).

2.3.1 The harmonizer transformer

The increased sample size due to the pooling of data acquired in various centers necessarily facilitates the application of machine learning techniques. For training and testing machine learning models, a proper validation scheme that handles data splitting must be chosen (Figure 3). This choice is crucial to avoid data leakage by ensuring that the entire workflow

(preprocessing and model-building steps) is built on training data and evaluated on test data never seen during the learning phase. Indeed, data leakage in the training process may incur falsely high performance in the test set (see, e.g., Ref.⁷⁰ and Ref.⁷¹). Especially in Medicine and Health care, where relatively small datasets are usually available, the straightforward hold-out validation scheme is rarely applied. In contrast, the cross-validation (CV) and its nested version (nested CV) for hyperparameters optimization of the entire workflow⁷²⁻⁷⁴ are frequently preferred. Also, repeated CVs or repeated nested CVs are suggested for improving the reproducibility of the entire machine learning system⁷³. Several training and test data procedures are carried out in all these validation schemes on different data split, recalling the need for a compact code structure to avoid errors that may lead to data leakage. In this view, machine learning pipelines are a solution because they orchestrate all the processing steps in a short, easier-to-read, and easier-to-maintain code structure (Figure 3). A pipeline represents the entire data workflow, combining all transformation steps (e.g., data cleaning, data imputation, data scaling, and general data preprocessing) and machine learning model training. It is essential to automate an end-to-end training/test process without any form of data leakage and improve reproducibility, ease of deployment, and code reuse, especially when complex validation schemes are needed.

In the Scikit-learn library, a popular, open-source, well-documented, and easy-tolearn machine learning package that implements a vast number of machine learning algorithms, a pipeline is a chain of "transformers" and a final "estimator" acting as a single object. The transformers are modules that apply preprocessing to the data, whereas estimators are modules that fit a model based on training data and are capable of inferring some properties on new data⁷⁵. In particular, transformers are classes with a "fit" method, which learns model parameters (e.g., mean and standard deviation for data standardization) from a training set, and a "transform" method which applies this transformation model to any data. For example, for data standardization (transforming data to have zero mean and unit standard deviation), the mean μ must be subtracted from the data, and the result must be divided by the standard deviation σ . Notwithstanding, this procedure must be firstly performed on the training set (using μ and σ computed in the training set). In the test set, or any validation set, the same transformation must be applied to data using the same two parameters μ and σ computed for centering the training set. Basically, the "fit" method calculates the parameters (e.g., μ and σ in our case) and saves them internally, whereas the "transform" method applies the transformation (using the saved parameters) to any particular set of data.

For these reasons, in this study, we propose the *harmonizer* – a Scikit-learn Python transformer that encapsulates the *neuroHarmonize* procedure among the preprocessing steps of a machine learning pipeline. Basically, the "fit" method of the *harmonizer* transformer learns the *NeuroHarmonize* model parameters from a training set and saves the parameters internally, whereas the "transform" method is used to apply the *neuroHarmonize* model, previously learned on the training data set, e.g., to unseen data. The source code of the *harmonizer* transformer is publicly available in a GitHub repository at https://github.com/Imaging-AI-for-Health-virtual-lab/harmonizer.

In this study, we included the *harmonizer* transformer in a pipeline to learn the harmonization procedure parameters on the training data only and apply the harmonization procedure (with parameters learned in the training set) to the test data. This prevented data leakage in the harmonization procedure independently of the chosen validation scheme.

2.4. Statistical and machine learning analyses

We performed the statistical and machine learning analyses described in the following paragraphs for each feature group of the same type (i.e., CT and FD) and each meta-dataset (i.e., CHILDHOOD, ADOLESCENCE, ADULTHOOD, and LIFESPAN).

2.4.1. Visualization and quantification of site effect

We first performed a series of analyses of increasing complexity to explore the actual existence of a site effect in the data. For each region-feature pair, we qualitatively showed the site effect on raw data through boxplots, using the site as the independent variable and each region-feature pair as the dependent variable. Quantitatively, the site effect was measured by analyzing covariance (ANCOVA) – a general linear model that blends analysis of variance (ANOVA) and linear regression. ANCOVA evaluates whether the means of a dependent variable are equal across levels of a categorical independent variable while statistically controlling for the effects of other variables that are not of primary interest, known as covariates or nuisance variables. In this study, we set the single-center dataset as the independent variable, age, and sex as covariates, and each region-feature pair as the dependent variable.

Additionally, to further investigate the site effect on raw data and to measure the success of ComBat harmonization, we predicted the imaging site from the neuroimaging features, grouped by feature type, namely CT and FD. Specifically, we used the supervised eXtreme Gradient Boosting (XGBoost) method (with version 0.90 default hyperparameters for a

classification task), a scalable end-to-end tree-boosting system widely used to achieve stateof-the-art performance on many recent machine learning challenges⁷⁶. Using N=100 repetitions of a stratified 5-fold CV, we estimated the median balanced accuracy. The statistical significance of prediction performance was determined via permutation analysis. Thus, for each features group, 5000 new models were created using a random permutation of the target labels (i.e., the imaging site), such that the explanatory neuroimaging variables were dissociated from their corresponding imaging site to simulate the null distribution of the performance measure against which the observed value was tested⁷⁷. Median balanced accuracy was considered significant when the p-value computed using permutation tests was < 0.05. Additionally, we calculated the average confusion matrix over repetitions to graphically evaluate the goodness of prediction. The same imaging site prediction was performed on raw data (i.e., without harmonization) to confirm the existence of the site effect and on harmonized data (with *neuroHarmonize* and *Harmonizer* transformer) to investigate if the site effect was reduced or removed.

We propose to measure the efficacy of harmonization in reducing or removing the site effect through a two-step assessment. First, we evaluated whether the site prediction after the harmonization process was not significantly different from a random prediction by comparing the median balanced accuracy over repetitions with the distribution of balanced accuracies estimated using the permutation test with 5000 permutations (the default value in FSL -FMRIB Software library - randomise tool for nonparametric permutation inference on neuroimaging data⁷⁸). Considering, for example, a significance threshold of 0.05 in the permutation test, in the case of complete removal of the site effect, the site prediction will not be different from that of a random model (i.e., p-value ≥ 0.05). Second, in the case of permutations test p-value < 0.05, we compared the balanced accuracy obtained by predicting the site without and with the harmonization procedure. In particular, we assessed the site effect reduction by ensuring that the median balanced accuracy obtained predicting the imaging site with harmonized data was significantly lower than that estimated with raw data through the non-parametric one-sided Wilcoxon signed-rank test, with a significance threshold of 0.05^{79} . The source code for evaluating the effectiveness of harmonization using the harmonizer transformer is publicly available in a GitHub repository at https://github.com/Imaging-AI-for-Health-virtual-lab/harmonizer).

To quantitatively evaluate the effect of data leakage in the prediction of the imaging site caused by performing the harmonization on all data before splitting into training and test sets, we tested whether the balanced accuracies obtained using *neuroHarmonize* on all data before

any split were consistently lower than those estimated using the *harmonizer* transformer in the above mentioned stratified CV scheme. The comparison was carried out through the non-parametric one-sided Wilcoxon signed-rank test with a significance threshold of 0.05^{79} .

2.4.2. Associations with age

While it is essential to show that a harmonization method successfully reduces a possible site effect, it is equally crucial to show that the method preserves the biological variability in the data. Indeed, a harmonization method that removes both site and biological effects has no utility. One of the most influential sources of biological variability in the neuroimaging features of healthy subjects is undoubtedly chronological age. Throughout the lifespan, the brain structure changes because of a complex interplay between multiple maturational and neurodegenerative processes. Such processes could yield large spatial and temporal variations in the brain^{63,80,81}.

For these reasons, we attempted to predict individual age from neuroimaging features through an XGBoost model (version 0.90 with default hyperparameters for a regression task)⁷⁶. We estimated the median (over repetitions) mean absolute error (MAE) using N=100 repetitions of a 5-fold CV. Age prediction was performed on harmonized data using both *neuroHarmonize* and the *harmonizer* transformer in the CV pipeline. To evaluate the effect of data leakage in the age prediction caused by performing the harmonization on all data before splitting into training and test sets, we compared the MAE values obtained using *neuroHarmonize* on all data before any split and the *harmonizer* transformer in the above-mentioned CV scheme. In particular, we assessed that the median MAE using *neuroHarmonize* on all data before any split was consistently lower than that estimated using the *harmonizer* transformer in the above CV scheme through the non-parametric one-sided Wilcoxon signed-rank test with a significance threshold of 0.05^{79} .

Moreover, before and after the harmonization procedure, for each region-feature pair, we qualitatively visualized the site effect on the relationship between age and each regionfeature pair through scatterplots (with age as the independent variable and each regionfeature pair as the dependent variable).

3. Results and discussion

Quality control of FreeSurfer's outputs resulted in removing 47 subjects based on the overall low quality of cortical reconstruction or segmentation errors in any regions. All brain regions of the remaining 1740 subjects had both CT and FD features. Thus, we have been able to

analyze the site effect, the harmonization adjustments, and age prediction on the same subjects for the CT and FD groups of features. The demographic characteristics of the subjects included in the study after the quality control have been reported in Supplementary Table 3.

3.1. Visualization and quantification of the site effect

The boxplots in Figure 4 and Supplementary Figure 2 summarize the distribution of the average CT and FD of the cerebral cortex at each imaging site. Specifically, the site effect differs between the two features. For example, in the CHILDHOOD meta-dataset, the ABIDEI-KKI_32ch, ABIDEI-KKI_8ch, and ABIDEII-NYU_1 single-center datasets show the lowest average CT values, while subjects from the ABIDEI-STANFORD dataset have the lowest FD values. Also, for the ADOLESCENCE meta-dataset, the site effect has a different behavior for CT and FD features: for example, ABIDEI-TCD_1 shows the lowest values of CT, while ABIDEI-LEUVEN shows the lowest values of FD. At the same time, in the ADULTHOOD meta-dataset, ABIDEI-SBL has the lowest mean CT values, whereas ABIDEII-BNI_1 has the lowest FD values.

The same result was measured quantitatively using ANCOVA analysis. Indeed, all CT and FD features were significantly different across the single-center datasets (Table 2), but the site effect, measured by the partial η^2 was different in the two feature sets. In the CHILDHOOD meta-dataset, for example, each cortical region shows a higher partial η^2 for FD than for CT, suggesting that, in childhood, acquisition characteristics impact more on the structural complexity measure, i.e., FD, than on the cortical thickness. On the other hand, in the ADOLESCENCE meta-dataset, the frontal and temporal lobes (bilaterally), along with the entire structure, show lower partial η^2 for FD than for CT, whereas the parietal and occipital lobes (bilaterally) have higher partial η^2 for FD than for CT. Finally, in the ADULTHOOD meta-dataset, only the occipital and temporal lobes (bilaterally) have lower partial η^2 for FD than CT.As proved by Fortin and colleagues for voxel-wise analyses and hypothesized by Radua et al. for several ROI-based features (i.e., CT, surface area, and subcortical volumes), the assumptions of the ComBat method that the site effect is shared across all voxels/ROIs/feature types might not be valid^{3,5}. Thus, we applied separate ComBat harmonization for CT and FD features. To evaluate the fit of the Combat model on our data, we evaluated the empirical distributions, for CT and FD, respectively, of the site effects for both the location and scale parameters together with the prior distributions estimated by

ComBat. We remind the reader that both the location and scale site effects are deviations from the grand mean. We observed that the prior distributions fit the empirical distributions well for both the location and scale parameters supporting that the ComBat procedure was appropriate for capturing these effects on our data (Supplementary Figures 3 and 4).

3.2. Harmonization efficacy

To assess whether most of the variation in the data was still associated with the site after harmonization, we predicted the imaging site using neuroimaging features grouped by feature type (i.e., CT and FD). Figures 5 and 6 report the average confusion matrices (over 100 repetitions) for CT and FD features, respectively. When predicting the site using the raw data, the main diagonal of the confusion matrix is prominent (i.e., the predicted site is usually the actual site) for both feature groups and each meta-dataset (Figures 5 and 6). On the other hand, when the prediction of the site is performed using harmonized data (through neuroHarmonize or harmonizer transformer), the impact of the main diagonal of the confusion matrix is weak. The confusion matrices show a vertical pattern indicating that the predicted site is often the same site, regardless of the actual site (Figures 5 and 6). It is important to note that the confusion matrix obtained using the harmonizer within the machine learning pipeline seems similar to that obtained by harmonizing all the data with neuroHarmonize before imaging site prediction. This result suggests that the action of the harmonizer resembles that of neuroHarmonize, although the model is built on training data only and then applied to test data. The confusion matrices for CT and FD features in the LIFESPAN meta-dataset have also been shown in Supplementary Figures 5 and 6.

Table 3 reports the median balanced accuracies (over 100 repetitions) of imaging site prediction, and we show the efficacy of the harmonization in Table 4. Specifically, we have reported the pair (permutation test p-value, one-sided Wilcoxon signed-rank test p-value) to confirm the removal or reduction of the site effect, respectively. It is important to note that this was the first time that the efficacy of the harmonization procedure has been evaluated by comparing the accuracy of the imaging site prediction also to the chance level. Indeed, previous works have consistently shown a decrease in imaging site prediction accuracy after harmonization, but without applying a significance test, and thus it was not known whether the site effect was removed or reduced [see, e.g., Ref.² and Ref.⁵].

As expected, the median balanced accuracy of site prediction using the raw data was significantly different from the chance level (permutation test p-value > 0.05 for all data), and thus, an actual imaging site effect was present on raw data. After harmonization, with

neuroHarmonize or harmonizer transformer, the site effect was removed (permutation test pvalue ≥ 0.05 in Table 4) or reduced (permutation test p-value < 0.05, but with median balanced accuracy reduced on harmonized data, as statistically measured by the one-sided Wilcoxon signed-rank test p-value < 0.05 in Table 4). Specifically, by performing harmonization using *neuroHarmonize* on all data, we observe that the site effect removal seems to be ensured in all analyses performed except for the imaging site predictions using FD features in the ADOLESCENCE and ADULTHOOD meta-datasets (permutation test pvalue equal to 0.0188 and 0.0002, respectively, in Table 4). We found the same behavior when predicting the imaging site using CT and FD features in the LIFESPAN meta-dataset (permutation test p-value equal to 0.0002 in Table 4). In all the latter cases, although significantly different from a random prediction, the balanced accuracies were significantly lower than those obtained using the original data (one-sided Wilcoxon signed-rank test pvalues < 0.001 in Table 5), and this seems indicative of a site effect reduction. When applying the *harmonizer* transformer to the data (within the CV), we observed the actual efficacy of the harmonization, without the introduction of preprocessing bias, as in the previous case. Indeed, we confirm complete removal of site effect only in imaging site prediction using CT features in ADULTHOOD meta-dataset (permutation test p-value equal to 0.1064 in Table 4). In all the other cases, the imaging site prediction was significantly different from the chance level (permutation test p-values < 0.05 in Table 5), but the balanced accuracies were significantly lower than those obtained using the original data (one-sided Wilcoxon signed-rank test p-values < 0.001 in Table 4); thus, the site effect was only reduced and not completely removed. The difference between the efficacy of harmonization by applying *neuroHarmonize* on all data or by using the *harmonizer* within the CV was expected because, in the former case, we are in the presence of data leakage, which happens when information from outside the training set is used to create the model, leading to falsely overestimated performance. In this study, falsely overestimated performance means lower median balanced accuracy (Table 3). Indeed, we noted that the median balanced accuracies obtained by performing site prediction with harmonized data using the *neuroHarmonize* show significantly lower values than those observed using the harmonizer transformer within the CV (one-sided Wilcoxon signed-rank p-values < 0.001 for all the analyses). The numerical differences found in the median balanced accuracy of imaging site prediction using the harmonizer transformer and neuroHarmonize emphasize the importance of introducing the

harmonizer transformer into a machine learning pipeline to avoid data leakage, a source of bias in prediction results.

Looking at the permutation test p-values shown in Table 5 for imaging site prediction using data harmonized with *neuroHarmonize* (which were harmonized before splitting into training and test sets), it can be seen that the efficacy of harmonization worsened as the overlap of the age distributions in multicenter meta-datasets decreased. Specifically, for CT features, the permutation test p-value was 0.5023 in the CHILDHOOD meta-dataset, which exhibits a good overlap of age distributions (BC = 0.71), but drops to 0.0002 in the LIFESPAN meta-dataset, which exhibits a BC = 0. Similar behavior was observed for FD features. These results on real data are in line with the simulations performed by Pomponio and colleagues², which suggested that age-disjoint studies should be challenging to harmonize in the presence of nonlinear age effects². The efficacy of the harmonization performed in CV using the *harmonizer* transformer does not appear seemingly to have a close link to the degree of overlap of the age distributions in the multicenter meta-datasets. This may be explained by the fact that the *harmonizer* transformer handles training data only – randomly chosen within the whole meta-dataset – in the different folds of the CV, and the actual BC values may vary.

3.3. Age prediction

Table 5 reports the median MAE values (over 100 repetitions) of the age prediction model. As expected, the goodness of age prediction using the data harmonized with *neuroHarmonize* before the splitting into training and test sets is falsely reduced. Indeed, the median MAE values obtained in predicting age using data harmonized with *neuroHarmonize* before the splitting into training and test sets were significantly lower than those estimated using data harmonized with *harmonizer* within the CV (one-sided Wilcoxon signed-rank p-values < 0.001 for all the cases, except CT features in the CHILDHOOD meta-dataset, in Table 5). These results confirm how data leakage related to data harmonization before splitting them into training and test sets leads to performance overestimation and underlines the importance of introducing the *harmonizer* transformer into the pipelines of multicenter studies performing machine learning analysis.

Finally, in Figures 7 and 8, we reported the age-dependent trends of the average CT and FD of the cerebral cortex without harmonization and harmonized with the *harmonizer* transformer, respectively (see Supplementary Figures 7 and 8 for the LIFESPAN meta-dataset). In line with previous literature concerning features such as CT and volumes^{2,5}, also

17

in this study, the harmonized average CT and FD values showed less variability than that observed on raw data.

In previous single-centers studies, we observed that the computation of the FD using the box-counting algorithm with the automated selection of the optimal fractal scaling window implemented in *fractalbrain* best predicted chronological age in two datasets of healthy children and adults among various FD approaches, and more conventional features, such as CT, and gyrification index⁵⁷. In this large multicenter study, we confirmed the more remarkable ability of the FD of the cerebral cortex to predict individual age better than the average CT. In the LIFESPAN meta-dataset, for example, the error in age prediction using CT features (MAE = 7.55 years) was reduced by more than 25% using FD features (MAE = 5.60 years) in line with previous literature^{57,66}. This result furtherly confirms that FD conveys additional information to that provided by other conventional structural features^{56,57,65,66,82–95}.

3.4. Limitations

This study has some limitations. Firstly, we only measured the data leakage effect using cortical thickness and fractal dimension of the cerebral cortex. Various other morphological and functional MRI-derived features might be considered. However, the focus of the study was mainly to show a possible detrimental effect of data harmonization on the entire dataset before machine learning analysis, and this effect is not relative to the features considered. Secondly, for site/age prediction, we adopted an XGBoost decision tree with default parameters. It is well known that classification/regression performances may be affected by the value of the hyperparameters, and proper hyperparameter optimization, e.g., through a nested CV could be adopted. However, this procedure was not feasible in our study because of the relatively small size of data in many centers – an undesired but common scenario in many publicly available datasets. Thus, though this choice was arbitrary, we feel that using the same hyperparameters for both *neuroHarmonize* and *Harmonize* transformer data was reasonable.

4. Conclusions

This study explores the powerful ComBat harmonization of CT, and FD features extracted from brain T₁-weighted MRI data of 1740 healthy subjects aged 5 - 87 years acquired at 36 sites. We measured the efficacy of the harmonization process in reducing the unwanted site effect through a quantitative index, the harmonization score. We proved that, after harmonization, the site effect was completely removed or reduced while preserving the

biological variability. Moreover, we avoided data leakage by introducing the *harmonizer* transformer, which encapsulates the harmonization procedure among the preprocessing steps of a machine learning pipeline. We, therefore, recommend that future multicenter imaging studies that will perform machine learning analysis consider using the *harmonizer* transformer, whose link we will provide at the time of acceptance of this manuscript.

Data Availability

The brain MR T₁-weighted images that support the findings of this study are available from the following online repositories:

- Autism Brain Imaging Data Exchange (ABIDE): http://fcon_1000.projects.nitrc.org/indi/abide/
- Information eXtraction from Images (IXI) study: <u>https://brain-development.org/ixi-dataset/</u>
- 1000 Functional Connectomes Project (FCP) ICBM dataset: <u>http://fcon_1000.projects.nitrc.org/fcpClassic/FcpTable.htm</u>
- Consortium for Reliability and Reproducibility (CoRR) NKI 2 Nathan Kline Institute (Milham): <u>http://fcon_1000.projects.nitrc.org/indi/CoRR/html/index.html</u>

Code Availability

The source code of the efficacy measurement and *harmonizer* transformer are publicly available in a GitHub repository at <u>https://github.com/Imaging-AI-for-Health-virtual-lab/harmonizer</u>. The following are the versions of software and Python libraries used to obtain the results presented in this study:

- FreeSurfer version 7.1.1. For T₁-weighted images belonging to ICBM and NKI2 datasets, we used FreeSurfer version 5.3. ABIDEI T₁-weighted images were already processed using FreeSurfer version 5.1.
- fractalbrain toolkit version 1.0
- neuroHarmonize v. 2.1.0 package
- eXtreme Gradient Boosting (XGBoost) version 0.90.

Acknowledgments

We wish to thank Federica Giorgini and Riccardo Benedetti for data management, Stefano Orsolini for the technical support in the quality control assessment of all FreeSurfer outputs, and Martina Franco for her preliminary analysis of a part of this data.

Authors contributions

Chiara Marzi: Conceptualization, Methodology, Software, Validation, Formal analysis,
Data curation, Writing – Original draft, Writing – Review & Editing, Visualization
Marco Giannelli, Andrea Barucci, Carlo Tessa and Mario Mascalchi: Writing – Review
& Editing
Stefano Diciotti: Conceptualization, Methodology, Resources, Writing – Original draft,

Writing – Review & Editing, Visualization, Supervision, Project administration

Competing interests

The authors declare no competing interests.

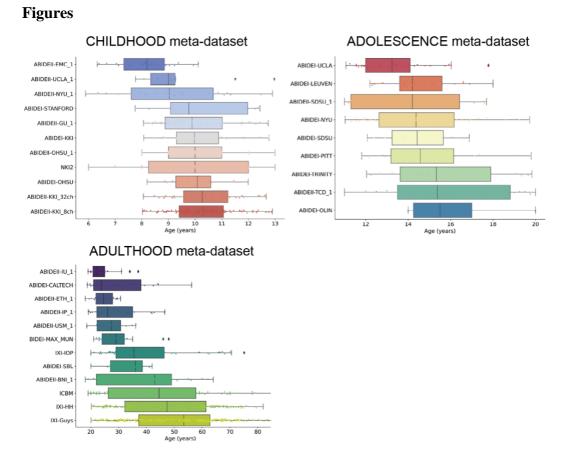


Figure 1. Age distributions. Age distributions of participants for CHILDHOOD, ADOLESCENCE, and ADULTHOOD meta-datasets, grouped by single-center dataset and sorted by median age.

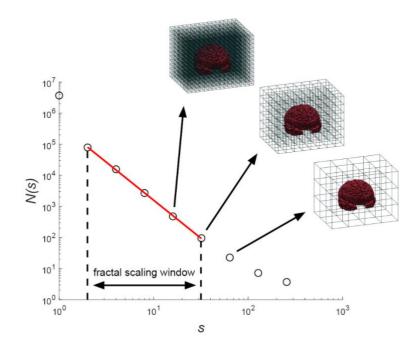


Figure 2. 3D box-counting for computation of the FD. An example of the 3D box-counting algorithm that uses an automated selection of the fractal scaling window through the *fractalbrain* toolkit⁵⁷. N(s) is the average number of 3D cubes of side s needed to fully enclose the brain structure computed using 20 uniformly distributed random offsets to the grid origin. The regression line within the optimal fractal scaling window, whose slope (sign changed) is the FD, is depicted in red.

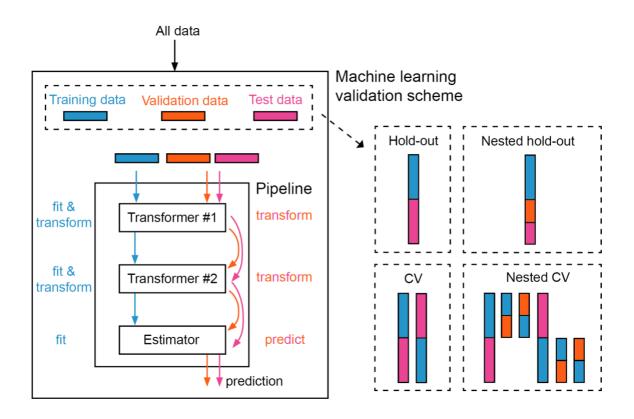


Figure 3. Machine learning pipeline. A pipeline represents the entire data workflow, combining all transformation steps and machine learning model training. It is essential to automate an end-to-end training/test process without any form of data leakage and improve reproducibility, ease of deployment, fast debagging, and code reuse, especially when complex validation schemes are needed.

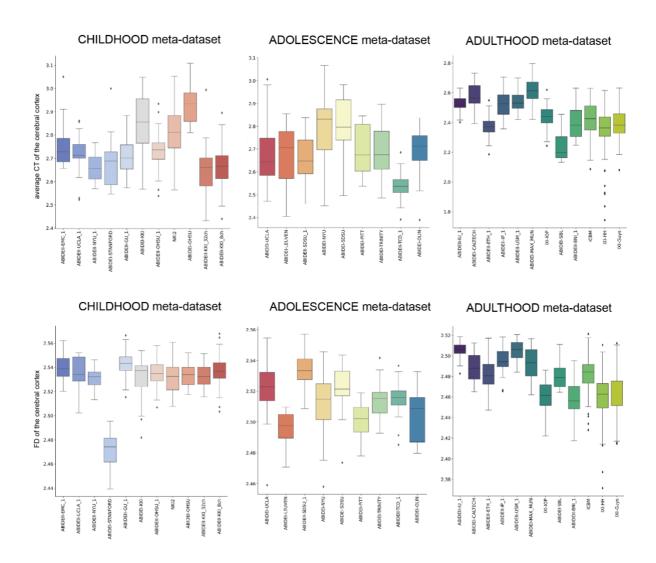


Figure 4. Boxplot of the average CT and FD of the cerebral cortex. The boxplots of the average CT and FD of the cerebral cortex without harmonization are shown for the CHILDHOOD, ADOLESCENCE, and ADULTHOOD meta-datasets.

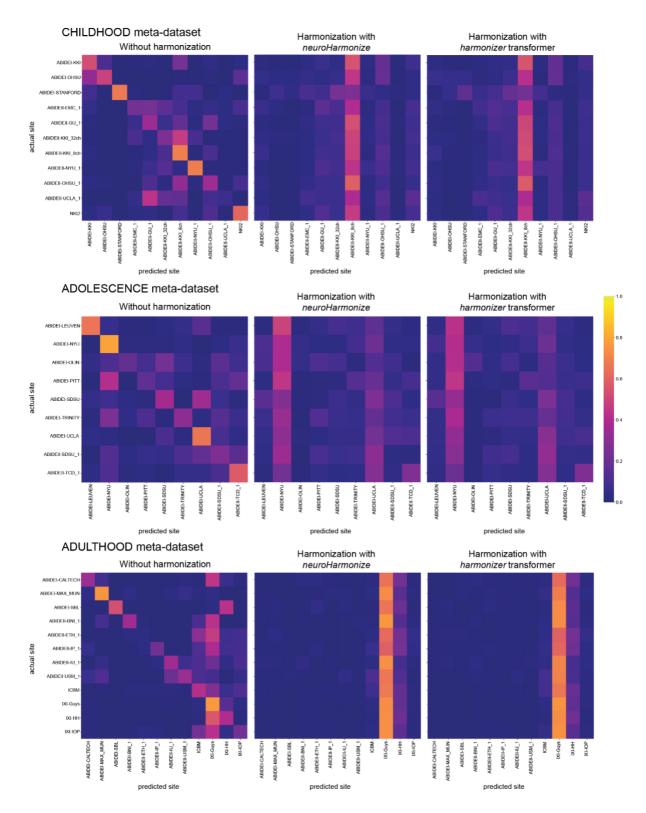


Figure 5 Confusion matrices of site prediction using CT features. Each confusion matrix was normalized for the number of subjects belonging to each site. In this way, the sum of the matrix cells of each row gives 1. The confusion matrix obtained using the *harmonizer* within the machine learning pipeline seems similar to that obtained by harmonizing all the data with

neuroHarmonize before imaging site prediction, even though the model is built on training data only and then applied to test data.

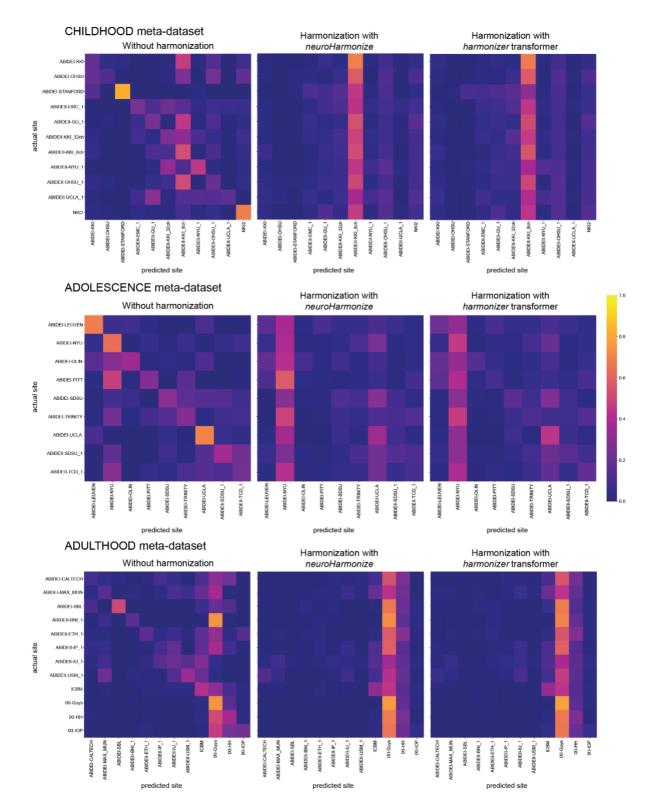


Figure 6. Confusion matrices of site prediction using FD features. Each confusion matrix was normalized for the number of subjects belonging to each site. In this way, the sum of the matrix cells of each row gives 1. The confusion matrix obtained using the *harmonizer* within

the machine learning pipeline seems similar to that obtained by harmonizing all the data with *neuroHarmonize* before imaging site prediction, even though the model is built on training data only and then applied to test data.

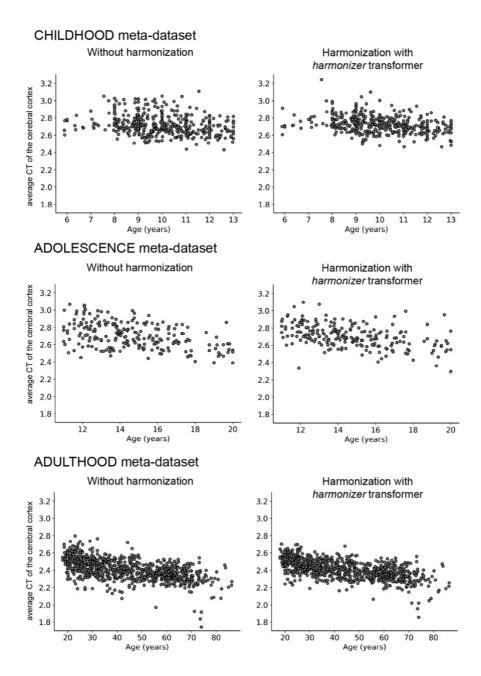


Figure 7. Scatterplot of the average CT of the cerebral cortex vs. age. The plot of the average CT of the cerebral cortex vs. age is shown for the CHILDHOOD, ADOLESCENCE, and ADULTHOOD meta-datasets without and with harmonization using the *harmonizer* transformer. In the latter case, we considered only the first CV among the 100 repetitions. Specifically, for each subject, we plotted the harmonized value obtained in the fold when the subject was included in the test set.

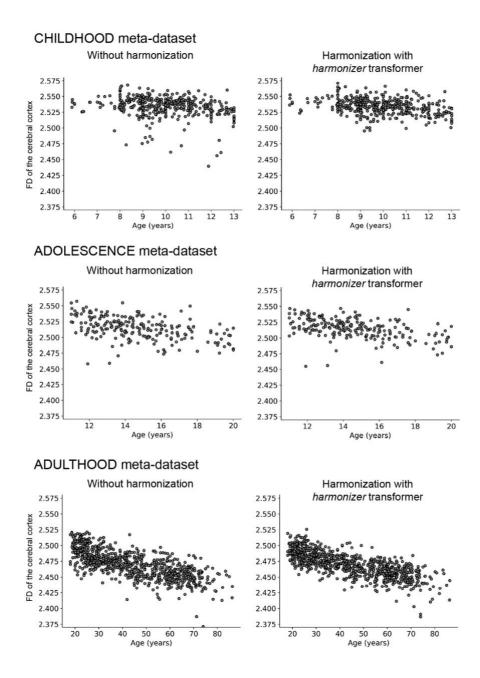


Figure 8. Scatterplot of the FD of the cerebral cortex vs. age. The plot of the FD of the cerebral cortex vs. age is shown for the CHILDHOOD, ADOLESCENCE, and ADULTHOOD meta-datasets without and with harmonization using the *harmonizer* transformer. In the latter case, we considered only the first CV among the 100 repetitions. Specifically, for each subject, we plotted the harmonized value obtained in the fold when the subject was included in the test set.

Tables

Meta-dataset	# of single- center datasets included	# participants	Females (%)	Age range min-max in years	Age median (IQR) in years	Age distributions BC
CHILDHOOD	11	442	34.39	5.89 - 13.0	9.91 (2.08)	0.71
ADOLESCENCE	9	222	15.32	11.0 - 20.0	14.22 (3.3)	0.45
ADULTHOOD	12	814	47.42	18.0 - 86.32	42.5 (30.74)	0
LIFESPAN	36	1787	35.65	5.89 - 86.32	19.98 (27.94)	0

Table 1. Description of the demographic characteristics of each meta-dataset.

BC, Bhattacharyya coefficient, IQR : interquartile range

Table 2. ANCOVA results on raw data. The partial η^2 values are reported for each

	CHILI	OHOOD	ADOL	ESCENCE	ADUL	THOOD	LIFES	PAN
	meta-d	ataset	meta-d	lataset	meta-d	lataset	meta-d	ataset
Region	СТ	FD	СТ	FD	СТ	FD	СТ	FD
Entire cortex	0.42	0.52	0.34	0.32	0.28	0.32	0.36	0.50
lh cortex	0.43	0.49	0.32	0.36	0.29	0.37	0.37	0.52
rh cortex	0.39	0.42	0.34	0.36	0.27	0.28	0.35	0.50
lh cortex frontal lobe	0.33	0.42	0.48	0.42	0.22	0.27	0.35	0.42
lh cortex occipital lobe	0.27	0.37	0.32	0.46	0.44	0.31	0.45	0.51
lh cortex temporal lobe	0.57	0.66	0.27	0.20	0.33	0.25	0.45	0.54
lh cortex parietal lobe	0.26	0.40	0.25	0.39	0.21	0.27	0.29	0.47
rh cortex frontal lobe	0.20	0.34	0.53	0.41	0.18	0.26	0.31	0.39
rh cortex occipital lobe	0.22	0.42	0.31	0.46	0.47	0.35	0.46	0.54
rh cortex temporal lobe	0.59	0.66	0.25	0.17	0.35	0.29	0.48	0.56
rh cortex parietal lobe	0.27	0.47	0.33	0.38	0.25	0.28	0.33	0.47

region/feature pair analyzed separately in each meta-dataset. All p-values are < 0.001.

CT: cortical thickness; FD: fractal dimension; lh: left hemisphere; rh: right hemisphere.

Table 3. Site prediction results. The median and the interquartile range of the balanced accuracy over 100 repetitions of the 5-fold CV have been reported. In bold, we have highlighted significant falsely overestimated performance due to data leakage (the median balanced accuracy in imaging site prediction using data harmonized with *neuroHarmonize* is lower, i.e., better performance, than that estimated using data harmonized with the *harmonizer* transformer within the CV – one-sided Wilcoxon signed-rank test p-values < 0.001 for al the analyses).

	Balanced accuracy median (IQR)				
Meta-dataset and feature type	Without harmonization	Harmonization with neuroHarmonize	Harmonization with harmonizer transformer		
CHILDHOOD					
СТ	0.45 (0.03)	0.09 (0.01)	0.13 (0.02)		
FD	0.35 (0.02)	0.09 (0.01)	0.13 (0.02)		
ADOLESCENCE					
СТ	0.45 (0.03)	0.13 (0.02)	0.15 (0.03)		
FD	0.43 (0.04)	0.16 (0.03)	0.22 (0.04)		
ADULTHOOD					
СТ	0.40 (0.03)	0.09 (0.01)	0.09 (0.01)		
FD	0.29 (0.02)	0.12 (0.01)	0.13 (0.01)		
LIFESPAN					
СТ	0.28 (0.01)	0.06 (0.01)	0.07 (0.01)		
FD	0.22 (0.01)	0.08 (0.01)	0.10 (0.01)		

CT: cortical thickness; CV: cross-validation; FD: fractal dimension; IQR: interquartile range.

Table 4. Harmonization efficacy. The permutation test p-value and one-sided Wilcoxon signed-rank test p-value have been reported. The permutation test p-value indicates whether the site effect has been removed (i.e., p-value greater than 0.05 means that the imaging site prediction is not different from a random prediction). One-sided Wilcoxon signed-rank test p-value indicates whether the site effect has been reduced (i.e., p-value less than 0.05 means that the prediction of imaging site using the harmonized features obtains a balanced accuracy significantly less than that estimated using raw data).

	Harmonization efficacy (permutation test p-value, One-sided Wilcoxon signed-rank test p-value)		
Meta-dataset and feature type	Harmonization with neuroHarmonize	Harmonization with <i>harmonizer</i> transformer	
CHILDHOOD			
СТ	(0.5023, 1.95E-18)	(0.0026, 1.95E-18)	
FD	(0.5141, 1.95E-18)	(0.0018, 1.95E-18)	
ADOLESCENCE			
СТ	(0.1906, 1.95E-18)	(0.0200, 1.95E-18)	
FD	(0.0188, 1.95E-18)	(0.0002, 1.95E-18)	
ADULTHOOD			
СТ	(0.1094, 1.95E-18)	(0.1064, 1.95E-18)	
FD	(0.0002, 1.95E-18)	(0.0002, 1.95E-18)	
LIFESPAN			
СТ	(0.0002, 1.95E-18)	(0.0002, 1.95E-18)	
FD	(0.0002, 1.95E-18)	(0.0002, 1.95E-18)	

CT: cortical thickness; FD: fractal dimension.

Table 5. Age prediction results. The median MAE and the relative standard deviation over 100 repetitions have been reported. In bold, we have highlighted significant falsely overestimated performance due to data leakage (the median MAE in predicting age using data harmonized with *neuroHarmonize* is lower than that estimated usind data harmonized with the *harmonizer* transformer within the CV – one-sided Wilcoxon signed-rank test p-values < 0.05 for al the analyses, except for the CT features of the CHILDHOOD meta-dataset).

MAE median (IQR)			
Meta-dataset and feature type	Harmonization with neuroHarmonize	Harmonization with <i>harmonizer</i>	One-sided Wilcoxon signed-rank test p-value
CHILDHOOD			
СТ	1.31 (0.03)	1.28 (0.03)	1
FD	1.16 (0.02)	1.18 (0.02)	1.01E-13
ADOLESCENCE			
СТ	1.69 (0.06)	1.76 (0.07)	5.12E-15
FD	1.56 (0.06)	1.59 (0.06)	1.97E-06
ADULTHOOD			
СТ	10.85 (0.12)	10.88 (0.14)	0.007
FD	8.68 (0.13)	8.73 (0.13)	3.95E-05
LIFESPAN			
СТ	7.35 (0.06)	7.55 (0.09)	1.95E-18
FD	5.48 (0.04)	5.60 (0.07)	2.13E-18

CT: cortical thickness; CV: cross-validation; FD: fractal dimension; IQR: interquartile range; MAE: median absolute error.

References

- Alfaro-Almagro, F. *et al.* Image processing and Quality Control for the first 10,000 brain imaging datasets from UK Biobank. *NeuroImage* 166, 400–424 (2018).
- 2. Pomponio, R. *et al.* Harmonization of large MRI datasets for the analysis of brain imaging patterns throughout the lifespan. *NeuroImage* **208**, 116450 (2020).
- 3. Radua, J. *et al.* Increased power by harmonizing structural MRI site differences with the ComBat batch adjustment method in ENIGMA. *NeuroImage* **218**, 116956 (2020).
- 4. Thompson, P. M. *et al.* The ENIGMA Consortium: large-scale collaborative analyses of neuroimaging and genetic data. *Brain Imaging Behav.* **8**, 153–182 (2014).
- 5. Fortin, J. P. *et al.* Harmonization of cortical thickness measurements across scanners and sites. *NeuroImage* **167**, 104–120 (2018).
- Fortin, J. P. *et al.* Harmonization of multi-site diffusion tensor imaging data. *NeuroImage* 161, 149–170 (2017).
- 7. Beer, J. C. *et al.* Longitudinal ComBat: A method for harmonizing longitudinal multiscanner imaging data. *NeuroImage* **220**, 117129 (2020).
- Keshavan, A. *et al.* Power estimation for non-standardized multisite studies. *NeuroImage* 134, 281–294 (2016).
- Pinto, M. S. *et al.* Harmonization of Brain Diffusion MRI: Concepts and Methods. *Front. Neurosci.* 14, 396 (2020).
- Suckling, J. *et al.* Components of variance in a multicentre functional MRI study and implications for calculation of statistical power. *Hum. Brain Mapp.* 29, 1111–1122 (2008).
- Dansereau, C. *et al.* Statistical power and prediction accuracy in multisite resting-state fMRI connectivity. *NeuroImage* 149, 220–232 (2017).
- 12. Yu, M. *et al.* Statistical harmonization corrects site effects in functional connectivity measurements from multi-site fMRI data. *Hum. Brain Mapp.* **39**, 4213–4227 (2018).

- Han, X. *et al.* Reliability of MRI-derived measurements of human cerebral cortical thickness: The effects of field strength, scanner upgrade and manufacturer. *NeuroImage* 32, 180–194 (2006).
- 14. Jovicich, J. *et al.* Reliability in multi-site structural MRI studies: Effects of gradient non-linearity correction on phantom and human data. *NeuroImage* **30**, 436–443 (2006).
- Takao, H., Hayashi, N. & Ohtomo, K. Effect of scanner in longitudinal studies of brain volume changes. *J. Magn. Reson. Imaging* 34, 438–444 (2011).
- Fortin, J.-P., Triche, T. J. & Hansen, K. D. Preprocessing, normalization and integration of the Illumina HumanMethylationEPIC array with minfi. *Bioinformatics* btw691 (2016) doi:10.1093/bioinformatics/btw691.
- Fortin, J.-P., Sweeney, E. M., Muschelli, J., Crainiceanu, C. M. & Shinohara, R. T. Removing inter-subject technical variability in magnetic resonance imaging studies. *NeuroImage* 132, 198–212 (2016).
- Hatton, S. N. *et al.* White matter abnormalities across different epilepsy syndromes in adults: an ENIGMA-Epilepsy study. *Brain* 143, 2454–2473 (2020).
- Ingalhalikar, M. *et al.* Functional Connectivity-Based Prediction of Autism on Site Harmonized ABIDE Dataset. *IEEE Trans. Biomed. Eng.* 68, 3628–3637 (2021).
- Li, Y., Ammari, S., Balleyguier, C., Lassau, N. & Chouzenoux, E. Impact of Preprocessing and Harmonization Methods on the Removal of Scanner Effects in Brain MRI Radiomic Features. *Cancers* 13, 3000 (2021).
- Luna, A. *et al.* Maturity of gray matter structures and white matter connectomes, and their relationship with psychiatric symptoms in youth. *Hum. Brain Mapp.* 42, 4568– 4579 (2021).

- Maikusa, N. *et al.* Comparison of traveling-subject and COMBAT harmonization methods for assessing structural brain characteristics. *Hum. Brain Mapp.* 42, 5278–5287 (2021).
- 23. Orlhac, F. *et al.* How can we combat multicenter variability in MR radiomics?Validation of a correction procedure. *Eur. Radiol.* 31, 2272–2280 (2021).
- 24. Wachinger, C., Rieckmann, A. & Pölsterl, S. Detect and correct bias in multi-site neuroimaging datasets. *Med. Image Anal.* **67**, 101879 (2021).
- Wengler, K. *et al.* Cross-Scanner Harmonization of Neuromelanin-Sensitive MRI for Multisite Studies. *J. Magn. Reson. Imaging* 54, 1189–1199 (2021).
- Zavaliangos-Petropulu, A. *et al.* Diffusion MRI Indices and Their Relation to Cognitive Impairment in Brain Aging: The Updated Multi-protocol Approach in ADNI3. *Front. Neuroinformatics* 13, 2 (2019).
- Zhu, Y. *et al.* Application of a Machine Learning Algorithm for Structural Brain Images in Chronic Schizophrenia to Earlier Clinical Stages of Psychosis and Autism Spectrum Disorder: A Multiprotocol Imaging Dataset Study. *Schizophr. Bull.* sbac030 (2022) doi:10.1093/schbul/sbac030.
- Johnson, W. E., Li, C. & Rabinovic, A. Adjusting batch effects in microarray expression data using empirical Bayes methods. *Biostat. Oxf. Engl.* 8, 118–127 (2007).
- 29. He, L. *et al.* Deep Multimodal Learning From MRI and Clinical Data for Early Prediction of Neurodevelopmental Deficits in Very Preterm Infants. *Front. Neurosci.* 15, 753033 (2021).
- Kim, J. I. *et al.* Classification of Preschoolers with Low-Functioning Autism Spectrum Disorder Using Multimodal MRI Data. *J. Autism Dev. Disord.* (2022) doi:10.1007/s10803-021-05368-z.

- Lo Gullo, R. *et al.* Assessing PD-L1 Expression Status Using Radiomic Features from Contrast-Enhanced Breast MRI in Breast Cancer Patients: Initial Results. *Cancers* 13, 6273 (2021).
- Lopez-Soley, E. *et al.* Dynamics and Predictors of Cognitive Impairment along the Disease Course in Multiple Sclerosis. *J. Pers. Med.* 11, 1107 (2021).
- 33. Simhal, A. K. *et al.* Predicting multiscan MRI outcomes in children with neurodevelopmental conditions following MRI simulator training. *Dev. Cogn. Neurosci.* 52, 101009 (2021).
- Zhou, X. *et al.* Multimodal MR Images-Based Diagnosis of Early Adolescent Attention-Deficit/Hyperactivity Disorder Using Multiple Kernel Learning. *Front. Neurosci.* 15, 710133 (2021).
- 35. Mandelbrot, B. B. The fractal geometry of nature. (W.H. Freeman, 1982).
- Autism Brain Imaging Data Exchange (ABIDE).
 http://fcon_1000.projects.nitrc.org/indi/abide/ (2017).
- 37. Di Martino, A. *et al.* Enhancing studies of the connectome in autism using the autism brain imaging data exchange II. *Sci. Data* **4**, 170010 (2017).
- Di Martino, A. *et al.* The autism brain imaging data exchange: towards a large-scale evaluation of the intrinsic brain architecture in autism. *Mol. Psychiatry* 19, 659–667 (2014).
- 39. Information eXtraction from Images (IXI). https://brain-development.org/ixi-dataset/.
- 40. 1000 Functional Connectomes Project (FPC). http://fcon_1000.projects.nitrc.org/fcpClassic/FcpTable.html.
- Consortium for Reliability and Reproducibility (CoRR).
 http://fcon_1000.projects.nitrc.org/indi/CoRR/html/index.html.

- 42. Kang, S. M. & Wildes, R. P. The n-distribution Bhattacharyya coefficient. *York Univ*. (2015).
- 43. Bhattacharyya, A. On a measure of divergence between two statistical populations defined by their probability distributions. *Bull Calcutta Math Soc* **35**, 99–109 (1943).
- 44. Cameron, C. *et al.* The Neuro Bureau Preprocessing Initiative: open sharing of preprocessed neuroimaging data and derivatives. *Front. Neuroinformatics* **7**, (2013).
- 45. Bigler, E. D. *et al.* FreeSurfer 5.3 versus 6.0: are volumes comparable? A Chronic Effects of Neurotrauma Consortium study. *Brain Imaging Behav.* 14, 1318–1327 (2020).
- 46. Chepkoech, J.-L., Walhovd, K. B., Grydeland, H., Fjell, A. M., & for the Alzheimer's Disease Neuroimaging Initiative. Effects of change in FreeSurfer version on classification accuracy of patients with Alzheimer's disease and mild cognitive impairment: Effects of Change in FreeSurfer Version. *Hum. Brain Mapp.* 37, 1831–1841 (2016).
- 47. Filip, P. *et al.* Different FreeSurfer versions might generate different statistical outcomes in case–control comparison studies. *Neuroradiology* **64**, 765–773 (2022).
- Glatard, T. *et al.* Reproducibility of neuroimaging analyses across operating systems.
 Front. Neuroinformatics 9, (2015).
- Gronenschild, E. H. B. M. *et al.* The Effects of FreeSurfer Version, Workstation Type, and Macintosh Operating System Version on Anatomical Volume and Cortical Thickness Measurements. *PLoS ONE* 7, e38234 (2012).
- 50. Fischl, B. FreeSurfer. NeuroImage 62, 774–781 (2012).
- Fischl, B., Liu, A. & Dale, A. M. Automated manifold surgery: constructing geometrically accurate and topologically correct models of the human cerebral cortex. *IEEE Trans. Med. Imaging* 20, 70–80 (2001).

- Desikan, R. S. *et al.* An automated labeling system for subdividing the human cerebral cortex on MRI scans into gyral based regions of interest. *NeuroImage* 31, 968–980 (2006).
- Fischl, B. & Dale, A. M. Measuring the thickness of the human cerebral cortex from magnetic resonance images. *Proc. Natl. Acad. Sci.* 97, 11050–11055 (2000).
- Cutting, J. E. & Garvin, J. J. Fractal curves and complexity. *Percept. Psychophys.* 42, 365–370 (1987).
- Fernández, E. & Jelinek, H. F. Use of Fractal Theory in Neuroscience: Methods, Advantages, and Potential Problems. *Methods* 24, 309–321 (2001).
- Im, K. *et al.* Fractal dimension in human cortical surface: Multiple regression analysis with cortical thickness, sulcal depth, and folding area. *Hum. Brain Mapp.* 27, 994–1003 (2006).
- Marzi, C., Giannelli, M., Tessa, C., Mascalchi, M. & Diciotti, S. Toward a more reliable characterization of fractal properties of the cerebral cortex of healthy subjects during the lifespan. *Sci. Rep.* 10, 16957 (2020).
- Russell, D. A., Hanson, J. D. & Ott, E. Dimension of Strange Attractors. *Phys. Rev. Lett.* 45, 1175–1178 (1980).
- 59. Losa, G. A. The fractal geometry of life. *Riv. Biol.* **102**, 29–59 (2009).
- Falconer, K. J. Fractal geometry: mathematical foundations and applications. (John Wiley & Sons Inc, 2014).
- Goñi, J. *et al.* Robust estimation of fractal measures for characterizing the structural complexity of the human brain: Optimization and reproducibility. *NeuroImage* 83, 646–657 (2013).
- Courchesne, E. *et al.* Normal Brain Development and Aging: Quantitative Analysis at in Vivo MR Imaging in Healthy Volunteers. *Radiology* 216, 672–682 (2000).

- Fjell, A. M. & Walhovd, K. B. Structural Brain Changes in Aging: Courses, Causes and Cognitive Consequences. *Rev. Neurosci.* 21, (2010).
- Hogstrom, L. J., Westlye, L. T., Walhovd, K. B. & Fjell, A. M. The Structure of the Cerebral Cortex Across Adult Life: Age-Related Patterns of Surface Area, Thickness, and Gyrification. *Cereb. Cortex* 23, 2521–2530 (2013).
- Madan, C. R. & Kensinger, E. A. Predicting age from cortical structure across the lifespan. *Eur. J. Neurosci.* 47, 399–416 (2018).
- Madan, C. R. & Kensinger, E. A. Cortical complexity as a measure of age-related brain atrophy. *NeuroImage* 134, 617–629 (2016).
- 67. Raznahan, A. et al. How Does Your Cortex Grow? J. Neurosci. 31, 7174–7177 (2011).
- Zheng, F. *et al.* Age-related changes in cortical and subcortical structures of healthy adult brains: A surface-based morphometry study: Age-Related Study in Healthy Adult Brain Structure. *J. Magn. Reson. Imaging* 49, 152–163 (2019).
- 69. Sowell, E. R. *et al.* Sex Differences in Cortical Thickness Mapped in 176 Healthy Individuals between 7 and 87 Years of Age. *Cereb. Cortex* **17**, 1550–1560 (2007).
- Yagis, E. *et al.* Effect of data leakage in brain MRI classification using 2D convolutional neural networks. *Sci. Rep.* 11, 22544 (2021).
- Tampu, I. E., Eklund, A. & Haj-Hosseini, N. Inflation of test accuracy due to data leakage in deep learning-based classification of OCT images. *Sci. Data* 9, 580 (2022).
- 72. Müller, A. C. & Guido, S. Introduction to machine learning with Python: a guide for data scientists. (O'Reilly Media, Inc, 2016).
- Scheda, R. & Diciotti, S. Explanations of Machine Learning Models in Repeated Nested Cross-Validation: An Application in Age Prediction Using Brain Complexity Features. *Appl. Sci.* 12, 6681 (2022).

- 74. Varma, S. & Simon, R. Bias in error estimation when using cross-validation for model selection. *BMC Bioinformatics* **7**, 91 (2006).
- 75. scikit-learn developers. Developing scikit-learn estimators. https://scikit-learn.org/stable/developers/develop.html.
- Chen, T. & Guestrin, C. XGBoost: A Scalable Tree Boosting System. in Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining 785–794 (ACM, 2016). doi:10.1145/2939672.2939785.
- Nichols, T. E. & Holmes, A. P. Nonparametric permutation tests for functional neuroimaging: A primer with examples. *Hum. Brain Mapp.* 15, 1–25 (2002).
- Winkler, A. M., Ridgway, G. R., Webster, M. A., Smith, S. M. & Nichols, T. E.
 Permutation inference for the general linear model. *NeuroImage* 92, 381–397 (2014).
- 79. Wilcoxon, F. Individual Comparisons by Ranking Methods. *Biom. Bull.* 1, 80 (1945).
- 80. Brouwer, R. M. *et al.* Genetic variants associated with longitudinal changes in brain structure across the lifespan. *Nat. Neurosci.* **25**, 421–432 (2022).
- Oschwald, J. *et al.* Brain structure and cognitive ability in healthy aging: a review on longitudinal correlated change. *Rev. Neurosci.* **31**, 1–57 (2019).
- Free, S. L., Sisodiya, S. M., Cook, M. J., Fish, D. R. & Shorvon, S. D. Threedimensional fractal analysis of the white matter surface from magnetic resonance images of the human brain. *Cereb. Cortex N. Y. N 1991* 6, 830–836 (1996).
- King, R. D. *et al.* Fractal dimension analysis of the cortical ribbon in mild Alzheimer's disease. *NeuroImage* 53, 471–479 (2010).
- King, R. D. *et al.* Characterization of Atrophic Changes in the Cerebral Cortex Using Fractal Dimensional Analysis. *Brain Imaging Behav.* 3, 154–166 (2009).

- Marzi, C., Giannelli, M., Tessa, C., Mascalchi, M. & Diciotti, S. Fractal Analysis of MRI Data at 7 T: How Much Complex Is the Cerebral Cortex? *IEEE Access* 9, 69226– 69234 (2021).
- Marzi, C. *et al.* Structural Complexity of the Cerebellum and Cerebral Cortex is Reduced in Spinocerebellar Ataxia Type 2. *J. Neuroimaging Off. J. Am. Soc. Neuroimaging* 28, 688–693 (2018).
- Pani, J. *et al.* Longitudinal study of the effect of a 5-year exercise intervention on structural brain complexity in older adults. A Generation 100 substudy. *NeuroImage* 119226 (2022) doi:10.1016/j.neuroimage.2022.119226.
- 88. Pantoni, L. *et al.* Fractal dimension of cerebral white matter: A consistent feature for prediction of the cognitive performance in patients with small vessel disease and mild cognitive impairment. *NeuroImage Clin.* 24, 101990 (2019).
- Nazlee, N., Waiter, G. D. & Sandu, A. Age-associated sex and asymmetry differentiation in hemispheric and lobar cortical ribbon complexity across adulthood: A UK BIOBANK imaging study. *Hum. Brain Mapp.* hbm.26076 (2022) doi:10.1002/hbm.26076.
- Sandu, A.-L. *et al.* Fractal dimension analysis of MR images reveals grey matter structure irregularities in schizophrenia. *Comput. Med. Imaging Graph.* 32, 150–158 (2008).
- Sandu, A.-L. *et al.* Post-adolescent developmental changes in cortical complexity.
 Behav. Brain Funct. 10, 44 (2014).
- 92. Sandu, A.-L. *et al.* Sexual dimorphism in the relationship between brain complexity, volume and general intelligence (g): a cross-cohort study. *Sci. Rep.* **12**, 11025 (2022).

- Sandu, A.-L., Specht, K., Beneventi, H., Lundervold, A. & Hugdahl, K. Sex-differences in grey–white matter structure in normal-reading and dyslexic adolescents. *Neurosci. Lett.* 438, 80–84 (2008).
- 94. Sandu, A.-L. *et al.* Structural brain complexity and cognitive decline in late life A longitudinal study in the Aberdeen 1936 Birth Cohort. *NeuroImage* 100, 558–563 (2014).
- 95. Sandu, A.-L., Paillère Martinot, M.-L., Artiges, E. & Martinot, J.-L. 1910s' brains revisited. Cortical complexity in early 20th century patients with intellectual disability or with dementia praecox. *Acta Psychiatr. Scand.* **130**, 227–237 (2014).

Supporting Information

Supplementary Table 1. Scanning parameters for each single-center dataset.

Dataset	Manufacturer and model	Magnetostatic field (T)	In-plane resolution $(\mathbf{mm} \times \mathbf{mm})$	Slice thickness (mm)	TR (ms)	TE (ms)	TI (ms)	FA (°)
ABIDEI-CALTECH	Siemens MAGNETOM Trio	3	1.0 imes 1.0	1.0	1590	2.73	800	10
ABIDEI-CMU	Siemens MAGNETOM Verio	3	1.0 imes 1.0	1.0	1870	2.48	1100	8
ABIDEI-KKI	Philips Achieva	3	1.0 imes 1.0	1.0	8.0	3.7	843	8
ABIDEI-LEUVEN	Philips Intera	3	0.98 imes 0.98	1.20	9.6	4.6	885	8
ABIDEI-MAX_MUN	Siemens MAGNETOM Verio	3	1.0 imes 1.0	1.0	1800	3.06	900	9
ABIDEI-NYU	Siemens MAGNETOM Allegra	3	1.3 imes 1.0	1.3	2530	3.25	1100	7
ABIDEI-OHSU	Siemens MAGNETOM Trio	3	1.0 imes 1.0	1.1	2300	3.58	900	10
ABIDEI-OLIN	Siemens MAGNETOM Allegra	3	1.0 imes 1.0	1.0	2500	2.74	900	8
ABIDEI-PITT	Siemens MAGNETOM Allegra	3	1.1×1.1	1.1	2100	3.93	1000	7
ABIDEI-SBL	Philips Intera	3	1.0 imes 1.0	1.0	9.0	3.5	144	8
ABIDEI-SDSU	GE Discovery MR750	3	1.0 imes 1.0	1.0	11.08	4.3	600	45
ABIDEI-STANFORD	GE Signa	3	0.859 imes 1.500	0.859	8.4	1.8	NA	15
ABIDEI-TRINITY	Philips Achieva	3	1.0 imes 1.0	1.0	8.5	3.9	1060	8
ABIDEI-UCLA	Siemens MAGNETOM Trio	3	1.0 imes 1.0	1.2	2300	2.84	853	9
ABIDEI-UM	GE Signa	3	NA	1.2	NA	1.8	NA	15
ABIDEI-USM	Siemens MAGNETOM Trio	3	1.0 imes 1.0	1.2	2300	2.91	900	9
ABIDEII-BNI_1	Philips Ingenia	3	1.1×1.1	1.2	6.7	3.1	799	9
ABIDEII-EMC_1	GE Discovery MR750	3	1.1×1.1	1.2	6.7	3.1	350	9
ABIDEII-ETH_1	Philips Achieva	3	0.9 imes 0.9	0.9	8.4	3.9	1150	8
ABIDEII-GU_1	Siemens MAGNETOM Trio	3	1.0 imes 1.0	1.0	2530	3.5	1100	7
ABIDEII-IP_1	Philips Achieva	1.5	1.0 imes 1.0	1.0	25	5.6	NA	30
ABIDEII-IU_1	Siemens TrioTim	3	0.7 imes 0.7	0.7	2400	2.3	1000	8
ABIDEII-KKI_32ch	Philips Achieva	3	0.95 imes 0.96	1.0	8.2	3.7	753	8
ABIDEII-KKI_8ch	Philips Achieva	3	1.0 imes 1.0	1.0	8.0	3.7	843	8
ABIDEII-NYU_1	Siemens Allegra	3	1.3 imes 1.0	1.33	2530	3.25	1100	7
ABIDEII-OHSU_1	Siemens TrioTim	3	1.0 imes 1.0	1.1	2300	3.58	900	10
ABIDEII-SDSU_1	GE Discovery MR750	3	1.0 imes 1.0	1.0	8.136	3.17	600	8
ABIDEII-TCD_1	Philips Intera Achieva	3	0.9 imes 0.9	0.9	8.4	2 3.9	1150	8
ABIDEII-UCD_1	Siemens TrioTim	3	1.0 imes 1.0	1.0	2000	3.16	1050	8
ABIDEII-UCLA_1	Siemens TrioTim	3	1.0 imes 1.0	1.2	2300	2.86	853	9
ABIDEII-USM_1	Siemens TrioTim	3	1.0 imes 1.0	1.2	2300	2.91	900	9
ICBM	NA	3	1.0 imes 1.0	1.0	NA	NA	NA	NA
IXI-Guys	Philips Gyroscan Intera	1.5	NA	NA	9.813	4.60	NA	8
IXI-HH	Philips Intera	3	NA	NA	9.6	3 4.6	NA	8
IXI-IOP	NA	NA	NA	NA	NA	NA	NA	NA
NKI2	NA	3	1.0 imes 1.0	1.0	NA	NA	NA	NA

FA, flip angle; NA, not available; TE, echo time; TI, inversion time; TR, repetition time

Supplementary Table 2. Description of the demographic characteristics of each single-center dataset. Data from single-center datasets have been included in one specific meta-dataset considering the following age ranges: CHILDHOOD (5 - 13 years), ADOLESCENCE (11 - 20 years), and ADULTHOOD (18 - 87 years) (more details in section 2.1). All single-center datasets have also been included in the LIFESPAN meta-dataset.

Dataset	Institution	# participants	Females (%)	Age range	Age median (IQR)	Meta-dataset
				min-max		
ABIDEI-CALTECH	California Institute of Technology	19	21.05	17.0 - 56.2	23.6 (15.85)	ADULTHOOD
ABIDEI-CMU	Carnegie Mellon	13	23.08	20.0 - 40.0	27.0 (9.0)	
	University					
ABIDEI-KKI	Kennedy Krieger Institute	33	27.27	8.07 - 12.77	9.97 (1.54)	CHILDHOOD
ABIDEI-LEUVEN	University of Leuven	35	14.29	12.2 - 29.0	16.6 (7.95)	ADOLESCENCE
ABIDEI-MAX_MUN	Ludwig Maximilians	33	12.12	7.0 - 48.0	26.0 (9.0)	ADULTHOOD
	University Munich					
ABIDEI-NYU	New York University Langone Medical Center	105	24.76	6.47 - 31.78	14.38 (8.99)	ADOLESCENCE
ABIDEI-OHSU	Oregon Health & Science University	15	0	8.2 - 11.99	10.08 (1.31)	CHILDHOOD
ABIDEI-OLIN	Olin Center, Institute of Living at Hartford Hospital	16	12.5	10.0 - 23.0	16.5 (6.25)	ADOLESCENCE
ABIDEI-PITT	University of Pittsburgh School of Medicine	27	14.81	9.44 - 33.24	17.13 (8.3)	ADOLESCENCE
ABIDEI-SBL	Social Brain Lab	15	0	20.0 - 42.0	36.0 (11.5)	ADULTHOOD
	BCN NeuroImaging Center, University Medical Center					
	Groningen and Netherlands Institute for Neuroscience					
ABIDEI-SDSU	San Diego State University	22	27.27	8.67 - 16.88	14.42 (2.45)	ADOLESCENCE

ABIDEI-STANFORD	Stanford University	20	20	7.75 - 12.43	9.41 (2.57)	CHILDHOOD
ABIDEI-TRINITY	Trinity College Dublin	25	0	12.04 - 25.66	15.91 (5.25)	ADOLESCENCE
ABIDEI-UCLA	University of California, Los Angeles	47	12.77	9.21 - 17.79	12.68 (2.16)	ADOLESCENCE
ABIDEI-UM	University of Michigan	77	23.38	8.2 - 28.8	14.8 (5.0)	
ABIDEI-USM	University of Utah	43	0	8.77 - 39.39	19.76 (10.4)	
ABIDEII-BNI_1	School of Medicine Barrow Neurological Institute	29	0	18.0 - 64.0	43.0 (27.0)	ADULTHOOD
ABIDEII-EMC_1	Erasmus University Medical Centre	27	18.52	6.33 - 10.12	8.19 (1.41)	CHILDHOOD
ABIDEII-ETH_1	ETH Zürich	24	0	13.83 - 30.67	24.0 (6.79)	ADULTHOOD
ABIDEII-GU_1	Georgetown University	55	49.09	8.06 - 13.8	10.43 (2.96)	CHILDHOOD
ABIDEII-IP_1	Institut Pasteur and Robert Debré Hospital	34	64.71	8.07 - 46.6	22.12 (18.8)	ADULTHOOD
ABIDEII-IU_1	Indiana University	20	25	19.0 - 37.0	22.0 (4.25)	ADULTHOOD
ABIDEII-KKI_32ch	Kennedy Krieger Institute	45	26.67	8.06 - 12.67	10.27 (1.67)	CHILDHOOD
ABIDEII-KKI_8ch	Kennedy Krieger Institute	110	40	8.02 - 12.9	10.3 (1.68)	CHILDHOOD
ABIDEII-NYU_1	New York University Langone Medical Center	30	6.67	5.89 - 23.81	9.11 (3.12)	CHILDHOOD
ABIDEII-OHSU_1	Oregon Health & Science University	56	51.79	8.0 - 14.0	10.0 (2.25)	CHILDHOOD

ABIDEII-SDSU_1	San Diego State University	25	8	8.1 - 17.7	13.0 (5.2)	ADOLESCENCE
ABIDEII-TCD_1	Trinity College Dublin	21	0	10.25 - 20.0	15.25 (5.25)	ADOLESCENCE
ABIDEII-UCD_1	University of California Davis	14	28.57	12.25 - 17.17	14.75 (2.65)	
ABIDEII-UCLA_1	University of California, Los Angeles	16	31.25	7.76 - 14.09	9.01 (1.43)	CHILDHOOD
ABIDEII-USM_1	University of Utah School of Medicine	16	18.75	11.5 - 36.15	23.78 (10.72)	ADULTHOOD
ICBM	International Consortium for Human Brain Mapping	86	52.33	19.0 - 85.0	44.5 (31.5)	ADULTHOOD
IXI-Guys	Guy's Hospital - London	322	56.21	20.07 - 86.2	53.41 (26.08)	ADULTHOOD
IXI-HH	Hammersmith Hospital - London	186	52.69	20.17 - 81.94	48.05 (28.25)	ADULTHOOD
IXI-IOP	Institute of Psychiatry - London	73	67.12	19.98 - 86.32	36.16 (19.85)	ADULTHOOD
NKI2		73	41.1	6.0 - 17.0	12.0 (6.0)	CHILDHOOD


IQR: interquartile range.

Site	# participants	Females (%)	Age min – max (years)	Age mean (SD) (years)	Age median (IQR) (years)
ABIDEI-CALTECH	19	21.05	17.0 - 56.2	28.87 (11.21)	23.6 (15.85)
ABIDEI-CMU	13	23.08	20.0 - 40.0	26.85 (5.74)	27.0 (9.0)
ABIDEI-KKI	32	28.12	8.07 - 12.77	10.15 (1.28)	9.97 (1.58)
ABIDEI-LEUVEN	35	14.29	12.2 - 29.0	18.17 (4.99)	16.6 (7.95)
ABIDEI-MAX_MUN	33	12.12	7.0 - 48.0	26.21 (9.8)	26.0 (9.0)
ABIDEI-NYU	104	24.04	6.47 - 31.78	15.87 (6.25)	14.4 (8.78)
ABIDEI-OHSU	15	0	8.2 - 11.99	10.06 (1.08)	10.08 (1.31)
ABIDEI-OLIN	14	14.29	10.0 - 23.0	16.93 (3.63)	16.5 (5.75)
ABIDEI-PITT	27	14.81	9.44 - 33.24	18.88 (6.64)	17.13 (8.3)
ABIDEI-SBL	15	0	20.0 - 42.0	33.73 (6.61)	36.0 (11.5)
ABIDEI-SDSU	21	28.57	8.67 - 16.88	14.18 (1.94)	14.1 (2.62)
ABIDEI-STANFORD	12	33.33	7.75 - 12.43	10.2 (1.68)	9.76 (2.9)
ABIDEI-TRINITY	25	0	12.04 - 25.66	17.08 (3.77)	15.91 (5.25)
ABIDEI-UCLA	42	14.29	9.21 - 17.79	12.92 (1.96)	12.7 (2.15)
ABIDEI-UM	72	25	8.2 - 28.8	14.85 (3.64)	14.8 (4.95)
ABIDEI-USM	43	0	8.77 - 39.39	21.36 (7.64)	19.76 (10.4)
ABIDEII-BNI_1	29	0	18.0 - 64.0	39.59 (15.09)	43.0 (27.0)
ABIDEII-EMC_1	25	16	6.33 - 10.12	8.16 (1.03)	8.19 (1.52)
ABIDEII-ETH_1	24	0	13.83 - 30.67	23.88 (4.5)	24.0 (6.79)
ABIDEII-GU_1	51	49.02	8.06 - 13.8	10.49 (1.72)	10.43 (3.04)
ABIDEII-IP_1	32	68.75	8.07 - 46.6	24.05 (11.64)	22.49 (14.71)
ABIDEII-IU_1	20	25	19.0 - 37.0	23.75 (4.9)	22.0 (4.25)
ABIDEII-KKI_32ch	45	26.67	8.06 - 12.67	10.42 (1.26)	10.27 (1.67)
ABIDEII-KKI_8ch	107	40.19	8.02 - 12.9	10.3 (1.17)	10.3 (1.67)
ABIDEII-NYU_1	30	6.67	5.89 - 23.81	9.52 (3.33)	9.11 (3.12)
ABIDEII-OHSU_1	55	52.73	8.0 - 14.0	10.4 (1.64)	10.0 (2.5)
ABIDEII-SDSU_1	25	8	8.1 - 17.7	13.25 (3.04)	13.0 (5.2)
ABIDEII-TCD_1	21	0	10.25 - 20.0	15.61 (3.12)	15.25 (5.25)
ABIDEII-UCD_1	14	28.57	12.25 - 17.17	14.8 (1.71)	14.75 (2.65)
ABIDEII-UCLA_1	15	33.33	7.76 - 14.09	9.81 (2.18)	9.02 (1.93)
ABIDEII-USM_1	16	18.75	11.5 - 36.15	23.98 (7.8)	23.78 (10.72)
ICBM	86	52.33	19.0 - 85.0	44.19 (17.92)	44.5 (31.5)
IXI-Guys	309	55.99	20.07 - 86.2	50.75 (15.83)	53.41 (25.59)
IXI-HH	178	52.25	20.17 - 81.94	47.12 (16.65)	47.38 (29.16)
IXI-IOP	63	65.08	19.98 - 86.32	40.58 (15.41)	35.46 (17.33)
NKI2	73	41.1	6.0 - 17.0	11.85 (3.14)	12.0 (6.0)


Supplementary Table 3. Demographic characteristics of the subjects remaining after quality control and who entered into the analyses.

IQR: interquartile range; SD: standard deviation.


LIFESPAN meta-dataset




Supplementary Figure 1. Age distribution in the LIFESPAN meta-dataset. Age distribution of participants for the LIFESPAN meta-dataset, grouped by single-center dataset and sorted by median age.

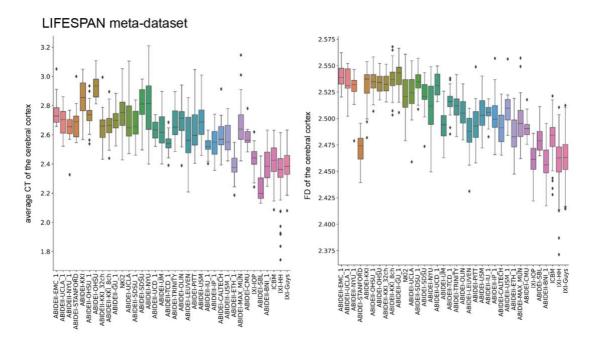


Supplementary Figure 2. Boxplot of the average CT and FD of the cerebral cortex in the LIFESPAN meta-dataset. The boxplots of the average CT and FD of the cerebral cortex without harmonization are shown for the LIFESPAN meta-dataset.

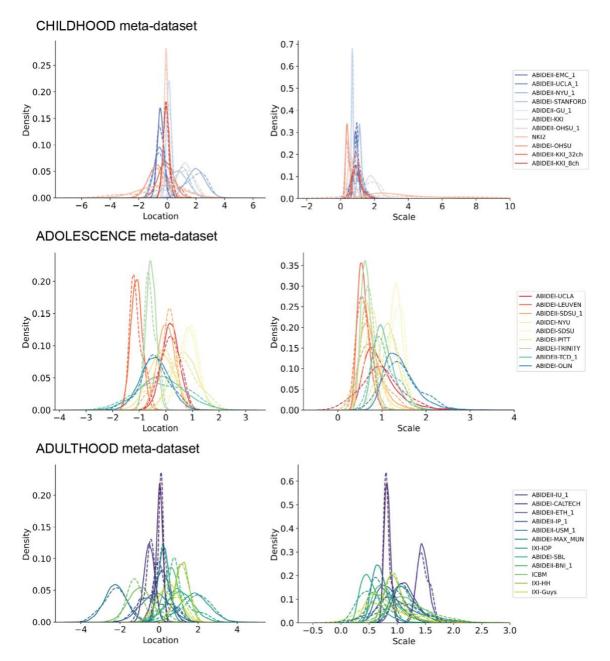


Supplementary Figure 3. Combat site effect parameters for CT features. The estimates of location and scale parameters in CHILDHOOD, ADOLESCENCE, and ADULTHOOD meta-datasets are shown. The solid lines represent the prior distributions, while the dashed lines represent the posterior distributions estimated in the Combat procedure using empirical Bayes-based prior distributions.

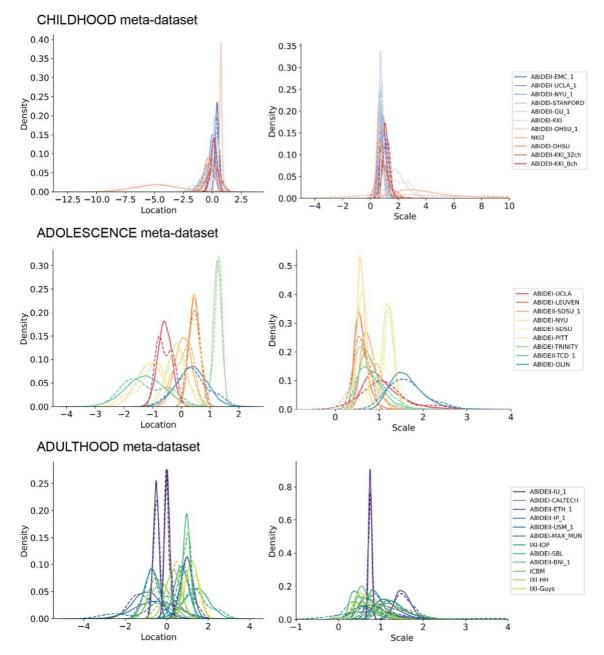


Supplementary Figure 4. Combat site effect parameters for FD features. The estimates of location and scale parameters in CHILDHOOD, ADOLESCENCE, and ADULTHOOD meta-datasets are shown. The solid lines represent the prior distributions, while the dashed lines represent the posterior distributions estimated in the Combat procedure using empirical Bayes-based prior distributions.

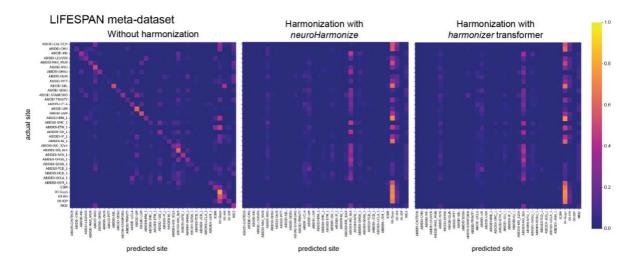


Supplementary Figure 5. Confusion matrices of site prediction using CT features in the LIFESPAN meta-dataset. Each confusion matrix was normalized for the number of subjects belonging to each site. In this way, the sum of the matrix cells of each row gives 1. The confusion matrix obtained using the *harmonizer* within the machine learning pipeline seems similar to that obtained by harmonizing all the data with *neuroHarmonize* before imaging site prediction, even though the model is built on training data only and then applied to test data.

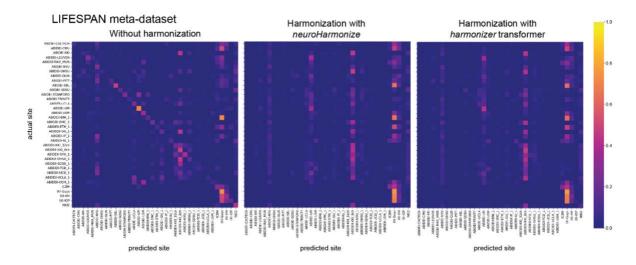

Supplementary Figure 6. Confusion matrices of site prediction using FD features in the LIFESPAN meta-dataset. Each confusion matrix was normalized for the number of subjects belonging to each site. In this way, the sum of the matrix cells of each row gives 1. The confusion matrix obtained using the *harmonizer* within the machine learning pipeline seems similar to that obtained by harmonizing all the data with *neuroHarmonize* before imaging site prediction, even though the model is built on training data only and then applied to test data.

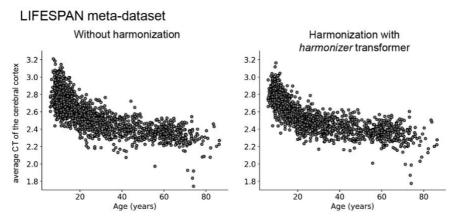

Supplementary Figure 7. Scatterplot of the average CT of the cerebral cortex vs. age. The plot of the average CT of the cerebral cortex vs. age is shown for the LIFESPAN metadataset without and with harmonization using the *harmonizer* transformer. In the latter case, we considered only the first CV among the 10 repetitions. Specifically, for each subject, we plotted the harmonized value obtained in the fold when the subject was included in the test set.

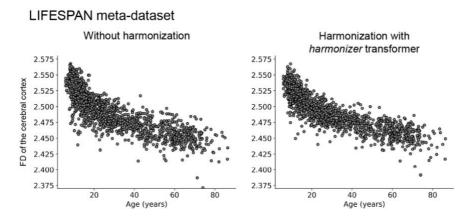

Supplementary Figure 8. Scatterplot of the FD of the cerebral cortex vs. age. The plot of the average FD of the cerebral cortex vs. age is shown for the LIFESPAN meta-dataset without and with harmonization using the *harmonizer* transformer. In the latter case, we considered only the first CV among the 10 repetitions. Specifically, for each subject, we plotted the harmonized value obtained in the fold when the subject was included in the test set.