

# TOWARD UNIVERSAL TEXT-TO-MUSIC RETRIEVAL

<sup>b</sup>SeungHeon Doh, <sup>b</sup>Minz Won, <sup>#</sup>Keunwoo Choi, <sup>b</sup>Juhan Nam

<sup>b</sup>Graduate School of Culture Technology, KAIST, South Korea

<sup>‡</sup>ByteDance, USA

<sup>#</sup>Gaudio Lab, South Korea

## ABSTRACT

This paper introduces effective design choices for text-to-music retrieval systems. An ideal text-based retrieval system would support various input queries such as pre-defined tags, unseen tags, and sentence-level descriptions. In reality, most previous works mainly focused on a single query type (tag or sentence) which may not generalize to another input type. Hence, we review recent text-based music retrieval systems using our proposed benchmark in two main aspects: input text representation and training objectives. Our findings enable a universal text-to-music retrieval system that achieves comparable retrieval performances in both tag- and sentence-level inputs. Furthermore, the proposed multimodal representation generalizes to 9 different downstream music classification tasks. We present the code and demo online.<sup>1</sup>

**Index Terms**— Cross-modal retrieval, Text-based retrieval, Music retrieval

## 1. INTRODUCTION

The demand for efficient music retrieval has been increasing as massive music libraries become easily accessible. While various methods have been proposed for efficient retrieval [1, 2, 3, 4], text-based<sup>2</sup> retrieval remains the most prevalent [5, 6, 7]. Text-based retrieval is challenging because it needs to handle not only editorial metadata (e.g., title, artist, release year) but also semantic information (e.g., genre, mood, theme). Furthermore, modern retrieval systems, such as voice assistants [8], need to generalize to sentence-level natural language inputs beyond fixed tag vocabularies.

While much research has addressed text-based retrieval, there are two dominant approaches: classification and metric learning. Classification models [9, 6] are trained with a set of fixed tag labels, and then the predicted tags are utilized in retrieval. Despite its successful classification performance, this approach is limited to a fixed vocabulary. In contrast, metric learning models are more flexible by using pre-trained word embeddings [10, 11] or language models [12, 13, 14, 15]. Especially pre-trained language models enable free-form text inputs for music retrieval by representing sentence-level semantics. There are multiple loss functions (e.g., triplet loss, contrastive loss) for metric learning based on its training objective.

An ideal text-based retrieval system needs to be flexible to allow various input types (e.g. word, sentence) and abundant vocabularies. For example, one can use broadly used tags, such as genre, to explore the music library. Sometimes the input queries may include unseen

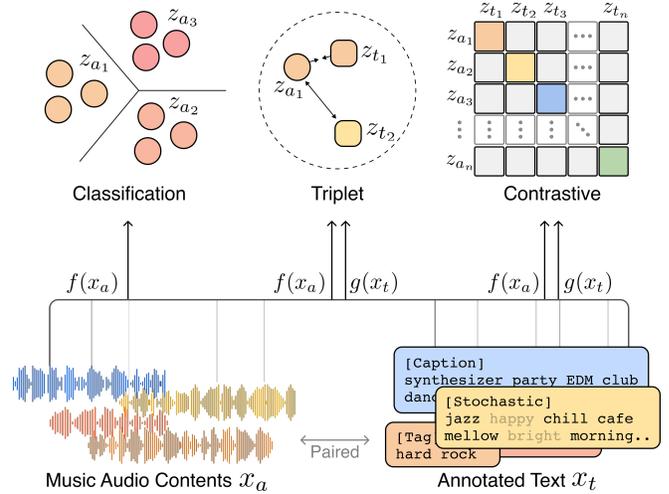


Fig. 1. Text-Music Representation Learning Models.

types of music tags. Also, another can use more detailed sentence-level descriptions to discover music. However, to the best of our knowledge, previous works mainly focused on improving a single type of input queries. Also, they are using respective datasets and evaluation metrics which makes it difficult to choose the appropriate solution for universal music retrieval.

To address this issue, we perform holistic evaluation of recently proposed text-to-music retrieval approaches. First, we review the training objectives and modality encoding of the previous works. We also propose a novel stochastic sampling of text inputs to enable a generalizable text encoder (Section 2). We then introduce a text-music paired dataset and an evaluation benchmark to assess the system’s generalizability (Section 3). Section 4 depicts experimental results. Finally, Section 4 and 5 propose reusable insights for designing universal text-to-music retrieval systems.

## 2. MUSIC AND TEXT REPRESENTATION LEARNING

This section introduces recent text-music representation learning models (illustrated in Figure 1). We carefully review three training objectives and their modality encoders. In the following descriptions,  $x^a$  denotes a music audio example,  $x^t$  its paired text data,  $f(\cdot)$  an audio encoder, and  $g(\cdot)$  a text encoder. Each modality input is processed by the corresponding encoder  $f$  or  $g$  (described in 2.2). Each encoder consists of a backbone model, a linear projection, and an  $l_2$  normalization layer. We denote the two output embeddings of audio and text as  $z^a = f(x^a)$  and  $z^t = g(x^t)$ , respectively. The

<sup>1</sup><https://seungheondoh.github.io/text-music-representation-demo/>

<sup>2</sup>Because the terminology-**{text, language}** encompasses various input lengths, we explicitly distinguish between the tag-level and sentence-level.

MSD Subset	# of Track	# of Artist	# of Album	# of Tag	# of Caption	Avg.Tag	A/S	Genre	Style	Inst.	Vocal	Mood	Theme	Culture
Top50s [9, 6]	241,889	25,239	67,495	50	11,418	1.72	No	✓		✓	✓	✓		✓
CALS [16]	233,147*	24,569	63,349	50	4,408	1.31	Yes	✓		✓		✓		✓
ECALS (Ours)	517,022	32,650	89,920	1054	139,541	10.18	Yes	✓	✓	✓	✓	✓	✓	✓

**Table 1.** Comparison of the existing MSD-subset and the proposed ECALS subset. A/S stands for artist stratified. (\*) CALS includes additional un-annotated tracks for semi-supervised learning. This table only shows tag annotated dataset.

classification model does not have a text encoder since we directly perform multi-label classification of the tags.

## 2.1. Training Objective

**Classification Model** The goal of the classification model is to learn a linearly discriminate embedding space. This can also be interpreted from the similarity-based metric learning perspective as introduced in [4]. The prediction score of the model for each class is  $\hat{y} = \text{sigmoid}(z^a \cdot c_y)$ , where  $c_y$  is a centroid vector for each class (parameters of the last dense layer). To maximize the similarity between  $z^a$  and  $c_y$ , the objective function is formulated as follows.

$$\mathcal{L}_{ce} = -(y_z \log(\hat{y}) + (1 - y_z) \log(1 - \hat{y})) \quad (1)$$

Since the prediction score of a track is utilized as a similarity score with the centroid vector (the tag label), the classification-based model serves as the baseline system for tag-based retrieval. The classification model is limited to a fixed vocabulary since it cannot take advantage of text embeddings in a zero-shot retrieval scenario.

**Triplet-Loss Model** The goal of triplet-loss models is to learn an embedding space where relevant input pairs are mapped closer than irrelevant pairs in the latent space. The objective function is formulated as follows:

$$\mathcal{L}_{a \rightarrow t} = [0, \delta - z^a \cdot z_{pos}^t + z^a \cdot z_{neg}^t]_+ \quad (2)$$

where  $\delta$  is the margin,  $z_{pos}^t$  denotes the paired text for the music audio, and  $z_{neg}^t$  denotes irrelevant text.  $[\cdot]_+$  indicates a rectified linear unit. In practice, an efficient negative sampling is crucial in triplet-based metric learning. We applied the distance-weighted sampling method used in [11]. Using structure-preserving constraints [17, 18], we utilize a symmetric loss function:  $\mathcal{L}_{a \leftrightarrow t} = (\mathcal{L}_{a \rightarrow t} + \mathcal{L}_{t \rightarrow a})/2$ .

**Contrastive-Loss Model** The core idea of contrastive-loss models is to reduce the distance between positive sample pairs while increasing the distance between negative sample pairs. Unlike triplet-loss models, contrastive-loss models can utilize a large number of negative samples that exist in a mini batch  $N$ . During training, the audio and text encoders are jointly trained to maximize the similarity between  $N$  positive pairs of (music, text) associations while minimizing the similarity for  $N \times (N - 1)$  negative pairs. This is known as the multi-modal version of InfoNCE loss [19, 20] and formulated as follows:

$$\mathcal{L}_{a \rightarrow t} = -\log \frac{\exp(z_i^a \cdot z_i^t / \tau)}{\sum_{j=1}^N \exp(z_i^a \cdot z_j^t / \tau)} \quad (3)$$

where  $\tau$  is a learnable parameter. The loss function is designed as follows:  $\mathcal{L}_{a \leftrightarrow t} = (\mathcal{L}_{a \rightarrow t} + \mathcal{L}_{t \rightarrow a})/2$ .

## 2.2. Audio Encoding

For all experiments, we utilize a modified version of Music Tagging Transformer [16] as our audio encoder. The first four convolution

layers capture local acoustic features and the following four transformer layers summarize the sequence. The output of convolutional layers (audio sequence) attaches [CLS] token at the first position, and the output of the last layer of the transformer at the [CLS] token is treated as the feature that represents the whole audio. It is, finally, linearly projected into an embedding space. We use mel spectrograms as input without any augmentation.

## 2.3. Text Encoding

We use tag and sentence text representation for input of the text encoders. For this, we use a pre-trained word embedding GloVe [21] and a pre-trained Bidirectional Encoder Transformer (BERT) [22] with a base-uncased architecture. In using both text encoders, tag and sentence representations are processed differently. The tag representation uniformly samples one tag among multi-label texts. The sentence representation uses the entire multi-label text by concatenating multi-label text. In the case of the GloVe model, the sentence text is tokenized by white space, and projected to joint embedding space, then average the sentence embedding sequence<sup>3</sup>. In the case of BERT model, the input text sequence is tokenized by wordpiece tokenizer, and the max sequence length is 64. Similar to audio feature embedding, the text sequence attaches [SOS] token at first position and the output of the last layer of the transformer at the [SOS] token are treated as the feature representation of the text which is layer normalized and then linearly projected embedding space.

## 2.4. Stochastic Text Representation

In the preliminary study, we find that there is a strong association between text representation (train stage) and text query types (test stage). As somewhat obviously, the model works better when the input forms during the training phase and test phase are homogeneous, there are no references studying the relationship between text representation and retrieval performance. To use the advantages of both, we propose a stochastic text representation. During the training stage, we select  $K$  words from  $L$  length text sentence. At this time,  $K$  is uniformly randomly sampled among integer numbers from 1 (word length) to  $L$  (sentence length). Unlike the dropout method, which determines the length by probability value, stochastic sampling has a dynamic input length.

## 3. EXPERIMENT

### 3.1. Music-Text Pair Dataset (ECALS)

With the growing interest in sentence-level retrieval tasks [14, 15], it is desirable to have a music-caption paired dataset. However, no dataset is available for re-implementation. To address this problem, we concatenate the tag from different annotation sources. Based on

<sup>3</sup>We tested early fusion and late fusion of word embedding, but there was no significant difference in the results.

Model Type	Text Enc.	Text Rep.	Used In	Tag-level Retrieval		Sentence-level Retrieval				
				50 Tags	1054 Tags	1000 Captions				
				ROC/PR	ROC/PR	R@1	R@5	R@10	mAP10	MedR↓
Classification	Binary	Tag	[9, 16, 4]	90.2 / 39.5	<b>86.4 / 8.8</b>	4.0	13.8	20.1	8.3	86
Triplet	GloVe	Tag	[10, 11]	89.2 / 36.0	82.6 / 6.1	2.8	11.2	18.6	6.6	51.5
Triplet	GloVe	Sentence	Ours	88.6 / 37.1	76.8 / 5.3	5.4	22.1	35.0	13.0	17
Triplet	GloVe	Stochastic	Ours	89.2 / 37.6	81.6 / 6.2	6.4	21.8	32.7	12.8	19.5
Triplet	BERT <sub>base</sub>	Tag	Ours	86.9 / 30.2	81.7 / 5.1	1.6	6.2	12.0	3.9	68
Triplet	BERT <sub>base</sub>	Sentence	[12]	87.7 / 35.0	78.8 / 5.4	6.7	23.6	36.6	14.1	16
Triplet	BERT <sub>base</sub>	Stochastic	Ours	88.4 / 35.0	83.6 / 6.3	6.6	25.1	39.4	14.6	16
Contrastive	BERT <sub>base</sub>	Tag	Ours	<b>90.6 / 40.2</b>	<b>86.4 / 8.8</b>	2.5	13.7	22.5	7.4	47
Contrastive	BERT <sub>base</sub>	Sentence	[15, 14]	87.0 / 32.5	77.6 / 5.1	6.8	25.4	38.4	15.3	17
Contrastive	BERT <sub>base</sub>	Stochastic	Ours	89.8 / 38.0	84.8 / 7.7	<b>10.2</b>	<b>29.8</b>	<b>42.8</b>	<b>18.7</b>	<b>13</b>

**Table 2.** Tag based, and Sentence based Retrieval result. **Used In** refers to previous studies using the same method.

Dataset	Task	# of Track	# of Tag	Avg.Tag	Metric
MTAT	Tagging	25,860	50	2.70	ROC/PR
MTG-top50s	Tagging	54,380	50	3.07	ROC/PR
MTG-G	Genre	55,000	87	2.44	ROC/PR
FMA-Small	Genre	8,000	8	1.00	ACC
GTZAN	Genre	930	10	1.00	ACC
MTG-I	Instrument	24,976	40	2.57	ROC/PR
KVT	Vocal	6,787	42	22.78	F1
MTG-MT	Mood/Theme	17,982	56	1.77	ROC/PR
Emotify	Mood	400	9	1.00	ACC

**Table 3.** Downstream tasks/datasets for music semantic

Million Song Dataset (MSD) [23], we propose the ECALS (Extended Clean tag and Artist-Level Stratified) subset by merging the CALS subset [16] with 500 Last.fm tags [11] and 1,402 AllMusic [24] tag annotation. As a result, the ECALS subset has 0.52 million 30-second clips and 140k unique tag captions, including genre, style, instrument/vocal, mood/theme, and culture categories. Table 1 shows the size and statistics of the MSD subset. The test track of the ECALS subset is the same as the CALS subset, and only the train, validation track, and annotation tags have been increased. Using the ECALS dataset, we evaluate tag-level and sentence-level retrieval tasks.

### 3.2. Evaluation Dataset

For unseen-query retrieval and downstream evaluation, we select various datasets related to music semantic understanding. The selection criteria are as follows: if a dataset has 1) commercial music for retrieval, 2) publicly assessed (at least upon request) and 3) categorical single or multi-label annotations for supporting text-based retrieval scenarios. We summarize all the datasets and tasks in Table 3. MagnaTagATune (MTAT) [25] consists of 26k music clips from 5,223 unique songs. Following a previous work [26, 14], we use their published splits and top 50 tags. We do not compare the result with previous works using different split [15, 27]. MTG-Jamendo (MTG) [28] contains 55,000 full audio tracks with 195 tags about genre, instrument, and mood/theme. We use the official splits (*split-0*) in each category for tagging, genre, instrument, and mood/theme tasks. For single-label genre classification, we use the fault-filtered version of GTZAN (GZ) [29] and the ‘small’ version of Free Music Archive [30] (FMA-Small). For the vocal attribute recognition task, we use K-pop Vocal Tag (KVT) dataset [31]. It consists of 6,787 vocal segments from K-pop music tracks. All the segments are annotated with 42 semantic tags describing various vocal styles including pitch range, timbre, playing techniques, and gender. For the cate-

gorical mood recognition task, we use the Emotify dataset [32]. It consists of 400 excerpts in 4 genres with 9 emotional categories.

### 3.3. Evaluation

**Text-based Retrieval** Depending on the type of input query, text-based music retrieval is divided into tag-level and sentence-level. Since the evaluation of tag-level retrieval is the same as label-wise evaluation of the auto-tagging task, we use the conventional macro version of ROCAUC and PRAUC metrics [10, 11]. We report both evaluation results on the top 50 vocabularies of CALS [16] and the 1054 large vocabularies of ECALS<sup>4</sup>. For the evaluation of sentence-level retrieval, we build an audio-sentence subset by randomly sampling 1000 (audio, sentence) pairs from our testing split. Following the previous work [27], the sentence-level retrieval performance is evaluated by measuring Recall at K (K=1,5,10), mean average Precision at 10 (mAP10), and Median Rank (MedR). In case of the classification model, we annotate multi-label tags on the music items with the best f1 score thresholds. And we perform sentence-level retrieval on the frequency of words overlapping with the sentence query.

**Zero-shot Transfer and Probing** For evaluation of unseen query retrieval and generalization ability, we measure the zero-shot transfer and probing performance, respectively. The zero-shot transfer measures the prediction score as the cosine similarity between the audio embedding of music and the text embedding of unseen tag [33]. For the probing task, we trained two shallow classifiers (linear models and one-layer MLPs) with the average pooled embedding from the frozen audio encoder. For rigorous comparison, we follow the probing protocol of previous studies [27, 26].

### 3.4. Training Details

The input to the audio encoder is a 9.91-second audio signal at 16 kHz sampling rate. It is converted to a log-scaled mel spectrogram with 128 mel bins, 1024-point FFT with a hann window, and a hop size of 10 ms. During training, we randomly sample audio chunk from 30 seconds of the waveform. All models are optimized using Adam and use a 64-batch size. We use different learning rates for text encoders. The models that do not use the text encoder (classification and triplet-GloVe) were trained with a learning rate of 1e-3. The models with the BERT text encoder were with a learning rate of 5e-5. Contrastive-loss models were trained with a 0.2 temperature  $\tau$ , and triplet-loss models are with a 0.4 margin  $\delta$ .

<sup>4</sup>Since ECALS includes all tags of CALS, both cases can be evaluated with one ECALS pre-trained model

Model Type	Text Enc.	Text Rep.	Tagging		Genre			Mood/Theme		Instrument/Vocal	
			MTAT ROC/PR	MTG-Top50s ROC/PR	MTG-G ROC/PR	GZ ACC	FMA ACC	MTG-MT ROC/PR	Emot ACC	MTG-I ROC/PR	KVT F1
<i>Zero-shot Transfer:</i>											
Classification	Binary	Tag	-	-	-	-	-	-	-	-	-
Triplet	GloVe	Tag	75.45 / 19.77	74.21 / 22.34	80.42 / 14.52	86.21	44.88	63.58 / 6.42	21.25	55.85 / 9.04	68.96
Triplet	GloVe	Sentence	72.08 / 18.24	73.55 / 22.89	79.79 / 15.14	86.90	<b>48.12</b>	61.28 / 5.87	11.25	55.50 / 9.16	68.98
Triplet	GloVe	Stochastic	72.96 / 18.39	74.51 / 22.74	81.17 / 14.93	87.24	45.75	63.36 / 6.79	10.00	54.95 / 9.05	69.03
Triplet	BERT <sub>base</sub>	Tag	74.41 / 17.60	74.34 / 20.91	79.87 / 13.03	77.59	39.00	63.69 / 6.88	21.25	54.37 / 9.20	69.14
Triplet	BERT <sub>base</sub>	Sentence	73.21 / 18.82	75.69 / 22.83	81.55 / 14.97	85.86	39.38	59.65 / 6.59	15.00	57.73 / 9.44	69.96
Triplet	BERT <sub>base</sub>	Stochastic	74.83 / 19.85	75.67 / 23.10	80.66 / 14.89	87.24	41.38	65.88 / 7.70	27.50	59.84 / 10.38	69.98
Contrastive	BERT <sub>base</sub>	Tag	77.34 / <b>21.96</b>	<b>76.39 / 24.48</b>	<b>81.76 / 16.85</b>	<b>89.31</b>	47.38	<b>66.86 / 8.67</b>	17.50	60.95 / <b>11.40</b>	<b>70.43</b>
Contrastive	BERT <sub>base</sub>	Sentence	74.22 / 19.49	75.56 / 21.55	81.56 / 14.39	78.97	39.38	62.32 / 6.52	18.75	<b>61.40</b> / 10.20	69.95
Contrastive	BERT <sub>base</sub>	Stochastic	<b>78.41</b> / 21.23	76.14 / 23.60	81.19 / 15.57	87.93	45.12	65.66 / 8.09	<b>33.75</b>	60.64 / 11.26	70.35
State-of-the-art [14, 33]			78.2 / -	-	-	73.1	-	-	-	-	-
<i>Probing:</i>											
Classification	Binary	Tag	89.72 / 35.54	82.66 / 28.78	87.01 / 18.44	88.97	59.25	75.09 / 13.31	46.25	76.09 / 18.41	74.52
Triplet	GloVe	Tag	89.62 / 35.64	82.09 / 28.64	86.45 / 18.38	88.62	58.13	73.91 / 12.64	48.75	75.73 / 17.87	73.69
Triplet	GloVe	Sentence	89.67 / 35.58	82.38 / 28.82	86.51 / 18.54	<b>89.31</b>	58.25	74.17 / 12.75	48.75	75.74 / 17.79	74.38
Triplet	GloVe	Stochastic	89.07 / 34.08	82.11 / 28.24	86.74 / 18.35	<b>89.31</b>	55.62	74.67 / 12.61	51.25	75.82 / 17.93	73.96
Triplet	BERT <sub>base</sub>	Tag	89.28 / 34.44	81.56 / 26.74	85.38 / 16.67	84.48	54.87	73.53 / 11.87	47.50	72.89 / 17.39	73.62
Triplet	BERT <sub>base</sub>	Sentence	89.63 / 35.12	82.13 / 28.02	86.24 / 17.81	88.62	57.75	74.71 / 12.79	48.75	75.2 / 17.48	74.19
Triplet	BERT <sub>base</sub>	Stochastic	89.45 / 34.60	81.95 / 27.91	86.20 / 18.00	86.90	57.75	74.35 / 12.19	<b>52.50</b>	74.01 / 17.24	74.08
Contrastive	BERT <sub>base</sub>	Tag	90.95 / 38.08	<b>83.10 / 29.75</b>	<b>87.52 / 19.88</b>	<b>89.31</b>	58.50	75.64 / 14.19	46.25	<b>76.83 / 18.83</b>	<b>75.49</b>
Contrastive	BERT <sub>base</sub>	Sentence	90.34 / 37.39	82.29 / 27.95	86.34 / 17.64	85.17	57.75	74.77 / 13.11	48.75	73.72 / 17.4	74.70
Contrastive	BERT <sub>base</sub>	Stochastic	<b>91.11 / 38.37</b>	82.87 / 29.74	87.50 / 19.57	88.97	<b>60.00</b>	<b>76.25 / 13.95</b>	48.75	76.65 / 18.98	75.31
State-of-the-art [14, 34, 35, 34, 27, 35, 34, 18]			92.7 / -	84.3 / 32.1	87.7 / 20.3	83.5	61.1	78.6 / 16.1	-	78.8 / 20.2	74.7

Table 4. Zero-shot Transfer and Probing Evaluation.

## 4. RESULTS

Table 2 shows the retrieval performances of different models using tag-level and sentence-level inputs. Firstly, the classification model is a competitive baseline for tag-based retrieval (Table 2-left). Although the model cannot generalize to unseen tags (even if they are synonyms or acronyms), the classification model is a reliable solution when abundant music tags are available for training. However, the classification model could not handle sentence-level inputs because it’s only trained with tag-level queries due to its inherent design.

The pre-trained language model is versatile enough to handle both tag-level and sentence-level inputs. The pre-trained word embedding could also take sentence-level inputs by averaging the word embeddings, but the performance is not comparable. One possible reason is that the language model can summarize the sequence better than simple averaging. Another possible explanation is that the language model (BERT) was trained with larger data than the word embedding. Our proposed stochastic sampling approach further improves the performance when it’s applied to the text encoder.

Contrastive learning consistently showed better retrieval performance than triplet approaches in tag-level and sentence-level inputs, although we used elaborated negative sampling. We interpret that larger negative sampling from a batch is more suitable than triplet sampling in retrieval tasks. In summary, contrastive learning of text-music representation using a pre-trained language model and stochastic sampling achieved the best retrieval performance.

We report the zero-shot transfer and probing results in Table 4. Similar to the retrieval task, the contrastive-loss model in the zero-shot transfer task showed robust performance in almost all datasets. Compared to recent text-music representation learning approaches [33, 15, 14], we see that contrastive-loss models achieve competitive results and show significant improvements on the MTAT and GTZAN dataset. All probing results of contrastive-loss models are close to the state-of-the-art performance and achieve state-of-the-art performance on GTZAN and KVT datasets.

We also believe the inclusion of large-scale data can improve the performance. Recent multimodal representation learning approaches [20] have shown breakthrough in many domains by taking advantage of enormous data from the web. A similar trend is found in our downstream evaluation. Contrastive learning of text-music representation using 44 million data [14] significantly outperforms other approaches trained with 0.5 to 3.3 million dataset [26, 34, 35] in MTAT tagging. Unfortunately, MTAT was the only common dataset with reported performance across various previous works.

## 5. CONCLUSION

In this paper, we introduced effective design choices for universal text-to-music retrieval. Recent text-music representation learning frameworks are assessed by using a carefully designed dataset and downstream tasks. We mainly focused on training objectives and text representation. Experimental results revealed that retrieval performance heavily depends on text representation. And contrastive models achieve better performance than triplet models in both retrieval and downstream tasks. Furthermore, our proposed stochastic text representation achieved robust performance in tag-level, caption-level, and zero-shot query retrieval cases. However, our current dataset is limited to music tags, such as genre, mood, and instrument. A more generalizable music retrieval system needs to cover other musical attributes, such as the tempo, key, chord progression, melody, artist, etc. To overcome the limitations of annotated labels, multi-task learning of multiple datasets or a teacher-student model can be an alternative. Reproducible code, pre-trained models <sup>5</sup>, dataset <sup>6</sup> and the proposed benchmark <sup>7</sup> are available online for future research.

<sup>5</sup><https://github.com/seungeondoh/music-text-representation>

<sup>6</sup><https://github.com/seungeondoh/msd-subsets>

<sup>7</sup><https://github.com/seungeondoh/msu-benchmark>

## 6. REFERENCES

- [1] Asif Ghias, Jonathan Logan, David Chamberlin, and Brian C Smith, “Query by humming: Musical information retrieval in an audio database,” in *Proceedings of the third ACM international conference on Multimedia*, 1995, pp. 231–236.
- [2] Meinard Müller, Frank Kurth, David Damm, Christian Fremer, and Michael Clausen, “Lyrics-based audio retrieval and multimodal navigation in music collections,” in *International conference on theory and practice of digital libraries*, 2007.
- [3] Kento Watanabe and Masataka Goto, “Query-by-blending: A music exploration system blending latent vector representations of lyric word, song audio, and artist,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2019.
- [4] Jongpil Lee, Nicholas J Bryan, Justin Salamon, Zeyu Jin, and Juhan Nam, “Metric learning vs classification for disentangled music representation learning,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2020.
- [5] Douglas Turnbull, Luke Barrington, David Torres, and Gert Lanckriet, “Semantic annotation and retrieval of music and sound effects,” *IEEE Transactions on Audio, Speech, and Language Processing*, 2008.
- [6] Juhan Nam, Keunwoo Choi, Jongpil Lee, Szu-Yu Chou, and Yi-Hsuan Yang, “Deep learning for audio-based music classification and tagging: Teaching computers to distinguish rock from bach,” *IEEE signal processing magazine*, 2018.
- [7] Minz Won, Andres Ferraro, Dmitry Bogdanov, and Xavier Serra, “Evaluation of cnn-based automatic music tagging models,” in *Sound and Music Computing*, 2020.
- [8] Alex Sciuto, Arnita Saini, Jodi Forlizzi, and Jason I Hong, ““hey alexa, what’s up?” a mixed-methods studies of in-home conversational agent usage,” in *Proceedings of the designing interactive systems conference*, 2018.
- [9] Keunwoo Choi, George Fazekas, and Mark Sandler, “Automatic tagging using deep convolutional neural networks,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2016.
- [10] Jeong Choi, Jongpil Lee, Jiyoung Park, and Juhan Nam, “Zero-shot learning for audio-based music classification and tagging,” in *Proc. International Society for Music Information Retrieval Conference (ISMIR)*, 2019.
- [11] Minz Won, Sergio Oramas, Oriol Nieto, Fabien Gouyon, and Xavier Serra, “Multimodal metric learning for tag-based music retrieval,” in *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2020.
- [12] Minz. Won, Justin. Salamon, Nicholas J. Bryan, Gautham J. Mysore, and Xavier. Serra, “Emotion embedding spaces for matching music to stories,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2021.
- [13] Tianyu Chen, Yuan Xie, Shuai Zhang, Shaohan Huang, Haoyi Zhou, and Jianxin Li, “Learning music sequence representation from text supervision,” in *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2022.
- [14] Qingqing Huang, Aren Jansen, Joonseok Lee, Ravi Ganti, Judith Yue Li, and Daniel PW Ellis, “Mulan: A joint embedding of music audio and natural language,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2022.
- [15] Ilaria Manco, Emmanouil Benetos, Elio Quinton, and György Fazekas, “Contrastive audio-language learning for music,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2022.
- [16] Minz Won, Keunwoo Choi, and Xavier Serra, “Semi-supervised music tagging transformer,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2021.
- [17] Liwei Wang, Yin Li, and Svetlana Lazebnik, “Learning deep structure-preserving image-text embeddings,” in *Proceedings of the computer vision and pattern recognition, CVPR*, 2016.
- [18] Keunhyoung Kim, Jongpil Lee, Sangeun Kum, and Juhan Nam, “Learning a cross-domain embedding space of vocal and mixed audio with a structure-preserving triplet loss,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2021.
- [19] Aaron van den Oord, Yazhe Li, and Oriol Vinyals, “Representation learning with contrastive predictive coding,” *arXiv preprint arXiv:1807.03748*, 2018.
- [20] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al., “Learning transferable visual models from natural language supervision,” in *International Conference on Machine Learning (ICML)*, 2021.
- [21] Jeffrey Pennington, Richard Socher, and Christopher D Manning, “Glove: Global vectors for word representation,” in *Proceedings of the conference on empirical methods in natural language processing, EMNLP*, 2014.
- [22] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova, “Bert: Pre-training of deep bidirectional transformers for language understanding,” in *Proceedings of NAACL-HLT*, 2018.
- [23] Thierry Bertin-Mahieux, Daniel P.W. Ellis, Brian Whitman, and Paul Lamere, “The million song dataset,” in *Proc. International Society for Music Information Retrieval Conference (ISMIR)*, 2011.
- [24] Alexander Schindler and Peter Knees, “Multi-task music representation learning from multi-label embeddings,” in *International Conference on Content-Based Multimedia Indexing (CBMI)*, 2019.
- [25] Edith Law, Kris West, Michael I Mandel, Mert Bay, and J Stephen Downie, “Evaluation of algorithms using games: The case of music tagging,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2009.
- [26] Rodrigo Castellon, Chris Donahue, and Percy Liang, “Codified audio language modeling learns useful representations for music information retrieval,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2021.
- [27] Ilaria Manco, Emmanouil Benetos, Elio Quinton, and György Fazekas, “Learning music audio representations via weak language supervision,” in *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2022.
- [28] Dmitry Bogdanov, Minz Won, Philip Tovstogan, Alastair Porter, and Xavier Serra, “The mtg-jamendo dataset for automatic music tagging,” in *Machine Learning for Music Discovery Workshop, International Conference on Machine Learning (ICML 2019)*, Long Beach, CA, United States, 2019.

- [29] Bob L Sturm, “The gtzan dataset: Its contents, its faults, their effects on evaluation, and its future use,” *arXiv preprint arXiv:1306.1461*, 2013.
- [30] Michaël Defferrard, Kirell Benzi, Pierre Vandergheynst, and Xavier Bresson, “Fma: A dataset for music analysis,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2016.
- [31] Keunhyoung Luke Kim, Jongpil Lee, Sangeun Kum, Chae Lin Park, and Juhan Nam, “Semantic tagging of singing voices in popular music recordings,” *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 2020.
- [32] Anna Aljanaki, Frans Wiering, and Remco C Veltkamp, “Studying emotion induced by music through a crowdsourcing game,” *Information Processing & Management*, 2016.
- [33] Jeong Choi, Jongpil Lee, Jiyoung Park, and Juhan Nam, “Zero-shot learning and knowledge transfer in music classification and tagging,” *arXiv preprint arXiv:1906.08615*, 2019.
- [34] Pablo Alonso-Jiménez, Xavier Serra, and Dmitry Bogdanov, “Music representation learning based on editorial metadata from discogs,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2022.
- [35] Matthew C McCallum, Filip Korzeniowski, Sergio Oramas, Fabien Gouyon, and Andreas F Ehmann, “Supervised and unsupervised learning of audio representations for music understanding,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2022.
- [36] Shawn Hershey, Sourish Chaudhuri, Daniel PW Ellis, Jort F Gemmeke, Aren Jansen, R Channing Moore, Manoj Plakal, Devin Platt, Rif A Saurous, Bryan Seybold, et al., “Cnn architectures for large-scale audio classification,” in *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2017.
- [37] George Tzanetakis and Perry Cook, “Musical genre classification of audio signals,” *IEEE Transactions on Speech and Audio Processing*, 2002.
- [38] Jordi Pons, Oriol Nieto, Matthew Prockup, Erik M. Schmidt, Andreas F. Ehmann, and Xavier Serra, “End-to-end learning for music audio tagging at scale,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2018.
- [39] Aäron Van Den Oord, Sander Dieleman, and Benjamin Schrauwen, “Transfer learning by supervised pre-training for audio-based music classification,” in *International Society for Music Information Retrieval Conference (ISMIR)*, 2014.
- [40] Guillaume Alain and Yoshua Bengio, “Understanding intermediate layers using linear classifier probes,” *arXiv preprint arXiv:1610.01644*, 2016.
- [41] Leland McInnes, John Healy, and James Melville, “Umap: Uniform manifold approximation and projection for dimension reduction,” *arXiv preprint arXiv:1802.03426*, 2018.

## A. SUPPLEMENT MATERIAL

In this section, we provide additional details of the presented experiments including a list of the datasets, models, and qualitative and quantitative results.

### A.1. ECALS Datasheet

We perform tag- and sentence-level retrieval evaluation using the ECALS (Extended Clean tag and Artist-Level Stratified) dataset. As introduced in 3.1, the ECALS dataset is proposed based on the Million Song Dataset (MSD) [23]. The MSD is a collection of metadata and audio features of 1 million tracks. The extended Last.fm annotation provides tags of more than 500,000 songs with 522,366 distinct tags whose distribution follows a long tail distribution. There are multiple MSD subsets depending on the post processing. The top50s subset [9, 6] consists of top-50 popular tags including genre, mood, instrument, vocal, and decade. Later, the CALS [16] subset was proposed to solve the artist information leakage problem of the top50s subset. However, due to the small vocabulary, the two subsets were not suitable for caption-level text representation. To address this problem, we propose ECALS (Extended Clean tag and Artist-Level Stratified) subset. ECALS was created by merging the CALS subset with 500 Last.fm tags [11] and 1,402 AllMusic [24] tag annotation. The ECALS subset has 0.52 million 30-second clips and 140k unique tag captions. The advantage of merging multiple datasets is covering larger multiple tag categories including genre, style, instrument, vocal, mood, theme, and culture.

### A.2. Downstream Dataset

For downstream evaluation, we use multiple heterogeneous datasets. Each dataset has been actively used for assessing generalizability of pretrained models [34, 35].

**MagnaTagATune (MTAT)** [25] consists of 26k music clips from 5,223 unique songs. This dataset has two splits<sup>89</sup> depending on the inclusion or deletion of audio segments without any associated tags. In Table 3, we choose one split as previous works [26, 14]. However, if only one split is used, comparison with previous works [15, 27] is impossible. To solve this problem, we compare our frameworks on both splits in Table 5.

**MTG-Jamendo (MTG)** [28] contains 55,000 full-length audio tracks with 195 tags from the Jamendo music platform. All tags are annotated by categories such as genre, instrument, and mood/theme. We use an official split (*split-0*) in each category.

**GTZAN (GZ)** [37] contains 30-second clips from 10 distinct genres for a single-label multi-class classification. We employ the fault-filtered version of this dataset [29]<sup>10</sup>.

**FMA (FMA-Small)** [30] is a large-scale public dataset with a rich set of metadata (e.g. tag, artist, .etc), user data, audio, and features. For evaluation, we use the Small subset of FMA, which contains 8,000 tracks and 8 genre tags: *Hip-Hop, Pop, Folk, Experimental, Rock, International, Electronic, and Instrumental*.

**Emotify (Emoti)** [32] consists of 400 music excerpts in 4 genres such as rock, classical, pop, and electronic. The annotations were

<sup>8</sup><https://github.com/jordipons/musicnn-training/tree/master/data/index/mtt>

<sup>9</sup>[https://github.com/jongpillee/music\\_dataset\\_split/tree/master/MTAT\\_split](https://github.com/jongpillee/music_dataset_split/tree/master/MTAT_split)

<sup>10</sup>[https://github.com/jongpillee/music\\_dataset\\_split/tree/master/GTZAN\\_split](https://github.com/jongpillee/music_dataset_split/tree/master/GTZAN_split)

Model	Loss	Audio Enc.	Text Enc.	Text Rep.	Pretrain-Dataset	MTAT <sup>b</sup> ROC/PR	MTAT <sup>#</sup> ROC/PR	GZ ACC
<i>Zeroshot Transfer:</i>								
Choi et al [10]	Triplet	ID CNN	GloVe	Tag	MSD <sub>ZSL</sub> (0.41M)	-	73.9 / - - -	73.1
MusCALL <sub>base</sub> [15]	Contrastive	ResNet	SenBERT	Sentence	Production Music (0.25M)	-	78.0 / 28.3	55.5
MusCALL <sub>ssl</sub> [15]	Contrastive	ResNet	SenBERT	Sentence	Production Music (0.25M)	-	77.4 / <b>29.3</b>	58.2
MuLan [14]	Contrastive	ResNet	BERT <sub>base</sub>	Sentence	Youtube Music (44M)	78.2 / - - -	-	-
<b>Ours</b>	Contrastive	Transformer	BERT <sub>base</sub>	Stochastic	MSD <sub>ECALS</sub> (0.52M)	<b>78.4</b> / 21.2	<b>78.7</b> / 25.2	<b>87.9</b>
<i>Probing:</i>								
MuLaP [27]	Alignment, MM	Musicnn	BERT <sub>base</sub>	Sentence	Production Music (0.25M)	-	89.3 / 40.2	-
MuLan [14]	Contrastive	ResNet	BERT <sub>base</sub>	Sentence	Youtube Music (44M)	<b>92.7</b> / - - -	-	-
<b>Ours</b>	Contrastive	Transformer	BERT <sub>base</sub>	Stochastic	MSD <sub>ECALS</sub> (0.52M)	91.1 / 38.4	<b>91.7</b> / <b>46.1</b>	<b>89.0</b>

**Table 5.** Comparisons to the state-of-the-art of Music-Langauge Representations. **MM** stands for intra-modality Masked Modelling.

Model Type	Pretrain-Dataset	Tagging		Genre			Mood/Theme		Inst/vocal	
		MTAT <sup>b</sup> ROC/PR	MTG-top50s ROC/PR	MTG-G ROC/PR	GZ ACC	FMA ACC	MTG-M ROC/PR	Emoti ACC	MTG-I ROC/PR	KVT F1
<i>Baseline:</i>										
VGGish [34, 36]	YouTube Video (8M)	90.2 / 37.2	83.2 / 28.2	86.3 / 17.2	-	53.0	76.3 / 14.1	-	<b>78.8</b> / <b>20.2</b>	-
<i>Audio-Music Representation Learning:</i>										
CALM [26]	OpenAI (1.2M)	91.5 / 41.4	-	-	79.7	-	-	-	-	-
Discog-Artist [34]	Discog (3.3M)	90.7 / 38.0	83.6 / 30.6	<b>87.7</b> / <b>20.3</b>	-	59.1	76.3 / 14.3	-	69.7 / 16.9	-
Musicsup-Sup [35]	Musicsup (1.8M)	91.7 / 41.3	<b>84.3</b> / <b>32.1</b>	-	83.5	-	<b>78.6</b> / <b>16.1</b>	-	-	-
<i>Text-Music Representation Learning:</i>										
MuLap [27]	Production Music (0.25M)	-	82.6 / 27.3	85.9 / -	-	<b>61.1</b>	76.1 / -	-	76.8 / -	-
MuLan [14]	Youtube Music (44M)	<b>92.7</b> / -	-	-	-	-	-	-	-	-
<b>Ours</b>	MSD <sub>ECALS</sub> (0.52M)	91.1 / 38.4	82.9 / 29.7	87.5 / 19.6	<b>89.0</b>	60.0	76.3 / 14.0	48.8	76.7 / 19.0	75.3

**Table 6.** Comparisons to the state-of-the-art **Probing** performance of Music Representation Learnings.

collected using Geneva Emotional Music Scales (GEMS)<sup>11</sup>. We use categorical nine emotion words: *Amazement, Solemnity, Tenderness, Nostalgia, Calmness, Power, Joyful, Tension, and Sadness*.


**K-pop Vocal Tag (KVT)** [31] consists of 6,787 vocal segments from K-pop music tracks<sup>12</sup>. They are annotated with 42 semantic tags which describe various vocal characteristics in the categories of pitch range, timbre, playing techniques, and gender.

### A.3. Comparison of Text-Music Representation Learning

Table 5 shows the zero-shot transfer and probing performance of state-of-the-art (SoTA) text-music representations. For a clear comparison, we use a different split (MTAT<sup>#</sup>) [7, 15, 27] as well as the split used in the paper (MATA<sup>b</sup>) [14, 35, 34]. As mentioned before, our approach shows SoTA performance on both MTAT<sup>b</sup> and GTZAN datasets except PRAUC score on MTAT<sup>#</sup>. We believe that this is due to the difference in the text representation. The models trained with the MSD dataset (Ours and [10]) perform better on multi-class genre classification (GTZAN) regardless of modality encoder and training objectives. This indicates that text representation is a critical element of the text-music representation learning framework. In the case of MTAT<sup>#</sup>, which is a multi-label task, the model [27] trained with expert annotation caption of production music shows a higher PRAUC score (25.2→29.3). Compared to the model trained on the 44M youtube dataset [14], our proposed model slightly outperforms on zero-shot transfer performance but performs significantly worse in the probing task. This is because the quality and size of the dataset are critical for the high-level music semantic task.

<sup>11</sup><http://www2.projects.science.uu.nl/memotion/emotifydata>

<sup>12</sup><https://khlukkekim.github.io/kvtdataset/>

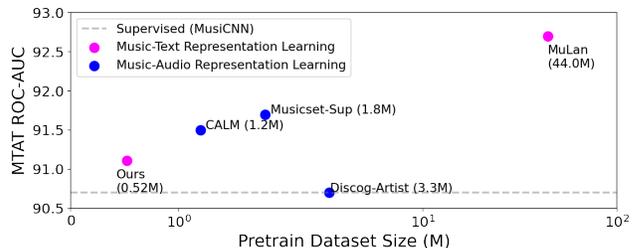

**Fig. 2.** MTAT ROC-AUC performance of state-of-the-arts model

### A.4. Comparison of State-of-the-art-models

Table 6 shows the probing performance of various music representations. Following the previous work [34], we select the pre-trained VGGish model [36] as a baseline. The large-scale music domain dataset outperformed the baseline in high-level semantic tasks (general tagging, genre, mood) regardless of the training framework. The baseline model performed better in the relatively low-level semantic task (instrument). It is expected since the datasets used in pretraining (MSD, Discog, Production Music) consist of only multi-track recordings while YouTube videos contain both single- and multi-track instrument data.

In Figure 2, we show the MTAT<sup>b</sup> ROC-AUC results of different music representation learning models. Our 0.5M ECALS pre-trained model outperforms the supervised MusiCNN [38] baseline and the 3.3M Discog pre-trained model [34]. This shows that our proposed approach is efficient with the relatively small size of pre-

Model Type	Text Enc.	Text Rep.	Tagging		Genre			Mood/Theme		Inst/vocal	
			MATA <sup>p</sup> ROC/PR	MTG-top50s ROC/PR	MTG-G ROC/PR	GZ ACC	FMA ACC	MTG-M ROC/PR	Emoti ACC	MTG-I ROC/PR	KVT F1
<i>Linear Probing:</i>											
Classification	Binary	Tag	88.35 / 33.81	82.13 / 27.63	86.28 / 17.41	88.28	58.63	74.06 / 12.76	46.25	75.42 / 18.15	74.38
Triplet	GloVe	Tag	88.07 / 33.83	81.32 / 27.42	85.85 / 17.53	88.97	56.75	73.08 / 11.98	51.25	73.15 / 16.78	73.64
Triplet	GloVe	Sentence	88.28 / 33.66	81.83 / 27.80	86.21 / 17.81	88.97	56.62	73.59 / 12.40	52.50	74.63 / 17.23	74.21
Triplet	GloVe	Stochastic	87.37 / 32.22	81.84 / 27.36	86.20 / 17.65	89.31	54.75	73.92 / 11.62	51.25	73.49 / 16.84	73.91
Triplet	BERT <sub>base</sub>	Tag	87.55 / 32.00	80.96 / 25.55	84.32 / 15.52	82.07	52.62	72.59 / 11.31	46.25	72.84 / 15.97	73.60
Triplet	BERT <sub>base</sub>	Sentence	88.50 / 34.02	81.72 / 26.92	85.75 / 17.22	88.97	54.75	74.06 / 12.34	50.00	74.45 / 17.13	74.07
Triplet	BERT <sub>base</sub>	Stochastic	87.89 / 33.42	81.51 / 26.68	85.60 / 17.11	88.28	56.38	73.57 / 11.80	48.75	72.83 / 16.81	74.26
Contrastive	BERT <sub>base</sub>	Tag	90.18 / 36.99	82.58 / 28.93	86.86 / 18.84	88.97	57.38	74.74 / 13.50	50.00	76.72 / 19.14	75.27
Contrastive	BERT <sub>base</sub>	Sentence	89.23 / 35.16	81.74 / 26.81	85.47 / 16.73	86.21	54.37	74.07 / 12.56	48.75	73.50 / 17.43	74.61
Contrastive	BERT <sub>base</sub>	Stochastic	90.35 / 37.37	82.71 / 28.74	86.60 / 18.69	89.31	56.50	75.17 / 13.41	47.50	74.89 / 18.71	75.13
<i>MLP Probing:</i>											
Classification	Binary	Tag	89.72 / 35.54	82.66 / 28.78	87.01 / 18.44	88.97	59.25	75.09 / 13.31	46.25	76.09 / 18.41	74.52
Triplet	GloVe	Tag	89.62 / 35.64	82.09 / 28.64	86.45 / 18.38	88.62	58.13	73.91 / 12.64	48.75	75.73 / 17.87	73.69
Triplet	GloVe	Sentence	89.67 / 35.58	82.38 / 28.82	86.51 / 18.54	89.31	58.25	74.17 / 12.75	48.75	75.74 / 17.79	74.38
Triplet	GloVe	Stochastic	89.07 / 34.08	81.11 / 28.24	86.74 / 18.35	89.31	55.62	74.67 / 12.61	51.25	75.82 / 17.93	73.96
Triplet	BERT <sub>base</sub>	Tag	89.28 / 34.44	81.56 / 26.74	85.38 / 16.67	84.48	54.87	73.53 / 11.87	47.50	72.89 / 17.39	73.62
Triplet	BERT <sub>base</sub>	Sentence	89.63 / 35.12	82.13 / 28.02	86.24 / 17.81	88.62	57.75	74.71 / 12.79	48.75	75.20 / 17.48	74.19
Triplet	BERT <sub>base</sub>	Stochastic	89.45 / 34.60	81.95 / 27.91	86.20 / 18.00	86.90	57.75	74.35 / 12.19	52.50	74.01 / 17.24	74.08
Contrastive	BERT <sub>base</sub>	Tag	90.95 / 38.08	83.10 / 29.75	87.52 / 19.88	89.31	58.50	75.64 / 14.19	46.25	76.83 / 18.83	75.49
Contrastive	BERT <sub>base</sub>	Sentence	90.34 / 37.39	82.29 / 27.95	86.34 / 17.64	85.17	57.75	74.77 / 13.11	48.75	73.72 / 17.40	74.70
Contrastive	BERT <sub>base</sub>	Stochastic	91.11 / 38.37	82.87 / 29.74	87.50 / 19.57	88.97	60.00	76.25 / 13.95	48.75	76.65 / 18.98	75.31

Table 7. Linear and MLP Probing Evaluation

trained dataset. MuLan [14], a text-music representation model with 44M Youtube music dataset, demonstrates impressive performance with a huge gap. It refers to the importance of the dataset size. However, the comparisons against these frameworks may be unreliable due to the differences in their training datasets, modality encoders, and data representations.

### A.5. Comparison between Linear and MLP Probing

In the probing task [39, 40], we take the audio features from the frozen encoder and fit a linear or multi-layer perceptron (MLP) classifier to predict the target classes. In Table 7, we report both classifier performance for *linear* and *non-linear* separability of audio features. Across all the categories of music semantics, MLP classifiers outperform linear classifiers. It is interpreted that *non-linearity* is more suitable for the music semantic understanding task, presumably because the music is multi-label data with higher-level semantic labels.

### A.6. Visualization

The multimodal embedding spaces are projected to a 2D space using uniform manifold approximation and projection (UMAP) [41]. We fit UMAP with music-audio, caption, and tag embeddings and then projected all embeddings (In Figure 3). For the dataset, ECALS 1000 audio-caption pairs and 1054 tags were used. The contrastive model shows a more significant gap between audio and text modality than the triplet models. However, it is difficult to find the correlation between the visualized distribution and the performance reported above (Table 2, Table 4, Table 7), Compared to the triplet model, the stochastic model shows a more entangled embedding space than other tag and caption models. In the second column, the caption-based model, it is interesting that the tag embeddings are isolated. This supports the example in the table above where caption models showed low performance in tag-based retrieval tasks. Contrary to this, caption and tag embeddings are mixed up in the tag-based model.

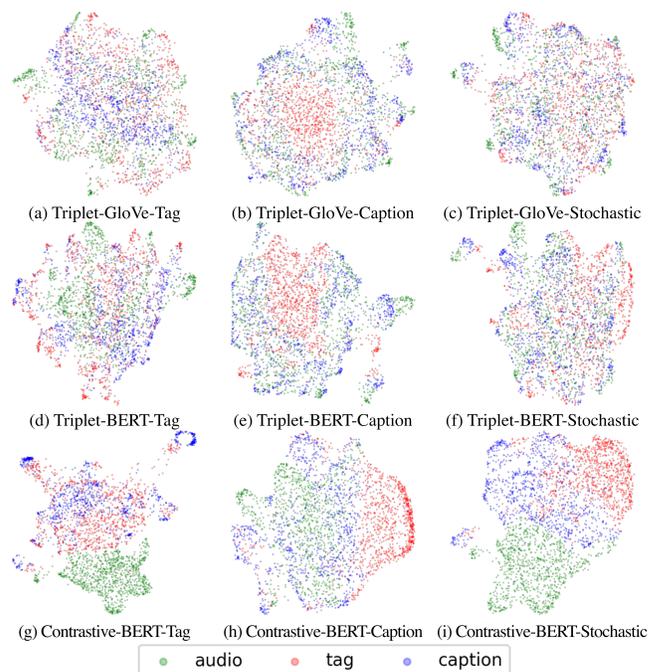


Fig. 3. UMAP visualization of audio-tag-caption joint embedding space. [First Row] Triplet framework with Glove word encoder. [Second Row] Triplet framework with BERT word encoder. [Third Row] Contrastive framework with BERT word encoder. Each column shows tag, caption, and stochastic text representation respectively.