DEMETRIS: Counting (near)-Cliques by Crawling

Extended version

Suman K.Bera* sumankalyanbera@gmail.com Katana Graph San Jose, CA, USA

Shahrzad Haddadan*

shahrzad.haddadan@gmail.com Data Science Initiative, Brown University Providence, RI, USA Rutgers Business School Piscataway, NJ, USA Jayesh Choudhari* choudhari.jayesh@alumni.iitgn.ac.in Cube Global Ltd. London, UK

> Sara Ahmadian sahmadian@google.com Google Research Mountain View, CA, USA

ABSTRACT

We study the problem of approximately counting *cliques* and *near cliques* in a graph, where the access to the graph is only available through crawling its vertices; thus typically seeing only a small portion of it. This model, known as the *random walk* model or the *neighborhood query* model has been introduced recently and captures real-life scenarios in which the entire graph is too massive to be stored as a whole or be scanned entirely and sampling vertices independently is non-trivial in it.

We introduce DEMETRIS: Dense Motif Estimation through Random Incident Sampling. This method provides a scalable algorithm for clique and near clique counting in the random walk model. We prove the correctness of our algorithm through rigorous mathematical analysis and extensive experiments. Both our theoretical results and our experiments show that DEMETRIS obtains a high precision estimation by only crawling a sub-linear portion on vertices, thus we demonstrate a significant improvement over previous known results.

CCS CONCEPTS

• Computer systems organization → Embedded systems; *Redundancy*; Robotics; • Networks → Network reliability.

KEYWORDS

motif counting, random walk, sublinear

ACM Reference Format:

Suman K.Bera, Jayesh Choudhari, Shahrzad Haddadan, and Sara Ahmadian. 2023. DEMETRIS: Counting (near)-Cliques by Crawling: Extended version. In Proceedings of the Sixteenth ACM International Conference on Web Search and Data Mining (WSDM '23), February 27–March 3, 2023, Singapore, Singapore. ACM, New York, NY, USA, 12 pages. https://doi.org/10.1145/3539597.3570438

 $WSDM~{\it '23, February~27-March~3,~2023, Singapore, Singapore.}$

1 INTRODUCTION

The subgraph counting problem (a.k.a the motif counting problem) asks for the number of copies of a small fixed subgraph (a.k.a motif) in a given large input graph. It has numerous applications in a wide variety of domains, such as, bioinformatics [3, 39, 46, 53], cyber security [37, 43, 55], and network analysis [18, 31, 32]. Naturally, this problem has been studied extensively by both the theoretical community [11, 23, 24, 36] and the practitioners [4, 7, 12, 22, 35, 36, 42, 49, 51, 58]. The clique counting and the near-clique counting are arguably the most studied variations of the subgraph counting problem [11, 20, 25, 28, 33, 36, 53].

Typically, most of these works' underlying model of computations assumes full access to the graph. Even for popular restrictedaccess models, such as distributed and streaming models, the underlying algorithms process information from the entire graph. Many works have also assumed the possibility of collecting independent samples from the set of vertices or edges, or querying an arbitrary edge or vertex (see section 1.3). However, in many real-world scenarios, these assumptions do not hold. The only tool available to the practitioners in such cases is crawling the graph through public APIs; some examples include accessing Facebook or Twitter graph via user access APIs [1, 2]. In these scenarios, basic statistics about the graph, such as the number of vertices or number of edges itself, is non-trivial to estimate [9, 17], let alone more complicated global properties such as clique or near clique counts. Our work takes up the challenging task of computing these global properties of the graph while looking at a tiny fraction of the graph via crawling.

To formalize the *access through crawling* notion, Chierichetti et al [16] introduced the *random walk access* model. This model is further explored in [8, 13, 17, 21].

The random walk (access) model. In this model, an algorithm has access to the input graph G = (V, E) through a *neighborhood query oracle O*. For any $v \in V$, O(v) returns the set of pointers to the neighbors of v in G. A typical crawling pattern for an algorithm starts from an arbitrary seed vertex $s \in V$; then using O(s) it obtains the neighborhood pointers and selects one of them uniformly at random to make further queries to O; thus, effectively simulating a random walk in G starting at s.

Each query to the neighborhood oracle is expensive. The main challenge is to design algorithms with as few queries as possible.

^{© 2023} Association for Computing Machinery.

This is the author's version of the work. It is posted here for your personal use. Not for redistribution. The definitive Version of Record was published in *Proceedings of the Sixteenth ACM International Conference on Web Search and Data Mining (WSDM '23), February 27–March 3, 2023, Singapore, Singapore,* https://doi.org/10.1145/3539597.3570438.

While some basic operations such as generating a uniform random vertex sample are proven to be costly in this model [17], there has been a few promising results in estimating simple statistics such as average degree [21], triangle counts [13] etc (see section 1.3). In our work, we continue the algorithmic exploration by considering a more complex global statistics estimation problem: counting copies of higher-order cliques and near-cliques. Formally, we provide a solution to the following problem.

PROBLEM 1. For a fixed clique or near clique ζ , design an algorithm in the random walk model to estimate the number of copies of ζ in a given input graph while optimizing the (sub-linear) number of queries made to the neighborhood oracle O.

1.1 Summary of Challenges

There are several fundamental challenges in tackling Problem 1. Some arise from the nature of the model, such as only local neighborhood access, lack of independent samples, etc. Others come from the nature of the problem: non-uniform distribution of the higher-order subgraphs in the graph leading to high variance in estimators. We summarize these challenges below.

(Challenge 1.) In the random walk model, sampling edges are cheaper than sampling vertices [17]. One can run a random walk to collect *almost* uniform random samples from *E*. However, the main challenge in obtaining theoretical guarantees for the usages of random walks (Markov chains) is that the samples generated by them are *NOT* independent. Thus it is essential to bound the co-variance of samples. In section 2.1.1 we present the necessary definitions and techniques required from the theory of Markov chains. An interested reader can find the complete discussion in [41].

(Challenge 2.) In order to count the number of copies of a motif ζ in a graph, some methods sample edges, and for each edge e, they count the copies of ζ which contain e. By using a unique assignment rule which maps each copy of ζ uniquely to one of its edges they avoid counting duplicates. This strategy leads to high query complexity in our model due to two main factors: (1) in order to find copies of ζ which contain e, we need to query all the neighborhood of both endpoints of e, (2) some edges in Emay be contained in no copy of ζ and some in a large number, say polynomial in |V| of them. Thus, the variance of the estimator will be large resulting in the need for a very large (potentially more than linear) number of queries. To circumvent this issue we use a technique known as hierarchical sampling which was initially proposed for the task of clique counting [26] in Goldreich model (see related work for a brief description of Goldriech model). In section 2.1.2 we explain this technique, and in section 3 we show how we adopt this technique to work for general motifs.

(Challenge 3.) The hierarchical sampling technique in [26] exploits the connection between the count of cliques in a graph with its arboricity (see Section 2.1.3). However, no such connections are known for the count of other motifs, making it more challenging to apply hierarchical sampling techniques directly. We overcome this by proving new combinatorial results for a family of dense subgraphs that we formalize as c-dense. This enables us to design provably efficient counting algorithms for c-dense in the random walk access model.

1.2 Summary of Our Contribution

The main contribution of our paper is a scalable algorithm in the random walk model to count cliques and near-cliques :Demetris-Dense Motif count EsTimation through Random Incident Sampling. Demetris comes with theoretical guarantees, and it is the first method whose query complexity is provably only *sub-linear* in the number of vertices and edges of the network. In practice, Demetris exhibits excellent accuracy while crawling a tiny part of the graph and significantly improves prior works.

Theoretical Results. We present our main theoretical result in theorem 1.1. To show the correctness of our methods we formalize c-dense graphs. For any c-dense motif we show the number of copies of it in a graph in terms of the graph's arboricity (lemma 2.4). This result can serve independent interests beyond its application here.

Definition 1.1 (c-dense motif). Consider motif ζ of size k. We say ζ is c-dense iff there is a way to divide it to induced connected submotifs $\zeta_{k-1}, \zeta_{k-2}, \ldots, \zeta_2$ such that, letting $\zeta_k = \zeta$, for each $2 \le i \le k$ the minimum degree of ζ_i is at least $i-1-c^{-1}$

Note that a *clique* is a (0)-dense graph, any clique missing an edge is a (1)-dense graph, an example for a (2)-dense graph with 5 vertices and 6 edges is presented in fig. 2.

THEOREM 1.1. Given ϵ , and c-dense motif ζ of size k, and let T be the number of copies of ζ in G. Setting l_i s as in lemma 3.5 we have

$$\mathbb{P}\left(\widehat{T} \in (1 \pm \epsilon)^k \cdot T\right) \ge 1 - o(1) ,$$

where \widehat{T} is the output of DEMETRIS. Furthermore, DEMETRIS only queries a number of vertices:

$$O\left(\frac{\log n^{3}}{\epsilon^{3}(1-\epsilon)^{k}} \cdot \left(\frac{mF_{\max}}{T}\tau_{\text{rel}} + \frac{mF_{\max}}{T} \cdot \sum_{i=3}^{k-1} n^{c}((c+1)\alpha)^{i-(c+1)} + \frac{m}{T}n^{c}((c+1)\alpha)^{k-(c+1)}\right) + \frac{\log n}{\epsilon^{2}}\sqrt{m}\tau_{\min}\right).$$
(1)

 F_{max} is defined as in table 1, and roughly speaking it is the maximum over edges the number of copies of ζ assigned to it. Thus, we often have $F_{\mathrm{max}} \ll T$. The parameters τ_{rel} , τ_{mix} and α are defined later and known to be $\Theta(\log n)$ in social networks [10, 40]. Thus, for small c, DEMETRIS queries a sub-linear number of edges to output a precise approximation for T.

Empirical Results. Empirically, we show that DEMETRIS has excellent accuracy for a wide range of cliques and near-cliques across many large datasets (Figure 1). Compared to baselines, DEMETRIS has superior accuracy with cheaper query cost (Figure 5).

 $^{^1}$ Alternatively we may say $\zeta_i s$ are (c+1) -plexes .




Figure 1: Accuracy of DEMETRIS on real datasets: soc-orkut (3M vertices, 213M edges), soc-sinaweibo (59M vertices, 523M edges), socfb-konect(59M vertices, 185M edges) soc-twitter-higgs(457K vertices, 12.5M edges), soc-livejournal(5M vertices, 85M edges). We observe at most 4% of the edges and repeat the experiments for 100 times. For 100 independent runs, DEMETRIS achieves remarkable median relative error of less than 5% for most of the cases.

1.3 Related Work

Prior work on counting the number of motifs are numerous (see survey [57] and references therein, e.g., [7, 12, 35, 36, 42, 49, 58]). A large subset of these works concentrates on counting cliques [11, 20, 25, 28, 33, 36, 53, 56]; in practice counting quasi-cliques is equally important (a motif in which all vertices are connected to all other by only c vertices) and has been the focus of study of some works [34, 45, 47, 50]. Among all of these works we focus on those whose objective is to query a sub-linear number of edges or vertices in the graph; thus they do not require to query all of G. There are two main models which fall into this category:

Goldriech model [30]. In this model the algorithm has access to the graph by uniformly at random sampling $v \in V$ and performing one of the following operations (1) degree queries: at each point of time the algorithm query the degree of v; d(v), (2) Neighborhood query: for v and $i \leq d(v)$, the algorithm obtains the ith neighbor of v (3) the algorithm can query if two u.a.r samples v and v are adjacent.

In this model Eden et al obtained an algorithm for counting triangles [23] and cliques [25]. Later they showed a more efficient algorithm for clique counting, in sparse graphs (exploiting the graph' arboricity ordering) [26]. Other works concentrated on approximating the degree distribution [22, 24].

Edge query model. In this model, in addition to the queries allowed by the Goldreich model, the algorithm is allowed to also use (4) sample a uniformly at random *edge* from the graph.

In this model, the problem of motif counting was studied by Assadi et al [6] who proposed an algorithm based on a decomposition of the motif the stars and odd cycles. This work is designed on counting arbitrary motifs with general structure and does not concentrate on dense motifs. And [5] showed how to count stars.

Other works studied similar access models [27, 59].

While the above works have set up a beautiful theoretical framework; leading to the development of elegant results, they are not directly applicable in the random walk model.

Random walk model. The random walk model was initially introduced and studied by [16]. Some works studied preliminary problems such as finding global parameters of a graph e.g., number of vertices or edges [9, 17, 38, 59], clustering coefficient [38] or generating uniformly at random vertices [8, 17].

For counting three vertex motifs, Rahman et al [52] proposed a huristic, and Bera et al [13] showed a rigorous method for approximating the number of triangles.

The problem of *motif counting in the random walk model beyond three nodes* has been explored in a few works, but yet it does not have an efficient solution. The first attempt for estimation of high-order motifs using random walks was the work of [14], a.k.a. GUISE, who proposed a Metropolis-Hastings-based algorithm. The performance of GUISE suffers from high rate of rejecting samples which makes the algorithm non-scalable in massive graphs [29, 54]. Wang et al [60] proposed an algorithm based on running a Markov chain on the space of all motifs of size k-1 in-order to, approximately, sample and count motifs of size k. A major improvement was the work of Chen et al [15] who designed an algorithm based on running a random walk on motifs of size $d \ll k$ in-order to, approximate, the frequencies of motifs of size k. In particular letting $\zeta^{(1)}, \zeta^{(2)} \dots \zeta^{(m)}$ be all the distinct (up to isomorphism) k-node motifs, and $C^{(i)}$ the count of the $\zeta^{(i)}$ they estimate $\rho_i = \frac{C^{(i)}}{\sum_{j=1}^m C^{(j)}}$. Chen et al [15] bound the query complexity of estimating ρ_i s by

$$O\left(\frac{W}{\Lambda}\tau_{\min}\frac{1}{\epsilon^2}\log\left(\frac{1}{\delta}\right)\right);\;W=\max_X\pi(X)^{-1},$$

where X denotes a state of a so call extended Markov chain and $\pi(X)$ refers to the probability density of X at stationary distribution, and Λ is a function of $C^{(i)}$ s. Note that $\frac{W}{\Lambda}$ can be exponential in terms of number of edges of the original graph. Furthermore because the above bound is proven for estimation of ρ_i , the complexity of estimating $C^{(i)}$ requires a multiplicative factor of $\sum_{j=1}^m C^{(j)}$.

In this paper, we provide the *first* algorithm in the random walk model to count cliques and near-cliques whose query complexity is sub-linear in the number of network's edges. The query complexity of our method, shown in eq. (1), may be compared to the query complexity of Bera et al's sub-linear triangle counting algorithm which bounded the query complexity in terms of the mixing time of the chain τ_{mix} , total number of triangles T, arboricity of the graph α and total number of edges m as:

$$O\left(\frac{\log n}{\epsilon^2} \cdot \left(\frac{m\tau_{\text{mix}} \cdot T_{\text{max}}}{T} + \frac{m\alpha}{T} + \sqrt{m}\tau_{\text{mix}}\right)\right) \; .$$

In terms of techniques, our work is most similar to, and complements the work on clique counting in the Goldreich model ([26]). Similar to their work, we use an assignment rule and hierarchical sampling to cleverly bound the variance of our estimator. Our work builds on these works and extends them to resolve various issues highlighted in section 1.1.

2 NOTATIONS AND PRELIMINARIES

Consider a graph G=(V,E) with |V|=n and |E|=m. For any vertex $v\in V$ we denote the neighborhood of v in G by $\mathcal{N}(v)$ and its degree by d(v). We further generalize these definitions for a subset $S\subseteq V$ as: $\mathcal{N}(S)=\bigcup_{v\in S}\mathcal{N}(v)$ and $d(S)=|\mathcal{N}(S)|$. We define

the neighborhood oracle $O_G:V\to 2^V$ be an oracle which given any vertex $v\in V$ returns a set of pointers to v's neighborhood, i.e., $\mathcal{N}(v)\subseteq V$. Throughout the paper, we fix some lexicographic order < on V for breaking ties.

Our focus in this paper is counting c-dense motifs. We fix the notation and use ζ to denote the graphlet (motif) of interest with k vertices (k being a constant). An induced subgraph g is a copy of ζ if g and ζ are isomorphic, denoted mathematically $g \equiv \zeta$. We denote the set of all copies of ζ in G by $\mathcal{G}_G(\zeta)$, simplified to $\mathcal{G}(\zeta)$ when G is clear from the context. Throughout the paper, to refer to motifs, we use Greek letters like ζ , σ , etc, and we refer to motifs' copies in G using lowercase English letters g, h, etc. For example let ζ be a triangle, we may write $g \in \mathcal{G}(\zeta)$, which means vertices of g forms a triangle in G.

Consider two induced subgraphs g and h in G, we say g is a sub-motif of h if g is an induced subgraph of h, denoted by $g \subseteq h$; we use the same notation and terminology for graphlets. We may add or remove a vertex from or to a subgraph (of G) to obtain a new subgraph. To denote these operations, we use + and \setminus , e.g., $g' = g \setminus v$ means g' is an induced subgraph of g which is obtained by removing g from g, and equivalently g = g' + v which is obtained by adding g to g along with edges between g and g.

We would like to be able to uniquely assign each $g \in \mathcal{G}(\zeta)$ to a sequence of its sub-motifs, through an *assignment rule*. The following definition for segmentation of a graphlet ζ is key to our assignment rule:

Definition 2.1 (Segmentation & C-dense segmentation). Given a graphlet ζ with k vertices, let $\sigma_2, \sigma_3, \ldots, \sigma_{k-1}, \sigma_k$ be a sequence of submotifs of ζ where each σ_i has i vertices, $\sigma_i \subseteq \sigma_{i+1}$ for $i=2\ldots k-1$, and σ_i is connected. We call such a sequence a segmentation of ζ and we denote it by $\sigma(\zeta) = \langle \sigma_2, \sigma_3, \ldots, \sigma_{k-1} \rangle$, simplified to σ when ζ is clear from the context.

A segmentation σ is called c-dense if each vertex of σ_i has degree at least i-1-c.

EXAMPLE 2.1. Figure 2 shows a segmentation of a diamond shape motif of size five. This segmentation is 2-dense as each newly added vertex is not connected to at most 2 vertices.




Figure 2: Example of a segmentation.

To estimate $|\mathcal{G}(\zeta)|$, a hierarchical sampling procedure extends any sampled copy of σ_i in G to a copy of σ_{i+1} in G by adding one more vertex from the neighborhood of σ_i in G (defined in definition 2.2).

Given ζ , a segmentation of it σ and $i \in \{2, 3, ..., k-1\}$, consider the set of all copies of σ_i in G, i.e., $\mathcal{G}(\sigma_i)$. For any $g \in \mathcal{G}(\sigma_i)$, we define its neighborhood and degree with respect to σ as follows:

Definition 2.2 (Neighborhood/Degree of a motif w.r.t. a segmentation). Given ζ , its c-dense segmentation $\sigma(\zeta)$, and a subgraph $q \in \mathcal{G}(\sigma_i)$, let the representative of g, denoted by R(q), be a

set of C+1 vertices in g with smallest neighborhood (using < to break ties in favor of the lexicographically smallest subset). We define the neighborhood with respect to σ_i of a subgraph g, denoted by $N_{\sigma}(g)$, to be the neighborhood of the subgraph R(g). More formally,

$$\mathcal{N}_{\sigma}(g) \doteq \mathcal{N}(R(g))$$
 , where $R(g) \doteq \underset{S \subset g: |S| = c+1}{\operatorname{argmin}} |\mathcal{N}(S)|$.

The degree with respect to σ_i of a subgraph g is defined as $D(g) \doteq |\mathcal{N}_{\sigma}(g)|$.

Note that because the segmentation is c-dense, we are always able to obtain a vertex v in $\mathcal{N}_{\sigma}(g_{i-1})$ to obtain g_i . We are now ready to present our hierarchical assignment rule which assigns a subgraph $g \in \mathcal{G}(\zeta)$ to a sequence of its sub-motifs $g_{k-1}, g_{k-2}, \dots g_2$ so that each $g_i \equiv \sigma_i$.

DEFINITION 2.3 (ASSIGNMENT FUNCTION). Assume a motif ζ and its segmentation $\sigma = \langle \sigma_2, \sigma_3, \dots, \sigma_{k-1} \rangle$. For $2 \le i \le k-1$ an assignment function $\mathcal{A}_i : \mathcal{G}(\sigma_{i+1}) \to \mathcal{G}(\sigma_i)$ satisfies the following conditions for every $g \in \mathcal{G}(\sigma_{i+1})$:

- (1) $\mathcal{A}_i(g) = g \setminus v \in \mathcal{G}(\sigma_i)$
- (2) v is the minimum vertex w.r.t $<_V$ that satisfies (1).

DEFINITION 2.4 (COUNT FUNCTION). We define the count function based on the inverse of a given assignment function (for a graph). More precisely, for each $i=2,3,\cdots,k$, let $C_i:\mathcal{G}(\sigma_i)\to\mathbb{R}$ to be defined as $C_i(g)=|\mathcal{H}_i^{-1}(g)|$, i.e., the number of motifs in $\mathcal{G}(\sigma_{i+1})$ assigned to q.

Let C_i^{max} be defined as the maximum value that this function takes given the assignment function, i.e., $C_i^{max} = \max_{g \in \mathcal{G}(\sigma_i)} C_i(g)$.

2.1 Main Tools and Techniques

2.1.1 Random walk sampling and an unbiased estimator. A simple random walk on G starts crawling its vertices at a seed vertex, at any point of time, being at $v \in G$, it obtains N(v) by calling $O_G(v)$, samples $u \sim N(v)$ uniformly at random, and repeats the same steps for u. Let π_t be the distribution of the random walk after taking t steps. It is known that, under some simple conditions known as ergodicity, a simple random walk converges to a stationary distribution π on V defined as $\pi(v) \doteq \frac{d(v)}{2|E|}$ regardless of the starting distribution i.e., $\lim_{t\to\infty} \pi_t = \pi$. Let d_{tv} denote the total variation distance, the mixing time τ_{mix} of the chain is the minimum τ satisfying $\forall t \geq \tau$; $d_{tv}(\pi_t, \pi) \leq 1/4$ regardless of the starting point. Note that since $\pi(v) \propto d(v)$ it is equivalent to the uniform distribution on E which we denote by U(e) = 1/|E|, and for simplicity just U(E).

Assume having a function $f:V\to\mathbb{R}$ and we have obtained r edges $\{e_i\}_{i=1}^r$ from E by running a random walk on it. We are interested to estimate $\mathbb{E}(f)$ by its empirical average $\sum_{i=1}^r f(e_i)/r$. Note that since the samples are not independent, the classic i.i.d bounds are not applicable. Thus, we use concentration bound which hold in MCMC settings e.g., [19, 48], these bounds depend on the chain's mixing time τ_{mix} (defined before) or relaxation τ_{rel} defined as follows.

Definition 2.5 (relaxation time and the second largest absolute eigen-value). Let T be the transition matrix of a Markov chain, and λ its second largest eigen-value, the relaxation time of the Markov chain is denoted by $\tau_{\rm rel}$ and it is defined as: $\tau_{\rm rel} \doteq \frac{1}{1-\lambda}$.

It is well known that mixing and relaxation times are related as $(\tau_{\rm rel}-1)\log(1/8) \le \tau_{\rm mix} \le \tau_{\rm rel}\log\frac{1}{4\min_{v\in V}\pi(v)}$; See e.g., [41].

The following result hold for the co-variance of Markov chain generated samples; for full discussion see e.g., [41]:

Theorem 2.2 (Co-variance of MCMC samples). Let λ be the second largest eigen-value of a Markov chain. Let $X_1, X_2, ... X_n$ be n consecutive steps of the Markov chain, for any i, j the covariance of $f(X_i)$ and $f(X_j)$ follows:

$$|j-i| \ge k \implies \mathbb{C}(f(X_i), f(X_i)) \le \lambda^k \mathbb{V}(f)$$
,

where $\mathbb{V}(f)$ is variance of f and \mathbb{C} denotes the covariance of two random variables

2.1.2 Hierarchical sampling and motif segmentation. An assignment rule is a function $\mathcal{A}: \mathcal{G}(\zeta) \to E$ which assigns to each $g \in \mathcal{G}(\zeta)$ one of its edges.

The key idea behind hierarchical sampling is to design a *hierarchical assignment rule* \mathcal{A} which is defined to be a composition of k-2 functions $\mathcal{A}_{k-1},\mathcal{A}_{k-2},\ldots,\mathcal{A}_2$, i.e., $\mathcal{A}=\mathcal{A}_2\circ\mathcal{A}_3\circ\cdots\circ\mathcal{A}_{k-1}$ (as in definition 2.3). In hierarchical sampling we initially sample a collection of edges. The edges in the collection are then extended to graphlets with 3, 4 and eventually k vertices, and by checking $g_{i-1}=\mathcal{A}_{i-1}(g_i)$ we ensure each intermediate subgraph g' eventually gets counted once and only if $g'\subseteq g\in\mathcal{G}(\zeta)$. In simple words, by using hierarchical sampling, as we inductively add vertices to the graphlets, we trim the sample space thus we manage to reduce the effective required sample size.

2.1.3 Graph's Arboricity. The arboricity of an undirected graph is the minimum number of forests into which its edges can be partitioned. Arboricity is tightly connected to the density of a graph and it is known to be small for real-life networks. More precisely, for a given clique c_k , let the degree of c_k , denoted by $D(c_k)$, be the degree of minimal-degree vertex (breaking ties by \checkmark). Eden et al. [26] has established a connection between the total degree of cliques in a graph and its arboricity as:

Lemma 2.3 ([26]). Let α be G's arboricity, and c_k a clique of size k, we have:

$$D(\mathcal{G}(c_k)) \leq 2m \cdot \alpha^{k-1}$$
,

where
$$D(\mathcal{G}(c_k)) = \sum_{g \in \mathcal{G}(c_k)} D(g)$$
.

Using the extended definition of degree with respect to a segmentation, we extend the above result for dense motifs (the proof will be presented in the extended version):

Lemma 2.4. Let α be G's arboricity and ζ be a motif of size k with segmentation $\sigma(\zeta) = \langle \sigma_2, \sigma_3, \ldots, \sigma_{k-1}, \sigma_k (=\zeta) \rangle$ (see definition 2.1) that is c-dense, i.e., the minimum degree of σ_i is $\delta(\sigma_i) = i - 1 - c$. Then for an arbitrary $2 \le i \le k$,

$$D(\mathcal{G}(\sigma_i)) \leq 2m \cdot ((c+1) \cdot \alpha)^{i-1-c} \cdot n^c,$$

where
$$D(\mathcal{G}(\sigma_i)) = \sum_{g \in \mathcal{G}(\sigma_i)} D(g)$$
.

Note that for a clique, a segmentation is a sequence of smaller cliques with c = 0 so our result is a generalization of lemma 2.3.

3 DEMETRIS

In this section, we present DEMETRIS, our suggested algorithm for Dense Motif count EsTimation through Random Incident Sampling, and we analyse its correctness and efficiency. A key component is the hierarchical sampling procedure presented in algorithm 1.

Given a c-dense motif ζ along with its segmentation $\sigma(\zeta)$, an initial set of edges $\mathcal{E}\subseteq E$ and numbers l_3,\ldots,l_k , ConstructLayers extends the edges to higher order sub-graphs until reaching subgraphs isomorphic to ζ . In this process, it constructs layers $\mathcal{L}_2,\mathcal{L}_3,\ldots,\mathcal{L}_k$ such that each \mathcal{L}_i is a collections of sub-graphs isomorphic to $\sigma_i(\zeta)$. The construction of layers is an inductive procedure: we let $\mathcal{L}_2=\mathcal{E}$, and calculate $\mathrm{D}(\mathcal{L}_2)\doteq \sum_{q\in\mathcal{L}_2}\mathrm{D}(g)$ (lines 1-2 of algorithm 1).

For $i=2,3,4,\ldots,k-1$, we construct \mathcal{L}_{i+1} by sampling $g\in\mathcal{L}_i$ from distribution p_i which is defined to satisfy $p_i(g)\propto \mathrm{D}(g)$. Using O_G we sample u u.a.r. from $\mathcal{N}_{\sigma}(g)$. We let g'=g+u, and check if $g'\equiv\sigma_i$ and $g=\mathcal{R}_i(g')$. If both of these conditions are satisfied, g' will be added to collection \mathcal{L}_{i+1} (lines 7-14 in algorithm 1).

The output of ConstructLayers is \mathcal{L}_k which is a collection of sub-graphs in $\mathcal{G}(\zeta)$. Furthermore each $g \in \mathcal{L}_k$ is assigned uniquely through $\mathcal{A} = \mathcal{A}_2 \circ \mathcal{A}_3 \circ \cdots \circ \mathcal{A}_{k-1}$ to an edge $e \in \mathcal{E}$.

In order to prove the correctness of our method, we ensure that all layers are "*nice*" which means they are large enough to carry enough information to the next layer (see section 3.1).

Remark 3.1 (EstimateEdgeCount). The number of edges of the graph can be approximated, w.p. 1-o(1) and within error ϵ , in the random walk model by running $\frac{\log n}{\epsilon^2} \sqrt{m}$ independent random walks and estimating m by counting collisions; see e.g., [9, 13].

Algorithm 1 ConstructLayers $(\mathcal{E}, \sigma, l_3, \dots, l_k)$

```
Input: \mathcal{E}, \sigma, l_3, l_4 \dots, l_k
  1: \mathcal{L}_2 = \mathcal{E}
  2: Calculate D(\mathcal{L}_2) as D(\mathcal{L}_2) = \sum_{e \in \mathcal{E}} D(e)
  3: for i = 3 to k do
            \mathcal{L}_i \leftarrow \emptyset, D(\mathcal{L}_i) \leftarrow 0
            // {Construct \mathcal{L}_i by sampling g \in \mathcal{L}_{i-1} and extending to g' \in
  6:
            for j = 1 to l_i do
                 Sample g from \mathcal{L}_{i-1} w.p. D(g)/D(\mathcal{L}_{i-1}).
  7:
  8:
                 For each vertex v in g invoke O_G(v) to obtain \mathcal{N}_{\sigma}(g).
                 Sample u \sim \mathcal{N}_{\sigma}(g) u.a.r.
 10:
                 g' \leftarrow g + u.
                 if g' \in \mathcal{G}(\sigma_i) and g = \mathcal{H}_i(g') then
 11:
 12:
                     \mathcal{L}_{i} = \mathcal{L}_{i} \cup g'
D(\mathcal{L}_{i}) = D(\mathcal{L}_{i}) + D(g').
 13:
 14:
 16: return \langle \mathcal{L}_k, Y_k, D(\mathcal{L}_2), D(\mathcal{L}_3), \dots D(\mathcal{L}_k) \rangle
```

3.1 Theoretical Analysis of DEMETRIS

In this section, we prove Theorem 1.1. Let Y be the second output parameter of ConstructLayers called in line 4 of Algorithm 2. For any $i \geq 3$ we define $c_i \doteq \frac{m}{\tilde{r}} \cdot \prod_{j=3}^{i-1} \frac{\mathbb{D}_{j-1}}{l_j} \cdot \mathbb{D}_{i-1}$. Therefore, the output of DeMETRIS is $\widehat{T} = Y \cdot \frac{c_k}{l_k}$. We show in Lemma 3.2, whose

Algorithm 2 DEMETRIS

Input: $G = \langle V, E \rangle, \zeta, \sigma(\zeta), r, \tau_{\text{mix}}, \varepsilon, l_3, \cdots, l_k$ **Output:** s

- 1: $s \in V \leftarrow$ an arbitrary start point for random walk.
- 2: $\tilde{r} \leftarrow r \cdot \tau_{\text{mix}}$
- 3: $\mathcal{E} \leftarrow$ multi-set of edges on random \tilde{r} -walk from s.
- 4: $\langle \mathcal{L}_k, Y, D_2, \dots, D_k \rangle$ = ConstructLayers $(\mathcal{E}, \sigma, l_3, l_4, \dots, l_k)$
- 5: $\widehat{m} = \text{EstimateEdgeCount}(\mathcal{E}, \tau_{\text{mix}})$
- 6: $\widehat{T} = Y \cdot \frac{\widehat{m}}{\widetilde{\epsilon}} \prod_{i=3}^k D_{i-1} / \prod_{i=3}^k l_i$
- 7: return \widehat{T}

Symbol	Definition					
$\sigma(\zeta)/\sigma$	c-dense segmentation of ζ , $\sigma = \sigma_2, \dots, \sigma_k (= \zeta)$.					
$\mathcal{G}(\zeta)$	Set of occurrences of an arbitrary motif ζ .					
T	Size of $\mathcal{G}(\zeta)$, i.e., $ \mathcal{G}(\zeta) $.					
T_i	Size of $\mathcal{G}(\sigma_i)$, i.e., $ \mathcal{G}(\sigma_i) $.					
d(S)	Size of neighborhood of S , i.e., $ \mathcal{N}(S) $.					
R(g)	Representative of g w.r.t. σ ; c + 1 nodes in g w min neighbors.					
D(g)	Degree of representative of g w.r.t. σ , i.e., $D(R(g))$.					
D_i	Degree of layer \mathcal{L}_i returned by the algorithm.					
$\mathcal{A}_i(g)$	Assignment function mapping $\mathcal{G}(\sigma_i)$ to $\mathcal{G}(\sigma_{i-1})$.					
$C_i(g_i)$	Number of copies of $\mathcal{G}(\zeta)$ that are assigned to $g_i \in \mathcal{G}(\sigma_i)$.					
C_i^{max}	Max number of copies of $\mathcal{G}(\zeta)$ assigned to a graph $\mathcal{G}(\sigma_i)$.					
$F_{ m max}$	$\max_i C_i^{\max}$.					

Table 1: Table of definitions

proof will be presented in an extended version of the paper, that this is an unbiased estimator.

Lemma 3.2. Let \widehat{T} be the outcome of DeMETRIS, then $\mathbb{E}[\widehat{T}] = T$.

To show that \widehat{T} is concentrated around its mean with high probability we first show that with high probability we have

$$Y \in (1 \pm \epsilon)l_k \cdot \frac{C_{k-1}(\mathcal{L}_{k-1})}{D_{k-1}} \ . \tag{2}$$

Here $C_{k-1}(\mathcal{L}_{k-1}) = \sum_{g \in \mathcal{L}_{k-1}} C_{k-1}(g)$, thus it is the total number of copies of ζ that are assigned to some sub-motif in layer k-1. The reader may wonder how eq. (2) helps in counting copies of ζ . lemma 3.3 shows that by maintaining niceness properties in the layers, which we define later (in eq. (Nice-Range)), from Equation (2) we can conclude that with high probability $Y \cdot \frac{c_k}{l_k} \simeq T$.

Lemma 3.3. If $C_{k-1}(\mathcal{L}_{k-1}) \in (1\pm\epsilon)^{k-1} \cdot \frac{T}{c_{k-1}}$ (see Equation (Nice-Range)), and Equation (2) holds, then

$$\widehat{T} = \frac{c_k}{l_k} \cdot Y \in (1 \pm \epsilon)^k T .$$

Lemma 3.3 will be proven in the extend version of this paper. As a result of them, we conclude that it is sufficient to generate layers such that \mathcal{L}_{k-1} is nice. We now proceed to prove eq. (2)

3.1.1 High Probability Concentration . In this section, we prove eq. (2). Intuitively, we would like all the layers to inductively acquire nice properties; thus we define two main properties for each layer \mathcal{L}_i : (i) value of C_i should be concentrated around its mean, and (ii) each layer to be *rich enough* to carry the information we need

to the next layer (needed for inductive step). Formally, we phrase these requirements as follows.

Definition 3.1 (a nice layer). For $i \in \{2, 3, ... k\}$, we say $\mathcal{L}_i \sqsubseteq \mathcal{G}(\sigma_i)$ is nice if

$$C_i(\mathcal{L}_i) \in (1 \pm \epsilon)^i \cdot \frac{l_i}{c_i} \cdot T$$
, (Nice-Range)

$$\frac{C_i(\mathcal{L}_i)}{D_i} \ge (1 - \epsilon)^i \cdot \frac{\epsilon}{\log n} \cdot \frac{T}{D(\mathcal{G}(\sigma_i))}$$
 (Nice-Ratio)

, where
$$c_i \doteq \frac{m}{\tilde{r}} \cdot \prod_{j=3}^{i-1} \frac{D_{j-1}}{l_i} \cdot D_{i-1}$$
.

The proof of the following lemmas are presented in the appendix. The analysis of R requires bounding the co-variance of consecutive samples (employing theorem 2.2) as they are generated by running a random walk. The analysis of the other layers is similar to the work of [26] and tailored to c-dense motifs.

Lemma 3.4. If
$$\tilde{r} \geq \tau_{\text{mix}} + \tau_{\text{rel}} \cdot \frac{\log n}{\epsilon^2} \cdot \frac{C_2^{\text{max}} \cdot m}{T}$$
 then $\mathcal{L}_2 = R$ is nice.

LEMMA 3.5. Let
$$3 \leq i \leq k$$
. If \mathcal{L}_{i-1} is nice and $l_i \geq \frac{\log n}{\epsilon^2} \cdot C_i^{\max}(\mathcal{L}_i) \cdot \frac{D_{i-1}}{C_{i-1}(\mathcal{L}_{i-1})}$, then \mathcal{L}_i is also nice.

Before we can prove the concentration for random variable Y, we need the following lemma:

Lemma 3.6. Given a layer \mathcal{L}_{k-1} constructed in ConstructLayers we have

$$\mathbb{E}\left[Y\mid\mathcal{L}_{k-1}\right] = l_k \cdot \frac{C_{k-1}(\mathcal{L}_{k-1})}{D_{k-1}}\;.$$

Now we have all the required ingredients for proving eq. (2).

Proof of Eq. (2). Employing the Chernoff bound for i.i.d. random variables and using lemma 3.6 , we have:

$$\mathbb{P}\left(|Y - \mathbb{E}[Y]| \ge \epsilon \mathbb{E}[Y]\right) \le 2 \exp\left(-\frac{\epsilon^2}{3} \cdot l_k \cdot \frac{C_{k-1}(\mathcal{L}_{k-1})}{D_{k-1}}\right)$$

By the choice of l_i 's in the statement of the lemma and applying lemma 3.5 and lemma 3.4, we have that all layers are nice. Thus by by applying eq. (Nice-Range), we obtain

$$\mathbb{P}\left(|Y - \mathbb{E}[Y]| \ge \epsilon \mathbb{E}[Y]\right) \le 2 \exp\left(-\frac{\epsilon^3 (1 - \epsilon)^{k - 1}}{3 \log n} \cdot l_k \cdot \frac{T}{D(\mathcal{G}(\sigma_{k - 1}))}\right)$$

Thus
$$\mathbb{P}(|Y - \mathbb{E}[Y]| \ge \epsilon \mathbb{E}[Y]) \le 2 \exp(-O(\log(n)))$$
 if $l_k \ge \frac{3\log^2 n}{\epsilon^3(1-\epsilon)^{k-1}} \cdot \frac{D(\mathcal{G}(\sigma_{k-1}))}{T}$.

Proof of theorem 1.1. Note that by employing lemma 2.4 and the fact that ζ is c-dense we have: for all i, $\mathrm{D}(\mathcal{G}(\sigma_i)) \leq 2m \cdot n^c \ ((c+1)\alpha)^{i-(c+1)}$. Note all l_i s are taken large enough to ensure the layers are nice. In particular from the niceness of \mathcal{L}_{k-1} and eq. (Nice-Range) we conclude that $\mathrm{C}_{k-1}(\mathcal{L}_{k-1}) \in (1\pm\epsilon)^{k-1} \cdot \frac{T}{c_{k-1}}$. From lemma 3.3 we conclude that $\widehat{T} = \frac{c_k}{l_k} \cdot Y \in (1\pm\epsilon)^k T$. Plugging in the values in eq. (Nice-Ratio) the minimum required size for each l_i will be:

$$l_{i} \geq \frac{\log n^{3}}{\epsilon^{3}(1-\epsilon)^{i}} \cdot C_{i}^{\max}(\mathcal{L}_{i}) \cdot \frac{2m \cdot n^{c} \cdot ((c+1)\alpha)^{i-(c+1)}}{T}$$

, and
$$l_k \ge \frac{(3\log^2 n)}{e^3(1-e)^k} \cdot \frac{2m \cdot n^c \cdot ((c+1)\alpha)^{k-(c+1)}}{T}$$
.




Figure 3: Plot of median relative error estimates for DEMETRIS on various datasets and various motifs for 100 runs. We show the effect of varying the random walk length. We have median relative error percentage on y-axis, and percentage of the edges visited on x-axis.

4 EXPERIMENTAL EVALUATIONS

In this section, we discuss the empirical performances of DEMETRIS. Our implementation is in C++. We ran all the experiments on a workstation with 128GB DDR4 memory and Intel Xeon 2.20GHz processor running Ubuntu 20. We will make our code publicly available with the full version of the paper. ² We evaluate DEMETRIS on the datasets given in Table 2. We consider simple graphs by removing duplicate edges and self-loops.

Table 2: Description of our dataset with the key parameters, #vertices(n), #vertices(n),

Graph Name	n	m	#g _{3,3}	#g _{4,6}	#g _{4,5}	#g _{5,10}	#g _{5,9}
soc-orkut	3M	213M	525M	2.4B	33B	10.8B	84B
soc- sinaweibo	59M	523M	213M	0.7B	27B	3.3B	47B
socfb- konect	59M	185M	6.3M	0.5M	329M	36K	27M
soc- livejournal	5M	85M	285M	9.9B	17B	467B	631B
soc-twitter- higgs	0.5M	12.5M	83M	0.4B	24B	2.2B	37.2B

In our empirical evaluations, we seek to answer the following questions.

• Is DEMETRIS accurate for a suite of important motifs across multiple datasets?

We demonstrate in Figure 3 that the accuracy of DEMETRIS is remarkably high across multiple datasets for many different size cliques and near-cliques. This is even more impressive considering the distributions of these cliques and near-cliques vary significantly across datasets. For almost all the datasets, with less than 5% of the edges, median error for DEMETRIS is less than 5%.

 Does DEMETRIS converge to the true motif count given sufficient budget for the neighborhood samples? How much is the variance in the outcome? We demonstrate the convergence of DEMETRIS in Figure 4. As our theory suggests, DEMETRIS converges to the true count with increases in the number of queries.

Compared to existing algorithms for motif counting in the random walk model, how does DEMETRIS fare?
 We show in Figure 5 that DEMETRIS consistently outperforms the baseline algorithms almost across all the datasets, and almost across all the different motifs. While observing only a tiny fraction of graph (around 2 – 3%), the accuracy achieved by DEMETRIS is remarkable, where as the baseline performs at least twice worse than that of DEMETRIS in most of the cases.

Implementation Details. The performance of DEMETRIS is eval-

uated based on three different parameters: Accuracy, Convergence, and its Comparison with the Baseline (SRW2). To analyze the robustness of the estimation of DEMETRIS we evaluate its performance in estimating the counts for different motifs: Triangle (3-Clique), 4-Clique, Almost 4-Clique (4-chord cycle), 5-Clique, Almost 5-Clique. We use $relative\ error\ percentage$, defined as $\frac{(EXACTCOUNT-ALGOESTIMATE)*100}{EXACTCOUNT-ALGOESTIMATE}$ as a metric to analyze the performance of DEMETRIS. For analyzing the accuracy and the comparison with the baseline we use the median of the relative error percentage of 100 estimates, and to analyze the convergence we represent the relative error percentage of all the 100 estimates. For each of the 100 estimates the starting node of the random walk is chosen uniformly at random. DEMETRIS requires number of edges m as a parameter along with the length of the random walk. Note that, m can be estimated from the random walk edges as similar to that in [13]. In addition to the random walk length, the baseline SRW2 [15] requires the sum of degree of edges $\sum_{e=(u,v)\in E} d_u + d_v$ as a parameter. We compute this separately and pass it as a parameter to SRW2.

Accuracy. DEMETRIS is eminently accurate across all the graphs with just at most 5% of the edges of the graphs. In Figure 3 we plot the median relative error percentage of DEMETRIS over 100 runs for different motifs for each dataset while increasing the length of the random walk. With the increase in the length of the random walk or the percentage of queries to around 5%, we observe that the median relative error percentage suddenly drops below 5% for almost all the graphs and all different motifs.

Convergence. In Figure 4 we demonstrate the convergence of DEMETRIS for orkut, and sinaweibo for different motifs. We plot the relative error percentage of DEMETRIS for 100 runs for a fixed length of the random walk. As we increase the percentage of edges visited, the relative error spread for DEMETRIS is around or less than 5% for almost all the motifs when we explore around 5% of edges and tightly concentrates towards the 0% relative error line which indicates the concentration towards the exact count.

Comparison with Baseline. We compare the performance of DEMETRIS with SRW2 [15]. Chen et al. [15] propose a general framework to estimate statistics of graphlet of any size. This framework is based on collecting samples through consecutive steps of random walks. SRW2 also requires the sum of the degree of edges $(\sum_{e=(u,v)\in E} d_u + d_v)$ as a parameter, and is computed separately.

In Figure 5 we compare the performance of DEMETRIS and SRW2 with respect to the median relative error percentage. Here we show the results for only a subset of graphs and motifs, for other graphs

²The code repository is available here.

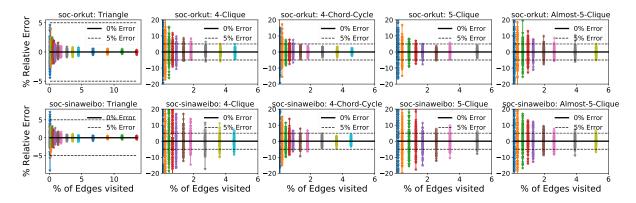


Figure 4: Convergence of DEMETRIS for different motifs. On the y-axis, we plot relative error percentage of DEMETRIS for each of the 100 runs corresponding to fixed length of random walk. On x-axis, we show the percentage of the queries made by DEMETRIS during its execution by increasing the length of random walk. The maximum observed edge percentage corresponding to largest length of random walk is 6%.

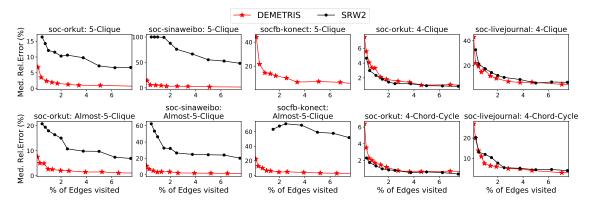


Figure 5: Comparison against baseline. For each dataset, for each motif, and for a fixed length of random walk, we run both the algorithms 100 times. We compare the median relative error in estimation vs the percentage of edges visited.

and motifs the performances are consistent and we defer the plots to the full version of the paper. DEMETRIS is consistently accurate across all the datasets and all different motifs. We observe that in estimating the count of 5-Cliques for socfb-konect dataset the estimation error for SRW2 is high. And this is because the number of 5-Cliques present in the socfb-konect dataset is very low (36K), which affects the performance of SRW2 even after exploring the around 5-7% of the graph. SRW2 performs equivalent to or slightly better than DEMETRIS on the soc-livejournal dataset across all the motifs and on the soc-orkut dataset for 4-Chord cycle and 4-Clique. In all the other cases, DEMETRIS significantly outperforms SRW2 in terms of the median relative percentage error. Across all the graphs and all the different motifs, after exploring only around 2% of the graph, the median relative error percentage for DEMETRIS is around 5% or less. Whereas, for SRW2, for most of the cases, the median relative percentage error is more than 10%.

5 CONCLUSION

We study the problem of counting (near) cliques in a novel practical setting known as random walk model. We build upon prior work on theoretical study of sub-linear algorithms and develop new theory to address new challenges arising in our more realistic setting. We believe that the study of algorithms in the random walk setting is essential in the development of robust and practical algorithms.

6 ACKNOWLEDGMENTS

This work was carried out when Haddadan was a postdoctoral researcher at Brown University and she was supported by the Data Science Initiative at Brown University and by the NSF-TRIPODS grant.

REFERENCES

- [1] [n. d.]. Facebook User Public API. https://developers.facebook.com/docs/graph-api/reference/user/. Accessed: 2022-01-31.
- [2] [n.d.]. Twitter Public API. https://developer.twitter.com/en/docs/twitter-api/v1/ accounts-and-users/follow-search-get-users/overview. Accessed: 2022-01-31.
- [3] Balázs Adamcsek, Gergely Palla, Illés J Farkas, Imre Derényi, and Tamás Vicsek. 2006. CFinder: locating cliques and overlapping modules in biological networks. Bioinformatics 22, 8 (2006), 1021–1023.
- [4] Matteo Agostini, Marco Bressan, and Shahrzad Haddadan. 2019. Mixing time bounds for graphlet random walks. Inform. Process. Lett. 152 (2019), 105851.
- [5] Maryam Aliakbarpour, Amartya Shankha Biswas, Themis Gouleakis, John Peebles, Ronitt Rubinfeld, and Anak Yodpinyanee. 2018. Sublinear-Time Algorithms for Counting Star Subgraphs via Edge Sampling. Algorithmica 80, 2 (Feb. 2018), 668–697. https://doi.org/10.1007/s00453-017-0287-3

- [6] Sepehr Assadi, Mikhail Kapralov, and Sanjeev Khanna. 2019. A Simple Sublinear-Time Algorithm for Counting Arbitrary Subgraphs via Edge Sampling. In ITCS.
- [7] Luca Becchetti, Paolo Boldi, Carlos Castillo, and Aristides Gionis. 2010. Efficient algorithms for large-scale local triangle counting. ACM Transactions on Knowledge Discovery from Data (TKDD) 4, 3 (2010), 1–28.
- [8] Omri Ben-Eliezer, Talya Eden, Joel Oren, and Dimitris Fotakis. 2021. Sampling Multiple Nodes in Large Networks: Beyond Random Walks. arXiv preprint arXiv:2110.13324 (2021).
- [9] Anna Ben-Hamou, Roberto I. Oliveira, and Yuval Peres. 2018. Estimating Graph Parameters via Random Walks with Restarts. In Proceedings of the Twenty-Ninth Annual ACM-SIAM Symposium on Discrete Algorithms (New Orleans, Louisiana) (SODA '18). Society for Industrial and Applied Mathematics, USA, 1702–1714.
- [10] Itai Benjamini, Gady Kozma, and Nicholas Wormald. 2014. The mixing time of the giant component of a random graph. Random Structures & Algorithms (2014).
- [11] Suman K Bera and Amit Chakrabarti. 2017. Towards tighter space bounds for counting triangles and other substructures in graph streams. In 34th Symposium on Theoretical Aspects of Computer Science.
- [12] Suman K. Bera and C. Seshadhri. 2020. How the Degeneracy Helps for Triangle Counting in Graph Streams. In Proceedings of the 39th ACM SIGMOD-SIGACT-SIGAI Symposium on Principles of Database Systems (Portland, OR, USA) (PODS'20). Association for Computing Machinery, New York, NY, USA, 457–467. https: //doi.org/10.1145/3375395.3387665
- [13] Suman K. Bera and C. Seshadhri. 2020. How to Count Triangles, without Seeing the Whole Graph. In Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery &; Data Mining (Virtual Event, CA, USA) (KDD '20). Association for Computing Machinery, New York, NY, USA, 306–316. https: //doi.org/10.1145/3394486.3403073
- [14] Mansurul A Bhuiyan, Mahmudur Rahman, Mahmuda Rahman, and Mohammad Al Hasan. 2012. Guise: Uniform sampling of graphlets for large graph analysis. In 2012 IEEE 12th International Conference on Data Mining. IEEE, 91–100.
- [15] Xiaowei Chen, Yongkun Li, Pinghui Wang, and John CS Lui. 2016. A General Framework for Estimating Graphlet Statistics via Random Walk. Proceedings of the VLDB Endowment 10, 3 (2016).
- [16] Flavio Chiericetti, Anirban Dasgupta, Ravi Kumar, Silvio Lattanzi, and Tamás Sarlós. 2016. On Sampling Nodes in a Network (WWW '16). International World Wide Web Conferences Steering Committee, Republic and Canton of Geneva, CHE, 471–481. https://doi.org/10.1145/2872427.2883045
- [17] Flavio Chierichetti and Shahrzad Haddadan. 2018. On the Complexity of Sampling Vertices Uniformly from a Graph. In 45th International Colloquium on Automata, Languages, and Programming (ICALP 2018). Schloss Dagstuhl-Leibniz-Zentrum fuer Informatik.
- [18] James S Coleman. 1988. Social capital in the creation of human capital. American journal of sociology 94 (1988), S95–S120.
- [19] Cyrus Cousins, Shahrzad Haddadan, and Eli Upfal. 2020. Making mean-estimation more efficient using an MCMC trace variance approach: DynaMITE. arXiv preprint arXiv:2011.11129 (2020).
- [20] Maximilien Danisch, Oana Balalau, and Mauro Sozio. 2018. Listing k-cliques in sparse real-world graphs. In Proceedings of the 2018 World Wide Web Conference. 589–598
- [21] Anirban Dasgupta, Ravi Kumar, and Tamas Sarlos. 2014. On estimating the average degree. In Proceedings of the 23rd international conference on World wide web. 795–806.
- [22] Talya Eden, Shweta Jain, Ali Pinar, Dana Ron, and C Seshadhri. 2018. Provable and practical approximations for the degree distribution using sublinear graph samples. In Proceedings of the 2018 World Wide Web Conference. 449–458.
- [23] Talya Eden, Amit Levi, Dana Ron, and C Seshadhri. 2017. Approximately counting triangles in sublinear time. SIAM J. Comput. 46, 5 (2017), 1603–1646.
- [24] Talya Eden, Dana Ron, and C Seshadhri. 2017. Sublinear time estimation of degree distribution moments: The degeneracy connection. In 44th International Colloquium on Automata, Languages, and Programming (ICALP 2017). Schloss Dagstuhl-Leibniz-Zentrum fuer Informatik.
- [25] Talya Eden, Dana Ron, and C. Seshadhri. 2018. On Approximating the Number of K-Cliques in Sublinear Time. In Proceedings of the 50th Annual ACM SIGACT Symposium on Theory of Computing (Los Angeles, CA, USA) (STOC 2018). ACM, New York, NY, USA, 722–734. https://doi.org/10.1145/3188745.3188810
- [26] Talya Eden, Dana Ron, and C. Seshadhri. 2020. Faster Sublinear Approximation of the Number of k-Cliques in Low-Arboricity Graphs. In Proceedings of the Thirty-First Annual ACM-SIAM Symposium on Discrete Algorithms (Salt Lake City, Utah) (SODA '20). Society for Industrial and Applied Mathematics, USA, 1467–1478.
- [27] Talya Eden and Will Rosenbaum. 2018. On Sampling Edges Almost Uniformly. In SIAM Symposium on Simplicity in Algorithms.
- [28] Irene Finocchi, Marco Finocchi, and Emanuele G Fusco. 2015. Clique counting in mapreduce: Algorithms and experiments. Journal of Experimental Algorithmics (JEA) 20 (2015), 1–20.
- [29] Minas Gjoka, Maciej Kurant, Carter T Butts, and Athina Markopoulou. 2011. Practical recommendations on crawling online social networks. IEEE Journal on Selected Areas in Communications 29, 9 (2011), 1872–1892.

- [30] Oded Goldreich. 2017. Introduction to property testing. Cambridge University Press
- [31] Paul W Holland and Samuel Leinhardt. 1977. A method for detecting structure in sociometric data. In Social networks. Elsevier, 411–432.
- [32] Matthew O Jackson, Tomas Rodriguez-Barraquer, and Xu Tan. 2012. Social capital and social quilts: Network patterns of favor exchange. American Economic Review 102, 5 (2012), 1857–97.
- [33] Shweta Jain and C Seshadhri. 2017. A fast and provable method for estimating clique counts using turán's theorem. In Proceedings of the 26th international conference on world wide web. 441–449.
- [34] Daxin Jiang and Jian Pei. 2009. Mining frequent cross-graph quasi-cliques. ACM Transactions on Knowledge Discovery from Data (TKDD) (2009).
- [35] Hossein Jowhari and Mohammad Ghodsi. 2005. New streaming algorithms for counting triangles in graphs. In *International Computing and Combinatorics Conference*. Springer, 710–716.
- [36] Daniel M Kane, Kurt Mehlhorn, Thomas Sauerwald, and He Sun. 2012. Counting arbitrary subgraphs in data streams. In *International Colloquium on Automata*, *Languages, and Programming*. Springer, 598–609.
- [37] U Kang, Leman Akoglu, and Duen Horng Polo Chau. 2013. Big graph mining: Algorithms, anomaly detection, and applications. Proceedings of the ACM ASONAM 13 (2013), 25–28.
- [38] Liran Katzir and Stephen J. Hardiman. 2015. Estimating Clustering Coefficients and Size of Social Networks via Random Walk. ACM Trans. Web 9, 4, Article 19 (sep 2015), 20 pages. https://doi.org/10.1145/2790304
- [39] Frank Kose, Wolfram Weckwerth, Thomas Linke, and Oliver Fiehn. 2001. Visualizing plant metabolomic correlation networks using clique-metabolite matrices. *Bioinformatics* 17, 12 (2001), 1198–1208.
- [40] Jure Leskovec, Kevin J Lang, Anirban Dasgupta, and Michael W Mahoney. 2009. Community structure in large networks: Natural cluster sizes and the absence of large well-defined clusters. *Internet Mathematics* (2009).
- [41] David A Levin and Yuval Peres. 2017. Markov chains and mixing times. Vol. 107. American Mathematical Soc.
- [42] Paul Liu, Austin R Benson, and Moses Charikar. 2019. Sampling methods for counting temporal motifs. In Proceedings of the twelfth ACM international conference on web search and data mining.
- 43] Xiaoming Liu, Peter Henry Tu, Jens Rittscher, Amitha Perera, and Nils Krahnstoever. 2005. Detecting and counting people in surveillance applications. In IEEE Conference on Advanced Video and Signal Based Surveillance, 2005. IEEE, 306–311.
- [44] David W Matula and Leland L Beck. 1983. Smallest-last ordering and clustering and graph coloring algorithms. Journal of the ACM (JACM) 30, 3 (1983), 417–427.
- [45] Benjamin McClosky and Illya V Hicks. 2012. Combinatorial algorithms for the maximum k-plex problem. Journal of combinatorial optimization 23, 1 (2012), 29-49.
- [46] Ron Milo, Shai Shen-Orr, Shalev Itzkovitz, Nadav Kashtan, Dmitri Chklovskii, and Uri Alon. 2002. Network motifs: simple building blocks of complex networks. Science 298, 5594 (2002), 824–827.
- [47] Michael Mitzenmacher, Jakub Pachocki, Richard Peng, Charalampos Tsourakakis, and Shen Chen Xu. 2015. Scalable large near-clique detection in large-scale networks via sampling. In Proceedings of the 21th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining. 815–824.
- [48] Daniel Paulin. 2012. Concentration inequalities for Markov chains by Marton couplings and spectral methods. Electronic Journal of Probability 20 (2012), 1–32.
- [49] Aduri Pavan, Kanat Tangwongsan, Srikanta Tirthapura, and Kun-Lung Wu. 2013. Counting and sampling triangles from a graph streams. In Proceedings of the VLDB Endowment, Vol. 6(14):1870–1881.
- [50] Jian Pei, Daxin Jiang, and Aidong Zhang. 2005. On mining cross-graph quasicliques. In Proceedings of the eleventh ACM SIGKDD international conference on Knowledge discovery in data mining. 228–238.
- [51] Mahmudur Rahman, Mansurul Alam Bhuiyan, and Mohammad Al Hasan. 2014. Graft: An Efficient Graphlet Counting Method for Large Graph Analysis. IEEE Transactions on Knowledge and Data Engineering 26, 10 (2014), 2466–2478. https://doi.org/10.1109/TKDE.2013.2297929
- [52] Mahmudur Rahman and Mohammad Al Hasan. 2014. Sampling Triples from Restricted Networks Using MCMC Strategy. In Proceedings of the 23rd ACM International CIKM (CIKM '14). 1519–1528.
- [53] Michael W Reimann, Max Nolte, Martina Scolamiero, Katharine Turner, Rodrigo Perin, Giuseppe Chindemi, Paweł Dłotko, Ran Levi, Kathryn Hess, and Henry Markram. 2017. Cliques of neurons bound into cavities provide a missing link between structure and function. Frontiers in computational neuroscience 11 (2017), 48
- [54] Bruno Ribeiro and Don Towsley. 2010. Estimating and sampling graphs with multidimensional random walks. In Proceedings of the 10th ACM SIGCOMM conference on Internet measurement. 390–403.
- [55] David Savage, Xiuzhen Zhang, Xinghuo Yu, Pauline Chou, and Qingmai Wang. 2014. Anomaly detection in online social networks. *Social networks* 39 (2014), 62–70.
- [56] Stephen B Seidman and Brian L Foster. 1978. A graph-theoretic generalization of the clique concept. *Journal of Mathematical sociology* 6, 1 (1978), 139–154.

- [57] C Seshadhri and Srikanta Tirthapura. 2019. Scalable subgraph counting: The methods behind the madness: WWW 2019 tutorial. In Proceedings of the Web Conference (WWW), Vol. 2. 75.
- [58] Lorenzo De Stefani, Alessandro Epasto, Matteo Riondato, and Eli Upfal. 2017. Triest: Counting local and global triangles in fully dynamic streams with fixed memory size. ACM Transactions on Knowledge Discovery from Data (TKDD) 11, 4 (2017), 1–50.
- [59] Jakub Tětek and Mikkel Thorup. 2022. Edge sampling and graph parameter estimation via vertex neighborhood accesses. In Proceedings of the 54th Annual ACM SIGACT Symposium on Theory of Computing. 1116–1129.
- [60] Pinghui Wang, John CS Lui, Bruno Ribeiro, Don Towsley, Junzhou Zhao, and Xiaohong Guan. 2014. Efficiently estimating motif statistics of large networks. ACM Transactions on Knowledge Discovery from Data (TKDD) 9, 2 (2014), 1–27.

A MISSING PROOFS

In this section we present all missing proofs from the main sections.

A.1 Missing proofs from Section 2.1

Lemma 2.4 presented an upper bound for the number of occurrences of a c-dense motif in a graph G w.r.t. G's arboricity and c thus extending a result of [26]. Here we present a proof:

Proof of Lemma 2.4. Let $\prec_{\operatorname{arb}}$ be the acyclic ordering on vertices of G where the cout-degree of each vertex is α (this ordering exists by the definition of arboricity [44]). For any $g \in \mathcal{G}(\sigma_j)$, let S(g) be the first c+1 vertices in g w.r.t. $\prec_{\operatorname{arb}}$. Note that since each vertex in g is not connected to at most c other vertices, any vertex in $g \backslash S(g)$ is connected to at least one vertex in S(g). Moreover, let $\mathcal{N}_{\prec_{\operatorname{arb}}}(S)$ be the neighborhood of S by outgoing edges, then since each vertex in S has out-degree at most α , $|\mathcal{N}_{\prec_{\operatorname{arb}}}(S)| \leq (c+1)\alpha$. For a set $S \subset V$ with c+1 vertices, define $\Gamma_{\sigma_j}(S) = \{g \in \mathcal{G}(\sigma_j) : S(g) = S\}$, then we have $|\Gamma_{\sigma_j}(S)| \leq |\mathcal{N}_{\prec_{\operatorname{arb}}}(S)|^{j-(c+1)} \leq ((c+1) \cdot \alpha)^{j-(c+1)}$. Where the first inequality follows from the fact that S needs to add j-(c+1) to construct σ_j and for each vertex there are $|\mathcal{N}_{\prec_{\operatorname{arb}}}(S)|$ possible choices.

Therefore we have:

$$\begin{split} \mathbf{D}\left(\mathcal{G}(\sigma_{i})\right) &= \sum_{g \in \mathcal{G}(\sigma_{i})} \mathbf{D}(g) = \sum_{g \in \mathcal{G}(\sigma_{i})} \mathbf{D}(\mathbf{R}(g)) \leq \sum_{g \in \mathcal{G}(\sigma_{i})} \mathbf{D}(S(g)) \\ &= \sum_{\substack{S \subset V; \\ |S| = c+1}} \sum_{g \in \Gamma_{\sigma_{i}}(S)} |\mathcal{N}(S)| \\ &\leq \sum_{\substack{S \subset V; \\ |S| = c+1}} |\mathcal{N}(S)| \cdot \left((c+1)\alpha \right)^{i-(c+1)} \\ &\leq \left((c+1)\alpha \right)^{i-(c+1)} \sum_{\substack{S; \\ |S| = c+1}} \sum_{v \in S} d(v) \\ &\leq \left((c+1)\alpha \right)^{i-(c+1)} \sum_{v \in V} d(v) \cdot |\{S \subset V : |S| = c+1, v \in S\}| \\ &\leq \left((c+1)\alpha \right)^{i-(c+1)} \cdot \sum_{v \in V} d(v) \cdot n^{c} \\ &\leq \left((c+1)\alpha \right)^{i-(c+1)} \cdot 2m \cdot n^{c} \end{split}$$

A.2 Missing proofs from Section 3.1

In this section, we present all the missing proofs that lead to the proof of Theorem 1.1. In the first subsection, we present all the proofs which lead to the proof of Lemma 3.2, which states that our

estimator is unbiased. In the second subsection we show that our estimator is concentrated around its mean, in this proof we need to use that all layers are "nice". In the last subsection we show using an inductive proof that all the layers are nice.

A.2.1 Unbiased Estimator. Lemma 3.2 shows that the output of DEMETRIS, \widehat{T} , is an unbiased estimator for T. To prove it, we first show the following lemma:

Lemma A.1. Let $g \in \mathcal{G}(\zeta)$, after running ConstructLayers, the probability that g is sampled at any iteration of the final loop and added to \mathcal{L}_k is equal to $1/c_k$.

PROOF. Let $g \in \mathcal{G}(\zeta)$ and g_2, g_3, \ldots, g_k be such that for $i = 2, 3, \ldots, k-1$ we have $g_i = \mathcal{A}_{i+1}(g')$. Note that given $\sigma(\zeta)$ and ζ for each $g \in \mathcal{G}(\zeta)$ the sequence of g_2, g_3, \ldots, g_k will be determined uniquely, furthermore we have $g_i \in \mathcal{G}(\sigma_i(\zeta))$. Let $A_{i,\kappa}$ be the event that at iteration κ, g_i is sampled and added to \mathcal{L}_i and let A_i be the total number of copies of g_i in \mathcal{L}_i . Using induction, we prove a more general statement that $\mathbb{P}(A_{i,\kappa}) = 1/c_i$ for any $\kappa = 1, 2, \ldots, l_i$.

Assume the inductive hypothesis for i-1 and arbitrary k'=1: l_{i-1} .

$$\begin{split} \mathbb{P}\left(A_{i,\kappa}\right) &= \left(\frac{\mathcal{D}(g_{i-1})}{\mathcal{D}_{i-1}} \cdot \frac{1}{\mathcal{D}(g_{j-1})}\right) \cdot A_{i-1} \\ &= \frac{1}{\mathcal{D}_{i-1}} \cdot \sum_{\kappa'=1}^{l_{i-1}} \mathbb{P}\left(A_{i-1,\kappa'}\right) = \frac{1}{\mathcal{D}_{i-1}} \cdot l_{i-1} \cdot \frac{\tilde{r}}{m} \cdot \prod_{j=3}^{i-2} \frac{l_j}{\mathcal{D}_{j-1}} \cdot \frac{1}{\mathcal{D}_{i-2}} \\ &= \frac{\tilde{r}}{m} \cdot \frac{1}{\mathcal{D}_{i-1}} \cdot \prod_{j=3}^{i-1} \frac{l_j}{\mathcal{D}_{j-1}} = \frac{1}{c_i} \end{split}$$

where the fourth equality follows from enforcing the induction hypothesis and the fact that the rounds are independent. \Box

PROOF OF LEMMA 3.2. Note that we have $\widehat{T}=Y\cdot \frac{c_k}{l_k}$, so it suffices to show $\mathbb{E}[Y]=T\frac{l_k}{c_k}$. Consider the loop in which we collect the last layer. Let Y(i,g) denote the random variable indicating whether some $g\in\mathcal{G}(\zeta)$ has been sampled at iteration i

$$\mathbb{E}[Y] = \sum_{g \in \mathcal{G}(\zeta)} \sum_{\kappa=1}^{l_k} \mathbb{E}[Y(i,g)] = |\mathcal{G}(\zeta)| \sum_{\kappa=1}^{l_k} 1/c_k = T \cdot \frac{l_k}{c_k}$$

A.2.2 High Probability Concentration. In this subsection we prove that if the last layer is nice then we have high probability concentration for \widehat{T} . In other words we prove lemma 3.3 which states:

If $C_{k-1}(\mathcal{L}_{k-1}) \in (1 \pm \epsilon)^{k-1} \cdot \frac{T}{c_{k-1}}$ (see Equation (Nice-Range)), and Equation (2) holds, then

$$\widehat{T} = \frac{c_k}{l_L} \cdot Y \in (1 \pm \epsilon)^k T .$$

Proof of Lemma 3.3. Note that $c_k = c_{k-1} \cdot \frac{\mathbf{D}_{k-1}}{l_{k-1}}$, thus,

$$\begin{split} \widehat{T} &= Y \cdot \frac{c_k}{l_k} \in (1 \pm \epsilon) \cdot \frac{c_k}{l_k} \cdot \frac{l_k}{\mathrm{D}(\mathcal{L}_{k-1})} \cdot \mathrm{C}_{k-1}(\mathcal{L}_{k-1}) \\ &\in (1 \pm \epsilon) \cdot (1 \pm \epsilon)^{k-c_k} \cdot \frac{1}{\mathrm{D}_{k-1}} \cdot \frac{l_{k-1}}{c_{k-1}} \cdot T \in (1 \pm \epsilon)^k T \ . \end{split}$$

A.2.3 Niceness of Layers. We now prove Lemma 3.5 and Lemma 3.4, and a more general version of Lemma 3.6. In order to prove these lemmas we first establish bounds on the expected value of degree of different layers and the expected value of total motif count of different layers. Consider ζ and a segmentation of it $\sigma = \sigma_2, \sigma_3, \ldots, \sigma_k$.

LEMMA A.2. We have $\mathbb{E}[D_2] = \frac{\tilde{r}}{m} \cdot D(E)$, and for i = 3, 4, ..., k $\mathbb{E}[D_i] = \frac{l_i}{c} \cdot D(\mathcal{G}(\sigma_i))$.

Proof. Using linearity of expectation we conclude:

$$\mathbb{E}\left[\mathsf{D}(R)\right] = \sum_{e \in E} \mathbb{P}\left(e \in R\right) \mathsf{D}(e) = \frac{\bar{r}}{m} \sum_{e \in E} \mathsf{D}(e) = \frac{\bar{r}}{m} \mathsf{D}(E) \ .$$

Similarly employing lemma A.1 we have:

$$\begin{split} \mathbb{E}\left[\mathbf{D}(\mathcal{L}_i)\right] &= \sum_{g_i \in \mathcal{G}(\sigma_i)} \sum_{j=1}^{l_i} \mathbb{P}\left(g_i \text{ is sampled}\right) \mathbf{D}(g_i) \\ &= \frac{1}{c_i} \sum_{j=1}^{l_i} \cdot \sum_{g_i \in \mathcal{G}(\sigma_i)} \mathbf{D}(g_i) \\ &= \frac{l_i}{c_i} \cdot \mathbf{D}\left(\mathcal{G}(\sigma_i)\right) \enspace . \end{split}$$

Lemma A.3. We have $\mathbb{E}\left[C_2(\mathcal{L}_2)\right] = \frac{\tilde{r}}{m} \cdot T$ and $\mathbb{V}\left[C_2(R)\right] \leq \frac{\tau_{\mathrm{rel}}}{2} \cdot C_2^{\max} \cdot \frac{\tilde{r}}{m} \cdot T$.

PROOF. Let
$$\mathcal{L}_2 = \{e_1, e_2, \dots, e_{\bar{r}}\}$$
 we have
$$\mathbb{E}\left[\mathbb{C}_2(\mathcal{L}_2)\right] = \sum_{e \in E} \sum_{g \in \mathcal{A}^{-1}(g)} \mathbb{P}(e \text{ is sampled})$$
$$= \sum_{e \in E} \sum_{g \in \mathcal{A}^{-1}(g)} \frac{\bar{r}}{m}$$
$$= \frac{\bar{r}}{} \cdot T \; .$$

Using theorem 2.2 we bound the variance as

$$\begin{split} \mathbb{V}\left[\mathsf{C}_{2}(\mathcal{L}_{2})\right] &\leq \sum_{i,j=1}^{\tilde{r}} \mathbb{C}\left[\mathsf{C}_{2}(e_{i}),\mathsf{C}_{2}(e_{j})\right] \leq 2 \sum_{i=1}^{\tilde{r}} \sum_{j=i}^{\tilde{r}} \mathbb{C}\left[\mathsf{C}_{2}(e_{i}),\mathsf{C}_{2}(e_{j})\right] \\ &\leq 2 \sum_{i=1}^{\tilde{r}} \sum_{j=i}^{\tilde{r}} \lambda^{j} \mathbb{V}\left[\mathsf{C}_{2}(e_{i})\right] \leq \frac{1}{2} \sum_{i=1}^{\tilde{r}} \frac{1}{1-\lambda} \mathbb{V}\left[\mathsf{C}_{2}(e_{i})\right] \\ &\leq 2 \sum_{i=1}^{\tilde{r}} \frac{1}{1-\lambda} \mathsf{C}_{2}^{\max} \cdot \mathbb{E}\left[\mathsf{C}_{2}(e_{i})\right] \leq 2\tau_{\mathrm{rel}} \cdot \mathsf{C}_{2}^{\max} \cdot \frac{\tilde{r}}{m} \cdot |\mathcal{G}(\zeta)| \end{split}$$

Now having these lemmas for the expected degree of layers and also concentration of number of motifs assigned to the starting layer, it remains to bound the expected value of motif counts of higher level which can be achieved by the following inductive lemma on layers.

The following lemma generalized and extends Lemma 3.6:

LEMMA A.4. Assume we ConstructLayers has reached the i-1-th iteration thus \mathcal{L}_{i-1} is sampled. For the next iteration we have:

$$\mathbb{E}\left[C_{i}(\mathcal{L}_{i}) \mid \mathcal{L}_{i-1}\right] = l_{i} \cdot \frac{C_{i-1}(\mathcal{L}_{i-1})}{D(\mathcal{L}_{i-1})} \tag{3}$$

Furthermore we have

$$\mathbb{V}\left[C_{i}(\mathcal{L}_{i}) \mid \mathcal{L}_{i-1}\right] \leq C_{i}^{\max} \mathbb{E}\left[C_{i}(\mathcal{L}_{i}) \mid \mathcal{L}_{i-1}\right]. \tag{4}$$

PROOF. We first prove eq. (3). For an iteration $1 \le j \le l_i$, let g_j denote the graph picked in line 7 and let g_j' be the graph picked in line 10. So we have Note that

$$\mathbb{E}\left[C_{i}(\mathcal{L}_{i}) \mid \mathcal{L}_{i-1}\right]$$

$$= \sum_{j=1}^{l_{i}} \sum_{\substack{g \in \mathcal{L}_{i-1}, u \in \mathcal{N}_{\sigma}(g):\\ g = \mathcal{R}_{i}(g+u)}} \mathbb{P}\left(g = g_{j}\right) \cdot \mathbb{P}\left(u = g_{j} \setminus g'_{j}\right) \cdot C_{i}(g+u)$$

$$= \sum_{j=1}^{l_{i}} \sum_{\substack{g \in \mathcal{L}_{i-1}, u \in \mathcal{N}_{\sigma}(g):\\ g = \mathcal{R}_{i}(g+u)}} \frac{D(g)}{D_{i-1}} \cdot \frac{1}{D(g)} \cdot C_{i}(g+u)$$

$$= \sum_{j=1}^{l_{i}} \sum_{\substack{g \in \mathcal{L}_{i-1}, u \in \mathcal{N}_{\sigma}(g):\\ G = G(g+u)}} \frac{C_{i}(g+u)}{D_{i-1}} = l_{i} \cdot \frac{C_{i-1}(\mathcal{L}_{i-1})}{D_{i-1}} .$$

where the last inequality follows from the fact that $C_{i-1}(g)$ is aggregation of $C_i(g')$ over g' which gets assigned to g and can be obtained from g by adding some vertex in $u \in \mathcal{N}_{\sigma}(g)$.

To see eq. (4) note that samples form \mathcal{L}_i are collected independently. Thus we have:

$$\begin{split} & \mathbb{V}\left[C_{i}(\mathcal{L}_{i}) \mid \mathcal{L}_{i-1}\right] \leq \mathbb{E}\left[C_{i}(\mathcal{L}_{i})^{2} \mid \mathcal{L}_{i-1}\right] \\ & = \sum_{g \in \mathcal{L}_{i}} \mathbb{E}\left[C_{i}(g)^{2} \mid \mathcal{L}_{i-1}\right] \leq C_{i}^{\max} \cdot \sum_{g \in \mathcal{L}_{i}} \mathbb{E}\left[C_{i}(g) \mid \mathcal{L}_{i-1}\right] \\ & = C_{i}^{\max} \cdot \mathbb{E}\left[C_{i}(\mathcal{L}_{i}) \mid \mathcal{L}_{i-1}\right] \; . \end{split}$$

Now we have the ingredients for proving the main lemma.

Proof of Lemma 3.5. Assume \mathcal{L}_i is sampled. We now use Chebyshev's inequality to show concentration of $C_i(\mathcal{L}_i)$.

$$\begin{split} & \mathbb{P}\left(\left|C_{i}(\mathcal{L}_{i}) - \mathbb{E}\left[C_{i}(\mathcal{L}_{i})\right]\right| \geq \epsilon \cdot \mathbb{E}\left[C_{i}(\mathcal{L}_{i})\right]\right) \leq \frac{\mathbb{V}\left[C_{i}(\mathcal{L}_{i})\right]}{\epsilon^{2}\mathbb{E}\left[C_{i}(\mathcal{L}_{i})\right]^{2}} \\ & \leq \frac{C_{i}^{\max} \cdot \mathbb{E}\left[C_{i}(\mathcal{L}_{i})\right]}{\epsilon^{2} \cdot \mathbb{E}\left[C_{i}(\mathcal{L}_{i})\right]^{2}} \leq \frac{C_{i}^{\max}}{\epsilon^{2} \cdot \mathbb{E}\left[C_{i}(\mathcal{L}_{i})\right]} \leq \frac{C_{i}^{\max}}{\epsilon^{2} \cdot l_{i} \cdot \frac{C_{i-1}(\mathcal{L}_{i-1})}{D_{i-1}}} \end{split}$$

Taking $l_i \geq \frac{\log n}{\epsilon^2} \cdot C_i^{\max} \cdot \frac{D_{i-1}}{C_{i-1}(\mathcal{L}_{i-1})}$ we bound the above probability by $\frac{1}{\log n}$. Plugging in the value of $\mathbb{E}\left[C_i(\mathcal{L}_i)\right]$ we have:

$$\mathbb{P}\left(C_i(\mathcal{L}_i) \in (1 \pm \epsilon) \frac{l_i}{D_{i-1}} \cdot C_{i-1}(\mathcal{L}_{i-1})\right) \ge 1 - \frac{1}{\log n} .$$

We now use the assumption that \mathcal{L}_{i-1} is nice. Using eq. (Nice-Range) we have $C_{i-1}(\mathcal{L}_{i-1}) \in (1 \pm \epsilon)^{i-1} \cdot \frac{l_{i-1}}{c_{i-1}} \cdot T$. Thus, w.p. at least $1 - \frac{1}{\log n}$:

$$\begin{aligned} C_i(\mathcal{L}_i) &\in (1 \pm \epsilon) \frac{l_i}{D(\mathcal{L}_{i-1})} \cdot C_{i-1}(\mathcal{L}_{i-1}) \\ \Longrightarrow & C_i(\mathcal{L}_i) \in (1 \pm \epsilon) \frac{l_i}{D(\mathcal{L}_{i-1})} \cdot (1 \pm \epsilon)^{i-1} \cdot \frac{T}{c_{i-1}/l_{i-1}} \\ \Longrightarrow & C_i(\mathcal{L}_i) \in (1 \pm \epsilon)^i \cdot \frac{l_i}{c_i} \cdot T \ . \end{aligned}$$

Thus we conclude that eq. (Nice-Range) holds w.p. $1 - \frac{1}{\log n}$. Now for proving eq. (Nice-Range), we divide both sides by D_i , so we get

$$\frac{C_i(\mathcal{L}_i)}{D_i} \in (1 \pm \epsilon)^i \cdot \frac{T}{D_i \cdot c_i/l_i}$$

Since by lemma A.2, $\mathbb{E}[D_i] = \frac{l_i}{c_i} \cdot D(\mathcal{G}(\sigma_i))$, by Markov inequality,

$$\mathbb{P}\left(\mathsf{D}_i \geq \log(n) \cdot \frac{\mathsf{D}(\mathcal{G}(\sigma_i))}{c_i/l_i}\right) \leq \log(n)^{-1}$$

, so we get that $\frac{C_i(\mathcal{L}_i)}{D_i} \geq (1 - \epsilon)^i \cdot \frac{T}{\log(n)D(\mathcal{G}(\sigma_i))}$ holds with probability at least $1 - \log(n)^{-1}$.

Proof of Lemma 3.6. For an iteration $1 \leq j \leq l_i$, let g_j denote the motif picked in line 7 and let g_j' be the motif picked in line 10 in iteration j of constructing \mathcal{L}_i . $Y_{i,j}$ is an indicator random variable where $Y_{i,j} = 1$ iff $g_j = \mathcal{H}_i(g_j')$ and $Y_{i,j} = 0$ otherwise. By linearity of expectation, we have:

$$\mathbb{E}\left[Y \mid \mathcal{L}_{k-1}\right] = \sum_{j=1}^{l_k} \mathbb{P}\left(Y_{i,j} = 1 \mid \mathcal{L}_{k-1}\right)$$

$$= \sum_{j=1}^{l_k} \sum_{\substack{g \in \mathcal{L}_{i-1}, \\ u \in \mathcal{N}_{\sigma}(g)}} \mathbb{P}\left(g = g_j, u = g'_j \setminus g_j, \text{ and } g_j = \mathcal{A}_i(g'_j)\right)$$

$$= \sum_{j=1}^{l_k} \sum_{\substack{g \in \mathcal{L}_{i-1}, \\ u \in \mathcal{N}_{\sigma}(g)}} \frac{D(g)}{D_{k-1}} \cdot \frac{1}{D(g)} \cdot \frac{C_{k-1}(g)}{D(g)}$$

$$= \sum_{j=1}^{l_k} \frac{1}{D_{k-1}} \cdot \sum_{\substack{g \in \mathcal{L}_{i-1}, u \in \mathcal{N}_{\sigma}(g)}} \frac{C_{k-1}(g)}{D(g)}$$

$$= \sum_{j=1}^{l_k} \frac{1}{D_{k-1}} \cdot \sum_{\substack{g \in \mathcal{L}_{i-1}}} |\mathcal{N}_{\sigma}(g)| \cdot \frac{C_{k-1}(g)}{D(g)} = l_k \cdot \frac{C_{k-1}(\mathcal{L}_{k-1})}{D_{k-1}}.$$

B ADDITIONAL EXPERIMENTS

Figure 6 is the extension of Figure fig. 5 comparing the performances of DEMETRIS and SRW2. For each dataset, for each motif type, and for a fixed length of random walk, we run both the algorithms 100 times and then plot median relative error in estimation vs the percentage of edges visited. As mentioned before, except for soc-livejournal DEMETRIS beats SRW2 significantly in terms of the median relative error percentage.

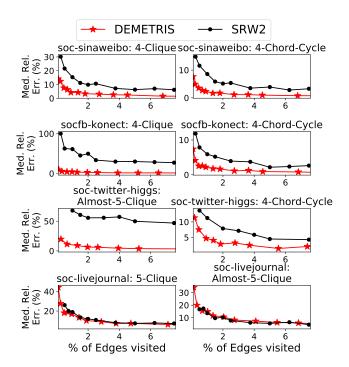


Figure 6: Comparison against baseline.

П