

Near Tight Shortest Paths in the Hybrid Model

Philipp Schneider, University of Bern, Switzerland
(philipp.schneider2@unibe.ch)

Abstract

Shortest paths problems are subject to extensive studies in classic distributed models such as the CONGEST or Congested Clique. These models dictate how nodes may communicate in order to determine shortest paths in a distributed input graph. This article focuses on shortest paths problems in the HYBRID model, which combines local communication along edges of the input graph with global communication between arbitrary pairs of nodes that is restricted in terms of bandwidth.

Previous work showed that it takes $\tilde{\Omega}(\sqrt{k})$ rounds in the HYBRID model for each node to learn its distance to k dedicated source nodes (aka the k -SSP problem), even for crude approximations. This lower bound was also matched with algorithmic solutions for $k \geq n^{2/3}$. However, as k gets smaller, the gap between the known upper and lower bounds diverges and even becomes exponential for the single source shortest paths problem (SSSP). In this work we close this gap for the whole range of k (up to terms that are polylogarithmic in n), by giving algorithmic solutions for k -SSP in $\tilde{O}(\sqrt{k})$ rounds for any k .

1 Introduction

Computing or approximating shortest paths in a network has important uses, for instance to obtain information about the topology of the network or as a subroutine for related tasks like computing or updating tables for IP routing. In shortest paths problems nodes of a network are required to learn their distance to other nodes and in the distributed version of the shortest paths problem knowledge of input graph is spread over the nodes, which must then determine their distance to other nodes by efficiently communicating with each other.

This problem has obtained significant attention from a theoretical angle in the classical models of distributed computing over the last decade (see e.g. [24, 50] and the references therein). These classic models come in two different “flavors”. The first is based on *local communication* in a graph, where nodes communicate in synchronous rounds and in each such round adjacent pairs of nodes in a graph G , which also serves as the problem input, may exchange a small message (this is called CONGEST model).

The second flavor captures *global communication*, where any pair of nodes can exchange a small message per round and each node initially knows only its neighbors of the input graph G (this became known as the Congested Clique model). Another example of global communication is the MPC model (cf. [7, 12, 31, 41]), which in some sense generalizes the Congested Clique model and was inspired by practical applications (cf. MapReduce [23]).

Theoretic research on distributed graph problems and in particular shortest paths problems has concentrated mostly on distributed models where nodes use only either a local or global mode of communication. This began to change only recently with the introduction of the so called HYBRID model [11], where nodes have access to two modes of communication. First, a graph based local mode which allows neighbors to communicate by exchanging relatively large messages. And second, a global mode where any pair of nodes can communicate in principle but only a few small messages may be exchanged each round.

The hybrid model is intended to capture the fact that in modern networks, nodes can often interface with multiple, diverse communication infrastructures. For instance, data centers combine wired communication with wireless communication [34]. Organizations can augment their own networks with communication over the Internet using virtual private networks (VPNs) [52]. Another example are mobile devices like smart-phones, which have access to high bandwidth, short range communication via WiFi or Bluetooth with other devices that are close by, which can be combined with the relatively low-bandwidth communication via the cellular network (cf., 5G [8]).

1.1 The HYBRID model

For the formal definition of the HYBRID model, we rely on the concept of *synchronous message passing* [49], where nodes exchange messages and conduct local computations in synchronous rounds. Note that synchronous message passing focuses on the *round complexity*, i.e., the number of rounds required to solve a distributed problem, and therefore nodes are considered computationally unbounded.

Definition 1 (Synchronous Message Passing, cf. [49]). *Let V be a set of n nodes with unique identifiers $ID: V \rightarrow [n] \stackrel{\text{def}}{=} \{1, \dots, n\}$. Time is slotted into discrete rounds. Nodes wake up synchronously at the start of some round and each round consists of the following steps. First, all nodes receive the set of messages addressed to them in the last round. Second, nodes conduct computations based on their current state and the set of received messages to compute their new state (randomized algorithms also include the result of a random function). Third, based on the new state, the next messages are sent.*

The aim of the HYBRID model is to reflect the fundamental concepts of *locality* and *congestion* to capture the nature of distributed systems that combine both physical and logical networks.

Definition 2 (cf. [10]). *The $\text{HYBRID}(\lambda, \gamma)$ model is a synchronous message passing model (Def. 1), subject to the following restrictions. Local mode: nodes may send a message per round of maximum size λ bits to each of their neighbors in a connected graph. Global mode: nodes can send and receive messages of total size at most γ bits per round to/from any other node(s) in the network. If these restrictions are violated a strong adversary¹ selects the messages that are delivered.*

The parameter λ restricts the bandwidth over edges in the local network, and γ restricts the amount of global communication of nodes. Notably, the classical models of distributed computing are covered by this model as marginal cases: LOCAL and CONGEST are given by $\gamma = 0$ and $\lambda = \infty$ and $\lambda \in O(\log n)$, respectively. The

¹The strong adversary knows the states of all nodes, their source codes and even the outcome of all random functions.

Congested Clique and NCC models are given by $\lambda = 0$ and $\gamma \in O(n \log n)$ (due to Lenzen's routing algorithm [45]) and $\gamma \in O(\log^2 n)$, respectively.

Of particular practical and theoretical interest are non-marginal parameterizations of $\text{HYBRID}(\lambda, \gamma)$ that push both communication modes to one extreme end of the spectrum. More specifically, to model the high bandwidth of physical connections we leave the size of local messages unrestricted. To model the severely restricted global bandwidth of shared logical networks, we allow only polylog n bits of global communication per node per round. Formally, we define the “standard” hybrid model as a combination of the standard LOCAL [51] and node-capacitated clique [10] models: $\text{HYBRID} := \text{HYBRID}(\infty, O(\log^2 n))$.

1.2 Preliminaries

We continue with some definitions, conventions and nomenclature that we will use in the following.

Definition 3 (*k*-Sources Shortest Paths (*k*-SSP) Problem). *Given a subset of k source nodes in a graph $G = (V, E)$, every node $v \in V$ has to learn $d(v, s)$ for all sources s . In the α -approximate version of the problem for stretch $\alpha \geq 1$, every $u \in V$ has to learn values $\tilde{d}(v, s)$ such that $d(v, s) \leq \tilde{d}(v, s) \leq \alpha d(v, s)$ for all sources s .*

The *all-pairs shortest paths problem* (APSP) equals the case $k = n$ and the single-source shortest paths problem (SSSP) equals the case $k = 1$. Note that the local communication graph and the input graph for the graph problem are the same, which is a standard assumption for distributed models with graph-based communication (like LOCAL and CONGEST).

Our algorithms are randomized and aim for success *with high probability* (w.h.p.), which means with success probability at least $1 - \frac{1}{n^c}$ for an arbitrary constant $c > 0$. We write i.i.d. if we pick elements from some set *independently, identically distributed*. In this work, logarithm functions without subscript are generally to the base of two, i.e., $\log \stackrel{\text{def}}{=} \log_2$. Sometimes we write polylog n to describe terms of the form $q(\log n)$ where q is a polynomial. We abbreviate sets of the form $\{1, \dots, k\}$, $k \in \mathbb{N}$ with $[k]$. We will often neglect logarithmic factors in n using the soft \tilde{O} -notation.

We consider undirected, connected communication graphs $G = (V, E)$. Edges have weights $w : E \rightarrow [W]$, where W is at most polynomial in n , thus the weight of an edge and of a simple path fits into a $O(\log n)$ bit message. A graph is considered unweighted if $W = 1$. Let $w(P) = \sum_{e \in P} w(e)$ denote the length of a path $P \subseteq E$.

Then the *distance* between two nodes $u, v \in V$ is $d_G(u, v) := \min_{u-v\text{-path } P} w(P)$. A path with smallest length between two nodes is called a *shortest path*. Let $|P|$ be the number of edges (or *hops*) of a path P . We define the *h -hop limited distance* from u to v as $d_{G,h}(u, v) := \min_{u-v\text{-path } P, |P| \leq h} w(P)$. If there is no u - v path P with $|P| \leq h$ we define $d_{G,h}(u, v) := \infty$.

The *hop-distance* between two nodes u and v is defined as $\text{hop}_G(u, v) := \min_{u-v\text{-path } P} |P|$. We generalize this for sets $U, W \subseteq V$ $\text{hop}_G(U, W) := \min_{u \in U, w \in W} \text{hop}_G(u, w)$ (whereas $\text{hop}_G(v, v) := 0$). The *diameter* of G is defined as $D_G := \max_{u, v \in V} \text{hop}_G(u, v)$. We drop the subscript G , if G is clear from the context.

1.3 Related Work

Local Communication Networks. Shortest paths problems have been intensely studied in the CONGEST model. For the SSSP problem, [54] showed that any approximation algorithm has a runtime of $\tilde{\Omega}(\sqrt{n} + D)$ for any constant stretch. Following the publication of this lower bound, there has been a series of papers that attempt to obtain algorithms that get close to the lower bound, see [13, 20, 22, 26, 28, 30, 35, 46, 50]. Notably, the work of [13] gives an algorithm that computes a $(1 + \epsilon)$ -approximate SSSP solution in time $\tilde{O}(\sqrt{n} + D)$.

In another strain of work, [33, 57] aim for SSSP algorithms that are competitive in terms of complexity to the best algorithm that can be crafted for a given graph topology, which is also known as *universal optimality*. The work of [57] achieves a $(1 + \epsilon)$ approximation, in time $T \cdot n^{o(1)}$, where T is the complexity of the best CONGEST algorithm for the given topology, which comes close to the best known algorithm that is optimized for the worst case where $T \in \tilde{\Omega}(\sqrt{n} + D)$ (see above).

The APSP problem in CONGEST has received significant attention as well [1–5, 14, 18, 26, 29, 37–39, 47, 50]. Linear lower bounds that hold for small diameter graphs are shown or implied by [1, 18, 29, 50]. Notably a lower bound of $\tilde{\Omega}(n/\log n)$ [50] that holds for the unweighted case and constant stretch approximations is matched by an $O(n/\log n)$ algorithm for unweighted graphs [38]. Interestingly, [2] gives a $\Omega(n)$ lower bound for the weighted problem, thus separating it from the unweighted case. In terms of algorithmic upper bounds, the current state of the art is the randomized algorithm by [14], which computes an exact solution in $\tilde{O}(n)$ rounds, even for directed edges with negative and zero weights. The best deterministic, exact algorithm takes $\tilde{O}(n^{4/3})$ rounds and is due to [4].

Global Communication Networks. Shortest paths problems also obtained significant attention in the Congested Clique model, see, [15–17, 21, 24, 25, 40, 44]. Some of these results give fast (down to $\tilde{O}(1)$ rounds), constant approximations for APSP and k -SSP in the Congested Clique model. The power of the Congested Clique model is demonstrated by [25] which achieves a $\text{poly}(\log \log n)$ round, constant approximation of APSP on *unweighted* graphs. For cruder $\tilde{O}(1)$ approximations of APSP [24] even achieves constant rounds on weighted graphs.

In a branch similar to Congested Clique, the work of [13, 36, 50] investigates shortest paths in the *broadcast* variant of Congested Clique, where in each round, each node may broadcast a single message. Notably, [13] gives a $(1+\epsilon)$ -approximation algorithm for the SSSP problem that runs in $\tilde{O}(1)$ rounds. Finally, [10] introduces the more restrictive NCC model and considers various fundamental graph problems. Their algorithmic solutions include the computation of BFS trees, which can be used to solve the SSSP problem for *unweighted* graphs of *bounded arboricity* in $\tilde{O}(D)$ rounds.

Hybrid Communication Networks A graphic overview of the state of the art for the k -SSP problem is provided in Figure 1. Research on shortest paths in the HYBRID model was started by [11], with a range of results. They introduce a technique for efficiently broadcasting messages in the network, which they leverage, for instance, to obtain an exact solution of APSP in $\tilde{O}(n^{2/3})$ rounds and a $1+\epsilon$ approximation in $\tilde{O}(\sqrt{n})$ rounds (for constant $\epsilon > 0$), matching their lower bound of $\tilde{\Omega}(\sqrt{n})$ (which holds even for randomized $O(\sqrt{n})$ approximations). For SSSP, they give a $1+\epsilon$ approximation

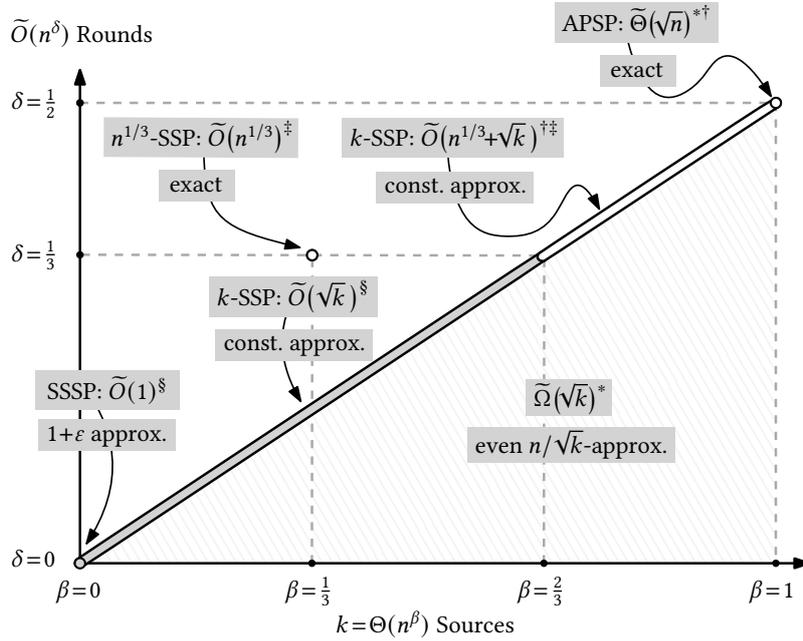


Figure 1: Complexity landscape of the k -SSP problem with the number of sources on the horizontal and the round complexity on the vertical axis. Circles or bars denote known upper bounds (ours in gray). The gray shaded area denotes the lower bound. References are as follows *: [11], †: [42], ‡: [19], §: this work.

in $\tilde{O}(n^{1/3})$ rounds, a $(1/\epsilon)^{O(1/\epsilon)}$ approximation in $\tilde{O}(n^\epsilon)$ rounds and an exact solution in $\tilde{O}(\sqrt{SPD})$ rounds, where SPD is the shortest path diameter.

Subsequently, [42] improves APSP to $\tilde{O}(n^{1/2})$ for an exact solution based on a scheme for efficiently unicasting messages in the network, which settled the problem (up to logarithmic factors in the round complexity). They also give an exact solution for SSSP in $\tilde{O}(n^{3/5})$ rounds and constant stretch approximations for k -SSP in $\tilde{O}(n^{1/3} + \sqrt{k})$ rounds, which is tight with their lower bound of $\tilde{\Omega}(\sqrt{k})$ rounds for $k \geq n^{2/3}$. The stretch was later improved by [19] which combines the techniques of [42] with a density sensitive approach. In particular, [19] gives exact solutions for $k \geq n^{2/3}$ random sources in $\tilde{O}(\sqrt{k})$ rounds and for $n^{1/3}$ -SSP in $\tilde{O}(n^{1/3})$ rounds.

In a subsequent work, [20] uses density awareness in a different way to solve SSSP in $\tilde{O}(n^{5/17})$ rounds for stretch $(1+\epsilon)$. A deterministic protocol for efficiently broadcasting local edges is given by [6] and then used to obtain a deterministic APSP-algorithm with stretch $\frac{\log n}{\log \log n}$ in $\tilde{O}(n^{1/2})$ rounds. For classes of sparse graphs (e.g., cactus graphs), [27] demonstrates that polylog n solutions are possible even with CONGEST as local network.

1.4 Contributions

Shortest paths problems are hard to solve if only either of the constituent communication modes of the HYBRID model can be used in isolation. In the LOCAL model computing even crude approximations for a single source requires D_G rounds, where

D_G is the diameter of G which can be linear in n . In the NCC model, a single node learning its distance to k source nodes has a lower bound of $\tilde{\Omega}(k)$. By contrast, the known bounds for the k -SSP problem (see Definition 3) in the HYBRID model are $\tilde{\Omega}(\sqrt{k})$ for $k \in [n]$ and $\tilde{O}(\sqrt{k})$ for relatively large k [11, 42]. This work focuses on closing the gap to the lower bound for the whole range of $k \in [n]$ (up to $\tilde{O}(1)$ factors). In particular, we show the following.

- There exists an algorithm that solves the single sources shortest paths problem with stretch $(1+\varepsilon)$ w.h.p. in $\tilde{O}(1)$ rounds in the HYBRID model (Theorem 4).
- There exists an algorithm that solves the k random sources shortest paths problem with stretch $(1+\varepsilon)$ w.h.p. in $\tilde{O}(\sqrt{k})$ rounds in the HYBRID model (Thm.11).
- There exists an algorithm that solves the k sources shortest paths problem with stretch $(3+\varepsilon)$ w.h.p. in $\tilde{O}(\sqrt{k})$ rounds in the HYBRID model (Theorem 11).

The currently fastest algorithms for constant stretch SSSP are by [11] which takes $O(n^\varepsilon)$ rounds (where ε is required to be constant to keep a constant stretch) and by [20] for stretch $1+\varepsilon$ in $\tilde{O}(n^{5/17})$ rounds. Both solutions are exponentially slower than the $1+\varepsilon$ approximation proposed in this work. The known lower bound for k -SSP of $\tilde{\Omega}(\sqrt{k})$, which holds even for randomized algorithms and extremely large stretch in $\tilde{\Omega}(\sqrt{n})$ was matched (up to $\tilde{O}(1)$ factors) for $k \geq n^{2/3}$ by a series of articles [11, 19, 42], with varying, constant stretches. However, tight algorithms below this threshold for k have been elusive and this work answers the question whether the lower bound of $\tilde{\Omega}(\sqrt{k})$ can be matched for $k < n^{2/3}$ positively. The current complexity landscape of the k -SSP problem in HYBRID is given by Figure 1. Furthermore, we generalize our solutions for k -SSP for the HYBRID(∞, γ) model and show that approximations can be obtained in $\tilde{O}(\sqrt{k/\gamma})$ rounds² (details in Theorem 11), demonstrating the benefit of larger global capacity for solving k -SSP.

In terms of technical contributions, we show that an interface model called Minor-Aggregation and an oracle to solve the Eulerian-Orientation problem that were introduced by [53] (for SSSP solutions in the PRAM model), can be efficiently implemented in the HYBRID model, which might be useful in case other problems have fast solutions in this interface model. Furthermore, we show that multiple graph algorithms can be scheduled efficiently in parallel on an appropriately sized skeleton graph. This is useful for our purposes since we can reduce k -SSP to multiple instances of SSSP on such a skeleton graph, but might prove equally useful for other graph problems that can be broken into smaller problems on skeleton graphs in a similar way.

2 Almost Optimal SSSP in Polylogarithmic Time

In this section we show how to obtain an almost optimal $\tilde{O}(1)$ round algorithm for the HYBRID model by adapting the techniques of [53]. In particular, we will prove the following theorem.

Theorem 4. *A $(1+\varepsilon)$ -approximation of SSSP can be computed in $\tilde{O}(1/\varepsilon^2)$ rounds in the HYBRID model, w.h.p.*

²Note that this is also tight up to $\tilde{O}(1)$ factors due to a matching lower bound of $\tilde{O}(\sqrt{k/\gamma})$ by [55] for k -SSP, which is a slight generalization of the lower bound of [42].

The goal of [53] is the computation of an almost shortest path tree in the PRAM model with linear work and $\tilde{O}(1)$ depth. Their main machinery is the simulation of an interface model, called *Minor-Aggregation model*, defined as follows. Let $G = (V, E)$ an undirected input graph. In a difference to the synchronous message passing model (Definition 1) nodes *and edges* are assumed to be individual computational units that communicate in synchronous rounds and conduct arbitrary local computations in each round. Initially, nodes know their ID of size $\tilde{O}(1)$ and edges know the IDs of their endpoints. Each round, communication occurs by conducting the following operations (in that order).

- **Contraction:** Each edge e chooses a value $c_e \in \{\top, \perp\}$, which defines a minor network $G' = (V', E')$ where all edges with $c_e = \top$ are contracted. This forms a set supernodes $V' \subseteq 2^V$, where a supernode $s \in V'$ consists of nodes connected by contracted edges. For each $e \in E$ that connects nodes of distinct supernodes, there is a corresponding edge in E' .
- **Consensus:** Each $v \in V$ chooses a $\tilde{O}(1)$ -bit value x_v . For each supernode $s \in V'$, let $y_s := \bigoplus_{v \in s} x_v$, where \bigoplus is some pre-defined aggregation operator. All $v \in s$ learn y_s .
- **Aggregation:** Each edge $e \in E'$ connecting supernodes $a \in V'$ and $b \in V'$ learns y_a and y_b , and chooses two $\tilde{O}(1)$ -bit values $z_{e,a}, z_{e,b}$ (i.e., one for each endpoint). Every node $v \in s$ of each supernode $s \in V'$ learns the aggregate of its incident edges in E' , i.e., $\bigotimes_{e \in \text{incidentEdges}(s)} z_{e,s}$ where \bigotimes is some pre-defined aggregation operator. All nodes $v \in s$ learn the same aggregate value (if the aggregate is not unique).

The work of [53] shows that SSSP can be solved with a stretch of $(1+\epsilon)$ in $\tilde{O}(1/\epsilon^2)$ rounds of the Minor-Aggregation model, *if* it can call on an oracle $\mathcal{O}^{\text{Euler}}$ that solves the Eulerian-Orientation problem once per round (we define this oracle formally further below).

Lemma 5 (cf., [53]). *A $(1+\epsilon)$ -approximation of SSSP on G can be computed with a total of $\tilde{O}(1/\epsilon^2)$ rounds of Minor-Aggregation model and calls to the oracle $\mathcal{O}^{\text{Euler}}$ on certain Eulerian graphs H (see Definition 8), respectively.*

Our goal is to apply this lemma to show Theorem 4. For this we have to prove that we can (1) efficiently simulate the Minor-Aggregation model in HYBRID and (2) efficiently implement the oracle $\mathcal{O}^{\text{Euler}}$ in HYBRID.

2.1 Simulation of Minor-Aggregation in HYBRID

We show in the following that the Minor-Aggregation model can be implemented efficiently in the HYBRID model. One of the techniques we employ is the following result by [32], which states that an “overlay network” can be computed with diameter, degree and round complexity $\tilde{O}(1)$.

Lemma 6 (see [32]). *Given that nodes know their neighbors in a graph $G = (V, E)$ as problem input and a polynomial upper bound of n , a rooted tree $T = (V, E_T)$ (usually not a sub-graph of G) with constant degree and diameter $O(\log n)$ can be computed in $O(\log n)$ rounds, w.h.p., in the HYBRID model (NCC suffices).*

We proceed with the simulation of the Minor-Aggregation model in HYBRID.

Lemma 7. *A round of the Minor-Aggregation model can be simulated in $\tilde{O}(1)$ rounds in the HYBRID model, w.h.p.*

Proof. Since nodes in the distributed model are computationally unlimited, each edge can be simulated by both of its endpoints simultaneously. We compute a tree T_s with diameter, degree and round complexity $\tilde{O}(1)$ on each connected component $s \in V'$ using the set of contracted edges ($e \in E$ with $c_e = \top$) as input, see Lemma 6. Note that the small diameter and degree of T_s allows us efficient computation of aggregation operations by conducting converge-casts on T_s in $\tilde{O}(1)$ rounds. This also allows us to implement the consensus step by converge casting the values y_s of for all $s \in V'$ to all $v \in s$.

As part of the simulation, we assume that each edge $e = \{s_1, s_2\} \in E'$ is simulated by both of its incident nodes $v_1 \in s_1, v_2 \in s_2$. The values y_{s_1}, y_{s_2} from the consensus step can be exchanged between v_1, v_2 with their shared edge in a single round so both can continue the correct simulation of e . This is required in order to choose values $z_{e,a}, z_{e,b}$, which may depend on y_{s_1}, y_{s_2} . The aggregation of values $z_{e,s}$ of all $e \in E'$ incident to some $s \in V'$ is implemented as before. \square

2.2 Implementation of the Oracle $\mathcal{O}^{\text{Euler}}$

The oracle $\mathcal{O}^{\text{Euler}}$ solves the Eulerian-Orientation problem on certain Eulerian graphs H (i.e., graphs containing an Eulerian cycle), which requires that all edges are oriented such that in- and out-degree of each node are equal. More specifically, the requirements towards the oracle $\mathcal{O}^{\text{Euler}}$ in conjunction with the input graph G (the one which we want to solve SSSP on) are as follows.

Definition 8. *Let H be an Eulerian graph that is a sub-graph of some H' , where H' is obtained by adding at most $\tilde{O}(1)$ arbitrarily connected “virtual” nodes to G . Virtual edges, i.e., edges incident to at least one virtual node, are given in distributed form: an edge between a virtual and a real node is known by the latter, and edges between two virtual nodes are known by every node. Then $\mathcal{O}^{\text{Euler}}$ outputs an orientation of edges of H such that in- and out-degree of each node are equal.*

Our goal is to show that we can also efficiently implement a call of $\mathcal{O}^{\text{Euler}}$ in HYBRID. Our goal is to re-purpose the PRAM-model algorithm by [9] for this task. The PRAM model assumes multiple processors and a shared memory containing the input. Processors can write or read a memory cell in each step subject to some restrictions. Each cell may contain a real value but in the SSSP problem with polynomially bounded, integer weights, $\tilde{O}(1)$ bits per cell suffice. The performance of a PRAM algorithm is measured in the total number of processing steps N (work) and the marginal number of required parallel steps T (depth) if an arbitrary number of processors can be used. In the exclusive read, exclusive write variant (EREW) each memory cell can be read or written by at most one processor in each step.

Since the memory is the only means by which processors can exchange information, intuitively, an EREW PRAM algorithm that uses at most $\tilde{O}(n)$ processors and memory cells can be simulated in $\tilde{O}(1)$ rounds via the NCC model, where each node simulates $\tilde{O}(1)$ processors and cells of the shared memory and *exclusive* access to each cell is provided via the global network (NCC model). The simulation of PRAM algorithms

in HYBRID requires $\tilde{O}(N/n + T)$ rounds if each node has the same amount of cells to simulate.

In [27] it is shown that the simulation of EREW PRAM can also be done if the input is the local network G , however this adds a term of $\tilde{O}(a)$ to the running time, where a is the arboricity of G ,³ which reflects imbalances in the number of memory cells that nodes must simulate. Note that a can be linear in n . Their result carries over to the concurrent read/write (CRCW) variant, which can be simulated with EREW incurring only $\tilde{O}(1)$ slowdown. The result of [27] implies the following lemma.

Lemma 9 (cf. [27]). *A CRCW PRAM algorithm that solves a graph problem on $G = (V, E)$ with depth T using $n = |V|$ processors can be simulated in $\tilde{O}(a)$ rounds in the HYBRID model, w.h.p., where a equals the arboricity of G .*

We break the problem of Eulerian orientation down to sub problems with suitable properties so that in a final step we can efficiently simulate the PRAM-model algorithm by [9].

Lemma 10. *A call of the oracle O^{Euler} (see Definition 8) can be implemented in $\tilde{O}(1)$ rounds in the HYBRID model.*

Proof. There is a CRCW PRAM algorithm that solves the Eulerian-Orientation problem with linear work $\tilde{O}(n+m)$ ($m := |E|$) and depth $\tilde{O}(1)$ [9]. Note that in the PRAM simulation we can safely ignore the fact that some nodes and edges in H are virtual (see Def. 8 for the definition of H), because these add at most $\tilde{O}(1)$ nodes and $\tilde{O}(n)$ edges, which can be evenly distributed and simulated by real nodes. Our goal is to reduce the problem into sub-problems on sub-graphs of smaller arboricity using the local network, which admits a solution in $\tilde{O}(1)$ rounds simulating the PRAM algorithm by [9] using the simulation in HYBRID (Lemma 9).

The idea is to reduce the arboricity of H by greedily orienting disjoint cycles in H on small subgraphs in parallel, which will ultimately leave us with a remaining graph of yet unoriented edges with small arboricity. Note that by orienting disjoint cycles consistently in one direction, the remaining graph of unoriented edges retains even node degree, i.e., it still has an Eulerian-Orientation. To identify disjoint cycles efficiently, we first compute a (χ, D) -network decomposition. This is a partition of nodes into clusters of diameter D such that the cluster graph (where two clusters are incident if a pair of nodes from each cluster are incident) has a valid χ -coloring. A network decomposition with $D, \chi \in O(\log n)$ can be computed in $\tilde{O}(1)$ rounds in the local network (LOCAL), see [48].

However, we compute such a network decomposition not on G , but on the power graph $G^2 = (V, E')$, where any two nodes in V at distance at most 2 hops in G share an edge in E' . Note that the round complexity is asymptotically the same as computing the network decomposition of G , since G^2 can be simulated in 2 rounds in the local network. Let C be a cluster of the network decomposition of G^2 . Since two nodes in different clusters of the same color can not be incident in G^2 , the distance in the *original network* G between such two nodes of must bigger than 2. Let C' be the extended cluster of C , defined as C and all nodes within one hop of C . Note, due to the aforementioned distance property any two such *extended* clusters of the same color are node-disjoint.

³The arboricity of G is defined as the smallest number of forests required to cover all edges of G .

For each color in $[\chi]$ and for each cluster C with that color in parallel, all nodes in the extended cluster C' learn C' in $D \in O(\log n)$ steps via the local network. This knowledge enables all nodes in C' to consistently orient and greedily remove all cycles (w.r.t. G) in C' . Note that edges that are nominally removed will still be used to communicate in C' . Further, we can do this for each extended cluster C' of the current color in parallel since they do not overlap. Each extended cluster is now cycle-free, thus all edges in all extended clusters of that color can be covered by a single forest. Since each node is in some cluster C of some color, both endpoints of any *edge* that was not removed are within some extended cluster C' , thus in the end all edges are covered by some forest. The number of forests a corresponds to the number of colors $\chi \in O(\log n)$. Thus the remaining graph can be oriented with the simulation of [27] to run the PRAM algorithm by [9] in $\tilde{O}(1)$ rounds. \square

We can now apply our implementation of the Minor-Aggregation model and the oracle $\mathcal{O}^{\text{Euler}}$ in HYBRID to the result by [53], hence, Theorem 4 is proven by combining Lemma 5, Lemma 7 and Lemma 10.

3 Shortest Paths with Multiple Sources

In this section we give a direct application for the fast SSSP algorithm from the previous section by providing a framework to efficiently schedule multiple algorithms in parallel on a so called skeleton graph. Since our algorithmic solutions scale with the amount of global communication that we permit, we also give solutions for the more general HYBRID(∞, γ) model. In particular, we show that $\tilde{O}(\sqrt{k/\gamma})$ rounds suffice to compute approximations (given that the precision parameter ε is constant). The claim for the standard HYBRID model is implied by substituting $\gamma = \log^2 n$. Note that the general result is also tight (up to $\tilde{O}(1)$ factors), as the lower bound of $\tilde{\Omega}(\sqrt{k})$ by [42] can be generalized to $\tilde{\Omega}(\sqrt{k/\gamma})$ (see [55]).

Theorem 11. *Let $\varepsilon > 0$. The k -SSP problem can be approximated w.h.p.*

- in HYBRID in $\tilde{O}(\sqrt{k} \cdot \frac{1}{\varepsilon^2})$ rounds for stretch $1+\varepsilon$ and k i.i.d. random sources,
- in HYBRID(∞, γ) in $\tilde{O}(\sqrt{k/\gamma} \cdot \frac{1}{\varepsilon^2})$ rounds for stretch $3+\varepsilon$ and k arbitrary sources,
- in HYBRID(∞, γ) in $\tilde{O}(\frac{1}{\varepsilon^2})$ rounds for stretch $1+\varepsilon$ and $k \leq \gamma$ arbitrary sources.

3.1 Parallel Scheduling of Algorithms on a Skeleton Graph

Besides the scheme for SSSP introduced in Section 2, our main technical component is to show that we can efficiently run multiple instances of independent algorithms on a so called skeleton graph in parallel. A skeleton graph consists of skeleton nodes that are sampled with probability $1/x$ from V . Skeleton edges are created between skeleton nodes that have a path of length roughly $\tilde{O}(x)$ in G between them with the weight of such an edge corresponding to the distance of that path. Such a skeleton graph has many useful properties, the main ones are that it preserves distances of G and can be computed efficiently in a distributed sense, where each skeleton node knows its incident skeleton edges in $\tilde{O}(x)$ rounds. The formal definition is given as follows.

Definition 12 (cf. [11, 56]). A skeleton graph $\mathcal{S} = (V_S, E_S)$ of G , is obtained by sampling each node of G to V_S with prob. at least $\frac{1}{x}$. The edges of \mathcal{S} are $E_S = \{\{u, v\} \mid u, v \in V_S, \text{hop}(u, v) \leq h\}$ (for some appropriate $h \in \tilde{O}(x)$) with weights $w_S(u, v) = d_{h,G}(u, v)$ for $\{u, v\} \in E_S$.

In [10] it is shown that \mathcal{S} gives a good approximation of the topology of the graph, in particular, that the distance between sampled nodes in the resulting skeleton graph equals the actual distance in the local graph w.h.p.

Lemma 13 (cf. [10]). A skeleton graph $\mathcal{S} = (V_S, E_S)$ as given in Definition 12 can be constructed in $h \in \tilde{O}(x)$ rounds in the LOCAL (and thus HYBRID) model w.h.p. for an appropriately chosen $h \in \tilde{\Theta}(x)$ with the following properties. (a) For any $u, v \in V$ with $\text{hop}(u, v) \geq h$, there is a shortest path P from u to v , s.t. any sub-path Q of P with at least h nodes contains a node in V_S w.h.p. (b) For all $u, v \in V_S : d_S(u, v) = d_G(u, v)$ w.h.p.

Furthermore, for efficient scheduling of algorithms in parallel we also require the concept of so called *helper sets* that have been introduced in [42]. The rough idea is, when given a set of nodes that have been sampled i.i.d., one can assign each sampled node a set of helper nodes of a certain size within some small distance, which essentially marks the spot where distance and neighborhood size (with respect to some “load” x) are in a balance. We parameterize the definition of helper sets from [42] as follows.

Definition 14 (cf. [42]). Let $G = (V, E)$ be a graph, let $x < n$ and assume $W \subseteq V$ was sampled i.i.d. from V with prob. $1/x$. A family $\{H_w \subseteq V \mid w \in W\}$ of helper sets fulfills the following properties for all $w \in W$ and some integer $\mu \in \tilde{\Theta}(x)$. (1) Each H_w has size at least μ . (2) For all $u \in H_w$ it holds that $\text{hop}(w, u) \leq \mu$. (3) Each node is member of at most $\tilde{O}(1)$ sets H_w .

The computation of helper sets by [42] works out of the box and we are going to utilize it in the following form.

Lemma 15 (see [42]). A family of helper sets $\{H_w \subseteq V \mid w \in W\}$ as given in Definition 14 can be computed w.h.p. in $\tilde{O}(x)$ rounds.

We are now ready to prove the following theorem.

Theorem 16. Let $\gamma < k < n$ and let \mathcal{S} be a skeleton graph of the local graph G with sampling probability $\sqrt{\gamma/k}$ (see Definition 12). Let $\mathcal{A}_1, \dots, \mathcal{A}_k$ be HYBRID algorithms operating on \mathcal{S} with round complexity at most T . Then \mathcal{S} can be constructed and $\mathcal{A}_1, \dots, \mathcal{A}_k$ can be executed on \mathcal{S} in $\tilde{O}(\sqrt{k/\gamma} \cdot T)$ rounds of the HYBRID(∞, γ) model w.h.p.

Proof. The first step is to compute the skeleton graph $\mathcal{S} = (V_S, E_S)$ as defined in Definition 12 with sampling probability $\sqrt{\gamma/k}$, which takes $\tilde{O}(\sqrt{k/\gamma})$ rounds and guarantees $d_S(u, v) = d_G(u, v)$ for all $u, v \in V_S$ w.h.p., by Lemma 13. As second step, we compute helper sets for V_S , which assign each $u \in V_S$ a set $H_u \subseteq V$ such that (1) $|H_u| \in \tilde{\Theta}(\sqrt{k/\gamma})$ and (2) $\max_{v \in H_u} \text{hop}(u, v) \in \tilde{\Theta}(\sqrt{k/\gamma})$ and (3) each $v \in V$ is member of $\tilde{O}(1)$ helper sets. This is accomplished w.h.p. in $\tilde{O}(\sqrt{k/\gamma})$ rounds by Lemma 15.

Note that \mathcal{S} is established in a distributed sense, where each skeleton edge is known by its incident skeleton nodes. The third step is to transmit the incident edges and the input w.r.t. each algorithm \mathcal{A}_i of $u \in \mathcal{S}$ to its helpers H_u using the local network,

which takes $\tilde{O}(\sqrt{k/\gamma})$ rounds due to (2). This gives each helper $v \in H_u$ all the required information to simulate any \mathcal{A}_i on \mathcal{S} on u 's behalf, if also provided with the messages that u receives during the execution of \mathcal{A}_i .

In the fourth step, the simulation of the algorithms \mathcal{A}_i for node $u \in \mathcal{S}$ is distributed among all helpers H_u in a balanced fashion, that is, each helper $v \in H_u$ is assigned at most $\ell \leq \lceil k/|H_u| \rceil \in \tilde{O}(\sqrt{k\gamma})$ algorithms \mathcal{A}_i to simulate (where ℓ is uniform for all helper sets). In particular, we enumerate helpers H_u with indices v_j and assign algorithms $\mathcal{A}_{\ell(j-1)+1}, \dots, \mathcal{A}_{\ell j}$ to v_j . Furthermore, for each edge $\{u, u'\} \in E_{\mathcal{S}}$ and each \mathcal{A}_i , we pair up the helper $v_j \in H_u$ that simulates \mathcal{A}_i for u with the helper $v'_j \in H_{u'}$ that simulates \mathcal{A}_i for u' . By Definitions 12 and 14 (regarding the distances between helpers and between incident skeleton nodes) and the triangle inequality it holds that

$$\text{hop}(v_j, v'_j) \leq \text{hop}(v_j, u) + \text{hop}(u, u') + \text{hop}(u', v'_j) \in \tilde{O}(\sqrt{k/\gamma})$$

and therefore step four can be coordinated in $\tilde{O}(\sqrt{k/\gamma})$ rounds via the local network. It remains to coordinate the message exchange among helpers that simulate some \mathcal{A}_i for some skeleton node $u \in \mathcal{S}$. In the first round, all outgoing messages can be computed locally by helpers $v_j \in H_u$ based on the input they received from u . In general, we presume that the simulation and computation of outgoing messages was correct up to the current round. It suffices to show the correct transmission of all messages for all simulated algorithms for the next round.

Messages via the local network \mathcal{S} : The hop-distance between helpers v_j, v'_j that simulate \mathcal{A}_i for two skeleton nodes that are adjacent in \mathcal{S} nodes is $\text{hop}(v_j, v'_j) \in \tilde{O}(\sqrt{k/\gamma})$. Hence, the local messages can be transmitted in the same number of rounds using the unlimited local network. *Messages via the global network:* each helper is assigned at most $\ell \in \tilde{O}(\sqrt{k\gamma})$ algorithms to simulate. Since each helper has a global capacity of γ all global messages can be sent sequentially in $\tilde{O}(\sqrt{k\gamma}/\gamma) = \tilde{O}(\sqrt{k/\gamma})$ rounds. Due to the canonical assignment of algorithms \mathcal{A}_i to helpers v_j , no helper will receive more messages than it sends in each round.

Consequently, each helper can simulate a single round of all assigned \mathcal{A}_i in $\tilde{O}(\sqrt{k/\gamma})$ rounds, thus it takes $\tilde{O}(\sqrt{k/\gamma} \cdot T)$ rounds to complete the simulation of all \mathcal{A}_i . Finally, any output that was computed by some helper $v_j \in H_u$ in the simulation of \mathcal{A}_i can be transmitted back to u in $\tilde{O}(\sqrt{k/\gamma})$ rounds via the local network. \square

3.2 Solving the k -SSP Problem

We can now employ the procedure from Section 3.1 to schedule k instances of the SSSP algorithm from Section 2 on an appropriately sized skeleton graph \mathcal{S} , which allows us to solve k -SSP for the case that the sources are part of the skeleton \mathcal{S} .

Lemma 17. *Let $\gamma < k < n$ and let $\mathcal{S} = (V_{\mathcal{S}}, E_{\mathcal{S}})$ be a skeleton graph of the local graph G with sampling probability $\sqrt{\gamma}/k$ (see Definition 12). Provided that all sources are in $V_{\mathcal{S}}$ we can solve the k -SSP problem with stretch $1+\varepsilon$ in $\tilde{O}(\sqrt{k/\gamma} \cdot \frac{1}{\varepsilon^2})$ rounds of the HYBRID(∞, γ) model w.h.p.*

Proof. Let $K \subseteq V_{\mathcal{S}}$ be the set of k source nodes. Let algorithms \mathcal{A}_s be an instance of the SSSP algorithm from Section 2 for some source $s \in K$. By Theorem 4 the algorithms \mathcal{A}_s have a native round complexity of $\tilde{O}(\frac{1}{\varepsilon^2})$ to compute an approximation with stretch $1+\varepsilon$. We apply Theorem 16 to schedule all $\mathcal{A}_s, s \in K$ on \mathcal{S} in parallel in

$\tilde{O}(\sqrt{k/\gamma} \cdot \frac{1}{\varepsilon^2})$ rounds. After conducting this procedure, every skeleton node $u \in V_S$ knows a stretch $1+\varepsilon$ distance approximation $\tilde{d}_S(u, s)$ for every $s \in K$.

In a post-processing step, each node $v \in V$ that is not part of the skeleton S computes its own distance to each source as follows. For this we utilize that edges E_S correspond to paths of at most $h \in \tilde{O}(\sqrt{k/\gamma})$ hops in G . First, node v retrieves its distance information to each source from all skeleton nodes within h hops, i.e., in $\tilde{O}(\sqrt{k/\gamma})$ rounds. For each source $s \in K$, node v computes $\tilde{d}(v, s) := \min_{u \in S} d_{h,G}(v, u) + \tilde{d}_S(u, s)$. By Lemma 13 (a) there is a shortest path from v to s which has a skeleton node $u \in V_S$ within h hops of v w.h.p. For this particular skeleton node u we have

$$\begin{aligned}
\tilde{d}(v, s) &\leq d_{h,G}(v, u) + \tilde{d}_S(u, s) \\
&\stackrel{Thm.4}{\leq} d_{h,G}(v, u) + (1+\varepsilon)d_S(u, s) \\
&\stackrel{Lem.13(b)}{=} d_{h,G}(v, u) + (1+\varepsilon)d_G(u, s) \\
&\leq (1+\varepsilon)(d_{h,G}(v, u) + d_G(u, s)) \\
&\stackrel{Lem.13(a)}{\leq} (1+\varepsilon)d_G(v, s). \quad \square
\end{aligned}$$

Finally, we show that solving k -SSP on the skeleton S can also be used to obtain good approximations for more general cases of the k -SSP problem on the local graph G with the different trade offs as stated in Theorem 11.

Proof of Theorem 11. The case $k \leq \gamma$ is the simplest. Here, we have enough available global capacity in HYBRID(∞, γ) to execute the k HYBRID SSSP algorithms in parallel in $\tilde{O}(\frac{1}{\varepsilon^2})$ rounds (Theorem 4), since each such algorithm requires only $\tilde{O}(1)$ global capacity per round and the local capacity is unlimited.

In the remaining proof we assume $\gamma < k$. Let S be a skeleton graph with skeleton nodes V_S sampled with probability $\sqrt{\gamma/k}$ and edges E_S that correspond to paths of at most $h \in \tilde{O}(\sqrt{k/\gamma})$ hops in G , which can be computed in $\tilde{O}(\sqrt{k/\gamma})$ rounds (see Definition 12 and Lemma 13). Let $K \subseteq V_S$ be the set of k source nodes.

Consider the case where K was sampled i.i.d. from V and where we are interested in the standard HYBRID model, i.e., $\gamma \in \tilde{O}(1)$. We make a distinction on the size of k . For a large number of sources $k \geq n^{2/3}$ we apply the known k -SSP algorithm by [20] whose round complexity is $\tilde{O}(n^{1/3} + \sqrt{k})$, which equals $\tilde{O}(\sqrt{k})$ for k above this threshold and even provides an exact solution.

If the number of sources is small $k \leq n^{2/3}$ we add K to V_S and conduct the construction of the skeleton edges with the set K in addition to the sampled nodes. Since each node has a-priori the same chance to be drafted to the skeleton either by being sampled or as a random source, the property of an i.i.d. selection of nodes is retained. Note that $|V_S| \in \tilde{O}(n/\sqrt{k})$ w.h.p. before adding the sources K to V_S (due to the sampling probability $\tilde{O}(1/\sqrt{k})$ and w.h.p. by applying a Chernoff bound). The number of sources added to V_S can be bounded by $k \leq n^{2/3} = n/n^{1/3} \leq n/\sqrt{k}$. Thus adding K to V_S only changes the size of $|V_S|$ by a $\tilde{O}(1)$ factor. Therefore, we can apply Lemma 17 to obtain a $1+\varepsilon$ approximation of k -SSP on G with $k \leq n^{2/3}$ random sources.

Finally, consider the case where the k sources are chosen arbitrarily. We have to deal with the fact that these might be highly concentrated in a local neighborhood and can therefore not simply be added to the skeleton as this leads to difficulties with scheduling the SSSP algorithms (even assuming $k \leq n^{2/3}$ does not help here). We

employ technique similar to [43], where each source $s \in K$ tags its closest skeleton node $u_s := \arg \min_{w \in V_S} d_{h,G}(s, w)$ as its *proxy source* in \mathcal{S} (note that u_s is within $h \in \tilde{O}(\sqrt{k})$ hops of s by Lemma 13 (a)).

Subsequently, we have $k' \leq k$ skeleton nodes that are tagged as proxy sources, which again allows us to compute $1+\varepsilon$ approximations for k' -SSP on the proxy sources in $\tilde{O}(\sqrt{k/\gamma} \cdot \frac{1}{\varepsilon^2})$ rounds using Lemma 17. To construct decent approximations to the real source nodes we have to first make the distance $d_{h,G}(u_s, s)$ from each source $s \in K$ to its closest skeleton u_s public knowledge.

For this we use the so called token dissemination routine (see [11]), which solves the following problem. Nodes have tokens of size $O(\log n)$ (in our case distance labels) which need to be broadcast to everyone. Given that there are at most x such tokens in the network and no node has more than one token, [11] solves this in $\tilde{O}(\sqrt{x})$ rounds in the HYBRID model. In the HYBRID(∞, γ) we can exploit the higher global capacity by running $y \in \tilde{O}(\gamma)$ such algorithms in parallel, where each algorithm is responsible for broadcasting at most $x \in \tilde{O}(k/\gamma)$ tokens, thus the round complexity is $\tilde{O}(\sqrt{k/\gamma})$ (note that each token can be assigned i.i.d., randomly to one of the y parallel token dissemination algorithms ensuring $x \in \tilde{O}(k/\gamma)$ w.h.p.).

Now each node $v \in V$ constructs its (approximate) distance to each source $s \in S$ as follows. If there is a shortest path from v to s with at most h hops, then the local network suffices to find it in $h \in \tilde{O}(\sqrt{k/\gamma})$ rounds. Else, v computes $\hat{d}(v, s) := \tilde{d}(v, u_s) + d_{h,G}(u_s, s)$. Note that there is a node $w \in V_S$ within h hops of s on some shortest path from v to s . Due to the property of u_s we have $d_{h,G}(u_s, s) \leq d_{h,G}(w, s) \leq d_{h,G}(v, s)$. We combine this with the triangle inequality and obtain

$$\begin{aligned}
\hat{d}(v, s) &= \tilde{d}(v, u_s) + d_{h,G}(u_s, s) \\
&\stackrel{\text{Thm. 4}}{\leq} (1+\varepsilon)d_G(v, u_s) + d_{h,G}(u_s, s) \\
&\leq (1+\varepsilon)(d_G(v, w) + d_G(w, u_s) + d_{h,G}(u_s, s)) \\
&\leq (1+\varepsilon)(d_G(v, w) + d_G(w, u_s) + d_{h,G}(w, s)) \\
&= (1+\varepsilon)(d_G(v, s) + d_G(w, u_s)) \\
&\leq (1+\varepsilon)(d_G(v, s) + d_G(w, s) + d_G(s, u_s)) \\
&\leq (1+\varepsilon)(3d_G(v, s)) \stackrel{\varepsilon' := 3\varepsilon}{=} (3+\varepsilon')d_G(v, s). \quad \square
\end{aligned}$$

References

- [1] Amir Abboud, Keren Censor-Hillel, and Seri Khoury. Near-linear lower bounds for distributed distance computations, even in sparse networks. In *30th International Symposium on Distributed Computing (DISC)*, pages 29–42, 2016.
- [2] Amir Abboud, Keren Censor-Hillel, Seri Khoury, and Ami Paz. Smaller cuts, higher lower bounds. *ACM Transactions on Algorithms (TALG)*, 17(4):1–40, 2021.
- [3] Udit Agarwal and Vijaya Ramachandran. Distributed weighted all pairs shortest paths through pipelining. In *IEEE International Parallel and Distributed Processing Symposium (IPDPS)*, pages 23–32. IEEE, 2019.

- [4] Udit Agarwal and Vijaya Ramachandran. Faster deterministic all pairs shortest paths in congest model. In *ACM Symposium on Parallelism in Algorithms and Architectures (SPAA)*, pages 11–21, 2020.
- [5] Udit Agarwal, Vijaya Ramachandran, Valerie King, and Matteo Pontecorvi. A deterministic distributed algorithm for exact weighted all-pairs shortest paths in $\tilde{O}(n^{3/2})$ rounds. In *Proc. of the 2018 ACM Symposium on Principles of Distributed Computing (PODC)*, pages 199–205, 2018.
- [6] Ioannis Anagnostides and Themis Gouleakis. Deterministic distributed algorithms and lower bounds in the hybrid model. In *35th International Symposium on Distributed Computing*, 2021.
- [7] Alexandr Andoni, Aleksandar Nikolov, Krzysztof Onak, and Grigory Yaroslavtsev. Parallel algorithms for geometric graph problems. In *Proceedings of the forty-sixth annual ACM symposium on Theory of computing*, pages 574–583, 2014.
- [8] Arash Asadi, Vincenzo Mancuso, and Rohit Gupta. An sdr-based experimental study of outband d2d communications. In *IEEE INFOCOM 2016 - The 35th Annual IEEE International Conference on Computer Communications*, pages 1–9, 2016.
- [9] Mikhail Atallah and Uzi Vishkin. Finding euler tours in parallel. *Journal of Computer and System Sciences*, 29(3):330–337, 1984.
- [10] John Augustine, Mohsen Ghaffari, Robert Gmyr, Kristian Hinnenthal, Christian Scheideler, Fabian Kuhn, and Jason Li. Distributed computation in node-capacitated networks. In *Proc. 31st ACM Symp. on Parallelism in Algorithms and Architectures (SPAA)*, pages 69–79, 2019.
- [11] John Augustine, Kristian Hinnenthal, Fabian Kuhn, Christian Scheideler, and Philipp Schneider. Shortest paths in a hybrid network model. In *Symposium on Discrete Algorithms (SODA)*, pages 1280–1299, 2020.
- [12] Paul Beame, Paraschos Koutris, and Dan Suci. Communication steps for parallel query processing. *Journal of the ACM (JACM)*, 64(6):1–58, 2017.
- [13] Ruben Becker, Andreas Karrenbauer, Sebastian Krinninger, and Christoph Lenzen. Near-optimal approximate shortest paths and transshipment in distributed and streaming models. In *Proc. 31st Int. Symp. on Distributed Computing (DISC)*, pages 7:1–7:16, 2017.
- [14] Aaron Bernstein and Danupon Nanongkai. Distributed exact weighted all-pairs shortest paths in near-linear time. In *Proc. 51st ACM Symp. on Theory of Computing (STOC)*, pages 334–342, 2019.
- [15] Amartya Shankha Biswas, Michal Dory, Mohsen Ghaffari, Slobodan Mitrović, and Yasamin Nazari. Massively parallel algorithms for distance approximation and spanners. In *Proceedings of the 33rd ACM Symposium on Parallelism in Algorithms and Architectures, SPAA '21*, page 118–128, New York, NY, USA, 2021. Association for Computing Machinery.
- [16] Keren Censor-Hillel, Michal Dory, Janne H. Korhonen, and Dean Leitersdorf. Fast approximate shortest paths in the congested clique. In *Proc. ACM Symp. on Principles of Distributed Computing (PODC)*, page 74–83, 2019.

- [17] Keren Censor-Hillel, Petteri Kaski, Janne H. Korhonen, Christoph Lenzen, Ami Paz, and Jukka Suomela. Algebraic methods in the congested clique. *Distributed Computing*, 32(6):461–478, 2019.
- [18] Keren Censor-Hillel, Seri Khoury, and Ami Paz. Quadratic and near-quadratic lower bounds for the congest model. In *31st International Symposium on Distributed Computing (DISC)*. Schloss Dagstuhl-Leibniz-Zentrum fuer Informatik, 2017.
- [19] Keren Censor-Hillel, Dean Leitersdorf, and Volodymyr Polosukhin. Distance computations in the hybrid network model via oracle simulations. In *Symposium on Theoretical Aspects of Computer Science (STACS)*. Schloss Dagstuhl-Leibniz-Zentrum für Informatik, 2021.
- [20] Keren Censor-Hillel, Dean Leitersdorf, and Volodymyr Polosukhin. On sparsity awareness in distributed computations. In *ACM Symposium on Parallelism in Algorithms and Architectures (SPAA)*, pages 151–161, 2021.
- [21] Keren Censor-Hillel, Dean Leitersdorf, and Elia Turner. Sparse matrix multiplication and triangle listing in the congested clique model. In *Proc. 22nd Int. Conf. on Principles of Distributed Systems (OPODIS)*, pages 4:1–4:17, 2018.
- [22] Shiri Chechik and Doron Mukhtar. Single-source shortest paths in the congest model with improved bounds. *Distributed Computing*, pages 1–18, 2021.
- [23] Jeffrey Dean and Sanjay Ghemawat. Mapreduce: simplified data processing on large clusters. *Communications of the ACM*, 51(1):107–113, 2008.
- [24] Michal Dory, Orr Fischer, Seri Khoury, and Dean Leitersdorf. Constant-round spanners and shortest paths in congested clique and mpc. In *ACM Symposium on Principles of Distributed Computing (PODC)*, pages 223–233, 2021.
- [25] Michal Dory and Merav Parter. Exponentially faster shortest paths in the congested clique. In *Proceedings of the 39th Symposium on Principles of Distributed Computing*, PODC '20, page 59–68, New York, NY, USA, 2020. Association for Computing Machinery.
- [26] Michael Elkin. Distributed exact shortest paths in sublinear time. In *ACM Symposium on Theory of Computing (STOC)*, pages 757–770, 2017.
- [27] Michael Feldmann, Kristian Hinnenthal, and Christian Scheideler. Fast hybrid network algorithms for shortest paths in sparse graphs. In *Principles of Distributed Systems (OPODIS)*, pages 31:1–31:16, 2020.
- [28] Sebastian Forster and Danupon Nanongkai. A faster distributed single-source shortest paths algorithm. In *59th IEEE Symposium on Foundations of Computer Science (FOCS)*, pages 686–697, 2018.
- [29] Silvio Frischknecht, Stephan Holzer, and Roger Wattenhofer. Networks cannot compute their diameter in sublinear time. In *Proc. 23rd ACM-SIAM Symposium on Discrete Algorithms (SODA)*, pages 1150–1162, 2012.
- [30] Mohsen Ghaffari and Jason Li. Improved distributed algorithms for exact shortest paths. In *ACM Symposium on Theory of Computing (STOC)*, pages 431–444, 2018.

- [31] Michael T Goodrich, Nodari Sitchinava, and Qin Zhang. Sorting, searching, and simulation in the mapreduce framework. In *International Conference on Algorithms and Computation*, pages 374–383, 2011.
- [32] Thorsten Götte, Kristian Hinnenthal, Christian Scheideler, and Julian Werthmann. Time-optimal construction of overlay networks. In *Symposium on Principles of Distributed Computing (PODC)*, pages 457–468, 2021.
- [33] Bernhard Haeupler and Jason Li. Faster distributed shortest path approximations via shortcuts. In *Symposium on Distributed Computing (DISC)*. Schloss Dagstuhl-Leibniz-Zentrum fuer Informatik, 2018.
- [34] Daniel Halperin, Srikanth Kandula, Jitendra Padhye, Paramvir Bahl, and David Wetherall. Augmenting data center networks with multi-gigabit wireless links. In *Proc. of the ACM SIGCOMM 2011 Conference*, pages 38–49, 2011.
- [35] Monika Henzinger, Sebastian Krinninger, and Danupon Nanongkai. A deterministic almost-tight distributed algorithm for approximating single-source shortest paths. *SIAM Journal on Computing*, 50(3):STOC16–98, 2019.
- [36] Stephan Holzer and Nathan Pinsker. Approximation of distances and shortest paths in the broadcast congest clique. In *Proc. 19th Int. Conf. on Principles of Distributed Systems (OPODIS)*, pages 1–16, 2016.
- [37] Stephan Holzer and Roger Wattenhofer. Optimal distributed all pairs shortest paths and applications. In *2012 ACM Symposium on Principles of Distributed Computing (PODC)*, pages 355–364, 2012.
- [38] Qiang-Sheng Hua, Haoqiang Fan, Lixiang Qian, Ming Ai, Yangyang Li, Xuanhua Shi, and Hai Jin. Brief announcement: A tight distributed algorithm for all pairs shortest paths and applications. In *ACM Symposium on Parallelism in Algorithms and Architectures (SPAA)*, pages 439–441, 2016.
- [39] Chien-Chung Huang, Danupon Nanongkai, and Thatchaphol Saranurak. Distributed exact weighted all-pairs shortest paths in $\tilde{O}(n^{5/4})$ rounds. In *58th IEEE Symposium on Foundations of Computer Science (FOCS)*, pages 168–179, 2017.
- [40] Taisuke Izumi and François Le Gall. Quantum distributed algorithm for the all-pairs shortest path problem in the congest-clique model. In *ACM Symposium on Principles of Distributed Computing (PODC)*, pages 84–93, 2019.
- [41] Howard Karloff, Siddharth Suri, and Sergei Vassilvitskii. A model of computation for mapreduce. In *Symposium on Discrete Algorithms*, pages 938–948. SIAM, 2010.
- [42] Fabian Kuhn and Philipp Schneider. Computing shortest paths and diameter in the hybrid network model. In *Proceedings of the 39th Symposium on Principles of Distributed Computing*, pages 109–118, 2020.
- [43] Fabian Kuhn and Philipp Schneider. Routing Schemes and Distance Oracles in the Hybrid Model. In *International Symposium on Distributed Computing (DISC)*, volume 246, pages 28:1–28:22, 2022.
- [44] François Le Gall. Further algebraic algorithms in the congested clique model and applications to graph-theoretic problems. In *Proc. 30th Int. Symp. on Distributed Computing (DISC)*, pages 57–70, 2016.

- [45] Christoph Lenzen. Optimal deterministic routing and sorting on the congested clique. In *Principles of Distr. Comp. (PODC)*, pages 42–50, 2013.
- [46] Christoph Lenzen and Boaz Patt-Shamir. Fast routing table construction using small messages. In *Proc. 45th ACM Symposium on Theory of Computing (STOC)*, pages 381–390, 2013.
- [47] Christoph Lenzen and Boaz Patt-Shamir. Fast partial distance estimation and applications. In *2015 ACM Symposium on Principles of Distributed Computing (PODC)*, pages 153–162, 2015.
- [48] Nathan Linial and Michael Saks. Decomposing graphs into regions of small diameter. In *Proceedings of the second annual ACM-SIAM symposium on Discrete algorithms*, pages 320–330, 1991.
- [49] Nancy A Lynch. *Distributed algorithms*. Elsevier, 1996.
- [50] Danupon Nanongkai. Distributed approximation algorithms for weighted shortest paths. In *Symp. on Theory of Computing (STOC)*, pages 565–573, 2014.
- [51] D. Peleg. *Distributed Computing: A Locality-Sensitive Approach*. SIAM, 2000.
- [52] Michael Rossberg and Guenter Schaefer. A survey on automatic configuration of virtual private networks. *Computer Networks*, 55(8), 2011.
- [53] Václav Rozhoň, Christoph Grunau, Bernhard Haeupler, Goran Zuzic, and Jason Li. Undirected $(1+\varepsilon)$ -shortest paths via minor-aggregates: near-optimal deterministic parallel and distributed algorithms. In *Symposium on Theory of Computing*, pages 478–487, 2022.
- [54] Atish Das Sarma, Stephan Holzer, Liah Kor, Amos Korman, Danupon Nanongkai, Gopal Pandurangan, David Peleg, and Roger Wattenhofer. Distributed verification and hardness of distributed approximation. *SIAM Journal on Computing*, 41(5):1235–1265, jan 2012.
- [55] Philipp Schneider. *Power and Limitations of Hybrid Communication Networks*. PhD thesis, University of Freiburg, 2023.
- [56] Jeffrey D. Ullman and Mihalis Yannakakis. High-probability parallel transitive-closure algorithms. *Journal on Computing*, 20(1):100–125, 1991.
- [57] Goran Zuzic, Gramoz Goranci, Mingquan Ye, Bernhard Haeupler, and Xiaorui Sun. Universally-optimal distributed shortest paths and transshipment via graph-based ℓ_1 -oblivious routing. In *ACM-SIAM Symposium on Discrete Algorithms (SODA)*, pages 2549–2579. SIAM, 2022.