

Resolving the Corbino Shockley-Ramo Paradox for Hydrodynamic Current Noise

Aaron Hui

Department of Physics, Ohio State University, Columbus, Ohio 43202, USA

(Dated: October 17, 2023)

Johnson noise thermometry enables direct measurement of the electron temperature, a valuable probe of many-body systems. Practical use of this technique calls for non-equilibrium generalizations of the Johnson-Nyquist theorem. For a hydrodynamic Corbino device, however, a naïve use of the Shockley-Ramo theorem alongside the “Corbino paradox” leads to yet another paradox: bulk velocity fluctuations cannot be measured by the contacts. In this work, we resolve the unphysical “Corbino Shockley-Ramo paradox” by correctly formulating the hydrodynamic Shockley-Ramo problem. This allows us to properly formulate the problem of current noise in an hydrodynamic multi-terminal device of arbitrary geometry, as well as validate a previously unjustified assumption for rectangular geometry results. As an example, we compute the Johnson noise in a hydrodynamic Corbino device, where we find a suppression of Johnson noise with magnetic field. This unusual characteristic serves as a strong signature of viscous hydrodynamic behavior.

I. INTRODUCTION

The characterization and measurement of thermal properties is a venerated tool in probing many-body systems in condensed matter and materials physics. For instance, a sample’s thermal properties are reflective of the nature of its quasiparticles, including those that are charge-neutral. However, accurate metrology of many modern devices requires accurate thermometry at the nanoscale. Specifically for electronic systems, one particular challenge is to disentangle phonon from the electron contributions to heat transport; with weak electron-phonon coupling, the electron and phonon temperatures might not even be equal.

One solution is Johnson noise thermometry: it allows direct and isolated access to the electronic degrees of freedom. The simplest incarnation of Johnson noise thermometry is a direct application of the Johnson-Nyquist theorem (fluctuation-dissipation theorem). For a two-terminal device with resistance R held at uniform electronic temperature T_0 , it says

$$\lim_{\omega \rightarrow 0} \frac{R}{2k_B} \langle \delta I(\omega) \delta I(t=0) \rangle \equiv T_{\text{JN}} = T_0 \quad (1)$$

where $\delta I(t)$ is the charge current fluctuation at time t , $\delta I(\omega)$ is its two-sided Fourier transform [1], and $\langle \dots \rangle$ denotes an ensemble average (time-average if ergodicity is assumed). That is to say, a noise measurement of the Johnson noise temperature T_{JN} is equivalent to measuring the equilibrium electron temperature T_0 . Furthermore, this thermometry technique requires no calibration; Johnson noise thermometry acts a primary thermometer. This technique has been used to make record-sensitive bolometers [2–6] and to measure of thermal conductivity and heat capacity [7–9].

In many practical situations, including the applications above, Eq. (1) does not apply since the electronic temperature is not spatially uniform. Generalizations of Eq. (1) were previously studied for ohmic devices [10–12], i.e. where $j(\mathbf{x}) = \sigma(\mathbf{x})E(\mathbf{x})$ holds locally. However, increasing interest in non-ohmic electronic systems call for fur-

ther generalizations. Hydrodynamic electron behavior, for instance, has been experimentally demonstrated in a number of materials, where the presence of viscosity invalidates a local Ohm’s law [13–59]. Graphene specifically has served as the prime candidate for hydrodynamic behavior due to its weak electron-phonon coupling, low disorder, and strong electron-electron interactions [13–46]. Hydrodynamic Johnson noise was recently studied for the specific case of a two-terminal rectangular geometry with current-bias heating [59], giving

$$\delta T_{\text{JN}} \equiv T_{\text{JN}} - T_0 = \frac{PR_{\text{th}}}{12} f \quad (2)$$

where P is the input power, R_{th} is the two-terminal thermal resistance, and f is a non-universal geometry-dependent function which recovers $f = 1$ in the ohmic limit. This demonstrated that the previous ohmic result [11, 12] generically requires a correction by f in the presence of viscosity. Somewhat miraculously, for a rectangular geometry this function f never causes a correction larger than 40%; in particular, this result placed the seminal measurements of Wiedemann-Franz violation [20] in graphene, which naïvely used the $f = 1$ ohmic result, on firm theoretical foundation.

While the rectangular geometry is sufficient to demonstrate violation of Eq. (27), it critically misses subtleties about hydrodynamic flow in general geometries. This is strikingly displayed by the “Corbino paradox” [39–41, 60], where a finite current locally dissipates heat despite the absence of a local electric field. For the purpose of noise measurements, this poses yet another corollary paradox. The Shockley-Ramo theorem [61–66] states that for a velocity source \mathbf{v}_s , the outgoing current I_α^{SR} through contact α is given by

$$I_\alpha^{\text{SR}} = nq \int \nabla \phi_\alpha \cdot \mathbf{v}_s \quad (3)$$

where ϕ_α is the resulting potential distribution when the potential at contact α is set to unity and all other contacts are grounded. Since a hydrodynamic Corbino device always has $\nabla \phi_\alpha = 0$, a naïve application of Eq. (3)

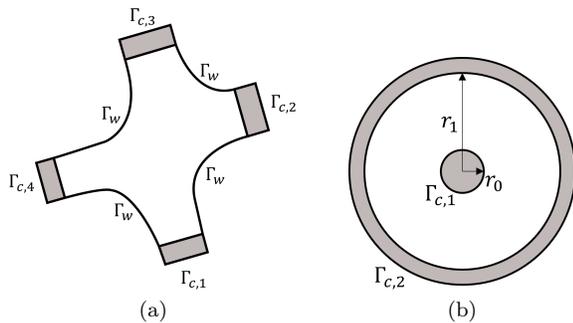


FIG. 1. A plot of representative geometries. a) An arbitrary 4-terminal geometry. b) The Corbino geometry.

gives $I_\alpha = 0$ identically. This yields what we call the “Corbino Shockley-Ramo Paradox”: a naïve application of the Shockley-Ramo theorem implies that bulk velocity fluctuations would never result in measured current fluctuations at the contacts. This would unphysically imply that current noise fails to measure anything about the bulk Corbino device. Therefore, this Corbino Shockley-Ramo paradox serves as a barrier to treating current noise in arbitrary geometries, including the Corbino geometry.

In this work, we properly formulate the problem for current noise in a multi-terminal device of arbitrary geometry, generalizing the boundary condition of Ref. 39. In doing so, we resolve the Corbino Shockley-Ramo paradox by introducing the “hydrodynamic Shockley-Ramo” problem, analogous to original Shockley-Ramo problem for electrons in free space. We begin by showing that our formulation completely reproduces previous results in the ohmic limit. Then, we explicitly solve for the Johnson noise in a Corbino geometry under magnetic field. For current-bias heating, we find that the correction f decreases with B in the viscous limit (see Fig. 2). This provides a mechanism for the unusual experimental observation of Johnson noise suppression by magnetic field in Corbino devices [67], which we argue is a novel and sharp signature of viscous hydrodynamics. Finally, we revisit the rectangular geometry and validate the previously unjustified “Shockley-Ramo assumption” made in Ref. 59.

II. MATHEMATICAL SETUP

A. Generic ohmic-Stokes equations

We begin by treating the ohmic-Stokes problem in full generality with a detailed discussion of the subtleties around the Corbino paradox [39, 40, 60]. This mathematical detour will provide a time-saving framework for the results to follow. The generic incompressible ohmic-Stokes equations on a connected domain $\Omega \subset \mathbb{R}^2$ (see

Fig. 1) are given by

$$\mathcal{L}[\mathbf{v}] \equiv \gamma \mathbf{v} - \nu \nabla^2 \mathbf{v} - \frac{q}{m} \mathbf{v} \times \mathbf{B} = -\frac{q}{m} \nabla \phi + \mathbf{g} \quad (4)$$

$$\nabla \cdot \mathbf{v} = 0 \quad (5)$$

where ν is the kinematic viscosity, q the hydrodynamic charge, m the hydrodynamic mass, $\mathbf{B} = B\hat{\mathbf{z}}$ the magnetic field, and \mathbf{g} a given forcing term ($\nabla^2 \mathbf{v}$ is the *vector* Laplacian). The linear operator $\mathcal{L}[\mathbf{v}]$ is used for notational convenience. To finish the specification of the PDE, one must supply boundary conditions. We assume that the boundary $\partial\Omega$ can be split into two distinct categories: Γ_w corresponds to sample walls and $\Gamma_c = \cup_\alpha \Gamma_{c,\alpha}$ corresponds to the set of metallic contacts [68]. We take the following BCs

$$\mathbf{v}|_{\Gamma_w} = 0 \quad (6)$$

$$v_{\parallel}|_{\Gamma_c} = 0 \quad (7)$$

$$(\phi^c - \phi)|_{\Gamma_c} = -\left. \frac{\sigma'_{nn}[\mathbf{v}]}{nq} \right|_{\Gamma_c} = -\left. \frac{2m\nu}{q} K(\hat{\mathbf{n}})(\mathbf{v} \cdot \hat{\mathbf{n}}) \right|_{\Gamma_c} \quad (8)$$

where v_{\parallel} is the velocity tangent to the boundary, $\phi^c|_{\Gamma_{c,\alpha}} \equiv \phi_\alpha^c$ is a fixed external voltage on each of the contacts $\Gamma_{c,\alpha}$, $\sigma'_{ij}[\mathbf{v}] \equiv \partial_i v_j + \partial_j v_i$ is the viscous (deviatoric) stress tensor, $\sigma'_{nn}[\mathbf{v}] \equiv \sigma'_{ij}[\mathbf{v}] n_i n_j$ for n_i the outward normal unit vector, and $K(\hat{\mathbf{n}})$ is the signed extrinsic curvature relative to $\hat{\mathbf{n}}$ [69]. The final equality of Eq. (8) can be derived using Eq. (5) [39, 70]. The no-slip conditions Eq. (6-7) seem to be a reasonable approximation of experiment [28, 30, 31, 41, 71] and are taken for simplicity. The BC of Eq. (8) was first introduced in the electron hydrodynamics literature by Ref. 39, though in the fluid dynamics literature it has a lengthy history [70, 72, 73] as they explored how to properly implement pressure-fixed BCs on arbitrary domains. In what follows, we will refer to the Ohmic-Stokes problem of Eqs. (4-8) with the shorthand $\mathbb{S}(\mathbf{v}; \mathbf{g}, \phi_\alpha^c)$.

The justification of Eq. (8) requires physical arguments on the nature of the boundary Γ_c . At the interface, we expect current-density continuity. Furthermore, we assume the metallic contact and only dissipates $-\nabla \phi^c \cdot \mathbf{j}$ power. Then, upon multiplication by the normal current density j_n , we see Eq. (8) is nothing but a continuity statement of energy-flux density across the boundary; Eq. (8) says that energy transfer across the interface via the hydrodynamic flow is dissipationless [74]. In this light, we can reframe the origin of the viscous “contact voltage drop”. This voltage drop accounts for the “viscous energy” associated with maintaining a finite σ'_{nn} , which is only non-zero on locally-curved portions of the contact [39, 70]. For flat contacts or in the ohmic limit, we recover the usual voltage-continuity BC $\phi^c|_{\Gamma_c} = \phi|_{\Gamma_c}$. This perspective of energy-flux continuity allows us to readily generalize the BC of Ref. 39 to multi-terminal ohmic-Stokes devices [Eq. (8)] since ohmic dissipation and magnetic field do not contribute to energy-flux.

It is important to ask if the ohmic-Stokes problem $\mathbb{S}(\mathbf{v}; \mathbf{g}, \phi_\alpha^c)$ is well-posed, i.e. if it has an existence-uniqueness (and regularity) result. On physical grounds,

an ill-posed PDE implies that it is an improper description of reality. As an example of an ill-posed PDE, set $\gamma = B = 0$ and consider a Corbino geometry with the naïve BC of $\phi|_{\Gamma_c} = \phi^c|_{\Gamma_c}$ (instead of Eq. (8)) and a constant voltage drop V across the contacts. Then, the solutions are given by $v_r = \frac{I}{nq} \frac{1}{2\pi r}$ for arbitrary constant I and $V \equiv 0$. This is the ‘‘Corbino paradox’’ [60]: an arbitrary current is allowed to flow with no applied voltage drop despite the fact that each choice of I dissipates a different amount of energy. Thus, this naïve BC is unphysical. More generally, it is known that this PDE with the naïve BC is ill-posed so long as $\Gamma_w = \emptyset$ [75]. While the demonstration of existence-uniqueness with the BC of Eq. (8) is beyond the scope of this paper, it is known that the vanilla Stokes equation ($B = \gamma = 0$) with these BCs does indeed enjoy existence-uniqueness [73]. It is therefore natural to conjecture that the extension to the magnetic ohmic-Stokes case is also well-posed.

The primary quantity of interest in the ohmic-Stokes problem is the total outgoing current I_α through contact α . If our problem is well-posed, then we can express the general solution $\mathbf{v} \equiv \mathcal{L}_v^{-1}[\mathbf{g}, \phi_\alpha^c]$ by a linear operator \mathcal{L}_v^{-1} acting on the bulk forcing \mathbf{g} and the set of contact voltages ϕ_α^c [76]. As a technical trick, we can choose (sufficiently smooth) weighting potentials ψ_α on Ω such that $\psi_\alpha|_{\Gamma_{c,\beta}} = \delta_{\alpha\beta}$ and $\sum_\alpha \psi_\alpha = 1$ [77]. This partition of unity affords us nice simplifications. First, we note

$$\mathcal{L}_v^{-1}[0, \overline{\phi_\alpha^c}] = -\frac{q}{m} \sum_\alpha \overline{\phi_\alpha^c} \mathcal{L}_v^{-1}[\nabla\psi_\alpha, 0] \quad (9)$$

via a redefinition of ϕ , where $\overline{\phi_\alpha^c}$ are constants. Thus, the partition of unity allows us to express the applied voltage BC as a forcing term instead. Second, by multiplying Eq. (5) by ψ_α and integrating by parts, we can express the outgoing current I_α and conductance $G_{\alpha\beta}$ as

$$I_\alpha = G_{\alpha\beta} \overline{\phi_\beta^c} + nq \int dV \nabla\psi_\alpha \cdot \mathcal{L}_v^{-1}[\mathbf{g}, \delta\phi_\beta^c] \quad (10)$$

$$G_{\alpha\beta} = -\frac{nq^2}{m} \int dV \nabla\psi_\alpha \cdot \mathcal{L}_v^{-1}[\nabla\psi_\beta, 0] \quad (11)$$

where $\delta\phi_\alpha^c \equiv \phi_\alpha^c - \overline{\phi_\alpha^c}$ is the zero-mean component. Since we are primarily interested in I_α , for our purposes Eq. (10) constitutes the (abstract) solution to the ohmic-Stokes problem. While utilizing these expressions in full generality is manifestly just as difficult as solving the generic ohmic-Stokes problem for \mathcal{L}_v^{-1} , we can still obtain analytic results for some simple cases such as the Corbino.

B. Hydrodynamic Shockley-Ramo Problem

With preliminaries out of the way, we set up the hydrodynamic Shockley-Ramo problem: in a ohmic-Stokes sample, compute the total current through each contact induced by current sources embedded inside the sample

bulk. The analogous problem was treated for the free-space [61, 62] and ohmic [63–66] cases, where there is a simple result known as the (generalized) Shockley-Ramo theorem. The problem is formulated as follows. We consider a given velocity source \mathbf{v}_s which drives a total velocity \mathbf{v} controlled by the following ohmic-Stokes PDE

$$\mathcal{L}[\mathbf{v} - \mathbf{v}_s] + \frac{q}{m} \nabla\phi = 0 \quad (12)$$

$$\nabla \cdot \mathbf{v} = 0 \quad (13)$$

$$\mathbf{v}|_{\Gamma_w} = 0 \quad (14)$$

$$v_{\parallel}|_{\Gamma_c} = 0 \quad (15)$$

$$-\phi|_{\Gamma_c} = -\frac{2m\nu}{q} K(\hat{\mathbf{n}})(\mathbf{v} - \mathbf{v}_s) \cdot \hat{\mathbf{n}}|_{\Gamma_c} \quad (16)$$

where we have set $\phi^c = 0$. Physically, we interpret $\mathbf{v} - \mathbf{v}_s$ and ϕ as corresponding to the velocity and electrochemical potential of ‘‘internal carriers’’ of the sample; these carriers obey the ohmic-Stokes equations of motion and conspire to satisfy BC and incompressibility constraints. By linearity, we can rewrite this into the ohmic-Stokes problem $\mathbb{S}(\mathbf{v}; \mathcal{L}[\mathbf{v}_s], \frac{2m\nu}{q} K(\hat{\mathbf{n}})v_{s,n})$. Using Eq. (10), we can write the solution as

$$I_\alpha^{\text{SR}} = nq \int dV \nabla\psi_\alpha \cdot \mathcal{L}_v^{-1} \left[\mathcal{L}[\mathbf{v}_s], \frac{2m\nu}{q} K(\hat{\mathbf{n}})v_{s,n} \right] \quad (17)$$

This provides the proper generalization of the (ohmic) Shockley-Ramo theorem [Eq. (3)] for ohmic-Stokes devices. We see there are two effects contributing to the measured current I_α^{SR} : a bulk forcing from the velocity source $\mathcal{L}[\mathbf{v}_s]$ and a boundary potential $(2m\nu/q)K(\hat{\mathbf{n}})v_{s,n}$. Furthermore, we avoid the previous paradoxical Corbino conclusion of vanishing current for arbitrary velocity source due to the presence of ψ_α ; the electric potential ϕ_α , especially for the Corbino when $\phi_\alpha \equiv 0$, does not generally serve as a valid partition of unity ψ_α .

Furthermore, to obtain correct results (e.g. recovering the Johnson-Nyquist theorem) we emphasize that the voltage BC [Eq. (16)] must be chosen correctly. The justification of Eq. (16) is quite subtle, as it amounts to the question of how to treat the velocity source \mathbf{v}_s ‘‘on the boundary.’’ We argue as follows. Physically, we imagine the velocity source is close to but not quite on the boundary itself. Between the source and the boundary, there are no more sources so that \mathbf{v}_s is continuous and divergence-free in this ‘‘Knudsen’’ region. Thus, the energy-flux transmitted by \mathbf{v}_s is precisely given by the incompressible form of Eq. (8). We then take the limit of the source-boundary distance to zero to ‘‘define’’ the meaning of $\mathbf{v}_s|_{\Gamma_c}$. This \mathbf{v}_s energy-flux contribution is subtracted in Eq. (16) to obtain the corresponding energy-flux statement for the internal electrochemical potential ϕ .

C. Noise problem formulation

To compute the current-current correlator for Johnson noise, we proceed in two steps. First, we solve the hydro-

dynamic Shockley-Ramo problem as formulated above. This gives a relation between the (thermally-driven) bulk velocity fluctuations and current fluctuations as measured by the contacts at $t = 0$. The result is used in the initial condition for the time-evolution equation of the correlation functions, which we dub the noise equation. Solving the noise problem in the $\omega \rightarrow 0$ limit, we can finally obtain the current-current correlator as a function of the local temperature $T(\mathbf{r})$. In particular, both of these problems reduce to an ohmic-Stokes problem; once formulated appropriately, one can apply Eq. (11) to give the desired result.

To formulate the noise equation, we find it easier to work with the ‘‘fluctuating states’’ formulation rather than with Langevin forces [59, 78]. We assume that the correlation functions obey the same time-dependent equations of motion as their non-equilibrium counterpart. Taking the Laplace transform of the time-dependent ohmic-Stokes PDE and Wick-rotating to obtain the two-sided Fourier transform, in the $\omega \rightarrow 0$ limit we have

$$\mathcal{L}\{\langle \delta \mathbf{v} \delta I_{0,\beta} \rangle\} = -\frac{q}{m} \nabla \langle \delta \phi \delta I_{0,\beta} \rangle + 2 \langle \delta \mathbf{v}_s \delta I_{0,\beta} \rangle \quad (18)$$

$$\nabla \cdot \langle \delta \mathbf{v} \delta I_{0,\beta} \rangle = 0 \quad (19)$$

where we have suppressed the frequency argument $\delta \mathbf{v} \equiv \delta \mathbf{v}(\omega \rightarrow 0)$ and have ignored thermal density fluctuations to obtain incompressibility [79]. The noise source $\langle \delta \mathbf{v}_s \delta I_{0,\beta} \rangle$ arises from the initial conditions [80], where $\delta \mathbf{v}_s$ is the source velocity and $\delta I_{0,\beta} = \delta I_\beta(t = 0)$ is the initial current through contact $\Gamma_{c,\beta}$ [81]. For BCs, we set $\delta \phi^c = 0$ take the same no-slip and energy-flux continuity BCs as Eq. (6-8) on the fluctuations $\delta \mathbf{v}$ and $\delta \phi$. Thus, the noise equation reduces to solving the ohmic-Stokes problem $\mathbb{S}(\langle \delta \mathbf{v} \delta I_{0,\beta} \rangle; 2 \langle \delta \mathbf{v}_s \delta I_{0,\beta} \rangle, 0)$ for the current-current correlator $\langle \delta I_{0,\alpha} \delta I_{0,\beta} \rangle$. Explicitly, the solution reads

$$\langle \delta I_{0,\alpha} \delta I_{0,\beta} \rangle = nq \int dV \nabla \psi_\alpha \cdot \mathcal{L}_v^{-1}[2 \langle \delta \mathbf{v}_s \delta I_{0,\beta} \rangle, 0] \quad (20)$$

To evaluate the initial condition $\langle \delta \mathbf{v}_s \delta I_{0,\beta} \rangle$, we solve the hydrodynamic Shockley-Ramo problem for $\delta I_{0,\beta}$ using Eq. (17) and use the thermodynamic relation $\langle \delta v_{s,i}(\mathbf{r}) \delta v_{s,j}(\mathbf{r}') \rangle = \frac{k_B T}{mn} \delta(\mathbf{r} - \mathbf{r}') \delta_{ij}$. We remark that this formulation doesn't require a thermal noise source; the noise input is defined by the choice of $\langle \delta v_{s,i}(\mathbf{r}) \delta v_{s,j}(\mathbf{r}') \rangle$.

To make concrete experimental predictions, we will primarily be interested in non-equilibrium temperature profiles generated by a current-bias heating [7–9, 20, 82]. Solving for $T(\mathbf{r})$ proceeds in two steps. First, we solve the ohmic-Stokes PDE $\mathbb{S}(\mathbf{v}; 0, \phi^c)$ with applied voltages ϕ^c to obtain the velocity profile. This is used to compute the local heating $q[\mathbf{v}]$ for use in the heat equation

$$\kappa \nabla^2 T = -q[\mathbf{v}] \equiv -\rho \gamma v^2 - \frac{1}{2\eta} (\sigma'_{ij}[\mathbf{v}])^2 \quad (21)$$

$$\partial_n T|_{\Gamma_w} = 0 \quad (22)$$

$$T|_{\Gamma_c} = T_0 \quad (23)$$

where $\nabla^2 T$ is the *scalar* Laplacian, κ is the thermal conductivity, $\rho = mn$ is the mass density, and $\eta = mn\nu$ is the dynamic viscosity. For BCs, we assume that the sample walls are insulating and fix all contacts to be held at the ambient temperature T_0 . We remark that the heating $q[\mathbf{v}]$ consists of two components - the usual ohmic Joule heating term as well as a viscous heating term; in particular, $q \neq \mathbf{E} \cdot \mathbf{J}$ as vividly demonstrated by the Corbino paradox [39, 60].

III. EXAMPLES

A. Ohmic limit

We begin by warming up on the ohmic limit $\nu \rightarrow 0$ [83]. Eq. (4) simplifies immensely because the differential operator $\mathcal{L} \propto \rho_{ij}$ reduces to the resistivity ρ_{ij} and is easily inverted. Furthermore, there is a natural choice for $\psi_\alpha \equiv \phi_\alpha$, where ϕ_α is the potential when setting $\phi_\beta|_{\Gamma_{c,\alpha}} = \delta_{\alpha\beta}$ to be unity only on $\Gamma_{c,\alpha}$. First, from Eq. (11) we recover 11

$$G_{\alpha\beta} = - \int dV \sigma_{ij} (\partial_i \phi_\alpha) (\partial_j \phi_\beta) \quad (24)$$

where we used the fact that $\int dV \nabla \phi \cdot \nabla \phi_\alpha = 0$ if $\phi|_{\Gamma_{c,\alpha}} = 0$. Next, we treat the ohmic Shockley-Ramo problem $\mathbb{S}(\mathbf{v}; \mathcal{L}[\mathbf{v}_s], 0)$. Using the same fact, Eq. (10) gives for the outgoing current

$$I_\alpha^{\text{SR}} = nq \int dV \nabla \phi_\alpha \cdot \mathbf{v}_s \quad (25)$$

Thus, we have recovered the ohmic Shockley-Ramo theorem [Eq. (3)] [61–66]. Finally, we solve the noise problem $\mathbb{S}(\langle \delta \mathbf{v} \delta I_{0,\beta} \rangle; 2 \langle \delta \mathbf{v}_s \delta I_{0,\beta} \rangle, 0)$. From the Shockley-Ramo problem we see that $2 \langle \delta v_{s,i} \delta I_{0,\beta} \rangle = -2k_B T(\mathbf{r}) \frac{q}{m} \partial_i \phi_\beta$. Again repeating the same procedure, we find

$$\langle \delta I_\alpha \delta I_{0,\beta} \rangle = -2k_B \int dV T(\mathbf{r}) \sigma_{ij} (\partial_i \phi_\alpha) (\partial_j \phi_\beta) \quad (26)$$

recovering the result of Ref. [11] in the case of thermal noise. For $T = T_0$ we find that $\langle \delta I_\alpha \delta I_{0,\beta} \rangle = -2k_B T_0 G_{\alpha\beta}$, recovering the Johnson-Nyquist theorem. From this point, it is manifest that we completely reproduce previous ohmic results from our formulation [11, 12], including the two-terminal result [12]

$$\delta T_{JN} = \frac{PR_{\text{th}}}{12} \quad (27)$$

As previously mentioned, this is Eq. (2) with $f = 1$.

B. Corbino

We now turn to a Corbino geometry with contacts on inner radius r_0 and outer radius r_1 . In particular, $\Gamma_w = \emptyset$

since the boundary only consists of contacts (see Fig. 1b). As we will see, this geometry is particularly nice and admits an exact analytic solution. Instead of directly solving for \mathcal{L}_v^{-1} and using Eq. (10), we will obtain the total current by performing integration tricks to avoid solving for ϕ . For computing the total current or heating density, we only need deal with angular-averaged quantities. In orthonormal polar (r, θ) coordinates, the ohmic-Stokes problem [Eqs. (4-8)] reads

$$\int dr \left(L[\bar{v}_r] + \omega_c \bar{v}_\theta \right) - 2\nu \frac{\bar{v}_r}{r} \Big|_{r_0}^{r_1} = \frac{q}{m} V + \int dr \bar{g}_r \quad (28)$$

$$L[\bar{v}_\theta] = \bar{g}_\theta + \omega_c \bar{v}_r \quad (29)$$

$$\bar{v}_r = \frac{I}{nq} \frac{1}{2\pi r} \quad (30)$$

$$\bar{\phi}^c - \bar{\phi}|_{\Gamma_c} = - \frac{m\nu}{q} \frac{\bar{v}_r}{r} \Big|_{\Gamma_c} \quad (31)$$

with the no-slip BC $v_\theta|_{\Gamma_c} = 0$, where $\omega_c = qB/m$ is the cyclotron frequency, the linear operator $L[v] \equiv \gamma - \nu \left[\partial_r^2 v + \frac{1}{r} \partial_r v - \frac{v}{r^2} \right]$, and $\bar{X} = \int \frac{d\theta}{2\pi} X$ denotes an angular average. In what follows, we drop the overbar and implicitly assume all quantities are angular-averaged. Notice that incompressibility immediately gives us the solution for v_r , where I is the constant radial current. With the no-slip BCs, Eq. (29) decouples and can directly be solved for v_θ . We denote the solution by $v_\theta = L^{-1}[g_\theta] + \omega_c L^{-1}[v_r]$ with the linear operator L^{-1} . Thus, Eq. (28) gives

$$IR = V + \frac{m}{q} \int dr \left(g_r - \omega_c L^{-1}[g_\theta] \right) \quad (32)$$

$$R = \frac{m}{nq^2} \int dr \left(L + \omega_c^2 L^{-1} \right) \left[\frac{1}{2\pi r} \right] - \frac{m\nu}{nq^2} \frac{1}{\pi} \frac{1}{r^2} \Big|_{r_0}^{r_1} \quad (33)$$

where $V = -\phi^c|_{r_0}$ is the (angular-averaged) applied voltage [84]. Since the L^{-1} operator is involved and not particularly enlightening, we will defer its evaluation.

Turning to the hydrodynamic Shockley-Ramo problem $\mathbb{S}(\mathbf{v}; \mathcal{L}[\mathbf{v}_s], \frac{2m\nu}{q} K(\hat{\mathbf{n}})v_{s,n})$, we find that

$$I^{\text{SR}} R = - \frac{2m\nu}{q} \frac{v_{s,r}}{r} \Big|_{r_0}^{r_1} + \frac{m}{q} \int dr \left(L + \omega_c^2 L^{-1} \right) [v_{s,r}] - \frac{m\omega_c}{q} \int dr \left(L^{-1} L - 1 \right) [v_{s,\theta}] \quad (34)$$

We see explicitly that the hydrodynamic result is quite different from the ohmic Shockley-Ramo theorem [Eq. (3)]. We remark that the operator $L^{-1}L - 1$ only depends on the boundary data $v_{s,\theta}|_{\Gamma}$; the corresponding integral will vanish for the noise problem since the noise input vanishes on the boundary.

Then, we solve the noise problem $\mathbb{S}(\langle \delta \mathbf{v} \delta I_{0,\beta} \rangle; 2\langle \delta \mathbf{v}_s \delta I_{0,\beta} \rangle, 0)$. After some algebra, we find the Johnson noise temperature to be

$$T_{\text{JN}} = T_0 + \frac{m}{nq^2} \frac{1}{R} \int dr \left(L + \omega_c^2 L^{-1} \right) \left[\frac{\delta T(r)}{2\pi r} \right] \quad (35)$$

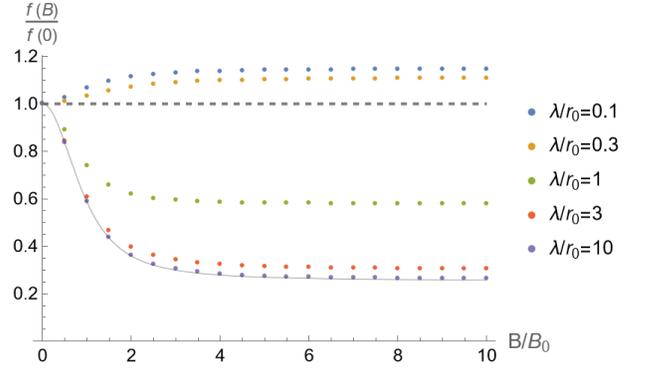


FIG. 2. A plot of $f(B)/f(0)$ for $r_1/r_0 = 4.5$ in the Corbino geometry. The dashed line corresponds to the ohmic $\lambda = 0$ value, while the solid thin line corresponds to the viscous $\lambda \rightarrow \infty$ value. These curves are plotted against B/B_0 , where the scale $B_0 = (m/q)(\gamma + \nu/r_0^2)$ is different for each curve.

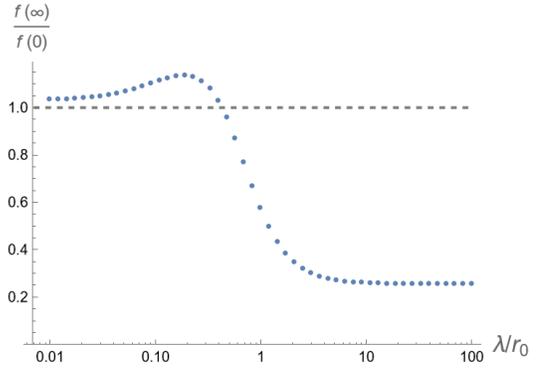


FIG. 3. A plot of the limiting ratio $f(\infty)/f(0)$ as a function of λ for $r_1/r_0 = 4.5$. The gray line denotes the ohmic $\lambda = 0$ value of $f(\infty)/f(0) = 1$. At low λ , we see that it at first increases, then dramatically drops around $\lambda/r_0 \sim 1$. This can be understood as a crossover to viscous flow and viscous heating in the limit of large λ , where the Johnson noise decreases since heating is less effective. We remark that there are numerical errors at low λ due to the nearly discontinuous falloff of the v_θ profile near r_0 and r_1 (it is strictly discontinuous at the boundary in the ohmic limit).

This yields a surprisingly simple result for the Johnson noise, arising from the fact that the equations in this problem decouple. We remark that the voltage BC [Eq. (16)] was critical in recovering the equilibrium Johnson-Nyquist theorem, as it provides the nontrivial boundary term in Eq. (34). At this stage, we see two explicit effects of a finite magnetic field which affect the Johnson noise. The first is to alter the magnetoresistance $R(B)$, and the second arises from altering the averaging procedure (i.e. the $\omega_c^2 L^{-1}$ term); while in the ohmic limit these effects cancel, this is not generally true in the hydrodynamic problem. Eq. (35) is valid for arbitrary temperature distributions $T(r)$; to get a better physical sense of Eq. (35), below we specialize temperature profiles arising from current-bias heating.

To concretely evaluate the Johnson noise, we solve two

PDEs: one for L^{-1} and one for $\delta T(r)$ [85]. Defining f using Eq. (2), in Fig. 2 we plot the numerical results [86] for $\frac{f(B)}{f(0)}$ against B for a fixed aspect ratio $r_1/r_0 = 4.5$ and various Gurzhi lengths $\lambda \equiv \sqrt{\nu/\gamma}$. We see that $\frac{f(B)}{f(0)}$ weakly increases on the ohmic side $\lambda \ll r_0$, while it strongly decreases on the viscous side $\lambda \gg r_0$. Furthermore, we see that these curves saturate in the $B \rightarrow \infty$ limit due to the fact the flow profile reaches a limiting shape with magnetic field. In Fig. 3, we plot the asymptotic value $\frac{f(\infty)}{f(0)}$ as a function of λ to more clearly depict the λ -dependence of the correction function f .

We can qualitatively understand this behavior as follows, tracing through Fig. 3. For small λ , viscous corrections to flow are weak but a viscous heating channel emerges; this increases the total heating, and thus increases $T_{\text{JN}}/P \sim f(B)$. As one continues increasing λ , viscous corrections to flow begin to dominate and the ohmic heating is suppressed. Under a magnetic field, these flow corrections cause heating to be concentrated near the contacts; with a spiraling flow, the flow gradients and thus viscous heating are maximal at the boundaries because of the no-slip condition. This reduces the heating effectiveness and decreases T_{JN}/P . Thus, we predict a B -field suppression of T_{JN} in the viscous hydrodynamic regime. This result matches the experimental observations in Ref. [67].

We remark that this suppression of T_{JN} with B -field is challenging to explain in an ohmic or ballistic regime. In the ohmic limit, where $f = 1$, this would imply R_{th} increases with B -field. However, in a conventional Boltzmann picture, a magnetic field curves the path of electrons. This increases path lengths, thus increasing scattering and increasing electrical and thermal resistance. In the ballistic limit, electrons do not thermalize nor significantly heat in the sample bulk; Johnson noise for ballistic samples primarily proceeds from the well-thermalized ohmic contacts. Under magnetic field, we still do not expect significant contribution to the Johnson noise from the bulk and therefore rule out T_{JN} suppression in this regime [67]. We therefore conclude that T_{JN} suppression by magnetic field is a strong signature of viscous hydrodynamic behavior.

C. Rectangular geometry

Finally, we revisit the noise problem for the rectangular geometry at $B = 0$ as considered in Ref. 59. We take $\Omega = [0, \ell] \times [0, h]$ with contacts Γ_c at $x = 0, \ell$. We again compute the total current by clever integration tricks. Averaging over the x -component of the generic ohm-Stokes equation, we find

$$(\gamma - \nu \partial_y^2) \left[\frac{1}{\ell} \int dx v_x \right] = -\frac{q}{m\ell} V + \frac{1}{\ell} \int dx g_x \quad (36)$$

where $V = \phi^c|_{x=0}^{x=\ell}$ and we have used $\partial_x v_x|_{\Gamma_c} = -\partial_y v_y|_{\Gamma_c} = 0$ from incompressibility and the no-slip BCs.

Thus, we have reduced the problem to an ODE with vanishing BCs for $\int dx v_x$ on the y -boundaries. Fourier techniques allow us to solve for $\int dx v_x$, and by extension $I = (1/\ell) \int dV v_x$ with basis $\sin(k\pi y/h)$. Therefore, we have

$$I = GV + \frac{nqh}{\gamma} \sum_{k=1}^{\infty} \frac{1}{1 + \left(\frac{k\pi\lambda}{h}\right)^2} \frac{1 - \cos k\pi}{k\pi} \hat{g}_{x;0,k} \quad (37)$$

$$G = \frac{h\sigma_D}{\ell} \left(1 - \frac{2\lambda}{h} \tanh \frac{h}{2\lambda} \right) \quad (38)$$

where $\sigma_D = nq^2/(m\gamma)$ is the Drude conductivity, $\hat{g}_{x;0,k} \equiv \frac{2}{h\ell} \int dV g_x \sin \frac{k\pi y}{h}$ is the corresponding Fourier component, and $\lambda \equiv \sqrt{\nu/\gamma}$ is the Gurzhi length.

We now turn to the solution of the noise problem. First, we treat the hydrodynamic Shockley-Ramo problem $\mathbb{S}(\mathbf{v}; \mathcal{L}[\mathbf{v}_s], 0)$. Using Eq. (37) we find

$$I^{\text{SR}} = nq \int dV \frac{v_{s,x}}{\ell} - nqh \sum_{k=1}^{\infty} \frac{[\partial_x \int dy v_{s,x}]_0^\ell}{\frac{1}{\lambda^2} + \frac{k^2\pi^2}{h^2}} \frac{1 - \cos k\pi}{k\pi} \quad (39)$$

where the second term arises from integration by parts. Notice that Eq. (39) only recovers the ohmic Shockley-Ramo theorem [Eq. (3)] in the $\lambda \rightarrow 0$ limit due to the non-trivial second term, where $\nabla \phi_\alpha = \pm 1/\ell$ for this geometry. However, the second term only depends on the boundary, so the noise input

$$\langle v_{s,x}(\mathbf{r}) I_0 \rangle = \frac{q}{m} \frac{1}{\ell} k_B T(\mathbf{r}) \quad (40)$$

does indeed behave as if it obeys the ohmic Shockley-Ramo theorem for this geometry. This fills in a subtle unjustified assumption used in Ref. 59. For completeness, solving the noise problem gives a Johnson noise temperature

$$T_{\text{JN}} = \frac{R}{R_{\text{ohm}}} \sum_{k=1}^{\infty} \frac{1}{1 + \left(\frac{k\pi\lambda}{h}\right)^2} \frac{1 - \cos m\pi}{m\pi} \hat{T}_{0,k} \quad (41)$$

where $R_{\text{ohm}} \equiv \ell/(h\sigma_D)$, recovering the result of Ref. 59. One can verify that for $T = T_0$ one indeed finds $T_{\text{JN}} = T_0$ as a sanity check.

IV. CONCLUSION

In this paper, we have resolved the subtleties of the Corbino Shockley-Ramo paradox by correctly formulating the hydrodynamic Shockley-Ramo problem. This allows us to properly formulate the equations for hydrodynamic current noise in arbitrary multiterminal geometries and generalize previous ohmic results [10–12]; this enables proper interpretation of Johnson noise thermometry measurements in experimental setups [9, 20, 67]. We utilize this formulation for a Corbino geometry under

magnetic field, where we find a strong signature of viscous heating in hydrodynamic flow: suppression of T_{JN} by magnetic field (see also Ref. [67]). We also validate a previously unjustified Shockley-Ramo assumption in Ref. 59 for a rectangular geometry.

We remark that hydrodynamic materials may prove ideal as highly sensitive noise thermometers due to the tunability of the Lorenz ratio and of the correction factor f [59]. Clever non-traditional geometries [9] have already

been utilized to great effect to measure thermal properties with Johnson noise techniques. We leave further exploration of geometrical effects on noise in hydrodynamic devices and its optimization for noise thermometry applications to future work.

Acknowledgements – I deeply thank Brian Skinner, Philip Kim, Jonah Weissman, and Artem Talanov for an exciting related collaboration and illuminating in-depth discussions. I also thank Gregory Falkovich and Justin Song for helpful discussions.

-
- [1] It is also common to express the Johnson-Nyquist theorem with one-sided power spectral density (i.e. a one-sided Fourier transform), in which case the prefactor changes to $R/(4k_B)$.
- [2] B. S. Karasik, C. B. McKitterick, and D. E. Prober, Prospective performance of graphene hebb for ultrasensitive detection of sub-mm radiation, *Journal of Low Temperature Physics* **176**, 249 (2014).
- [3] D. K. Efetov, R.-J. Shiue, Y. Gao, B. Skinner, E. D. Walsh, H. Choi, J. Zheng, C. Tan, G. Grosso, C. Peng, J. Hone, K. C. Fong, and D. Englund, Fast thermal relaxation in cavity-coupled graphene bolometers with a johnson noise read-out, *Nature Nanotechnology* **13**, 797 (2018).
- [4] W. Miao, H. Gao, Z. Wang, W. Zhang, Y. Ren, K. M. Zhou, S. C. Shi, C. Yu, Z. Z. He, Q. B. Liu, and Z. H. Feng, A graphene-based terahertz hot electron bolometer with johnson noise readout, *Journal of Low Temperature Physics* **193**, 387 (2018).
- [5] C. Liu, L. Du, W. Tang, D. Wei, J. Li, L. Wang, G. Chen, X. Chen, and W. Lu, Towards sensitive terahertz detection via thermoelectric manipulation using graphene transistors, *NPG Asia Materials* **10**, 318 (2018).
- [6] W. Miao, F. M. Li, Z. Z. He, H. Gao, Z. Wang, W. Zhang, Y. Ren, K. M. Zhou, J. Q. Zhong, S. C. Shi, C. Yu, Q. B. Liu, and Z. H. Feng, Demonstration of a high-sensitivity and wide-dynamic-range terahertz graphene hot-electron bolometer with johnson noise thermometry, *Applied Physics Letters* **118**, 013104 (2021).
- [7] K. C. Fong and K. C. Schwab, Ultrasensitive and wide-bandwidth thermal measurements of graphene at low temperatures, *Phys. Rev. X* **2**, 031006 (2012).
- [8] J. Crossno, X. Liu, T. A. Ohki, P. Kim, and K. C. Fong, Development of high frequency and wide bandwidth johnson noise thermometry, *Applied Physics Letters* **106**, 023121 (2015).
- [9] J. Weissman, L. E. Anderson, A. V. Talanov, Z. Yan, Y. J. Shin, D. H. Najafabadi, M. Rezaee, X. Feng, D. G. Nocera, T. Taniguchi, K. Watanabe, B. Skinner, K. A. Matveev, and P. Kim, Electronic thermal transport measurement in low-dimensional materials with graphene non-local noise thermometry, *Nature Nanotechnology* **17**, 166 (2022).
- [10] D. E. Prober, Superconducting terahertz mixer using a transition-edge microbolometer, *Applied Physics Letters* **62**, 2119 (1993).
- [11] E. V. Sukhorukov and D. Loss, Noise in multiterminal diffusive conductors: Universality, nonlocality, and exchange effects, *Phys. Rev. B* **59**, 13054 (1999).
- [12] C. Pozderac and B. Skinner, Relation between johnson noise and heating power in a two-terminal conductor, *Phys. Rev. B* **104**, L161403 (2021).
- [13] A. Lucas and S. Das Sarma, Electronic hydrodynamics and the breakdown of the wiedemann-franz and mott laws in interacting metals, *Phys. Rev. B* **97**, 245128 (2018).
- [14] B. N. Narozhny, Hydrodynamic approach to two-dimensional electron systems, *La Rivista del Nuovo Cimento* **45**, 661 (2022).
- [15] M. J. M. de Jong and L. W. Molenkamp, Hydrodynamic electron flow in high-mobility wires, *Phys. Rev. B* **51**, 13389 (1995).
- [16] M. Müller, J. Schmalian, and L. Fritz, Graphene: A nearly perfect fluid, *Phys. Rev. Lett.* **103**, 025301 (2009).
- [17] I. Torre, A. Tomadin, A. K. Geim, and M. Polini, Non-local transport and the hydrodynamic shear viscosity in graphene, *Phys. Rev. B* **92**, 165433 (2015).
- [18] L. Levitov and G. Falkovich, Electron viscosity, current vortices and negative nonlocal resistance in graphene, *Nature Physics* **12**, 672 (2016).
- [19] D. A. Bandurin, I. Torre, R. K. Kumar, M. B. Shalom, A. Tomadin, A. Principi, G. H. Auton, E. Khestanova, K. S. Novoselov, I. V. Grigorieva, L. A. Ponomarenko, A. K. Geim, and M. Polini, Negative local resistance caused by viscous electron backflow in graphene, *Science* **351**, 1055 (2016), <https://www.science.org/doi/pdf/10.1126/science.aad0201>.
- [20] J. Crossno, J. K. Shi, K. Wang, X. Liu, A. Harzheim, A. Lucas, S. Sachdev, P. Kim, T. Taniguchi, K. Watanabe, T. A. Ohki, and K. C. Fong, Observation of the dirac fluid and the breakdown of the wiedemann-franz law in graphene, *Science* **351**, 1058 (2016), <https://www.science.org/doi/pdf/10.1126/science.aad0343>.
- [21] H. Guo, E. Ilseven, G. Falkovich, and L. S. Levitov, Higher-than-ballistic conduction of viscous electron flows, *Proceedings of the National Academy of Sciences* **114**, 3068 (2017).
- [22] R. Krishna Kumar, D. A. Bandurin, F. M. D. Pellegrino, Y. Cao, A. Principi, H. Guo, G. H. Auton, M. Ben Shalom, L. A. Ponomarenko, G. Falkovich, K. Watanabe, T. Taniguchi, I. V. Grigorieva, L. S. Levitov, M. Polini, and A. K. Geim, Superballistic flow of viscous electron fluid through graphene constrictions, *Nature Physics* **13**, 1182 (2017).
- [23] D. A. Bandurin, A. V. Shytov, L. S. Levitov, R. K. Kumar, A. I. Berdyugin, M. Ben Shalom, I. V. Grigorieva, A. K. Geim, and G. Falkovich, Fluidity onset in graphene, *Nature Communications* **9**, 4533 (2018).

- [24] B. A. Braem, F. M. D. Pellegrino, A. Principi, M. Rösli, C. Gold, S. Hannel, J. V. Koski, M. Berl, W. Dietsche, W. Wegscheider, M. Polini, T. Ihn, and K. Ensslin, Scanning gate microscopy in a viscous electron fluid, *Phys. Rev. B* **98**, 241304(R) (2018).
- [25] A. Hui, S. Lederer, V. Oganesyan, and E.-A. Kim, Quantum aspects of hydrodynamic transport from weak electron-impurity scattering, *Phys. Rev. B* **101**, 121107 (2020).
- [26] A. I. Berdyugin, S. G. Xu, F. M. D. Pellegrino, R. K. Kumar, A. Principi, I. Torre, M. B. Shalom, T. Taniguchi, K. Watanabe, I. V. Grigorieva, M. Polini, A. K. Geim, and D. A. Bandurin, Measuring hall viscosity of graphene's electron fluid, *Science* **364**, 162 (2019).
- [27] P. Gallagher, C.-S. Yang, T. Lyu, F. Tian, R. Kou, H. Zhang, K. Watanabe, T. Taniguchi, and F. Wang, Quantum-critical conductivity of the dirac fluid in graphene, *Science* **364**, 158 (2019), <https://www.science.org/doi/pdf/10.1126/science.aat8687>.
- [28] J. A. Sulpizio, L. Ella, A. Rozen, J. Birkbeck, D. J. Perello, D. Dutta, M. Ben-Shalom, T. Taniguchi, K. Watanabe, T. Holder, R. Queiroz, A. Principi, A. Stern, T. Scaffidi, A. K. Geim, and S. Ilani, Visualizing poiseuille flow of hydrodynamic electrons, *Nature* **576**, 75 (2019).
- [29] A. Jenkins, S. Baumann, H. Zhou, S. A. Meynell, Y. Daipeng, K. Watanabe, T. Taniguchi, A. Lucas, A. F. Young, and A. C. Bleszynski Jayich, Imaging the breakdown of ohmic transport in graphene, *Phys. Rev. Lett.* **129**, 087701 (2022).
- [30] M. J. H. Ku, T. X. Zhou, Q. Li, Y. J. Shin, J. K. Shi, C. Burch, L. E. Anderson, A. T. Pierce, Y. Xie, A. Hamo, U. Vool, H. Zhang, F. Casola, T. Taniguchi, K. Watanabe, M. M. Fogler, P. Kim, A. Yacoby, and R. L. Walsworth, Imaging viscous flow of the dirac fluid in graphene, *Nature* **583**, 537 (2020).
- [31] U. Vool, A. Hamo, G. Varnavides, Y. Wang, T. X. Zhou, N. Kumar, Y. Dovzhenko, Z. Qiu, C. A. C. Garcia, A. T. Pierce, J. Gooth, P. Anikeeva, C. Felser, P. Narang, and A. Yacoby, Imaging phonon-mediated hydrodynamic flow in wte2, *Nature Physics* **17**, 1216 (2021).
- [32] A. Aharon-Steinberg, T. Völkl, A. Kaplan, A. K. Pariari, I. Roy, T. Holder, Y. Wolf, A. Y. Meltzer, Y. Myasoevov, M. E. Huber, B. Yan, G. Falkovich, L. S. Levitov, M. Hücker, and E. Zeldov, Direct observation of vortices in an electron fluid, *Nature* **607**, 74 (2022).
- [33] P. J. W. Moll, P. Kushwaha, N. Nandi, B. Schmidt, and A. P. Mackenzie, Evidence for hydrodynamic electron flow in pdcoo2, *Science* **351**, 1061 (2016).
- [34] M. D. Bachmann, A. L. Sharpe, G. Baker, A. W. Barnard, C. Putzke, T. Scaffidi, N. Nandi, P. H. McGuinness, E. Zhakina, M. Moravec, S. Khim, M. König, D. Goldhaber-Gordon, D. A. Bonn, A. P. Mackenzie, and P. J. W. Moll, Directional ballistic transport in the two-dimensional metal pdcoo2, *Nature Physics* **18**, 819 (2022).
- [35] J. Gooth, F. Menges, N. Kumar, V. Süb, C. Shekhar, Y. Sun, U. Drechsler, R. Zierold, C. Felser, and B. Gotsmann, Thermal and electrical signatures of a hydrodynamic electron fluid in tungsten diphosphide, *Nature Communications* **9**, 4093 (2018).
- [36] G. M. Gusev, A. D. Levin, E. V. Levinson, and A. K. Bakarov, Viscous electron flow in mesoscopic two-dimensional electron gas, *AIP Advances* **8**, 025318 (2018).
- [37] A. D. Levin, G. M. Gusev, E. V. Levinson, Z. D. Kvon, and A. K. Bakarov, Vorticity-induced negative nonlocal resistance in a viscous two-dimensional electron system, *Phys. Rev. B* **97**, 245308 (2018).
- [38] G. M. Gusev, A. S. Jaroshevich, A. D. Levin, Z. D. Kvon, and A. K. Bakarov, Stokes flow around an obstacle in viscous two-dimensional electron liquid, *Scientific Reports* **10**, 7860 (2020).
- [39] M. Shavit, A. Shytov, and G. Falkovich, Freely flowing currents and electric field expulsion in viscous electronics, *Physical Review Letters* **123**, 10.1103/physrevlett.123.026801 (2019).
- [40] A. Stern, T. Scaffidi, O. Reuven, C. Kumar, J. Birkbeck, and S. Ilani, How electron hydrodynamics can eliminate the landauer-sharvin resistance, *Phys. Rev. Lett.* **129**, 157701 (2022).
- [41] C. Kumar, J. Birkbeck, J. A. Sulpizio, D. Perello, T. Taniguchi, K. Watanabe, O. Reuven, T. Scaffidi, A. Stern, A. K. Geim, and S. Ilani, Imaging hydrodynamic electrons flowing without landauer-sharvin resistance, *Nature* **609**, 276 (2022).
- [42] D. Valentinis, G. Baker, D. A. Bonn, and J. Schmalian, Kinetic theory of the nonlocal electrodynamic response in anisotropic metals: Skin effect in 2d systems, *Phys. Rev. Res.* **5**, 013212 (2023).
- [43] V. Gall, B. N. Narozhny, and I. V. Gornyi, Electronic viscosity and energy relaxation in neutral graphene, *Phys. Rev. B* **107**, 045413 (2023).
- [44] V. Gall, B. N. Narozhny, and I. V. Gornyi, Corbino magnetoresistance in neutral graphene, *Phys. Rev. B* **107**, 235401 (2023).
- [45] A. Hui, V. Oganesyan, and E.-A. Kim, Beyond ohm's law: Bernoulli effect and streaming in electron hydrodynamics, *Phys. Rev. B* **103**, 235152 (2021).
- [46] A. Hui, C. Pozderac, and B. Skinner, 2d hydrodynamic electron flow through periodic and random potentials (2023), arXiv:2309.15917 [cond-mat.str-el].
- [47] S. Samaddar, J. Strasdas, K. Janßen, S. Just, T. Johnsen, Z. Wang, B. Uzu, S. Li, D. Neumaier, M. Liebmann, and M. Morgenstern, Evidence for local spots of viscous electron flow in graphene at moderate mobility, *Nano Letters* **21**, 9365 (2021).
- [48] W. Huang, T. Paul, K. Watanabe, T. Taniguchi, M. L. Perrin, and M. Calame, Electronic poiseuille flow in hexagonal boron nitride encapsulated graphene field effect transistors, *Phys. Rev. Res.* **5**, 023075 (2023).
- [49] M. Müller, L. Fritz, and S. Sachdev, Quantum-critical relativistic magnetotransport in graphene, *Phys. Rev. B* **78**, 115406 (2008).
- [50] M. S. Foster and I. L. Aleiner, Slow imbalance relaxation and thermoelectric transport in graphene, *Phys. Rev. B* **79**, 085415 (2009).
- [51] A. Principi and G. Vignale, Violation of the wiedemann-franz law in hydrodynamic electron liquids, *Phys. Rev. Lett.* **115**, 056603 (2015).
- [52] A. Lucas, R. A. Davison, and S. Sachdev, Hydrodynamic theory of thermoelectric transport and negative magnetoresistance in weyl semimetals, *Proceedings of the National Academy of Sciences* **113**, 9463 (2016).
- [53] A. Lucas and S. Das Sarma, Electronic hydrodynamics and the breakdown of the wiedemann-franz and mott laws in interacting metals, *Phys. Rev. B* **97**, 245128 (2018).

- [54] M. Zarenia, T. B. Smith, A. Principi, and G. Vignale, Breakdown of the wiedemann-franz law in ab -stacked bilayer graphene, *Phys. Rev. B* **99**, 161407(R) (2019).
- [55] M. Zarenia, A. Principi, and G. Vignale, Thermal transport in compensated semimetals: Effect of electron-electron scattering on lorenz ratio, *Phys. Rev. B* **102**, 214304 (2020).
- [56] R. A. Robinson, L. Min, S. H. Lee, P. Li, Y. Wang, J. Li, and Z. Mao, Large violation of the wiedemann-franz law in heusler, ferromagnetic, weyl semimetal Co_2MnAl , *Journal of Physics D: Applied Physics* **54**, 454001 (2021).
- [57] S. Ahn and S. Das Sarma, Hydrodynamics, viscous electron fluid, and wiedeman-franz law in two-dimensional semiconductors, *Phys. Rev. B* **106**, L081303 (2022).
- [58] S. Li, A. Levchenko, and A. V. Andreev, Hydrodynamic thermoelectric transport in corbino geometry, *Phys. Rev. B* **105**, 125302 (2022).
- [59] A. Hui and B. Skinner, Current noise of hydrodynamic electrons, *Phys. Rev. Lett.* **130**, 256301 (2023).
- [60] A. Hui and B. Skinner, The corbino paradox for hydrodynamic electrons, *Journal Club for Condensed Matter Physics* 10.36471/JCCM.September.2022.01 (2022).
- [61] W. Shockley, Currents to Conductors Induced by a Moving Point Charge, *Journal of Applied Physics* **9**, 635 (1938).
- [62] S. Ramo, Currents induced by electron motion, *Proceedings of the IRE* **27**, 584 (1939).
- [63] P. D. Yoder, K. Gärtner, and W. Fichtner, A generalized Ramo-Shockley theorem for classical to quantum transport at arbitrary frequencies, *Journal of Applied Physics* **79**, 1951 (1996).
- [64] G. Cavalleri, E. Gatti, G. Fabri, and V. Svelto, Extension of ramo's theorem as applied to induced charge in semiconductor detectors, *Nuclear Instruments and Methods* **92**, 137 (1971).
- [65] Z. He, Review of the shockley-ramo theorem and its application in semiconductor gamma-ray detectors, *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* **463**, 250 (2001).
- [66] J. C. W. Song and L. S. Levitov, Shockley-ramo theorem and long-range photocurrent response in gapless materials, *Phys. Rev. B* **90**, 075415 (2014).
- [67] A. Talanov, J. Waissman, A. Hui, B. Skinner, K. Watanabe, T. Taniguchi, and P. Kim., Observation of electronic viscous dissipation in graphene magneto-thermal transport, (In preparation) (2023).
- [68] Technically, we assume Γ_w, Γ_c are open sets such that $\Gamma_w \cap \Gamma_c = \emptyset$ and $\partial\Omega = \overline{\Gamma_w} \cup \overline{\Gamma_c}$, where the overbar denotes closure. We take $\Gamma_{c,\alpha}$ to be the connected components of Γ_c . Finally, we assume the boundary is Lipschitz continuous; that is to say, piecewise segments are sufficiently smooth.
- [69] In local polar coordinates, $K(\hat{\mathbf{n}}(\mathbf{x})) = \hat{\mathbf{n}} \cdot \hat{\mathbf{r}}/r$, where r is the radius of the osculating circle at the point \mathbf{x} on the boundary.
- [70] W. L. Barth and G. F. Carey, On a boundary condition for pressure-driven laminar flow of incompressible fluids, *International Journal for Numerical Methods in Fluids* **54**, 1313 (2007).
- [71] A. Jenkins, S. Baumann, H. Zhou, S. A. Meynell, Y. Daipeng, K. Watanabe, T. Taniguchi, A. Lucas, A. F. Young, and A. C. Bleszynski Jayich, Imaging the breakdown of ohmic transport in graphene, *Phys. Rev. Lett.* **129**, 087701 (2022).
- [72] J. G. HEYWOOD, R. RANNACHER, and S. TUREK, Artificial boundaries and flux and pressure conditions for the incompressible navier-stokes equations, *International Journal for Numerical Methods in Fluids* **22**, 325 (1996).
- [73] S. Bertoluzza, V. Chabannes, C. Prud'homme, and M. Szopos, Boundary conditions involving pressure for the stokes problem and applications in computational hemodynamics, *Computer Methods in Applied Mechanics and Engineering* **322**, 58 (2017).
- [74] Concretely, the outgoing energy-flux from the bulk is given by $\sigma_{nn}v_n \equiv (nq\phi - \sigma'_{nn})v_n$, where σ_{ij} is the total stress (since $v_{\parallel} = 0$). Eq. (8) equates this to the incoming energy-flux to the contact $\phi^c j_n$.
- [75] C. Conca, F. Murat, and O. Pironneau, The stokes and navier-stokes equations with boundary conditions involving the pressure, *Japanese journal of mathematics. New series* **20**, 279 (1994).
- [76] The inverse notation is motivated from the fact that the weak formulation of the ohmic-Stokes can be expressed as a linear operator equation for \mathbf{v} . Solving for \mathbf{v} is then equivalent to finding the inverse operator, which we call \mathcal{L}_v^{-1} [87, 88]. In particular, \mathcal{L}_v^{-1} is not quite the inverse of \mathcal{L} due to the fact that ϕ may be non-zero to enforce incompressibility. We also note that second argument of \mathcal{L}_v^{-1} takes the set of contact voltages $\{\phi_\alpha^c\}$, suppressing the set notation for readability.
- [77] One can explicitly obtain such a weighting potential by, e.g., solving the Laplace equation for ψ_α with these BCs on $\Gamma_{c,\beta}$ and $\partial_n \psi_\alpha|_{\Gamma_w} = 0$. This corresponds to the potential profile on an ohmic device with contact $\Gamma_{c,\alpha}$ held at unit voltage and all others grounded.
- [78] L. Landau, E. Lifshitz, and L. Pitaevskii, *Course of Theoretical Physics: Statistical Physics, Part 2 : by E.M. Lifshitz and L.P. Pitaevskii*, v. 9 (1980).
- [79] Thermal density fluctuations are suppressed by the thermal Mach number $\sqrt{k_B T/(mc^2)}$, where c is the speed of sound [78]. A rough estimate with $m = m_e$ the electron mass at $T = 300K$ and $c \sim v_F \sim 10^6 m/s$ gives $\text{Mach} \sim .07$, so we expect thermal density fluctuations to be a subleading effect.
- [80] A factor of two arises from the fact $\langle \delta \mathbf{v}(\omega) \delta I_{0,\beta} \rangle = 2 \langle \delta v(s) \delta I_{0,\beta} \rangle$ upon conversion to the two-sided Fourier transform because the correlation function $\langle \mathbf{v}(t) I_{0,i} \rangle_i$ is pure real and time-reversal even.
- [81] While it is mnemonically convenient to identify $\delta \mathbf{v}_s$ with $\delta \mathbf{v}(t=0)$, this is not actually correct; $\delta \mathbf{v}_s$ need not obey incompressibility.
- [82] A. V. Talanov, J. Waissman, T. Taniguchi, K. Watanabe, and P. Kim, High-bandwidth, variable-resistance differential noise thermometry, *Review of Scientific Instruments* **92**, 014904 (2021), https://pubs.aip.org/aip/rsi/article-pdf/doi/10.1063/5.0026488/14880280/014904_1_online.pdf.
- [83] In this limit, the no-slip BCs on \mathbf{v}_{\parallel} become spurious due to the loss of the derivative term; boundary layers are allowed to be arbitrarily thin so ohmic flow obeys no-slip in a discontinuous way.
- [84] In particular, there is no $\delta \phi^c$ contribution to current (see Eq. (10)) since the problem decouples under Fourier transform on θ .
- [85] Analytic results are available in the viscous $\lambda \rightarrow \infty$ limit, see the appendix.

- [86] We numerically solve the PDEs by truncating the exact Fourier-Bessel type series solution. These solutions exist since L^{-1} is given by the solution of a Sturm-Liouville ODE (in fact, an inhomogenous Bessel equation).
- [87] L. Evans, *Partial Differential Equations*, Graduate studies in mathematics (American Mathematical Society, 2010).
- [88] R. Temam, J. Lions, G. Papanicolaou, and R. Rockafel-

lar, *Navier—Stokes Equations: Theory and Numerical Analysis*, Studies in mathematics and its applications (Elsevier Science, 2016).

- [89] Similar to the rectangular case, this admits a generalized Fourier solution with the help of Sturm-Liouville theory; L is diagonalized by the Bessel functions J_1 and Y_1 .

Appendix A: Corbino Computational Details

To evaluate T_{JN} requires us to evaluate L^{-1} , i.e. we must solve $L[u] = g$ with homogeneous $u|_{\Gamma_c} = 0$ BCs [89]. In the viscous $\gamma \rightarrow 0$ limit, we can integrate the ODE directly to obtain an analytic result

$$\lim_{\gamma \rightarrow 0} L^{-1}[g] = v_p(r) - \frac{r_1 v_p(r_1) - r_0 v_p(r_0)}{r_1^2 - r_0^2} r + \frac{r_0^2 r_1^2}{r_1^2 - r_0^2} \left(\frac{v_p(r_1)}{r_1} - \frac{v_p(r_0)}{r_0} \right) \frac{1}{r} \quad (\text{A1})$$

$$v_p(r) \equiv -\frac{1}{\nu} \frac{1}{r} \int^r dr' r' \int^{r'} dr'' g(r'') \quad (\text{A2})$$

where the particular solution v_p is defined via antiderivatives; to fix the integration constants, one can arbitrarily fix the lower integration bound.

We also need to evaluate the temperature profile $T(r)$ under current-bias heating. Under a constant voltage bias V , the problem is rotationally symmetric; all quantities are equivalent to their angular average. With the help of L^{-1} , we know \mathbf{v} from Eq. (29) and Eq. (30). This allows us to evaluate the heating density q with Eq. (21). Furthermore, rotational symmetry allows us to solve the heat equation by direct integration. The temperature profile is given by

$$\delta T(r) = T_p(r) - T_p|_{r_0}^{\ln \frac{r}{r_0}} - T_p(r_0) \quad (\text{A3})$$

$$T_p = -\frac{1}{\kappa} \int^r dr' \frac{1}{r'} \int^{r'} dr'' r'' q(r'') \quad (\text{A4})$$

where again T_p is a particular solution defined by antiderivatives.

We summarize the explicit results in the viscous limit $\gamma \rightarrow 0$ below.

$$v_\theta = \frac{I}{nq} \frac{\omega_c}{2\pi\nu} \left[c_1 r + c_2 \frac{1}{r} - \frac{1}{2} r \ln r \right] \quad (\text{A5})$$

$$q = \frac{m\nu}{nq^2} \frac{I^2}{(2\pi)^2} \left[\frac{4}{r^4} + \left(\frac{\omega_c}{2\nu} \right)^2 \left(1 + \frac{4c_2}{r^2} \right)^2 \right] \quad (\text{A6})$$

$$T = \frac{m\nu}{nq^2 \kappa} I^2 \frac{1}{(2\pi)^2} \left[\left(\frac{1}{r_0^2} - \frac{1}{r^2} - \left(\frac{1}{r_0^2} - \frac{1}{r_1^2} \right) \frac{\ln \frac{r}{r_0}}{\ln \frac{r_1}{r_0}} \right) + \frac{\omega_c^2}{4\nu^2} \left(\frac{1}{4} \left[-(r^2 - r_0^2) + (r_1^2 - r_0^2) \frac{\ln \frac{r}{r_0}}{\ln \frac{r_1}{r_0}} \right] - 4c_2 \ln \frac{r}{r_0} \ln \frac{r}{r_1} + 4c_2^2 \left[\frac{1}{r_0^2} - \frac{1}{r^2} - \left(\frac{1}{r_0^2} - \frac{1}{r_1^2} \right) \frac{\ln \frac{r}{r_0}}{\ln \frac{r_1}{r_0}} \right] \right) \right] \quad (\text{A7})$$

$$R = \frac{m\nu}{nq^2} \left[\frac{1}{\pi} \left(\frac{1}{r_0^2} - \frac{1}{r_1^2} \right) + \frac{\omega_c^2}{\nu^2} \frac{1}{16\pi} \left(r_1^2 - r_0^2 + 8c_2 \ln \frac{r_1}{r_0} \right) \right] \quad (\text{A8})$$

where $c_1 = \frac{1}{2} \frac{r_1^2 \ln r_1 - r_0^2 \ln r_0}{r_1^2 - r_0^2}$ and $c_2 = -\frac{1}{2} \frac{r_0^2 r_1^2}{r_1^2 - r_0^2} \ln \frac{r_1}{r_0}$. Furthermore, the function f is given by

$$f = \frac{12}{\ln s} \frac{a_0 + \left(\frac{\omega_c r_0^2}{\nu} \right)^2 a_2 + \left(\frac{\omega_c r_0^2}{\nu} \right)^4 a_4}{\left(R_0 + \left(\frac{\omega_c r_0^2}{\nu} \right)^2 R_2 \right)^2} \quad (\text{A9})$$

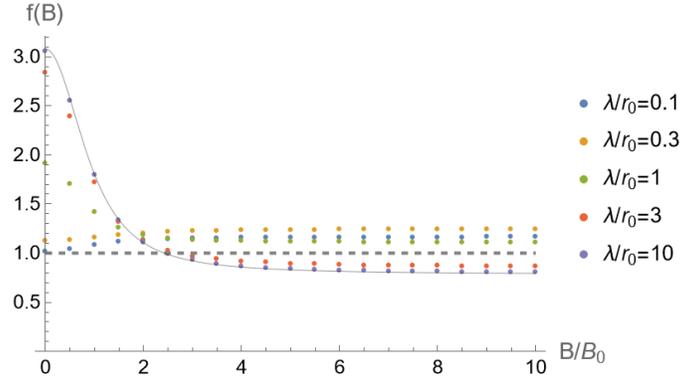


FIG. 4. A plot of $f(B)$ for $s = 4.5$ in the Corbino geometry. The dashed line corresponds to the ohmic $\lambda = 0$ value, while the solid thin line corresponds to the viscous $\lambda \rightarrow \infty$ value. These curves are plotted against B/B_0 , where the scale $B_0 = (m/q)(\gamma + \nu/r_0^2)$ is different for each curve.

where

$$a_0 = \frac{-(s^2 - 1)^2 + 2(s^4 - 1) \ln s}{4\pi^2 s^4 \ln s} \quad (\text{A10})$$

$$a_2 = \frac{3(s^2 - 1)^3 - 4s^2(s^2 - 1) \ln^2 s - 8s^2(s^2 + 1) \ln^3 s}{64\pi^2 s^2 (s^2 - 1) \ln s} \quad (\text{A11})$$

$$a_4 = \frac{-3 + 3s^4 + 76s^2 \ln s}{2048\pi^2} - \frac{(s^2 - 1)^2}{512\pi^2 \ln s} - \frac{5s^2(s^2 + 1) \ln^2 s}{256\pi^2 (s^2 - 1)} + \frac{s^4 \ln^3 s (-3 + \ln^2 s)}{96\pi^2 (s^2 - 1)^2} - \frac{s^4 (s^2 + 1) \ln^4 s}{32\pi^2 (s^2 - 1)^3} \quad (\text{A12})$$

$$R_0 = \frac{1}{\pi} \left(1 - \frac{1}{s^2} \right) \quad (\text{A13})$$

$$R_2 = \frac{1}{16\pi} \left(s^2 - 1 - \frac{4s^2 \ln^2 s}{s^2 - 1} \right) \quad (\text{A14})$$

and $s \equiv \frac{r_1}{r_0}$ is the aspect ratio and $R = \frac{m\nu}{nq^2 r_0^2} \left(R_0 + \left(\frac{\omega_c r_0^2}{\nu} \right)^2 R_2 \right)$.

In Fig. 4, we plot $f(B)$ as a function of magnetic field for $s = 5$. At $B = 0$, we see that $f(0)$ is significantly enhanced for large λ/r_0 . The value of this peak depends on the aspect ratio s and diverges in the $s \rightarrow 1$ limit. This ultimately results in a finite value for T_{JN} since this divergence is compensated by the fact that $R_{\text{th}} \rightarrow 0$. This is strikingly different from the ohmic case, where $T_{\text{JN}} \rightarrow 0$ since $R_{\text{th}} \rightarrow 0$ as $s \rightarrow 1$.