

---

# Sequential Memory with Temporal Predictive Coding

---

Mufeng Tang, Helen Barron, Rafal Bogacz

MRC Brain Network Dynamics Unit, University of Oxford, UK  
{mufeng.tang, helen.barron, rafal.bogacz}@bndu.ox.ac.uk

## Abstract

Memorizing the temporal order of event sequences is critical for the survival of biological agents. However, the computational mechanism underlying sequential memory in the brain remains unclear. Inspired by neuroscience theories and recent successes in applying predictive coding (PC) to *static* memory tasks, in this work we propose a novel PC-based model for *sequential* memory, called *temporal predictive coding* (tPC). We show that our tPC models can memorize and retrieve sequential inputs accurately with a biologically plausible neural implementation. Importantly, our analytical study reveals that tPC can be viewed as a classical Asymmetric Hopfield Network (AHN) with an implicit statistical whitening process, which leads to more stable performance in sequential memory tasks of structured inputs. Moreover, we find that tPC with a multi-layer structure can encode context-dependent information, thus distinguishing between repeating elements appearing in a sequence, a computation attributed to the hippocampus. Our work establishes a possible computational mechanism underlying sequential memory in the brain that can also be theoretically interpreted using existing memory model frameworks.

## 1 Introduction

The ability to memorize and recall sequences of events with temporal dependencies is a critical function of biological memory systems [1–3]. For example, forming correct memories of words requires humans to memorize not only individual letters but also the sequential order following which the letters appear (e.g., “cat” and “act”). However, despite extensive research into models of *static*, temporally unrelated memories from both neuroscience and machine learning [4–10], computational modeling of *sequential* memory is not as developed. Existing models for sequential memory are either analytically intractable or have not yet been systematically evaluated in challenging sequential memory tasks [11–15], which hinders a comprehensive understanding of the computational mechanism underlying sequential memory, arguably a more general form of memory in the natural world than static memories.

In this work, we propose a novel approach to modeling sequential memory based on predictive coding (PC) [16–18], a biologically plausible neural network model able to reproduce many phenomena observed in the brain [19], which has also shown to have a close relationship to backpropagation in artificial neural networks [20, 21]. Using PC to model sequential memory is motivated by two key factors: Firstly, neuroscience experiments and theories have suggested that (temporal) predictive processing and memory are two highly related computations in the hippocampus, the brain region crucial for memory [22, 23]. Secondly, the modeling of static memories (e.g., a single image) using PC has recently demonstrated significant success [8, 10, 24, 25], raising the question of whether PC can also be employed to model sequential memory. To take into account the temporal dimension in sequential memory, in this work we adopt a temporal extension of the original PC models, which has been employed in filtering problems and in modeling the visual system [26–29]. Here we investigate its performance in sequential memory tasks. Our contributions can be summarized as follows:

- We propose *temporal predictive coding* (tPC) memory networks, a family of PC models capable of sequential memory tasks that inherit the biologically plausible neural implementation of classical PC models [18], and can be flexibly extended to have a multi-layer structure;
- We present an analytical result showing that the single-layer tPC can be viewed as the classical Asymmetric Hopfield Network (AHN) performing an implicit *statistical whitening* step during memory recall, which provides not only a theoretical understanding of why tPC performs sequential memory but also a possible mechanism of statistical whitening in the brain [30–32];
- Experimentally, we show that the whitening step in single-layer tPC models results in more stable performance than the AHN and its modern variants [15] in sequential memory, due to the highly variable and correlated structure of natural sequential inputs;
- We show that the multi-layer tPC model develops latent representations of contextual information in sequential memories. This property is consistent with experimental observations in the brain [2, 11], and helps tPC recall sequences with repeating elements at different time-steps, a task challenging for single-layer models including AHNs.

## 2 Background and related work

**Predictive Coding Models for Static Memory** The original PC model for memory follows a hierarchical and generative structure, where higher layers generate top-down predictions of lower layers’ activities and the network’s learning and inference are driven by the minimization of all the prediction errors [8]. Since the memorized patterns minimize the prediction errors in PC, they can be considered attractors of the energy function defined as the (summed) prediction errors, which is similar to the energy perspective of Hopfield Networks (HNs) [4]. Subsequent research has also shown that PC models for memory can be formulated as recurrent networks to account for the recurrently connected hippocampal network [10, 25], and that continual memorization and recall of a stream of patterns can be achieved by combining the hierarchical PC model with conjugate Bayesian updates [24]. Despite these abundant investigations into the memory capability of PC models, they all focused on static memories. Although the BayesPCN model [24] is capable of recalling patterns memorized in an online manner, the memories stored in this model are still static, order-invariant patterns, rather than sequences of patterns with underlying temporal dependencies.

**Predictive Coding with Time** PC was extended to include temporal predictions by earlier works (see [33] for a review) noticing its relationship to Kalman filters [34]. However, the Kalman filtering approach to temporal predictions sacrifices the plausible neural implementation of PC models due to non-local computations, and a recent work proposed an alternative way of formulating PC with temporal predictions that inherits the plausible implementation of static PC, while approximating Kalman filters [35]. However, none of these models were examined in memory tasks. Broadly, models based on temporal predictions were proposed in both neuroscience and machine learning [29, 36–38]. However, these models are either trained by the implausible backpropagation or rely on complex architectures to achieve temporal predictions. In this work, our tPC model for sequential memory is based on the model in [35], which inherits the simple and biologically plausible neural implementation of classical PC models that requires only local computations and Hebbian plasticity.

**Hopfield Networks for Sequential Memory** Although there exist other models of sequential memory [11–13], these models are mostly on the conceptual level, used to provide theoretical accounts for physiological observations from the brain, and are thus hard to analyze mathematically. Therefore, here we focus our discussion on the AHN [14] and its modern variants [15], which extended the HN [4] to account for sequential memory, and have a more explicit mathematical formulation. Denoting a sequence of  $P + 1$  patterns  $\mathbf{x}^\mu$  ( $\mu = 1, \dots, P + 1$ ),  $\mathbf{x}^\mu \in \{-1, 1\}^N$ , the  $N \times N$  weight matrix of an AHN is set as follows:

$$\mathbf{W}^{AHN} = \sum_{\mu=1}^P \mathbf{x}^{\mu+1} (\mathbf{x}^\mu)^\top \quad (1)$$

Notice that it differs from the static HN only by encoding the asymmetric autocovariance rather than the symmetric covariance  $\sum_{\mu=1}^P \mathbf{x}^\mu (\mathbf{x}^\mu)^\top$ , thus the name. The single-shot retrieval, which we define as  $R$ , is then triggered by a query,  $\mathbf{q} \in \{-1, 1\}^N$ :

$$R^{AHN}(\mathbf{q}) = \text{sgn}(\mathbf{W}^{AHN} \mathbf{q}) = \text{sgn} \left( \sum_{\mu=1}^P \mathbf{x}^{\mu+1} (\mathbf{x}^\mu)^\top \mathbf{q} \right) \quad (2)$$

The retrieval process in Eq. 2 can be viewed as follows: the query  $\mathbf{q}$  is first compared with each  $\mathbf{x}^\mu$  using a dot product function  $(\mathbf{x}^\mu)^\top \mathbf{q}$  that outputs a similarity score, then the retrieval is a weighted sum of all  $\mathbf{x}^{\mu+1}$  ( $\mu = 1, \dots, P$ ) using these scores as weights. Thus, if  $\mathbf{q}$  is identical to a certain  $\mathbf{x}^\mu$ , the next pattern  $\mathbf{x}^{\mu+1}$  will be given the largest weight in the output retrieval. Following the Universal Hopfield Network (UHN) framework [7], we can generalize this process to define a retrieval function of a general sequential memory model with real-valued patterns  $\mathbf{x}^\mu \in \mathbb{R}^N$ :

$$R^{UHN}(\mathbf{q}) = \sum_{\mu=1}^P \mathbf{x}^{\mu+1} \text{sep}(\text{sim}(\mathbf{x}^\mu, \mathbf{q})) \quad (3)$$

where  $\text{sim}$  is a similarity function such as dot product or cosine similarity, and  $\text{sep}$  is a separation function that separates the similarity scores i.e., emphasize large scores and de-emphasize smaller ones [7]. When  $\text{sim}$  is dot product and  $\text{sep}$  is an identity function, we get the retrieval function of the original AHN (for binary patterns an ad-hoc  $\text{sgn}$  function can be applied to the retrievals). Chaudhry et al. [15] have shown that it is possible to extend AHN to a model with polynomial  $\text{sep}$  function with a degree  $d$ , and a model with softmax  $\text{sep}$  function, which we call ‘‘Modern Continuous AHN’’ (MCAHN):

$$R^{AHN}(\mathbf{q}, d) = \sum_{\mu=1}^P \mathbf{x}^{\mu+1} ((\mathbf{x}^\mu)^\top \mathbf{q})^d \quad (4)$$

$$R^{MCAHN}(\mathbf{q}, \beta) = \sum_{\mu=1}^P \mathbf{x}^{\mu+1} \text{softmax}(\beta(\mathbf{x}^\mu)^\top \mathbf{q}) \quad (5)$$

where  $\beta$  is the temperature parameter that controls the separation strength of the MCAHN. Note that these two models can be respectively viewed as sequential versions of the Modern Hopfield Network [5] and the Modern Continuous Hopfield Network [6], which is closely related to the self-attention mechanism in Transformers [39]. However, the family of AHNs has not yet been investigated in sequential memory tasks with structured and complex inputs such as natural movies.

### 3 Models

In this section, we introduce the tPC models by describing their computations during **memorization** and **recall** respectively, as well as the **neural implementations** of these computations. We describe the single-layer tPC first, and then move to the 2-layer tPC.

#### 3.1 Single-layer tPC

**Memorization** The most straightforward intuition behind ‘‘good’’ sequential memory models is that they should learn the transition between every pair of consecutive patterns in the sequence, so that accurate recall of the full sequence can be achieved recursively by recalling the next pattern based on the current one. Given a sequence of real-valued patterns  $\mathbf{x}^\mu$ ,  $\mu = 1, \dots, P + 1$ , this intuition can be formalized as the model minimizing the following loss at each time-step:

$$\mathcal{F}_\mu(\mathbf{W}) = \|\mathbf{x}^\mu - \mathbf{W}f(\mathbf{x}^{\mu-1})\|_2^2 \quad (6)$$

which is simply the squared temporal prediction error.  $\mathbf{W}$  is the weight parameter of the model, and  $f(\cdot)$  is a nonlinear function. Similar to static PC models [8, 10], we assume that the model has two populations of neurons: value neurons that are loaded with the inputs  $\mathbf{x}^\mu$  at step  $\mu$ , and error neurons representing the temporal prediction error  $\boldsymbol{\varepsilon}^\mu := \mathbf{x}^\mu - \mathbf{W}f(\mathbf{x}^{\mu-1})$ . To memorize the sequence, the weight parameter  $\mathbf{W}$  is updated at each step following gradient descent:

$$\Delta \mathbf{W} \propto -\partial \mathcal{F}_\mu(\mathbf{W}) / \partial \mathbf{W} = \boldsymbol{\varepsilon}^\mu f(\mathbf{x}^{\mu-1})^\top \quad (7)$$

and the model can be presented with the sequence for multiple epochs until  $\mathbf{W}$  converges. Note that the model only has one weight parameter for the whole sequence, rather than  $P$  weight parameters for a sequence of length  $P + 1$ .

**Recall** During recall, the weight matrix  $\mathbf{W}$  is fixed to the learned values, and the value neurons no longer receive the correct patterns  $\mathbf{x}^\mu$ . Instead, while trying to recall the pattern  $\mathbf{x}^\mu$  based on the query  $\mathbf{q}$ , the value neurons are updated to minimize the squared temporal prediction error based on the query  $\mathbf{q}$  and the learned  $\mathbf{W}$ :

$$\mathcal{F}_\mu(\hat{\mathbf{x}}^\mu) = \|\hat{\mathbf{x}}^\mu - \mathbf{W}f(\mathbf{q})\|_2^2 \quad (8)$$

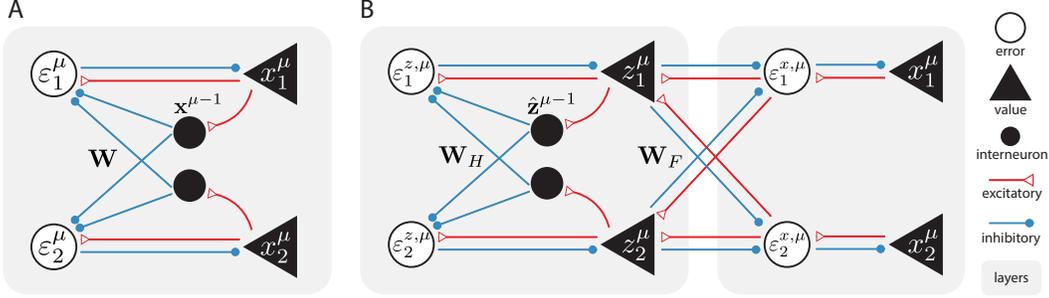


Figure 1: Neural implementations of the tPC models. A: single-layer tPC. B: 2-layer tPC.

where we denote the value neurons’ activities during recall as  $\hat{x}^\mu$  to differentiate it from the memorized patterns  $\mathbf{x}^\mu$ . The value neurons then perform the following inferential dynamics to minimize the loss  $\mathcal{F}_\mu(\hat{\mathbf{x}}^\mu)$ :

$$\dot{\hat{\mathbf{x}}^\mu} \propto -\partial \mathcal{F}_\mu(\hat{\mathbf{x}}^\mu) / \partial \hat{\mathbf{x}}^\mu = -\boldsymbol{\epsilon}^\mu \quad (9)$$

and the converged  $\hat{\mathbf{x}}^\mu$  is the final retrieval. Note that the error neurons’ activities during recall are defined as  $\boldsymbol{\epsilon}^\mu := \hat{\mathbf{x}}^\mu - \mathbf{W}f(\mathbf{q})$ , which is also different from their activities during memorization.

In the case of sequential memory, there are two types of recall. We define the first type as “online” recall, where the query  $\mathbf{q}$  at each step  $\mu$  is the ground-truth pattern at the previous step  $\mathbf{x}^{\mu-1}$ . It is called online as these ground-truth queries can be viewed as real-time online feedback during the sequence recall. In this case, the original  $\mathbf{x}^\mu$  will define a memory attractor as it defines an optimum of the loss, or energy in Eqs. 6 and 8. The second type is referred to as “offline” recall, where  $\mathbf{q}$  is the recall from the previous step i.e.,  $\hat{\mathbf{x}}^{\mu-1}$ , except at the first step, where a ground-truth  $\mathbf{x}^1$  is supplied to elicit recall of the whole sequence. This is called offline as there is no real-time feedback. In this case, errors from earlier steps may accumulate through time and  $\mathbf{x}^\mu$  is no longer an ascertained attractor unless  $\hat{\mathbf{x}}^{\mu-1} = \mathbf{x}^{\mu-1}$ , which makes it more challenging and analogous to the replay of memories during sleep [40].

**Neural implementation** A possible neural network implementation of these computations is shown in Fig. 1A, which is similar to that of static PC models [18] characterized by separate populations of value and error neurons. The difference from static models is that the predictions are now from the previous time-step  $\mu - 1$ . To achieve this, we assume that the value neurons are connected to the error neurons via two pathways: the direct pathway (the straight arrows between value and error neurons) and the indirect pathway through an additional population of inhibitory interneurons, which provides inhibitory inputs to the error neurons via  $\mathbf{W}$ . These interneurons naturally introduce a synaptic delay of one time-step, such that when the inputs from step  $\mu - 1$  reach the error neurons through the indirect pathway, the error neurons are already receiving inputs from step  $\mu$  via the direct pathway, resulting in the temporal error. Moreover, we assume that memory recall is a much faster process than the time-steps  $\mu$  so that the interneurons can hold a short working memory of  $\mathbf{q}$  during the (iterative) inferential dynamics in Eq. 9 at step  $\mu$ , which can be achieved by the mechanisms described in [41]. Notice that in this implementation, the learning rule (Eq. 7) is Hebbian and the inference rule (Eq. 9) is also local, inheriting the plausibility of static PC implementations [18].

### 3.2 2-layer tPC

Similar to multi-layer static PC models for memory, we can have multiple layers in tPC to model the hierarchical processing of raw sensory inputs by the neocortex, before they enter the memory system [8, 10]. We focus on a 2-layer tPC model in this work. In this model, we assume a set of *hidden* value neurons  $\mathbf{z}^\mu$  to model the brain’s internal neural responses to the sequential sensory inputs  $\mathbf{x}^\mu$ . The hidden neurons make not only hierarchical, top-down predictions of the current activities in the sensory layer like in static PC models [8], but also temporal predictions like in the single-layer tPC. We also assume that the sensory layer  $\mathbf{x}^\mu$  does not make any temporal predictions in this case. Thus, this 2-layer tPC can be viewed as an instantiation of the hidden Markov model[42].

**Memorization** During memorization, the 2-layer tPC tries to minimize the sum of squared errors at step  $\mu$ , with respect to the model parameters and the hidden activities:

$$\mathcal{F}_\mu(\mathbf{z}^\mu, \mathbf{W}_H, \mathbf{W}_F) = \|\mathbf{z}^\mu - \mathbf{W}_H f(\hat{\mathbf{z}}^{\mu-1})\|_2^2 + \|\mathbf{x}^\mu - \mathbf{W}_F f(\mathbf{z}^\mu)\|_2^2 \quad (10)$$

where  $\mathbf{W}_H$  governs the temporal prediction in the hidden state,  $\mathbf{W}_F$  is the forward weight for the top-down predictions, and  $\hat{\mathbf{z}}^{\mu-1}$  is the hidden state inferred at the previous time-step. During memorization, the 2-layer tPC follows a similar optimization processing to that of static hierarchical PC [8]. It first infers the hidden representation of the current sensory input  $\mathbf{x}^\mu$  by:

$$\dot{\mathbf{z}}^\mu \propto -\partial\mathcal{F}_\mu(\mathbf{z}^\mu, \mathbf{W}_H, \mathbf{W}_F)/\partial\mathbf{z}^\mu = -\boldsymbol{\varepsilon}^{\mathbf{z},\mu} + f'(\mathbf{z}^\mu) \odot \mathbf{W}_F^\top \boldsymbol{\varepsilon}^{\mathbf{x},\mu} \quad (11)$$

where  $\odot$  denotes the element-wise product between two vectors, and  $\boldsymbol{\varepsilon}^{\mathbf{z},\mu}$  and  $\boldsymbol{\varepsilon}^{\mathbf{x},\mu}$  are defined as the hidden temporal prediction error  $\mathbf{z}^\mu - \mathbf{W}_H f(\hat{\mathbf{z}}^{\mu-1})$  and the top-down error  $\mathbf{x}^\mu - \mathbf{W}_F f(\mathbf{z}^\mu)$  respectively. After  $\mathbf{z}^\mu$  converges,  $\mathbf{W}_H$  and  $\mathbf{W}_F$  are updated following gradient descent on  $\mathcal{F}_\mu$ :

$$\begin{aligned} \Delta\mathbf{W}_H &\propto -\partial\mathcal{F}_\mu(\mathbf{z}^\mu, \mathbf{W}_H, \mathbf{W}_F)/\partial\mathbf{W}_H = \boldsymbol{\varepsilon}^{\mathbf{z},\mu} f(\hat{\mathbf{z}}^{\mu-1})^\top; \\ \Delta\mathbf{W}_F &\propto -\partial\mathcal{F}_\mu(\mathbf{z}^\mu, \mathbf{W}_H, \mathbf{W}_F)/\partial\mathbf{W}_F = \boldsymbol{\varepsilon}^{\mathbf{x},\mu} f(\mathbf{z}^\mu)^\top \end{aligned} \quad (12)$$

which are performed once for every presentation of the full sequence. The converged  $\mathbf{z}^\mu$  is then used as  $\hat{\mathbf{z}}^\mu$  for the memorization at time-step  $\mu + 1$ .

**Recall** After learning/memorization,  $\mathbf{W}_H$  and  $\mathbf{W}_F$  are fixed. We also assume that the hidden activities  $\mathbf{z}^\mu$  are unable to store memories, by resetting their values to randomly initialized ones. Thus, the sequential memories can only be recalled through the weights  $\mathbf{W}_H$  and  $\mathbf{W}_F$ . Again, the sensory layer has no access to the correct patterns during recall and thus needs to dynamically change its value to retrieve the memories. The loss thus becomes:

$$\mathcal{F}_\mu(\mathbf{z}^\mu, \hat{\mathbf{x}}^\mu) = \|\mathbf{z}^\mu - \mathbf{W}_H f(\hat{\mathbf{z}}^{\mu-1})\|_2^2 + \|\hat{\mathbf{x}}^\mu - \mathbf{W}_F f(\mathbf{z}^\mu)\|_2^2 \quad (13)$$

where  $\hat{\mathbf{x}}^\mu$  denotes the activities of value neurons in the sensory layer during recall. Both the hidden and sensory value neurons are updated to minimize the loss. The hidden neurons will follow similar dynamics specified in Eq. 11, with the top-down error  $\boldsymbol{\varepsilon}^{\mathbf{x},\mu}$  defined as  $\hat{\mathbf{x}}^\mu - \mathbf{W}_F f(\mathbf{z}^\mu)$ , whereas the sensory neurons are updated according to:

$$\dot{\hat{\mathbf{x}}}^\mu \propto -\partial\mathcal{F}_\mu(\mathbf{z}^\mu, \hat{\mathbf{x}}^\mu)/\partial\hat{\mathbf{x}}^\mu = -\boldsymbol{\varepsilon}^{\mathbf{x},\mu} \quad (14)$$

and the converged  $\hat{\mathbf{x}}^\mu$  is the final retrieval. Similar to the single-layer case, if the converged  $\hat{\mathbf{z}}^\mu$  is used for the recall at the next step directly, the recall is offline; on the other hand, if we query the model with  $\mathbf{q} = \mathbf{x}^\mu$  i.e., the ground-truth and use the query to infer  $\hat{\mathbf{z}}^\mu$ , and then use  $\hat{\mathbf{z}}^\mu$  for the recall at the next step, the recall is online.

**Neural implementation** A neural implementation of the computations above is shown in Fig. 1B. The hidden layer follows the same mechanism in the single-layer tPC, with interneurons introducing a synaptic delay for temporal errors and short-term memory to perform the inferential dynamics (Eq. 11). The connection between the hidden layer and the sensory layer  $\mathbf{W}_F$  is modeled in the same way as in static PC models, which requires only Hebbian learning and local computations [18]. The memorization and recall pseudocode for the tPC models is provided in SM.

## 4 Results

### 4.1 Theoretical relationship to AHNs

We first develop a theoretical understanding of single-layer tPC by relating it to AHNs:

**Property 1** Assume, without loss of generality, a sequence of memories  $\mathbf{x}^\mu \in \mathbb{R}^N$  ( $\mu = 1, \dots, P + 1$ ) with zero mean. With an identity nonlinear function  $f(x) = x$  in Eq. 6, the retrieval of the single-layer tPC with query  $\mathbf{q}$ , defined as  $R^{tPC}(\mathbf{q})$ , can be written as:

$$R^{tPC}(\mathbf{q}) = \sum_{\mu=1}^P \mathbf{x}^{\mu+1} (\mathbf{M}\mathbf{x}^\mu)^\top \mathbf{M}\mathbf{q} \quad (15)$$

where  $\mathbf{M}$  is an empirical whitening matrix such that:

$$\langle \mathbf{M}\mathbf{x}^\mu (\mathbf{M}\mathbf{x}^\mu)^\top \rangle_\mu = \mathbf{I}_N \quad (16)$$

where  $\langle \cdot \rangle_\mu$  is the expectation operation over  $\mathbf{x}^\mu$ 's.

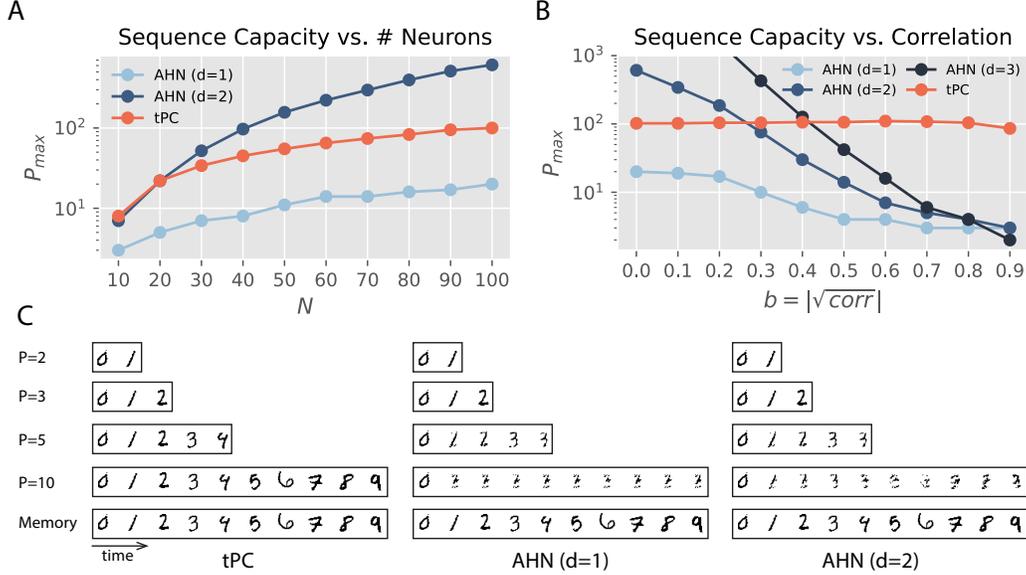


Figure 2: Comparison between single-layer tPC and AHNs. A: Capacity of models with uncorrelated binary patterns. B: Capacity of models with binary patterns with increasing feature correlations. C: Recall performance with sequences of binary MNIST digits.

Proof of this property is provided in the SM. Essentially, this property implies that our single-layer tPC, in its linear form, can be regarded as a special case of the UHN for sequential memories (Eq. 3), with a “whitened dot product” similarity function where the two vectors  $\mathbf{x}^\mu$  and  $\mathbf{q}$  are first normalized and decorrelated (to have identity covariance  $\mathbf{I}_N$ ) before the dot product. AHNs, on the other hand, calculate the dot product directly. Biologically, this property provides a possible mechanism of statistical whitening in the brain that, unlike earlier models of biological whitening with explicit objectives [30–32], performs this computation *implicitly* via the circuit shown in Fig. 1 that minimizes the temporal prediction errors.

## 4.2 Experimental comparison to AHNs

To understand how the whitening step affects the performance in sequential memory tasks, we compare our single-layer tPC with the family of AHNs experimentally. To ensure consistency to Property 1 above, we use an identity nonlinearity  $f(x) = x$  for all these experiments. Empirically, we found that using a *tanh* nonlinearity makes subtle differences irrelevant to our main discussion in this work, and we discuss it in SM.

**Polynomial AHNs** We first compare tPC with polynomial AHNs (Eq. 4) in sequences of uncorrelated binary patterns, where AHNs are known to work well [14, 15]. We plot their sequence capacity  $P_{max}$  against the number of value neurons of the models i.e., the pattern dimension  $N$ . Here,  $P_{max}$  is defined as the maximum length of a memorized sequence, for which the probability of incorrectly recalled bits is less than or equal to 0.01. Fig. 2A shows that the capacity of our single-layer tPC is greater than that of the original AHN ( $d = 1$ ) but smaller than that of a quadratic AHN ( $d = 2$ ). Notice that the single-layer tPC has an identity sep function like the original AHN. Therefore the whitening operation has indeed improved the performance of the dot product sim function. Inspired by the decorrelation effect of statistical whitening, we then generated binary patterns with  $N = 100$  correlated features, with a parameter  $b$  controlling the level of correlation ( $b = |\sqrt{\text{correlation}}|$ ). The approach that we followed to generate the correlated patterns is provided in SM. As shown in Fig. 2B, as the correlation increases, all AHNs up to  $d = 3$  suffer from a quick decrease of capacity  $P_{max}$ , whereas the capacity of single-layer tPC almost remains constant. This observation is consistent with the theoretical property that the whitening transformation essentially decorrelates features such that patterns with any level of correlation are regarded as uncorrelated in tPC recall (Eq. 15). This result also explains the comparison in Fig. 2A: although the patterns generated in this panel are theoretically uncorrelated, the small correlation introduced due to experimental randomness will result in the performance gap between AHN and single-layer tPC.

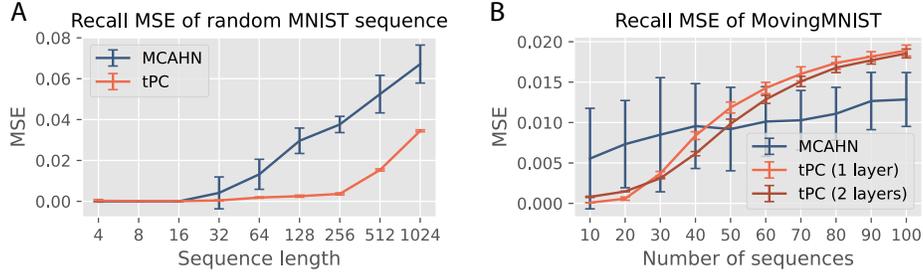


Figure 3: A: Recall MSE of MNIST sequences with increasing length; B: Recall MSE of MovingMNIST sequences of a fixed length 10 but with an increasing number of sequences. Error bars obtained with 5 seeds

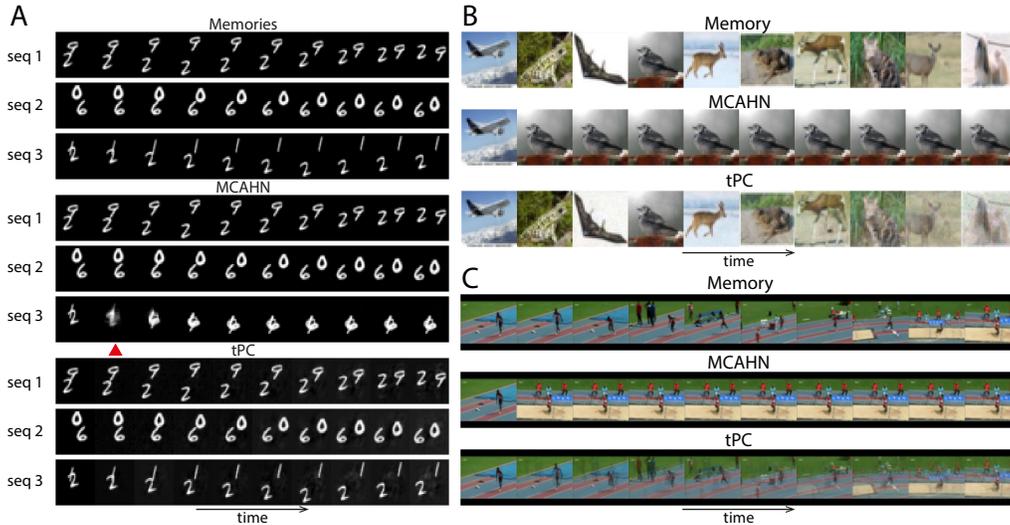


Figure 4: Visual results of offline memory recall with 3 datasets. A: MovingMNIST. B: CIFAR10. C: UCF101.

We then investigate the performance of these models with sequences of binarized MNIST images [43] in Fig. 2C. It can be seen that the AHNs with  $d = 1$  and  $d = 2$  quickly fail as the sequence length  $P$  reaches 3, whereas the single-layer tPC performs well. These results suggest that our tPC with a whitening step is superior to simple AHNs due to the inherently correlated structure of natural inputs such as handwritten digits. For all the experiments with binary patterns, we used the online recall mentioned above, and polynomial AHNs already fail in this simpler recall scenario.

**MCAHN** Due to the quick failure of AHNs with a polynomial sep function, we now compare our single-layer tPC with the MCAHN (Eq. 5). In static memory tasks, it is known that the softmax separation leads to exponentially high capacity, especially when  $\beta$  is high [7, 44]. In this work we use  $\beta = 5$  for all MCAHNs. We first compare the performances of our single-layer tPC model and an MCAHN on random sequences of MNIST digits with varying lengths. Here we trigger recalls with online queries. Fig. 3A shows that the performance of our single-layer tPC, measured as the mean squared error (MSE) between the recalled sequence and the ground truth, is better than that of the MCAHN, further demonstrating the usefulness of the implicit whitening in our model.

Despite the superior performance of our model in this task, we note that random sequences of MNIST images are not naturally sequential inputs i.e., there are no sequential dynamics underlying them. We thus examine the models on the MovingMNIST dataset [45]. Each video in this dataset consists of 20 frames of 2 MNIST digits moving inside a  $64 \times 64$  patch. Due to the fixed sequence length, for experiments with MovingMNIST we vary the total number of sequences to memorize and fix the sequence length to the first 10 frames of the videos. The performance of the models is shown in Fig. 3B. On average, the recall MSE of MCAHN has a slower increase than that of the single-layer tPC as the total number of sequences increases. However, the performance of MCAHN has very large variations across all sequence numbers. To probe into this observation, we visually examined 3

examples of the MovingMNIST movies recalled by MCAHN and our single-layer tPC in Fig. 4A, when the total number of sequences to memorize is 40. MCAHN produces very sharp recalls for the first 2 example sequences, but totally fails to recall the third one by converging to a different memory sequence after the red triangle in Fig. 4A. On the other hand, the recall by single-layer tPC is less sharp but stably produces the correct sequence. This phenomenon can be understood using the UHN framework [7]: in Eq. 5, when  $\beta$  is large, the softmax separation function used by MCAHN will assign a weight close to 1 to the memory whose preceding frame is most similar to  $\mathbf{q}$  (measure by dot product), and weights close to 0 to all other memories, which results in the sharp recall. In contrast, our single-layer tPC model uses an identity separation function that fails to suppress the incorrect memories, resulting in blurry recalls. Importantly, however, the failure of MCAHN in sequence 3 in Fig. 4A suggests that there are “strong attractors” in the memories with an undesirable advantage in dot product similarity which resulted in the large variance in the numerical results, and is addressed by the whitening step in single-layer tPC as it effectively normalized the patterns before dot product.

The importance of whitening in tPC is further demonstrated in our experiments with random sequences of CIFAR10 [46] images and movies from the UCF101 [47] dataset, shown in Figs. 4B and C. When recalling these colored sequences, MCAHN can easily converge to strong attractors preceded by frames with many large pixel values that lead to large dot products e.g., the third image in the CIFAR10 example with bright backgrounds, and the penultimate frame in the UCF101 example with a large proportion of sand, which give their subsequent frames large similarity scores. This problem is consistent with earlier findings with static memories [8], and is circumvented in our single-layer tPC model with the whitening matrix  $\mathbf{M}$  normalizing the pixel values across the sequence, yielding the correct and more stable memory recalls. However, they are less sharp due to the identity separation function. For all the experiments in Fig. 3B and Fig. 4, we used offline recall to make the tasks more challenging and more consistent with reality. Results with online recalls are shown in SM.

### 4.3 Comparison of single- and 2-layer tPC models with aliased inputs

In Fig. 3, we plotted the recall MSE of the 2-layer tPC model in MovingMNIST, which is similar to that of the single-layer tPC. We chose the size of the hidden layer  $\mathbf{z}$  in the 2-layer tPC so that the total number of parameters of these two models is approximately the same (exact sizes provided in SM). The close performance of these two models raises the question of whether and when the hidden layer and hierarchical processing of sequential inputs are necessary. Inspired by earlier neuroscience theories that the hippocampus develops neuron populations signaling the sensory inputs and the context of the inputs separately [3, 11], we hypothesize that the hidden neurons in our model represent *when* an element occurs in a memory sequence i.e., its context. We thus designed a sequence memory task with aliased, or repeating inputs at different time-steps [28, 48]. An example of such an aliased sequence can be seen in Fig. 5A, where the second and the fourth frames of a short MNIST sequence are exactly the same (“2”). Recalling such a sequence is inherently more challenging as the models have to determine, when queried with the “2” during recall (either online or offline), whether they are at the second or the fourth step to give the correct recall at the next step (“1” or “3”). As can be seen in Fig. 5A, both MCAHN (which can be regarded as a single-layer network [7]) and single-layer tPC fail in this task, recalling an average frame of “1” and “3” after the aliased steps, whereas the 2-layer tPC can recall the correct sequence. We then conducted a numerical investigation into this problem. We first plotted the (online) recall MSEs of the single- and 2-layer tPC models in random MNIST sequences (sampled from the training set) of varying lengths, which are shown as the solid lines in Fig. 5B. We then randomly replaced 20% (rounded up to the closest integer) of the elements in these sequences with a single digit from the test set of MNIST so that each sequence now has 20% repeating i.e., aliased elements, and plotted the recall MSEs as the dotted lines in Fig. 5B. The result suggests that sequences with aliased inputs affect the single-layer model much more than it affects the 2-layer one, producing significantly larger MSEs than recalls without aliased inputs. It is worth noting that aliased inputs are ubiquitous in natural sequential memories. An example of a naturally aliased sequential input is shown in Fig. 5C, where we trained the models to memorize a sequence from the “push-up” class from the UCF101 dataset. The circled time-steps 2 and 5 are approximately aliased, although step 2 is captured when the person is going up, whereas step 5 is captured when he is going down. The MCAHN and single-layer tPC again recalled average frames whereas the 2-layer tPC successfully disambiguated the aliased inputs and recalled the correct next frames.

In all the experiments above we tuned the hidden size of the 2-layer models so that they have roughly the same number of parameters as the single-layer models. This results in high-dimensional hidden

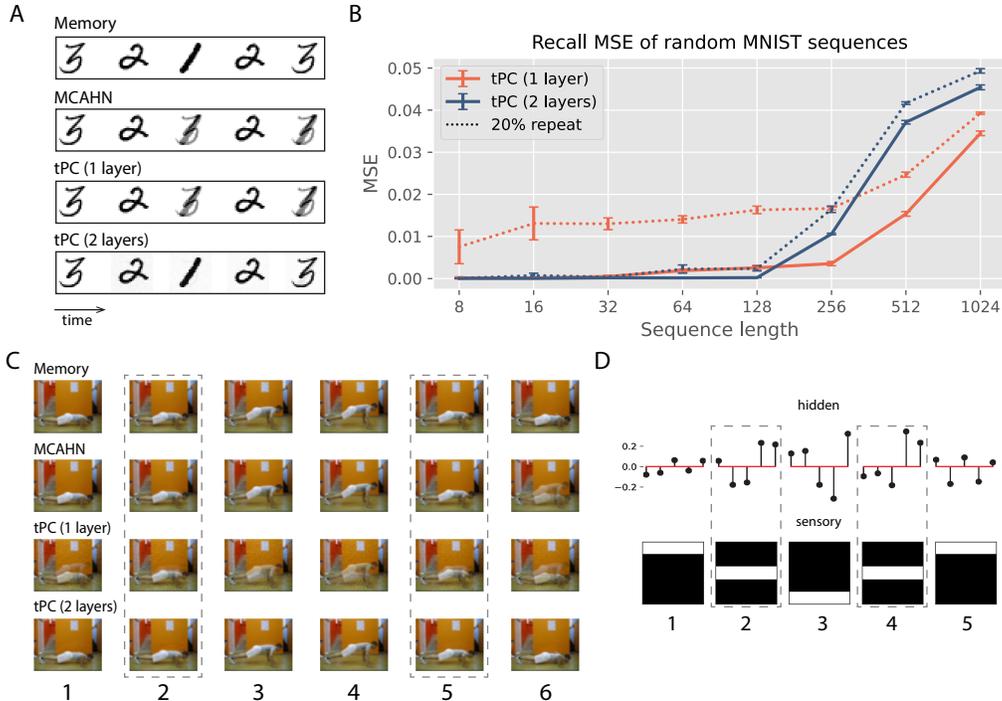


Figure 5: Model performance in sequences with aliased elements. A: A simple aliased example with MNIST. B: Numerical investigation into the impact of aliased or repeating elements on model performance. C: A natural aliased example from the UCF101 dataset. D: Different latent representations of aliased inputs by the 2-layer tPC. Error bars obtained with 5 seeds.

states that are hard to analyze directly. Thus, to understand the mechanism underlying the 2-layer tPC with aliased memories, we used a simpler synthetic sequential memory shown in Fig. 5D bottom, where a white bar moves first down and then up in a  $5 \times 5$  frame so that the steps 2 and 4 are aliased [28]. We then trained a 2-layer tPC with a hidden size 5 to memorize this sequence and queried it offline. The smaller hidden size allows us to plot, when the recall dynamics (Eq. 11) have converged, the exact hidden activities in Fig. 5D top, where each vertical line represents the activity of a hidden value neuron  $\hat{z}^{\mu}$ . As can be seen in the circled time-steps, the 2-layer model represents the aliased inputs differentially in its hidden states, which helps it recall the next frame correctly. This property is consistent with early observations in neuroscience that when memorizing sequences, the hippocampus develops a conjunction of neurons representing individual inputs, as well as neurons signaling the temporal context within which an individual appears [3, 11]. In our simple 2-layer model, the “sensory” layer represents individual inputs, whereas the hidden layer plays the role of indexing time and context.

## 5 Conclusion

Inspired by experimental and theoretical discoveries in neuroscience, in this work we have proposed a temporal predictive coding model for sequential memory tasks. We have shown that our tPC model can memorize and recall sequential inputs such as natural movies, and performs more stably than earlier models based on Asymmetric Hopfield Networks. We have also provided a theoretical understanding of the stable performance of the tPC model, showing that it is achieved by an additional statistical whitening operation that is missing in AHNs. Importantly, this whitening step is achieved implicitly by a plausible neural circuit performing local error minimization. Moreover, the architectural flexibility of PC models has allowed us to examine the necessity of hierarchical processing of sequential memories via our 2-layer tPC, which has exhibited properties consistent with biological observations. Overall, our model has not only provided a possible neural mechanism underlying sequential memory in the brain but also suggested a close relationship between PC and HN, two influential computational models of biological memories. Future directions include quantitative comparisons to experimental data, as well as systematic investigations into tPC with more than 2 layers.

## References

- [1] Endel Tulving. Episodic and semantic memory. 1972.
- [2] Howard Eichenbaum. Memory on time. *Trends in cognitive sciences*, 17(2):81–88, 2013.
- [3] Howard Eichenbaum. Time cells in the hippocampus: a new dimension for mapping memories. *Nature Reviews Neuroscience*, 15(11):732–744, 2014.
- [4] John J Hopfield. Neural networks and physical systems with emergent collective computational abilities. *Proceedings of the national academy of sciences*, 79(8):2554–2558, 1982.
- [5] Dmitry Krotov and John J Hopfield. Dense associative memory for pattern recognition. *Advances in neural information processing systems*, 29, 2016.
- [6] Hubert Ramsauer, Bernhard Schäfl, Johannes Lehner, Philipp Seidl, Michael Widrich, Thomas Adler, Lukas Gruber, Markus Holzleitner, Milena Pavlović, Geir Kjetil Sandve, et al. Hopfield networks is all you need. *arXiv preprint arXiv:2008.02217*, 2020.
- [7] Beren Millidge, Tommaso Salvatori, Yuhang Song, Thomas Lukasiewicz, and Rafal Bogacz. Universal hopfield networks: A general framework for single-shot associative memory models. In *International Conference on Machine Learning*, pages 15561–15583. PMLR, 2022.
- [8] Tommaso Salvatori, Yuhang Song, Yujian Hong, Lei Sha, Simon Frieder, Zhenghua Xu, Rafal Bogacz, and Thomas Lukasiewicz. Associative memories via predictive coding. *Advances in Neural Information Processing Systems*, 34, 2021.
- [9] Georgios Iatropoulos, Johanni Brea, and Wulfram Gerstner. Kernel memory networks: A unifying framework for memory modeling. *arXiv preprint arXiv:2208.09416*, 2022.
- [10] Mufeng Tang, Tommaso Salvatori, Beren Millidge, Yuhang Song, Thomas Lukasiewicz, and Rafal Bogacz. Recurrent predictive coding models for associative memory employing covariance learning. *PLOS Computational Biology*, 19(4):e1010719, 2023.
- [11] Gene V Wallenstein, Michael E Hasselmo, and Howard Eichenbaum. The hippocampus as an associator of discontinuous events. *Trends in neurosciences*, 21(8):317–323, 1998.
- [12] Edmund T Rolls. A computational theory of episodic memory formation in the hippocampus. *Behavioural brain research*, 215(2):180–196, 2010.
- [13] Jeff Hawkins, Dileep George, and Jamie Niemasik. Sequence memory for prediction, inference and behaviour. *Philosophical Transactions of the Royal Society B: Biological Sciences*, 364(1521):1203–1209, 2009.
- [14] Haim Sompolinsky and Ido Kanter. Temporal association in asymmetric neural networks. *Physical review letters*, 57(22):2861, 1986.
- [15] Hamza Chaudhry, Jacob Zavatore-Veth, Dmitry Krotov, and Cengiz Pehlevan. Modern asymmetric hopfield networks have large sequence capacity memory. In *Coysne abstract*, 2023.
- [16] Rajesh PN Rao and Dana H Ballard. Predictive coding in the visual cortex: a functional interpretation of some extra-classical receptive-field effects. *Nature neuroscience*, 2(1):79–87, 1999.
- [17] Karl Friston. Learning and inference in the brain. *Neural Networks*, 16(9):1325–1352, 2003.
- [18] Rafal Bogacz. A tutorial on the free-energy framework for modelling perception and learning. *Journal of mathematical psychology*, 76:198–211, 2017.
- [19] Kevin S Walsh, David P McGovern, Andy Clark, and Redmond G O’Connell. Evaluating the neurophysiological evidence for predictive processing as a model of perception. *Annals of the new York Academy of Sciences*, 1464(1):242–268, 2020.
- [20] James CR Whittington and Rafal Bogacz. An approximation of the error backpropagation algorithm in a predictive coding network with local hebbian synaptic plasticity. *Neural computation*, 29(5):1229–1262, 2017.

- [21] Yuhang Song, Thomas Lukasiewicz, Zhenghua Xu, and Rafal Bogacz. Can the brain do backpropagation?—exact implementation of backpropagation in predictive coding networks. *Advances in neural information processing systems*, 33:22566–22579, 2020.
- [22] Helen C Barron, Ryszard Auksztulewicz, and Karl Friston. Prediction and memory: A predictive coding account. *Progress in neurobiology*, 192:101821, 2020.
- [23] John Lisman and A David Redish. Prediction, sequences and the hippocampus. *Philosophical Transactions of the Royal Society B: Biological Sciences*, 364(1521):1193–1201, 2009.
- [24] Jinsoo Yoo and Frank Wood. Bayespcn: A continually learnable predictive coding associative memory. *Advances in Neural Information Processing Systems*, 35:29903–29914, 2022.
- [25] Tommaso Salvatori, Luca Pinchetti, Beren Millidge, Yuhang Song, Tianyi Bao, Rafal Bogacz, and Thomas Lukasiewicz. Learning on arbitrary graph topologies via predictive coding. *Advances in neural information processing systems*, 35:38232–38244, 2022.
- [26] Rajesh PN Rao. Correlates of attention in a model of dynamic visual recognition. *Advances in neural information processing systems*, 10, 1997.
- [27] Rajesh PN Rao and Dana H Ballard. Dynamic model of visual recognition predicts neural response properties in the visual cortex. *Neural computation*, 9(4):721–763, 1997.
- [28] Rajesh PN Rao. An optimal estimation approach to visual perception and learning. *Vision research*, 39(11):1963–1989, 1999.
- [29] Alexander Ororbia, Ankur Mali, C Lee Giles, and Daniel Kifer. Continual learning of recurrent neural networks by locally aligning distributed representations. *IEEE Transactions on Neural Networks and Learning Systems*, 31(10):4267–4278, 2020.
- [30] Lyndon R Duong, David Lipshutz, David J Heeger, Dmitri B Chklovskii, and Eero P Simoncelli. Statistical whitening of neural populations with gain-modulating interneurons. *arXiv preprint arXiv:2301.11955*, 2023.
- [31] Cengiz Pehlevan and Dmitri B Chklovskii. Neuroscience-inspired online unsupervised learning algorithms: Artificial neural networks. *IEEE Signal Processing Magazine*, 36(6):88–96, 2019.
- [32] Siavash Golkar, Tiberiu Tesileanu, Yanis Bahroun, Anirvan Sengupta, and Dmitri Chklovskii. Constrained predictive coding as a biologically plausible model of the cortical hierarchy. *Advances in Neural Information Processing Systems*, 35:14155–14169, 2022.
- [33] Rajesh P.N. Rao and Linxing Preston Jiang. Predictive coding theories of cortical function, 11 2022. URL <https://oxfordre.com/neuroscience/view/10.1093/acrefore/9780190264086.001.0001/acrefore-9780190264086-e-328>.
- [34] Rudolph Emil Kalman. A new approach to linear filtering and prediction problems. 1960.
- [35] Beren Millidge, Mufeng Tang, Mahyar Osanlouy, and Rafal Bogacz. Predictive coding networks for temporal prediction. *bioRxiv*, 2023. doi: 10.1101/2023.05.15.540906. URL <https://www.biorxiv.org/content/early/2023/05/16/2023.05.15.540906>.
- [36] Yusi Chen, Huanqiu Zhang, and Terrence J Sejnowski. Hippocampus as a generative circuit for predictive coding of future sequences. *bioRxiv*, pages 2022–05, 2022.
- [37] Linxing Preston Jiang and Rajesh PN Rao. Dynamic predictive coding: A new model of hierarchical sequence learning and prediction in the cortex. *bioRxiv*, pages 2022–06, 2022.
- [38] Aaron van den Oord, Yazhe Li, and Oriol Vinyals. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*, 2018.
- [39] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.

- [40] H Freyja Ólafsdóttir, Daniel Bush, and Caswell Barry. The role of hippocampal replay in memory and planning. *Current Biology*, 28(1):R37–R50, 2018.
- [41] Omri Barak and Misha Tsodyks. Working models of working memory. *Current opinion in neurobiology*, 25:20–24, 2014.
- [42] Sam Roweis and Zoubin Ghahramani. A unifying review of linear gaussian models. *Neural computation*, 11(2):305–345, 1999.
- [43] Yann LeCun, Corinna Cortes, and Christopher J Burges. Mnist handwritten digit database. 2010. URL <http://yann.lecun.com/exdb/mnist>, 7(23):6, 2010.
- [44] Mete Demircigil, Judith Heusel, Matthias Löwe, Sven Uppgang, and Franck Vermet. On a model of associative memory with huge storage capacity. *Journal of Statistical Physics*, 168:288–299, 2017.
- [45] Nitish Srivastava, Elman Mansimov, and Ruslan Salakhudinov. Unsupervised learning of video representations using lstms. In *International conference on machine learning*, pages 843–852. PMLR, 2015.
- [46] Alex Krizhevsky, Vinod Nair, and Geoffrey Hinton. The CIFAR-10 dataset. *online: http://www.cs.toronto.edu/kriz/cifar.html*, 55(5), 2014.
- [47] Khurram Soomro, Amir Roshan Zamir, and Mubarak Shah. Ucf101: A dataset of 101 human actions classes from videos in the wild. *arXiv preprint arXiv:1212.0402*, 2012.
- [48] Steven D Whitehead and Dana H Ballard. Learning to perceive and act by trial and error. *Machine Learning*, 7:45–83, 1991.
- [49] Agnan Kessy, Alex Lewin, and Korbinian Strimmer. Optimal whitening and decorrelation. *The American Statistician*, 72(4):309–314, 2018.
- [50] Rafal Bogacz and Malcolm W Brown. Comparison of computational models of familiarity discrimination in the perirhinal cortex. *Hippocampus*, 13(4):494–524, 2003.

## 6 Supplementary Material

### 6.1 Algorithms

In Algorithm 1 we present the memorizing and recalling procedures of the single-layer tPC.

---

**Algorithm 1** Memorizing and recalling with single-layer tPC

---

<pre> 1: ▷ <i>Training/memorization</i> 2: <b>while</b> <math>\mathbf{W}</math> not converged <b>do</b> 3:   <b>for</b> <math>\mu = 1, \dots, P</math> <b>do</b> 4:     Input: <math>\mathbf{x}^\mu, \mathbf{x}^{\mu-1}</math> 5:     Update <math>\mathbf{W}</math> (Eqs. 7) 6:   <b>end for</b> 7: <b>end while</b> 8:</pre>	<pre> 9: ▷ <i>Cued recall</i> 10: <b>for</b> <math>\mu = 1, \dots, P</math> <b>do</b> 11:   Input: <math>\mathbf{x}^{\mu-1}</math> (online) or <math>\hat{\mathbf{x}}^{\mu-1}</math> (offline) 12:   <b>while</b> <math>\hat{\mathbf{x}}^\mu</math> not converged <b>do</b> 13:     Infer <math>\hat{\mathbf{x}}^\mu</math> (Eq. 9) 14:   <b>end while</b> 15:   <math>R^{tPC}(\mathbf{q}) \leftarrow \hat{\mathbf{x}}^\mu</math> 16: <b>end for</b></pre>
--	--

---

In Algorithm 2 we present the memorizing and recalling procedures of the 2-layer tPC.

---

**Algorithm 2** Memorizing and recalling with 2-layer tPC

---

<pre> 1: ▷ <i>Training/memorization</i> 2: <b>while</b> <math>\mathbf{W}_H, \mathbf{W}_F</math> not converged <b>do</b> 3:   randomly initialize <math>\hat{\mathbf{z}}^0</math> 4:   <b>for</b> <math>\mu = 1, \dots, P</math> <b>do</b> 5:     Input: <math>\mathbf{x}^\mu, \hat{\mathbf{z}}^{\mu-1}</math> 6:     <b>while</b> <math>\mathbf{z}^\mu</math> not converged <b>do</b> 7:       Infer <math>\mathbf{z}^\mu</math> (Eq. 11) 8:     <b>end while</b> 9:     Update <math>\mathbf{W}_H, \mathbf{W}_F</math> (Eqs. 12) 10:    <math>\hat{\mathbf{z}}^\mu \leftarrow \mathbf{z}^\mu</math> 11:   <b>end for</b></pre>	<pre> 12: <b>end while</b> 13: ▷ <i>Cued recall</i> 14: randomly initialize <math>\hat{\mathbf{z}}^0</math> 15: <b>for</b> <math>\mu = 1, \dots, P</math> <b>do</b> 16:   Input: <math>\hat{\mathbf{z}}^{\mu-1}</math> 17:   <b>while</b> <math>\mathbf{z}^\mu</math> and <math>\hat{\mathbf{x}}^\mu</math> not converged <b>do</b> 18:     Infer <math>\mathbf{z}^\mu, \hat{\mathbf{x}}^\mu</math> (Eqs. 11,14) 19:   <b>end while</b> 20:   <math>\hat{\mathbf{z}}^\mu \leftarrow \mathbf{z}^\mu</math> 21:   <math>R^{tPC}(\mathbf{q}) \leftarrow \hat{\mathbf{x}}^\mu</math> 22: <b>end for</b></pre>
---	---

---

It is worth noting that, although in both algorithms we used iterative inference (line 14-16 in Algorithm 1 and line 17-19 in Algorithm 2), these inferential dynamics can be replaced by forward passes in simulation. For the single-layer model the retrieval  $R^{tPC}(\mathbf{q})$  can be directly obtained by  $R^{tPC}(\mathbf{q}) = \mathbf{W}f(\mathbf{q})$  with the learned  $\mathbf{W}$ , while for the 2-layer model the retrieval  $\mathbf{x}^{\mu-1}$  can be obtained by first forward passing the latent  $\hat{\mathbf{z}}^\mu = \mathbf{W}_H f(\hat{\mathbf{z}}^{\mu-1})$  and then set the retrieval as  $R^{tPC}(\mathbf{q}) = \mathbf{W}_F f(\hat{\mathbf{z}}^\mu)$ . Effectively, setting the retrieval directly by forward passes will result in the same retrieval as performing the inferential iterations as they are the fixed points of the inferential dynamics. However, obtaining the retrievals via iterative methods allows us to implement the computations in the plausible neural circuits in Fig. 1 whereas forward passes cannot.

### 6.2 Proof of Property 1

Here we present the proof for Property 1 in the main text, that the single-layer tPC can be viewed as a “whitened” version of the AHN. Without loss of generality, assume a sequence of zero-mean, real-valued patterns  $\mathbf{x}^\mu, \mu = 1, \dots, P + 1$  is given to the model to memorize. The step-wise objective with an identity non-linearity  $f(\cdot)$  for single-layer tPC is:

$$\mathcal{F}_\mu(\mathbf{W}) = \|\mathbf{x}^\mu - \mathbf{W}\mathbf{x}^{\mu-1}\|_2^2 \quad (17)$$

The weight  $\mathbf{W}$  is then updated at each time-step once, and the whole sequence is presented for multiple iterations until  $\mathbf{W}$  converges. We now consider the case where we presented the sequence at once i.e., the model now minimizes the following objective at each learning iteration:

$$\mathcal{F} = \sum_{\mu=1}^P \|\mathbf{x}^{\mu+1} - \mathbf{W}\mathbf{x}^\mu\|_2^2 \quad (18)$$

which can be viewed as a ‘‘batched’’ version of Eq. 17. Since the objective is now convex (with identity  $f(\cdot)$ ), the fixed point obtained by these two objectives will be the same. The gradient descent update of  $\mathbf{W}$  on  $\mathcal{F}$  is then:

$$\Delta \mathbf{W} = -\frac{\partial \mathcal{F}}{\partial \mathbf{W}} = \sum_{\mu=1}^P \mathbf{x}^{\mu+1}(\mathbf{x}^\mu)^\top - \mathbf{W} \sum_{\mu=1}^P \mathbf{x}^\mu(\mathbf{x}^\mu)^\top \quad (19)$$

By setting  $\Delta \mathbf{W}$  to 0, we could obtain the optimal  $\mathbf{W}$ , which we call  $\mathbf{W}^{tPC}$ :

$$\mathbf{W}^{tPC} = \left( \sum_{\mu=1}^P \mathbf{x}^{\mu+1}(\mathbf{x}^\mu)^\top \right) \left( \sum_{\mu=1}^P \mathbf{x}^\mu(\mathbf{x}^\mu)^\top \right)^{-1} = \sum_{\mu=1}^P \mathbf{x}^{\mu+1}(\mathbf{x}^\mu)^\top (\mathbf{X}^\top \mathbf{X})^{-1} \quad (20)$$

where we define  $\mathbf{X} = [\mathbf{x}^1, \dots, \mathbf{x}^P]^\top$ , the  $P \times N$  data matrix. Recall that when presented with a query  $\mathbf{q}$ , the single-layer tPC update its value nodes to minimize:

$$\mathcal{F}_\mu(\hat{\mathbf{x}}^\mu) = \|\hat{\mathbf{x}}^\mu - \mathbf{W}^{tPC} \mathbf{q}\|_2^2 \quad (21)$$

which will converge to  $R^{tPC}(\mathbf{q}) = \mathbf{W}^{tPC} \mathbf{q}$  due to convexity. We can now substitute  $\mathbf{W}^{tPC}$  with the expression from Eq. 20 to obtain the retrieval:

$$R^{tPC}(\mathbf{q}) = \mathbf{W}^{tPC} \mathbf{q} = \sum_{\mu=1}^P \mathbf{x}^{\mu+1}(\mathbf{x}^\mu)^\top (\mathbf{X}^\top \mathbf{X})^{-1} \mathbf{q} \quad (22)$$

It can be immediately seen that the retrieval function of tPC is a special case of the UHN framework, where the similarity function is defined as  $\text{sim}(\mathbf{x}^\mu, \mathbf{q}) = (\mathbf{x}^\mu)^\top (\mathbf{X}^\top \mathbf{X})^{-1} \mathbf{q}$  and the separation function is identity. Notice that since we assumed a zero-mean sequence (sequences with non-zero mean can be accounted for with a bias term in the objective function Eq. 18), the term  $\mathbf{X}^\top \mathbf{X}$  is exactly the covariance matrix of the sequence. Defining it as  $\Sigma$ , the retrieval can be written as:

$$R^{tPC}(\mathbf{q}) = \mathbf{W}^{tPC} \mathbf{q} = \sum_{\mu=1}^P \mathbf{x}^{\mu+1}(\mathbf{x}^\mu)^\top \Sigma^{-1} \mathbf{q} \quad (23)$$

Assume a positive definite covariance  $\Sigma$ , it is possible to decompose  $\Sigma^{-1}$  as follows:

$$\Sigma^{-1} = \mathbf{M}^\top \mathbf{M} \quad (24)$$

The matrix  $\mathbf{M}$  is called the whitening matrix, which does not hold a unique value e.g.,  $\mathbf{M} = \Sigma^{-\frac{1}{2}}$  or  $\mathbf{M} = \mathbf{L}^\top$  where  $\mathbf{L}$  is the Cholesky decomposition of  $\Sigma^{-1}$  [49]. Here, we are agnostic about its exact value. When applied to the data sequence, it whitens the data such that (i.e., Eq.16 in the main text):

$$\langle \mathbf{M} \mathbf{x}^\mu (\mathbf{M} \mathbf{x}^\mu)^\top \rangle_\mu = \mathbf{I}_N \quad (25)$$

Therefore, the retrieval of our single-layer tPC with an identity  $f(\cdot)$  can be written as:

$$R^{tPC}(\mathbf{q}) = \sum_{\mu=1}^P \mathbf{x}^{\mu+1} (\mathbf{M} \mathbf{x}^\mu)^\top \mathbf{M} \mathbf{q} \quad (26)$$

by decomposing  $\Sigma^{-1}$  in Eq. 23 into  $\mathbf{M}^\top \mathbf{M}$ , which is Eq.15 in the main text and concludes the proof.

### 6.3 Generation of binary patterns

For the experimental results in Fig. 2A and B, the correlated binary patterns are generated following the approach mentioned in [50]. For a particular pattern dimension  $N$ , a template  $\mathbf{x}^{temp} \in \{-1, 1\}^N$  is first generated. Then, for each of the  $\mu = 1, \dots, P$  patterns, the  $i$ th entry of  $\mathbf{x}^\mu$  is equal to the  $i$ th entry of  $\mathbf{x}^{temp}$  with probability  $0.5 + 0.5b$  where  $b$  is the parameter controlling bias. We also invert the sign of each pattern by chance to keep the level of activity constant for each neuron. This whole process is then repeated for multiple trials to average out randomness. The capacity  $P_{max}$  is calculated as the maximum  $P$  such that the percentage of erroneous entries across these trials is below 0.01. It can be shown that the correlation between two features of the generated patterns  $r(\mathbf{x}_i^\mu, \mathbf{x}_j^\mu)$  is  $-b^2$  or  $b^2$ , by using the identity  $r(\mathbf{x}_i^\mu, \mathbf{x}_j^\mu) = \langle \mathbf{x}_i^\mu \mathbf{x}_j^\mu \rangle_\mu - \langle \mathbf{x}_i^\mu \rangle_\mu \langle \mathbf{x}_j^\mu \rangle_\mu$ .

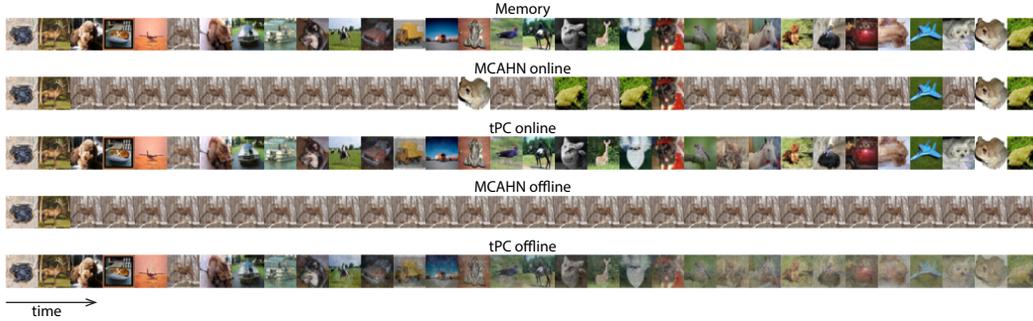


Figure 6: Visual results with CIFAR10 sequences.

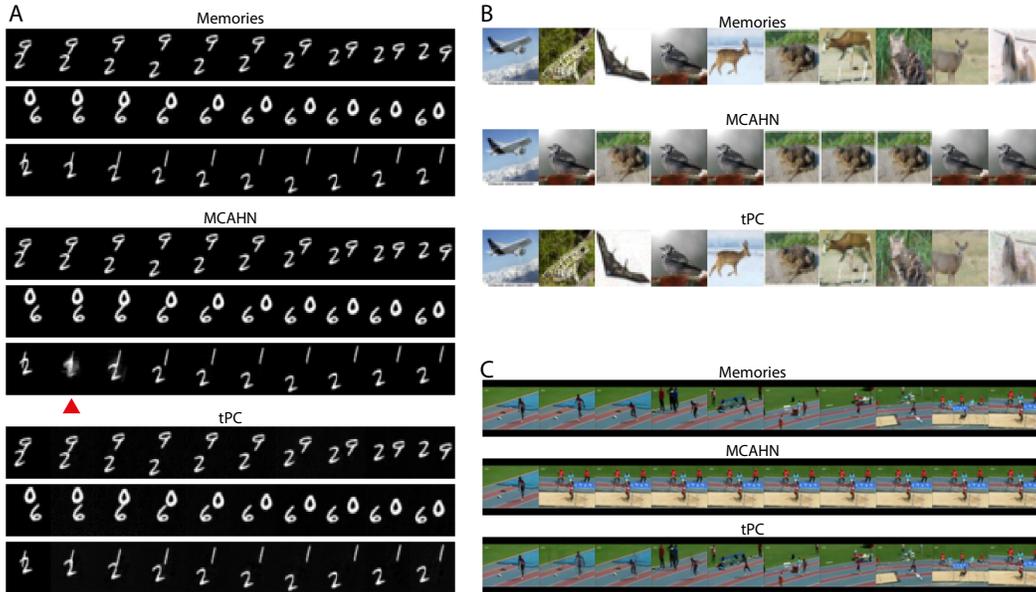


Figure 7: Online recalls with A: MovingMNIST; B: CIFAR10; C: UCF101.

#### 6.4 Additional results with CIFAR10 and MovingMNIST

In Fig. 6 we present additional visual results when MCAHN and single-layer tPC are trained to memorize a random CIFAR10 sequence of 32 images and are queried both online and offline during recall. It can be seen that MCAHN, like what we have shown in the main text, recalls memories preceded with images with large pixel values (images are presented to the models as  $32 \times 32 \times 3 = 3072$ -dimensional vectors where 3 represents the RGB channels) in both online and offline recall regimes, whereas tPC does not suffer from this problem because of the whitening procedure. However, it can be seen that the recall by tPC will gradually become more blurry and noisier when queried offline because the recall errors will accumulate temporally.

These observations are consistent with our numerical results shown in Fig. 8. In Fig. 8A we show the online recall MSE of CIFAR10 sequences by single-layer tPC (with linear  $f(\cdot)$ ) and MCAHN. MCAHN has a much larger MSE than that of the tPC because of the entirely wrong recalls. In offline recalls in Fig. 8B however, tPC will have exploding MSE as soon as  $P$  reaches 64 because of the accumulating recall errors. It is worth mentioning that for these experiments, we used a  $\tanh$  nonlinearity, as the recall error will accumulate to infinity with an identity  $f(\cdot)$ . This is the only case where identity and  $\tanh$  are different in our experiments.

In Fig. 7 we also present the online recall results of the models in MovingMNIST, CIFAR10 and UCF101. The results with CIFAR10 are consistent with the discussions above, and the results

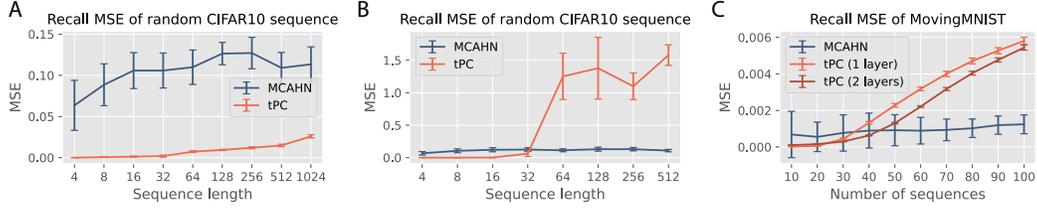


Figure 8: Numerical results with CIFAR10 and MovingMNIST. A: *Online* recall MSE of random CIFAR10 sequences; B: *Offline* recall MSE of random CIFAR10 sequences, with a *tanh* nonlinearity; C: *Offline* recall MSE of movingMNIST dataset, with a *tanh* nonlinearity.

with UCF101 is clearer with online queries than those with offline queries. Moreover, although in MovingMNIST MCAHN still suffers from the wrong attractor problem (red triangle in Fig. 7A), the online query can prevent it from staying in the wrong attractor. This is consistent with our numerical observation in Fig. 8C, where the performance of MCAHN in online recall of MovingMNIST is better than that of the tPC models.

## 6.5 Implementation details of tPC

The following table provides the hyperparameters used in our experiments and their corresponding figures. Note that for the 2-layer tPC, we used fixed inference step size  $1e-2$  and inference steps 100 for Eqs.11 and 14 in the main text, as we did not find any significant impact of these variables on the results. All computations were performed on a single Tesla V100 GPU.

Data	Figures	Model	Input size	Latent size	Learning rate	Learning epochs
Binary	2A&B,5A&B	1-layer	varying	N/A	$5e-1$	800
MNIST	2C,3A	1-layer	784	N/A	$1e-4$	800
MNIST	5A&B	2-layer	784	480	$1e-4$	800
MovingMNIST	3B,4A	1-layer	1024	N/A	$2e-4$	800
MovingMNIST	3B	2-layer	1024	630	$2e-4$	800
CIFAR10	4B	1-layer	3072	N/A	$2e-5$	1000
UCF101	4C,5C	1-layer	12288	N/A	$1e-5$	1000
UCF101	4C,5C	2-layer	12288	7600	$1e-5$	1000

Table 1: Hyperparameters when training tPC models