
MACHINE LEARNING APPROACH FOR CANCER ENTITIES ASSOCIATION AND CLASSIFICATION

G.Jeyakodi

Centre for Bioinformatics
Pondicherry University
Puducherry, India 605014
rjeyakodi02@gmail.com

Arkadeep Pal

Centre for Bioinformatics
Pondicherry University
Puducherry, India 605014
palarkadeep97@gmail.com

Debapratim Gupta

Department of Computer Science
Pondicherry University
Puducherry, India 605014
debexam1234@gmail.com

K.Sarukeswari

Department of Computer Science
Pondicherry University
Puducherry, India 605014
sarukeswari@gmail.com

V.Amouda

Centre for Bioinformatics
Pondicherry University
Puducherry, India 605014
amouda@yahoo.com

June 27, 2023

ABSTRACT

According to the World Health Organization (WHO), cancer is the second leading cause of death globally. Scientific research on different types of cancers grows at an ever-increasing rate, publishing large volumes of research articles every year. The insight information and the knowledge of the drug, diagnostics, risk, symptoms, treatments, etc., related to genes are significant factors that help explore and advance the cancer research progression. Manual screening of such a large volume of articles is very laborious and time-consuming to formulate any hypothesis. The study uses the two most non-trivial NLP, Natural Language Processing functions, Entity Recognition, and text classification to discover knowledge from biomedical literature. Named Entity Recognition (NER) recognizes and extracts the predefined entities related to cancer from unstructured text with the support of a user-friendly interface and built-in dictionaries. Text classification helps to explore the insights into the text and simplifies data categorization, query- ing, and article screening. Machine learning classifiers are also used to build the classification model and Structured Query Languages (SQL) is used to identify the hidden relations that may lead to significant predictions.

Keywords Cancer · Machine Learning · Literature Data Mining · NLP · NER · Text Classification

1 Introduction

As numerous biomedical research articles are published regularly, adding knowledge to the accumulated literature on different diseases, such as cancer, neurodegenerative diseases, and hereditary diseases. One of the leading causes of global mortality disease is cancer due to various reasons such as lifestyle habits, radiation exposure, viral infections, and tobacco consumption [1] [2]. These reasons ultimately make some genetic change in a cell of tissue which causes it to become cancerous. Due to the top priority given to cancer research compared to other human diseases, enormous articles were published [3] [4] in a short period [5]. It can serve as a relevant source for cancer knowledge discovery in different fields of diagnostics, application of drugs, genetic association, prevention, and treatment. An automate downloading of articles and extraction of related entities will advance the progression of the research faster. Natural Language Processing (NLP) helps in communicating computers with humans in their language and converts the unstructured data into structured data to improve the accuracy of text mining. NLP function guides to understanding the human query language to discover knowledge from literature without much manual effort [6]. Named Entity Recognition (NER) and text classification is used mainly for text mining [7]. Text mining identifies the meaningful patterns and new insights by

transforming the unstructured text into a structure. NER identifies the key features: genes, and tissue names crucial to draw associations and inferences on a dataset under study. The extracted named entities would not carry much meaning without a known label for a text [8]. NER is one of the fundamental functions that require text classification to uncover many relations that may be novel and have great importance in biological research [9]. Text classification is the task of assigning predefined categories to text documents [10]. The main advantage of text classification is the automatic prediction of a label for a text, a backbone of text mining. The first step of the mining collects text articles as there are no pre-made datasets available for dataset preparation. PubMed provides various E-utilities for biomedical text collection, one such software, Entrez Direct allows users to download articles directly using different commands in different formats available at National Center for Biotechnology Information - NCBI (nih.gov). As the software is UNIX-based, it requires extensive knowledge to use various commands to retrieve the articles and does not afford full-text articles with PubMed ID. The existing tools do not provide the facility of extracting user-preferred entities from text documents. It is advantageous to have user-level freedom to draw inter-entity associations such as gene-drug or disease-gene associations [11]. It allows the user to search for the associations related to a more specific entity or entity type. Hence NLP and text mining are primary steps in extending research in any disease, more mainstreaming cancer research. It also suggested an efficient, simple, comparatively small text mining approach in formulating novel hypotheses from the associations mined from literature. To overcome the above-mentioned drawbacks and due to the necessity of an automated tool, the current study focuses on two tasks: 1. User interface development to extract the cancer entities from the full-text articles. 2. Classification model developed to classify different types of cancers using machine learning algorithms. Many types of cancer entities like genes, proteins, drugs, and diagnostic methods are extracted using NER, such types of named entities are equally important to other studies like point mutations, chromosomal aberrations, symptoms, carcinogens, etc. A flexible dictionary-based approach to extracting cancer entities [12] to mine by preparing a dictionary of cancer entities extracted from a text corpus. The named entity extraction by dictionary-based approach does not need the knowledge of complex NLP architecture and has good accuracy [13]. There have been many advances that make the task of text mining easy and more accurate. The prominent advances are the development of transformers [14] using modern text mining architecture such as BERT, a Bidirectional Encoder Representations from Transformers [15]. The text mining platform, WEKA (Waikato Environment for Knowledge Analysis) is helpful for data preparation, classification, regression, clustering, association rules mining, and visualization [16]. The toolkit SparkText [17] allows text mining and text classification on big data architecture [18] for biomedical articles. The extracted entities play a significant role in finding the hidden patterns, the relationship between them helps in disease diagnosis, drug development, etc.[12] Associations describe a link between multiple items in a dataset that may be observable in the hidden patterns or relationships that occur together [19]. Predicting associations by filtering the observed patterns using a complex query and the hidden associations using data mining algorithms such as Apriori or Eclat [20]. These are beneficial in extending and understanding cancer biology and discovering potential relationships among them. It is not only restricted to cancer studies but also benefits all fields of biomedical studies. This research developed an efficient pipeline using a machine learning algorithm to identify the relationship among the named entities to predict the hidden patterns and a cancer classification model.

2 Materials and Methods

Figure 1 depicts the detailed workflow of the study by considering abstracts and full-text articles for an automatic Named Entity Extraction (NER), and abstracts alone for cancer classification for better accuracy [17].

Data Collection

Download the required articles for the mining of entities and classification. An automated tool, Scholar.ly at <https://github.com/Jeyakodi-Hub/Scholarly> (a free open source in GitHub developed by the same research group) is used to download the articles for oral cancer, cervical cancer, lung cancer, gastric cancer, esophageal cancer, colorectal cancer, skin cancer, prostate cancer, breast cancer, and pancreatic cancer. Total of 700 articles, out of which 70 articles for each cancer type considered for NER to extract the entities. For the next task, text classification 46,000 abstracts were downloaded using the query listed in Table 1 via Entrez Direct E-utility software from the PubMed database.

Named Entity Extraction

Named Entity Extraction (NER), Recognizes and extracts the genes, drugs, and other related entities from the text corpus. A user-friendly interface developed in python which browses articles and dictionaries for entity mapping. The dictionaries prepared for each entity: diagnostics, drugs, genes, site, risk factors, and symptoms from the portal at Cancer.Net [21], NIH National Cancer Institute (<https://www.cancer.gov/about-cancer/treatment/drugs>), and Cancer

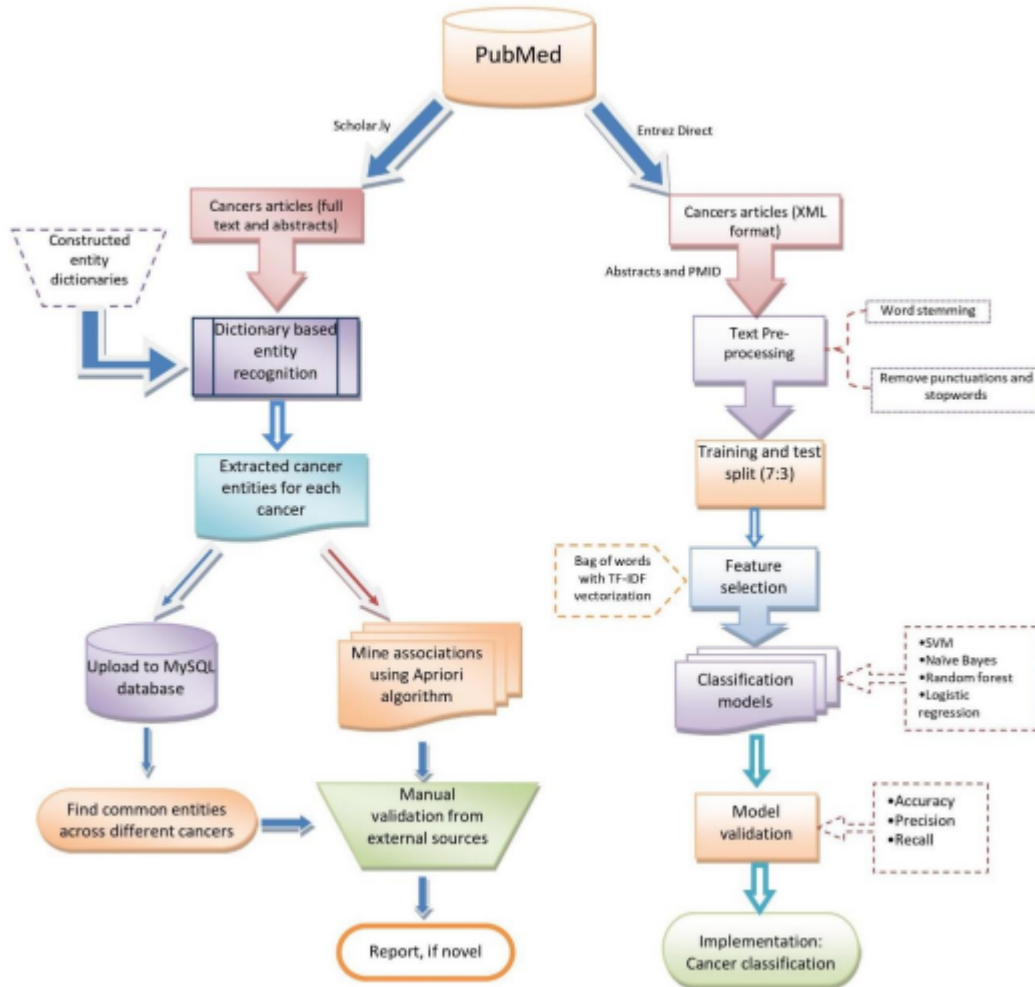


Figure 1: The basic workflow of the methodology

Genetics Web [22]. Saving the extracted entities in an excel sheet and uploaded to MySQL database for further analysis. Mined associations from the extracted entity dataset using the Apriori algorithm [23] implemented in python language.

Searching for Patterns

The named entity extraction is quite helpful in answering some basic questions and finding the basic knowledge in a text corpus. Further understanding necessitates studying the relationships among entities and patterns [24]. The SQL query and apriori algorithm identify the hidden patterns shown in Figure 2. The apriori algorithm ranked the predicted associations based on the Support, Confidence, and Lift score measures [25]. The support measure is how frequently an item set appears in the dataset, the confidence measure indicates how often the rule is correct and the Lift is a ratio of the rule confidence to its expected confidence. The expected confidence is a product of the value of the support rule body and rule head divided by the support rule body [26].

2.1 Developing Cancer Classification Model

The dataset collected via Entrez Direct software may have repeated abstracts while downloading multiple cancers that are removed manually. For pre-processing, the NLTK python module eliminates the unwanted elements or words from the text corpus [8] that might hinder cancer classification. The cleaning process removes the punctuations and special characters and stopwords/ words from abstracts that carry no meaning: words like almost, a, an, the, etc. Performed the word-stemming of the text to treat the same word in different forms to its root form. For example: " important,

Table 1: The PubMed queries made for searching articles and downloading via Entrez Direct

Cancer type	PubMed queries
oral cancer	((oral cancer[MeSH Major Topic] AND oral cancer[Title]) AND ('2000/01/01'[Date - MeSH] : '2020/12/01'[Date - MeSH])) AND (English[Language])
cervical cancer	((cervical cancer[MeSH Major Topic] AND cervical cancer[Title]) AND ('2000/01/01'[Date - MeSH] : '2020/12/01'[Date - MeSH])) AND (English[Language])
lung cancer	((Lung cancer[MeSH Major Topic] AND Lung cancer[Title]) AND ('2000/01/01'[Date - MeSH] : '2020/12/01'[Date - MeSH])) AND (English[Language])
gastric cancer	((gastric cancer[MeSH Major Topic] AND gastric cancer[Title]) AND ('2000/01/01'[Date - MeSH] : '2020/12/01'[Date - MeSH])) AND (English[Language])
esophageal cancer	((Esophageal cancer[MeSH Major Topic] AND Esophageal cancer[Title]) AND ('2000/01/01'[Date - MeSH] : '2020/12/01'[Date - MeSH])) AND (English[Language])
colorectal cancer	((Colorectal cancer[MeSH Major Topic] AND Colorectal cancer[Title]) AND ('2000/01/01'[Date - MeSH] : '2020/12/01'[Date - MeSH])) AND (English[Language])
skin cancer	((skin cancer[MeSH Major Topic] AND skin cancer[Title]) AND ('2000/01/01'[Date - MeSH] : '2020/12/01'[Date - MeSH])) AND (English[Language])
prostate cancer	((prostate cancer[MeSH Major Topic] AND prostate cancer[Title]) AND ('2000/01/01'[Date - MeSH] : '2020/12/01'[Date - MeSH])) AND (English[Language])
pancreatic cancer	((pancreatic cancer[MeSH Major Topic] AND pancreatic cancer[Title]) AND ('2000/01/01'[Date - MeSH] : '2020/12/01'[Date - MeSH])) AND (English[Language])
breast cancer	((Breast cancer[MeSH Major Topic] AND Breast cancer[Title]) AND ('2000/01/01'[Date - MeSH] : '2020/12/01'[Date - MeSH])) AND (English[Language])

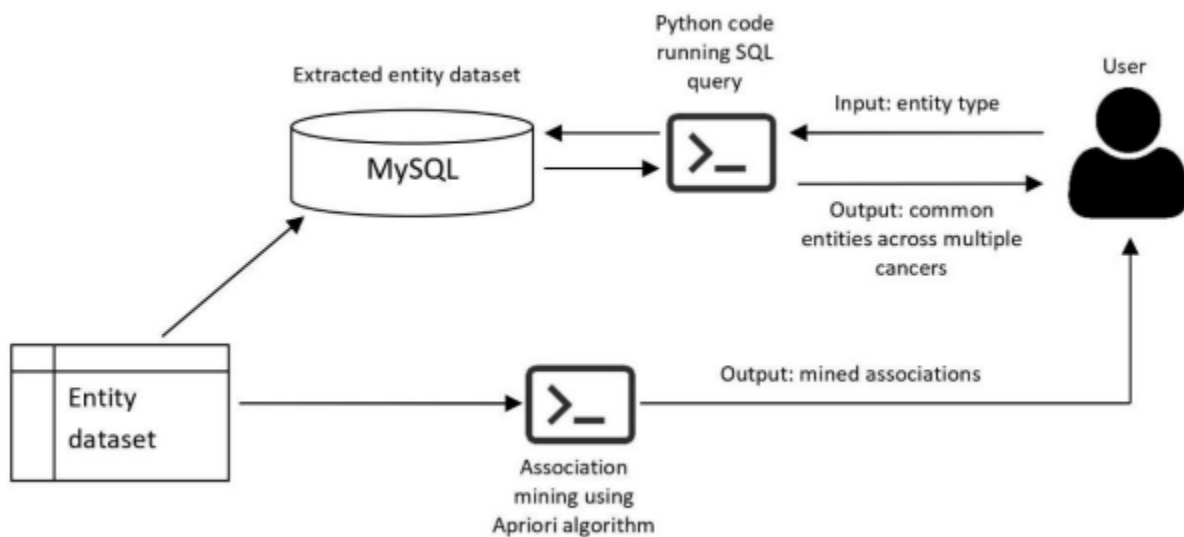


Figure 2: Association prediction workflow

Sentence:

It is necessary to conduct a trial to further explore the consistency and short term and long term efficacy of an intraoperative staging strategy for patients.

Unigrams:

'It' 'is' 'necessary' 'to' 'conduct' 'a' 'trial' 'to' 'further' 'explore' 'the' 'consistency' 'and' 'short' 'term' 'and' 'long' 'term' 'efficacy' 'of' 'an' 'intraoperative' 'staging' 'strategy' 'for' 'patients'

Bigrams:

'It is' 'necessary to' 'conduct a' 'trial to' 'further explore' 'the consistency' 'and short' 'term and' 'long term' 'efficacy of' 'an intraoperative' 'staging strategy' 'for patients'

Figure 3: An example of unigrams and bigrams of a sentence.

importantly, importance" are various forms of the same word "important". Word stemming reduces the dimensions by changing the different forms to the same base making the prediction efficient [27]. A bag of words representations [28], unigrams, and bigrams as shown in Figure 3 with TermFrequency–Inverse Document Frequency (TF-IDF) scores [29] used to determine the word importance for feature selection. In bag of words representation, the frequency of occurrence of each word or Term-Frequency (TF) is multiplied by the Inverse Document Frequency (IDF), and TF-IDF scores are used as feature vectors. The TF-IDF weighting score ($W_{t,d}$) was computed by the Equation:

$$W_{t,d} = (TF_{t,d}) * \log_{10}(N/DF_t)$$

where $TF_{t,d}$ refers to the frequency of the term 't' occurring in an article 'd'
 N is the number of articles in the dataset
and DF_t refers to the number of articles containing the term 't'

The TF-IDF vectors are feature vectors for both training and test data sets. The prediction model was built using the Linear Support Vector Classification (Linear SVC), Naïve-Bayes, Logistic Regression, and Random Forest classifiers [30][31]. The SciKit Learn python module was used to construct the model.

Naïve Bayes implemented using MultinomialNB offered by SciKit Learn and suited for text classification. The distribution is parametrized by vectors $\theta_y = (\theta_{y_1}, \theta_{y_2}, \dots, \theta_{y_n})$ for each y class, where n is the number of features (in text classification, the size of the vocabulary) and θ_{y_i} is the probability $P(x_i|y)$ of feature 'i' appearing in a sample belonging to class 'y'.

The parameters θ_y is estimated by relative frequency counting as shown below:

$$\theta_y = \frac{N_{y_i} + \alpha}{N_y + \alpha n}$$

where $N_{y_i} = \sum_{x \in T} x_i$ i is the number of times features 'i' appear in a sample of y class in the training set T and $N_y = \sum_{i=1}^n N_{y_i}$ is the total count of feature class for y. The smoothing priors, $\alpha \geq 0$, account for an absence of a feature in the learning samples and prevent zero probabilities in further computations. Linear SVC is similar to usual Support Vector Classification but supports only a linear kernel used with the L1 regularizing parameter. Implementation of the Logistic Regression using regularizing parameter the L2 with inverse regularization strength (C) 1.0 specifies strong regularization and random forest classifier implemented using default parameters as given by SciKit Learn.

2.2 Evaluation

Mined patterns: Predicted the entities common across the multiple cancers. The mined associations with a minimum of three entities were identified and validated manually with online databases and research articles for confirmation.

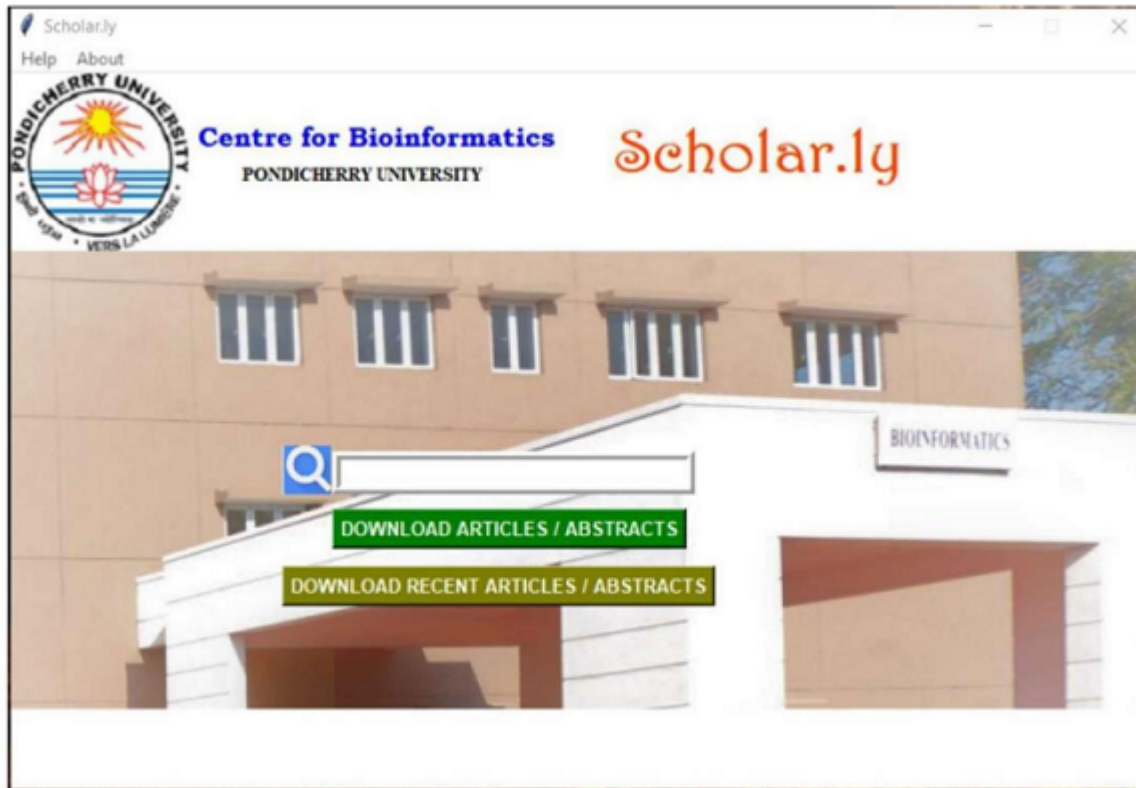


Figure 4: Homepage of Scholar.ly tool

Measured the performance of a model using the statistical measures of accuracy, precision, and recall to validate the cancer classification model and the patterns mined from the entities. Accuracy is the ratio of the predictions being correct, precision is a ratio of the correct positive predictions, and recalls is a ratio of positive cases detected [32]. It is 'P' positive instances and 'N' negative instances in an experiment, the four potential outcomes include True Positive (TP), True Negative (TN), False Positive (FP), and False-Negative (FN) were calculated by:

$$Accuracy = \frac{TP + TN}{P + N}$$

$$Precision = \frac{TP}{TP + FP}$$

$$Recall = \frac{TP}{TP + FN}$$

The classification model on different classifiers such as Linear SVC, Naïve Bayes, Logistic Regression, and Random Forest) was assessed five times for the accuracy, precision, recall, and average scores were recorded.

Results and Discussion

The study developed a mining interface for cancer entity recognition and a Machine learning model for cancer classification.

Mining Interface: The scholar.ly tool shown in Figure 4 downloaded the articles and abstracts, and the developed mining interface shown in Figure 5 extracted the cancer entities.

The entities mined from 700 cancer articles and abstracts were uploaded into the MySQL database for pattern discovery analysis. The predicted entities common across the multiple cancers using SQL queries and Python code are shown

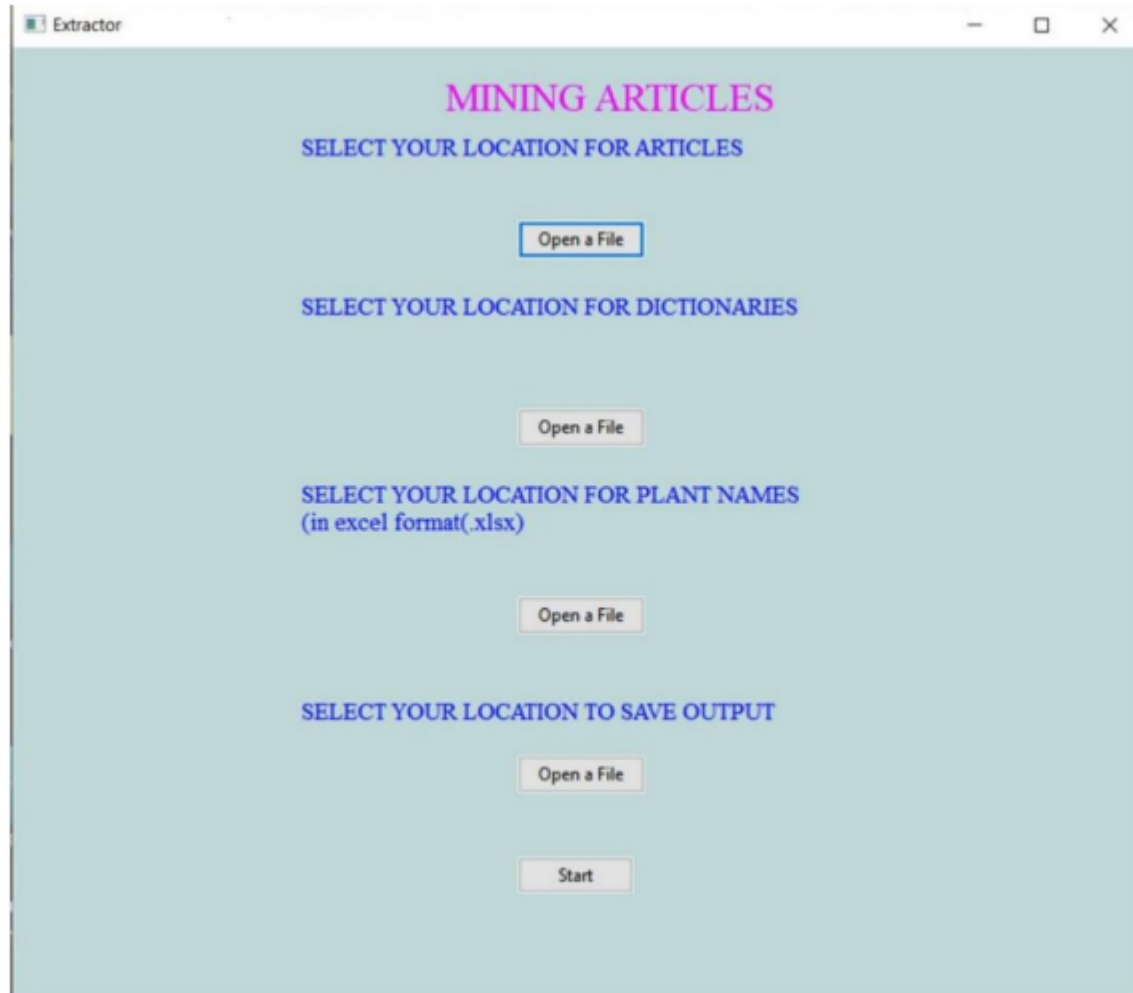


Figure 5: Homepage of Entity Extraction Interface

in Table 2. The identified hidden associations and the most significant entities with their support, confidence, and lift values are shown in Table 3. The predicted associations were validated manually with online databases such as NIH- National Cancer Institute (<https://www.cancer.gov/about-cancer/treatment/drugs>), Cancer Genetics Web [22], and KEGG [33] as well as research articles as shown in Table 4.

Classification Model: The abstracts of ten different cancer types (32, 200) were downloaded from PubMed by the search query and pre-processed for training data preparation. Four classifiers (Linear SVC, Naïve Bayes (NB), Logistic Regression (LR), and Random Forest (RF)) evaluated the accuracy, recall, and precision for the test dataset of 13,800 abstracts. Figure 6 is the workflow of the cancer classification model and recorded the performance scores in Table 5. The Linear SVC classifier provided the best performance scores and made very accurate predictions when implemented on 100 abstracts across multiple cancer types. The predicted cancer labels by the model compared with the gold-standard cancer labels obtained from MeSH (Medical Subject Headings) provided a good correspondence with the actual cancer labels. It concludes that the classification model predicted the cancer types appropriately.

3 Future Work

In addition to the association prediction, network construction for diseases of different cancer types is possible using the predicted patterns. It gives a deep insight into the various factors responsible for cancer progression. The network analyzes the gene-protein interaction and drug-protein interactions that may be useful to uncover the potentially novel associations that are yet to be studied.

Table 2: Common entities across multiple cancers

Common cancers	Genes	Sites	Symptoms	Risk Factors
cervical cancer; pancreatic cancer	hepatocyte growth factor			
lung cancer; esophageal cancer; breast cancer	vimentin			
lung cancer; pancreatic cancer	palb2			
gastric cancer; esophageal cancer; breast cancer	epidermal growth factor receptor			
esophageal cancer; colorectal cancer; pancreatic cancer	ras			
oral cancer; lung cancer		lung		
oral cancer; cervical cancer		rectum		
oral cancer; gastric cancer; esophageal cancer		stomach		
oral cancer; pancreatic cancer; breast cancer		breast		
oral cancer; gastric cancer		liver		
oral cancer; cervical cancer; colorectal cancer		colon		
oral cancer; lung cancer; colorectal cancer			discharge	
oral cancer; cervical cancer; lung cancer; colorectal cancer; skin cancer; prostate cancer; pancreatic cancer; breast cancer			inflammation	
cervical cancer; breast cancer			pain	
cervical cancer; gastric cancer			bleeding	
gastric cancer; prostate cancer			weight loss	
oral cancer; cervical cancer				human papillomavirus
oral cancer; esophageal cancer				tobacco
oral cancer; lung cancer; gastric cancer				smoking
oral cancer; gastric cancer; esophageal cancer				alcohol
cervical cancer; esophageal cancer				radiation therapy

Table 3: Mined associations

Associations	Support	Confidence	Lift
aurora kinase a→biopsy→alcohol→oral cancer	0.153846154	0.857142857	4.178571429
cisplatin→wnt1 inducible signaling pathway protein 1→radiation therapy→cervical cancer	0.08974359	0.5	5.571428571
epidermal growth factor receptor→trastuzumab→gastric cancer→endoscopy	0.064102564	0.416666667	6.5
smoking→lung cancer→palb2	0.051282051	0.571428571	11.14285714
ras→colorectal cancer→endoscopy	0.064102564	0.833333333	13

Table 4: Validated associations

Associations	Validation
aurora kinase a→biopsy→alcohol→oral cancer	PMID: 25697104, American cancer society
cisplatin→wnt1 inducible signaling pathway protein 1→radiation therapy→cervical cancer	cancer-genetics, KEGG, American cancer society, PMID: 30651114
epidermal growth factor receptor→trastuzumab→gastric cancer→endoscopy	PMID: 33990570, cancergenetics, American cancer society, KEGG
smoking→lung cancer→palb2	PMID: 29387807
ras→colorectal cancer→endoscopy	PMID: 29534749, cancergenetics

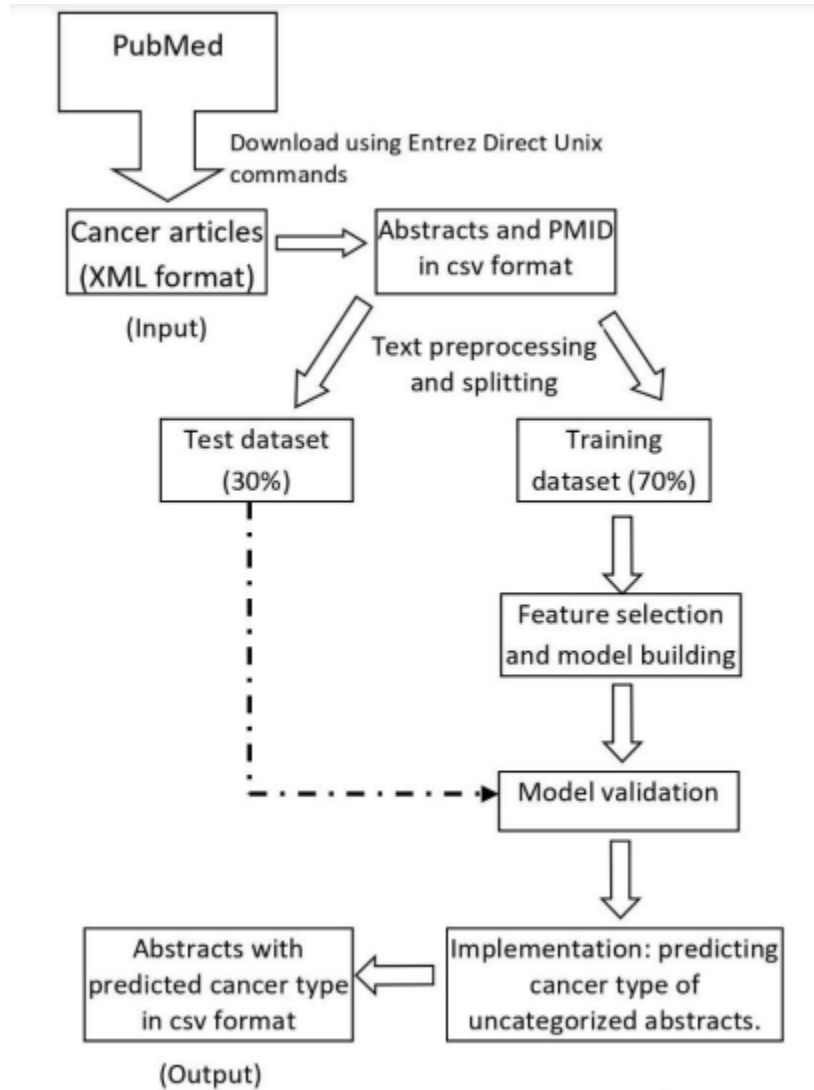


Figure 6: Cancer classification workflow

Table 5: Classifier performance scores

SCORES (Avg.)	Linear SVC ¹	NB ²	RF ³	LR ⁴
ACCURACY	0.991	0.927	0.982	0.984
RECALL	0.990	0.908	0.970	0.986
PRECISION	0.987	0.941	0.985	0.988
TIME TAKEN (in seconds)	71	72	134	91

¹ Linear Support Vector Classifier² Naïve Bayes³ Random Forest⁴ Logistic Regression

4 Conclusion

The computational mining interface for named entity recognition and cancer classification model has been developed. Out of examination, the Support Vector Machine outperformed other classifiers. The 'scholar.ly' tool reduces the researcher's effort to a great extent to collect the articles in a single location from PubMed. The automated mining interface was developed generically, user-friendly dictionary-based, and tested on extracting the cancer domain. The extracted entities were analyzed to predict the hidden patterns that might lead to novel associations among entities. Scalability is the main feature of the interface as there was no limit on the number of articles and the number of extracted entities. The study concludes that the interface contributes significant benefits in the research field of medical, chemical, and various domains to predict novel scenarios.

Recognition

This paper got accepted for paper presentation at the International Conference on Knowledge Discoveries on Statistical Innovations and Recent Advances in Optimization (ICON-KSRAO) on 29th and 30th December 2022.

References

1. Mathur P, Sathishkumar K, Chaturvedi M, et al. Cancer Statistics, 2020: Report From National Cancer Registry Programme, India. *JCO Global Oncology* 2020. PMID: 32673076:1063–75.
2. Sung H, Ferlay J, Siegel RL, et al. Global cancer statistics 2020: GLOBOCAN estimates of incidence and mortality worldwide for 36 cancers in 185 countries. *CA Cancer J. Clin.* 2021;71:209–49.
3. Friedman AA, Letai A, Fisher DE, and Flaherty KT. Precision medicine for cancer with next-generation functional diagnostics. *Nature Reviews Cancer* 2015;15:747–56.
4. Shipman L. The relevance of extensive editing in tumour transcriptomes. *Nature Reviews Cancer* 2015;15:698–8.
5. Talukder MA, Islam MM, Uddin MA, Akhter A, Hasan KF, and Moni MA. Machine learning-based lung and colon cancer detection using deep feature extraction and ensemble learning. *Expert Systems with Applications* 2022;205:117695.
6. Nadkarni PM, Ohno-Machado L, and Chapman WW. Natural language processing: an introduction. *Journal of the American Medical Informatics Association* 2011;18:544–51.
7. Khurana D, Koli A, Khatter K, and Singh S. Natural language processing: state of the art, current trends and challenges. *Multimed. Tools Appl.* 2023;82:3713–44.
8. Joulin A, Grave E, Bojanowski P, and Mikolov T. Bag of Tricks for Efficient Text Classification. 2016. arXiv: 1607.01759 [cs.CL].
9. Naseem U, Musial K, Eklund P, and Prasad M. Biomedical Named-Entity Recognition by Hierarchically Fusing BioBERT Representations and Deep Contextual-Level Word-Embedding. In: *2020 International Joint Conference on Neural Networks (IJCNN)*. 2020:1–8. DOI: 10.1109/IJCNN48605.2020.9206808.
10. Aggarwal CC and Zhai C. A Survey of Text Classification Algorithms. In: *Mining Text Data*. Ed. by Aggarwal CC and Zhai C. Boston, MA: Springer US, 2012:163–222. DOI: 10.1007/978-1-4614-3223-4_6. URL: https://doi.org/10.1007/978-1-4614-3223-4_6.
11. Gopal J, Prakash Sinnarasan VS, and Venkatesan A. Identification of Repurpose Drugs by Computational Analysis of Disease–Gene–Drug Associations. *Journal of Computational Biology* 2021;28. PMID: 34242526:975–84.
12. Song HJ, Jo BC, Park CY, Kim JD, and Kim YS. Comparison of named entity recognition methodologies in biomedical documents. *BioMedical Engineering OnLine* 2018;17:158.
13. Quimbaya AP, Múnera AS, Rivera RAG, et al. Named Entity Recognition Over Electronic Health Records Through a Combined Dictionary-based Approach. *Procedia Computer Science* 2016;100. International Conference on ENTERprise Information Systems/International Conference on Project MANagement/International Conference on Health and Social Care Information Systems and Technologies, CENTERIS/ProjMAN / HCist 2016:55–61.
14. Vaswani A, Shazeer N, Parmar N, et al. Attention is All You Need. In: *Proceedings of the 31st International Conference on Neural Information Processing Systems*. NIPS'17. Long Beach, California, USA: Curran Associates Inc., 2017:6000–10.
15. Devlin J, Chang MW, Lee K, and Toutanova K. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. 2019. arXiv: 1810.04805 [cs.CL].
16. Holmes G, Donkin A, and Witten IH. WEKA: a machine learning workbench. Tech. rep. 1994.
17. Ye Z, Tafti AP, He KY, Wang K, and He MM. SparkText: Biomedical Text Mining on Big Data Framework. *PLoS One* 2016;11:e0162721.

18. Demchenko Y, Laat C, and Membrey P. Defining architecture components of the Big Data Ecosystem. In: 2014:104–12. DOI: 10.1109/CTS.2014.6867550.
19. Ceglar A and Roddick JF. Association Mining. *ACM Comput. Surv.* 2006;38:5–es.
20. Zaki MJ. Scalable Algorithms for Association Mining. *IEEE Trans. on Knowl. and Data Eng.* 2000;12:372–90.
21. Cancer.Net. *J. Oncol. Pract.* 2008;4:188.
22. Pawloski JR, Randolph B, and Bajic P. Foundation-OneR-Heme Next Generation Sequencing of Hairy Cell Leukemia Variant Lymphocytes. *Blood* 2016;128:5289–9.
23. Perego R, Orlando S, and Palmerini P. Enhancing the Apriori Algorithm for Frequent Set Counting. In: *Data Warehousing and Knowledge Discovery*. Ed. by Kambayashi Y, Winiwarter W, and Arikawa M. Berlin, Heidelberg: Springer Berlin Heidelberg, 2001:71–82.
24. Bayardo RJ. Efficiently Mining Long Patterns from Databases. In: *Proceedings of the 1998 ACM SIGMOD International Conference on Management of Data*. SIGMOD '98. Seattle, Washington, USA: Association for Computing Machinery, 1998:85–93. DOI: 10.1145/276304.276313. URL: <https://doi.org/10.1145/276304.276313>.
25. Xie Y, Li Y, Wang C, and Lu M. The Optimization and Improvement of the Apriori Algorithm. In: *Proceedings of the 2008 International Symposium on Intelligent Information Technology Application Workshops*. IITAW '08. USA: IEEE Computer Society, 2008:1101–3. DOI: 10.1109/IITA.Workshops.2008.170. URL: <https://doi.org/10.1109/IITA.Workshops.2008.170>.
26. Tan PN, Kumar V, and Srivastava J. Selecting the Right Interestingness Measure for Association Patterns. In: *Proceedings of the Eighth ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*. KDD '02. Edmonton, Alberta, Canada: Association for Computing Machinery, 2002:32–41. DOI: 10.1145/775047.775053. URL: <https://doi.org/10.1145/775047.775053>.
27. Xu J and Croft WB. Corpus-Based Stemming Using Cooccurrence of Word Variants. *ACM Trans. Inf. Syst.* 1998;16:61–81.
28. Willits JA, Seidenberg MS, and Saffran JR. Distributional structure in language: contributions to noun-verb difficulty differences in infant word recognition. *Cognition* 2014;132:429–36.
29. Qaiser S and Ali R. Text Mining: Use of TF-IDF to Examine the Relevance of Words to Documents. *International Journal of Computer Applications* 2018;181.
30. F.Y O, J.E.T A, O A, J. O H, O O, and J A. Supervised machine learning algorithms: Classification and comparison. *International Journal of Computer Trends and Technology* 2017;48:128–38.
31. Khreisat L. A machine learning approach for Arabic text classification using N-gram frequency statistics. *Journal of Informetrics* 2009;3:72–7.
32. Junker M, Hoch R, and Dengel A. On the evaluation of document analysis components by recall, precision, and accuracy. In: *Proceedings of the Fifth International Conference on Document Analysis and Recognition*. *ICDAR '99 (Cat. No.PR00318)*. 1999:713–6. DOI: 10.1109/ICDAR.1999.791887.
33. Goto S, Bono H, Ogata H, et al. Organizing and computing metabolic pathway data in terms of binary relations. *Pac. Symp. Biocomput.* 1997:175–86.