

Deterministic Random Walks on the Two-Dimensional Grid

Benjamin Doerr

Tobias Friedrich

Abstract

Jim Propp's rotor router model is a deterministic analogue of a random walk on a graph. Instead of distributing chips randomly, each vertex serves its neighbors in a fixed order. We analyze the difference between Propp machine and random walk on the infinite two-dimensional grid. It is known that, apart from a technicality, independent of the starting configuration, at each time, the number of chips on each vertex in the Propp model deviates from the expected number of chips in the random walk model by at most a constant. We show that this constant is approximately 7.8, if all vertices serve their neighbors in clockwise or counterclockwise order and 7.3 otherwise. This result in particular shows that the order in which the neighbors are served makes a difference. Our analysis also reveals a number of further unexpected properties of the two-dimensional Propp machine.

1 Introduction

The rotor-router model is a simple deterministic process suggested by Jim Propp. It can be viewed as an attempt to derandomize random walks on graphs. So far, the "Propp machine" has mainly been regarded on infinite grids \mathbb{Z}^d . There, each vertex $x \in \mathbb{Z}^d$ is equipped with a "rotor" together with a cyclic permutation (called "rotor sequence") of the $2d$ cardinal directions of \mathbb{Z}^d . While a chip (particle, coin, ...) performing a random walk leaves a vertex in a random direction, in the Propp model it always goes into the direction the rotor is pointing. After a chip is sent, the rotor is rotated according to the fixed rotor sequence. This shall ensure that the chips are distributed highly evenly among the neighbors.

The Propp machine has attracted considerable attention recently. It has been shown that it closely resembles a random walk in several respects. The first result is due

to Levine and Peres [8, 9] who compared random walk and Propp machine in an *aggregating model* called Internal Diffusion-Limited Aggregation (IDLA) [3]. There, each chip starts at the origin of \mathbb{Z}^d and walks till it reaches an unoccupied site, which it then occupies. In the random walk model it is well known that the shape of the occupied locations converges to a Euclidean ball in \mathbb{R}^d [6]. Recently, Levine and Peres [8, 9] proved an analogous result for the Propp machine. Surprisingly, the convergence seems to be much faster. Kleber [4] showed experimentally that for circular rotor sequences after three million chips the radius of the inscribed and circumscribed circle differs by approximately 1.61. Hence, the occupied locations almost form a perfect circle. Some more results on this aggregating model in two dimensions can be found in Section 8.

Cooper and Spencer [1] compared the Propp machine and the random walk in terms of the *single vertex discrepancy*. Apart from a technicality which we defer to Section 2, they place arbitrary numbers of chips on the vertices. Then they run the Propp machine on this initial configuration for a certain number of rounds. A round consists of each chip (in arbitrary order) doing one move as directed by the Propp machine. For the resulting position, for each vertex they compare the number of chips that end up there with the expected number of chips that a random walk in same number of rounds would have gotten there starting from the initial configuration. Cooper and Spencer showed that for all grids \mathbb{Z}^d , these differences can be bounded by a constant c_d independent of the initial set-up (in particular, the total number of vertices) and the run-time.

For the case $d = 1$, that is, the graph being the infinite path, Cooper, Doerr, Spencer, and Tardos [2] showed among other results that this constant c_1 is approximately 2.29. They further proved that to have the discrepancy on a particular vertex maximal it suffices that each location has an odd number of chips at at most one time.

In this paper, we rigorously analyze the Propp machine on the two-dimensional grid \mathbb{Z}^2 . A particular difference to the one-dimensional case is that now there are two non-isomorphic orders in which the four neighbors can be served. The first are clockwise and counterclockwise orders of the four cardinal directions. These are called circular rotor sequences. All other orders turn the rotor by 180° at one time and are called non-circular rotor sequences. We prove $c_2 \approx 7.83$ for circular rotor sequences and $c_2 \approx 7.29$ otherwise. To the best of our knowledge, this is the first paper showing that the rotor sequence can make a difference.

We also characterize the respective worst-case configurations. In particular, we prove that the maximal single vertex discrepancy can only be reached if there are vertices which send a number of chips not divisible by four at at least three different times.

The remainder of this paper is organized as follows. The basic notations are given in Section 2. In Section 3 we roughly speaking show that, by suitably choosing the initial configuration, we may prescribe the number of chips on each vertex at each time modulo 4. This will yield sharp lower bounds, since in Section 4 we see that the discrepancy on a vertex can be expressed by exactly this information. In Sections 5 and 6, we derive sufficient information about initial configurations leading to maximal discrepancies on a vertex so that we then can estimate the maximum possible discrepancy numerically. This estimate is shown to be relatively tight in Section 7. Since the investigation up to this point in particular showed that different rotor sequences lead to different results, we briefly examine the aggregating model in this respect in Section 8. We summarize our results in the last section.

2 Preliminaries

To bound the single vertex discrepancy between Propp machine and random walk on the two-dimensional grid we need several preliminaries, which will be introduced in this section.

First, it will be useful to use a different representation of the two-dimensional grid \mathbb{Z}^2 . Let $\text{DIR} := \left\{ \begin{pmatrix} +1 \\ +1 \end{pmatrix}, \begin{pmatrix} +1 \\ -1 \end{pmatrix}, \begin{pmatrix} -1 \\ -1 \end{pmatrix}, \begin{pmatrix} -1 \\ +1 \end{pmatrix} \right\}$. Define a graph $G = (V, E)$ via $V = \left\{ \begin{pmatrix} x_1 \\ x_2 \end{pmatrix} \mid x_1 \equiv x_2 \pmod{2} \right\}$ and $E = \{(\mathbf{x}, \mathbf{y}) \in V^2 \mid \mathbf{x} - \mathbf{y} \in \text{DIR}\}$. Clearly, G is isomorphic to the standard two-dimensional grid $G' = (\mathbb{Z}^2, E')$ with $E' = \{(\mathbf{x}, \mathbf{y}) \in \mathbb{Z}^2 \mid \|\mathbf{x} - \mathbf{y}\|_1 = 1\}$. Therefore, our results on G immediately translate to G' . The advantage of our representation is that now each direction $D \in \text{DIR}$ can be uniquely expressed as $D = \varepsilon_x \begin{pmatrix} 1 \\ 0 \end{pmatrix} + \varepsilon_y \begin{pmatrix} 0 \\ 1 \end{pmatrix}$ with $\varepsilon_x, \varepsilon_y \in \{-1, 1\}$. This allows a convenient computation of the probability distribution of the random walk on the grid (see equation (1) below). For convenience we will also use the symbols $\{ \nearrow, \searrow, \swarrow, \nwarrow \}$ to describe the directions in the obvious manner.

In order to avoid discussing all equations in the expected sense and thereby to simplify the presentation, one can treat the expectation of the random walk as a *linear machine* [1]. Here, in each time step a pile of k chips is split evenly, with $k/4$ chips going to each neighbor. The (possibly non-integral) number of chips at vertex \mathbf{x} at time t is exactly the expected number of chips in the random walk model.

For $\mathbf{x}, \mathbf{y} \in V$ and $t \in \mathbb{N}_0$, let $\mathbf{x} \sim t$ denote that $x_1 \equiv x_2 \equiv t \pmod{2}$ and $\mathbf{x} \sim \mathbf{y}$ denote that $x_1 \equiv x_2 \equiv y_1 \equiv y_2 \pmod{2}$. A vertex \mathbf{x} is called *even* or *odd* if $\mathbf{x} \sim 0$ or $\mathbf{x} \sim 1$, respectively.

A *configuration* describes the current “state” of linear or Propp machine. A configuration of the linear machine assigns to each vertex $\mathbf{x} \in V$ its current (possibly fractional) number of chips. A configuration of the Propp machine assigns to each vertex $\mathbf{x} \in V$ its current (integral) number of chips and the current direction of the rotor. A configuration is called *even* (*odd*) if all chips lie on even (odd) vertices.

As pointed out in the introduction, there is one limitation without which neither the results of [1, 2] nor our results hold. Note that since G is a bipartite graph, chips that start on even vertices never mix with those starting on odd vertices. It looks like we are playing two games at once. However, this is not true, because chips at different parity vertices may affect each other through the rotors. We therefore require the initial configuration to have chips only on *one* parity. Without loss of generality, we consider only even initial configurations.

A random walk on G can be described nicely by its probability density. By $H(\mathbf{x}, t)$ we denote the probability that a chip from vertex \mathbf{x} arrives at the origin after t random steps (“at time t ”) in a simple random walk. Then,

$$H(\mathbf{x}, t) = 4^{-t} \binom{t}{(t+x_1)/2} \binom{t}{(t+x_2)/2} \quad (1)$$

for $\mathbf{x} \sim t$ and $\|\mathbf{x}\|_\infty \leq t$, and $H(\mathbf{x}, t) = 0$ otherwise.

We now describe the *Propp machine* in detail. First, we define a rotor sequence by a cyclic permutation $\text{NEXT}: \text{DIR} \rightarrow \text{DIR}$. That is, after a chip has been sent in direction \mathbf{A} , the rotor moves such that afterwards it points in direction $\text{NEXT}(\mathbf{A})$. Instead of using NEXT directly, it will often be more handy to describe a *rotor sequence* as a 4-tuple $\mathcal{R} = (\nearrow, \text{NEXT}(\nearrow), \text{NEXT}^2(\nearrow), \text{NEXT}^3(\nearrow))$. We distinguish between circular and non-circular rotor sequences. *Circular* rotor sequences are either clockwise $(\nearrow, \searrow, \swarrow, \nwarrow)$ or counter-clockwise $(\nearrow, \nwarrow, \swarrow, \searrow)$. All other rotor sequences are called *non-circular*. Our main focus is on the classical Propp machine in which all vertices have the same rotor sequence. In [1], Cooper and Spencer allow different rotor sequences for each vertex \mathbf{x} . Our results also hold in this general setting. However, to simplify the presentation we will typically assume that there is only one rotor sequence for all vertices \mathbf{x} .

In the following notations, we implicitly fix the rotor sequence as well as the initial configuration (that is, chips on vertices and rotor directions at time $t = 0$). In one step of the Propp machine, each chip does exactly one move, that is, it moves in the direction the arrow associated with his current position is pointing and updates the arrow direction according to the rotor sequence. Note that the particular order in which

the chips move within one step is irrelevant (as long as we do not label the chips). By this rule, all subsequent configurations are determined by the initial configuration. For all $\mathbf{x} \in V$ and $t \in \mathbb{N}_0$ let $f(\mathbf{x}, t)$ denote the number of chips on vertex \mathbf{x} and $\text{ARR}(\mathbf{x}, t)$ the direction of the rotor associated with \mathbf{x} after t steps of the Propp machine.

To describe the linear machine we use the same fixed initial configuration as for the Propp machine. In one step, each vertex \mathbf{x} sends a quarter of its (possibly fractional) number of chips to each neighbor. Let $E(\mathbf{x}, t)$ denote the number of chips at vertex \mathbf{x} after t steps of the linear machine. This is equal to the expected number of chips at vertex \mathbf{x} after a random walk of all chips for t steps. Note that $E(\mathbf{x}, t) = \frac{1}{4} \sum_{\mathbf{A} \in \text{DIR}} E(\mathbf{x} + \mathbf{A}, t - 1)$ by definition.

3 Mod-4-forcing Theorem

For a deterministic process like the Propp machine, it is obvious that the initial configuration (that is, the location of each chip and the direction of each rotor), determines all subsequent configurations. The following theorem shows a partial converse, namely that (roughly speaking) we may prescribe the number of chips modulo 4 on all vertices at all times and still find an initial configuration leading to such a game. An analogous result for the one-dimensional Propp machine has been shown in [2].

Theorem 1 (Mod-4-forcing Theorem). *For any initial direction of the rotors and any $\pi: V \times \mathbb{N}_0 \rightarrow \{0, 1, 2, 3\}$ with $\pi(\mathbf{x}, t) = 0$ for all $\mathbf{x} \not\sim t$, there is an initial even configuration with $f(\mathbf{x}, 0)$, $\mathbf{x} \in V$ that results in subsequent configurations with $f(\mathbf{x}, t) \equiv \pi(\mathbf{x}, t) \pmod{4}$ for all \mathbf{x} and t .*

Proof. Let $\text{ARR}(\mathbf{x}, 0)$ describe the initial rotor directions given in the assumption. The sought-after configuration can be found iteratively. We start with $f(\mathbf{x}, 0) := \pi(\mathbf{x}, 0)$ chips at location \mathbf{x} .

Now assume that our initial (even) configuration is such that for some $T \in \mathbb{N}$ we have $f(\mathbf{x}, t) \equiv \pi(\mathbf{x}, t) \pmod{4}$ for all $t < T$. We modify this initial configuration by defining $f'(\mathbf{x}, 0) := f(\mathbf{x}, 0) + \varepsilon_{\mathbf{x}} 4^T$ for even \mathbf{x} , while we have $f'(\mathbf{x}, 0) = 0$ for odd \mathbf{x} . Here, $\varepsilon_{\mathbf{x}} \in \{0, 1, 2, 3\}$ are to be determined such that $f'(\mathbf{x}, t) \equiv \pi(\mathbf{x}, t) \pmod{4}$ for all $t \leq T$.

Observe that a pile of 4^T chips splits evenly T times. Hence for all choices of the $\varepsilon_{\mathbf{x}}$ we still have $f'(\mathbf{x}, t) \equiv \pi(\mathbf{x}, t) \pmod{4}$ for all $t < T$. At time T , the extra piles of 4^T

chips have spread as follows:

$$f'(\mathbf{x}, T) = f(\mathbf{x}, T) + \sum_{\substack{\mathbf{y} \sim 0 \\ \|\mathbf{y} - \mathbf{x}\|_\infty \leq T}} \varepsilon_{\mathbf{y}} \binom{T}{\frac{T+x_1-y_1}{2}} \binom{T}{\frac{T+x_2-y_2}{2}}.$$

Let initially $\varepsilon_{\mathbf{y}} := 0$ for all $\mathbf{y} \in V$. By induction on $\|\mathbf{y}\|_1$, we change the $\varepsilon_{\mathbf{y}}$ to their final value. We keep $\varepsilon_{\mathbf{y}} = 0$ for all \mathbf{y} with $\|\mathbf{y}\|_1 < 2T$.

Assume that for some $\theta \in \mathbb{N}_0$, the current $\varepsilon_{\mathbf{y}}$ fulfill $f'(\mathbf{x}, T) \equiv \pi(\mathbf{x}, T) \pmod{4}$ for all \mathbf{x} with $\|\mathbf{x}\|_1 < \theta$. We now determine $\varepsilon_{\mathbf{y}}$ for all \mathbf{y} with $\|\mathbf{y}\|_1 = 2T + \theta$ in such a way that $f'(\mathbf{x}, T) \equiv \pi(\mathbf{x}, T) \pmod{4}$ for all $\mathbf{x} \in V$ such that $\|\mathbf{x}\|_1 \leq \theta$.

Fortunately, to achieve $f'(\mathbf{x}, T) \equiv \pi(\mathbf{x}, T) \pmod{4}$ for some $\mathbf{x} \in V$ such that $\|\mathbf{x}\|_1 = \theta$, it suffices to change a single $\varepsilon_{\mathbf{y}}$, $\mathbf{y} \in V$, $\|\mathbf{y}\|_1 = 2T + \theta$. Without loss of generality, let $\mathbf{x} \in V$, $\|\mathbf{x}\|_1 = \theta$, and $\mathbf{x} \sim T$ such that $x_1, x_2 \geq 0$. Let $\mathbf{y} = \mathbf{y}(\mathbf{x}) = (x_1 + T, x_2 + T)$. Now choosing $\varepsilon_{\mathbf{y}} \in \{0, 1, 2, 3\}$ such that $\varepsilon_{\mathbf{y}} \equiv \pi(\mathbf{x}, T) - f(\mathbf{x}, T) \pmod{4}$ yields $f'(\mathbf{x}, T) = f(\mathbf{x}, T) + \varepsilon_{\mathbf{y}} \equiv \pi(\mathbf{x}, T) \pmod{4}$ and $f'(\mathbf{x}, T) = f(\mathbf{x}, T)$ for all other $\mathbf{x} \in V$ such that $\|\mathbf{x}\|_1 \leq \theta$.

Hence for each $\mathbf{x} \in V$ such that $\|\mathbf{x}\|_1 = \theta$, we find a $\mathbf{y}(\mathbf{x})$ and a value for $\varepsilon_{\mathbf{y}(\mathbf{x})}$ such that the resulting $f'(\mathbf{x}, T)$ are as desired. All other $\varepsilon_{\mathbf{y}}$ with $\|\mathbf{y}\|_1 = 2T + \theta$ remain fixed to zero.

This shows that for all $\theta \in \mathbb{N}$, we may choose $\varepsilon_{\mathbf{y}}$, $\mathbf{y} \in V$, such that $f'(\mathbf{x}, t) \equiv \pi(\mathbf{x}, t) \pmod{4}$ for all $t \leq T$ and all $\mathbf{x} \in V$ such that $\|\mathbf{x}\|_1 \leq \theta$. By compactness principle, this yields the existence of $\varepsilon_{\mathbf{y}}$, $\mathbf{y} \in V$, such that $f'(\mathbf{x}, t) \equiv \pi(\mathbf{x}, t) \pmod{4}$ for all $t \leq T$ and $\mathbf{x} \in V$.

Up to this point, we proved that for all $T \in \mathbb{N}$, there is an even initial configuration such that $f'(\mathbf{x}, t) \equiv \pi(\mathbf{x}, t) \pmod{4}$ holds for all $t \leq T$ and $\mathbf{x} \in V$. Invoking the compactness principle again finishes the proof. \square

4 The Basic Method

In this section, we lay the foundations for our analysis of the maximal possible single-vertex discrepancy. In particular, we will see that we can determine the contribution of a vertex to the discrepancy at another one independent from all other vertices.

In the following, we re-use several arguments from [1, 2]. For the moment, in addition to the notations given in Section 2, we also use the following mixed notation. By $E(\mathbf{x}, t_1, t_2)$ we denote the (possibly fractional) number of chips at location x after first performing t_1 steps with the Propp machine and then $t_2 - t_1$ steps with the linear machine.

We are interested in bounding the discrepancies $|f(\mathbf{x}, t) - E(\mathbf{x}, t)|$ for all vertices \mathbf{x} and all times t . Since we aim at bounds independent of the initial configuration, it suffices to regard the vertex $\mathbf{x} = \mathbf{0}$. From

$$\begin{aligned} E(\mathbf{0}, 0, t) &= E(\mathbf{0}, t), \\ E(\mathbf{0}, t, t) &= f(\mathbf{0}, t), \end{aligned}$$

we obtain

$$f(\mathbf{0}, t) - E(\mathbf{0}, t) = \sum_{s=0}^{t-1} (E(\mathbf{0}, s+1, t) - E(\mathbf{0}, s, t)).$$

Now $E(\mathbf{0}, s+1, t) - E(\mathbf{0}, s, t) = \sum_{\mathbf{x} \in V} \sum_{k=1}^{f(\mathbf{x}, s)} (H(\mathbf{x} + \text{NEXT}^{k-1}(\text{ARR}(\mathbf{x}, s)), t - s - 1) - H(\mathbf{x}, t - s))$ motivates the definition of the *influence* of a Propp move (compared to a random walk move) from vertex \mathbf{x} in direction \mathbf{A} on the discrepancy of $\mathbf{0}$ (t time steps later) by

$$\text{INF}(\mathbf{x}, \mathbf{A}, t) := H(\mathbf{x} + \mathbf{A}, t - 1) - H(\mathbf{x}, t).$$

To finally reduce all ARRs involved to the initial arrow settings $\text{ARR}(\cdot, 0)$, we define $s_i(\mathbf{x}) := \min \{u \geq 0 \mid i < \sum_{t=0}^u f(\mathbf{x}, t)\}$ for all $i \in \mathbb{N}_0$. Hence at time $s_i(\mathbf{x})$ the location \mathbf{x} is occupied by its i -th chip (where, to be consistent with [2], we start counting with the 0-th chip).

Let T be a time at which we regard the discrepancy at $\mathbf{0}$. Then the above yields

$$f(\mathbf{0}, T) - E(\mathbf{0}, T) = \sum_{\mathbf{x} \in V} \sum_{\substack{i \geq 0, \\ s_i(\mathbf{x}) < T}} \text{INF}(\mathbf{x}, \text{NEXT}^i(\text{ARR}(\mathbf{x}, 0)), T - s_i(\mathbf{x})). \quad (2)$$

Since the inner sum of equation (2) will occur frequently in the remainder, let us define the *contribution* of a vertex \mathbf{x} to be

$$\text{CON}(\mathbf{x}) := \sum_{\substack{i \geq 0, \\ s_i(\mathbf{x}) < T}} \text{INF}(\mathbf{x}, \text{NEXT}^i(\text{ARR}(\mathbf{x}, 0)), T - s_i(\mathbf{x})),$$

where we both suppress the initial configuration leading to the $s_i(\cdot)$ as well as the runtime T . Occasionally, we will write CON_c to specify the underlying initial configuration.

The first main result of this section, summarized in the following theorem, is that it suffices to examine each vertex \mathbf{x} separately.

Theorem 2. *The discrepancy between Propp machine and linear machine after T time steps is the sum of the contributions $\text{CON}(\mathbf{x})$ of all vertices \mathbf{x} , i.e.,*

$$f(\mathbf{0}, T) - E(\mathbf{0}, T) = \sum_{\mathbf{x} \in V} \text{CON}(\mathbf{x}).$$

Our aim in this paper is to prove a sharp upper bound for the single-vertex discrepancies $|f(\mathbf{y}, T) - E(\mathbf{y}, T)|$ for all \mathbf{y} and T . As discussed already, by symmetry we may always assume $\mathbf{x} = \mathbf{0}$. To get rid of the dependency of T , let us define $\text{MAXCON}(\mathbf{x})$ to be the supremum contribution of \mathbf{x} over all initial configurations and all T . We will shortly see that the supremum actually is a maximum (Corollary 10), that is, there is an initial configuration and a time T such that $\text{CON}(\mathbf{x}) = \text{MAXCON}(\mathbf{x})$. Since the contribution only depends on $T - s_i(\mathbf{x})$ and the (Mod-4)-forcing theorem tells us how to manipulate the $s_i(\mathbf{x})$, we may choose T as large as we like (and still have a configuration leading to $\text{CON}(\mathbf{x}) = \text{MAXCON}(\mathbf{x})$). Provided that $\sum_{\mathbf{x} \in V} \text{MAXCON}(\mathbf{x})$ is finite (which we prove in the remainder), we obtain that $\sum_{\mathbf{x} \in V} \text{MAXCON}(\mathbf{x})$ is a *tight* upper bound for $\sup(f(\mathbf{0}, T) - E(\mathbf{0}, T))$, where the supremum is taken over all initial configurations and all T .

To bound $|f(\mathbf{0}, T) - E(\mathbf{0}, T)|$, we need an analogous discussion for negative contributions. Let $\text{MINCON}(\mathbf{x})$ be the infimum contribution of \mathbf{x} over all initial configurations and all T . Fortunately, using symmetries, we can show that $\sum_{\mathbf{x} \in V} \text{MAXCON}(\mathbf{x}) = -\sum_{\mathbf{x} \in V} \text{MINCON}(\mathbf{x})$, hence it suffices to regard positive contributions. Let us shortly sketch the symmetry argument and then summarize the above discussion.

Observe that sending one chip in each direction at the same time does not change $\text{CON}(\mathbf{x})$. That is, for all \mathbf{x} and t we have

$$\sum_{\mathbf{A} \in \text{DIR}} \text{INF}(\mathbf{x}, \mathbf{A}, t) = 0. \tag{3}$$

This follows right from the definition of INF and the elementary fact $H(\mathbf{x}, t) = \frac{1}{4} \sum_{\mathbf{A} \in \text{DIR}} H(\mathbf{x} + \mathbf{A}, t - 1)$. Based on equation (3) we will ignore piles of four chips (and multiples) at a common time t in the remainder of this section. The remaining one to three chips are called *odd chips*. Note that there is *no* relation between odd

chips and odd vertices/configurations as defined in Section 2.

To describe the symmetries of CON, we further distinguish the non-circular rotor sequences. We call $(\nearrow, \nwarrow, \searrow, \swarrow)$ and $(\nearrow, \swarrow, \searrow, \nwarrow)$ x -alternating and $(\nearrow, \searrow, \nwarrow, \swarrow)$ and $(\nearrow, \swarrow, \nwarrow, \searrow)$ y -alternating. Now a short look at the definition of MAXCON reveals symmetries like $\text{MAXCON}\left(\begin{pmatrix} x_1 \\ x_2 \end{pmatrix}\right) = \text{MAXCON}\left(\begin{pmatrix} -x_1 \\ -x_2 \end{pmatrix}\right)$ for circular rotor sequences, $\text{MAXCON}\left(\begin{pmatrix} x_1 \\ x_2 \end{pmatrix}\right) = \text{MAXCON}\left(\begin{pmatrix} x_1 \\ -x_2 \end{pmatrix}\right)$ for x -alternating rotor sequences, and $\text{MAXCON}\left(\begin{pmatrix} x_1 \\ x_2 \end{pmatrix}\right) = \text{MAXCON}\left(\begin{pmatrix} -x_1 \\ x_2 \end{pmatrix}\right)$ for y -alternating rotor sequences. The following lemma exhibits symmetries for MAXCON and MINCON. It shows that the discrepancies caused by having too few or too many chips have the same absolute value.

Lemma 3. *For all $\mathbf{x} \in V$, the following symmetries hold for*

- *circular rotor sequences:* $\text{MAXCON}\left(\begin{pmatrix} x_1 \\ x_2 \end{pmatrix}\right) = -\text{MINCON}\left(\begin{pmatrix} -x_1 \\ x_2 \end{pmatrix}\right)$,
- *x -alternating rotor sequences:* $\text{MAXCON}\left(\begin{pmatrix} x_1 \\ x_2 \end{pmatrix}\right) = -\text{MINCON}\left(\begin{pmatrix} -x_1 \\ x_2 \end{pmatrix}\right)$,
- *y -alternating rotor sequences:* $\text{MAXCON}\left(\begin{pmatrix} x_1 \\ x_2 \end{pmatrix}\right) = -\text{MINCON}\left(\begin{pmatrix} x_1 \\ -x_2 \end{pmatrix}\right)$.

Proof. The proofs are not difficult, so we only give the one for the first statement. We show that for each configuration \mathcal{C}_1 there is another configuration \mathcal{C}_3 and a simple permutation π of V with $\text{CON}_{\mathcal{C}_1}(\mathbf{x}) = -\text{CON}_{\mathcal{C}_3}(\pi(\mathbf{x}))$ for all implicit run-times T and assuming the clockwise rotor sequence $\mathcal{R} := (\nearrow, \searrow, \swarrow, \nwarrow)$ for both \mathcal{C}_1 and \mathcal{C}_3 . By Theorem 1, there is a configuration \mathcal{C}_2 which sends, using the rotor sequence $(\nearrow, \nwarrow, \swarrow, \searrow)$, an odd chip from $\begin{pmatrix} -x_1 \\ x_2 \end{pmatrix}$ in direction $\begin{pmatrix} -A_1 \\ A_2 \end{pmatrix}$ at time t if and only if \mathcal{C}_1 sends an odd chip from $\begin{pmatrix} x_1 \\ x_2 \end{pmatrix}$ in direction $\begin{pmatrix} A_1 \\ A_2 \end{pmatrix}$ at time t . Note that $\text{CON}_{\mathcal{C}_2}\left(\begin{pmatrix} -x_1 \\ x_2 \end{pmatrix}\right) = \text{CON}_{\mathcal{C}_1}(\mathbf{x})$. A configuration \mathcal{C}_3 which sends for each single chip \mathcal{C}_2 sends, *three* chips from the same vertex in the same direction at the same time obeys rotor sequence \mathcal{R} and gives by equation (3) a contribution $\text{CON}_{\mathcal{C}_3}\left(\begin{pmatrix} -x_1 \\ x_2 \end{pmatrix}\right) = -\text{CON}_{\mathcal{C}_2}\left(\begin{pmatrix} -x_1 \\ x_2 \end{pmatrix}\right) = -\text{CON}_{\mathcal{C}_1}(\mathbf{x})$. In consequence, $\text{MINCON}\left(\begin{pmatrix} -x_1 \\ x_2 \end{pmatrix}\right) = -\text{MAXCON}\left(\begin{pmatrix} x_1 \\ x_2 \end{pmatrix}\right)$ for the clockwise rotor sequence \mathcal{R} . \square

Now Lemma 3 immediately yields $\sum_{\mathbf{x} \in V} \text{MINCON}(\mathbf{x}) = -\sum_{\mathbf{x} \in V} \text{MAXCON}(\mathbf{x})$. Therefore, it suffices to regard maximal contributions.

Theorem 4.

$$\sup_{\mathcal{C}, T} |f(\mathbf{0}, T) - E(\mathbf{0}, T)| = \sum_{\mathbf{x} \in V} \text{MAXCON}(\mathbf{x})$$

is a tight upper bound for the single vertex discrepancies.

5 The Modes of INF

In Theorem 4 we expressed the discrepancy as sum of contributions $\text{CON}(\mathbf{x})$, which in turn are sums of the influences $\text{INF}(\mathbf{x}, \mathbf{A}, t)$. To bound the discrepancy, we are now interested in the extremal values of such sums. In this section we derive some monotonicity properties of these sums. For this, we define

$$\text{INF}(\mathbf{x}, \mathcal{A}, t) := \sum_{\mathbf{A} \in \mathcal{A}} \text{INF}(\mathbf{x}, \mathbf{A}, t)$$

for a finite sequence $\mathcal{A} := (\mathbf{A}^{(1)}, \mathbf{A}^{(2)}, \dots)$ of rotor directions ordered according to a fixed rotor sequence. In the remainder of the article all finite sequences of rotor directions for which we use the calligraphic \mathcal{A} are ordered according to their respective rotor sequence.

Let $X \subseteq \mathbb{R}$. We call a mapping $f: X \rightarrow \mathbb{R}$ *unimodal*, if there is a $t_1 \in X$ such that $f|_{x \leq t_1}$ as well as $f|_{x \geq t_1}$ are monotone. We call a mapping $f: X \rightarrow \mathbb{R}$ *bimodal*, if there are $t_1, t_2 \in X$ such that $f|_{x \leq t_1}$, $f|_{t_1 \leq x \leq t_2}$, and $f|_{t_2 \leq x}$ are monotone. We call a mapping $f: X \rightarrow \mathbb{R}$ *strictly bimodal*, if it is bimodal, but not unimodal. In the following, we show that all $\text{INF}(\mathbf{x}, \mathcal{A}, t)$ are bimodal in t .

From equation (3) we see that

$$\begin{aligned} \text{INF}(\mathbf{x}, (\mathbf{A}^{(1)}, \mathbf{A}^{(2)}, \mathbf{A}^{(3)}), t) &= -\text{INF}(\mathbf{x}, \text{DIR} \setminus \{\mathbf{A}^{(1)}, \mathbf{A}^{(2)}, \mathbf{A}^{(3)}\}, t) \quad \text{and} \\ \text{INF}(\mathbf{x}, (\mathbf{A}^{(1)}, \dots, \mathbf{A}^{(k)}), t) &= \text{INF}(\mathbf{x}, (\mathbf{A}^{(1)}, \dots, \mathbf{A}^{(k-4)}), t) \quad \text{for } k \geq 4. \end{aligned} \quad (4)$$

This shows that it suffices to examine $\text{INF}(\mathbf{x}, \mathcal{A}, t)$ for \mathcal{A} of length one and two, which is done in Lemmas 6 and 7, respectively. For both proofs, we need Descartes' Rule of Signs, which can be found in [11].

Theorem 5 (Descartes' Rule of Signs). *The number of positive roots counting multiplicities of a non-zero polynomial with real coefficients is either equal to its number of coefficient sign variations (i.e., the number of sign changes between consecutive nonzero coefficients) or else is less than this number by an even integer.*

With this, we are now well equipped to analyze the monotonicity of $\text{INF}(\mathbf{x}, \mathcal{A}, \cdot)$ for $|\mathcal{A}| \in \{1, 2\}$.

Lemma 6. *For all $\mathbf{x} \in V$ and $\mathbf{A} \in \text{DIR}$, $\text{INF}(\mathbf{x}, \mathbf{A}, t)$ is bimodal in t . It is strictly bimodal if and only if*

(i) $\|\mathbf{x}\|_\infty > 6$ and

(ii) $-A_1x_1 > A_2x_2 > (-A_1x_1 + 1)/2$ or $-A_2x_2 > A_1x_1 > (-A_2x_2 + 1)/2$.

Proof. A chip at vertex \mathbf{x} requires at least $\|\mathbf{x}\|_\infty$ time steps to arrive at the origin. Hence, $\text{INF}(\mathbf{x}, \mathbf{A}, t) = 0$ for $t < \|\mathbf{x}\|_\infty$. We show that $\text{INF}(\mathbf{x}, \mathbf{A}, \cdot)$ has at most two extrema larger than $\|\mathbf{x}\|_\infty$. The discrete derivative of $\text{INF}(\mathbf{x}, \mathbf{A}, t)$ in t is

$$\text{INF}(\mathbf{x}, \mathbf{A}, t+2) - \text{INF}(\mathbf{x}, \mathbf{A}, t) = \frac{p(\mathbf{x}, \mathbf{A}, t) \cdot ((t-1)!)^2}{4^{t+2} \left(\frac{t+x_1+2}{2}\right)! \left(\frac{t-x_1+2}{2}\right)! \left(\frac{t+x_2+2}{2}\right)! \left(\frac{t-x_2+2}{2}\right)!}$$

with $p(\mathbf{x}, \mathbf{A}, t) := (4A_1x_1 + 4A_2x_2)t^4 + (-A_1x_1^3 - A_2x_2^3 - A_1x_1x_2^2 - A_2x_2x_1^2 - 6A_1x_1A_2x_2 + 19A_1x_1 + 19A_2x_2)t^3 + (A_1x_1^3A_2x_2 + A_1x_1A_2x_2^3 - 4A_1x_1^3 - 4A_2x_2^3 - 4A_1x_1x_2^2 - 4A_2x_2x_1^2 - 23A_1x_1A_2x_2 + 30A_1x_1 + 30A_2x_2)t^2 + (A_1x_1^3x_2^2 + A_2x_2^3x_1^2 + 4A_1x_1^3A_2x_2 + 4A_1x_1A_2x_2^3 - 4A_1x_1^3 - 4A_2x_2^3 - 4A_1x_1x_2^2 - 4A_2x_2x_1^2 - 32A_1x_1A_2x_2 + 16A_1x_1 + 16A_2x_2)t - A_1x_1^3A_2x_2^3 + 4A_1x_1^3A_2x_2 + 4A_1x_1A_2x_2^3 - 16A_1x_1A_2x_2$. We observe that the number of extrema of $\text{INF}(\mathbf{x}, \mathbf{A}, \cdot)$ is exactly the number of roots of $p(\mathbf{x}, \mathbf{A}, \cdot)$. Since this a polynomial of degree 4 in t , we can use Descartes' Sign Rule and some elementary case distinctions to show that $p(\mathbf{x}, \mathbf{A}, \cdot)$ has at most two roots larger than $\|\mathbf{x}\|_\infty$. A closer calculation reveals that $p(\mathbf{x}, \mathbf{A}, \cdot)$ has precisely two roots larger than $\|\mathbf{x}\|_\infty$ if $\|\mathbf{x}\|_\infty > 6$ and one of $-A_1x_1 > A_2x_2 > (-A_1x_1 + 1)/2$ and $-A_2x_2 > A_1x_1 > (-A_2x_2 + 1)/2$ hold. \square

Lemma 7. For all $\mathbf{x} \in V$ and $\mathbf{A}^{(1)}, \mathbf{A}^{(2)} \in \text{DIR}$ such that $\mathbf{A}^{(1)} \neq \mathbf{A}^{(2)}$, $\text{INF}(\mathbf{x}, (\mathbf{A}^{(1)}, \mathbf{A}^{(2)}), t)$ is unimodal in t .

Proof. The discrete derivative of $\text{INF}(\mathbf{x}, (\mathbf{A}^{(1)}, \mathbf{A}^{(2)}), t)$ is

$$\begin{aligned} & \text{INF}(\mathbf{x}, (\mathbf{A}^{(1)}, \mathbf{A}^{(2)}), t+2) - \text{INF}(\mathbf{x}, (\mathbf{A}^{(1)}, \mathbf{A}^{(2)}), t) \\ &= \frac{(p(\mathbf{x}, \mathbf{A}^{(1)}, t) + p(\mathbf{x}, \mathbf{A}^{(2)}, t)) \cdot ((t-1)!)^2}{4^{t+2} \left(\frac{t+x_1+2}{2}\right)! \left(\frac{t-x_1+2}{2}\right)! \left(\frac{t+x_2+2}{2}\right)! \left(\frac{t-x_2+2}{2}\right)!} \end{aligned}$$

with $p(\mathbf{x}, \mathbf{A}, t)$ as defined in the proof of Lemma 6. As there, the extrema of INF are the roots of the quartic function $p(\mathbf{x}, \mathbf{A}^{(1)}, t) + p(\mathbf{x}, \mathbf{A}^{(2)}, t)$. Descartes' Sign Rule now shows that $p(\mathbf{x}, \mathbf{A}^{(1)}, t) + p(\mathbf{x}, \mathbf{A}^{(2)}, t)$ has at most one root larger than $\|\mathbf{x}\|_\infty$ for all \mathbf{x} and $\mathbf{A}^{(1)} \neq \mathbf{A}^{(2)}$. \square

6 Maximal contribution of a vertex

We now fix a position \mathbf{x} and a rotor sequence \mathcal{R} to examine $\text{MAXCON}(\mathbf{x})$. Lemmas 6 and 7 show that $\sum_{\mathbf{A} \in \mathcal{A}} \text{INF}(\mathbf{x}, \mathbf{A}, t)$ is bimodal in t for all finite sequences $\mathcal{A} := (\mathbf{A}^{(1)}, \mathbf{A}^{(2)}, \dots)$ of rotor directions ordered according to \mathcal{R} . Hence, for all \mathcal{A} there are at most two times at which the monotonicity of $\sum_{\mathbf{A} \in \mathcal{A}} \text{INF}(\mathbf{x}, \mathbf{A}, t)$ changes. A time t at which the monotonicity of $\sum_{\mathbf{A} \in \mathcal{A}} \text{INF}(\mathbf{x}, \mathbf{A}, t)$ changes for some \mathcal{A} is called *extremal*. In case of ambiguities, we define the first such time to be extremal. That is, for unimodal $\sum_{\mathbf{A} \in \mathcal{A}} \text{INF}(\mathbf{x}, \mathbf{A}, t)$, we choose the first time t_1 such that $\sum_{\mathbf{A} \in \mathcal{A}} \text{INF}(\mathbf{x}, \mathbf{A}, t)$ is monotone for $t \leq t_1$ and $t \geq t_1$. Analogously, for strictly bimodal $\sum_{\mathbf{A} \in \mathcal{A}} \text{INF}(\mathbf{x}, \mathbf{A}, t)$, we choose the first times t_1 and t_2 such that $\sum_{\mathbf{A} \in \mathcal{A}} \text{INF}(\mathbf{x}, \mathbf{A}, t)$ is monotone for $t \leq t_1$, $t_1 \leq t \leq t_2$, and $t \geq t_2$. The set of all *extremal times* is denoted by $\text{EX}(\mathbf{x})$.

$\text{EX}(\mathbf{x})$ can be computed easily. By equation (4) it suffices to consider \mathcal{A} of length one and two. The corresponding extremal times are the (rounded) roots of the polynomials $p(\mathbf{x}, \mathbf{A}, t)$ and $p(\mathbf{x}, \mathbf{A}^{(1)}, t) + p(\mathbf{x}, \mathbf{A}^{(2)}, t)$ given in Lemma 6. The following lemma shows that the number of extremal times is very limited.

Lemma 8. $|\text{EX}(\mathbf{x})| \leq 7$

Proof. According to Lemma 6, there is at most one rotor direction \mathbf{A} for which $\text{INF}(\mathbf{x}, \mathbf{A}, t)$ is *strictly* bimodal in t . Hence, the number of extremal times of $\text{INF}(\mathbf{x}, \mathcal{A}, t)$ with $|\mathcal{A}| = 1$ is at most five. For a rotor sequence $\mathcal{R} = (\mathbf{R}^{(1)}, \mathbf{R}^{(2)}, \mathbf{R}^{(3)}, \mathbf{R}^{(4)})$, equation (3) and Lemma 7 show that $\text{INF}(\mathbf{x}, (\mathbf{R}^{(1)}, \mathbf{R}^{(2)}), t) = -\text{INF}(\mathbf{x}, (\mathbf{R}^{(3)}, \mathbf{R}^{(4)}), t)$ and $\text{INF}(\mathbf{x}, (\mathbf{R}^{(2)}, \mathbf{R}^{(3)}), t) = -\text{INF}(\mathbf{x}, (\mathbf{R}^{(4)}, \mathbf{R}^{(1)}), t)$ are unimodal in t . Therefore, the total number of extremal times of $\text{INF}(\mathbf{x}, (\mathbf{A}^{(1)}, \mathbf{A}^{(2)}), t)$ with $(\mathbf{A}^{(1)}, \mathbf{A}^{(2)})$ obeying \mathcal{R} is at most two. \square

Between two successive times $t_1, t_2 \in \text{EX}(\mathbf{x}) \cup \{0, T\}$, $\sum_{\mathbf{A} \in \mathcal{A}} \text{INF}(\mathbf{x}, \mathbf{A}, t)$ is monotone in t for all \mathcal{A} . Such periods of time $[t_1, t_2]$ we call a *phase*. Note that $\sum_{\mathbf{A} \in \mathcal{A}} \text{INF}(\mathbf{x}, \mathbf{A}, t)$ could also be constant in a certain phase. This implies that it is monotonically increasing as well as monotonically decreasing. To avoid this ambiguity, we use the terms increasing and decreasing (in contrast to monotonically increasing and decreasing) based on the minima and maxima at extremal times $\text{EX}(\mathbf{x})$, which are unambiguously defined and alternating. We now define precisely when a function $\sum_{\mathbf{A} \in \mathcal{A}} \text{INF}(\mathbf{x}, \mathbf{A}, t)$ is increasing or decreasing. Consider the set E of the extremal times of $\sum_{\mathbf{A} \in \mathcal{A}} \text{INF}(\mathbf{x}, \mathbf{A}, t)$ as defined above. By Lemmas 6 and 7 we know that $|E| \in \{1, 2\}$. We call $\sum_{\mathbf{A} \in \mathcal{A}} \text{INF}(\mathbf{x}, \mathbf{A}, t)$ *increasing* at t if it has a minimum at the maximal $t' \in E$ with $t' < t$ or a maximum at the minimal $t' \in E$ with $t' > t$. Analogously, we call $\sum_{\mathbf{A} \in \mathcal{A}} \text{INF}(\mathbf{x}, \mathbf{A}, t)$ *decreasing*

at t if has a maximum at the maximal $t' \in E$ with $t' < t$ or a minimum at the minimal $t' \in E$ with $t' > t$.

By abuse of language, let us say that \mathbf{x} sends odd chips at time t if $f(\mathbf{x}, T - t) \not\equiv 0 \pmod{4}$.

Lemma 9. *Let \mathcal{C}_1 be an arbitrary configuration with run-time $T \geq \max \text{EX}(\mathbf{x})$ and let $\text{CON}_{\mathcal{C}_1}(\mathbf{x})$ be the corresponding contribution of \mathbf{x} . Then there is a configuration \mathcal{C}_2 with the same run-time and $\text{CON}_{\mathcal{C}_1}(\mathbf{x}) \leq \text{CON}_{\mathcal{C}_2}(\mathbf{x})$ that sends odd chips only at extremal times, i.e., for the associated f satisfies $f(\mathbf{x}, T - t) \not\equiv 0 \pmod{4}$ only if $t \in \text{EX}(\mathbf{x})$.*

Proof. Let \mathcal{C}_2 be a configuration with $\text{CON}_{\mathcal{C}_2}(\mathbf{x}) \geq \text{CON}_{\mathcal{C}_1}(\mathbf{x})$ and a minimal number of non-extremal times at which odd chips are sent from \mathbf{x} . We assume this number to be greater than zero and show a contradiction.

The sum of the INFs of all chips sent at a certain non-extremal time t is either increasing or decreasing in the phase t lies in.

Let us first assume that it is increasing. Let t' be the minimal t' such that $t' \in \text{EX}(\mathbf{x})$ or there are odd chips sent at time t' (assume for the moment that such a t' exists). Then, sending the considered pile of odd chips at time t' instead of time t decreases the number of non-extremal times while not decreasing its contribution. Such a modified configuration exists by Theorem 1 and contradicts our assumption on \mathcal{C}_2 . Therefore, there is no such time t' . This implies that t lies in the last phase and that the odd chips sent at time t are the last to be sent at all. By $\lim_{t \rightarrow \infty} \text{INF}(\mathbf{x}, \mathbf{A}, t) = 0$ for all \mathbf{A} , the contribution of the chips sent at time t is negative (since increasing). Hence, not sending these chips at all does not decrease $\text{CON}_{\mathcal{C}_2}(\mathbf{x})$, but the number of non-extremal times.

The same line of argument holds if the sum of the INFs is decreasing instead of increasing. In this case we use that $\text{INF}(\mathbf{x}, \mathbf{A}, t) = 0$ for all $t < \|\mathbf{x}\|_\infty$. \square

Lemma 9 immediately gives the following corollary.

Corollary 10. *There is an initial configuration and a time T such that $\text{CON}(\mathbf{x}) = \text{MAXCON}(\mathbf{x})$. The configuration can be chosen such that $f(\mathbf{x}, T - t) \not\equiv 0 \pmod{4}$ only if $t \in \text{EX}(\mathbf{x})$. T can be chosen arbitrarily as long as $T \geq \max \text{EX}(\mathbf{x})$.*

Lemma 8 and Corollary 10 already give a simple, but costly approach to calculate $\text{MAXCON}(\mathbf{x})$: There are four different initial rotor directions for \mathbf{x} and at each (of the at most seven) extremal time we can either send 0, 1, 2, or 3 odd chips. As

all subsequent rotor directions are chosen according to \mathcal{R} , there are only a constant $4 \cdot 4^7 = 65536$ configurations to consider. The maximum of the respective $\text{CON}(\mathbf{x})$ will be $\text{MAXCON}(\mathbf{x})$ by Corollary 10.

Fortunately, we can also find the worst-case configuration directly. A *block* of a phase $[t_1, t_2]$ is a 4-tupel $(\mathbf{A}^{(1)}, \mathbf{A}^{(2)}, \mathbf{A}^{(3)}, \mathbf{A}^{(4)}) \in \text{DIR}^4$ of rotor directions in the order of \mathcal{R} such that $\sum_{i=1}^k \text{INF}(\mathbf{x}, \mathbf{A}^{(i)}, t)$ is increasing in t in this phase for all $k \in \{1, 2, 3\}$. By equation (3), this is equivalent to $\sum_{i=k}^4 \text{INF}(\mathbf{x}, \mathbf{A}^{(i)}, t)$ being decreasing in t within the phase for all $k \in \{2, 3, 4\}$.

Lemma 11. *Each phase has a unique block. This is determined by the monotonicities of $\text{INF}(\mathbf{x}, \mathcal{A}, t)$ with $|\mathcal{A}| \in \{1, 2\}$.*

Proof. Consider a fixed phase. We want to show that for all valid combinations of monotonicities of $\text{INF}(\mathbf{x}, \mathcal{A}, t)$ with $|\mathcal{A}| \in \{1, 2\}$ within this phase, there is exactly one permutation $(\mathbf{A}^{(1)}, \mathbf{A}^{(2)}, \mathbf{A}^{(3)}, \mathbf{A}^{(4)})$ of DIR obeying \mathcal{R} such that $(\mathbf{A}^{(1)}, \mathbf{A}^{(2)}, \mathbf{A}^{(3)}, \mathbf{A}^{(4)})$ forms a block.

To describe the *type* of monotonicity of $\text{INF}(\mathbf{x}, \mathbf{A}, t)$ within the phase, we use a function τ with $\tau(\mathbf{A}) := \rightarrow$ if $\text{INF}(\mathbf{x}, \mathbf{A}, t)$ is increasing and $\tau(\mathbf{A}) := \leftarrow$ if it is decreasing. This notation should indicate the direction in which the respective $\text{INF}(\mathbf{x}, \mathbf{A}, t)$ is increasing. As a short form we also use $\tau(\mathbf{A}^{(1)}, \mathbf{A}^{(2)}, \mathbf{A}^{(3)}, \mathbf{A}^{(4)}) := (\tau(\mathbf{A}^{(1)}), \tau(\mathbf{A}^{(2)}), \tau(\mathbf{A}^{(3)}), \tau(\mathbf{A}^{(4)}))$.

By equation (3), we know that there is at least one \mathbf{A} of type \rightarrow . If there is exactly one direction \mathbf{A} of type \rightarrow , then the unique permutation $(\mathbf{A}^{(1)}, \mathbf{A}^{(2)}, \mathbf{A}^{(3)}, \mathbf{A}^{(4)})$ of DIR obeying \mathcal{R} such that $\tau(\mathbf{A}^{(1)}, \mathbf{A}^{(2)}, \mathbf{A}^{(3)}, \mathbf{A}^{(4)}) = (\rightarrow, \leftarrow, \leftarrow, \leftarrow)$ is the uniquely defined block. If there are three rotor directions \mathbf{A} of type \rightarrow , the block is analogously uniquely defined by $\tau(\mathbf{A}^{(1)}, \mathbf{A}^{(2)}, \mathbf{A}^{(3)}, \mathbf{A}^{(4)}) = (\rightarrow, \rightarrow, \rightarrow, \leftarrow)$.

It remains to examine the case of exactly two rotor directions of type \rightarrow . If these two directions are consecutive in \mathcal{R} , $\tau(\mathbf{A}^{(1)}, \mathbf{A}^{(2)}, \mathbf{A}^{(3)}, \mathbf{A}^{(4)}) = (\rightarrow, \rightarrow, \leftarrow, \leftarrow)$ again defines the unique block. Otherwise, rotor directions of type \rightarrow and \leftarrow are alternating in the rotor sequence and $(\rightarrow, \leftarrow, \rightarrow, \leftarrow)$ is the only type possible for a block. This allows two blocks $(\mathbf{A}^{(1)}, \mathbf{A}^{(2)}, \mathbf{A}^{(3)}, \mathbf{A}^{(4)})$ and $(\mathbf{A}^{(3)}, \mathbf{A}^{(4)}, \mathbf{A}^{(1)}, \mathbf{A}^{(2)})$. The choice between these two is uniquely fixed by the monotonicity of $\text{INF}(\mathbf{x}, (\mathbf{A}^{(1)}, \mathbf{A}^{(2)}), t)$. Therefore, in all cases there is exactly one unique block. \square

We now use Lemma 11 to define a particular configuration, which we call *block configuration*. By Theorem 1, we may specify a configuration sufficiently well by fixing the number of odd chips at all times and locations. In a block configuration \mathcal{B} , a vertex \mathbf{x} sends odd chips only at extremal times $t \in \text{EX}(\mathbf{x})$. Let $(\hat{\mathbf{A}}^{(1)}, \hat{\mathbf{A}}^{(2)}, \hat{\mathbf{A}}^{(3)}, \hat{\mathbf{A}}^{(4)})$ and

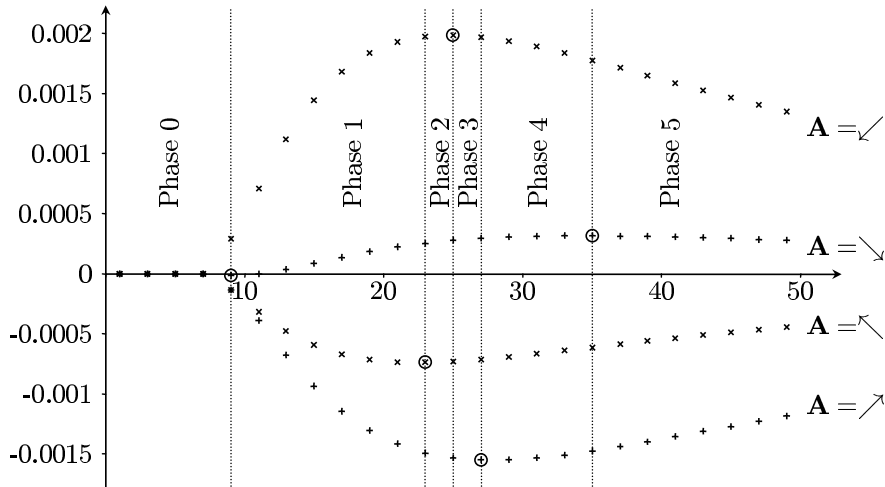


Figure 1: $\text{INF}\left(\binom{5}{9}, \mathbf{A}, t\right)$ for $\mathbf{A} \in \{\nearrow, \searrow, \swarrow, \nwarrow\}$. The circles indicate the extrema.

$(\bar{\mathbf{A}}^{(1)}, \bar{\mathbf{A}}^{(2)}, \bar{\mathbf{A}}^{(3)}, \bar{\mathbf{A}}^{(4)})$ denote the blocks in the phases ending and starting at t . Then \mathbf{x} sends k chips at time t in directions $(\mathbf{A}^{(1)}, \dots, \mathbf{A}^{(k)})$, where k is such that $0 \leq k \leq 3$ and $(\dots, \hat{\mathbf{A}}^{(4)}, \mathbf{A}^{(1)}, \dots, \mathbf{A}^{(k)}, \bar{\mathbf{A}}^{(1)}, \dots)$ obeys \mathcal{R} . This uniquely defines when and in which directions odd chips are sent. Note that we used the blocks only as a technical tool. There are not necessarily chips sent corresponding to $\hat{\mathbf{A}}^{(1)}, \hat{\mathbf{A}}^{(2)}, \hat{\mathbf{A}}^{(3)}, \hat{\mathbf{A}}^{(4)}$ and $\bar{\mathbf{A}}^{(1)}, \bar{\mathbf{A}}^{(2)}, \bar{\mathbf{A}}^{(3)}, \bar{\mathbf{A}}^{(4)}$. By Theorem 1, there are configurations \mathcal{B} as just defined and for all \mathbf{x} all of them have the same contribution $\text{CON}_{\mathcal{B}}(\mathbf{x})$.

Example. We now derive the block configuration of the position $\mathbf{x} = \binom{5}{9}$ with the clockwise rotor sequence $\mathcal{R} = (\nearrow, \searrow, \swarrow, \nwarrow)$. By calculating the roots of the polynomials $p(\mathbf{x}, \mathbf{A}, t)$ and $p(\mathbf{x}, \mathbf{A}^{(1)}, t) + p(\mathbf{x}, \mathbf{A}^{(2)}, t)$ given in Lemma 6, it is easy to verify that

- $\text{INF}(\mathbf{x}, \nearrow, t)$ is unimodal with minimum at $t = 27$.
- $\text{INF}(\mathbf{x}, \searrow, t)$ is bimodal with minimum at $t = 9$ and maximum at $t = 35$,
- $\text{INF}(\mathbf{x}, \swarrow, t)$ is unimodal with maximum at $t = 25$,
- $\text{INF}(\mathbf{x}, \nwarrow, t)$ is unimodal with minimum at $t = 23$,
- $\text{INF}(\mathbf{x}, (\nearrow, \searrow), t)$ and $\text{INF}(\mathbf{x}, (\nwarrow, \swarrow), t)$ are unimodal with minimum at $t = 27$.
- $\text{INF}(\mathbf{x}, (\searrow, \swarrow), t)$ and $\text{INF}(\mathbf{x}, (\swarrow, \nwarrow), t)$ are unimodal with maximum at $t = 27$.

Hence, the extremal points are $\text{EX}(\mathbf{x}) = \{9, 23, 25, 27, 35\}$. Figure 1 depicts the plots of $\text{INF}(\mathbf{x}, \mathbf{A}, t)$. The modes of $\text{INF}(\mathbf{x}, \mathcal{A}, t)$ listed above uniquely determine the blocks

of each phase. The following table lists rotor directions and type of the block of each phase.

Phase	Boundaries of the phase		Block of the phase	
	lower	upper	Rotor directions	Type
0	0	9	$\swarrow \nearrow \swarrow \nearrow$	$\rightarrow \leftarrow \leftarrow \leftarrow$
1	9	23	$\swarrow \searrow \swarrow \nearrow$	$\rightarrow \rightarrow \leftarrow \leftarrow$
2	23	25	$\swarrow \searrow \swarrow \nearrow$	$\rightarrow \rightarrow \leftarrow \leftarrow$
3	25	27	$\swarrow \searrow \swarrow \nearrow$	$\rightarrow \leftarrow \rightarrow \leftarrow$
4	27	35	$\swarrow \nearrow \swarrow \searrow$	$\rightarrow \rightarrow \rightarrow \leftarrow$
5	35	T	$\swarrow \nearrow \swarrow \searrow$	$\rightarrow \rightarrow \leftarrow \leftarrow$

This yields the following (maximal as we will see shortly) contribution at $\mathbf{x} = \binom{5}{9}$:

$$\begin{aligned} \text{CON}(\mathbf{x}) &= \text{INF}(\mathbf{x}, \swarrow, 9) + \text{INF}(\mathbf{x}, \nwarrow, 9) + \text{INF}(\mathbf{x}, \nearrow, 9) + \\ &\quad \text{INF}(\mathbf{x}, \searrow, 27) + \text{INF}(\mathbf{x}, \swarrow, 27) \\ &= \frac{20,506,216,364,597}{9,007,199,254,740,992} \approx 0.002277. \end{aligned}$$

Note that just sending a single chip in the worst direction \swarrow at its worst time $t = 25$ gives a smaller contribution of $\text{INF}(\mathbf{x}, \swarrow, 25) \approx 0.001985$. Also, sending two chips in directions \searrow and \swarrow at time $27 = \text{argmax}_t \text{INF}(\mathbf{x}, (\searrow, \swarrow), t)$ gives $\text{INF}(\mathbf{x}, (\searrow, \swarrow), 27) \approx 0.002261$. Hence we do profit from sending a chip in the “wrong” direction \nearrow at time 9.

The values of $\text{CON}(\binom{5}{9})$ for other rotor sequences are shown in the following table.

Rotor sequence	Times and directions of odd chips in a block configuration	$\text{CON}(\binom{5}{9})$
$(\nearrow, \searrow, \swarrow, \nwarrow)$	9 : $\swarrow \nwarrow \nearrow$, 27 : $\searrow \swarrow$	0.002277...
$(\nearrow, \nwarrow, \swarrow, \searrow)$	23 : $\swarrow \searrow \nearrow$, 27 : $\nwarrow \swarrow$, 35 : \searrow	0.002309...
$(\nearrow, \nwarrow, \searrow, \swarrow)$	9 : $\swarrow \nearrow \nwarrow$, 23 : $\searrow \swarrow \nearrow$, 27 : $\nwarrow \searrow \swarrow$	0.002302...
$(\nearrow, \swarrow, \searrow, \nwarrow)$	25 : \swarrow , 35 : \searrow	0.002230...
$(\nearrow, \searrow, \nwarrow, \swarrow)$	17 : $\swarrow \nearrow$, 27 : $\searrow \nwarrow \swarrow$	0.002083...
$(\nearrow, \swarrow, \nwarrow, \searrow)$	25 : \swarrow	0.001985...

Lemma 12. *A block configuration yields a contribution of $\text{MAXCON}(\mathbf{x})$.*

Proof. Consider a configuration \mathcal{C} with contribution $\text{CON}_{\mathcal{C}}(\mathbf{x}) = \text{MAXCON}(\mathbf{x})$. By previous considerations, we can further assume the following.

- (1) \mathcal{C} only sends odd chips at times $t \in \text{EX}(\mathbf{x})$ (cf. Corollary 10).
- (2) \mathcal{C} sends at least seven chips at each time $t \in \text{EX}(\mathbf{x})$ (cf. equation (3)).
- (3) Let $t_1, t_2 \in \text{EX}(\mathbf{x})$ such that $[t_1, t_2]$ is a phase and let $k \in \{1, 2, 3\}$. Let $\mathbf{A}^{(1)}, \dots, \mathbf{A}^{(k)}$ be the directions the last k chips are sent from vertex \mathbf{x} at time t_1 . If $\sum_{i=1}^k \text{INF}(\mathbf{x}, \mathbf{A}^{(i)}, t)$ is increasing (cf. definition on page 12) in $[t_1, t_2]$, then it is not constant. This is a feasible assumption on \mathcal{C} , since otherwise we could send these k chips at time t_2 without changing $\text{CON}_{\mathcal{C}}(\mathbf{x})$.
- (4) Analogously, let $t_1, t_2 \in \text{EX}(\mathbf{x})$ such that $[t_1, t_2]$ is a phase and let $j \in \{1, 2, 3\}$. Let $\mathbf{A}^{(1)}, \dots, \mathbf{A}^{(j)}$ be the directions the first j chips are sent from vertex \mathbf{x} at time t_2 . If $\sum_{i=1}^j \text{INF}(\mathbf{x}, \mathbf{A}^{(i)}, t)$ is decreasing in $[t_1, t_2]$, then it is not constant.

Let \mathcal{B} be a block configuration. Aiming at a contradiction, we assume $\text{CON}_{\mathcal{C}}(\mathbf{x}) > \text{CON}_{\mathcal{B}}(\mathbf{x})$. Since by Assumption (1) and the definition of \mathcal{B} both configurations send odd chips only at times in $\text{EX}(\mathbf{x})$, there is a time $t \in \text{EX}(\mathbf{x})$ at which the chips of \mathcal{C} contribute more than the chips of \mathcal{B} .

We now closely examine the chips sent from \mathbf{x} at time t by both configurations. We know that \mathcal{B} sends a uniquely determined number $\ell \in \{0, \dots, 3\}$ of odd chips at time t in some directions $\mathbf{A}^{(1)}, \dots, \mathbf{A}^{(\ell)}$. By the above Assumption (2), \mathcal{C} also sends a sequence of chips in directions $\mathbf{A}^{(1)}, \dots, \mathbf{A}^{(\ell)}$. Let j and k denote the number of chips sent by \mathcal{C} at time t before and after these ℓ chips, respectively. By ignoring, possible piles of four chips, we may assume $j, k \leq 3$.

Assume that $k \geq 1$. Then the sum of the INFs of the last k chips \mathcal{C} sends at time t is increasing by the definition of a block. Assume first that t is not the last extremal time, that is, there is some $t_2 \in \text{EX}(\mathbf{x})$ such that $[t, t_2]$ form a phase. Then by Assumption (3) above, the sum of the INFs of the last k chips is strictly increasing in $[t, t_2]$. Hence, a configuration which sends these chips instead at t_2 has a larger contribution, in contradiction to the maximality of \mathcal{C} . Now let t be the last extremal time. From $\lim_{t \rightarrow \infty} \text{INF}(\mathbf{x}, \mathbf{A}, t) = 0$ for all \mathbf{A} and the fact that the sum of the INFs of the last k chips is increasing, we see that it is not positive. Hence the last k chips do not contribute positively to $\text{CON}_{\mathcal{C}}(\mathbf{x})$.

Analogously, assume that $j \geq 1$. Assume first that t is not the first extremal time, that is, $[t_1, t]$ form a phase for some $t_1 \in \text{EX}(\mathbf{x})$. By Assumption (4), the first j chips \mathcal{C} sends at time t have a strictly monotonically decreasing sum of INFs. Hence sending them at time t_1 instead of t gives a larger contribution, again contradicting the maximality

of \mathcal{C} . If t is the first extremal time of \mathbf{x} , then $\text{INF}(\mathbf{x}, \mathbf{A}, t) = 0$ for all \mathbf{A} and $t < \|\mathbf{x}\|_\infty$ shows, similarly as above, that the contribution of the first j chips is not positive.

We conclude that the first j and last k chips sent from \mathbf{x} and time t in \mathcal{C} , if they are present, do not contribute positively to the contribution of \mathbf{x} . This contradicts our assumption $\text{CON}_{\mathcal{C}}(\mathbf{x}) > \text{CON}_{\mathcal{B}}(\mathbf{x})$. \square

With the help of a computer, we can now calculate $\text{MAXCON}(\mathbf{x})$ for all \mathbf{x} . Using about two months on a Xeon 3 GHz CPU, we computed the maximal contribution of all vertices in $[-800, 800]^2$. If we have the same rotor sequence for all vertices then

$$\sum_{\|\mathbf{x}\|_\infty \leq 800} \text{MAXCON}(\mathbf{x}) = \begin{cases} 7.832\dots & \text{for a circular rotor sequence} \\ 7.286\dots & \text{for a non-circular rotor sequence.} \end{cases} \quad (5)$$

On the other hand, if we allow a different rotor sequence for each vertex, and further assume that each vertex has a rotor sequence leading to the maximal contribution, then we get

$$\sum_{\|\mathbf{x}\|_\infty \leq 800} \text{MAXCON}(\mathbf{x}) = 7.873\dots$$

Since all MAXCONS are non-negative, above values are a lower bound for $\sum_{\mathbf{x} \in V} \text{MAXCON}(\mathbf{x})$, and hence for the single vertex discrepancy by Theorem 4.

Remark. Lemma 8 shows that the number of extremal times of a vertex is at most seven. However, a block configuration does not send odd chips at all extremal times. Let $\widehat{\text{EX}}(\mathbf{x})$ denote the set of extremal times at which odd chips are sent by the block configuration. Figure 4 at the end of the paper shows that there are vertices \mathbf{x} such that $|\widehat{\text{EX}}(\mathbf{x})| \geq 3$. We now sketch a proof that $|\widehat{\text{EX}}(\mathbf{x})| \leq 4$ for all \mathbf{x} .

Note that $|\widehat{\text{EX}}(\mathbf{x})|$ only depends on the relative order of the extremal points and the initial monotonicity (i.e., increasing or decreasing) of $\text{INF}(\mathbf{x}, \mathcal{A}, t)$ for $|\mathcal{A}| \leq 2$. We use the following two properties of INF (derived from equation (3)):

- In each phase there is at least one $\mathbf{A} \in \text{DIR}$ such that $\text{INF}(\mathbf{x}, \mathbf{A}, t)$ is increasing (or decreasing).
- If $\text{INF}(\mathbf{x}, \mathbf{A}^{(1)}, t)$ and $\text{INF}(\mathbf{x}, \mathbf{A}^{(2)}, t)$ are both increasing or decreasing in a phase, so is $\text{INF}(\mathbf{x}, (\mathbf{A}^{(1)}, \mathbf{A}^{(2)}), t)$.

For a vertex \mathbf{x} with only unimodal $\text{INF}(\mathbf{x}, \mathbf{A}, t)$, there are $6! = 720$ permutations of the extrema of $\text{INF}(\mathbf{x}, \mathbf{A}, t)$ and $\text{INF}(\mathbf{x}, (\mathbf{A}^{(1)}, \mathbf{A}^{(2)}), t)$ and $2^6 = 64$ initial monotonicities

(using equation (4)). A simple check by a computer shows that for only 384 of these 46080 cases both properties from above are satisfied. For all of them, $|\widehat{\text{EX}}(\mathbf{x})| \leq 3$ holds. For vertices \mathbf{x} with $\text{INF}(\mathbf{x}, \mathbf{A}, t)$ strictly bimodal for an $\mathbf{A} \in \text{DIR}$, there are $7!/2! = 2520$ permutations of the extrema and $2^6 = 64$ initial monotonicities. Here, all 408 cases which satisfy both properties only achieve $|\widehat{\text{EX}}(\mathbf{x})| \leq 4$. This proves $|\widehat{\text{EX}}(\mathbf{x})| \leq 4$ for all \mathbf{x} . Figure 4 shows $|\widehat{\text{EX}}(\mathbf{x})| \leq 3$ for all $\|\mathbf{x}\|_\infty \leq 10$. We could also verify this for $\|\mathbf{x}\|_\infty \leq 800$. Therefore, we actually expect $|\widehat{\text{EX}}(\mathbf{x})| \leq 3$ to hold for all \mathbf{x} . To bridge this gap, stronger properties of INF seem necessary.

7 Tail Estimates

In the previous section, we have calculated the values of $\sum_{\|\mathbf{x}\|_\infty \leq 800} \text{MAXCON}(\mathbf{x})$ depending on the rotor sequence. To show that these are good approximations for the maximal single vertex discrepancy, we need to find an upper bound on

$$E := \sum_{\|\mathbf{x}\|_\infty > 800} \text{MAXCON}(\mathbf{x}).$$

In this section, we will prove $E < 0.16$.

We now fix an arbitrary initial configuration and a time T . A simple calculation based on the definitions of INF and CON gives for all \mathbf{x} , \mathbf{A} , and t

$$\begin{aligned} \text{INF}(\mathbf{x}, \mathbf{A}, t) &= ((A_1 x_1 \cdot A_2 x_2) t^{-2} - (A_1 x_1 + A_2 x_2) t^{-1}) H(\mathbf{x}, t), \\ \text{CON}(\mathbf{x}) &= \sum_{\substack{i \geq 0, \\ s_i(\mathbf{x}) < T}} \left(\frac{A_1^{(i)} x_1 \cdot A_2^{(i)} x_2}{(T - s_i(\mathbf{x}))^2} - \frac{A_1^{(i)} x_1 + A_2^{(i)} x_2}{T - s_i(\mathbf{x})} \right) H(\mathbf{x}, T - s_i(\mathbf{x})) \end{aligned} \quad (6)$$

with $s_i(\mathbf{x})$ as defined in Section 4 and $\mathbf{A}^{(i)} := \text{NEXT}^i(\text{ARR}(\mathbf{x}, 0))$. Note that, independent of the chosen rotor sequence, each of the sequences $(A_1^{(i)}(\mathbf{x}))_{i \geq 0}$, $(A_2^{(i)}(\mathbf{x}))_{i \geq 0}$, and $(A_1^{(i)}(\mathbf{x}) A_2^{(i)}(\mathbf{x}))_{i \geq 0}$ is alternating or alternating in groups of two. To bound the alternating sums in equation (6), we use the following fact, which is an elementary extension of Lemma 4 in [2].

Lemma 13. *Let $f: X \rightarrow \mathbb{R}$ be non-negative and unimodal with $X \subseteq \mathbb{R}$. Let $A^{(0)}, \dots, A^{(n)} \in \{-1, +1\}$ and $t_0, \dots, t_n \in X$ such that $t_0 \leq \dots \leq t_n$. If $A^{(i)}$ is al-*

ternating or alternating in groups of two, then

$$\left| \sum_{i=0}^n A^{(i)} f(t_i) \right| \leq 2 \max_{x \in X} f(x).$$

It remains to show that $H(\mathbf{x}, t)/t$ and $H(\mathbf{x}, t)/t^2$ are indeed unimodal. Note that $\text{INF}(\mathbf{x}, \mathbf{A}, t)$ itself is not always unimodal as shown in Lemma 6.

Lemma 14. *For all $\mathbf{x} \in V$, $H(\mathbf{x}, t)/t$ and $H(\mathbf{x}, t)/t^2$ are unimodal in t with global maxima at $t_{\max}(\mathbf{x})$ and $t'_{\max}(\mathbf{x})$, respectively. For the maxima $(x_1^2 + x_2^2)/4 - 2 \leq t_{\max}(\mathbf{x}) \leq (x_1^2 + x_2^2)/4 + 1$ and $(x_1^2 + x_2^2)/6 - 1 \leq t'_{\max}(\mathbf{x}) \leq (x_1^2 + x_2^2)/6 + 2$ holds.*

Proof. By symmetry, let us assume $x_1 \leq x_2$. By definition, $H(\mathbf{x}, t)/t = 0$ for $t < x_2$. We show that $H(\mathbf{x}, t)/t$ has only one maximum in $t \in [x_2, \infty)$. We compute

$$\frac{H(\mathbf{x}, t-2)}{t-2} - \frac{H(\mathbf{x}, t)}{t} = \frac{4^{-t} p(t) (t-3)!^2 (t-2)}{\left(\frac{t+x_1}{2}\right)! \left(\frac{t-x_1}{2}\right)! \left(\frac{t+x_2}{2}\right)! \left(\frac{t-x_2}{2}\right)!}$$

with $p(t) := 4t^3 - (x_1^2 + x_2^2 + 5)t^2 + 2t + x_1^2 x_2^2$. By Descartes' Sign Rule (cf. Theorem 5), $p(t)$ has at most one real root larger than x_2 . Since

$$\begin{aligned} p\left(\frac{x_1^2 + x_2^2}{4}\right) &= \frac{1}{16} (6x_1^2 x_2^2 + 8x_1^2 + 8x_2^2 - 5x_1^4 - 5x_2^4) < 0, \\ p\left(\frac{x_1^2 + x_2^2 + 5}{4}\right) &= x_1^2 x_2^2 + \frac{x_1^2 + x_2^2 + 5}{2} > 0. \end{aligned}$$

we see that $H(\mathbf{x}, t)/t$ has a unique extremum, which is a maximum, in $[(x_1^2 + x_2^2)/4 - 2, (x_1^2 + x_2^2)/4 + 1]$. This proves the lemma for $H(\mathbf{x}, t)/t$. The analogous proof for $H(\mathbf{x}, t)/t^2$ is omitted. \square

By equation (6), Lemmas 13 and 14 we obtain

$$E \leq 4E_1 + 2E_2$$

with

$$E_1 := \sum_{\|\mathbf{x}\|_\infty > 800} \left| \frac{x_1 H(\mathbf{x}, t_{\max}(\mathbf{x}))}{t_{\max}(\mathbf{x})} \right|, \quad E_2 := \sum_{\|\mathbf{x}\|_\infty > 800} \left| \frac{x_1 x_2 H(\mathbf{x}, t'_{\max}(\mathbf{x}))}{(t'_{\max}(\mathbf{x}))^2} \right|.$$

Using Lemma 14 and $H(\mathbf{x}, t) \leq (2^{-t} \binom{t}{t/2})^2 \leq 1/t$, we now derive upper bounds for $H(\mathbf{x}, t)/t$ and $H(\mathbf{x}, t)/t^2$ for $\|\mathbf{x}\|_\infty \geq 88$:

$$\left| \frac{H(\mathbf{x}, t_{\max}(\mathbf{x}))}{t_{\max}(\mathbf{x})} \right| \leq \frac{1}{t_{\max}(\mathbf{x})^2} \leq \frac{16}{(x_1^2 + x_2^2 - 8)^2} \leq \frac{17}{(x_1^2 + x_2^2)^2},$$

$$\left| \frac{H(\mathbf{x}, t'_{\max}(\mathbf{x}))}{t'_{\max}(\mathbf{x})^2} \right| \leq \frac{1}{t'_{\max}(\mathbf{x})^3} \leq \frac{216}{(x_1^2 + x_2^2 - 6)^3} \leq \frac{217}{(x_1^2 + x_2^2)^3}.$$

For the calculations in the remainder of this section we need the following estimates. All of them can be derived by bounding the infinite sums with integrals.

- $\sum_{x>y} \frac{1}{x^k} \leq \frac{1}{(k-1)y^{k-1}}$ for all $y > 0$ and all constants $k > 1$.
- $\sum_{x_2=0}^{\infty} \frac{1}{(x_1^2 + x_2^2)^2} \leq \frac{7}{3x_1^3}$ for all $x_1 \geq 1$.
- $\sum_{y \geq \beta} \frac{1}{(\alpha^2 + y^2)y} \geq \frac{\ln(\alpha^2 + \beta^2) - 2 \ln(\beta)}{2\alpha^2}$.
- $\sum_{\substack{y > \alpha, \\ y \equiv c \pmod{2}}} \frac{y}{(y^2 + \gamma^2)^2} \leq \frac{1}{4(\alpha^2 + \gamma^2)}$.
- $\sum_{\substack{y > \alpha, \\ y \equiv c \pmod{2}}} \frac{1}{(y^2 + \gamma^2)^2} \leq \frac{(\pi - 2 \arctan(\frac{\alpha}{\gamma}))(\alpha^2 + \gamma^2) - 2\alpha\gamma}{8(\alpha^2 + \gamma^2)\gamma^3}$.
- $\sum_{y > \beta} \frac{\pi - 2 \arctan(\frac{\alpha}{y})}{y^2} \leq \frac{\ln(\alpha^2 + \beta^2) - 2 \ln(\beta)}{\alpha} + \frac{\pi - 2 \arctan(\frac{\alpha}{\beta})}{\beta}$.

With this, we can now bound E_2 easily:

$$\begin{aligned} E_2 &\leq \sum_{\|\mathbf{x}\|_{\infty} > 800} \left| \frac{217x_1x_2}{(x_1^2 + x_2^2)^3} \right| \leq \sum_{\|\mathbf{x}\|_{\infty} > 800} \left| \frac{217}{2(x_1^2 + x_2^2)^2} \right| \\ &< \sum_{x_1=1}^{800} \sum_{x_2 > 800} \frac{434}{(x_1^2 + x_2^2)^2} + \sum_{x_1 > 800} \sum_{x_2 \geq 0} \frac{434}{(x_1^2 + x_2^2)^2} \\ &< \sum_{x_1=1}^{800} \sum_{x_2 > 800} \frac{434}{x_2^2} + \sum_{x_1 > 800} \frac{3038}{3x_1^3} \\ &\leq \frac{434}{3 \cdot 800^2} + \frac{1519}{3 \cdot 800^2} < 0.0011. \end{aligned} \tag{7}$$

Achieving a good bound for E_1 is significantly harder. We divide E_1 in three subsums:

$$\begin{aligned}
E_1 &< \underbrace{4 \sum_{x_1=1}^{800} \sum_{\substack{x_2=801, \\ x_2 \equiv x_1 \pmod{2}}}^{\infty} \frac{x_1 H(\mathbf{x}, t_{\max}(\mathbf{x}))}{t_{\max}(\mathbf{x})}}_{\text{see equation (9)}} + \underbrace{4 \sum_{x_1=801}^{\infty} \sum_{\substack{x_2=1, \\ x_2 \equiv x_1 \pmod{2}}}^{800} \frac{x_1 H(\mathbf{x}, t_{\max}(\mathbf{x}))}{t_{\max}(\mathbf{x})}}_{\text{see equation (10)}} \\
&+ \underbrace{4 \sum_{x_1=801}^{\infty} \sum_{\substack{x_2=801, \\ x_2 \equiv x_1 \pmod{2}}}^{\infty} \frac{x_1 H(\mathbf{x}, t_{\max}(\mathbf{x}))}{t_{\max}(\mathbf{x})}}_{\text{see equation (11)}} < 0.038. \tag{8}
\end{aligned}$$

Now we bound these sums separately as follows.

$$\begin{aligned}
4 \sum_{x_1=1}^{800} \sum_{\substack{x_2=801, \\ x_2 \equiv x_1 \pmod{2}}}^{\infty} \frac{x_1 H(\mathbf{x}, t_{\max}(\mathbf{x}))}{t_{\max}(\mathbf{x})} &< 68 \sum_{x_1=1}^{800} x_1 \sum_{\substack{x_2 > 800, \\ x_2 \equiv x_1 \pmod{2}}} \frac{1}{(x_1^2 + x_2^2)^2} \\
&\leq \frac{17}{2} \sum_{x_1=1}^{800} \frac{(800^2 + x_1^2)(\pi - 2 \arctan(800/x_1)) - 1600 x_1}{(x_1^2 + 800^2) x_1^2} < 0.0046. \tag{9}
\end{aligned}$$

$$\begin{aligned}
4 \sum_{x_1=801}^{\infty} \sum_{\substack{x_2=0, \\ x_2 \equiv x_1 \pmod{2}}}^{800} \frac{x_1 H(\mathbf{x}, t_{\max}(\mathbf{x}))}{t_{\max}(\mathbf{x})} &< 68 \sum_{x_2=0}^{800} \sum_{\substack{x_1 > 800, \\ x_1 \equiv x_2 \pmod{2}}} \frac{x_1}{(x_1^2 + x_2^2)^2} \\
&\leq 17 \sum_{x_2=0}^{800} \frac{1}{x_2^2 + 800^2} < 0.0167 \tag{10}
\end{aligned}$$

$$\begin{aligned}
4 \sum_{x_1=801}^{\infty} \sum_{\substack{x_2=801, \\ x_2 \equiv x_1 \pmod{2}}}^{\infty} \frac{x_1 H(\mathbf{x}, t_{\max}(\mathbf{x}))}{t_{\max}(\mathbf{x})} &\leq 68 \sum_{x_1 > 800} x_1 \sum_{\substack{x_2 > 800, \\ x_2 \equiv x_1 \pmod{2}}} \frac{1}{(x_1^2 + x_2^2)^2} \\
&\leq \frac{17}{2} \sum_{x_1 > 800} \frac{(\pi - 2 \arctan(\frac{800}{x_1}))(800^2 + x_1^2) - 1600 x_1}{(800^2 + x_1^2) x_1^2} \\
&\leq \frac{17}{2} \left(\frac{\ln(2 \cdot 800^2) - 2 \ln(800)}{800} + \frac{\pi/2}{800} - \frac{\ln(2 \cdot 801^2) - 2 \ln(801)}{801} \right) \\
&< 0.0167. \tag{11}
\end{aligned}$$

Putting this together, we obtain

$$E < 4 \cdot 0.038 + 2 \cdot 0.0011 < 0.16. \tag{12}$$

This upper bound on E is not tight. However, it suffices to prove that the bounds for the single vertex discrepancy calculated in Section 6 do depend on the rotor sequence.

Theorem 4 and Equations (5) and (12) yield the following theorem.

Theorem 15. *The maximal single vertex discrepancy between Propp machine and linear machine is a constant c_2 , which depends on the allowed rotor sequences:*


- *If all vertices have the same circular rotor sequence, $7.832 \leq c_2 \leq 7.985$.*
- *If all vertices have the same non-circular rotor sequence, $7.286 \leq c_2 \leq 7.439$.*
- *If all vertices may have different rotor sequences, and we assume that each vertex has a rotor sequence leading to a maximal contribution, then $7.873 \leq c_2 \leq 8.026$.*

8 Aggregating Model


Besides the small single vertex discrepancies examined in the previous sections, Propp machine and random walk bear striking similarities also in other respects. The historically first research started by Jim Propp regarded an aggregating model called Internal Diffusion-Limited Aggregation (IDLA) [3]. In physics this is a well-established model to describe condensation around a source.

The process starts with an empty grid. In each round, a particle is inserted at the origin and does a (quasi)-random walk until it occupies the first empty site it reaches. For the random walk, it is well known that the shape of the occupied locations converges to a Euclidean ball [6] in the following sense. Let n be the number of particles and let $\Delta(n)$ denote the difference of the radius of the largest inscribed and the smallest circumscribed circle of an aggregation with n chips. It has been shown by Lawler [5] that the fluctuations around the limiting shape are bounded by $\tilde{O}(n^{1/6})$ with high probability. Moore and Machta [10] observed experimentally that these error terms were even smaller, namely poly-logarithmic.

The analogous model in which the particles do a rotor-router walk instead of a random walk is much less understood. Levine [7] showed that after n particles have been added, the Propp aggregation contains a disc of radius $\Omega(n^{1/4})$. Levine and Peres [8, 9] proved that the shape of occupied locations converges to a Euclidean ball, however, in a weaker sense than before. They showed that the Lebesgue measure of the symmetric difference between the Propp aggregation and an appropriately scaled Euclidean ball centered at the origin is $O(n^{1/3})$. Surprisingly, experimental results indicate much stronger bounds. Kleber [4] computed that for counter-clockwise permutations of the

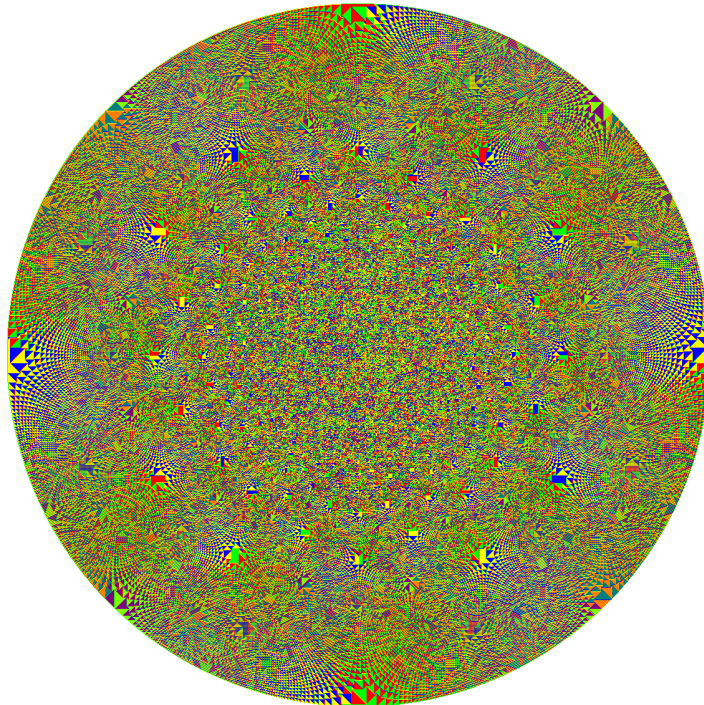

(a) Counterclockwise rotor sequence ($\uparrow, \leftarrow, \downarrow, \rightarrow$).

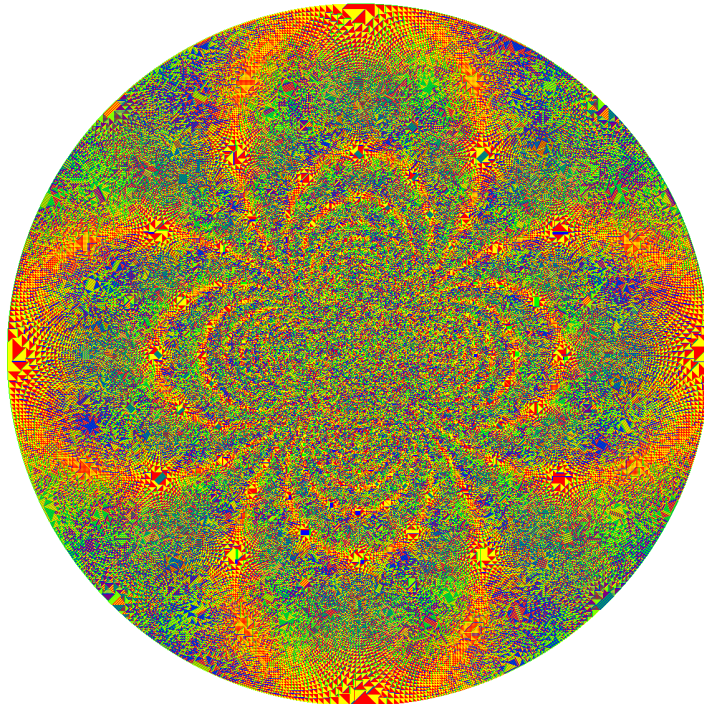

(b) Non-circular rotor sequence ($\uparrow, \leftarrow, \rightarrow, \downarrow$).

Figure 2: Propp aggregations with one million particles. All rotors initially point to the left. The final rotor directions up, left, down, and right are denoted by the colors red, yellow, green, and blue, respectively.

rotor directions $\Delta(3 \cdot 10^6) \approx 1.611$ if all rotors initially point to the left. An apparent conjecture is that there is a constant δ such that $\Delta(n) \leq \delta$ for all n .

We reran these experiments with different rotor sequences. The aggregations for one million particles are shown in Figure 2. Both aggregations do not only differ in the color patterns, but also in the precise value of $\Delta(n)$. If all rotors are initially set to the left, we obtained the following values for $\Delta(n)$.

Rotor sequence	$(\leftarrow, \uparrow, \rightarrow, \downarrow)$	$(\leftarrow, \uparrow, \downarrow, \rightarrow)$	$(\leftarrow, \rightarrow, \uparrow, \downarrow)$
average $\Delta(n)$ for $2 \cdot 10^6 < n \leq 3 \cdot 10^6$	1.600	0.996	1.810
maximal $\Delta(n)$ for $n \leq 3 \cdot 10^6$	1.741	1.218	1.967

It is noteworthy that the respective $\Delta(n)$ of both non-circular rotor sequences $(\leftarrow, \uparrow, \downarrow, \rightarrow)$ and $(\leftarrow, \rightarrow, \uparrow, \downarrow)$ differ considerably.

Additionally, we also examined $\Delta(n)$ for random initial rotor directions. This leads to slightly larger Δ -values. The following table shows averages and standard deviations of 100 aggregations with random initial directions of the rotors.

Rotor sequence	$(\leftarrow, \uparrow, \rightarrow, \downarrow)$	$(\leftarrow, \uparrow, \downarrow, \rightarrow)$	$(\leftarrow, \rightarrow, \uparrow, \downarrow)$
average $\Delta(n)$ for $2 \cdot 10^6 < n \leq 3 \cdot 10^6$	1.920 ± 0.004	1.782 ± 0.003	1.781 ± 0.003
maximal $\Delta(n)$ for $n \leq 3 \cdot 10^6$	2.541 ± 0.051	2.351 ± 0.053	2.364 ± 0.067

As one might have expected, for random initial rotor directions the two non-circular rotor sequences (columns one and three) are statistically not distinguishable.

The results above again show that different rotor sequences do make a difference. The main open problem, however, remains to show the conjectured constant upper bound for $\Delta(n)$.

9 Conclusion

One way of comparing the Propp machine with a random walk is in terms of the maximal discrepancy that can occur on a single vertex. It has been shown by Cooper and Spencer [1] that for the underlying graph being an infinite grid \mathbb{Z}^d , this single vertex discrepancy can be bounded by a constant c_d independent of the particular

initial configuration. For $d = 1$, this constant has been estimated as $c_1 \approx 2.29$ in [2]. Also, the initial configurations leading to a high discrepancy have been described. For $d \geq 2$, no such results were known.

In this paper, we regarded the case $d = 2$. We chose the case $d = 2$ out of two considerations. On the one hand, from dimension two on, there is more than one rotor sequence available, which raises the question if different rotors sequences make a difference. On the other hand, we restrict ourselves to $d = 2$, because for larger d a nice expression for the probability $H(\mathbf{x}, t)$ that a chip from vertex \mathbf{x} arrives at the origin after t random steps is missing. This probably makes it very hard to find sufficiently sharp estimates for the single vertex discrepancies.

We were able to give relatively tight estimates for the constants c_2 taking into account different rotor sequences and obtain several interesting facts about the worst-case initial configurations. The maximal single vertex discrepancy c_2 satisfies the following. If all vertices have the same circular rotor sequence, $7.832 \leq c_2 \leq 7.985$. If all vertices have the same non-circular rotor sequence, $7.286 \leq c_2 \leq 7.439$. If all vertices may have different rotor sequences, and we assume that each vertex has a rotor sequence leading to a maximal contribution, then $7.873 \leq c_2 \leq 8.026$. In particular, we see that non-circular rotor sequences seem to produce smaller discrepancies than circular one. The gaps between upper and lower bounds stem from the fact that we used a computer to calculate the precise maximal contribution $\text{CON}(\mathbf{x} - \mathbf{y})$ of vertex \mathbf{x} on the discrepancy at \mathbf{y} . Hence the lower bounds are the maximal discrepancies obtained from initial configurations such that all vertices \mathbf{x} with $\|\mathbf{x} - \mathbf{y}\|_\infty > 800$ at all times contain numbers of chips only that are divisible by 4.

We also learned that the initial configurations leading to such discrepancies are more complicated than in the one-dimensional case. Recall from [2] that in the one-dimensional case in a worst-case setting each position needs to have an odd number of chips only once. If we aim at a surplus of chips in the Propp model, these odd chips were always sent towards the position under consideration, otherwise away from it.

In the two-dimensional case, things are more complicated. Here it can be necessary that a position holds a number of chips not divisible by 4 up to three times. Also, the number of “odd” chips (those which cannot be put into piles of four) can be as high as nine. In consequence, it can make sense to send odd chips in the wrong direction (e.g., away from the position where we aim at a surplus of chips). An example showing this was analyzed in Section 6. The reason for such behavior seems to be that the influences $\text{INF}(\mathbf{x}, A, t)$ of odd chips sent from \mathbf{x} in direction A at time t are not unimodal functions in t anymore (as in the one-dimensional case).

In Figures 3 to 6, more information about the behavior of different positions in a worst-case setting (aiming at a surplus of chips at the origin) is collected.

We also briefly regarded the IDLA aggregation model. We saw that the surprisingly strong convergence to a Euclidian ball observed in earlier research also holds for non-circular rotor sequences and non-regular initial rotor settings. However, the suspected constant again seems to depend on the rotor sequences, and again, the circular ones seem to behave slightly worse than the non-circular ones.


Acknowledgments

We would like to thank Joel Spencer and Jim Propp for several very inspiring discussions.


References

- [1] Joshua Cooper and Joel Spencer. Simulating a random walk with constant error. *Combinatorics, Probability and Computing*. To appear, preliminary version available from arXiv:math/0402323.
- [2] Joshua Cooper, Benjamin Doerr, Joel Spencer, and Gábor Tardos. Deterministic random walks on the integers. *European Journal of Combinatorics*. To appear, preliminary version available from arXiv:math/0602300.
- [3] Persi Diaconis and William Fulton. A growth model, a game, an algebra, Lagrange inversion, and characteristic classes. *Rend. Sem. Mat. Univ. Pol. Torino*, 49(1): 95–119, 1990.
- [4] Michael Kleber. Goldbug Variations. *The Mathematical Intelligencer*, 27(1), 2005. Also available from arXiv:math/0501497.
- [5] Gregory F. Lawler. Subdiffusive fluctuations for internal diffusion limited aggregation. *Annals of Probability*, 23(1):71–86, 1995.
- [6] Gregory F. Lawler, Maury Bramson, and David Griffeath. Internal diffusion limited aggregation. *Annals of Probability*, 20(4):2117–2140, 1992.
- [7] Lionel Levine. The rotor-router model. Senior thesis, Harvard University, 2004. Also available from arXiv:math/0409407.

- [8] Lionel Levine and Yuval Peres. Spherical asymptotics for the rotor-router model in \mathbb{Z}^d , 2005. arXiv:math/0503251.
- [9] Lionel Levine and Yuval Peres. The rotor-router shape is spherical. *The Mathematical Intelligencer*, 27(3):9–11, 2005.
- [10] Cristopher Moore and Jonathan Machta. Internal diffusion-limited aggregation: Parallel algorithms and complexity. *Journal of Statistical Physics*, 99(3–4):661–690, 2000.
- [11] Chee Keng Yap. *Fundamental problems of algorithmic algebra*. Oxford University Press, Inc., New York, NY, USA, 2000.

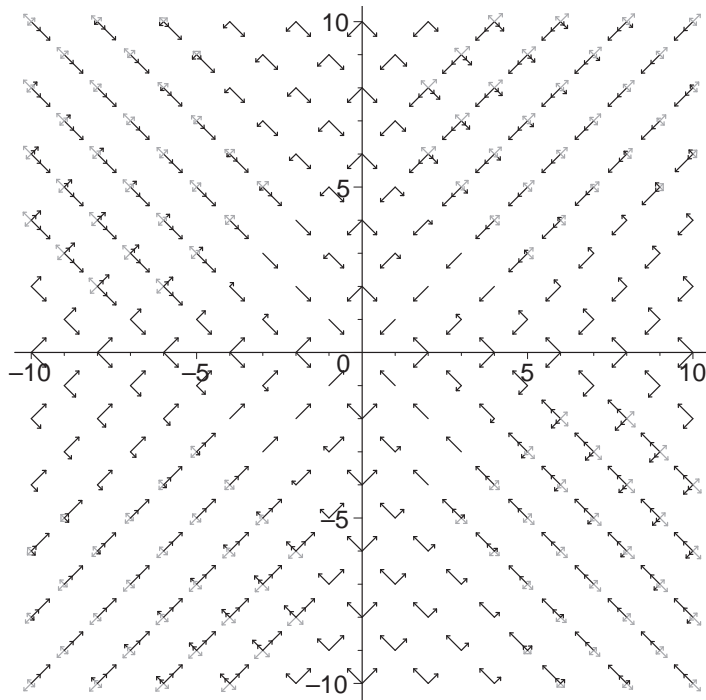


(a) Counterclockwise rotor sequence ($\nearrow, \nwarrow, \searrow, \swarrow$).

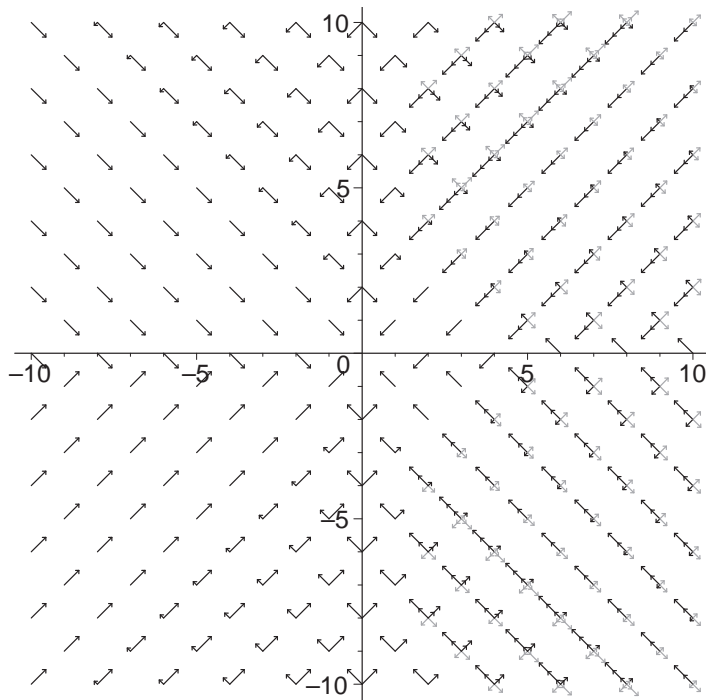


(b) Non-circular rotor sequence ($\nearrow, \nwarrow, \searrow, \swarrow$).

Figure 3: At each position, the directions in which odd chips are sent in a block configuration are shown. If there are multiple chips sent from one position, the arrows are scaled according to their relative contribution. Grey arrows represent negative contributions. For position $\binom{5}{9}$, the second and third row of the second table on page 16 contains more details on the times when these chips are sent.

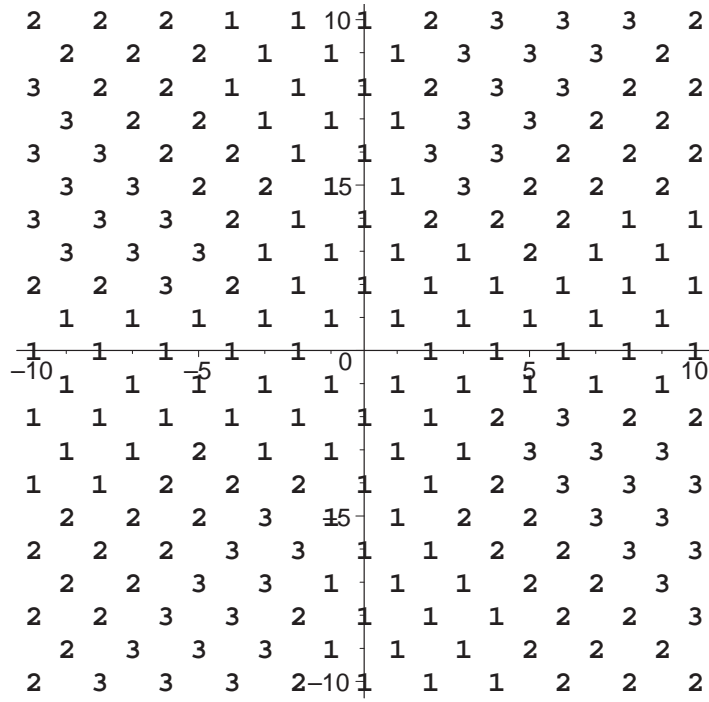


(a) Counterclockwise rotor sequence ($\nearrow, \nwarrow, \swarrow, \searrow$).

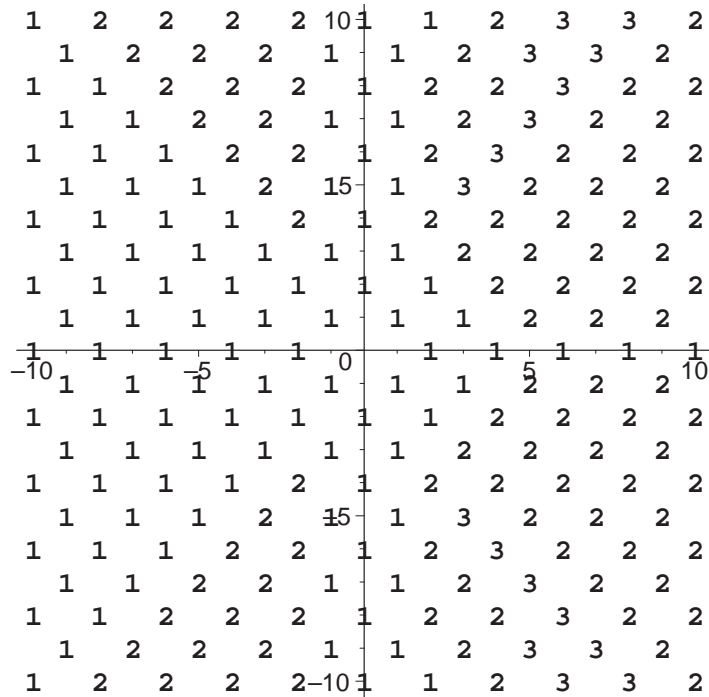


(b) Non-circular rotor sequence ($\nearrow, \nwarrow, \searrow, \swarrow$).

Figure 4: Number of times at which a block configuration sends odd chips. Note that the remark on page 18 only proved $|\widehat{EX}(\mathbf{x})| \leq 4$, though there is no position \mathbf{x} observable with $|\widehat{EX}(\mathbf{x})| > 3$.

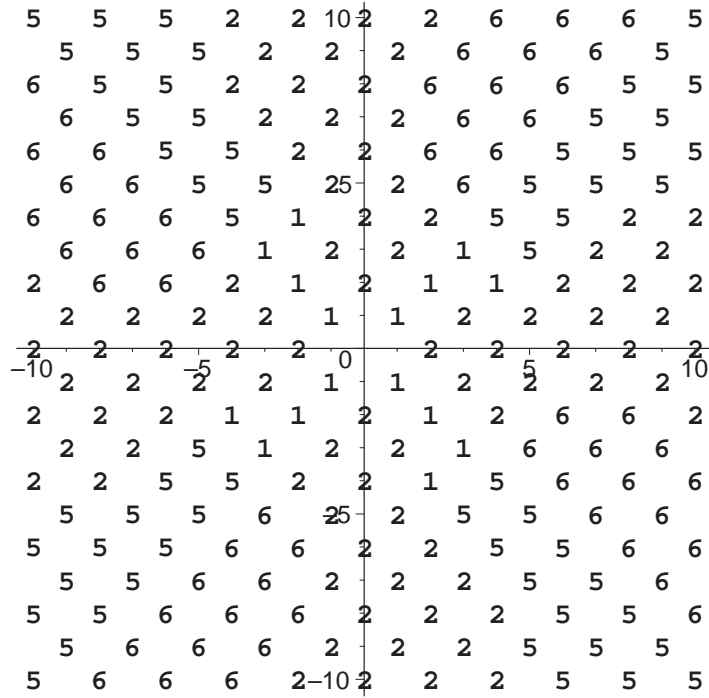

(a) Counterclockwise rotor sequence ($\nearrow, \nwarrow, \swarrow, \searrow$).

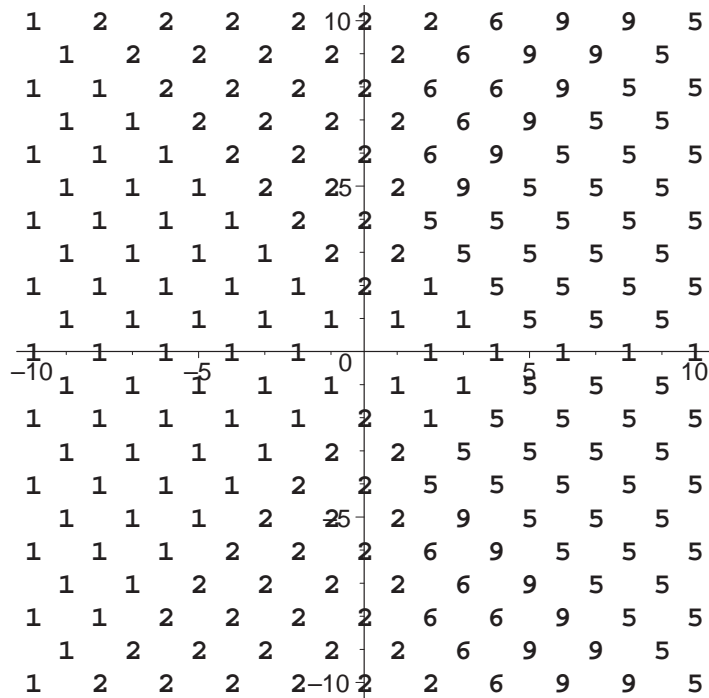

(b) Non-circular rotor sequence ($\nearrow, \nwarrow, \swarrow, \searrow$).

Figure 5: Number of odd chips sent in a block configuration. The largest number of nine odd chips occurs only in (b), not in (a).

0.8	1.1	1.5	2.1	2.6	10.8	2.6	2.1	1.6	1.1	0.8
1.1	1.6	2.3	3.1	3.7	3.7	3.1	2.3	1.6	1.1	
1.1	1.6	2.4	3.6	4.8	5.5	4.9	3.6	2.4	1.6	1.1
1.6	2.5	3.9	5.9	7.9	7.9	6.1	3.9	2.5	1.6	
1.6	2.4	4.1	7.0	11	13	11	7.0	4.1	2.4	1.5
2.3	3.9	7.4	14	21	21	14	7.4	3.9	2.3	
2.1	3.6	7.0	16	31	47	34	16	7.0	3.6	2.1
3.1	6.1	14	47	94	94	47	14	5.9	3.1	
2.6	4.9	11	34	188	250	188	31	11	4.8	2.6
3.7	7.9	21	94	750	750	94	21	7.9	3.7	
2.8	5.5	13	47	250	0	250	47	13	5.5	2.8
-10	3.7	7.9	21	94	750	750	94	21	7.9	10
2.6	4.8	11	31	188	250	188	34	11	4.9	2.6
3.1	5.9	14	47	94	94	47	14	6.1	3.1	
2.1	3.6	7.0	16	34	47	31	16	7.0	3.6	2.1
2.3	3.9	7.4	14	21	21	14	7.4	3.9	2.3	
1.5	2.4	4.1	7.0	11	13	11	7.0	4.1	2.4	1.6
1.6	2.5	3.9	6.1	7.9	7.9	5.9	3.9	2.5	1.6	
1.1	1.6	2.4	3.6	4.9	5.5	4.8	3.6	2.4	1.6	1.1
1.1	1.6	2.3	3.1	3.7	3.7	3.1	2.3	1.6	1.1	
0.8	1.1	1.6	2.1	2.6	10.8	2.6	2.1	1.5	1.1	0.8

(a) Counterclockwise rotor sequence ($\nearrow, \nwarrow, \swarrow, \searrow$).

0.8	1.1	1.5	2.1	2.6	10.8	2.6	2.1	1.5	1.1	0.8
1.1	1.6	2.3	3.1	3.7	3.7	3.1	2.3	1.6	1.1	
1.0	1.6	2.4	3.6	4.9	5.5	4.9	3.6	2.5	1.6	1.1
1.5	2.4	3.9	6.0	7.9	7.9	6.0	4.0	2.5	1.6	
1.4	2.3	4.0	6.9	11	13	11	7.2	4.2	2.4	1.4
2.0	3.7	7.2	14	21	21	14	7.8	3.9	2.1	
1.6	3.0	6.5	16	34	47	33	17	7.0	3.2	1.7
2.3	4.9	13	47	94	94	52	14	5.1	2.4	
1.6	3.3	8.3	31	188	250	188	33	8.7	3.5	1.7
2.2	4.8	14	78	750	750	78	15	4.9	2.2	
1.4	2.7	6.5	23	125	0	125	23	6.5	2.7	1.4
-10	2.2	4.8	14	78	750	750	78	15	4.9	10
1.6	3.3	8.3	31	188	250	188	33	8.7	3.5	1.7
2.3	4.9	13	47	94	94	52	14	5.1	2.4	
1.6	3.0	6.5	16	34	47	33	17	7.0	3.2	1.7
2.0	3.7	7.2	14	21	21	14	7.8	3.9	2.1	
1.4	2.3	4.0	6.9	11	13	11	7.2	4.2	2.4	1.4
1.5	2.4	3.9	6.0	7.9	7.9	6.0	4.0	2.5	1.6	
1.0	1.6	2.4	3.6	4.9	5.5	4.9	3.6	2.5	1.6	1.1
1.1	1.6	2.3	3.1	3.7	3.7	3.1	2.3	1.6	1.1	
0.8	1.1	1.5	2.1	2.6	10.8	2.6	2.1	1.5	1.1	0.8

(b) Non-circular rotor sequence ($\nearrow, \nwarrow, \searrow, \swarrow$).

Figure 6: Contributions $\text{MAXCON}(\mathbf{x})$ times 1000. Note the symmetries discussed in Section 6 and the quick descent of $\text{MAXCON}(\mathbf{x})$ for increasing $\|\mathbf{x}\|_2$.