

## ARCHITECTURE-DEPENDENT EXECUTION TIME OF SHOR'S ALGORITHM

RODNEY VAN METER<sup>1\*</sup>, KOHEI M. ITOH<sup>1</sup> AND THADDEUS D. LADD<sup>2</sup>

<sup>1</sup>GRADUATE SCHOOL OF SCIENCE AND TECHNOLOGY, KEIO UNIVERSITY AND  
CREST-JST

3-14-1 HIYOSHI, KOHOKU-KU, YOKOHAMA-SHI, KANAGAWA 223-8522, JAPAN

<sup>2</sup>EDWARD L. GINZTON LABORATORY

STANFORD UNIVERSITY, STANFORD, CA, 94305-4085, USA

We show how the execution time of algorithms on quantum computers depends on the architecture of the quantum computer, the choice of algorithms (including subroutines such as arithmetic), and the “clock speed” of the quantum computer. The primary architectural features of interest are the ability to execute multiple gates concurrently, the number of application-level qubits available, and the interconnection network of qubits. We analyze Shor’s algorithm for factoring large numbers in this context. Our results show that, if arbitrary interconnection of qubits is possible, a machine with an application-level clock speed of as low as one-third of a (possibly encoded) gate per second could factor a 576-bit number in under one month, potentially outperforming a large network of classical computers. For nearest-neighbor-only architectures, a clock speed of around twenty-seven gates per second is required.

### 1. Introduction

Quantum computers are currently being designed that will take advantage of quantum mechanical effects to perform certain computations much faster than can be achieved using current (“classical”) computers<sup>1</sup>. Many technological approaches have been proposed, some of which are being investigated experimentally. DiVincenzo proposed five criteria which must be met by any useful quantum computing technology<sup>2</sup>. In addition to these criteria, a useful quantum computing technology must also support a quantum computer *system architecture* which can run one or more quantum algorithms in a usefully short time. This observation subsumes into one requirement several issues which, while not strictly necessary to build a quantum computer, will have a strong impact on the possibility of engineering a practical system. These include the importance of gate “clock” speed, support for concurrent gate operations, the total number of application-level qubits supportable, and the complexities of the qubit interconnect network<sup>3</sup>.

This paper discusses the impact of these architectural elements on algorithm execution time using the example of Shor’s algorithm for factoring large numbers<sup>4</sup>. Shor’s algorithm ignited much of the current interest in quantum computing because of the improvement in computational class it appears to offer on this important problem. Using Shor’s algorithm, a quantum computer can solve the problem in polynomial time, for a superpolynomial speed-

---

\*e-mail address: rdv@tera.ics.keio.ac.jp.

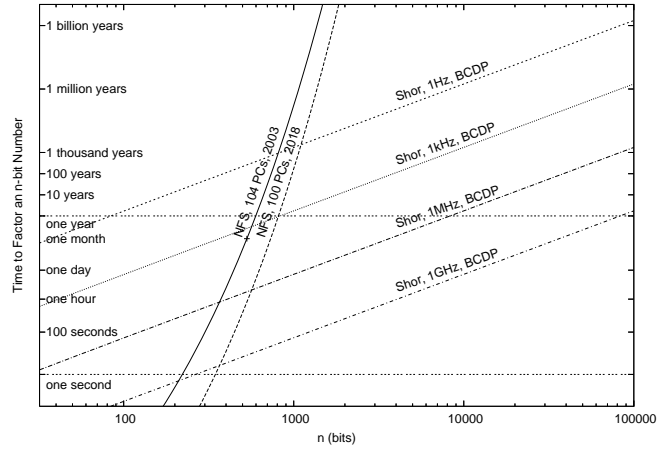


Figure 1. Scaling of number field sieve (NFS) on classical computers and Shor's algorithm for factoring on a quantum computer, using BCDP modular exponentiation with various clock rates. Both horizontal and vertical axes are log scale. The horizontal axis is the size of the number being factored.

up. Shor's algorithm is theoretically important, well defined, and utilizes building blocks (arithmetic, the quantum Fourier transform) with broad applicability, making it ideal for our analysis.

On a classical computer, or a collection thereof, the time and computing resources to factor a large number, using the fastest known algorithm, scale superpolynomially in the length of the number (in decimal digits or bits). This algorithm is the generalized number field sieve (NFS)<sup>5</sup>. Its asymptotic computational complexity on large numbers is

$$O(e^{(nk \log^2 n)^{1/3}}) \tag{1}$$

where  $n$  is the length of the number, in bits, and  $k = \frac{64}{9} \log 2$ . The comparable computational complexity to factor a number  $N$  using Shor's algorithm is dominated by the time to exponentiate a randomly chosen number  $x$ , modulo  $N$ , for a superposition of all possible exponents. Therefore, efficient arithmetic algorithms for calculating modular exponentiation in the quantum domain are critical.

Very often clock speed and other architectural features are ignored as issues in quantum computing devices, assuming that the superpolynomial speed-up will dominate, making the algorithm practical on any experimentally realizable quantum computer. Shor's algorithm runs in polynomial time, but the details of the polynomial matter: what degree is the polynomial, and what are the constant factors?

An immediate comparison of the execution time to factor a number on classical and quantum computers is shown in Figure 1. The performance of Shor's algorithm on a quantum computer using the Beckman-Chari-Devabhaktuni-Preskill (BCDP) modular exponentiation algorithm<sup>6</sup> is compared to classical computers running the general Number Field Sieve (NFS). The steep curves are for NFS on a set of classical computers. The left curve is extrapolated performance based on a previous world record, factoring a 530-bit number

in one month, established using 104 PCs and workstations made in 2003<sup>7</sup>. The right curve is speculative performance using 1,000 times as much computing power. This could be 100,000 PCs in 2003, or, based on Moore's law, 100 PCs in 2018. From these curves it is easy to see that Moore's law has only a modest effect on our ability to factor large numbers. The shallower curves on the figure are predictions of the performance of a quantum computer running Shor's algorithm, using the BCDP modular exponentiation routine, which uses  $5n$  qubits to factor an  $n$ -bit number, requiring  $\sim 54n^3$  gate times to run the algorithm on large numbers. The four curves are for different clock rates from 1 Hz to 1 GHz. The performance scales linearly with clock speed. Factoring a 576-bit number in one month of calendar time requires a clock rate of 4 kHz. A 1 MHz clock will solve the problem in about three hours. If the clock rate is only 1 Hz, the same factoring problem will take more than three hundred years.

The performance of the BCDP modular exponentiation algorithm is almost independent of architecture. However, the performance of most polynomial-time algorithms varies noticeably depending on the system architecture<sup>8,9</sup>. The main objective of this paper is to show how we can improve the execution time shown in Figure 1 by understanding the relationship of architecture and algorithm.

## 2. Results

We have analyzed two separate architectures, still technology independent but with some important features that help us understand performance. The AC (*abstract concurrent*) architecture is our abstract model, akin to what is commonly used when drawing quantum circuits. It supports arbitrary concurrency and gate operands any distance apart without penalty. The second architecture, NTC (*neighbor-only, two-qubit gate, concurrent*), assumes the qubits are laid out in a one-dimensional line, and only neighboring qubits can interact. This is a reasonable description of several important experimental approaches, including a one-dimensional chain of quantum dots<sup>10</sup>, the original Kane proposal<sup>11</sup>, and the all-silicon NMR device<sup>12</sup>.

Above the architecture resides the choice of algorithm, especially for basic arithmetic operations. The computational complexity of an algorithm can be calculated for total cost, or for *latency* or *circuit depth*, if the dependencies of variables allow multiple parts of a computation to be conducted concurrently. Fundamentally, the computational complexity of quantum modular exponentiation is  $O(n^3)$ <sup>13,6</sup>, that is, the execution cost grows as the cube of the number of qubits. It consists of  $2n$  modular multiplications of  $n$ -bit numbers, each of which consists of  $O(n)$  additions, each of which requires  $O(n)$  operations. However,  $O(n^3)$  operations do not necessarily require  $O(n^3)$  time steps; the *circuit depth* can be made shallower than  $O(n^3)$  by performing portions of the calculation concurrently.

On an abstract machine, we can reduce the running time of each of the three layers (addition, multiplication, exponentiation) to  $O(\log n)$  time steps by running some of the gates in parallel, giving a total running time of  $O(\log^3 n)$ . This requires  $O(n^3)$  qubits and the ability to execute an arbitrary number of gates on separate qubits. Such large numbers of qubits are not expected to be practical for the foreseeable future, so interesting engineering

lies in optimizing for a given set of architectural constraints.

Addition forms the basis of multiplication, and hence of exponentiation. Classically, many forms of adders have been used in computer hardware<sup>14</sup>. The most basic type of adder, variants of which are used in both VBE and BCDP (as well as our algorithm **F**, below), is the *carry-ripple* adder, in which the carry portion of the addition is done linearly from the low-order bits to the high-order. This form of adder is  $O(n)$  in both circuit depth and complexity; it is the only efficient type for NTC linear architectures, in which the time to propagate the low-order carry is inherently constrained to  $O(n)$ . When long-distance gates are available, as in AC architectures, the use of faster adders such as conditional-sum, carry-lookahead, or carry-save adders can result in  $O(\log n)$  latency, though the complexity remains  $O(n)$ <sup>15,16,17</sup>.

We have composed several algorithm variants, **A** through **F**, as well as investigated concurrent and parallel versions of the original Vedral-Barenco-Ekert (VBE)<sup>13</sup> and BCDP algorithms<sup>15</sup>; only the fastest for our AC and NTC architectures are presented here. Four parameters control the behavior of the algorithm variants and how well they match a particular architecture. These parameters include the choice of type of adder and the amount of space required. Algorithm variant **D** is tuned for AC using the conditional-sum adder, and **F** is tuned for NTC using the Cuccaro-Draper-Kutin-Moulton (CDKM) carry-ripple adder<sup>18</sup>. We have optimized the parameter settings for each individual data point, though the differences are just barely visible on our log-log plot. The values reported here for both algorithms are calculated using  $2n^2$  qubits of storage to exponentiate an  $n$ -bit number, the largest number of qubits our algorithms can effectively use. The primary characteristics of the algorithms shown in Figure 2 are summarized in Table 1. The table lists the number of multiplication units executing concurrently, the space, measured in number of logical qubits, the concurrency, or number of logical operations taking place at the same time, and the overall circuit depth, or time, measured in gates.

Table 1. Composition of our algorithms.

algorithm	adder	multipliers ( $s$ )	space	concurrency	depth
conc. BCDP	BCDP	1	$5n + 3$	2	$\sim 54n^3$
algorithm <b>D</b>	cond. sum	$\sim n/4$	$2n^2$	$\sim n^2$	$\sim 9n \log_2^2(n)$
algorithm <b>F</b>	CDKM	$\sim n/4$	$2n^2$	$\sim 3n/4$	$\sim 20n^2 \log_2(n)$

Figure 2 shows our results for our faster algorithms. We have kept the 1 Hz and 1 MHz lines for BCDP, and added matching lines for our fastest algorithms on the AC and NTC architectures. For AC, our algorithm **D** requires a clock rate of only about 0.3 Hz to factor the same 576-bit number in one month. For NTC, using our algorithm **F**, a clock rate of around 27 Hz is necessary. The graph shows that, for problem sizes larger than 6,000 bits, our algorithm **D** is one million times faster than the basic BCDP algorithm, and algorithm **F** is one thousand times faster. For very large  $n$ , the latency of **D** is  $\sim 9n \log_2^2(n)$ . The latency of **F** is  $\sim 20n^2 \log_2(n)$ .

This relationship of architecture and algorithm has obvious architectural implications: concurrency is critical, and support for long-distance gates is important.

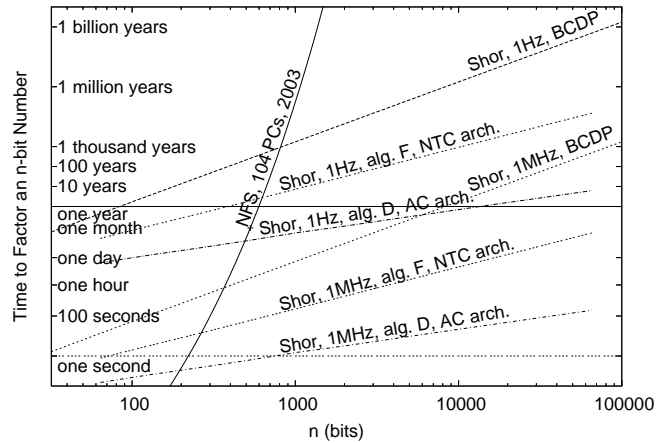


Figure 2. Scaling of number field sieve (NFS) and Shor's algorithms for factoring, using faster modular exponentiation algorithms.

### 3. Discussion

A fast clock speed is obviously also important for a fast algorithm; however, it remains an open question whether those quantum computing technologies which feature naturally fast *physical* quantum gates will have the fastest overall algorithm speed. All quantum computing technologies feature some level of decoherence, requiring resources for quantum error correction<sup>19,20,1</sup>. As an example, quantum computers based on Josephson junctions are likely to have extremely fast single-qubit and two-qubit gates, with a physical clock rate at the gigahertz level, as demonstrated in recent experiments<sup>21</sup>. However, the single-qubit decoherence time is only about 1  $\mu$ s for the most coherent superconducting qubits<sup>22</sup>. Although "fast," the difficulty in long-term qubit storage and the needed resources for fault tolerant operation may be quite large, so these implementations might make excellent processors with poor memories. In sharp contrast, NMR-based approaches<sup>11,12</sup> are quite slow, with nuclear-nuclear interactions in the kilohertz range. However, the much longer coherence times of nuclei<sup>23</sup> make the use of NMR-based qubits as memory substantially easier<sup>24</sup>. Ion trap implementations have the benefit of faster single-qubit-gate, two-qubit-gate, and qubit-measurement speeds with longer coherence times, but the added complication of moving ionic qubits from trap to trap physically<sup>25</sup> or exchanging their values optically<sup>26</sup> complicates the picture for the application-level clock rate. New physical proposals for overcoming speed and scalability obstacles continue to be developed, leaving the ultimate hardware limitations on clock speed and its relation to algorithm execution time uncertain.

### 4. Conclusions

We have shown that the actual execution time of Shor's algorithm is dependent on the important features of concurrent gate execution, available number of qubits, interconnect

topology, and clock speed, as well as the critical choice of an architecture-appropriate arithmetic algorithm. Our algorithms have shown a speed-up factor ranging from nearly 13,000 for factoring a 576-bit number to one million for a 6,000-bit number.

### Acknowledgments

The authors wish to thank Eisuke Abe, Kevin Binkley, Fumiko Yamaguchi, Seth Lloyd, Kae Nemoto, and W. J. Munro for helpful discussions.

### References

1. M. A. Nielsen and I. L. Chuang, *Quantum Computation and Quantum Information* (Cambridge University Press, Cambridge, 2000).
2. D. P. DiVincenzo, *Science* **270**, 255 (1995).
3. R. Van Meter and M. Oskin, *J. Emerging Tech. in Comp. Sys.*, 2(1), Jan. 2006.
4. P. W. Shor, in *Proc. 35th Symposium on Foundations of Computer Science* (IEEE Computer Society Press, Los Alamitos, CA, 1994), pp. 124–134.
5. D. E. Knuth, *The Art of Computer Programming, volume 2 / Seminumerical Algorithms*, 3rd ed. (Addison-Wesley, Reading, MA, 1998).
6. D. Beckman, A. N. Chari, S. Devabhaktuni, and J. Preskill, *Phys. Rev. A* **54**, 1034 (1996).
7. RSA Security Inc., web page, 2004, <http://www.rsasecurity.com/rsalabs/node.asp?id=2096>.
8. N. Kunihiro, *IEICE Trans. Fundamentals*, **E88-A**(1):105–111, (2005).
9. A. G. Fowler, S. J. Devitt, and L. C. Hollenberg, *Quantum Information and Computation* **4**, 237 (2004).
10. D. Loss and D. P. DiVincenzo, *Phys. Rev. A* **57**, 120 (1998).
11. B. E. Kane, *Nature* **393**, 133 (1998).
12. T. D. Ladd *et al.*, *Phys. Rev. Lett.* **89**, 17901 (2002).
13. V. Vedral, A. Barenco, and A. Ekert, *Phys. Rev. A* **54**, 147 (1996).
14. M. D. Ercegovac and T. Lang, *Digital Arithmetic* (Morgan Kaufmann, San Francisco, CA, 2004).
15. R. Van Meter and K. M. Itoh, *Phys. Rev. A* **71**, 052320 (2005).
16. T. G. Draper, S. A. Kutin, E. M. Rains, and K. M. Svore, A Logarithmic-Depth Quantum Carry-Lookahead Adder, <http://arXiv.org/quant-ph/0406142> (2004).
17. P. Gossett, Quantum Carry-Save Arithmetic, <http://arXiv.org/quant-ph/9808061> (1998).
18. S. A. Cuccaro, T. G. Draper, S. A. Kutin, and D. P. Moulton, A new quantum ripple-carry addition circuit, <http://arXiv.org/quant-ph/0410184>, 2004.
19. A. M. Steane, *Phys. Rev. A* **68**, 042322 (2003).
20. S. J. Devitt, A. G. Fowler, and L. C. Hollenberg, Simulations of Shor's algorithm with implications to scaling and quantum error correction, <http://arXiv.org/quant-ph/0408081>, 2004.
21. T. Yamamoto, *et al.*, *Nature* **425**, 941 (2003).
22. D. Vion, *et al.*, *Science* **296**, 886 (2002).
23. T. D. Ladd *et al.*, *Phys. Rev. B* **71**, 014401 (2005).
24. K. M. Itoh, *Solid State Comm.* **133**, 747 (2005).
25. D. Kielpinski, C. Monroe, and D. J. Wineland, *Nature* **417**, 709 (2002).
26. B.B. Blinov, D. L. Moehring, L.-M. Duan, and C. Monroe, *Nature* **428**, 153 (2004).
27. L. M. Duan, *Phys. Rev. Lett.* **93**, 100502 (2004).