

Disproving XAI Myths with Formal Methods – Initial Results

Joao Marques-Silva
IRIT, CNRS
Toulouse, France
joao.marques-silva@irit.fr

Abstract—The advances in Machine Learning (ML) in recent years have been both impressive and far-reaching. However, the deployment of ML models is still impaired by a lack of trust in how the best-performing ML models make predictions. The issue of lack of trust is even more acute in the uses of ML models in high-risk or safety-critical domains. eXplainable artificial intelligence (XAI) is at the core of ongoing efforts for delivering trustworthy AI. Unfortunately, XAI is riddled with critical misconceptions, that foster distrust instead of building trust. This paper details some of the most visible misconceptions in XAI, and shows how formal methods have been used, both to disprove those misconceptions, but also to devise practically effective alternatives.

Index Terms—Explainable AI, Formal Methods, Automated Reasoners

I. INTRODUCTION

The advances in Machine Learning (ML) in recent years have been absolutely remarkable [11], [50], and are posed to impact many aspects of society. However, the most promising ML models exhibit important shortcomings. First, ML models can be brittle, in that small changes to the inputs can cause unexpected changes on the output [85]. The assessment of *robustness* of ML models aims to confirm that ML models are not brittle, and has been an active area of research in recent years. Second, ML models can exhibit bias, and well-known examples exist of biased decision making [69], [86]. Fairness of ML models is another active area of research [10], [61], [68], with the use of formal methods also proposed [38]. Third, ML models are inscrutable in their operation, and as a result are often referred to as black-box ML models. Both shortcomings of ML models motivate distrust by human decision makers, and so represent critical limitations to the widespread deployment of ML models in many practical applications, especially among those that are deemed high-risk or safety-critical. In recent years, there have been calls for the verification of AI [79], aiming to target both the lack of robustness of ML models and their inscrutability.

eXplainable Artificial Intelligence (XAI) [28]–[30], addresses the shortcoming of inscrutability, in that it broadly aims to help human decision makers in understanding the

operation of ML models. The perceived importance of XAI motivated a large body of research, covering a wide range of topics, with the overarching goal of helping to build trust in the use of ML models. However, most work on XAI is not supported by formal guarantees of rigor. We will refer to such XAI efforts as *non-formal XAI*. The most visible exception to this state of affairs is formal XAI, which builds on rigorously defined notions of explainability, and the use of automated reasoning for computing explanations. Formal XAI is not without limitations, with the best-known being scalability with respect to complex ML models.

This paper makes a case for the importance of formal XAI, but showing how formal reasoning about explanations has served to refute three of the most established myths of non-formal XAI.

Myth #01 – intrinsic interpretability. Some ML models are widely accepted to be interpretable [65], even if there is no rigorous definition of what *interpretable* means [51]. Concrete examples of so-called interpretable models include decision trees, lists and sets. The *interpretability* of these ML models has motivated recent works to advocate for their use in high-risk applications [73], [75].

In recent work [34], [45], [46], [60], we demonstrated that these so-called interpretable models will not provide interpretable explanations as long as these relate with explanation succinctness. Section IV overviews the main results reported in recent work, which disprove existing claims about interpretability of some ML models.

Myth #02 – model-agnostic explanations. The most popular approaches for explaining ML models using *feature selection* (i.e. sets of features) are referred to as *model-agnostic*. Essentially, a model-agnostic explainability approach ignores the ML model, and proposes an explanation given the training data, and an estimated distribution of the input. One of the best-known approaches for model-agnostic explainability reports explanations as sets of features which explain the prediction. Anchors is arguable one of the best known model-agnostic explainers [72].

In recent work [37], [44], [89], we demonstrated that the sets of features reported by model-agnostic approaches are in the vast majority of cases *not* sufficient for the prediction, and so can mislead human decision makers by overlooking critical features. Section V overviews the main results reported in recent work, which disprove the ability of model-agnostic

This work was supported by the AI Interdisciplinary Institute ANITI, funded by the French program “Investing for the Future – PIA3” under Grant agreement no. ANR-19-PI3A-0004, and by the H2020-ICT38 project COALA “Cognitive Assisted agile manufacturing for a Labor force supported by trustworthy Artificial intelligence”.

methods for computing sufficient reasons for explanations.

Myth #03 – explainability with Shapley values. The best-known alternative to feature selection is *feature attribution*, where each feature receives a score of its relative importance for a prediction. Methods of feature attribution rank among the best-known and more widely used explainability approaches [8], [54], [71], [77]. Among these, SHAP [54] builds on the use of Shapley values [80]. The success of Shapley values for explainability is illustrated by a number of works. Furthermore, Shapley values for explainability provide a theoretical justification for SHAP-like feature attribution methods.

In recent work [36], we demonstrated that Shapley values for explainability, as proposed by a number of authors [53], [54], [83], [84], will provide misleading information about feature importance. To derive this result, we characterized features in terms of being relevant or irrelevant for rigorous explanations based on feature selection. We then showed that irrelevant features for explanations based on feature selection, i.e. features that do not occur in *any* (irreducible) explanation based on selection of features, will exhibit an absolute Shapley value larger than relevant features for explanations based on feature selection. Section VI overviews the main results reported in recent work, which disprove the adequacy of Shapley values for explainability.

Organization. The paper is organized as follows. Section II introduces the notation and definitions used throughout. Section III provides a brief account of XAI, emphasizing formal explainability, which we will then use in later sections. Then, Sections IV to VI will disprove the myths of XAI listed above. Section VII briefly discusses the significance of disproving those myths of XAI. The paper concludes in Section VIII.

II. PRELIMINARIES

Classification in ML. A classification problem is defined on a set of features $\mathcal{F} = \{1, \dots, m\}$, each with domain \mathbb{D}_i , and a set of classes $\mathcal{K} = \{c_1, c_2, \dots, c_K\}$. Domains can be categorical or ordinal, in this case with values that can be integer- or real-valued. Feature space \mathbb{F} is defined as the Cartesian product of the domains of the features, in order: $\mathbb{F} = \mathbb{D}_1 \times \dots \times \mathbb{D}_m$. We will use $\mathbf{x} = (x_1, \dots, x_m)$ to denote an arbitrary point in feature space, i.e. each x_i is a variable taking values from \mathbb{D}_i . In contrast, we will use $\mathbf{v} = (v_1, \dots, v_m)$ to denote a specific point in feature space, i.e. each v_i is a constant taken from \mathbb{D}_i . A classification function is a non-constant map from feature space into the set of classes, $\kappa : \mathbb{F} \rightarrow \mathcal{K}$. (Clearly, a classifier would be useless if the classification function were constant.) A boolean classifier is one where the feature domains are boolean, i.e. $\mathbb{D}_i = \mathbb{B} = \{0, 1\}$, for $i \in \mathcal{F}$, and the set of classes is also boolean, i.e. $\mathcal{K} = \mathbb{B}$. An instance is a pair (\mathbf{v}, c) representing a point \mathbf{v} in feature space, and the prediction by the classifier, i.e. $\kappa(\mathbf{v}) = c$. Finally, a classifier \mathcal{M} is a tuple $(\mathcal{F}, \mathbb{F}, \mathcal{K}, \kappa)$. In addition, an explanation problem \mathcal{E} is a tuple $(\mathcal{M}, (\mathbf{v}, c))$, where $\mathcal{M} = (\mathcal{F}, \mathbb{F}, \mathcal{K}, \kappa)$ is a classifier. Thus, in this paper,

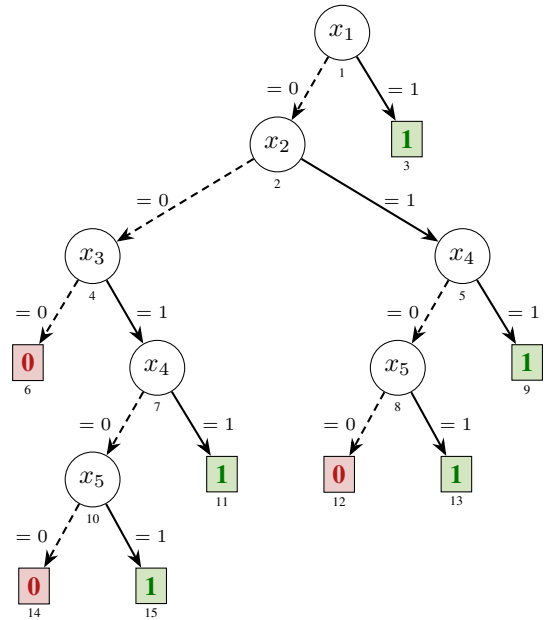


Fig. 1: Example decision tree (adapted from [31])

and given an explanation problem, our objective is to define explanations and investigate approaches for computing such explanations.

Sample of ML models. In this paper we study so-called interpretable models, concretely decision trees and decision sets, but also classifiers represented by truth tables. All these representations of classification functions are well-known, and the concrete notation used is clarified with the running examples presented in the rest of this section.

Running examples. Throughout the paper, we will use a few simple running examples. For the first parts of the paper, we will consider both a decision tree (DT) and a decision list (DL). These rank among the simplest ML models, and that simplicity often motivates claims of interpretability.

We consider the DT shown in Figure 1, adapted from [31], and studied for explainability in [46], [60]. The nodes are numbered 1 to 15. The internal nodes test the value of a (single) feature, and the terminal nodes show the predicted class. Each edge defines a literal on the feature associated with the edge’s starting node. Paths are sequences of nodes, starting at the root, and terminating at a terminal node. Path $\langle 1, 2, 4, 6 \rangle$ is an example of a path. The literals associated with this path are: $x_1 = 0$, $x_2 = 0$ and $x_3 = 0$. Given an instance $(\mathbf{v}, c) = ((0, 0, 0, 0, 0), 0)$, the path consistent with $\mathbf{v} = (v_1, v_2, v_3, v_4, v_5)$ is $\langle 1, 2, 4, 6 \rangle$, where each v_i is assigned to feature i . Similarly, for the instance $((0, 1, 1, 0, 0), 1)$ is consistent with path $\langle 1, 2, 5, 8, 12 \rangle$. As described elsewhere [31], the DT was generated with an algorithm for learning optimal DTs. Hence, the DT does not exhibit any redundancy in terms of a cost function defined on an aggregated set of criteria, namely the loss (or misclassification error) and tree size.

Moreover, we also consider the DL shown in Figure 2. If

R_1 :	IF	$(x_1 \wedge x_3)$	THEN	$\kappa(\mathbf{x}) = 1$
R_2 :	ELSE IF	$(x_2 \wedge x_4 \wedge x_6)$	THEN	$\kappa(\mathbf{x}) = 0$
R_3 :	ELSE IF	$(\neg x_1 \wedge x_3)$	THEN	$\kappa(\mathbf{x}) = 1$
R_4 :	ELSE IF	$(x_4 \wedge x_6)$	THEN	$\kappa(\mathbf{x}) = 0$
R_5 :	ELSE IF	$(\neg x_1 \wedge \neg x_3)$	THEN	$\kappa(\mathbf{x}) = 1$
R_6 :	ELSE IF	(x_6)	THEN	$\kappa(\mathbf{x}) = 0$
R_{DEF} :	ELSE			$\kappa(\mathbf{x}) = 1$

Fig. 2: Example of decision list (adapted from [60])

x_1	x_2	x_3	x_4	$\kappa_{I4}(\mathbf{x})$	x_1	x_2	x_3	x_4	$\kappa_{I5}(\mathbf{x})$
0	0	0	0	0	0	0	0	0	0
0	0	0	1	0	0	0	0	1	0
0	0	1	0	0	0	0	1	0	0
0	0	1	1	0	0	0	1	1	0
0	1	0	0	0	0	1	0	0	0
0	1	0	1	0	0	1	0	1	0
0	1	1	0	0	0	1	1	0	0
0	1	1	1	1	0	1	1	1	1
1	0	0	0	0	1	0	0	0	0
1	0	0	1	0	1	0	0	1	0
1	0	1	0	1	1	0	1	0	0
1	0	1	1	0	1	0	1	1	1
1	1	0	0	1	1	1	0	0	0
1	1	0	1	1	1	1	0	1	1
1	1	1	0	1	1	1	1	0	0
1	1	1	1	1	1	1	1	1	0

(a) Function κ_{I4}

(b) Function κ_{I5}

Fig. 3: Examples of boolean classifiers

the condition of some rule R_i is true, and the conditions of previous rules are false, then the prediction is the one of rule R_i , and we say that that rule fires. As an example, for the point in feature space $(x_1, x_2, x_3, x_4, x_5, x_6) = (1, 1, 1, 1, 1, 1)$, rule R_1 fires since $x_1 = x_3 = 1$.

We will also consider two boolean classifiers represented by their truth tables, as shown in Figure 3. The instances that will be analyzed in more detail are highlighted, and correspond to $((0, 0, 1, 1), 0)$ for Figure 3a, and $((1, 1, 1, 1), 0)$ for Figure 3b.

III. A GLIMPSE OF EXPLAINABLE AI

A. Intrinsic Interpretability

Intrinsic interpretability [65] builds on a long-held belief that some ML models are naturally interpretable. (This belief has been stated for example for decision trees [14], but also for decision sets [49], among others.) Indeed, it is the case that, for some ML models, an explanation can be produced by some sort of manual inspection of the model. This is the case with decision trees, decision lists, decision sets, but other graph-based ML models [34].

Recent years have witnessed proposals for the use of interpretable models in high-risk applications [73], [74]. Unfortunately, it is unclear that a rigorous definition of interpretability

can be devised [51]. Given the motivation for work on interpretable models, we equate interpretability with succinctness and irreducibility of explanations.

B. Feature-Based Explanations

Most practical work on explainability relates explanations with the model’s features. Two main lines of work exist: *feature attribution* and *feature selection*.

Feature attribution (e.g. [8], [54], [71]) assigns some value of importance to each of the model’s features. Relative feature importance is then obtained by comparing the value of importance of the different features. Among others, Shapley values have found widespread acceptance as a mechanism for feature attribution in explainability.

Feature selection (e.g. [42], [71], [81]) identifies sets of features that are sufficient (probabilistically or deterministically) for the prediction. The most visible feature selection methods are heuristic, but there has been recent work on formal approaches for feature selection in explainability; this is discussed in Section III-E.

C. Non-Formal Explainability

The vast majority of work on explainability has been based on what we refer to as *non-formal explainability*, i.e. approaches that offer no guarantees of rigor in computed explanations. There are fairly up to date overviews of non-formal explainability approaches [27], [65], [66], [76]–[78].

One well-known line of work are model-agnostic methods [54], [71], [72]. Model-agnostic methods approach explainability by ignoring the actual implementation of the ML model, and either sample the behavior from training data, or sample the black-box behavior of the model using an inferred distribution from training data. As an example, SHAP [54] approaches feature attribution by proposing to approximate the computation of Shapley values for explainability.

D. Shapley Values for Explainability

Shapley values were first introduced by L. Shapley [80] in the context of game theory. Shapley values have been extensively used for explaining the predictions of ML models, e.g. [15], [21], [54], [62], [82]–[84], [88], among a vast number of recent examples. The complexity of computing Shapley values (as proposed in SHAP [54]) has been studied in recent years [3], [4], [18], [22], [23]. This section provides a brief overview of Shapley values. Throughout the section, we adapt the notation used in recent work [3], [4], which builds on the work of [54].

Let $\Upsilon : 2^{\mathcal{F}} \rightarrow 2^{\mathbb{F}}$ be defined by,

$$\Upsilon(\mathcal{S}; \mathbf{v}) = \{\mathbf{x} \in \mathbb{F} \mid \wedge_{i \in \mathcal{S}} x_i = v_i\} \quad (1)$$

i.e. for a given set \mathcal{S} of features, and parameterized by the point \mathbf{v} in feature space, $\Upsilon(\mathcal{S}; \mathbf{v})$ denotes all the points in feature space that have in common with \mathbf{v} the values of the features specified by \mathcal{S} .

Also, let $\phi : 2^{\mathcal{F}} \rightarrow \mathbb{R}$ be defined by,

$$\phi(\mathcal{S}; \mathcal{M}, \mathbf{v}) = \frac{1}{2^{|\mathcal{F} \setminus \mathcal{S}|}} \sum_{\mathbf{x} \in \Upsilon(\mathcal{S}; \mathbf{v})} \kappa(\mathbf{x}) \quad (2)$$

For the purposes of this paper, and in contrast with [3], [4], one can solely consider a uniform input distribution, and so the dependency with the input distribution is not accounted for. As a result, given a set \mathcal{S} of features, $\phi(\mathcal{S}; \mathcal{M}, \mathbf{v})$ represents the average value of the classifier over the points of feature space represented by $\Upsilon(\mathcal{S}; \mathbf{v})$.

Finally, let $Sv : \mathcal{F} \rightarrow \mathbb{R}$ be defined by,

$$Sv(i; \mathcal{M}, \mathbf{v}) = \sum_{\mathcal{S} \subseteq (\mathcal{F} \setminus \{i\})} \frac{|\mathcal{S}|!(|\mathcal{F}| - |\mathcal{S}| - 1)!}{|\mathcal{F}|!} \times (\phi(\mathcal{S} \cup \{i\}; \mathcal{M}, \mathbf{v}) - \phi(\mathcal{S}; \mathcal{M}, \mathbf{v})) \quad (3)$$

Given an instance (\mathbf{v}, c) , the Shapley values assigned to each feature measure the *contribution* of the features with respect to the prediction. A positive/negative value indicates that the feature can contribute to changing the prediction, whereas a value of 0 indicates no contribution. Moreover, and as our results demonstrate, SHAP never really replicates exact Shapley values. As a result, we focus on the relative order of features imposed by the computed Shapley values. The motivation is that, even if the computed values are not correct (as in the case of SHAP), then what matters for a human decision maker is the order of features.

Example 1. We consider the example boolean functions of Figure 3. If the functions are represented by a truth table, then the Shapley values can be computed in polynomial time on the size of the truth table, since the number of subsets considered in (3) is also polynomial on the size of the truth table [36]. (Observe that for each subset used in (3), we can use the truth table for computing the average values in (2).) For example, for κ_{I4} (see Figure 3a) and for the point in feature space $(0, 0, 1, 1)$, one can compute the following Shapley values: $Sv(1) = -0.125$, $Sv(2) = -0.333$, $Sv(3) = 0.083$, and $Sv(4) = 0.0$.

E. Formal Explainability

This section offers a brief perspective of the emerging field of formal explainable AI. Recent detailed accounts are available [56], [59].

Abductive explanations (AXp's). An AXp [42]¹ represents a subset-minimal set of literals (relating a feature value x_i and a constant $v_i \in \mathbb{D}_i$) that are logically sufficient for the prediction. AXp's can be viewed as answering a **Why?** question, i.e. why the prediction. (AXp's can be described in terms of logic-based abduction, which explains the name used [59].) AXp's offer guarantees of rigor that are not offered by other alternative explanation approaches. More recently, AXp's have been studied in terms of their computational complexity [6], [7], [9], [19]. There is a growing body of recent work on

formal explanations [1], [2], [5], [12], [13], [20], [24], [26], [52], [55], [59], [87]. Formally, given $\mathbf{v} = (v_1, \dots, v_m) \in \mathbb{F}$, with $\kappa(\mathbf{v}) = c$, an AXp is any subset-minimal set $\mathcal{X} \subseteq \mathcal{F}$ such that²,

$$\text{WAXp}(\mathcal{X}) := \forall(\mathbf{x} \in \mathbb{F}). \left[\bigwedge_{i \in \mathcal{X}} (x_i = v_i) \right] \rightarrow (\kappa(\mathbf{x}) = c) \quad (4)$$

If a set $\mathcal{X} \subseteq \mathcal{F}$ is not minimal but (4) holds, then \mathcal{X} is referred to as a *weak* AXp. Clearly, the predicate WAXp maps $2^{\mathcal{F}}$ into $\{\perp, \top\}$ (or $\{\mathbf{false}, \mathbf{true}\}$). Given $\mathbf{v} \in \mathbb{F}$, an AXp \mathcal{X} represents an irreducible (or minimal) subset of the features which, if assigned the values dictated by \mathbf{v} , are sufficient for the prediction c , i.e. value changes to the features not in \mathcal{X} will not change the prediction. We can use the definition of the predicate WAXp to formalize the definition of the predicate AXp, also defined on subsets \mathcal{X} of \mathcal{F} :

$$\text{AXp}(\mathcal{X}) := \text{WAXp}(\mathcal{X}) \wedge \forall(\mathcal{X}' \subsetneq \mathcal{X}). \neg \text{WAXp}(\mathcal{X}') \quad (5)$$

The definition of $\text{WAXp}(\mathcal{X})$ ensures that the predicate is *monotone*. Indeed, if $\mathcal{X} \subseteq \mathcal{X}' \subseteq \mathcal{F}$, and if \mathcal{X} is a weak AXp, then \mathcal{X}' is also a weak AXp, as the fixing of more features will not change the prediction. Since the WAXp predicate is monotonic, the definition of the predicate AXp can be simplified as follows, with $\mathcal{X} \subseteq \mathcal{F}$:

$$\text{AXp}(\mathcal{X}) := \text{WAXp}(\mathcal{X}) \wedge \forall(j \in \mathcal{X}). \neg \text{WAXp}(\mathcal{X} \setminus \{j\}) \quad (6)$$

This simpler but equivalent definition of AXp has important practical significance, in that only a linear number of subsets needs to be checked for, as opposed to exponentially many subsets in (5). As a result, the algorithms that compute one AXp are based on (6) [59].

Example 2. For the boolean function κ_{I4} in Figure 3a, and the instance $((0, 0, 1, 1), 0)$, we can observe that the value of the function is 0 for the first four rows of the truth table. Thus, if both x_1 and x_2 equal 1, then the prediction is guaranteed to be 0. Hence, $\{1, 2\}$ is a weak AXp. By inspection of the remaining rows, where either x_1 or x_2 changes, we can conclude that $\{1, 2\}$ is indeed an AXp.

Contrastive explanations (CXp's). A CXp is a subset-minimal set of features which suffices to change the prediction.

Similarly to the case of AXp's, one can define (weak) contrastive explanations (CXp's) [41], [64]. $\mathcal{Y} \subseteq \mathcal{F}$ is a weak CXp for the instance (\mathbf{v}, c) if,

$$\text{WCXp}(\mathcal{Y}) := \exists(\mathbf{x} \in \mathbb{F}). \left[\bigwedge_{i \notin \mathcal{Y}} (x_i = v_i) \right] \wedge (\kappa(\mathbf{x}) \neq c) \quad (7)$$

¹AXp's are also referred to as prime implicant (PI) explanations [81] and as sufficient reasons for a prediction.

²In the remainder of this section, the parameterization of the presented predicates on the classifier \mathcal{M} and on (\mathbf{v}, c) is omitted for the sake of brevity.

Thus, given an instance (\mathbf{v}, c) , a (weak) CXp is a subset of features which, if allowed to take any value from their domain, then there is an assignment to the features that changes the prediction to a class other than c , this while the features not in the explanation are kept to their values.

Furthermore, a set $\mathcal{Y} \subseteq \mathcal{F}$ is a CXp if, besides being a weak CXp, it is also subset-minimal, i.e.

$$\begin{aligned} \text{CXp}(\mathcal{Y}) &:= \\ \text{WCXp}(\mathcal{Y}) \wedge \forall (\mathcal{Y}' \subsetneq \mathcal{Y}). \neg \text{WCXp}(\mathcal{Y}') \end{aligned} \quad (8)$$

A CXp can be viewed as a possible irreducible answer to a **Why Not?** question, i.e. why isn't the classifier's prediction a class other than c ?

As before, monotonicity of predicate WCXp allows simplifying Equation (8) to get,

$$\begin{aligned} \text{CXp}(\mathcal{Y}) &:= \\ \text{WCXp}(\mathcal{Y}) \wedge \forall (j \in \mathcal{Y}). \neg \text{WCXp}(\mathcal{Y} \setminus \{j\}) \end{aligned} \quad (9)$$

Example 3. For the example function κ_{I_4} , and instance $((0, 0, 1, 1), 0)$, if we fix features 1, 3 and 4, respectively to 0, 1 1, then by allowing feature 2 to change value, we see that the prediction changes, e.g. by considering the point $(0, 1, 1, 1)$ with prediction 1. Thus, $\{2\}$ is a CXp. In a similar way, by fixing the features 2 and 3, respectively to 0 and 1, then by allowing features 1 and 4 to change value, we conclude that the prediction changes. Hence, $\{1, 4\}$ is also a CXp.

Duality between explanations. Given an explanation problem \mathcal{E} , the sets of AXp's and CXp's are defined as follows:

$$\begin{aligned} \mathbb{A}(\mathcal{E}) &= \{\mathcal{X} \subseteq \mathcal{F} \mid \text{AXp}(\mathcal{X})\} \\ \mathbb{C}(\mathcal{E}) &= \{\mathcal{Y} \subseteq \mathcal{F} \mid \text{CXp}(\mathcal{Y})\} \end{aligned} \quad (10)$$

By taking into account the definition of AXp, CXp, and their sets (see (10)), and also by building on Reiter's seminal work [70], recent work [41] proved the following duality between minimal hitting sets (MHSes)³:

Proposition 1 (Minimal hitting-set (MHS) duality between AXp's and CXp's). Given an explanation problem \mathcal{E} , we have that,

- 1) $\mathcal{X} \subseteq \mathcal{F}$ is an AXp (and so $\mathcal{X} \in \mathbb{A}(\mathcal{E})$) iff \mathcal{X} is an MHS of the CXp's in $\mathbb{C}(\mathcal{E})$.
- 2) $\mathcal{Y} \subseteq \mathcal{F}$ is a CXp (and so $\mathcal{Y} \in \mathbb{C}(\mathcal{E})$) iff \mathcal{Y} is an MHS of the AXp's in $\mathbb{A}(\mathcal{E})$.

We refer to Proposition 1 as MHS duality between AXp's and CXp's. The previous result has been used in more recent papers for enabling the enumeration of explanations [34], [40], [58].

Example 4. For the function in Figure 3b, and instance $((1, 1, 1, 1), 0)$, there is only one AXp: $\mathbb{A}(\mathcal{E}) = \{\{1, 2, 3\}\}$, i.e. $\{1, 2, 3\}$ is the only subset-minimal set of features which, if fixed to the values dictated by \mathbf{v} , is sufficient for predicting 0. Moreover, the set of CXp's is: $\mathbb{C}(\mathcal{E}) = \{\{1\}, \{2\}, \{3\}\}$.

³Given a set \mathcal{S} of sets, an MHS is a subset-minimal set of elements such that the intersection with each of the sets of \mathcal{S} is non-empty.

Clearly, each CXp is an MHS of the set AXp's and the AXp is an MHS of the set of CXp's.

Let us defined the sets $F_{\mathbb{A}}(\mathcal{E}) = \cup_{\mathcal{X} \in \mathbb{A}(\mathcal{E})} \mathcal{X}$ and $F_{\mathbb{C}}(\mathcal{E}) = \cup_{\mathcal{Y} \in \mathbb{C}(\mathcal{E})} \mathcal{Y}$. $F_{\mathbb{A}}(\mathcal{E})$ aggregates the features occurring in any abductive explanation, whereas $F_{\mathbb{C}}(\mathcal{E})$ aggregates the features occurring in any contrastive explanation. Given the above, the following results are a consequence of Proposition 1:

Proposition 2. $F_{\mathbb{A}}(\mathcal{E}) = F_{\mathbb{C}}(\mathcal{E})$.

Corollary 1. Given a classifier function $\kappa : \mathbb{F} \rightarrow \mathcal{K}$, defined on a set of features \mathcal{F} , a feature $i \in \mathcal{F}$ is included in some AXp iff i is included in some CXp.

Additional duality results in (formal) explainability have been established elsewhere [43].

Explanability queries – feature relevancy [32], [34], [35]. Let us consider a classifier \mathcal{M} , with features \mathcal{F} , domains \mathbb{D}_i , $i \in \mathcal{F}$, classes \mathcal{K} , a classification function $\kappa : \mathbb{F} \rightarrow \mathcal{K}$, and a concrete instance (\mathbf{v}, c) , $\mathbf{v} \in \mathbb{F}$, $c \in \mathcal{K}$.

Definition 1 (Feature Necessity, Relevancy & Irrelevancy). Let \mathbb{A} denote the set of all AXp's for a classifier given a concrete instance, i.e. $\mathbb{A} = \{\mathcal{X} \subseteq \mathcal{F} \mid \text{AXp}(\mathcal{X})\}$, and let $t \in \mathcal{F}$ be a target feature. Then,

- i. t is necessary if $t \in \cap_{\mathcal{X} \in \mathbb{A}} \mathcal{X}$;
- ii. t is relevant if $t \in \cup_{\mathcal{X} \in \mathbb{A}} \mathcal{X}$; and
- iii. t is irrelevant if $t \in \mathcal{F} \setminus \cup_{\mathcal{X} \in \mathbb{A}} \mathcal{X}$.

Because of feature occurs in some AXp iff it occurs in some CXp, then the previous definitions could consider instead the set of contrastive explanations.

Example 5. For the example function Figure 3b, let us consider the instance $((1, 1, 1, 1), 0)$. By inspection, we conclude that the only AXp is $\{1, 2, 3\}$. Hence, features 1, 2, 3 are relevant, and feature 4 is irrelevant.,

In the rest of the paper, we will use the predicate Relevant(i) to hold true when feature i is relevant, and the predicate Irrelevant(i) to hold true when feature i is irrelevant.

Progress in formal XAI. Figure 4 summarizes the progress observed in recent years for computing one explanation [56], [59]. For several families of classifiers there exist practical efficient solutions, either in theory or in practice. These include Naive Bayes Classifiers [57], Decision Trees [45], [46], restricted boolean circuits (e.g. d-DNNFs, GDFs, BDDs) [33], [34] and monotonic classifiers [17], [58], but also decision lists [40], random forests and boosted trees [37], [39], [48]. For some families of classifiers, e.g. Neural Networks and Bayesian Network Classifiers, scalability is still an issue [42], [81].

Recent overviews of formal XAI cover additional detail [56], [59], including recent work on different explainability queries. Furthermore, and with the purpose of disproving one of the myths in XAI, recent work [36] demonstrated that for classifiers represented with truth tables, there exist polynomial-time algorithm for computing one or more explanations (both abductive and contrastive), but also for answering feature relevancy queries.

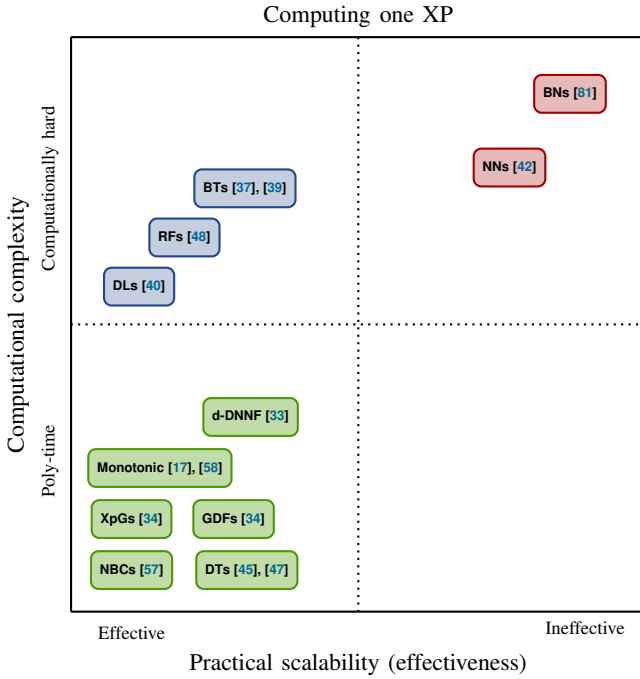


Fig. 4: Progress in formal XAI [56], [59]

IV. MYTH #01: INTRINSIC INTERPRETABILITY

One approach to XAI is *intrinsic interpretability* [65], based on a long-held belief that some ML models are *interpretable*. Concrete examples include decision trees, lists and sets. In the case of decision trees, their interpretability has been asserted for more than two decades [14]. The assumed interpretability of some families of ML models has justified recent calls for their use in high-risk domains [73], [74].

Decision trees. Given a DT and an instance (\mathbf{v}, c) , an intuitive explanation for the prediction are the literals tested in the path consistent with \mathbf{v} .

Example 6. For the DT of Figure 1, and the instance $(\mathbf{v}, c) = ((0, 0, 0, 0, 0), 0)$, the intuitive explanation for the prediction are the features tested in the path $\langle 1, 2, 4, 6 \rangle$, and so we could propose as an explanation for why the prediction the set of literals $\{1, 2, 3\}$.

However, as proved in earlier work [34], [45], [46], such approach for computing explanations in DTs can provide arbitrarily redundant results.

Example 7. Let us consider again the DT of Figure 1, but now let the target instance be $(\mathbf{v}, c) = (0, 0, 1, 0, 1), 1)$. Following the approach outlined above, a possible explanation would be $\{1, 2, 3, 4, 5\}$, representing the path consistent with the instance. However, it is possible to prove that there exists a significantly simpler abductive explanation. If we pick the features $\{3, 5\}$ as a possible AXp, it is simple to conclude that, for any assignment to the features 1, 2, and 4, the prediction never changes, as shown in Table I. Hence, $\{3, 5\}$ is a WAXp, and it is simple to conclude that it is indeed an AXp (i.e. any subset of $\{3, 5\}$ is no longer a WAXp).

$x_3 = x_5 = 1$	x_1	x_2	x_4	$\kappa_{DT}(\mathbf{x})$
1	0	0	0	1
1	0	0	1	1
1	0	1	0	1
1	0	1	1	1
1	1	0	0	1
1	1	0	1	1
1	1	1	0	1
1	1	1	1	1

TABLE I: DT classification given $x_3 = x_5 = 1$

Path	Features	AXp	%Red
$\langle 1, 2, 4, 6 \rangle$	$\{1, 2, 3\}$	$\{1, 2, 3\}$	0%
$\langle 1, 2, 4, 7, 10, 14 \rangle$	$\{1, 2, 3, 4, 5\}$	$\{1, 4, 5\}$	40%
$\langle 1, 2, 4, 7, 10, 15 \rangle$	$\{1, 2, 3, 4, 5\}$	$\{3, 5\}$	60%
$\langle 1, 2, 4, 7, 11 \rangle$	$\{1, 2, 3, 4\}$	$\{3, 4\}$	50%
$\langle 1, 2, 5, 8, 12 \rangle$	$\{1, 2, 4, 5\}$	$\{1, 4, 5\}$	40%
$\langle 1, 2, 5, 8, 13 \rangle$	$\{1, 2, 4, 5\}$	$\{2, 5\}$	60%
$\langle 1, 2, 5, 9 \rangle$	$\{1, 2, 4\}$	$\{2, 4\}$	33%
$\langle 1, 3 \rangle$	$\{1\}$	$\{1\}$	0%

TABLE II: Explanation redundancy figures for DT in Figure 1

Table II summarizes the explanation redundancy of the paths in the DT of Figure 1. Although some paths exhibit no redundancy, i.e. the AXp corresponds to the path features, there are other paths with up to 60% redundant features.

Besides comprehensive experimental evidence illustrating the importance of explaining DTs [46], [60], recent work proved a number of additional results. First, [45], [46] prove that redundancy of path explanations can be arbitrarily large on the number of features, i.e. there are DTs for which a path contains all the features, and the explanation contains a single feature. Second, [46] proves that the family of classification functions that do not exhibit path redundancy is very restricted. The results above support the conclusions that DTs ought not serve as explanations, but should be explained instead.

Decision lists. For DLs it has also be argued that explanations are also required [60], both to avoid redundancy of features in explanations, but also to ensure the correctness of computed sets of literals as explanations.

Example 8. For the DL of Figure 2, let the instance be $((0, 1, 0, 1, 0, 1), 0)$. It is plain that the rule R_2 fires, and the prediction is 0. What is a sufficient reason for this prediction? Clearly, $\{2, 4, 6\}$, as listed in the condition for the rule to fire, is not sufficient for the prediction. Indeed, we must ensure that rule R_1 does not fire, and so the abductive explanation must either include feature 1 or feature 3. Let us pick feature 3. It is the case that $\{2, 3, 4, 6\}$ is a sufficient reason for the prediction given the values in \mathbf{v} dictating the literals in features 2, 3, 4 and 6. However, one can prove that feature 2 is irrelevant.

Indeed, if feature 3 is assigned value 0, and features 4 and 6 are assigned value 1, then because of rule R_4 , the prediction is guaranteed to be 0, independently of the value of feature 2. Clearly, if one of the last rules were to fire, finding an explanation would be even less intuitive than in the case above.

There is recent comprehensive practical evidence to the existence of explanation redundancy in DLs [60].

It should be noted that explanation redundancy does not yield incorrect explanations. However, redundancy of explanations is by itself problematic. First, because it may cause human decision makers to look at features that are unneeded for the prediction. Second, because the number of concepts that human decision makers can relate with is fairly small [63], and redundant information can push explanations beyond that bound.

V. MYTH #02: MODEL-AGNOSTIC EXPLAINABILITY

Model-agnostic explainability is arguably one of the most widely used XAI approaches [54], [71], [72].

One concrete line of work [72] finds a set of features that “explains” the prediction. Concretely, an *anchor* is defined to be: “An anchor explanation is a rule that sufficiently ‘anchors’ the prediction locally – such that changes to the rest of the feature values of the instance do not matter.” [72].

If the sets of features reported as anchors are indeed *sufficient* for the prediction, such that the other features do not matter, then one should be able to validate those sets of features as abductive explanations, since AXp’s also *anchor* the prediction locally.

Given an instance, (\mathbf{v}, c) , if the computed anchor is a set of features \mathcal{A} , then we should be able to validate that,

$$\forall(\mathbf{x} \in \mathbb{F}). \bigwedge_{i \in \mathcal{A}} (x_i = v_i) \rightarrow \kappa(\mathbf{x}) = c \quad (11)$$

which should be true if \mathcal{A} were an AXp. To prove that a set of features is not an AXp, we decide instead whether the following statement is true,

$$\exists(\mathbf{x} \in \mathbb{F}). \bigwedge_{i \in \mathcal{A}} (x_i = v_i) \wedge \kappa(\mathbf{x}) \neq c \quad (12)$$

which can be formulated as the following decision problem,

$$\mathbf{CO} \left(\bigwedge_{i \in \mathcal{A}} (x_i = v_i) \wedge \kappa(\mathbf{x}) \neq c \right) \quad (13)$$

where $\mathbf{CO}(\varphi)$ decides the satisfiability of the logic formula φ . Depending on the logic representation of the classifier, one can use a suitable decision procedure for deciding whether (13). So, in practice, and given a set of features reported by Anchor [72], it suffices to use a decision procedure to check whether (11) holds. It should be noted that an alternative to deciding whether (11) is to assess how likely it is for (11) not to hold. This involves (exact or approximate) model counting, and was investigated in [67].

In the case of boosted trees [16], the model-agnostic tool Anchor [72] was assessed, and its explanations validated with

Dataset	% Incorrect	% Redundant	% Correct
adult	80.5%	1.6%	17.9%
lending	3.0%	0.0%	97.0%
rcdv	99.4%	0.4%	0.2%
compas	84.4%	1.7%	13.9%
german	99.7%	0.2%	0.1%

TABLE III: Correctness results for Anchor’s explanations [37], [44]

a logic-based explainer [37], [44]. The correctness results are summarized in Table III (more comprehensive results are reported in earlier work [37], [44], [89]). Similar results were obtained by interpreting LIME [71] and SHAP [54] as feature selection explainers [37]. A possible criticism of the results in Table III is that all inputs are assumed possible, and this may not always be the case. More recent work reports less negative results on average, when inferred background knowledge is taken into account [89]. However, even when inferred background knowledge is taken into account, (non-formal) explainability with feature selection appears unlikely to contribute to delivering trust in AI. This remark is confirmed indirectly by results in [67], where the likelihood of picking the wrong prediction for computed explanations was shown to be significant.

VI. MYTH #03: SHAPLEY VALUES IN EXPLAINABILITY

Shapley values have been studied as a method of feature attribution for more than a decade [83], [84], attaining widespread visibility as the result of their use in SHAP [53], [54].

Nevertheless, SHAP exploits approximate Shapley values [54], given that the exact computation of Shapley values is generally considered to be intractable. Thus, and to the best of our knowledge, there is no validation of the adequacy of Shapley values for explainability. Moreover, recent work proved that Shapley values could be computed in polynomial-time for restricted classes of boolean circuits [4]. In addition, when functions are represented by truth tables, then it is simple to prove that Shapley values can be computed in polynomial time on the size of the truth table [36].

Furthermore, if Shapley values correctly capture the relative importance of features, then there should be a tight connection between the values obtained by methods of feature attribution and the features obtained with feature selection. Evidently, if a feature *cannot* be picked by a feature selection method, then it should have *no* assigned feature importance. Since most methods of feature selection are heuristic, offering no guarantees of correctness, we consider formally defined abductive explanations as described in Section III-E. Concretely, we focus on the (crucial) distinction between relevant and irrelevant features and their relative importance as computed by Shapley values for explainability. Moreover, we investigate whether some relevant feature(s) could be assigned less importance that

some other irrelevant feature(s). Among a number of possible issues, we investigated the following issues:

- I1.** For a boolean classifier, with an instance (\mathbf{v}, c) , and feature i such that,

$$\text{Irrelevant}(i) \wedge (\text{Sv}(i) \neq 0)$$

Thus, an **I1** issue is such that the feature is irrelevant, but its Shapley value is non-zero.

- I2.** For a boolean classifier, with an instance (\mathbf{v}, c) and features i_1 and i_2 such that,

$$\text{Irrelevant}(i_1) \wedge \text{Relevant}(i_2) \wedge (|\text{Sv}(i_1)| > |\text{Sv}(i_2)|)$$

Thus, an **I2** issue is such that there is at least one irrelevant feature exhibiting a Shapley value larger (in absolute value) than the Shapley of a relevant feature.

- I3.** For a boolean classifier, with instance (\mathbf{v}, c) , and feature i such that,

$$\text{Relevant}(i) \wedge (\text{Sv}(i) = 0)$$

Thus, an **I3** issue is such that the feature is relevant, but its Shapley value is zero.

- I4.** For a boolean classifier, with instance (\mathbf{v}, c) , and features i_1 and i_2 such that,

$$\begin{aligned} &[\text{Irrelevant}(i_1) \wedge (\text{Sv}(i_1) \neq 0)] \wedge \\ &[\text{Relevant}(i_2) \wedge (\text{Sv}(i_2) = 0)] \end{aligned}$$

Thus, an **I4** issue is such that there is at least one irrelevant feature with a non-zero Shapley value and a relevant feature with a Shapley value of 0.

- I5.** For a boolean classifier, with instance (\mathbf{v}, c) and feature i such that,

$$[\text{Irrelevant}(i) \wedge \forall_{1 \leq j \leq m, j \neq i} (|\text{Sv}(j)| < |\text{Sv}(i)|)]$$

Thus, an **I5** issue is such that there is one irrelevant feature exhibiting the value Shapley value (in absolute value). (**I5** can be viewed as a special case of the other issues, and is not analyzed separately in earlier work [36].)

Whereas a more comprehensive assessment is available elsewhere [36], the next example illustrates the existence of issues **I4** and **I5** for the boolean classifiers in [Figure 3⁴](#).

Example 9. We focus on **I4** and **I5** (a more detailed analysis can be found elsewhere [36]). [Table IV](#) confirms the occurrence of issue **I4** for κ_{I4} (see [Figure 3a](#)), and of issue **I5** for κ_{I5} (see [Figure 3b](#)). Among these two cases, the example of [Figure 3b](#) is significant, in that the irrelevant feature has the largest absolute Shapley value among all the features.

⁴Given a boolean classifier represented by a truth table, [36] describes simple polynomial-time algorithms for computing of Shapley values, one or more AXp's, one or more CXp's, and for deciding relevancy/irrelevancy of features. The fact that the classifier is represented by a truth table enables polynomial-time algorithms for analyzing all subsets, computing average values, but also deciding over existential/universal quantifiers

The example above (and the data reported in earlier work [36]) offer conclusive evidence that Shapley values for explainability can provide misleading information, about the relative importance of features, to human decision makers.

VII. DISCUSSION

As noted earlier in [Section IV](#), the refutation of myth #01 is based on the existence of redundant features in explanations produced by manual inspection of DTs and DLs (a similar situation could be envisioned for DSs). One could argue that redundancy is not problematic per se, e.g. if DTs are shallow or small. However, if redundancy of explanations were acceptable, then reporting all features as an explanation could also be argued to be acceptable. The key observation is that succinctness and irreducibility are two desirable properties when reporting explanations. Furthermore, there are recent examples of large deep DTs in practical use [25].

Regarding the other two myths, the situation is more problematic, in that human decision makers can obtain erroneous information when using either model-agnostic explainability (in the case of myth #02) or when using feature attribution based on Shapley values (in the case of myth #03). If one critical goal of XAI is to build trust, then neither model-agnostic explainability nor feature attribution with Shapley values should be employed, in domains where trust matters, especially in those where situations of catastrophic failure can occur.

VIII. CONCLUSIONS & RESEARCH DIRECTIONS

This paper overviews a number of recent results which disprove several myths of (non-formal) XAI. The first myth of XAI is that simple models do not require explanations since the model (which is called interpretable) is itself the explanation [65], [73], [74]. Recent results [45], [46] prove in theory and demonstrate in practice that redundant literals in paths are ubiquitous in decision trees, one of the hallmarks of model interpretability. A second myth of XAI is the use of model-agnostic methods. Recent work [37], [44], [89] offers experimental evidence that model-agnostic explanations are often incorrect. A third and final myth of XAI is the use of Shapley values as the theoretical underpinning of (some) feature attribution methods. Recent work [36] demonstrated that Shapley values can give misleading information regarding the relative importance of features in explanations.

Future work in applying formal methods to XAI will continue to expand the range of ML models that can be efficiently explained, but it will continue to uncover other expected myths of XAI.

Acknowledgments. This work resulted from collaborations with several colleagues, including N. Asher, M. Cooper, X. Huang, A. Hurault, A. Ignatiev, Y. Izza, O. Létoffé, C. Mencía, A. Morgado, N. Narodytska, R. Passos and J. Planes. The author also acknowledges the incentive provided by the ERC who, by not funding this research nor a handful of other grant

Case	Instance	Relevant	Irrelevant	Shapley values	Justification
14	$((0, 0, 1, 1), 0)$	1, 2, 4	3	$Sv(1) = -0.13$ $Sv(2) = 0.33$ $Sv(3) = 0.08$ $Sv(4) = 0.00$	$Irrelevant(3) \wedge Sv(3) \neq 0 \wedge$ $Relevant(4) \wedge Sv(4) = 0$
15	$((1, 1, 1, 1), 0)$	1, 2, 3	4	$Sv(1) = -0.12$ $Sv(2) = -0.12$ $Sv(3) = -0.12$ $Sv(4) = 0.17$	$Irrelevant(4) \wedge$ $\forall(j \in \{1, 2, 3\}). Sv(j) < Sv(4)$

TABLE IV: Examples of issues with Shapley for explainability for boolean classifiers of Figure 3

applications between 2012 and 2022, has had a lasting impact in framing the research presented in this paper.

REFERENCES

- [1] L. Amgoud and J. Ben-Naim, "Axiomatic foundations of explainability," in *IJCAI*, 2022, pp. 636–642.
- [2] M. Arenas, D. Baez, P. Barceló, J. Pérez, and B. Subercaseaux, "Foundations of symbolic languages for model interpretability," in *NeurIPS*, 2021.
- [3] M. Arenas, P. Barceló, L. E. Bertossi, and M. Monet, "On the complexity of SHAP-score-based explanations: Tractability via knowledge compilation and non-approximability results," *CoRR*, vol. abs/2104.08015, 2021. [Online]. Available: <https://arxiv.org/abs/2104.08015>
- [4] —, "The tractability of SHAP-score-based explanations for classification over deterministic and decomposable boolean circuits," in *AAAI*, 2021, pp. 6670–6678.
- [5] M. Arenas, P. Barceló, M. Romero, and B. Subercaseaux, "On computing probabilistic explanations for decision trees," *CoRR*, vol. abs/2207.12213, 2022. [Online]. Available: <https://doi.org/10.48550/arXiv.2207.12213>
- [6] G. Audemard, S. Bellart, L. Bounia, F. Koriche, J. Lagniez, and P. Marquis, "On the computational intelligibility of boolean classifiers," in *KR*, 2021, pp. 74–86.
- [7] —, "On the explanatory power of boolean decision trees," *Data Knowl. Eng.*, vol. 142, p. 102088, 2022.
- [8] S. Bach, A. Binder, G. Montavon, F. Klauschen, K.-R. Müller, and W. Samek, "On pixel-wise explanations for non-linear classifier decisions by layer-wise relevance propagation," *PloS one*, vol. 10, no. 7, p. e0130140, 2015.
- [9] P. Barceló, M. Monet, J. Pérez, and B. Subercaseaux, "Model interpretability through the lens of computational complexity," in *NeurIPS*, 2020.
- [10] S. Barocas, M. Hardt, and A. Narayanan, *Fairness in machine learning*. Online book, 2022, <https://fairmlbook.org/pdf/fairmlbook.pdf>.
- [11] Y. Bengio, Y. LeCun, and G. E. Hinton, "Deep learning for AI," *Commun. ACM*, vol. 64, no. 7, pp. 58–65, 2021. [Online]. Available: <https://doi.org/10.1145/3448250>
- [12] G. Blanc, J. Lange, and L. Tan, "Provably efficient, succinct, and precise explanations," in *NeurIPS*, 2021.
- [13] R. Boumazouza, F. C. Alili, B. Mazure, and K. Tabia, "ASTERYX: A model-agnostic SaT-based appRoach for sYmbolic and score-based eXplanations," in *CIKM*, 2021, pp. 120–129.
- [14] L. Breiman, "Statistical modeling: The two cultures," *Statistical science*, vol. 16, no. 3, pp. 199–231, 2001.
- [15] J. Chen, L. Song, M. J. Wainwright, and M. I. Jordan, "L-Shapley and C-Shapley: Efficient model interpretation for structured data," in *ICLR*, 2019.
- [16] T. Chen and C. Guestrin, "XGBoost: A scalable tree boosting system," in *KDD*, 2016, pp. 785–794.
- [17] M. C. Cooper and J. Marques-Silva, "On the tractability of explaining decisions of classifiers," in *CP*, L. D. Michel, Ed., 2021, pp. 21:1–21:18.
- [18] —, "Tractability of explaining classifier decisions," *Artif. Intell.*, vol. 316, p. 103841, 2023. [Online]. Available: <https://doi.org/10.1016/j.artint.2022.103841>
- [19] A. Darwiche and A. Hirth, "On the (complete) reasons behind decisions," *J. Log. Lang. Inf.*, vol. 32, no. 1, pp. 63–88, 2023. [Online]. Available: <https://doi.org/10.1007/s10849-022-09377-8>
- [20] A. Darwiche and P. Marquis, "On quantifying literals in boolean logic and its applications to explainable AI," *J. Artif. Intell. Res.*, vol. 72, pp. 285–328, 2021.
- [21] A. Datta, S. Sen, and Y. Zick, "Algorithmic transparency via quantitative input influence: Theory and experiments with learning systems," in *IEEE S&P*, 2016, pp. 598–617.
- [22] G. V. den Broeck, A. Lykov, M. Schleich, and D. Suciu, "On the tractability of SHAP explanations," in *AAAI*, 2021, pp. 6505–6513.
- [23] —, "On the tractability of SHAP explanations," *J. Artif. Intell. Res.*, vol. 74, pp. 851–886, 2022. [Online]. Available: <https://doi.org/10.1613/jair.1.13283>
- [24] J. Ferreira, M. de Sousa Ribeiro, R. Gonçalves, and J. Leite, "Looking inside the black-box: Logic-based explanations for neural networks," in *KR*, 2022, p. 432–442.
- [25] M. M. Ghiasi, S. Zendeheboudi, and A. A. Mohsenipour, "Decision tree-based diagnosis of coronary artery disease: CART model," *Comput. Methods Programs Biomed.*, vol. 192, p. 105400, 2020. [Online]. Available: <https://doi.org/10.1016/j.cmpb.2020.105400>
- [26] N. Gorji and S. Rubin, "Sufficient reasons for classifier decisions in the presence of domain constraints," in *AAAI*, February 2022.
- [27] R. Guidotti, A. Monreale, S. Ruggieri, F. Turini, F. Giannotti, and D. Pedreschi, "A survey of methods for explaining black box models," *ACM Comput. Surv.*, vol. 51, no. 5, pp. 93:1–93:42, 2019.
- [28] D. Gunning, "Explainable artificial intelligence XAI(), DARPA, Tech. Rep. DARPA-BAA-16-53, 8 2016.
- [29] D. Gunning and D. W. Aha, "DARPA's explainable artificial intelligence (XAI) program," *AI Mag.*, vol. 40, no. 2, pp. 44–58, 2019. [Online]. Available: <https://doi.org/10.1609/aimag.v40i2.2850>
- [30] D. Gunning, M. Stefik, J. Choi, T. Miller, S. Stumpf, and G. Yang, "XAI - explainable artificial intelligence," *Sci. Robotics*, vol. 4, no. 37, 2019. [Online]. Available: <https://doi.org/10.1126/scirobotics.aay7120>
- [31] X. Hu, C. Rudin, and M. I. Seltzer, "Optimal sparse decision trees," in *NeurIPS*, 2019, pp. 7265–7273.
- [32] X. Huang, M. C. Cooper, A. Morgado, J. Planes, and J. Marques-Silva, "Feature necessity & relevancy in ML classifier explanations," in *TACAS*, 4 2023.
- [33] X. Huang, Y. Izza, A. Ignatiev, M. C. Cooper, N. Asher, and J. Marques-Silva, "Tractable explanations for d-DNNF classifiers," in *AAAI*, 2022, pp. 5719–5728.
- [34] X. Huang, Y. Izza, A. Ignatiev, and J. Marques-Silva, "On efficiently explaining graph-based classifiers," in *KR*, 2021, pp. 356–367.
- [35] X. Huang, Y. Izza, and J. Marques-Silva, "Solving explainability queries with quantification: The case of feature relevancy," in *AAAI*, 2023.
- [36] X. Huang and J. Marques-Silva, "The inadequacy of Shapley values for explainability," *CoRR*, vol. abs/2302.08160, 2023. [Online]. Available: <https://doi.org/10.48550/arXiv.2302.08160>
- [37] A. Ignatiev, "Towards trustable explainable AI," in *IJCAI*, 2020, pp. 5154–5158.
- [38] A. Ignatiev, M. C. Cooper, M. Siala, E. Hebrard, and J. Marques-Silva, "Towards formal fairness in machine learning," in *CP*, 2020, pp. 846–867.

- [39] A. Ignatiev, Y. Izza, P. J. Stuckey, and J. Marques-Silva, "Using MaxSAT for efficient explanations of tree ensembles," in *AAAI*, 2022, pp. 3776–3785.
- [40] A. Ignatiev and J. Marques-Silva, "SAT-based rigorous explanations for decision lists," in *SAT*, 2021, pp. 251–269.
- [41] A. Ignatiev, N. Narodytska, N. Asher, and J. Marques-Silva, "From contrastive to abductive explanations and back again," in *AIxIA*, 2020, pp. 335–355.
- [42] A. Ignatiev, N. Narodytska, and J. Marques-Silva, "Abduction-based explanations for machine learning models," in *AAAI*, 2019, pp. 1511–1519.
- [43] —, "On relating explanations and adversarial examples," in *NeurIPS*, 2019, pp. 15 857–15 867.
- [44] —, "On validating, repairing and refining heuristic ML explanations," *CoRR*, vol. abs/1907.02509, 2019. [Online]. Available: <http://arxiv.org/abs/1907.02509>
- [45] Y. Izza, A. Ignatiev, and J. Marques-Silva, "On explaining decision trees," *CoRR*, vol. abs/2010.11034, 2020. [Online]. Available: <https://arxiv.org/abs/2010.11034>
- [46] —, "On tackling explanation redundancy in decision trees," *J. Artif. Intell. Res.*, vol. 75, pp. 261–321, 2022. [Online]. Available: <https://jair.org/index.php/jair/article/view/13575/>
- [47] —, "On tackling explanation redundancy in decision trees," *CoRR*, vol. abs/2205.09971, 2022. [Online]. Available: <https://doi.org/10.48550/arXiv.2205.09971>
- [48] Y. Izza and J. Marques-Silva, "On explaining random forests with SAT," in *IJCAI*, 2021, pp. 2584–2591.
- [49] H. Lakkaraju, S. H. Bach, and J. Leskovec, "Interpretable decision sets: A joint framework for description and prediction," in *KDD*, 2016, pp. 1675–1684.
- [50] Y. LeCun, Y. Bengio, and G. Hinton, "Deep learning," *nature*, vol. 521, no. 7553, pp. 436–444, 2015.
- [51] Z. C. Lipton, "The myths of model interpretability," *Commun. ACM*, vol. 61, no. 10, pp. 36–43, 2018.
- [52] X. Liu and E. Lorini, "A unified logical framework for explanations in classifier systems," *J. Log. Comput.*, vol. 33, no. 2, pp. 485–515, 2023. [Online]. Available: <https://doi.org/10.1093/logcom/exac102>
- [53] S. M. Lundberg, G. G. Erion, H. Chen, A. J. DeGrave, J. M. Prutkin, B. Nair, R. Katz, J. Himmelfarb, N. Bansal, and S. Lee, "From local explanations to global understanding with explainable AI for trees," *Nat. Mach. Intell.*, vol. 2, no. 1, pp. 56–67, 2020. [Online]. Available: <https://doi.org/10.1038/s42256-019-0138-9>
- [54] S. M. Lundberg and S. Lee, "A unified approach to interpreting model predictions," in *NeurIPS*, 2017, pp. 4765–4774.
- [55] E. L. Malfa, R. Michelmoro, A. M. Zbrzezny, N. Paoletti, and M. Kwiatkowska, "On guaranteed optimal robust explanations for NLP models," in *IJCAI*, 2021, pp. 2658–2665.
- [56] J. Marques-Silva, "Logic-based explainability in machine learning," *CoRR*, vol. abs/2211.00541, 2022. [Online]. Available: <https://doi.org/10.48550/arXiv.2211.00541>
- [57] J. Marques-Silva, T. Gerspacher, M. C. Cooper, A. Ignatiev, and N. Narodytska, "Explaining naive bayes and other linear classifiers with polynomial time and delay," in *NeurIPS*, 2020.
- [58] —, "Explanations for monotonic classifiers," in *ICML*, 2021, pp. 7469–7479.
- [59] J. Marques-Silva and A. Ignatiev, "Delivering trustworthy AI through formal XAI," in *AAAI*, 2022, pp. 12 342–12 350.
- [60] J. Marques-Silva and A. Ignatiev, "No silver bullet: interpretable ml models must be explained," *Frontiers in Artificial Intelligence*, vol. 6, 2023. [Online]. Available: <https://www.frontiersin.org/articles/10.3389/fraci.2023.1128212>
- [61] N. Mehrabi, F. Morstatter, N. Saxena, K. Lerman, and A. Galstyan, "A survey on bias and fairness in machine learning," *ACM Comput. Surv.*, vol. 54, no. 6, pp. 115:1–115:35, 2021. [Online]. Available: <https://doi.org/10.1145/3457607>
- [62] L. Merrick and A. Taly, "The explanation game: Explaining machine learning models using Shapley values," in *CDMAKE*, 2020, pp. 17–38.
- [63] G. A. Miller, "The magical number seven, plus or minus two: Some limits on our capacity for processing information," *Psychological review*, vol. 63, no. 2, pp. 81–97, 1956.
- [64] T. Miller, "Explanation in artificial intelligence: Insights from the social sciences," *Artif. Intell.*, vol. 267, pp. 1–38, 2019.
- [65] C. Molnar, *Interpretable Machine Learning*. Leanpub, 2020, <http://tiny.cc/6c76tz>.
- [66] G. Montavon, W. Samek, and K. Müller, "Methods for interpreting and understanding deep neural networks," *Digit. Signal Process.*, vol. 73, pp. 1–15, 2018.
- [67] N. Narodytska, A. A. Shrotri, K. S. Meel, A. Ignatiev, and J. Marques-Silva, "Assessing heuristic machine learning explanations with model counting," in *SAT*, 2019, pp. 267–278.
- [68] D. Pessach and E. Shmueli, "A review on fairness in machine learning," *ACM Comput. Surv.*, vol. 55, no. 3, pp. 51:1–51:44, 2023. [Online]. Available: <https://doi.org/10.1145/3494672>
- [69] ProPublica, "Machine bias," <https://bit.ly/3zaHb2F>, 2016.
- [70] R. Reiter, "A theory of diagnosis from first principles," *Artif. Intell.*, vol. 32, no. 1, pp. 57–95, 1987. [Online]. Available: [https://doi.org/10.1016/0004-3702\(87\)90062-2](https://doi.org/10.1016/0004-3702(87)90062-2)
- [71] M. T. Ribeiro, S. Singh, and C. Guestrin, "'why should I trust you?': Explaining the predictions of any classifier," in *KDD*, 2016, pp. 1135–1144.
- [72] —, "Anchors: High-precision model-agnostic explanations," in *AAAI*, 2018, pp. 1527–1535.
- [73] C. Rudin, "Stop explaining black box machine learning models for high stakes decisions and use interpretable models instead," *Nature Machine Intelligence*, vol. 1, no. 5, pp. 206–215, 2019.
- [74] —, "Why black box machine learning should be avoided for high-stakes decisions, in brief," *Nature Reviews Methods Primers*, vol. 2, no. 1, pp. 1–2, 2022.
- [75] C. Rudin, C. Chen, Z. Chen, H. Huang, L. Semenova, and C. Zhong, "Interpretable machine learning: Fundamental principles and 10 grand challenges," *Statistics Surveys*, vol. 16, pp. 1–85, 2022.
- [76] W. Samek, G. Montavon, S. Lapuschkin, C. J. Anders, and K. Müller, "Explaining deep neural networks and beyond: A review of methods and applications," *Proc. IEEE*, vol. 109, no. 3, pp. 247–278, 2021. [Online]. Available: <https://doi.org/10.1109/JPROC.2021.3060483>
- [77] W. Samek, G. Montavon, A. Vedaldi, L. K. Hansen, and K. Müller, Eds., *Explainable AI: Interpreting, Explaining and Visualizing Deep Learning*. Springer, 2019.
- [78] W. Samek and K. Müller, "Towards explainable artificial intelligence," in *Explainable AI: Interpreting, Explaining and Visualizing Deep Learning*, W. Samek, G. Montavon, A. Vedaldi, L. K. Hansen, and K. Müller, Eds. Springer, 2019, pp. 5–22.
- [79] S. A. Seshia, D. Sadigh, and S. S. Sastry, "Toward verified artificial intelligence," *Commun. ACM*, vol. 65, no. 7, pp. 46–55, 2022. [Online]. Available: <https://doi.org/10.1145/3503914>
- [80] L. S. Shapley, "A value for n -person games," *Contributions to the Theory of Games*, vol. 2, no. 28, pp. 307–317, 1953.
- [81] A. Shih, A. Choi, and A. Darwiche, "A symbolic approach to explaining bayesian network classifiers," in *IJCAI*, 2018, pp. 5103–5111.
- [82] D. Slack, A. Hilgard, S. Singh, and H. Lakkaraju, "Reliable post hoc explanations: Modeling uncertainty in explainability," in *NeurIPS*, 2021, pp. 9391–9404.
- [83] E. Strumbelj and I. Kononenko, "An efficient explanation of individual classifications using game theory," *J. Mach. Learn. Res.*, vol. 11, pp. 1–18, 2010. [Online]. Available: <https://dl.acm.org/doi/10.5555/1756006.1756007>
- [84] —, "Explaining prediction models and individual predictions with feature contributions," *Knowl. Inf. Syst.*, vol. 41, no. 3, pp. 647–665, 2014. [Online]. Available: <https://doi.org/10.1007/s10115-013-0679-x>
- [85] C. Szegedy, W. Zaremba, I. Sutskever, J. Bruna, D. Erhan, I. J. Goodfellow, and R. Fergus, "Intriguing properties of neural networks," in *ICLR*, 2014.
- [86] The Verge, "UK ditches exam results generated by biased algorithm after student protests," <https://bit.ly/3kevIsB>, 2020.
- [87] S. Wäldchen, J. MacDonald, S. Hauch, and G. Kutyniok, "The computational complexity of understanding binary classifier decisions," *J. Artif. Intell. Res.*, vol. 70, pp. 351–387, 2021. [Online]. Available: <https://doi.org/10.1613/jair.1.12359>
- [88] D. S. Watson, "Rational Shapley values," in *FaCCt*, 2022, pp. 1083–1094.
- [89] J. Yu, A. Ignatiev, P. J. Stuckey, N. Narodytska, and J. Marques-Silva, "Eliminating the impossible, whatever remains must be true: On extracting and applying background knowledge in the context of formal explanations," in *AAAI*, 2023.