

Training Priors Predict Text-To-Image Model Performance

Charles Lovering Ellie Pavlick
Department of Computer Science
Brown University
{first}_{last}@brown.edu

Abstract

Text-to-image models can often generate some relations, i.e., “astronaut riding horse”, but fail to generate other relations composed of the same basic parts, i.e., “horse riding astronaut”. These failures are often taken as evidence that the models rely on training priors rather than constructing novel images compositionally. This paper tests this intuition directly on the stablediffusion 2.1 text-to-image model. By looking at the subject-verb-object (SVO) triads that form the backbone of these prompts (e.g., “astronaut”, “ride”, “horse”), we find that the more often an SVO triad appears in the training data, the better the model can generate an image aligned with that triad. Here, by aligned we mean that each of the terms appears in the generated image in the proper relation to each other. However, this increased frequency also diminishes how well the model can generate an image aligned with the flipped triad. For example, if “astronaut riding horse” appears frequently in the training data, the image for “horse riding astronaut” will tend to be poorly aligned. We also find that models often struggle to generate terms in atypical roles, e.g., if “horse” is more often the semantic patient (object), the model might struggle to visualize it as a semantic agent (subject). Our results thus show that current models are biased to generate images aligned with relations seen in training, and provide important new data in the ongoing debate on whether these text-to-image models employ abstract compositional structure in a traditional sense, or rather, interpolate between relations explicitly seen in the training data.

1 Introduction

Whether neural networks extrapolate beyond their training data is an open question. Part of the debate hinges on the nature of the mechanism that supports models’ generalization: is it an abstract combinatorial structure of the type that characterized good-old-fashioned-AI [Fodor, 1998], or rather a “mix-and-match” strategy born out of patterns seen in

training [Lake and Baroni, 2018, Chaabouni et al., 2020]?

Whichever mechanism models are using, both text [OpenAI, 2023, Ouyang et al., 2022b] and image [Ramesh et al., 2022, Rombach et al., 2021, Saharia et al., 2022, Yu et al., 2022] generation models push far beyond the bounds of what was possible a few years ago. Anecdotal examples of models writing working code, authoring poetry, and generating images [Bubeck et al., 2023] make it hard to deny that they possess some mechanism for compositionality. However, failures of such models consistently crop up [Marcus, 2022, McKenzie et al., 2022a,b, 2023]. The increasing scale of these models’ training datasets and costs makes it difficult to run controlled experiments, and thus most debates about how models achieve their apparent compositional behavior rely on speculation or in-principle arguments.

A better understanding of what “parts” our models can combine together will engender a better understanding of this debate at large. In this work, we focus on the stablediffusion 2.1 text-to-image model. Such models can often generate many relations, i.e., “astronaut riding horse”, but fail to generate atypical relations composed of the same basic parts, i.e., “horse riding astronaut”. These failures are often taken as evidence that the models rely on training priors rather than constructing novel images using more systematic mechanisms under the hood. By and large, our results support this intuition. Looking at the subject-verb-object relations that form the backbone of these prompts, we find that the increased frequency of a subject-verb-object relation in the training data improves how well the model can generate an image aligned with that relation, but this increased frequency diminishes how well the model can generate an image aligned with the flipped relation (object-verb-subject). For example, the more common a relation like “astronaut riding horse” is in the training data,

the worse the “horse riding astronaut” is generated. These results demonstrate that the relations seen during training have a significant impact on what the model is able to successfully generate. We also find that frequencies of individual terms, like how often the subject has been seen in any context, have a significant impact on the alignment. Together, these results strongly suggest the model uses an underlying “mix-and-match” mechanism to support generalization, rather than using a more abstract combinatorial process.

2 Experimental Design

In this section, we formulate our primary questions as hypotheses about how the estimated counts of subject-verb-objects in the training data impact text-to-image prompt and image alignments.



Figure 1: **Example generations.** Left: “dog chasing a ball”; Right: “ball chasing a dog.” These examples were generated by stablediffusion 2.1 (and are cherry-picked out of 4 generations.)

2.1 The Problem

Our aim is to characterize when text-to-image models successfully generate relations. For example, we ask if a given model can generate:

A dog chasing a ball. $\langle \text{dog}, \text{chase}, \text{ball} \rangle$
 A ball chasing a dog. $\langle \text{ball}, \text{chase}, \text{dog} \rangle$

Each prompt has an underlying triad: a subject s , a verb v , and an object o .¹ For example, for the sentence “A dog chasing a ball,” $s = \text{“dog,”}$ $v = \text{“chase,”}$ and $o = \text{“ball”}$. For shorthand, we denote this triad as $\langle s, v, o \rangle$. We construct our dataset to include both $\langle s, v, o \rangle$ and $\langle o, v, s \rangle$ — we call the more frequently appearing triad the default triad, and the other, the flipped triad.

Notation To help track various counts, we introduce some notation. This notation is all with

¹Note that in the paper, our relations are such that the subject is always the semantic agent and the object is the semantic patient. Thus, throughout, we use the terms “subject” and “agent” interchangeably, and likewise use “object” and “patient” interchangeably.

respect to a given prompt formatted from a triad $\langle s = S, v = V, o = O \rangle$.

SVO Est. count of the relation
 OVS Est. count of the flipped relation
 Xxx, xXx . . . Est. count of X in the given role

Here, Xxx, xXx . . . refer to the counts of individual entities that appear in a specific slot in any context *except* for the counts covered by SVO or OVS.² For example, Sxx refers to the count of triads with the subject S and any verb and object. Analogously, xxS refers to the count of triads with the term S as the object with any verb and subject; Sxx, Oxx, xVx, xxS, xxO are all similarly defined. These terms are all estimated counts from the training data of stablediffusion 2.1.

For each frequency, we use a log-transformed value in our regressions and plots. For example, for SVO, we use SVO' where $SVO' = \log_{10}(SVO + 1)$ s.t. the frequencies range from $[0, \infty]$.

2.2 Hypotheses

We test two primary hypotheses, below.

Forward: Increased SVO causes better alignment for $\langle S, V, O \rangle$.

Backward: Increased OVS causes worse alignment for $\langle S, V, O \rangle$.

Desiderata Testing our hypotheses requires collecting relations from the training data, finding estimated counts for those relations, having a prompt for each relation, generating an image for each prompt, and then measuring how well each of these prompts and images align. Because our dataset is only for evaluation (we do not train nor finetune our models) we do not need a large dataset. Moreover, because we want to have multiple ratings for each prompt-image pair, and examine samples individually, a smaller dataset is best. The primary difficulty in constructing such a dataset is finding relations with varying count statistics. These constraints guide some of the decisions we made when collecting our dataset (§3).

2.3 Statistical Methods

Though we present results across different views of our dataset, we focus on a single regression to test our hypotheses.

²That is, the triads that contribute to the count Sxx are disjoint from the triads that contribute to the count of SVO. This is done so that the terms are not algebraically tied and thus in violation of independence assumptions needed in our regressions.

$$\text{Alignment} \sim \text{SVO} + \text{OVS} + \text{Sxx} + \text{xVx} + \text{xxO} + \text{Sxx} + \text{xxO}^3$$

Specifically, we are interested in which of the above counts have a significant effect on alignment, controlling for the other counts. We detail how we measure alignment below in §3. In short, we crowdsource $N = 5$ ratings per image-prompt pair. There are a number of different options with different tradeoffs on how to handle the multiple ratings per image. If we consider the raters as random effects, we control for raters’ variation, but we are no longer able to report p -values. Happily, this decision did not meaningfully impact the results, so the regressions use disaggregated ratings (no averaging) without random effects. See alternate formulations in Table 4 and Table 5. For visual acuity, our plots use average alignments.

Our data and data collection break independence assumptions. The individual terms (the S, V, and O) are all individually frequent. Furthermore, we bootstrapped our search to find more relations with high-frequency counts. Both of these decisions means the relations that comprise our dataset are not randomly sampled from among the population of possible relations. Furthermore, as part of the curation, we manually edit and select prompts that are “drawable”—i.e., one could in principle draw it, even if the relation is not natural. For example, we filter out prompts that are hard to understand like ⟨city, cover, illustration⟩ but keep others like ⟨dog, chasing, ball⟩. Lastly, the default and flipped versions of a prompt are not independent. The symmetry across the diagonals of Figure 2 highlights this point. To remedy this issue, we split the dataset into two partitions in §4.3.⁴

3 Dataset

We use the text-to-image model stablediffusion 2.1 because its training data, code, and model weights are public. We parse its training set, LAION [Schuhmann et al., 2022]⁵, and create a curated dataset of about 650 triads, counts, prompts, gen-

³This R syntax is meant to show that we see how the alignment of the prompts can be fit by the counts SVO and OVS while being controlled by the individual term counts.

⁴Figure 2 plots highlight that the triad frequencies (SVO and OVS) are correlated with the individual frequencies (Sxx, Oxx, ...). Moreover, the SVO and OVS frequencies between a default and a flipped triad are inverted. To control these dependencies, when we analyze the full dataset in §4.3, we split default and flipped pairs into different subsets.

⁵We use the subset with an aesthetic score 4.5+ as this is what stablediffusion 2.1 was trained on.

erated images, and alignment ratings. So, we construct our base dataset from the training data of stablediffusion 2.1 (LAION), focused on subject-verb-object relationships. Later sections §§ 4.1 to 4.3 use different subsets of this dataset. The dataset is released in the linked url.⁶

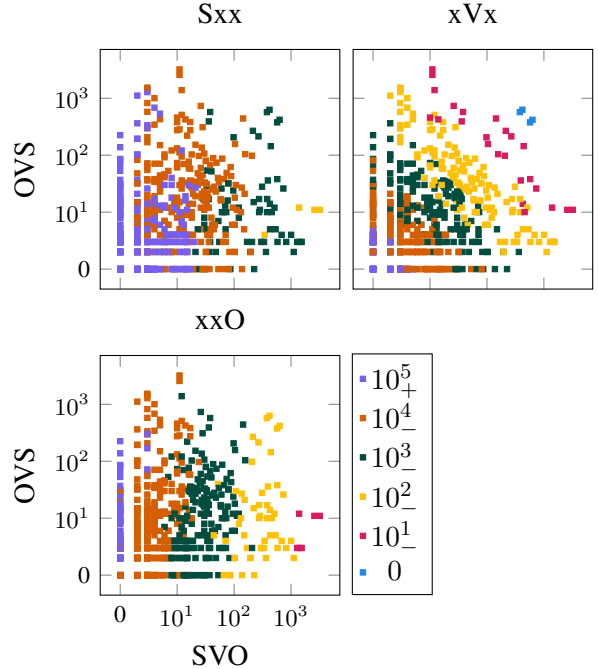


Figure 2: **Dataset Samples Plotted by SVO (x-axis) and OVS (y-axis)**: As SVO increases along the x-axis, the individual frequencies Sxx and xxO decrease. It seems that words that appear most frequently in specific relations appear less frequently in others. xVx decreases as both SVO and OVS increase. Thus, **the individual terms and the triad frequencies are (negatively) correlated**. There are 654 examples with 5 ratings each. These plots show the (same) dataset colored by the frequency counts Sxx, xVx, xxO where the legend details the coloring. For example, 10^4_+ denotes that the examples were seen less than 10^4 but more than 10^3 times. (Oxx and xxS are not shown, but, because of the structure of the dataset, they would be colored symmetrically across the diagonal from the default counterpart (Sxx and Oxx) (xxO and xxS).)

Dataset Collection and Measuring Frequency

We parse LAION [Schuhmann et al., 2022]⁷, a dataset of paired text and image using Spacy⁸ for subject-verb-object relations. The parsing is noisy;

⁶Dataset: https://docs.google.com/spreadsheets/d/1hcMEMqSX_0regA-s0UplvzrNX2Ho0jHNeIIq-iVoQPI/edit?usp=sharing

⁷We sample from the subset with an aesthetic score 4.5+ because this is what stablediffusion 2.1 was trained upon.

⁸<https://spacy.io/>

Our search finds subject-verb-object relations in 10% of (about 1.3 billion) instances.⁹ Many instances are fragments, e.g., “homes with wrap around porches...”, with no subject-verb-object relation. After we collect the counts of subject-verb-objects, we sample relations from different frequencies. Finally, we manually filter for relations that are “drawable” and produce a prompt for each relation. Appendix A further details the initial collection process and sanity checks a number of assumptions that we outline in our Limitations (§6). Figure 2 shows the distribution of examples across the different frequencies defined above.

Formatting Prompts We format the prompts such that the subject is always the agent (the entity doing the action) and the verb is always the patient (the entity on the receiving end of the action). Specifically, we format all relations into prompts using the structure: A photograph of a {subject} {verb} a {object}. “A photograph of” is prepended to each example because in pilot studies it narrowed the type of generation to be photographic, avoiding a lot of trivial errors. After adding the prefix, we edit each example to ensure it is grammatical. For instance, for mass nouns there is no “a” included: ⟨girl, bring, water⟩ yields “A photograph of a girl bringing water.” Though we could generate many reasonable prompt variations for each relation, in our dataset, we have a single prompt per relation (and we generate a single image per prompt). Future work could easily expand our dataset along both of these axes.

Measuring Alignment We measure the performance of the text-to-image models by asking people how well the prompts and the generated images align. We use SurgeAI¹⁰ to run these experiments; Figure 11 in Appendix B is a screenshot of the interface. The alignment scores were collected across a 5-point Likert scale from “Strongly Disagree” to “Strongly Agree.” In our plots and results, we standardize the five ratings from 0 to 1. For the sake of analysis, we consider an average alignment score above 0.75 as a successful generation. (This threshold is chosen because 0.75 and 1 correspond to affirmative responses “Agree” and “Strongly Agree.”

⁹This is admittedly a small fraction. We performed significant manual analysis in order to verify that our 10% sample is not unduly biased, and thus that our conclusions are reliable despite the small sample. See Appendix A.2 for a detailed discussion.

¹⁰<https://www.surgehq.ai/>

as defined by the rating task.)

4 Experiments

This paper looks at two propositions: Increased exposure to a relation leads to increasing capacity of text-to-image models to generate the relation (forward hypothesis), but, this increased exposure degrades the model’s capacity to generate the flipped relation (backward hypothesis). By filtering the dataset into different controlled partitions, we get a more complete picture of how the frequencies impact the generations.

Summary of Takeaways To summarize the findings of the below sections: When the prompt has been seen during training increased SVO increases alignment. For unseen prompts, the effect of OVS on alignment is minimal. When looking more broadly at the default examples, the effects of both SVO (and OVS) directly support the forward (and backward) hypotheses. However, for the flipped examples, cases like ⟨ball, chase, dog⟩ where the ordering is less common, the effects are weaker. Notably, individual terms Oxx and xxS also impact the results, suggesting that some words tend to have typical roles—they tend to be used either as agents or patients.

Term	SVO Isolated §4.1	
	Effect	<i>p</i> -value
SVO	0.31	0.00
Sxx	0.04	0.27
xVx	0.12	0.01
xxO	0.07	0.24
Oxx	-0.18	0.00
xxS	-0.23	0.00

Table 1: **Regression Coefficients** for Predicting Alignment (when OVS count is 0).

4.1 Forward: Increased SVO Increases Alignment

First, we want to establish whether (or not) the increasing frequency of relations in the training data increases the alignment scores, e.g., the forward hypothesis. The relations we use in this experiment are filtered so that the inverse relation is always unseen, e.g., OVS is 0, isolating the effect of SVO. For example, if ⟨dog, chase, ball⟩ is in this subset, then ⟨ball, chase, dog⟩ is unseen.

4.1.1 Results

The results Table 1, depicted in Figure 3, support the forward hypothesis that more frequent prompts are better aligned with their outputs. After $SVO > 10^2$ examples, a majority of generations are successful (specifically, 18 of 26 prompts were successfully generated with average scores above 0.75.) Several individual terms also impact the results. The effect of O_{xx} is -0.18 , meaning the more frequently that the object of relation takes the role of the subject in the training data, the worse the alignment. The same is analogously true for subjects (the effect of xxS is -0.23). These results don't discount the forward hypothesis but do suggest that a number of overlapping training priors play a part in the generations, not just the frequency of OVS. Correlation between the frequency and the alignment is 0.421 ($p < 1e - 7$).

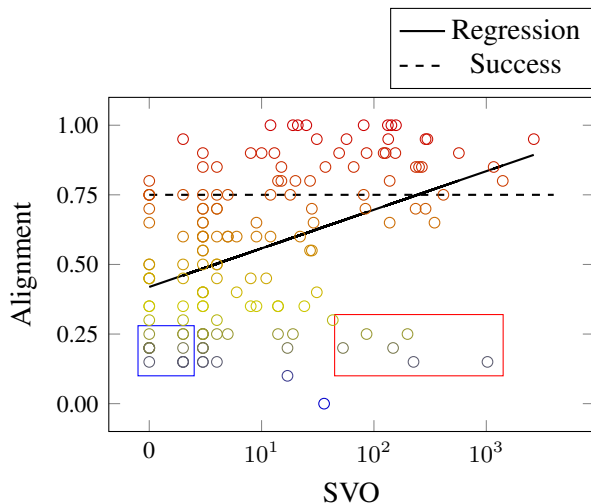


Figure 3: **Alignment improves with Frequency.** Each alignment score is the mean across 5 ratings. A sample of the instances highlighted by the blue rectangle are shown in Figure 4; the instances highlighted by the red rectangle are shown in Figure 5.

4.1.2 Qualitative Examples

The text-to-image model appears to be failing in different ways at low versus high frequency. In a sample of low-frequency samples, highlighted by the blue rectangle in Figure 3 and shown in Figure 4, either the subject or the object is generated but not both. Failed high-frequency samples contrast this result. Highlighted by the red rectangle in Figure 3 and shown in Figure 5 we qualitatively examine these examples: the subjects and objects are generated, but the verb is not properly shown.

While clearly failing, the high-frequency samples are closer to being aligned generations. They appear to express a more common relation/verb than the one requested by the prompt, again pointing towards a training prior.



Figure 4: **Failed Low-Frequency Generations that Support the Forward Hypothesis.** These examples were all present in the training data with low frequency, sampled from the blue rectangle in Figure 3. In all six examples, either the subject or the object is present, but never both.

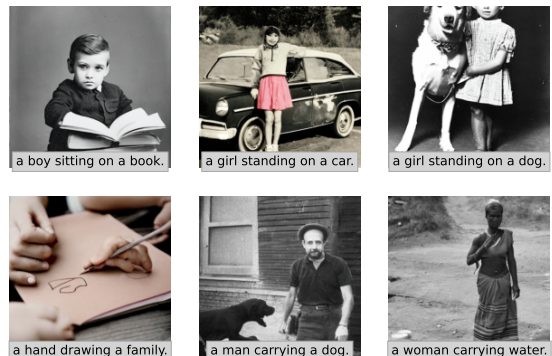


Figure 5: **Failed High-Frequency Generations that Run Against the Forward Hypothesis.** These examples were all present in the training data with high frequency, sampled from the red rectangle in Figure 3. In all six examples, the subject is present; In four of six, the object is present; In two of six, the model appropriately generates the relationship between the entities.

4.2 Backward: Increased OVS Decreases Alignment

We established that the frequency of a relation, say $\langle \text{dog, chase, ball} \rangle$, improves the generation performance, given that the flipped relation, i.e., $\langle \text{ball, chase, dog} \rangle$, was unseen. Now, we look at the opposite case. Specifically, we generate the images for the unseen triads, say $\langle \text{ball, chase, dog} \rangle$, where their inverse triads (default examples) are

seen to varying degrees. The question this section addresses is whether the text-to-image model is forced to fight a prior directed toward the seen default prompt – the backward hypothesis.

Term	OVS Isolated §4.2	
	Effect	<i>p</i> -value
OVS	-0.06	0.38
Sxx	0.07	0.01
xVx	0.13	0.00
xxO	0.19	0.00
Oxx	0.10	0.01
xxS	-0.19	0.00

Table 2: **Regression Coefficients** for Predicting Alignment (when SVO count is 0).

4.2.1 Results

Our results are shown in Table 2, shown in Figure 6. It is worth highlighting, first, that alignment overall is very poor. That is, in cases when the model is asked to generate a relation SVO that is *unattested* during training, the generated image is very rarely judged to reflect the prompt. Moreover, the frequency of the flipped relation (OVS) does not have a significant effect on alignment. There is a slight (insignificant) negative effect for OVS, but this drop appears to be better explained by xxS: The more common the subject specifically is seen in the object role, the worse the generation.

The individual terms xVx and xxO positively impact the alignment: The more common the words in the relation are used in a given slot, the better the generation. This result is intuitive, especially given that we filter the data such that SVO could not impact the alignment.

4.3 Interaction between Forward and Backward Hypotheses

The above results focused on cases when either SVO or OVS was zero—i.e., prompts for relations that are only attested in one direction. In this section, we focus our analysis on cases in which the counts of SVO and OVS are both nonzero.

4.3.1 Results

The results, shown in Table 3, largely support both hypotheses, but there are differences between de-

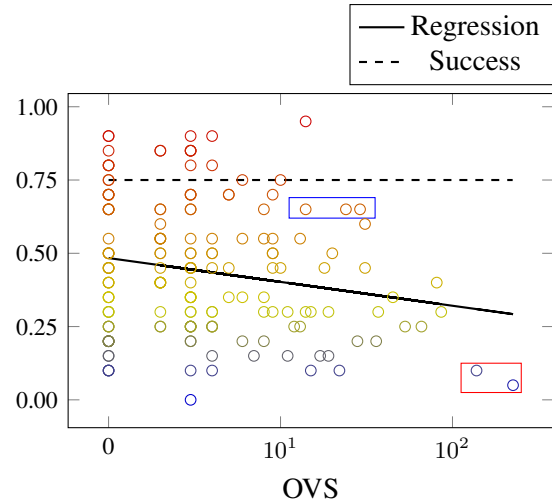


Figure 6: **Inverse Frequency Degrades Performance.** The results do not strongly support the backward hypothesis that increased OVS decreases performance. Each alignment score is the mean across 5 ratings. We show the samples highlighted by the blue rectangle in Figure 7 and by the red rectangle in Figure 8.



Figure 7: **Examples Receive Ambiguous Ratings Decrease as OVS Increases.** Here we look at a set of examples highlighted in Figure 6 by the blue rectangle. The average scores are all below the success cut-off (0.75), but some of the raters considered the generations successful.




Figure 8: **Examples Ratings Receive Low Ratings when OVS is High.** Here we look at a set of examples highlighted in Figure 6 by the red rectangle.

fault and flipped examples.¹¹

For default examples, e.g., ⟨dog, chase, ball⟩, effects for both SVO (+0.25) and OVS (−0.40) are large. Again, as in §4.1, Oxx (−0.13) and xxS (−0.18) also have a negative impact. For intuition,

¹¹When pooling all the examples (not shown) – which introduces dependencies between the default and flipped examples – the results are effectively dampened (slightly lowering the high effects we see for the default examples.)

consider a specific example: $\langle \text{dog, chase, ball} \rangle$. The more that “ball” has been seen in the subject role (and the more “dog” has been seen in the object role) *in any context* the worse the alignment.

For the flipped examples, e.g., $\langle \text{ball, chase, dog} \rangle$, the effects are all weaker. The most notable result is that SVO (+0.14) still impacts the generations positively and that OVS (−0.11) is directionally aligned with the backward hypothesis (though the result is not significant.)

4.4 Takeaways

The frequency effects were stronger for default examples. This was unexpected, suggesting that the failure of the model to generate $\langle \text{horse, ride, astronaut} \rangle$ is correlated with a number of the frequencies, not OVS in particular. In this way, our original hypothesis about why the text-to-image model fails to relations generate some relations is *not* supported. However, in sum, our results do suggest that training priors impact the alignments in a number of ways.

Individual effects—how common a term took a given role significantly impacted the results throughout our experiments. Though we did not foresee this result, the logic runs in tandem with our primary hypotheses: Across the board, some of the alignment is explained by the triad frequencies—SVO and OVS—and some by the individual effects—Sxx, xVx, xxO, Oxx, and xxS. In the first experiments, §4.1 and §4.2, this makes eminent sense as the triads are prevented from impacting the results. However, these same strong individual effects are found for default examples in §4.3, suggesting that training priors on individual terms also impact generations. As mentioned in the results, this mirrors some human results [Mahowald et al., 2022], that agent/patient roles can be predicted from the words alone in a large majority of naturally occurring sentences.

Semantic similarity between infrequent and frequent relations may further explain some of the results. If a relation similar to another relation has a high frequency in the training data, that relation may be better generated: For example, if $\langle \text{dog, bite, bone} \rangle$ is high frequency, then perhaps $\langle \text{hound, chew, stick} \rangle$ is better generated. More simply, how do the statistics of “dog” impact the generations of “hound”? The first-order set of questions is the focus of this work; we leave further exploration to future work.

Term	Default §4.3		Flipped §4.3	
	Effect	<i>p</i> -value	Effect	<i>p</i> -value
SVO	0.25	0.00	0.14	0.04
OVS	-0.40	0.00	-0.11	0.11
Sxx	0.12	0.00	0.03	0.27
xVx	-0.03	0.34	-0.05	0.12
xxO	0.07	0.16	0.08	0.11
Oxx	-0.13	0.00	-0.06	0.01
xxS	-0.18	0.00	0.04	0.36

Table 3: **Regression Coefficients** for Predicting Alignment from OVS and SVO (and other factors).

5 Related Work

Prompt Challenge Sets Often released with a new text-to-image model, there are a number of prompt challenge sets that look at the capabilities of text-to-image models. These challenge sets, like this work, look at how and where text-to-image models fall short over different types of prompts: For example, DrawBench [Saharia et al., 2022]¹² has prompts across a range of categories like “Conflicting” and “Colors”. See some examples in Figure 12. However, in contrast to our work, these prompts are constructed largely by intuition rather than sourced by parsing the training data of the model. Another benchmark [Yu et al., 2022]¹³ test a broader set of phenomena beyond the scope of this work. Finally, WinoGround [Thrush et al., 2022], gets at the same ideas we are interested in: how and whether a vision+language model captures small differences in captions. In Table 7, we summarize alignment results on both DrawBench and WinoGround. Note: We modify both of these datasets to begin with “A photograph of” (while remaining grammatical.)

Our results on Appendix Table 7 suggest that WinoGround is also a difficult dataset for text-to-image models. (Vision-and-language models were unable to perform much beyond chance upon it when set to disambiguate paired captions). Figure 13 shows some successes and failures. stable diffusion 2.1 was successful on the Noun-based prompts but failed on a descriptive prompt that required understanding the weight of different types

¹²<https://docs.google.com/spreadsheets/d/1y7nAbmR4FREi6npB1u-Bo3GFdwdOPYJc617rB0xIRHY/edit#gid=0>

¹³<https://github.com/google-research/parti/blob/main/PartiPrompts.tsv>

of balls. (Presumably, the desired generations involved things like first a bowling ball and a beach ball, and then a bowling ball and a tennis ball.)

Improving Diffusion Models Establishing how good (or not) current text-to-image models are at generating different types of relations provides context for future (and ongoing) work. The success of RLHF (Reinforcement Learning with Human Feedback) in improving large language models [Ziegler et al., 2019, Stiennon et al., 2020, Ouyang et al., 2022a, Gao et al., 2022, Bai et al., 2022] suggests that this type of training could also improve diffusion models. Already, we see some success: Hao et al. [2022] used reinforcement learning to suggest additional tags for prompts to improve the generations (like “high definition”, “8k”); Lee et al. [2023] use RLHF to improve stablediffusion (although the weights are not public.) There is a growing literature in this area that experiment with guiding the diffusion process [Yang et al., 2022, Feng et al., 2023, Po and Wetzstein, 2023, Wang et al., 2023, Liu et al., 2023, Chen et al., 2023].

6 Discussion

The marked success of recent text-to-image models [Ramesh et al., 2022, Saharia et al., 2022] has appeared to undermine prior intuitions about the compositional capacity of neural network models. This has raised questions about what type of mechanism supports such generalization under the hood—are neural models using something that resembles abstract combinatorial structure, or rather using some form of clever mix-and-match strategy? In this work, we found that the counts of the underlying relations in prompts statistically significantly impact the generations of a stablediffusion 2.1. Although not definitive, such results are more suggestive of the latter strategy (mix-and-match) than the former. Despite the important caveat that our results only reflect the behavior of one model (both DALLE2 and Imagen appear to be more efficacious than stablediffusion 2.1), they still generate several interesting points worthy of discussion and further exploration.

Implications for compositionality of neural networks. The primary question motivating this work is: can neural networks reason compositionally, and if so, how? The results we present only truly weigh on the second part of this question—i.e., our results strongly suggest that models employ some form of content-specific, data-dependent rep-

resentations rather than using abstract systematic processes as suggested by [Chaabouni et al., 2020]. This result is both surprising and obvious. It is obvious because, in the history of debates about neural networks and compositionality, it has always been asserted that they would use such idiosyncratic strategies to solve tasks. However, it is surprising because such methods appear to bring us much further in producing behavior that has all the signatures of compositionality than previously thought. That is—behavior of the type we currently see in image and language models was once thought to, in and of itself, be a diagnostic for abstract combinatorial structure. Increasingly, it seems to be the case that such structure is not a prerequisite for compositional (appearing) behavior [Chaabouni et al., 2020]. In our analysis, for example, there exist examples of low-frequency triads with high alignment scores. A very important question for future work is to revisit what, exactly, we seek when we seek models which are compositional: are we placing requirements on the behavior, the mechanism, or some combination of the two?

Limitations

We focus on a particular type of construction: subject, verb, object. Furthermore, we do not nest these types of prompts, e.g., “the dog chased the man holding the child.” We also do not focus on adjectives, like color. These types of ideas have been touched upon by previous work [Saharia et al., 2022]. Many sentences in the dataset are not typical sentences and end up being unattested to in our dataset counts. Instead, many are descriptive fragments like “Suki Round Coffee Table” or “columbia valley wine collections chateau the best cabernet sauvignon 20 the wine snob picks.” Our counts do not capture how often terms are used in these types of sentences.

Our experimental design makes a number of assumptions:

1. The relations pertain to the meaning of the sentences.
2. The sentences pertain to the content of the images.
3. The true statistics of relations in the dataset are proportional to the statistics we parsed.

We investigate each of these concerns in Appendix A. Though the counts we provide are estimates, for a sample of triads, a deeper dive through

the dataset does not yield significantly different counts. Importantly: Unseen triads remained unseen and seen triads had similar counts as originally found. Finally, there are a couple of notes that we consider out of scope and leave to follow-up work: First, our focus is on the training dataset of the diffusion model, not the text model. Second, our experiments assume that the counts of triads is the causal factor leading to deltas in alignment scores. Ultimately, the reason that certain triads are frequent and others are not will impact more than the frequency counts alone.

Our experimental design requires access to the training data, and then we search and parse the training data. First, this is a slow process. Second, this precludes testing commercially available, but closed, models like DALLE under our framework.

Ethics Statement

Text-to-image models pose risk: It is our opinion that images are more easily believed than text, and if content can easily be faked, then text-to-image models may cause more problems than they solve. Our work aims to help us understand how these models work, and enable us to better understand the types of things models are currently capable of. Though the triads we find are relatively generic, this paper makes clear that this type of text-to-image model will tend to reflect the relations seen in the wild.

References

- Y. Bai, A. Jones, K. Ndousse, A. Askell, A. Chen, N. DasSarma, D. Drain, S. Fort, D. Ganguli, T. Henighan, et al. Training a helpful and harmless assistant with reinforcement learning from human feedback. *arXiv preprint arXiv:2204.05862*, 2022.
- S. Bubeck, V. Chandrasekaran, R. Eldan, J. Gehrke, E. Horvitz, E. Kamar, P. Lee, Y. T. Lee, Y. Li, S. Lundberg, H. Nori, H. Palangi, M. T. Ribeiro, and Y. Zhang. Sparks of artificial general intelligence: Early experiments with gpt-4, 2023.
- R. Chaabouni, E. Kharitonov, D. Bouchacourt, E. Dupoux, and M. Baroni. Compositionality and generalization in emergent languages. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4427–4442, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.407. URL <https://aclanthology.org/2020.acl-main.407>.
- M. Chen, I. Laina, and A. Vedaldi. Training-free layout control with cross-attention guidance, 2023.
- W. Feng, X. He, T.-J. Fu, V. Jampani, A. Akula, P. Narayana, S. Basu, X. E. Wang, and W. Y. Wang. Training-free structured diffusion guidance for compositional text-to-image synthesis, 2023.
- J. A. Fodor. *Concepts: Where Cognitive Science Went Wrong*. Oxford University Press, 02 1998. ISBN 9780198236368. doi: 10.1093/0198236360.001.0001. URL <https://doi.org/10.1093/0198236360.001.0001>.
- L. Gao, J. Schulman, and J. Hilton. Scaling laws for reward model overoptimization, 2022. URL <https://arxiv.org/abs/2210.10760>.
- Y. Hao, Z. Chi, L. Dong, and F. Wei. Optimizing prompts for text-to-image generation. *arXiv preprint arXiv:2212.09611*, 2022.
- B. Lake and M. Baroni. Generalization without systematicity: On the compositional skills of sequence-to-sequence recurrent networks. In *International conference on machine learning*, pages 2873–2882. PMLR, 2018.
- K. Lee, H. Liu, M. Ryu, O. Watkins, Y. Du, C. Boutilier, P. Abbeel, M. Ghavamzadeh, and S. S. Gu. Aligning text-to-image models using human feedback. *arXiv preprint arXiv:2302.12192*, 2023.
- N. Liu, S. Li, Y. Du, A. Torralba, and J. B. Tenenbaum. Compositional visual generation with composable diffusion models, 2023.
- K. Mahowald, E. Diachek, E. Gibson, E. Fedorenko, and R. Futrell. Experimentally measuring the redundancy of grammatical cues in transitive clauses, 2022.
- G. Marcus. Horse rides astronaut. <https://garymarcus.substack.com/p/horse-rides-astronaut>, 2022. Accessed: 2023-02-28.
- I. McKenzie, A. Lyzhov, A. Parrish, A. Prabhu, A. Mueller, N. Kim, S. Bowman, and E. Perez. The inverse scaling prize, 2022a. URL <https://github.com/inverse-scaling/prize>.
- I. McKenzie, A. Lyzhov, A. Parrish, A. Prabhu, A. Mueller, N. Kim, S. Bowman, and E. Perez. Inverse scaling prize: First round winners, 2022b. URL <https://irmckenzie.co.uk/round1>.
- I. McKenzie, A. Lyzhov, A. Parrish, A. Prabhu, A. Mueller, N. Kim, S. Bowman, and E. Perez. Inverse scaling prize: Second round winners, 2023. URL <https://irmckenzie.co.uk/round2>.
- OpenAI. Gpt-4 technical report, 2023.
- L. Ouyang, J. Wu, X. Jiang, D. Almeida, C. L. Wainwright, P. Mishkin, C. Zhang, S. Agarwal, K. Slama, A. Ray, J. Schulman, J. Hilton, F. Kelton, L. Miller, M. Simens, A. Askell, P. Welinder, P. Christiano, J. Leike, and R. Lowe. Training language models to follow instructions with human feedback, 2022a. URL <https://arxiv.org/abs/2203.02155>.

- L. Ouyang, J. Wu, X. Jiang, D. Almeida, C. L. Wainwright, P. Mishkin, C. Zhang, S. Agarwal, K. Slama, A. Ray, J. Schulman, J. Hilton, F. Kelton, L. Miller, M. Simens, A. Askell, P. Welinder, P. Christiano, J. Leike, and R. Lowe. Training language models to follow instructions with human feedback, 2022b.
- R. Po and G. Wetzstein. Compositional 3d scene generation using locally conditioned diffusion, 2023.
- A. Ramesh, P. Dhariwal, A. Nichol, C. Chu, and M. Chen. Hierarchical text-conditional image generation with clip latents. [arXiv preprint arXiv:2204.06125](https://arxiv.org/abs/2204.06125), 2022.
- R. Rombach, A. Blattmann, D. Lorenz, P. Esser, and B. Ommer. High-resolution image synthesis with latent diffusion models, 2021.
- C. Saharia, W. Chan, S. Saxena, L. Li, J. Whang, E. Denton, S. K. S. Ghasemipour, B. K. Ayan, S. S. Mahdavi, R. G. Lopes, et al. Photorealistic text-to-image diffusion models with deep language understanding. [arXiv preprint arXiv:2205.11487](https://arxiv.org/abs/2205.11487), 2022.
- C. Schuhmann, R. Beaumont, R. Vencu, C. Gordon, R. Wightman, M. Cherti, T. Coombes, A. Katta, C. Mullis, M. Wortsman, et al. Laion-5b: An open large-scale dataset for training next generation image-text models. [arXiv preprint arXiv:2210.08402](https://arxiv.org/abs/2210.08402), 2022.
- N. Stiennon, L. Ouyang, J. Wu, D. Ziegler, R. Lowe, C. Voss, A. Radford, D. Amodei, and P. F. Christiano. Learning to summarize with human feedback. In H. Larochelle, M. Ranzato, R. Hadsell, M. Balcan, and H. Lin, editors, *Advances in Neural Information Processing Systems*, volume 33, pages 3008–3021. Curran Associates, Inc., 2020. URL <https://proceedings.neurips.cc/paper/2020/file/1f89885d556929e98d3ef9b86448f951-Paper.pdf>.
- T. Thrush, R. Jiang, M. Bartolo, A. Singh, A. Williams, D. Kiela, and C. Ross. Winoground: Probing vision and language models for visio-linguistic compositionality. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5238–5248, 2022.
- C. Wang, X. Yang, J. Huang, and K. Ferreira. A diffusion-based method for multi-turn compositional image generation, 2023.
- L. Yang, Z. Huang, Y. Song, S. Hong, G. Li, W. Zhang, B. Cui, B. Ghanem, and M.-H. Yang. Diffusion-based scene graph to image generation with masked contrastive pre-training, 2022.
- J. Yu, Y. Xu, J. Y. Koh, T. Luong, G. Baid, Z. Wang, V. Vasudevan, A. Ku, Y. Yang, B. K. Ayan, et al. Scaling autoregressive models for content-rich text-to-image generation. [arXiv preprint arXiv:2206.10789](https://arxiv.org/abs/2206.10789), 2022.
- D. M. Ziegler, N. Stiennon, J. Wu, T. B. Brown, A. Radford, D. Amodei, P. Christiano, and G. Irving. Fine-tuning language models from human preferences, 2019. URL <https://arxiv.org/abs/1909.08593>.

A Dataset Collection

A.1 Details

We parse sentences from LAION with aesthetic scores above 4.5 because this is the training data of stable diffusion 2.1. (Stablediffusion 2.1 also filtered out images that have a probability of being unsafe above 0.1. In our process, we did not do this additional filtering.) We access the dataset via HuggingFace at https://huggingface.co/datasets/ChristophSchuhmann/improved_aesthetics_4.5plus which has 1372 million rows. We successfully parse 134 million sentences with 50 million unique subject-verb-object triads (with 1,687,675 unique subjects, 669,858 unique verbs, and 1,553,343 unique objects.) As detailed below, we looked for common individual terms which appeared in many contexts, significantly reducing the pool of sentences.

A.2 Evaluating Our Assumptions

Seen Triads are Seen We randomly sampled the following seen tuples: Figure 9. (1) We search the training dataset for sentences that contain all three words. (2) We re-parse these found sentences to get a parse-rate for each triad. (3) We manually label $2 * 4 * 25 = 200$ sentences (25 per triad) (parsed and not) looking for a parse-intent-possible. Here, we’re informally (liberally) looking to find sentences where the searched terms could plausibly be the subject, verb and object. The sampled sentences: <https://docs.google.com/spreadsheets/d/1tViq4rYLXvjzA4vqhEFB-TqXvo4PzRt2ezAIEZrOvVI/edit?usp=sharing>. (4) We estimate the total number examples for each of the triads by summing the number of parsed (and not parsed) examples by the parse-intent-possible, respectively. We find that the estimates are in general larger than the number of sentences we originally found, but not beyond 2x. We do not compute estimates of but instead use the raw counts from the collected data.

In the sampled triads, the OVS counts were low. We found no examples of the flipped terms when the sentence was parsed (in part because they are much more rare.) The number of actual flipped

examples among the very few parsed examples we did find was extremely high (near perfect).

Unseen Triads are Unseen Like with the seen triads, we sampled the following unseen tuples (Figure 10) and follow the same procedure as above. Somewhat surprisingly, we found no examples of the unseen tuples, although ultimately, because we are making use of sampling, it is quite possible that there are some examples. To be clear: There were still no cases of the unseen triads being parsed and no sampled examples of these triads. Of note: The rate with which even one of the three words took a subject, object, or verb role was below 3% of the sentences. In comparison, for the seen triads, the individual terms matched on average for subjects 23%, for verbs 17%, and 24% for objects. (The sampled sentences are in the same document as above, <https://docs.google.com/spreadsheets/d/1tViq4rYLXvjzA4vqhEFB-TqXvo4PzRt2ezA1EZR0vVI/edit?usp=sharing>.)

Triads Pertain to Sentence Meaning; Images and Sentences Align We take 100 parsed and 100 not-parsed sentences sampled from the training data: <https://docs.google.com/spreadsheets/d/1hIj-PvQsHM6WnRjRVhK10Kp3f0Vp2wwjVjdKLRZwmIs/edit?usp=sharing>. (Note: The distribution of these sentences differs from the high-frequency triads and terms, but provides a baseline window into the parsing process.) We find:

1. 5 of 100 not-parsed are false negatives (failed to be parsed when they could have been.)
2. 36 of 100 parsed examples are false positives (should not have been parsed)
3. 39 of 100 parsed examples had the clear potential for being successfully parsed (called possible parses below).
4. 36 of the 39 possible parses, the parsed triad was the correct triad.
5. 35 of the 39 possible parses, the parsed triad captured the meaning of the sentence.
6. 34 of the 39 possible parses, the sentence captured the meaning of the photo.

In sum, the process is noisy, but we are finding reasonable success: For most examples that are possible parses, the parsed triad matches the meaning

of the sentence and the paired photo matches the sentence. Detailed in the subsection below, we select individual terms that are common, with the aim of handling some of the noisy parses and finding some safety in the higher counts.

A.3 Protocol for SVO Triads

We will make the source code for this process public in future release of this paper after peer review.

1. Parse dataset for SVO triads using spacy small english parser.
2. Filter for alpha characters only.
3. Get the number of instances each triad appears. For example, we build an index: $S \rightarrow \text{Count}[\text{triads } S \text{ appears in}]$.
4. Threshold such that each individual word (S, V, O) has been seen $N = 5000$ times.
5. Find the intersection of S and O.
6. Choose the top 100 for each S, V, O (using the intersection for S and O).
7. Build index (triad \rightarrow count)
8. Determine attestation for each triad in a crossed dataset. Attestation is one of (FF, TT, FT, TF) where FF is neither direction of the triad has been seen, TT is both directions of the triad are seen, FT is the backwards direction has been seen, and TF is the forward direction has been seen.
9. For each split of attestation (FF, TT, FT, TF) sample 15 random triads per verb.
10. Manually label each triad for whether it is drawable in both directions (SVO, OVS). This step is subjective. This step could be automated using online workers. Because the drawable images are relatively sparse, we found it overall easier to do the labelling ourselves and avoid the overhead.
11. Using this approach found a limited number of high-frequency tuples. We expanded the pool of candidate triads by bootstrapping off the successful cases and finding more examples of high-frequency tuples.

Triad	SVO	OVS	Estimated SVO	Estimated OVS
⟨girl, play, dog⟩	1389	11	3228	11
⟨woman, walk, dog⟩	1444	10	2652	8
⟨woman, carry, child⟩	1536	2	1076	5
⟨woman, play, dog⟩	3207	2	7444	3

Figure 9: **Seen Triads are Seen.**

Triad	SVO	OVS
⟨girl, move, dog⟩	0	0
⟨girl, fall, family⟩	0	0
⟨man, fall, family⟩	0	0
⟨man, hit, kid⟩	0	0

Figure 10: **Unseen Triads are Unseen.**

Term	Default		Flipped	
	Effect	<i>p</i> -value	Effect	<i>p</i> -value
SVO	0.25	0.04	0.14	0.23
OVS	-0.10	0.00	-0.11	0.35
Sxx	0.12	0.01	0.03	0.52
xVx	-0.03	0.58	-0.05	0.36
xxO	0.08	0.42	0.08	0.35
Oxx	-0.06	0.01	-0.06	0.15
xxS	0.04	0.03	0.04	0.60

B Labelling Task Interface

Figure 11 is the interface we used to collect human judgements on the text/caption alignment. We provided examples to the SurgeAI workers are the following link: <https://docs.google.com/document/d/1N8YxdCyO8tZ1yjqJ3fGJBL9o04kO82ACu5aNYiCEYJk/edit?usp=sharing>.

C Additional Results

C.1 Alternate Regressions

The results from Table 2 are reproduced but with random controls in Table 4 and averaged scores in Table 5.

Term	Default		Flipped	
	Effect	<i>t</i> -value	Effect	<i>t</i> -value
SVO	0.24	3.79	0.12	2.00
OVS	-0.41	-6.59	-0.14	-2.15
Sxx	0.11	4.93	0.03	1.16
xVx	-0.02	-0.86	-0.06	-2.06
xxO	0.06	1.32	0.08	1.63
Oxx	-0.13	-4.95	-0.06	-2.66
xxS	-0.19	-3.96	0.03	0.65

Table 4: **Regression Coefficients with Raters as Random Controls** for Predicting Alignment from OVS and SVO (and other factors).

Table 5: **Regression Coefficients with Averaged Scores** for Predicting Alignment from OVS and SVO (and other factors).

C.2 Controls

We re-run our experiments in §4.3 but present to the raters images from the flipped prompt. For example, in Control Default, we present the raters the prompt from ⟨dog, chase, ball⟩ and the image generated from ⟨ball, chase, dog⟩. (In Control Flipped, we show the raters the prompt from ⟨ball, chase, dog⟩ and the image generated from ⟨dog, chase, ball⟩.)

Predicted Outcomes: A positive correlation between SVO and the swapped images suggests that the increased count of the SVO lead the flipped prompt to still generate the relation described by ⟨S, V, O⟩. A negative correlation between OVS and the swapped images suggests that the more frequent the OVS count is the better the generation of the flipped prompt leading to the flipped relation. Both of these are direct predictions of the forward and backward hypotheses we outline in §2.2.

Alternate Outcomes: If the reverse of the above held—if SVO had a negative correlation or OVS had a positive correlation—this would provide evidence counter to our hypotheses.

Results: The results largely match the predicted outcomes: Table 6. We see that the Control Default

We want to know if an image matches a caption. For each caption, there are two objects (say, dog and man) and a relation (say, chases, behind, in front of...). We want to know if the relation between the two objects is properly shown.

For example, in "A dog chasing a man," we first want to know: If there is a dog chasing a man (not a man chasing a dog.) All the objects need to be shown for a "success"!

Please look through the example in the following document the first time you do this task:

<https://docs.google.com/document/d/1N8YxdCyO8tZ1yjqJ3fGJBL9o04kO82ACu5aNYiCEYJk/edit?usp=sharing>

Caption

A photograph of a child arriving in front of a person

Subject	Object	Verb
child	people	arrive



Does the caption describe the image?

<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
Strongly Disagree	Disagree	Neutral	Agree	Strongly Agree

Please flag any of the following if you think they apply.

- The caption describes the image but you cannot decide if it is totally right. For example, for 'A dress covers a ball' and the dress happens to cover the full ball making it hard to tell.
- The caption describes the image but it is not clear which object is which. For example, in "A boy chases a kid" and the image seems to match the caption, but if it is unclear which object is the boy and which is the kid then you can give high score but please check this box.
- The objects and roles are mixed together. For example, "kid above sculpture" --> Kid is not above sculpture, instead kid is sculpture. Here, mark high scores for the objects being present, but low scores for "SOMETHING above SOMETHING" and the caption matching image.

(Optional). Any notes or issues or feedback on the task or reasoning behind your answers you think is important.

Next preview

Figure 11: Interface for Human Preferences.



Figure 12: **DrawBench example generations.** Top left: “horse riding an astronaut”; Top right: “astronaut riding a horse”; Bot left: “blue colored dog”; Bot right: “red colored dog”. The first two images, belonging to the “Conflicting” category show how the model was biased towards the typical relation. The second two images show the model behaving more flexibly. These examples were generated by stablediffusion 2.1.

has a stronger effect on OVS whereas the Control Flipped has strong effects on both SVO and OVS. We don’t take this evidence as bringing much more to bear on the problem than what we found in the original experiments.

Term	Control Default		Control Flipped	
	Effect	<i>p</i> -value	Effect	<i>p</i> -value
SVO	0.04	0.53	0.20	0.00
OVS	-0.27	0.00	-0.14	0.02
Sxx	0.12	0.00	0.01	0.70
xVx	-0.08	0.02	-0.00	0.94
xxO	-0.05	0.27	0.14	0.00
Oxx	-0.01	0.62	-0.05	0.02
xxS	-0.13	0.01	-0.07	0.10

Table 6: **Regression Coefficients for Control Experiments.** Significant ($p < 0.05$) effects over 0.1 are **bolded**.

C.3 Prior Work

We report alignment scores on prior work in Table 7, Table 8, and Table 9. Unlike in the main body of the work, the scores are from 0 to 4.



Figure 13: **WinoGround example generations.** Top: “There is a [fire] [truck]” vs “There is a [truck] [fire.]”; Bottom: “a larger ball is lighter and a smaller one is heavier” vs “a larger ball is heavier and a smaller one is lighter”. The top examples belong to the Noun category; the bottom examples belong to Adjective-Weight. These examples were generated by stablediffusion 2.1.

	Category	Count	Median	0.25	0.75
DrawBench	Rare Words	7	0.0	0.00	1.50
	Misspellings	10	0.5	0.00	2.75
	Gary Marcus et al.	10	1.0	0.25	3.00
	Positional	20	1.0	1.00	2.00
	Reddit	38	1.0	1.00	3.00
	Text	21	1.0	0.00	2.00
	Counting	19	2.0	1.00	4.00
	DALL-E	20	2.5	0.75	3.00
	Colors	25	3.0	3.00	4.00
	Conflicting	10	3.0	1.50	4.00
	Descriptions	20	3.0	1.75	3.25
WinoGround	Both	52	1.0	1.0	3.0
	Relation	466	1.0	1.0	3.0
	Object	282	2.0	1.0	3.0

Table 7: **Alignment Scores on Prior Work.** The alignment columns reports the median and quartiles. A fine-grained breakdown of categories in WinoGround can be found in Table 8. The alignment scores are scaled from 0 to 4.

Category	Count	Median	0.25	0.75
Noun Phrase, Adjective-Animate	2	0.0	0.00	0.00
Determiner-Possessive	12	2.0	2.00	2.00
Verb-Transitive Phrase, Verb-Intransitive, Preposition Phrase	2	2.0	2.00	2.00
Determiner-Numeral Phrase	2	2.0	2.00	2.00
Determiner-Numeral	36	2.0	2.00	3.75
Altered POS, Determiner-Numeral	2	2.0	2.00	2.00
Verb-Intransitive Phrase, Adverb-Animate	2	2.0	2.00	2.00
Noun, Adjective-Size	2	2.0	2.00	2.00
Noun, Preposition Phrase, Scope	2	2.0	2.00	2.00
Adverb-Spatial	2	2.0	2.00	2.00
Adjective-Weight	6	2.0	2.00	4.00
Preposition	42	2.0	2.00	4.00
Adjective-Age	4	2.0	2.00	3.50
Adjective-Speed Phrase, Verb-Intransitive	2	2.0	2.00	2.00
Verb-Intransitive, Noun	4	2.0	2.00	2.25
Adjective-Size	24	2.0	2.00	4.00
Adjective-Shape	12	2.0	2.00	2.50
Scope, Adjective-Manner	8	2.0	2.00	2.00
Verb-Transitive	8	2.0	2.00	4.00
Verb-Transitive Phrase	2	2.0	2.00	2.00
Adjective-Color (3-way swap)	2	2.0	2.00	2.00
Adjective-Animate	16	2.0	2.00	4.00
Preposition Phrase	12	2.0	2.00	4.00
Verb-Intransitive, Determiner-Numeral	2	2.0	2.00	2.00
Noun Phrase, Adjective-Color	2	2.5	2.25	2.75
Noun, Verb-Intransitive	2	2.5	2.25	2.75
Pronoun, Verb-Intransitive	2	2.5	2.25	2.75
Scope, Altered POS, Verb-Intransitive, Verb-Transitive	2	2.5	2.25	2.75
Noun Phrase, Determiner-Possessive	4	2.5	2.00	3.50
Negation, Noun Phrase, Preposition Phrase	2	2.5	2.25	2.75
Noun	214	3.0	2.00	4.00
Scope, Noun, Preposition	2	3.0	2.50	3.50
Scope, Conjunction Phrase	4	3.0	2.50	3.50
Scope, Conjunction	2	3.0	2.50	3.50
Adjective-Color	88	3.0	2.00	4.00
Scope, Adjective-Texture	2	3.0	3.00	3.00
Verb-Intransitive, Verb-Transitive Phrase	4	3.0	2.50	3.00
Sentence	10	3.0	2.00	3.50
Adjective-Spatial	4	3.0	2.50	3.50
Noun Phrase	44	3.0	2.00	4.00
Pronoun, Noun Phrase	2	3.0	3.00	3.00
Adjective-Temperature	12	3.0	2.00	4.00
Adjective-Temporal	2	3.0	3.00	3.00
Adverb-Animate	2	3.0	2.50	3.50
Verb-Intransitive, Adjective-Manner	2	3.0	2.50	3.50
Verb-Intransitive Phrase, Preposition	2	3.0	2.50	3.50
Verb-Intransitive Phrase	2	3.0	2.50	3.50
Scope, Preposition	4	3.0	2.50	3.50
Negation, Scope	22	3.0	2.00	4.00

Table 8: **Alignment Scores for WinoGround.** The alignment columns reports the median and quartiles. The WinoGround results are the subset of groups with at least 10 examples. Plot continues on the next page.

Category	Count	Median	0.25	0.75
WinoGround Preposition Phrase, Scope	14	3.0	2.00	4.00
Scope, Preposition Phrase, Adjective-Color	2	3.0	2.50	3.50
Scope, Relative Clause	2	3.5	2.75	4.25
Verb-Transitive, Noun	2	3.5	3.25	3.75
Scope	6	3.5	2.25	4.00
Adverb-Temporal	4	3.5	2.75	4.00
Adverb-Spatial Phrase	2	3.5	3.25	3.75
Adjective-Speed	4	3.5	2.75	4.25
Scope, Preposition, Verb-Intransitive	2	4.0	3.50	4.50
Relative Clause, Scope	2	4.0	4.00	4.00
Determiner-Numeral, Noun Phrase	10	4.0	4.00	5.00
Altered POS	36	4.0	2.00	4.00
Adjective-Texture	14	4.0	2.75	4.25
Adjective-Manner Phrase	2	4.0	4.00	4.00
Adjective-Manner	18	4.0	3.00	4.00
Scope, Preposition Phrase	4	4.0	3.00	4.00
Noun, Adjective-Color	2	4.0	4.00	4.00
Scope, Verb-Transitive	2	4.5	4.25	4.75
Noun Phrase, Determiner-Numeral	2	5.0	5.00	5.00
Adjective-Height	2	5.0	5.00	5.00

Table 9: Continued.