

---

# Youku-mPLUG: A 10 Million Large-scale Chinese Video-Language Pre-training Dataset and Benchmarks

---

Haiyang Xu\*, Qinghao Ye\*, Xuan Wu\*, Ming Yan<sup>†</sup>, Yuan Miao, Jiabo Ye  
Guohai Xu, Anwen Hu, Yaya Shi, Guangwei Xu, Chenliang Li, Qi Qian  
Maofei Que, Ji Zhang, Xiao Zeng, Fei Huang

DAMO Academy, Alibaba Group

{shuofeng.xhy, yeqinghao.yqh, wx193834, ym119608}@alibaba-inc.com

## Abstract

To promote the development of Vision-Language Pre-training (VLP) and multi-modal Large Language Model (LLM) in the Chinese community, we firstly release the largest public Chinese high-quality video-language dataset named Youku-mPLUG, which is collected from Youku<sup>3</sup>, a well-known Chinese video-sharing website, with strict criteria of safety, diversity, and quality. Youku-mPLUG contains 10 million Chinese video-text pairs filtered from 400 million raw videos across a wide range of 45 diverse categories for large-scale pre-training. In addition, to facilitate a comprehensive evaluation of video-language models, we carefully build the largest human-annotated Chinese benchmarks covering three popular video-language tasks of cross-modal retrieval, video captioning, and video category classification. Youku-mPLUG can enable researchers to conduct more in-depth multimodal research and develop better applications in the future. Furthermore, we release popular video-language pre-training models, ALPRO and mPLUG-2, and our proposed modularized decoder-only model mPLUG-video pre-trained on Youku-mPLUG. Experiments show that models pre-trained on Youku-mPLUG gain up to 23.1% improvement in video category classification. Besides, mPLUG-video achieves a new state-of-the-art result on these benchmarks with 80.5% top-1 accuracy in video category classification and 68.9 CIDEr score in video captioning, respectively. Finally, we scale up mPLUG-video based on the frozen Bloomz with only 1.7% trainable parameters as Chinese multimodal LLM, and demonstrate impressive instruction and video understanding ability. The zero-shot instruction understanding experiment indicates that pretraining with Youku-mPLUG can enhance the ability to comprehend overall and detailed visual semantics, recognize scene text, and leverage open-domain knowledge. Our dataset, code, model, and evaluation set are available at <https://github.com/X-PLUG/Youku-mPLUG>.

## 1 Introduction

Due to the release of large-scale English video-language datasets (e.g., Howto100M[Miech et al., 2019] and WebVid-2.5M[Bain et al., 2021]), video-language pre-training (VLP) has achieved superior performance in various downstream tasks, such as video-text retrieval, video question answering, and video captioning. Recently, the multimodal LLM in video (e.g., VideoChat[Li et al., 2023b], Flamingo[Alayrac et al., 2022]) has demonstrated strong zero-shot video understanding ability based on these large-scale datasets. Compared with the English VLP community as Tab. 1, the lack of large-scale and high-quality public Chinese VLP datasets hinders the research of Chinese video-language

---

\*Equal contribution

<sup>†</sup>Corresponding author

<sup>3</sup><https://www.youku.com>

Table 1: Statistics of Youku-mPLUG and its comparison with existing video-language pre-training datasets.

Dataset Name	Language	# Videos	# Text	Avg. Len (secs)	Duration (hrs)	Domain	Availability
HowTo100M [Miech et al., 2019]	English	136M	136M	3.6	135K	Instruction	✓
YT-Temporal-180M [Zellers et al., 2021]	English	180M	180M	-	-	Instruction	✓
HD-VILA-100M [Xue et al., 2022]	English	103M	103M	13.4	372K	Open	✓
WebVid10M [Bain et al., 2021]	English	10M	10M	18.0	52K	Open	✓
ALIVOL-10M [Lei et al., 2021a]	Chinese	103M	110M	34.6	99K	E-Commerce	✗
Kwai-SVC-11M [Nie et al., 2022b]	Chinese	11M	4M	57.9	177K	Open	✗
CREATE-10M [Zhang et al., 2022]	Chinese	10M	10M	29.8	83K	Open	✗
CNVid-3.5M [Gan et al., 2023]	Chinese	3.5M	3.5M	36.2	35K	Open	✗
<b>Youku-mPLUG</b>	Chinese	10M	10M	54.2	150K	Open	✓

Table 2: Statistics of Youku-mPLUG and its comparison with existing video-language downstream datasets.

Dataset Name	Language	# Sample	Domain	Retrieval	Classification	Caption	Availability
MSRVTT [Xu et al., 2016]	English	10K	Open	✓	✓	✓	✓
DiDeMo [Anne Hendricks et al., 2017]	English	27K	Flickr	✓	✗	✗	✗
MSVD [Chen and Dolan, 2011]	English	10K	Open	✓	✓	✓	✓
LSMDC [Rohrbach et al., 2015]	English	118K	Movie	✓	✓	✗	✓
ActivityNet [Krishna et al., 2017]	English	100K	Open	✓	✓	✗	✓
VATEX [Wang et al., 2019]	English/Chinese	41K	Kinetics-600	✓	✗	✓	✓
BFVD [Zhang et al., 2020]	Chinese	43K	E-Commerce	✓	✗	✗	✗
FFVD [Zhang et al., 2020]	Chinese	32K	E-Commerce	✓	✗	✗	✗
CREATE-210K [Zhang et al., 2022]	Chinese	216K	Open	✓	✗	✓	✗
<b>Youku-mPLUG</b>	Chinese	365K	Open	✓	✓	✓	✓

pretraining and multimodal LLM. In addition, the Chinese VLP community is also facing a lack of publicly available benchmarks as Tab. 2. This has resulted in two significant issues. Firstly, the development and application of the community are being lagged behind. Secondly, some works are able to achieve surprisingly good performance by using secret downstream benchmarks that other works cannot fairly compare with, thus making it difficult to establish standards for performance evaluation. While some methods translate English text into Chinese [Madasu et al., 2022] or annotate the dataset based on the English video [Wang et al., 2019], there remains an intrinsic linguistic and cultural gap between English and Chinese.

To facilitate the research and application of Chinese VLP, we release the first and largest public Chinese Video-language pretraining dataset and benchmarks named Youku-mPLUG, which is collected from Youku, a well-known Chinese video-sharing website. Youku-mPLUG contains 10 million video-text pairs for pre-training and 0.3 million videos for downstream benchmarks. For the pre-training dataset, we filter the high-quality 10 million video-text pairs from 400 million raw videos with the strict criteria of safety, diversity, and quality. **Safety**, the dataset is subject to heavy filtering and restrictions through a multi-level risk detection system to prevent any content related to high risk; **Diversity**, the videos are carefully classified into 45 diverse categories covering various domains, with a balanced distribution; **Quality**, we have conducted strict data cleaning at both the text and video levels, and using Chinese image-text pre-trained model to improve the data quality. Furthermore, We build the largest human-annotated Chinese benchmarks covering Cross-modal Retrieval, Video Captioning and Video Category Classification for comprehensive evaluation of video-language models and downstream applications. For each downstream task, we hire well-educated people and adopt a two-step verification for ensuring the quality and diversity of the annotations, resulting in the largest Chinese downstream benchmark for model evaluation.

Besides, we release popular video-language models, ALPRO[Li et al., 2022b] and mPLUG-2[Xu et al., 2023] pre-trained on Youku-mPLUG. Drawing inspiration from the idea of modularization[Li et al., 2022a, Xu et al., 2023, Ye et al., 2023], we propose the modularized decoder-only model mPLUG-video with limited trainable parameters based on frozen pre-trained LLM, which consists of the trainable video encoder, visual abstractor module, and the frozen pre-trained LLM decoder. We first obtain dense video representations from the video encoder. Then, we employ the visual abstractor module to summarize visual information within several learnable tokens. Finally, the visual representations are combined with text queries and fed into the LLM decoder to generate the response. Experiments show that models pre-trained on Youku-mPLUG gain up to 23.1% improvement in video category classification. Besides, mPLUG-video achieves 80.5% top-1 accuracy

in video category classification and 68.9 CIDEr score in video captioning, respectively. It becomes the new state-of-the-art results on these benchmarks. Moreover, we scale up mPLUG-video based on frozen Bloomz [Workshop et al., 2023] as Chinese multimodal LLM with only 1.7% trainable parameters, which demonstrates impressive instruction and video understanding ability. As an insight, our zero-shot video instruction understanding test validates that Youku-mPLUG can strengthen the scene text recognizing ability and incorporate open-domain knowledge for video understanding. Qualitative results can be found in the Supplementary Material. These pre-trained models has also been released to facilitate the research and application of Chinese Video-language pre-training.

In summary, our main contributions are:

- We release the first public largest Chinese Video-language pretraining dataset and benchmarks named Youku-mPLUG.
- We release popular video-language models (ALPRO and mPLUG-2) and our proposed modularized decoder-only model mPLUG-video pre-trained on Youku-mPLUG.
- We scale up and release mPLUG-video based on Bloomz as Chinese multimodal LLM with only 1.7% trainable parameters, which demonstrates the impressive zero-shot instruction and video understanding ability.
- Experiments show that models pre-trained on Youku-mPLUG gain significant improvement and mPLUG-video achieves the new state-of-the-art results on these benchmarks.

## 2 Related Work

**Video-Language Pre-training Datasets** Large-scale datasets have proven effective for video-language representation learning. Previously, most video-language models were trained on the HowTo100M dataset [Miech et al., 2019], which comprises 136 million video clips from 1.22 million instructional YouTube videos. However, this dataset is limited to the instructional domain and is unsuitable for generalization. To overcome this constraint, Zeller et al. [Zellers et al., 2021] and Xue et al. [Xue et al., 2022] propose the YT-Temporal-180M and HD-VILA-100M corpus, respectively. Meanwhile, to reduce the noise in subtitles, Bain et al. [Bain et al., 2021] introduce the Webvid10M dataset which is inspired by the collection schemes of Conceptual Caption datasets [Sharma et al., 2018]. However, these datasets are limited to English language corpus and cannot be directly applied to the Chinese domain. Although there exist some large-scale Chinese video-language datasets such as ALIVOL [Lei et al., 2021a], Kwai-SVC [Nie et al., 2022a], CREATE-10M [Zhang et al., 2022], and CNVid-3.5M [Gan et al., 2023], none of them have been publicly released to date, which hinders the progress of research in the Chinese video-language learning field. To address this gap, we present Youku-mPLUG, the largest Chinese high-quality video-language dataset, to facilitate future research on large-scale video-language learning in the Chinese language.

**Video-Language Downstream Benchmarks** For evaluating video-language pre-training models, researchers have proposed several downstream tasks such as video-text retrieval, video question answering, and video captioning for performance evaluation. For instance, MSRVT [Xu et al., 2016], DiDeMo [Anne Hendricks et al., 2017], and LSMDC [Rohrbach et al., 2015] are commonly adopted for text-video retrieval evaluation. Similarly, MSRVT-QA [Xu et al., 2017], MSVD-QA [Xu et al., 2017], and T-GIF [Jang et al., 2017] are widely used for video question evaluation. Meanwhile, MSRVT-Caption [Xu et al., 2016] and MSVD-Caption [Chen and Dolan, 2011] are commonly used for video caption evaluation. However, these datasets are primarily collected from YouTube, which is not entirely suitable for the Chinese domain. Furthermore, while there are some Chinese benchmark datasets such as CREATE [Zhang et al., 2022] and VATEX [Wang et al., 2019], they are not fully released and only evaluate one aspect of the model’s performance. Additionally, there is a lack of systematic video language downstream benchmarks or leaderboards for Chinese video-language pre-training evaluation. Consequently, we propose three downstream benchmarks, including video category classification, video-text retrieval, and video captioning, for evaluating models’ performance on Youku-mPLUG. These benchmarks are specifically designed for the Chinese domain and are intended to fill the gap in existing English benchmarks, which may not be entirely suitable for Chinese video-language pre-training evaluation.

**Video-Language Pre-training Models** In recent years, there has been a growing interest in video-language pre-training, and various methods have been proposed to explore this area. Traditional approaches [Luo et al., 2020, Li et al., 2020] rely on pre-extracted, dense video frame or clip features for video-language representation. In contrast, ClipBERT [Lei et al., 2021b] introduces a sparse

sampling strategy that facilitates end-to-end learning while simultaneously improving performance. Building upon this strategy, many approaches [Bain et al., 2021, Ge et al., 2022] have been developed, which incorporate novel architectures and pre-training tasks for video-language learning. For example, Frozen [Bain et al., 2021] and BridgeFormer [Ge et al., 2022] employ contrastive learning to align the semantics of paired video and text in the same embedding space. Additionally, ALPRO [Li et al., 2022b], TW-BERT [Yang et al., 2023], mPLUG-2 [Xu et al., 2023], and HiTeA [Ye et al., 2022] fuse video and language features to generate video-language representations for understanding and generation. Recently, large language models such as GPT-3 [Brown et al., 2020], Bloom [Workshop et al., 2023], and LLaMA [Touvron et al., 2023] have demonstrated significant zero-shot generalization abilities, which are advantageous for the vision-language field. For instance, BLIP-2 [Li et al., 2023a], miniGPT-4 [Zhu et al., 2023], and mPLUG-Owl [Ye et al., 2023] exhibit robust zero-shot generalization and conversation capabilities by aligning vision and language models. In this work, we provide a decoder-only video-language model mPLUG-video pre-trained on our Youku-mPLUG dataset with a strong generalization performance in terms of both video-language understanding and generation.

### 3 Youku-mPLUG Dataset Creation

To fill in the blank of the public Chinese video-text pre-training dataset and benchmarks, We release the largest public Chinese Video-language dataset named Youku-mPLUG collected with the strict criteria of safety, diversity, and quality from Youku, a Chinese video-sharing website. Youku-mPLUG contains 10 million video-text pairs for pre-training and 0.3 million videos for downstream benchmarks covering Video-Text Retrieval, Video Captioning and Video Category Classification. Randomly sampled examples are shown in Figure 1.

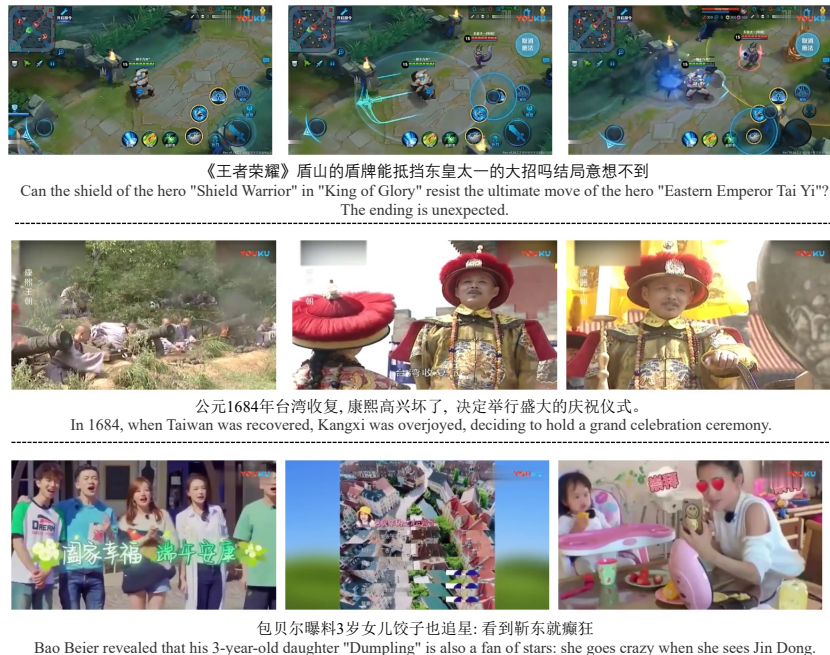


Figure 1: Randomly sampled examples in Youku-mPLUG.

#### 3.1 Pre-training Dataset Construction

For pre-training dataset, we filter the high-quality 10 million video-text pairs from 400 million raw videos with the strict criteria of safety, diversity, and quality. In terms of safety, the dataset is heavily filtered and restricted by an internal multi-level risk detection system with both multimodal model detection and manual review processes to prevent any content related to pornography, violence, terrorism, discrimination, abuse, or high risk. Regarding diversity, we have applied video fingerprinting technology to eliminate videos that are completely identical. With the ability of hierarchical multi-label classification model [Giunchiglia and Lukasiewicz, 2020], the videos are carefully classified into 20 super categories and 45 common categories as Fig. 2, covering various domains, with a balanced distribution. To ensure high quality, we have conducted strict data cleaning at both the text and video levels. For text, we have imposed language restrictions on video titles, requiring the length

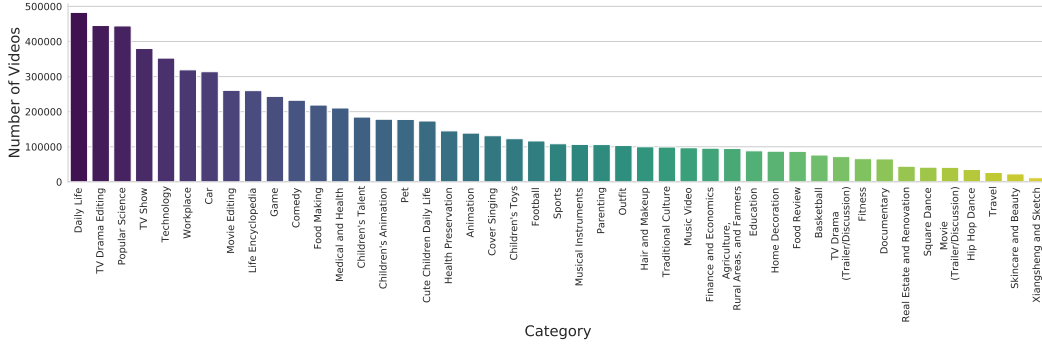


Figure 2: The distribution of the number of videos in each common category.

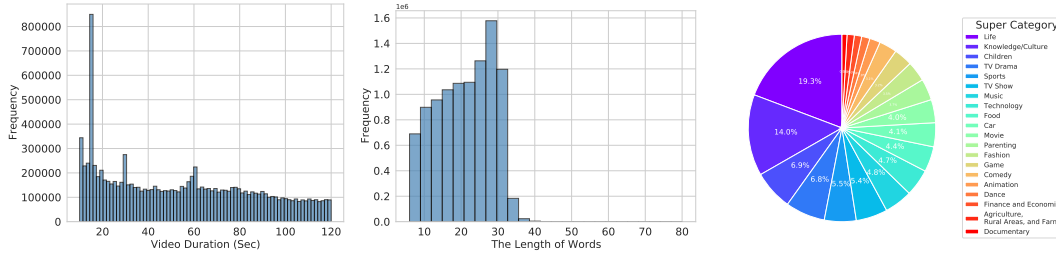


Figure 3: Youku-mPLUG dataset statistics: we report the histogram of video duration in seconds (left), the histogram of title length in words (middle), and the ratios of the categories in each super-category (right).

to be between 5 and 30 words and include at least 5 Chinese characters while filtering out those with obvious advertising or meaningless content. In terms of video quality and integrity, we have specifically chosen recently uploaded videos with durations ranging from 10 to 120 seconds to ensure clear and complete content. Further, we also employ the Chinese image-text pre-trained model CLIP [Yang et al., 2022] to improve the data quality by deprecating those with low similarities between the frame mean features and text features. Fig. 3 shows the statistics of video duration and word length.

### 3.2 Downstream Benchmark Construction

For the downstream benchmark, we design three types of tasks including video-text retrieval, video category classification, and video captioning to evaluate the models' performance in terms of understanding and generation. The statistics of these three different datasets are summarized in Tab. 3.

Table 3: Statistics of Youku-mPLUG benchmark datasets. # pairs indicates the number of video-text pairs.

Task	Train (# Pairs)	Val (# Pairs)	Test (# Pairs)
Video Category Classification	100,023	14,678	20,026
Video-Text Retrieval	37,595	1,795	7,414
Video Captioning	170,866	7,510	7,705

**Video Category Classification** Our initial step involves randomly selecting a substantial number of videos based on category frequency. Next, we collect the video categories from the Youku database, which are auto-generated by an online model. It is important to note that this model's accuracy is approximately 94% when considering historical prediction data, thus not entirely reliable. Consequently, we put forth additional efforts to ensure the quality and accuracy of our datasets by manually verifying each video and its corresponding title in the benchmark datasets. Prior to annotation, we supply a smaller dataset containing 100 videos, along with their metadata, including titles and categories generated by the online prediction model. Annotators are then tasked with confirming the assigned categories in relation to the videos and their titles. They must also assign a relevance score, which ranges from 1 to 5. A higher score suggests a greater likelihood of the video belonging to the given category, and those with scores above 3 are retained. Annotators with

error rates exceeding 2.5% are disqualified. After eliminating unsuitable annotators, we proceed with annotating the video category classification dataset. To ensure the utmost accuracy, particularly for the validation and testing sets, we engage three annotators to verify each video.

**Video Captioning** The video captioning task requires the model to generate a concise sentence describing a video clip’s content and title. To create the dataset, we randomly sample around 80,000 videos based on category frequency distribution and employ a color histogram-based approach for segmenting each video into shots [Mei et al., 2014]. To ensure an accurate understanding of the video content and produce precise descriptions, we engage several annotators who are native Chinese speakers with strong educational backgrounds. As part of the pre-annotation process during the video category classification task, we assign 25 random videos to each annotator, requesting them to create captions that include the subject and object in the video, as well as relevant descriptions of actions and background. The captions must consist of at least 15 Chinese characters. Following the pre-annotation stage, annotators proceed with annotating the datasets and split them into the training, validation, and testing sets. Especially, to prevent data leakage, clips from the same video or sharing the same title are exclusively assigned to either the training or testing sets. Moreover, for the validation and testing datasets, we enlist more than three individuals to annotate the video clips, promoting diversity and quality.

**Video-Text Retrieval** Given that we have already annotated video captions during the creation of the video captioning dataset, we select a subset of these annotated captions as text queries for video-text retrieval. Additionally, video titles can also be incorporated into the text queries, enhancing diversity within the text. In a similar vein, we ensure that clips from the same video or those with identical text titles are not exclusively included in the training or test set to prevent potential data leakage.

## 4 Methodology

Since the pre-trained large language model shows incredible zero-shot and generalization abilities on various tasks, we use the off-the-shelf Chinese large language model (e.g. GPT-3 [Brown et al., 2020]) for efficient modularized training. To this end, we propose mPLUG-video, a decoder-only based video-language model that leverages the frozen large language model. Especially, our model consists of a video encoder, a visual abstractor module, and a language decoder, as illustrated in Figure 4. Besides, we leave the video encoder and visual abstractor trainable resulting in limited trainable parameters while largely reducing the computation burden.

### 4.1 Architecture

**The Video Encoder** We leverage a 12-layer TimeSformer [Bertasius et al., 2021] to extract the video features, with 224 height and width of each input frame. We sparsely sample  $T$  frames from each video  $\mathcal{V}$ , the TimeSformer first divides the video frames into  $N$  non-overlapping patches and flattens them into a sequence of  $T \times N$  patches. Then these patches are fed into the patch projection layers for patch representation. To encode the position of each patch, we add learnable embeddings to encode each patch’s spatial and temporal position. Then the TimeSformer applies divided spatiotemporal attention to yield video representation  $V \in \mathbb{R}^{(T \times N) \times D}$ , where  $D$  is the hidden dimension of the video representation.

**Visual Abstractor Module** To mitigate the computation burden with the lengthy video sequences, we introduce visual abstractor module which utilizes learnable queries  $Q \in \mathbb{R}^{M \times D}$  for reducing the length of video sequence as follows:

$$\tilde{Q} = \text{CrossAttention}(Q, V, V), \tag{1}$$

$$\tilde{Q} = \text{FFN}(\tilde{Q}) + \tilde{Q}, \tag{2}$$

where  $\text{CrossAttention}(x, y, z)$  is the cross-attention layer with Query  $x$ , Key  $y$ , and Value  $z$ . The  $\text{FFN}(\cdot)$  is the feed-forward layer [Vaswani et al., 2017]. Finally, we obtain the reduced video sequence  $\tilde{Q} \in \mathbb{R}^{M \times D}$ .

**The Language Decoder** Since pre-trained large language models demonstrate strong zero-shot capabilities in text generation, we utilize them as the general text decoder for multi-modal inputs while keeping it frozen. In specific, we treat the video as a foreign language and concatenate the reduced video sequence with the text token features obtained from the text embedding layer. Then, the video and text token features are jointly fed into the large language model which is frozen for obtaining the video-guided language features. Finally, the video-guided language features are predicted for text tokens.

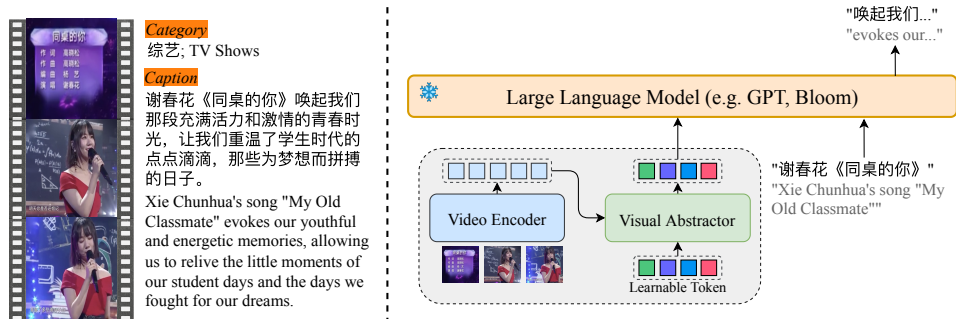


Figure 4: The overview of mPLUG-video.

**Training Objective** We train mPLUG-video within an auto-regressive manner and adopt the next prediction task for training. In detail, the model needs to complete the texts based on the given video, and the language modeling loss is calculated as:

$$\mathcal{L} = -\mathbb{E}_{(\mathcal{W}, \mathcal{V})} \left[ \sum_{l=1}^L \log p(w_l | \mathcal{W}_{[0, l)}, \mathcal{V}) \right], \quad (3)$$

where  $L$  denotes the total number of words in the text, and  $\mathcal{W}$  denotes the word tokens.

## 4.2 Applying to Downstream Tasks

**Video Captioning** Video captioning is considered an auto-regressive task. During the process of fine-tuning a video captioning dataset, the training objective remains the same as that during pre-training.

**Video Category Classification** We treat video category classification as a video caption task. Annotated category names of videos are regarded as ground-truth captions. We evaluate the accuracy of predictions based on whether the predicted category name exactly matches the ground-truth.

**Video-Text Retrieval** In contrast to mPLUG-2, which includes a contrastive head and a matching head for the retrieval task, our mPLUG-video cannot be directly used for retrieval tasks. Therefore, we input video-text pairs into the model and extract the feature of the last token. We obtain the matching score by applying an extra linear layer to the feature of the last token.

## 5 Experiments

### 5.1 Implementation Details

mPLUG-video leverage the pre-trained popular Chinese GPT-3<sup>4 5</sup> as the language decoder, and the video encoder is pre-trained on ImageNet [Ridnik et al., 2021]. During pre-training, we sparsely sample 8 frames from each video preserving their order in-between, and resize them to  $224 \times 224$ . We use a batch size of 512 and train mPLUG-video for 10 epochs. We adopt the AdamW optimizer with  $\beta = (0.9, 0.98)$ , and set the learning rate and weight decay to  $1e-4$  and  $1e-3$  respectively. We warm up the training with 2000 warm-up steps then decay the learning rate with the cosine schedule. For downstream tasks, we use a batch size of 128 and train mPLUG-video for 10 epochs with a learning rate  $2e-5$ .

### 5.2 Evaluation Results on Downstream tasks

In this study, we evaluate the performance of ALPRO, mPLUG-2, and mPLUG-video on video category classification, video captioning, and video-text retrieval.

**Evaluation on Video Category Classification** We assess the performance of ALPRO, mPLUG-2, and mPLUG-Video on video category classification tasks. We measure the top-1 and top-5 accuracy of each model. For the generation models, a generated category name that is exactly the same as ground truth can be regarded as a correct prediction. The comparison results are shown in Table 4. Our results reveal that mPLUG-Video achieves the highest accuracy, with a top-1 accuracy of 80.57%

<sup>4</sup>[https://modelscope.cn/models/damo/nlp\\_gpt3\\_text-generation\\_1.3B/summary](https://modelscope.cn/models/damo/nlp_gpt3_text-generation_1.3B/summary)

<sup>5</sup>[https://modelscope.cn/models/damo/nlp\\_gpt3\\_text-generation\\_2.7B/summary](https://modelscope.cn/models/damo/nlp_gpt3_text-generation_2.7B/summary)

and a top-5 accuracy of 98.15%. Interestingly, mPLUG-video (2.7B) outperforms mPLUG-video (1.3B), highlighting the importance of natural language understanding with a larger LLM decoder.

**Evaluation on Video Caption** We present in Table 4 the performance of models on Video Caption. ALPRO does not have a decoder module. Therefore, its performance was not reported. The performance of mPLUG-Video and mPLUG-2 are compared based on various metrics, including METEOR, ROUGE, CIDEr, and BLEU-4. It is found that mPLUG-video (2.7B) achieves higher scores than mPLUG-Video (1.3B) across all four metrics. Additionally, mPLUG-video obtains higher scores than mPLUG-2 on BLEU-4. These results suggest that pre-trained language models are essential and video captioning tasks based on our dataset are still challenging for existing methods.

**Evaluation on Video-Text Retrieval** Table 5 presents the performance comparison between models on video retrieval task. We observe that mPLUG-2 outperforms ALPRO, possibly due to the incorporation of universal layers that remove modality differences and generate superior uni-modal representations. We also notice that mPLUG-video perform poorly on video retrieval task. Freezing the language model can hinder mPLUG-video to extract cross-modal features. These findings imply that our dataset accurately measures the video-language modeling capability.

Table 4: Comparison results on Youku-mPLUG. Video category prediction and video captioning, respectively. For video category prediction, top-1 and top-5 accuracy are reported. For video captioning, we report BLEU-4, METEOR, ROUGE and CIDEr. \* denotes the language model is frozen.

Model	Video Category Prediction		Video Captioning			
	Top-1 Acc.(%)	Top-5 Acc.(%)	BLEU-4	METEOR	ROUGE	CIDEr
ALPRO	78.15	95.15	-	-	-	-
mPLUG-2	77.79	92.44	43.7	<b>27.6</b>	52.9	67.7
mPLUG-Video (1.3B)*	80.04	98.06	46.4	26.5	52.9	67.7
mPLUG-Video (2.7B)*	<b>80.57</b>	<b>98.15</b>	<b>47.1</b>	26.7	<b>53.3</b>	<b>68.9</b>

Table 5: Comparison results on Youku-mPLUG. Video retrieval. We evaluate models on video retrieval (V2T) and text retrieval (T2V). we report the average of R@1, R@5 and R@10. \* denotes the language model is frozen.

Model	Video Retrieval					
	V2T		T2V			
	R@1	R@2	R@10	R@1	R@5	R@10
ALPRO	27.00	53.33	64.09	26.63	53.20	64.43
mPLUG-2	<b>38.45</b>	<b>65.48</b>	<b>75.18</b>	<b>38.45</b>	<b>65.48</b>	<b>75.18</b>
mPLUG-Video (1.3B)*	7.01	20.33	29.67	7.01	20.33	29.67
mPLUG-Video (2.7B)*	7.62	21.24	31.39	7.62	21.24	31.39

### 5.3 Ablation Study on Modalities

Table 6: Comparison of different modalities and Youku-mPLUG on category classification task.

Vision Modality	Language Modality	Youku-mPLUG Pre-Trained	Top-1 Acc.(%)	Top-5 Acc.(%)
✓	✗	✗	63.51	89.89
✗	✓	✗	59.31	86.31
✓	✓	✗	69.40	90.07
✓	✓	✓	<b>78.15</b>	<b>95.15</b>

In this section, we investigate the contributions of different modalities to video-language modeling by leveraging the category classification task on our Youku-mPLUG. Table 6 presents the performance of the baseline model (ALPRO) trained with data of different modalities. Vision Modality and Language Modality denote the model is trained with and utilizes this modality of data (video frames or video captions). And Youku-mPLUG Pre-Trained refers to the model that pre-trained on Youku-mPLUG before fine-tuning. The results show that the performance of the model trained with the



visual modality is higher than that of the language modality. This suggests that high-level language modalities may lose fine-grained visual clues, leading to failure in retrieval. Additionally, we observe that the model trained with both vision and language modalities achieves higher performance than unimodal models. This observation demonstrates the importance of modality complementarity in video understanding. Pre-training the model with Youku-mPLUG leads to a significant improvement in model performance, emphasizing the importance of our Youku-mPLUG.

#### 5.4 Human Evaluation of Zero-shot Video Instruction Understanding

To test the video instruction understanding ability of different models, we manually set 65 instructions based on 50 randomly-sampled videos (45 from Youku-mPLUG, 5 from HD-VILA-100M [Xue et al., 2022]). We compare the instruction understanding performance of three models: VideoLLaMA[Zhang et al., 2023], mPLUG-Video w/o pretrain and mPLUG-Video. VideoLLaMA is trained with visual instruction data from MiniGPT-4[Zhu et al., 2023], LLaVa [Liu et al., 2023] and Video-Chat [Li et al., 2023b], while the latter two models only utilize visual training data from LLaVa [Liu et al., 2023]. We ask human annotators to score the models’ responses. Following Self-Instruct[Wang et al., 2022], human annotators are asked to rate the response into four levels, where A means ‘correct and satisfying response’, B means ‘acceptable response with minor imperfections’, C means ‘response to the instruction but has significant errors’ and D means ‘irrelevant or invalid response’. As shown in Fig. 5, with the pertaining in Youku-mPLUG, mPLUG-video achieves much better video instruction understanding and responding ability, demonstrating the effectiveness of our proposed pretraining data. Qualitative results can be found in the supplementary material.

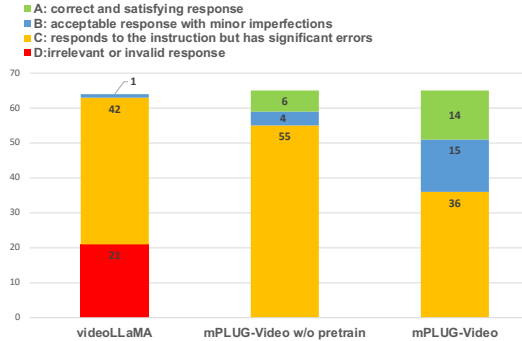


Figure 5: Human evaluation about zero-shot video instruction understanding on 65 cases.

### 6 Conclusion

In this paper, we introduce the largest high-quality video-language dataset in Chinese, called Youku-mPLUG. Additionally, we present a human-annotated benchmark that comprises three downstream tasks, i.e., Video-Text Retrieval, Video Captioning, and Video Category Classification. We propose a decoder-only model, mPLUG-video, that is modularized and pre-trained on Youku-mPLUG. Results from our experiments indicate that our evaluation set can effectively evaluate the video language comprehension and modeling abilities of models. Furthermore, pre-training on mPLUG-video leads to significant improvements, and our mPLUG-video achieves a new state-of-the-art performance.

#### A Qualitative Results of Zero-shot Video Instruction Understanding

In this section, we show some qualitative results of zero-shot video instruction understanding to validate the effectiveness of pretraining with Youku-mPLUG. Firstly, as shown in Fig. 6, with the pertaining, mPLUG-video can better understand both overall video semantic (‘dance video’) and detailed vision information, such as ‘jumping’ and ‘twisting’. Besides, Fig. 7 shows that mPLUG-video can better recognize scene texts in videos and give more accurate responses. Therefore, pretraining with Youku-mPLUG is highly likely to enhance the models’ ability to comprehend scene text in videos. Furthermore, in Fig. 8, mPLUG-video could accurately point out the key character name ‘Ultraman’, while the other two models can’t. This validates the contribution of pretraining for learning open-domain knowledge.

#### B Limitations and Societal Impacts

The Youku-mPLUG dataset predominantly contains concepts and language expressions that were current at the time of collection. As language evolves alongside human activities, our dataset may not

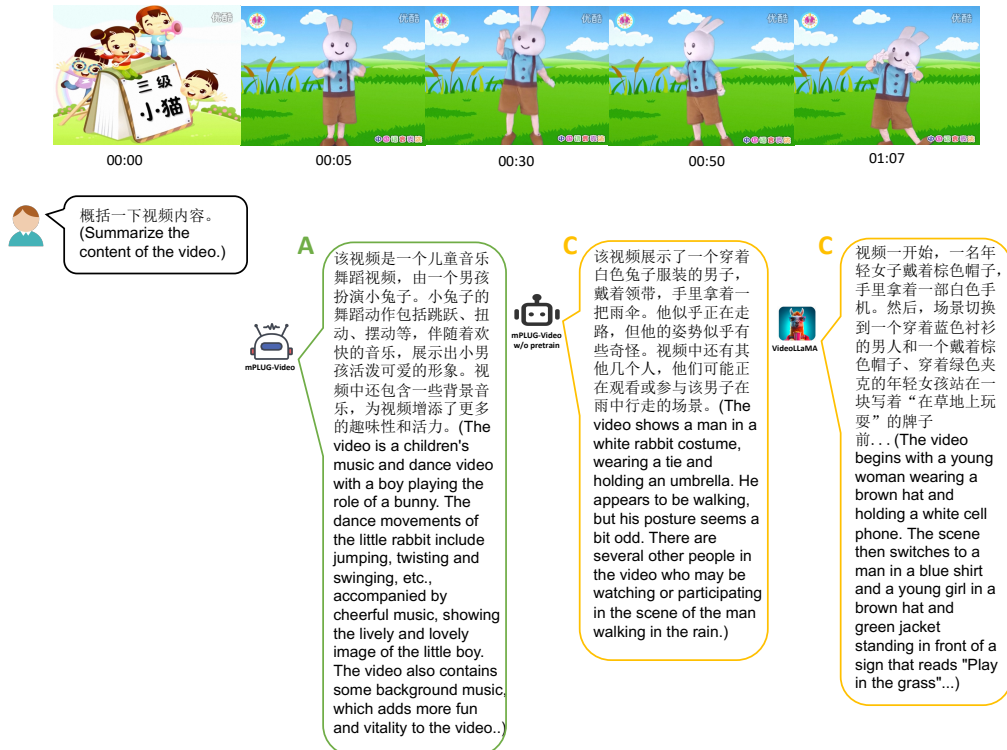


Figure 6: Qualitative results about video captioning.

encompass emerging concepts, words, and language expressions in the future. This limitation applies to image data as well, where new visual objects or designs might not be captured. Nevertheless, this issue can be addressed by fine-tuning pre-trained models on up-to-date data. Additionally, our dataset is constructed using corpora from the Chinese Internet, meaning the vocabulary and expressions may largely align with Chinese culture. Furthermore, our dataset lacks very long texts and lengthy videos, potentially limiting the ability of the pre-trained models to understand extensive content such as full-length movies.

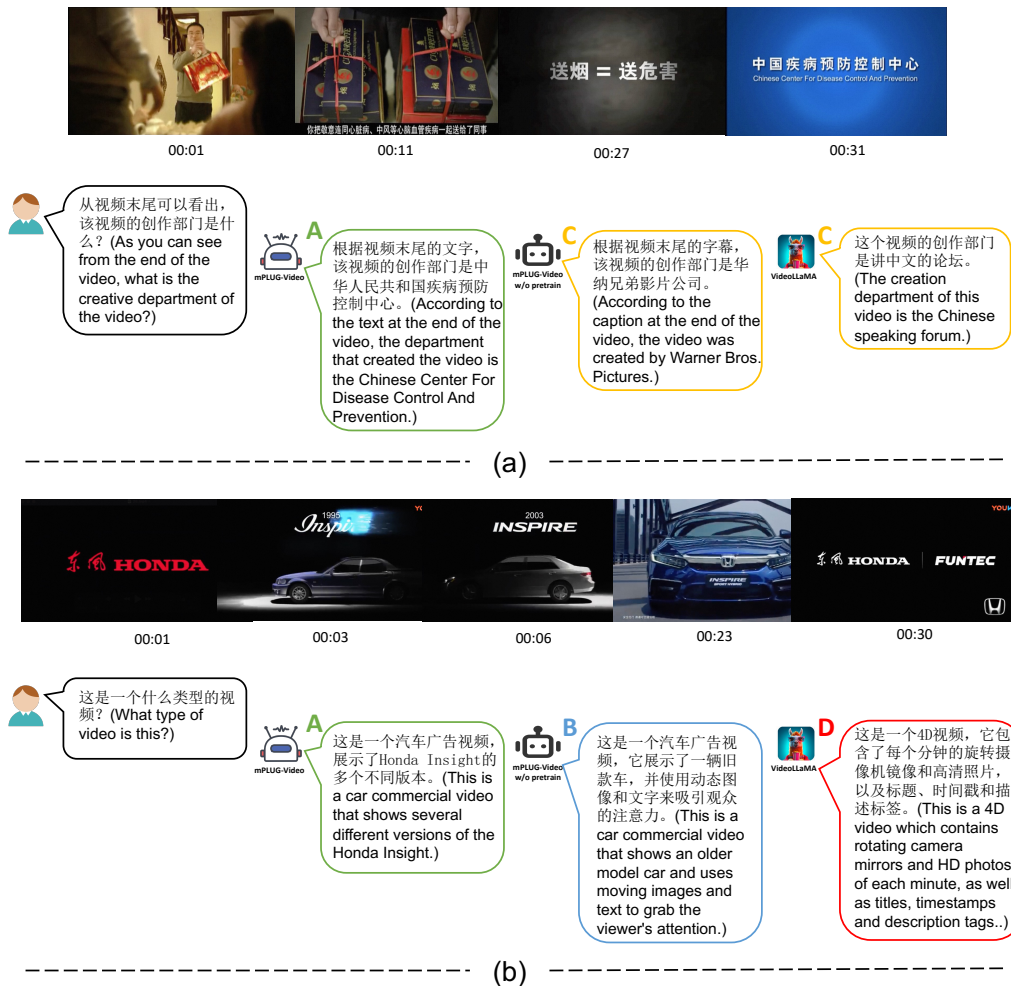


Figure 7: Qualitative results about video scene text understanding.



这个视频片段讲了什么?  
(What is this video clip about?)



**B** 这个视频片段是一个宣传视频，展示了一部由奥特曼和银河系战士组成的电影。视频中，银河战士和奥特战士们一起出现在屏幕上。他们展示了各种战斗技能和动作，展示了奥特和银河系的强大力量和战斗能力。(This video clip is a promotional video showing a movie consisting of Ultraman and Galactic Warriors. In the video, the galactic warriors and Ultras appear on the screen together. They show a variety of combat skills and movements, demonstrating the great power and fighting ability of Ultras and Galactics.)



**C** 这个视频片段是一个采访，讲述了一个日本老人对日本文化的热爱和对日本的回忆。(This video clip is an interview about an elderly Japanese man's love for Japanese culture and his memories of Japan.)



**C** 这个视频片段是一部中日电影，涉及许多特征和情节。它展现了一个帅气的男人穿着一套黑色带和紫色外套戴着戴剑的人、一个人穿着袭刀戴着戴剑的男人。(This video clip is a Chinese Japanese film that involves many features and plots. It shows a man wearing a black band and purple jacket wearing a man wearing a sword, a man wearing an assault sword wearing a man wearing a sword..)

Figure 8: Qualitative results about open-domain knowledge understanding.



阿米尔汗直播打麻将 王宝强调侃米叔是“你输”——早班机  
Amir Khan plays mahjong live and Wang Baoqiang jokes that "you lose" to Amir Khan - Morning Flight



治愈系旋律来袭, 周华健经典再现《朋友》, 珍惜身边的人吧!  
Healing melody strikes, Zhou Huajian classic reproduction of "Friends", cherish the people around you!



刘宇宁你把手撒开让我来  
Liu yuning, let go of your hand and let me do it.



【江河水 第22集】秦昊危机关头舍己为人勇救闹清子尽显真情!  
At the crisis point in River of Rivers Episode 22, Qin Hao showed true affection by riskin g his life to save Kan Qingzi!



又帅气又简单的橡皮筋魔术1 (校园魔术)  
Handsone and Simple Rubber Band Magic 1 (Campus Magic)

Figure 9: Examples in Youku-mPLUG.

## References

- J.-B. Alayrac, J. Donahue, P. Luc, A. Miech, I. Barr, Y. Hasson, K. Lenc, A. Mensch, K. Millican, M. Reynolds, et al. Flamingo: a visual language model for few-shot learning. *arXiv preprint arXiv:2204.14198*, 2022.
- L. Anne Hendricks, O. Wang, E. Shechtman, J. Sivic, T. Darrell, and B. Russell. Localizing moments in video with natural language. In *Proceedings of the IEEE international conference on computer vision*, pages 5803–5812, 2017.
- M. Bain, A. Nagrani, G. Varol, and A. Zisserman. Frozen in time: A joint video and image encoder for end-to-end retrieval. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1728–1738, 2021.
- G. Bertasius, H. Wang, and L. Torresani. Is space-time attention all you need for video understanding? In *ICML*, page 4, 2021.
- T. B. Brown, B. Mann, N. Ryder, M. Subbiah, J. Kaplan, P. Dhariwal, A. Neelakantan, P. Shyam, G. Sastry, A. Askell, S. Agarwal, A. Herbert-Voss, G. Krueger, T. Henighan, R. Child, A. Ramesh, D. M. Ziegler, J. Wu, C. Winter, C. Hesse, M. Chen, E. Sigler, M. Litwin, S. Gray, B. Chess, J. Clark, C. Berner, S. McCandlish, A. Radford, I. Sutskever, and D. Amodei. Language models are few-shot learners, 2020.
- D. Chen and W. B. Dolan. Collecting highly parallel data for paraphrase evaluation. In *Proceedings of the 49th annual meeting of the association for computational linguistics: human language technologies*, pages 190–200, 2011.
- T. Gan, Q. Wang, X. Dong, X. Ren, L. Nie, and Q. Guo. Cnvid-3.5m: Build, filter, and pre-train the large-scale public chinese video-text dataset. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 14815–14824, June 2023.
- Y. Ge, Y. Ge, X. Liu, D. Li, Y. Shan, X. Qie, and P. Luo. Bridging video-text retrieval with multiple choice questions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16167–16176, 2022.
- E. Giunchiglia and T. Lukasiewicz. Coherent hierarchical multi-label classification networks. In *34th Conference on Neural Information Processing Systems (NeurIPS 2020)*, Vancouver, Canada, December 2020.
- Y. Jang, Y. Song, Y. Yu, Y. Kim, and G. Kim. Tgif-qa: Toward spatio-temporal reasoning in visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2758–2766, 2017.
- R. Krishna, K. Hata, F. Ren, L. Fei-Fei, and J. C. Niebles. Dense-captioning events in videos. In *International Conference on Computer Vision (ICCV)*, 2017.
- C. Lei, S. Luo, Y. Liu, W. He, J. Wang, G. Wang, H. Tang, C. Miao, and H. Li. Understanding chinese video and language via contrastive multimodal pre-training. In H. T. Shen, Y. Zhuang, J. R. Smith, Y. Yang, P. César, F. Metze, and B. Prabhakaran, editors, *MM '21: ACM Multimedia Conference, Virtual Event, China, October 20 - 24, 2021*, pages 2567–2576. ACM, 2021a. doi: 10.1145/3474085.3475431. URL <https://doi.org/10.1145/3474085.3475431>.
- J. Lei, L. Li, L. Zhou, Z. Gan, T. L. Berg, M. Bansal, and J. Liu. Less is more: Clipbert for video-and-language learning via sparse sampling. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7331–7341, 2021b.
- C. Li, H. Xu, J. Tian, W. Wang, M. Yan, B. Bi, J. Ye, H. Chen, G. Xu, Z. Cao, et al. mplug: Effective and efficient vision-language learning by cross-modal skip-connections. *arXiv preprint arXiv:2205.12005*, 2022a.
- D. Li, J. Li, H. Li, J. C. Niebles, and S. C. Hoi. Align and prompt: Video-and-language pre-training with entity prompts. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4953–4963, 2022b.

- J. Li, D. Li, S. Savarese, and S. Hoi. BLIP-2: bootstrapping language-image pre-training with frozen image encoders and large language models. In *ICML*, 2023a.
- K. Li, Y. He, Y. Wang, Y. Li, W. Wang, P. Luo, Y. Wang, L. Wang, and Y. Qiao. Videochat: Chat-centric video understanding, 2023b.
- L. Li, Y.-C. Chen, Y. Cheng, Z. Gan, L. Yu, and J. Liu. Hero: Hierarchical encoder for video+language omni-representation pre-training. In *Conference on Empirical Methods in Natural Language Processing*, 2020.
- H. Liu, C. Li, Q. Wu, and Y. J. Lee. Visual instruction tuning. *CoRR*, abs/2304.08485, 2023.
- H. Luo, L. Ji, B. Shi, H. Huang, N. Duan, T. Li, X. Chen, and M. Zhou. Univilm: A unified video and language pre-training model for multimodal understanding and generation. *ArXiv*, abs/2002.06353, 2020.
- A. Madasu, E. Aflalo, G. B. Stan, S.-Y. Tseng, G. Bertasius, and V. Lal. Improving video retrieval using multilingual knowledge transfer. In *European Conference on Information Retrieval*, 2022.
- T. Mei, Y. Rui, S. Li, and Q. Tian. Multimedia search reranking: A literature survey. *ACM Comput. Surv.*, 46:38:1–38:38, 2014.
- A. Miech, D. Zhukov, J.-B. Alayrac, M. Tapaswi, I. Laptev, and J. Sivic. Howto100m: Learning a text-video embedding by watching hundred million narrated video clips. In *ICCV*, pages 2630–2640, 2019.
- L. Nie, L. Qu, D. Meng, M. Zhang, Q. Tian, and A. Bimbo. Search-oriented micro-video captioning. *Proceedings of the 30th ACM International Conference on Multimedia*, 2022a.
- L. Nie, L. Qu, D. Meng, M. Zhang, Q. Tian, and A. D. Bimbo. Search-oriented micro-video captioning. In *Proceedings of the 30th ACM International Conference on Multimedia*, MM '22, page 3234–3243, New York, NY, USA, 2022b. Association for Computing Machinery. ISBN 9781450392037. doi: 10.1145/3503161.3548180. URL <https://doi.org/10.1145/3503161.3548180>.
- T. Ridnik, E. Ben-Baruch, A. Noy, and L. Zelnik-Manor. Imagenet-21k pretraining for the masses. *arXiv preprint arXiv:2104.10972*, 2021.
- A. Rohrbach, M. Rohrbach, N. Tandon, and B. Schiele. A dataset for movie description. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 3202–3212, 2015.
- P. Sharma, N. Ding, S. Goodman, and R. Soricut. Conceptual captions: A cleaned, hypernamed, image alt-text dataset for automatic image captioning. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2556–2565, Melbourne, Australia, July 2018. Association for Computational Linguistics. doi: 10.18653/v1/P18-1238. URL <https://aclanthology.org/P18-1238>.
- H. Touvron, T. Lavril, G. Izacard, X. Martinet, M.-A. Lachaux, T. Lacroix, B. Rozière, N. Goyal, E. Hambro, F. Azhar, A. Rodriguez, A. Joulin, E. Grave, and G. Lample. Llama: Open and efficient foundation language models, 2023.
- A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, L. u. Kaiser, and I. Polosukhin. Attention is all you need. In I. Guyon, U. V. Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc., 2017.
- X. Wang, J. Wu, J. Chen, L. Li, Y. Wang, and W. Y. Wang. Vatex: A large-scale, high-quality multilingual dataset for video-and-language research. In *2019 IEEE/CVF International Conference on Computer Vision, ICCV 2019, Seoul, Korea (South), October 27 - November 2, 2019*, pages 4580–4590. IEEE, 2019. doi: 10.1109/ICCV.2019.00468. URL <https://doi.org/10.1109/ICCV.2019.00468>.



- Y. Wang, Y. Kordi, S. Mishra, A. Liu, N. A. Smith, D. Khashabi, and H. Hajishirzi. Self-instruct: Aligning language model with self generated instructions. *arXiv preprint arXiv:2212.10560*, 2022.
- B. Workshop, :, T. L. Scao, A. Fan, C. Akiki, E. Pavlick, S. Ilić, D. Hesslow, R. Castagné, A. S. Luccioni, F. Yvon, M. Gallé, J. Tow, A. M. Rush, S. Biderman, A. Webson, P. S. Ammanamanchi, T. Wang, B. Sagot, N. Muennighoff, A. V. del Moral, O. Ruwase, R. Bawden, S. Bekman, A. McMillan-Major, I. Beltagy, H. Nguyen, L. Saulnier, S. Tan, P. O. Suarez, V. Sanh, H. Laurençon, Y. Jernite, J. Launay, M. Mitchell, C. Raffel, A. Gokaslan, A. Simhi, A. Soroa, A. F. Aji, A. Alfassy, A. Rogers, A. K. Nitzav, C. Xu, C. Mou, C. Emezue, C. Klamm, C. Leong, D. van Strien, D. I. Adelani, D. Radev, E. G. Ponferrada, E. Levkovizh, E. Kim, E. B. Natan, F. D. Toni, G. Dupont, G. Kruszewski, G. Pistilli, H. Elsahar, H. Benyamina, H. Tran, I. Yu, I. Abdulmumin, I. Johnson, I. Gonzalez-Dios, J. de la Rosa, J. Chim, J. Dodge, J. Zhu, J. Chang, J. Frohberg, J. Tobing, J. Bhattacharjee, K. Almubarak, K. Chen, K. Lo, L. V. Werra, L. Weber, L. Phan, L. B. allal, L. Tanguy, M. Dey, M. R. Muñoz, M. Masoud, M. Grandury, M. Šaško, M. Huang, M. Coavoux, M. Singh, M. T.-J. Jiang, M. C. Vu, M. A. Jauhar, M. Ghaleb, N. Subramani, N. Kassner, N. Khamis, O. Nguyen, O. Espejel, O. de Gibert, P. Villegas, P. Henderson, P. Colombo, P. Amuok, Q. Lhoest, R. Harliman, R. Bommasani, R. L. López, R. Ribeiro, S. Osei, S. Pyysalo, S. Nagel, S. Bose, S. H. Muhammad, S. Sharma, S. Longpre, S. Nikpoor, S. Silberberg, S. Pai, S. Zink, T. T. Torrent, T. Schick, T. Thrush, V. Danchev, V. Nikoulina, V. Laippala, V. Lepercq, V. Prabhu, Z. Alyafeai, Z. Talat, A. Raja, B. Heinzerling, C. Si, D. E. Taşar, E. Salesky, S. J. Mielke, W. Y. Lee, A. Sharma, A. Santilli, A. Chaffin, A. Stiegler, D. Datta, E. Szczechla, G. Chhablani, H. Wang, H. Pandey, H. Strobelt, J. A. Fries, J. Rozen, L. Gao, L. Sutawika, M. S. Bari, M. S. Al-shaibani, M. Manica, N. Nayak, R. Teehan, S. Albanie, S. Shen, S. Ben-David, S. H. Bach, T. Kim, T. Bers, T. Fevry, T. Neeraj, U. Thakker, V. Raunak, X. Tang, Z.-X. Yong, Z. Sun, S. Brody, Y. Uri, H. Tojarieh, A. Roberts, H. W. Chung, J. Tae, J. Phang, O. Press, C. Li, D. Narayanan, H. Bourfoune, J. Casper, J. Rasley, M. Ryabinin, M. Mishra, M. Zhang, M. Shoeybi, M. Peyrounette, N. Patry, N. Tazi, O. Sanseviero, P. von Platen, P. Cornette, P. F. Lavallée, R. Lacroix, S. Rajbhandari, S. Gandhi, S. Smith, S. Requena, S. Patil, T. Dettmers, A. Baruwa, A. Singh, A. Cheveleva, A.-L. Ligozat, A. Subramonian, A. Névéal, C. Lovering, D. Garrette, D. Tunuguntla, E. Reiter, E. Taktasheva, E. Voloshina, E. Bogdanov, G. I. Winata, H. Schoelkopf, J.-C. Kalo, J. Novikova, J. Z. Forde, J. Clive, J. Kasai, K. Kawamura, L. Hazan, M. Carpuat, M. Clinciu, N. Kim, N. Cheng, O. Serikov, O. Antverg, O. van der Wal, R. Zhang, R. Zhang, S. Gehrmann, S. Mirkin, S. Pais, T. Shavrina, T. Scialom, T. Yun, T. Limisiewicz, V. Rieser, V. Protasov, V. Mikhailov, Y. Pruksachatkun, Y. Belinkov, Z. Bamberger, Z. Kasner, A. Rueda, A. Pestana, A. Feizpour, A. Khan, A. Faranak, A. Santos, A. Hevia, A. Unldreaj, A. Aghagol, A. Abdollahi, A. Tammour, A. HajiHosseini, B. Behroozi, B. Ajibade, B. Saxena, C. M. Ferrandis, D. Contractor, D. Lansky, D. David, D. Kiela, D. A. Nguyen, E. Tan, E. Baylor, E. Ozoani, F. Mirza, F. Ononiwu, H. Rezanejad, H. Jones, I. Bhattacharya, I. Solaiman, I. Sedenko, I. Nejadgholi, J. Passmore, J. Seltzer, J. B. Sanz, L. Dutra, M. Samagaio, M. Elbadri, M. Mieskes, M. Gerchick, M. Akinlolu, M. McKenna, M. Qiu, M. Ghauri, M. Burynok, N. Abrar, N. Rajani, N. Elkott, N. Fahmy, O. Samuel, R. An, R. Kromann, R. Hao, S. Alizadeh, S. Shubber, S. Wang, S. Roy, S. Viguier, T. Le, T. Oyebade, T. Le, Y. Yang, Z. Nguyen, A. R. Kashyap, A. Palasciano, A. Callahan, A. Shukla, A. Miranda-Escalada, A. Singh, B. Beilharz, B. Wang, C. Brito, C. Zhou, C. Jain, C. Xu, C. Fourier, D. L. Periñán, D. Molano, D. Yu, E. Manjavacas, F. Barth, F. Fuhrmann, G. Altay, G. Bayrak, G. Burns, H. U. Vrabec, I. Bello, I. Dash, J. Kang, J. Giorgi, J. Golde, J. D. Posada, K. R. Sivaraman, L. Bulchandani, L. Liu, L. Shinzato, M. H. de Bykhovetz, M. Takeuchi, M. Pàmies, M. A. Castillo, M. Nezhurina, M. Sängler, M. Samwald, M. Cullan, M. Weinberg, M. D. Wolf, M. Mihaljcic, M. Liu, M. Freidank, M. Kang, N. Seelam, N. Dahlberg, N. M. Broad, N. Muellner, P. Fung, P. Haller, R. Chandrasekhar, R. Eisenberg, R. Martin, R. Canalli, R. Su, R. Su, S. Cahyawijaya, S. Garda, S. S. Deshmukh, S. Mishra, S. Kiblawi, S. Ott, S. Sang-aaroonsiri, S. Kumar, S. Schweter, S. Bharati, T. Laud, T. Gigant, T. Kainuma, W. Kusa, Y. Labrak, Y. S. Bajaj, Y. Venkatraman, Y. Xu, Y. Xu, Y. Xu, Z. Tan, Z. Xie, Z. Ye, M. Bras, Y. Belkada, and T. Wolf. Bloom: A 176b-parameter open-access multilingual language model, 2023.
- D. Xu, Z. Zhao, J. Xiao, F. Wu, H. Zhang, X. He, and Y. Zhuang. Video question answering via gradually refined attention over appearance and motion. In *Proceedings of the 25th ACM international conference on Multimedia*, pages 1645–1653, 2017.
- H. Xu, Q. Ye, M. Yan, Y. Shi, J. Ye, Y. Xu, C. Li, B. Bi, Q. Qian, W. Wang, G. Xu, J. Zhang, S. Huang, F. Huang, and J. Zhou. mplug-2: A modularized multi-modal foundation model across text, image



and video, 2023.

- J. Xu, T. Mei, T. Yao, and Y. Rui. Msr-vtt: A large video description dataset for bridging video and language. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 5288–5296, 2016.
- H. Xue, T. Hang, Y. Zeng, Y. Sun, B. Liu, H. Yang, J. Fu, and B. Guo. Advancing high-resolution video-language representation with large-scale video transcriptions. In *International Conference on Computer Vision and Pattern Recognition (CVPR)*, 2022.
- A. Yang, J. Pan, J. Lin, R. Men, Y. Zhang, J. Zhou, and C. Zhou. Chinese clip: Contrastive vision-language pretraining in chinese. *ArXiv*, abs/2211.01335, 2022.
- X. Yang, Z. Li, H. Xu, H. Zhang, Q. Ye, C. Li, M. Yan, Y. Zhang, F. Huang, and S. Huang. Learning trajectory-word alignments for video-language tasks, 2023.
- Q. Ye, G. Xu, M. Yan, H. Xu, Q. Qian, J. Zhang, and F. Huang. Hitea: Hierarchical temporal-aware video-language pre-training, 2022.
- Q. Ye, H. Xu, G. Xu, J. Ye, M. Yan, Y. Zhou, J. Wang, A. Hu, P. Shi, Y. Shi, C. Li, Y. Xu, H. Chen, J. Tian, Q. Qi, J. Zhang, and F. Huang. mplug-owl: Modularization empowers large language models with multimodality, 2023.
- R. Zellers, X. Lu, J. Hessel, Y. Yu, J. S. Park, J. Cao, A. Farhadi, and Y. Choi. Merlot: Multimodal neural script knowledge models. *Advances in Neural Information Processing Systems*, 34:23634–23651, 2021.
- H. Zhang, X. Li, and L. Bing. Video-llama: An instruction-tuned audio-visual language model for video understanding, 2023.
- S. Zhang, Z. Tan, J. Yu, Z. Zhao, K. Kuang, J. Liu, J. Zhou, H. Yang, and F. Wu. Poet: Product-oriented video captioner for e-commerce. In *Proceedings of the 28th ACM International Conference on Multimedia*, MM '20, page 1292–1301, New York, NY, USA, 2020. Association for Computing Machinery. ISBN 9781450379885. doi: 10.1145/3394171.3413880. URL <https://doi.org/10.1145/3394171.3413880>.
- Z. Zhang, Y. Chen, Z. Ma, Z. Qi, C. Yuan, B. Li, Y. Shan, and W. Hu. Create: A benchmark for chinese short video retrieval and title generation, 2022.
- D. Zhu, J. Chen, X. Shen, X. Li, and M. Elhoseiny. Minigt-4: Enhancing vision-language understanding with advanced large language models. *arXiv preprint arXiv:2304.10592*, 2023.