

# Rethinking Incentives in Recommender Systems: Are Monotone Rewards Always Beneficial?

Fan Yao<sup>1</sup>

FY4BC@VIRGINIA.EDU

Chuanhao Li<sup>1</sup>

CL5EV@VIRGINIA.EDU

Karthik Abinav Sankararaman<sup>3</sup>

KARTHIKABINAVS@META.COM

Yiming Liao<sup>3</sup>

YIMINGLIAO@META.COM

Yan Zhu<sup>4</sup>

YZHUUU@GMAIL.COM

Qifan Wang<sup>3</sup>

WQFCR@META.COM

Hongning Wang<sup>1</sup>

HW5X@VIRGINIA.EDU

Haifeng Xu<sup>2</sup>

HAIFENGXU@UCHICAGO.EDU

<sup>1</sup>Department of Computer Science, University of Virginia, USA

<sup>2</sup>Department of Computer Science, University of Chicago, USA

<sup>3</sup>Meta, USA

<sup>4</sup>Google, USA

## Abstract

The past decade has witnessed the flourishing of a new profession as media content creators, who rely on revenue streams from online content recommendation platforms. The reward mechanism employed by these platforms creates a competitive environment among creators which affect their production choices and, consequently, content distribution and system welfare. It is thus crucial to design the platform’s reward mechanism in order to steer the creators’ competition towards a desirable welfare outcome in the long run. This work makes two major contributions in this regard: first, we uncover a fundamental limit about a class of widely adopted mechanisms, coined *Merit-based Monotone Mechanisms*, by showing that they inevitably lead to a constant fraction loss of the welfare. To circumvent this limitation, we introduce *Backward Rewarding Mechanisms* (BRMs) and show that the competition games resulting from BRM possess a potential game structure, which naturally induces the strategic creators’ behavior dynamics to optimize any given welfare metric. In addition, the class of BRM can be parameterized so that it allows the platform to directly optimize welfare within the feasible mechanism space even when the welfare metric is not explicitly defined.

## 1. Introduction

Online recommendation platforms, such as Instagram and YouTube, have become an integral part of our daily life (Bobadilla et al., 2013). Their impact extends beyond merely aligning users with the most relevant content: they are also accountable for the online ecosystem it creates and the long-term welfare it promotes, considering the complex dynamics driven by the potential strategic behaviors of content creators (Qian and Jain, 2022). Typically,

creators’ utilities are directly tied to the visibility of their content or economic incentives they can gather from the platform, and they constantly pursue to maximize these benefits (Glotfelter, 2019; Hodgson, 2021). This fosters a competitive environment that may inadvertently undermine the *social welfare*, i.e., the total utilities of all users and content creators in the system (Fleder and Hosanagar, 2009). For example, consider a scenario where the user population contains a majority group and many smaller minority groups, where different groups have distinct interested topics. The social welfare is maximized when content distribution covers the variety of topics. However, a possible equilibrium of this competition can lead most content creators to produce homogeneous content catering to the majority group. This is because the benefits from creating niche content cannot offset the utility loss caused by forgoing the exposure from the majority of users. Such a phenomenon could potentially dampen the engagement of minority user groups or even instigate them to leave the platform altogether. This would consequently hurt the overall social welfare and also impact the platform’s long-term revenue.

To counter such effects induced by strategic content creators, the platform can design reward signals that influence the creators’ perceived utilities, thereby steering content distribution at equilibrium towards enhanced social welfare. In reality, many platforms share revenue with creators via various mechanisms (Meta, 2022; Savy, 2019; Youtube, 2023; TikTok, 2022). These incentives are typically proportional to user satisfaction measured by various metrics, such as click-through rate and engagement time. We model such competitive environment within a general framework termed *content creator competition* ( $C^3$ ) game that generalizes and abstracts a few established models including (Yao et al., 2023; Ben-Porat and Tennenholtz, 2018; Jagadeesan et al., 2022; Hron et al., 2022), and frame a class of prevailing rewarding mechanisms as Merit-based Monotone Mechanisms ( $\mathcal{M}^3$ ). The  $\mathcal{M}^3$  are characterized by a few simple properties, intuitively meaning better content should be rewarded more (i.e., merit-based) and sum of creators’ utilities increase whenever any creator increases her content relevance (i.e., monotone). These properties reflect the essence of most employed rewarding mechanisms in practice. However, we show that  $\mathcal{M}^3$  necessarily incur a constant fraction of welfare loss in natural scenarios due to failing to encourage content creators who are content with generating popular content for majority user groups to produce niche content.

This surprising negative result reveals an intrinsic *incompatibility* of  $\mathcal{M}^3$  and necessitates a reassessment of incentive design in recommender systems (RS). A key property employed in  $\mathcal{M}^3$  is monotonicity, which stipulates that when the relevance quality of exposed creators to a specific user group exhibits a Pareto improvement, the total reward received by those creators also increases. We point out that, while plausible, this property undesirably encourages excessive concentration of creators around the majority user groups and leaves minority groups underserved. To resolve this issue, we question the validity of the monotone property. Intuitively, when creators’ competition within some user group surpasses a limit that begins to harm welfare, the platform should reduce their total gain. In light of this insight, we introduce Backward Rewarding Mechanisms (BRM), which discards monotonicity but remains merit-based. The strength of BRM lies in three aspects: 1. any  $C^3$  game under BRM forms a potential game (Monderer and Shapley, 1996); 2. there exists a BRM instance such that the induced potential function is equivalent to the social welfare metric. As a result, the net effect of creators’ competition aligns perfectly with maximizing the so-

cial welfare. 3. BRM contains a parameterized subspace that allows empirical optimization of social welfare. This flexibility becomes especially crucial in practice when the welfare is not explicitly defined. These merits of BRM are supported by our empirical studies, in which we developed simulated environments, demonstrating the welfare induced by BRM outperforms baseline mechanisms in  $\mathcal{M}^3$ .

## 2. Related Work

The theoretical studies of content creators’ strategic behavior under the mediation of an RS date back to the seminal work from (Ben-Porat and Tennenholtz, 2017, 2018), where they proposed the Shapley mediator that guarantees the existence of pure Nash equilibrium (PNE) and several fairness-related requirements. In these studies, the RS was only empowered to design the matching probability, and it was observed that user welfare could be significantly compromised. In contrast, our work considers a more realistic and contemporary platform that can determine the reward for each content creator. We propose a broad category of rewarding mechanisms, namely, Backward Rewarding Mechanisms (BRM), and reveal that: 1. the Shapley mediator (Ben-Porat and Tennenholtz, 2018) can be viewed as an instance of BRM, and 2. social welfare optimization becomes feasible within the class of BRM.

Several recent work (Hron et al., 2022; Jagadeesan et al., 2022; Yao et al., 2023) studied the properties of supply-side equilibrium under the  $C^3$  game. In (Hron et al., 2022; Jagadeesan et al., 2022), creators are assumed to directly compete for user exposure without the mediation of an RS. These studies focus on characterizing the Nash Equilibrium (NE) and identifying conditions that may trigger specialization among creators’ strategies. On the other hand, Yao et al. (2023) demonstrated that the user welfare loss under a conventional RS using top- $K$  ranking is upper-bounded by  $O(\frac{1}{\log K})$ . Our research reveals that any merit-based monotone mechanism, including those based on user exposure or engagement, unavoidably incurs a welfare loss of  $\frac{1}{K}$ . However, should the platform have the freedom to design arbitrary incentive signals, social welfare could be further optimized.

## 3. A General Model for Content Creator Competition

In this section, we formalize the Content Creator Competition ( $C^3$ ) game under the platform’s rewarding mechanisms. Each  $C^3$  instance  $\mathcal{G}$  is defined by a tuple

$(\{\mathcal{S}_i\}_{i=1}^n, \{c_i\}_{i=1}^n, \mathcal{X}, \sigma, M, \{r_i\}_{i=1}^n)$  with the following ingredients:

1. **Basic setups:** a finite set of users  $\mathcal{X} = \{\mathbf{x}_j \in \mathbb{R}^d\}_{j=1}^m$ , and a set of content creators denoted by  $[n] = \{1, \dots, n\}$ . Each creator  $i$  can take an action  $\mathbf{s}_i$ , often referred to as a *pure strategy* in game-theoretic terms, from an action set  $\mathcal{S}_i \subset \mathbb{R}^d$ .  $\mathbf{s}_i$  can be understood as the embedding of content that creator  $i$  can produce.
2. **Relevance function**  $\sigma(\mathbf{s}, \mathbf{x}) : \mathbb{R}^d \times \mathbb{R}^d \rightarrow \mathbb{R}_{\geq 0}$  which measures the *relevance* between a user  $\mathbf{x} \in \mathcal{X}$  and content  $\mathbf{s}$ . Without loss of generality, we normalize  $\sigma$  to  $[0, 1]$ , where 1 suggests perfect matching. We focus on modeling the strategic behavior of creators and thus abstract away the estimation of  $\sigma$ . For simplicity, we use  $\sigma_{i,j}(\mathbf{s})$  to denote  $\sigma(\mathbf{s}_i, \mathbf{x}_j)$

given any joint strategy profile  $\mathbf{s} = (\mathbf{s}_1, \dots, \mathbf{s}_n) \in \mathcal{S}$ . We may omit the argument  $\mathbf{s}$  when the context is clear.

3. **Rewarding mechanisms:** given joint strategy  $\mathbf{s} = (\mathbf{s}_1, \dots, \mathbf{s}_n) \in \mathcal{S}$ , the platform generates a reward  $u_{i,j} \in [0, 1]$  for each user-creator pair  $(\mathbf{s}_i, \mathbf{x}_j)$ . We generally allow  $u_{i,j}$  to depend on  $\mathbf{s}_i$ 's relevance  $\sigma_{i,j}$  and also other creators' relevance  $\sigma_{-i,j} = \{\sigma_{t,j} | 1 \leq t \leq n, t \neq i\}$ . Thus, a rewarding mechanism  $M$  is a mapping from  $(\sigma_{i,j}, \{\sigma_{-i,j}\})$  to  $[0, 1]$ , or formally,

$$u_{i,j} = M(\sigma_{i,j}, \sigma_{-i,j}). \quad (1)$$

For simplicity, we assume the rewarding mechanism  $M$  is invariant to user index  $j$ . However, our main results can be seamlessly generalized to  $M$  with dependency on  $j$ . Such rewarding mechanisms given by function  $M(\cdot, \cdot)$  can be understood as the expected payoff for creator  $i$  under any user-content matching strategy and some post-matching rewarding scheme. For example, suppose the platform matches creator  $\mathbf{s}_i$  to user  $\mathbf{x}_j$  with probability  $p(\sigma_{i,j}, \sigma_{-i,j})$  and then reward each matched creator- $i$  by some  $R_{i,j}$ . Then by letting  $R_{i,j} = \mathbb{I}[i \text{ matched to } j] \frac{M(\sigma_{i,j}, \sigma_{-i,j})}{p(\sigma_{i,j}, \sigma_{-i,j})}$  we have  $\mathbb{E}[R_{i,j}] = u_{i,j}$ . Given such correspondence between user-content matching/rewarding scheme and expected creator payoff, we can refrain from the discussion of detailed matching and rewarding schemes without loss of generality, and simply focus on the design of  $M(\cdot, \cdot)$ .

4. **Creator utilities:** creator- $i$ 's utility is defined as the sum of the reward gained from each individual user minus the cost for producing content  $\mathbf{s}_i$ , i.e.,

$$u_i(\mathbf{s}) = \sum_{j=1}^m u_{i,j} - c_i(\mathbf{s}_i), \forall i \in [n], \quad (2)$$

where  $c_i$  is the cost function for creator- $i$ . As an example, one may have  $c_i(\mathbf{s}_i) = \lambda_i \|\mathbf{s}_i - \bar{\mathbf{s}}_i\|_2^2$  where  $\bar{\mathbf{s}}_i$  represents the type of content that creator  $i$  is most comfortable or confident with.

5. **User utility and the social welfare:** Before formalizing the welfare objective, we first define each user- $j$ 's utility from consuming a list of ranked content. Since user's attention usually decreases in the rank positions, we introduce discounting weights  $\{r_{k,j} \in [0, 1]\}_k$  for each user- $j$  to represent his/her "attention" over the  $k$ -th ranked content. Naturally, we assume  $r_{1,j} \geq \dots \geq r_{n-1,j} \geq r_{n,j}$ , i.e., higher ranked content receives more user attention. Consequently, user- $j$ 's utility from consuming a list of content  $\{l_j(k)\}_{k=1}^n$ , which is a permutation of  $[n]$  ranked in a descending order of content relevance to user- $j$  (i.e.,  $\sigma_{l_j(1),j} \geq \sigma_{l_j(2),j} \geq \dots \geq \sigma_{l_j(n),j}$ ), is defined by the following weighted sum

$$W_j(\mathbf{s}) = \sum_{k=1}^n r_{k,j} \sigma_{l_j(k),j}(\mathbf{s}). \quad (3)$$

In the special case where the platform always recommends the top- $K$  ranked content, we shall have  $r_i = 0, \forall i > K$ . We refer to this important special case as the *top- $K$  environment*, which is popular in almost all practical RS. A concrete example is when

$r_{k,j} = \frac{1}{\log_2(k+1)}$ , which reduces  $W_j(\mathbf{s})$  to the well-known metric Discounted Cumulative Gain (DCG) (Järvelin and Kekäläinen, 2002) used in information retrieval. We remark that the user utility definition (3) is compatible with most natural ranking strategies in addition to top- $K$ ; we provide additional examples of more general ranking rules in Appendix A.1. Finally, the social welfare is defined as the sum of total user utilities and total creator utilities, minus the platform’s cost:

$$\begin{aligned}
 W(\mathbf{s}; \{r_{k,j}\}) &= \sum_{j=1}^m W_j(\mathbf{s}) + \sum_{i=1}^n u_i(\mathbf{s}) - \sum_{i=1}^n \sum_{j=1}^m u_{i,j} \\
 &= \sum_{j=1}^m W_j(\mathbf{s}) - \sum_{i=1}^n c_i(\mathbf{s}_i).
 \end{aligned} \tag{4}$$

Each specification of  $\{r_{k,j}\}$  determines a welfare metric  $W(\cdot, \{r_{k,j}\})$ . In most of our analysis, we assume that  $r_{k,j}$  can be measured and is known to the platform. However, we will later discuss scenarios where the platform only has blackbox access to  $W(\cdot, \{r_{k,j}\})$ , but not the individual values of  $r_{k,j}$ . To simplify our discussion in the following sections, we assume  $\{r_{k,j}\}$  is independent of the user index  $j$  and simply use  $r_k$  in place of  $r_{k,j}$ . Our results can also be generalized to  $r_{k,j}$  with dependency on  $j$ , up to more complex notations.

**Our research questions: creator incentive design.** Unlike previous works (Ben-Porat et al., 2019; Hron et al., 2022; Jagadeesan et al., 2022) that primarily focus on designing user-content matching mechanisms, we consider the design of a different “knob” to improve social welfare, i.e., creators’ rewarding scheme. Each rewarding mechanism  $M$  establishes a competitive environment among content creators, encapsulated by a  $C^3$  instance  $\mathcal{G}(\{\mathcal{S}_i\}, \{c_i\}, \mathcal{X}, \sigma, M, \{r_i\})$ . Our objective is to design mechanisms  $M$  that: 1. guarantee the existence of PNE, thereby ensuring a stable outcome, and 2. maximize social welfare at the PNE. In the upcoming sections, we first demonstrate why many existing rewarding mechanisms can fall short of achieving these goals, and then introduce our proposed solution as a remedy.

#### 4. The Fundamental Limit of Merit-based Monotone Mechanisms

In this section, we show an intrinsic limitation for a generic class of reward mechanisms commonly utilized in the practice. These reward schemes, employed by numerous platforms, exhibit common properties that can be summarized by the following definition.

**Definition 1 (Merit-based Monotone Mechanism ( $\mathcal{M}^3$ ))** *We say  $M$  is a merit-based monotone mechanism if for any relevance scores  $1 \geq \sigma_1 \geq \dots \geq \sigma_n \geq 0$ ,  $M$  satisfies the following properties:*

- *Merit-based:*
  - (Normality)  $M(0, \sigma_{-i}) = 0$ ,  $M(1, \{0, \dots, 0\}) > 0$ ,
  - (Fairness)  $M(\sigma_i, \sigma_{-i}) \geq M(\sigma_j, \sigma_{-j}), \forall i > j$ ,

– (Negative Externality)  $\forall i$ , if  $\sigma_{-i} \preceq \sigma'_{-i}$  ( $\sigma_j \leq \sigma'_j, \forall j \neq i$ ), then  $M(\sigma_i, \sigma_{-i}) \geq M(\sigma_i, \sigma'_{-i})$ .

- *Monotonicity*: the total rewards  $\sum_{i=1}^n M(\sigma_i, \sigma_{-i}) : [0, 1]^n \rightarrow \mathbb{R}_{\geq 0}$  is non-decreasing in  $\sigma_i$  for every  $i \in [n]$ .

In addition, we write  $M \in \mathcal{M}^3$  if  $M$  is a merit-based monotone mechanism with parameter  $n$ .

The two properties underpinning  $\mathcal{M}^3$  are quite intuitive. Firstly, the merit-based property consists of three natural sub-properties: 1. zero relevance content should receive zero reward, whereas the highest relevance content deserves a non-zero reward; 2. within the given pool of content with scores  $\{\sigma_i\}_{i \in [n]}$ , the higher relevance content should receive a higher reward; 3. any individual content’s reward does not increase when other creators improve their content relevance. Secondly, monotonicity means if any content creator  $i$  improves her relevance  $\sigma_i$ , the total rewards to all creators increase. This property is naturally satisfied by many widely adopted rewarding mechanisms because platforms in today’s industry typically reward creators proportionally to user engagement or satisfaction, the *total* of which is expected to increase as some creator’s content becomes more relevant.

Unsurprisingly, many popular rewarding mechanisms falls into the class of  $\mathcal{M}^3$ . For instances, the following two mechanisms defined over a descending score sequence  $\{\sigma_i\}$  are widely adopted in current industry practices for rewarding creators (Meta, 2022; Savy, 2019; TikTok, 2022; Youtube, 2023), both of which are in  $\mathcal{M}^3$ :

1. When players’ utilities are set to the total content exposure (Ben-Porat et al., 2019; Hron et al., 2022; Jagadeesan et al., 2022), we have  $M(\sigma_i, \sigma_{-i}) = \mathbb{I}[i \leq K] \frac{\exp(\beta^{-1}\sigma_i)}{\sum_{j=1}^K \exp(\beta^{-1}\sigma_j)}$ , with a temperature parameter  $\beta > 0$  controlling the spread of rewards.
2. When players’ utilities are set to the total user engagement (Yao et al., 2023), we have  $M(\sigma_i, \sigma_{-i}) = \mathbb{I}[i \leq K] \frac{\exp(\beta^{-1}\sigma_i)}{\sum_{j=1}^K \exp(\beta^{-1}\sigma_j)} \pi(\sigma_1, \dots, \sigma_n)$ , where  $\pi(\sigma_1, \dots, \sigma_n) = \beta \log \left( \sum_{j=1}^K \exp(\beta^{-1}\sigma_j) \right)$ .

Surprisingly, we show that *any* mechanism in  $\mathcal{M}^3$  may result in quite suboptimal welfare, even applied to some natural  $C^3$  game environment. Specifically, we abstract out the following representative subset of  $C^3$  instances, which capture the essence of many real-world situations, as outlined in the introduction section. We term this subclass of situations as *Trend v.s. Niche* (TvN) games.

**Definition 2 (TvN games)** Denote  $E = \{\mathbf{e}_1, \dots, \mathbf{e}_n\} \subset \mathbb{R}^n$  as the set of unit basis vectors in  $\mathbb{R}^n$ . Consider a user population  $\mathcal{X} = \{\mathbf{x}_j\}_{j=1}^{2n}$  such that  $\mathbf{x}_j = \mathbf{e}_1$ , for  $1 \leq j \leq n+1$ ,  $\mathbf{x}_{n+2} = \mathbf{e}_2, \dots, \mathbf{x}_{2n} = \mathbf{e}_n$ . All creators have zero costs and share the same action set  $\mathcal{S}_i = E$ . The relevance is measured by the inner product, i.e.,  $\sigma(\mathbf{s}, \mathbf{x}) = \mathbf{s}^\top \mathbf{x}$ . The attention discounting weights  $\{r_i\}$  is induced by a top- $K$  environment, i.e.,  $r_1 \geq \dots \geq r_K \geq r_{K+1} = \dots = r_n = 0$ . For any mechanism  $M$ , we call such a game instance  $\mathcal{G}(\{\mathcal{S}_i\}, \{c_i = 0\}, \mathcal{X}, \sigma, M, \{r_i\})$  a TvN game.

The TvN game models a scenario where the user population comprises multiple interest groups, each with orthogonal preference representations. In this game, the largest group consists of nearly half the population. Each content creator has the option to cater to one—and only one—user group. While this game is simple and stylized, it captures the essence of real-world user populations and the dilemmas faced by creators. Creators often find themselves at a crossroad: they must decide whether to pursue popular trends for a broader audience population, leading to intense competition, or focus on niche topics with a smaller audience and reduced competition. Our subsequent result shows that if the platform adopts  $\mathcal{M}^3$  in the TvN game, this tension of content creation turns out to be a curse in the sense that a unique PNE is achieved when all players opt for the same strategy — catering to the largest user group — and we quantify the social welfare loss at this PNE in the following.

**Theorem 1** *For any rewarding mechanism  $M \in \mathcal{M}^3$  applied to any TvN instance, we have*

1. *the resultant game admits a unique NE  $\mathbf{s}^*$ ;*
2. *the welfare of this NE is at most  $\frac{K}{K+1}$  fraction of the optimal welfare for large  $n$ . Formally,*

$$\frac{W(\mathbf{s}^*)}{\max_{\mathbf{s} \in \mathcal{S}} W(\mathbf{s})} \leq \frac{K}{K+1} + O\left(\frac{1}{n}\right). \quad (5)$$

The proof is in Appendix A.3, where we explicitly characterize both  $\mathbf{s}^*$  and the welfare maximizing strategy profile and calculate their difference in terms of welfare. It is important to note that the reciprocal of left-hand side of (5) is commonly known as the Price of Anarchy (PoA). This metric gauges the welfare loss at equilibrium compared to optimal welfare. (5) suggests that the PoA of  $\mathcal{G}$  under  $\mathcal{M}^3$  could be as significant as 1/2 for users who primarily care about the top relevant content, which is shown to be realistic given the diminishing attention spans of Internet users (Carr, 2020).

## 5. Backward Rewarding Mechanisms

It was surprising to discover that mechanisms in the generic  $\mathcal{M}^3$  class can experience a significant loss in welfare, even in natural environments. This prompts a reevaluation of rewarding mechanism design, especially for platforms where user attention is concentrated on the top few positions. Theorem 1 demonstrates an inherent incompatibility within the class of  $\mathcal{M}^3$  mechanisms when it comes to optimizing welfare. Thus, a compromise must be made between the merit-based condition and monotonicity, and our choice is the latter one. On one hand, any violation to the merit-based properties is challenging to justify as it undermines creators’ perceptions about the value of the relevance metric. If creators discover that highly relevant content can receive lower payoffs or no rewards despite being the most relevant, it can be detrimental to the platform’s reputation.. On the other hand, while an increase in a creator’s content relevance  $\sigma_i$  would naturally lead to an expected increase in his/her reward, it is generally unnecessary for the total rewards to increase as required by the monotonicity property. In fact, such non-monotonicity is widely observed in economic markets, e.g., monopoly vs duopoly markets. In the context of a monopoly market, one can think of a scenario where there is a high-quality producer and a low-quality producer,

each caters to their distinct consumer bases. In a circumstance where the low-quality producer elevates his/her production quality to transition the market into a duopoly, such an action would undoubtedly augment the producer’s profits. However, it would concurrently establish intensified competition with the high-quality producer, typically resulting in a marked decline in the latter’s profitability. This would subsequently result in a decrease in the overall profit (De Borger and Van Dender, 2006; Zanchettin, 2006).

To enhance welfare, it is crucial to incentivize content creators who predominantly target larger user groups to also produce content for smaller groups. However, the monotone property encourages creators to continuously increase their relevance to a user group, even when those users already have abundant options, resulting in diminishing welfare contributions. To address this, we introduce the class of Backward Rewarding Mechanisms (BRMs). The name of BRM suggests its essential characteristic: the reward for a specific creator- $i$  depends solely on their ranking and the relevance of content from creators ranked *lower* than  $i$ . The formal definition of BRM is provided below:

**Definition 3 (BRM and BRCM)** *We say  $M$  is a Backward Rewarding Mechanism (BRM) if for any relevance score sequence  $1 \geq \sigma_1 \geq \dots \geq \sigma_n \geq 0$ , there exists a sequence of Riemann integrable functions  $\{f_i(t) : [0, 1] \rightarrow \mathbb{R}_{\geq 0}\}_{i=1}^n$ ,  $f_1(t) \geq \dots \geq f_n(t)$  such that*

$$M(\sigma_i, \sigma_{-i}) = \sum_{k=i}^n \int_{\sigma_{k+1}}^{\sigma_k} f_k(t) dt, \quad (6)$$

where  $\sigma_{n+1} = 0$  and  $f_1(t) > 0, \forall t$ . We use  $BRM$  to denote the set of all BRMs with parameter  $n$ , and use  $M[f_1(t), \dots, f_n(t)]$  to denote an element  $M \in BRM$  when it is associated with  $\{f_i(t)\}_{i=1}^n$ .

In addition, we identify a subset  $BRCM \subset BRM$  which includes those  $M$  such that  $\{f_i(t) \equiv f_i\}$  are a set of constant functions. Clearly, any  $M \in BRCM$  can be parameterized by a  $n$ -dimensional point in the polytope  $\mathcal{F} = \{(f_1, \dots, f_n) | 1 \geq f_1 \geq \dots \geq f_n \geq 0\}$ .

Generally, the function  $f_i(\cdot)$  encapsulates the significance of the relevance score difference between the  $i$ -th and  $(i + 1)$ -th ranked content in contributing to the  $i$ -th ranked creator’s reward. The constraint  $f_1(t) \geq \dots \geq f_n(t)$  is necessary to satisfy merit-based properties, as shown in the proof of Proposition 1. The broad class of BRM offers granular control over creator incentives. Meanwhile, the subclass BRCM provides opportunities for parameterized optimization over welfare, which we will discuss in Section 5.2.

To get an better intuition of how BRM works, let us consider a special case  $M \in BRCM$  such that  $f_1 = \dots = f_K = 1$  and  $f_k = 0, k \geq K + 1$ . By the definition, any score sequence  $\sigma_1 \geq \dots \geq \sigma_n$  will be mapped to a reward sequence of  $(\sigma_1 - \sigma_{K+1}, \dots, \sigma_K - \sigma_{K+1}, 0, \dots, 0)$ . Consequently, the top- $K$  ranked creators will experience a significant reduction in rewards if the  $(K + 1)$ -th ranked creator increases its content relevance. This mechanism can deter an unnecessary concentration of creators on a specific strategy, as when the number of creators with high scores exceeds a certain threshold, even those ranked highly can receive a decreasing reward. This backward rewarding mechanism thus encourages diversity in content creation and mitigates the risk of oversaturation in any particular group of users.

Another notable special case within  $BRCM \in BRM$  is  $M^{SM} = M[1, \frac{1}{2}, \dots, \frac{1}{n}]$ , which coincides with the Shapley mediator proposed in (Ben-Porat and Tennenholtz, 2018). One



key feature of  $M^{SM}$  is that for any sequence  $1 \geq \sigma_1 \geq \dots \geq \sigma_n \geq 0$ , it holds that  $\sum_{i=1}^n M^{SM}(\sigma_i, \sigma_{-i}) = \sigma_1 \leq 1$ . This implies that the platform can avoid providing explicit incentives and merely implement these rewards as matching probabilities. However, to do so, it must accommodate the possibility of not matching a user with any creators, corresponding to a probability of  $1 - \sigma_1$ . Furthermore, it does not support the top- $K$  ranking strategy.

A more comprehensive understanding about the construction of BRM can be obtained through the lens of congestion games. As pointed out by [Monderer and Shapley \(1996\)](#), every finite potential game is isomorphic to a congestion game. Furthermore, the definition of  $M$  as outlined in (6) can be interpreted as the utility that creator  $i$  acquires from the following congestion game:

1. The set of congestible elements are given by the continuum  $E = \mathcal{X} \times [0, 1]$ , where each element  $(\mathbf{x}, t) \triangleq \mathbf{e} \in E$  corresponds to a user  $\mathbf{x}$  with satisfaction level  $t$ .
2. The  $n$  players are  $n$  content creators.
3. Each creator's pure action  $\mathbf{s}_i \in \mathcal{S}_i$  can be mapped to a subset of  $E$  in the following way: the action  $\mathbf{s}_i$  determines the relevance score  $\sigma(\mathbf{s}_i, \mathbf{x})$  over each  $\mathbf{x} \in \mathcal{X}$ , and then  $\mathbf{s}_i$  is mapped to a subset  $\{(\mathbf{x}, t) | \mathbf{x} \in \mathcal{X}, t \in [0, \sigma(\mathbf{s}_i, \mathbf{x})]\} \triangleq S_i \subseteq E$ .
4. For each element  $\mathbf{e}$  and a vector of strategies  $(S_1, \dots, S_n)$ , the load of element  $\mathbf{e}$  is defined as  $x_{\mathbf{e}} = \#\{i : \mathbf{e} \in S_i\}$ , i.e., the number of players who occupy  $\mathbf{e}$ .
5. For each element  $\mathbf{e}$ , there is a payoff function  $d_{\mathbf{e}} : \mathbb{N} \rightarrow \mathbb{R}_{\geq 0}$  that only depends on the load of  $\mathbf{e}$ .
6. For any joint strategy  $(S_1, \dots, S_n)$ , the utility of player  $i$  is given by  $\sum_{\mathbf{e} \in S_i} d_{\mathbf{e}}(x_{\mathbf{e}})$ , i.e., the sum of reward he/she collects from all occupied elements. For each occupied element  $\mathbf{e}$ , the reward is determined by its ‘‘congestion’’ level  $x_{\mathbf{e}}$ , which is characterized by the payoff function  $d_{\mathbf{e}}$ .

To better understand the constructed congestion game and the utility definition given in (6), we can consider each element in  $E$  (i.e., a user with a particular satisfaction level) as an atomic ‘‘resource’’. Each production strategy adopted by an individual creator can be thought of as occupying a subset of these resources. Given a fixed strategy profile, the load of  $\mathbf{e} = (\mathbf{x}, t)$  is determined by the number of creators who achieve a relevance score exceeding  $t$  for user  $\mathbf{x}$ , thereby linking the ranking of each creator in the relevance score sequence for  $\mathbf{x}$ . Consequently, we can reformulate the utility for a creator who is ranked in the  $i$ -th position for user  $\mathbf{x}$  as

$$\begin{aligned}
 \sum_{\mathbf{e} \in S_i} d_{\mathbf{e}}(x_{\mathbf{e}}) &= \sum_{t \in [0, \sigma(\mathbf{s}_i, \mathbf{x})]} d_t(x_{\mathbf{e}}) = \sum_{k=i}^n \sum_{t \in [\sigma(\mathbf{s}_{k+1}, \mathbf{x}), \sigma(\mathbf{s}_k, \mathbf{x})]} d_t(x_{\mathbf{e}}) \\
 &= \sum_{k=i}^n \sum_{t \in [\sigma(\mathbf{s}_{k+1}, \mathbf{x}), \sigma(\mathbf{s}_k, \mathbf{x})]} d_t(k) \\
 &\triangleq \sum_{k=i}^n \int_{\sigma_{k+1}}^{\sigma_k} f_k(t) dt.
 \end{aligned} \tag{7}$$

(7) holds because for any resource  $e = (\mathbf{x}, t)$  such that  $t \in [\sigma(\mathbf{s}_{k+1}, \mathbf{x}), \sigma(\mathbf{s}_k, \mathbf{x})]$ , the load of  $e$  is exactly given by  $k$ . As a result, by letting  $f_k(t) = d_t(k)$ , we recover the utility function defined in (6), where the value of function  $f_i(t)$  at  $t = t_0$  indicates the atomic reward for each creator if his/her strategy covers “resource”  $(\mathbf{x}, t_0)$ , given that there are exactly  $i$  creators occupy  $(\mathbf{x}, t_0)$ . This relationship also rationalizes why it is natural to assume that  $f_1 \geq \dots \geq f_n$ : as an increase in competition for the same resource from multiple creators should correspondingly reduce the return that can be accrued from that resource.

### 5.1 Properties of BRM

While the class of BRM might appear abstract at the first glance, one can confirm that it preserves all merit-based properties, making it a natural class of rewarding mechanisms. Nevertheless, in order to secure a better welfare guarantee, the monotonicity is dropped, as characterized in the following:

**Proposition 1** *Any  $M \in \text{BRM}$  is merit-based but not necessarily monotone.*

The detailed proof is provided in the Appendix A.4. Next we establish formal characterizations about the welfare guarantee of BRM. First, we show that any  $C^3$  game under BRM possesses a PNE because it is a potential game (Monderer and Shapley, 1996). A strategic game is called a potential game if there exists a function  $P : \prod_i \mathcal{S}_i \rightarrow \mathbb{R}$  such that for any strategy profile  $\mathbf{s} = (\mathbf{s}_1, \dots, \mathbf{s}_n)$ , any player- $i$  and strategy  $\mathbf{s}'_i \in \mathcal{S}_i$ , whenever player- $i$  deviates from  $\mathbf{s}_i$  to  $\mathbf{s}'_i$ , the change of his/her utility function is equal to the change of  $P$ , i.e.,

$$P(\mathbf{s}'_i, \mathbf{s}_{-i}) - P(\mathbf{s}_i, \mathbf{s}_{-i}) = u_i(\mathbf{s}'_i, \mathbf{s}_{-i}) - u_i(\mathbf{s}_i, \mathbf{s}_{-i}).$$

This leads us to the main result of this section:

**Theorem 2** *Consider any  $C^3$  game  $\mathcal{G}(\{\mathcal{S}_i\}, \{c_i\}, \mathcal{X}, \sigma, M, \{r_i\})$ .*

1. *The game induced by any  $M \in \text{BRM}$  is a potential game and thus has a PNE.*
2. *Specifically, if the mechanism  $M = M[r_1, \dots, r_n] \in \text{BRCM} \in \text{BRM}$ , then the potential function is precisely the welfare function, i.e.,  $W(\mathbf{s}) = P(\mathbf{s}; M)$ .*

The proof is in Appendix A.5, where we construct its potential function explicitly. According to Monderer and Shapley (1996), we also conclude: 1. the maximizers of  $P$  are the PNEs of  $\mathcal{G}$ , and 2. if the evolution of creators’ strategic behavior follows a better response dynamics (i.e., in each iteration, an arbitrary creator deviates to a strategy that increases his/her utility), their joint strategy profile converges to a PNE.

Theorem 2 suggests another appealing property of BRM: one can always select an  $M$  within BRM to align the potential function with the welfare metric, which can be simply achieved by setting each  $f_i$  identical to  $r_i$ . Consequently, any best response dynamic among creators not only converges to a PNE but also generates a strictly increasing sequence of  $W$ , thus ensuring at least a local maximizer of  $W$ . Denote the set of PNEs of  $\mathcal{G}$  as  $\text{PNE}(\mathcal{G})$ . When  $\text{PNE}(\mathcal{G})$  coincides with the global maximizers of its potential function, i.e.,  $\text{PNE}(\mathcal{G}) = \text{argmax}_{\mathbf{s}} P(\mathbf{s}; M)$ , we conclude that any PNE of  $\mathcal{G}$  also maximizes the

welfare  $W$ . The following corollary indicates that such an optimistic situation occurs in TvN games, providing a stark contrast to the findings in Theorem 1.

**Corollary 1** *For any TvN instance  $\mathcal{G}$ , there exists  $M \in \text{BRCM}$  such that any PNE  $\mathbf{s}^* \in \text{PNE}(\mathcal{G})$  attains the optimal  $W$ , i.e.,*

$$\max_{\mathbf{s} \in \mathcal{S}} W(\mathbf{s}) = W(\mathbf{s}^*). \quad (8)$$

The proof is in Appendix A.6. Despite the promising results presented in Corollary 1, it remains uncertain whether the strong welfare guarantee for TvN can be extended to the entire class of  $C^3$ . This uncertainty arises because, in general, we only know that  $\text{argmax}_{\mathbf{s}} P(\mathbf{s}; M) \subseteq \text{PNE}(\mathcal{G})$ . However, [Ui \(2001\)](#) noted that the subset of PNEs corresponding to  $\text{argmax}_{\mathbf{s}} P(\mathbf{s}; M)$  in any potential game is robust in the following sense: in an incomplete information relaxation of  $\mathcal{G}$ , where each creator possesses a private type and must take actions based on their beliefs about other creators' types, they will play the strategies in  $\text{argmax}_{\mathbf{s}} P(\mathbf{s}; M)$  at the Bayesian Nash equilibrium with a probability close to 1. This insight suggests that BRM has the potential to achieve optimal social welfare in real-world scenarios. While we lack a conclusive theoretical determination of whether BRM can attain globally optimal welfare, our empirical study in Section 6 consistently reveals that BRM outperforms baseline mechanisms in  $\mathcal{M}^3$  in terms of improving welfare.

## 5.2 Welfare Optimization within BRCM

Theorem 2 suggests that, provided the parameters  $\{r_i\}$  are known, the platform can select a mechanism within BRCM with a better welfare guarantee. However, in many practical scenarios, the platform may not have access to the exact values of  $\{r_i\}$  but can only evaluate the resulting welfare metric using certain aggregated statistics. This presents a challenge as it may not be analytically feasible to pinpoint the optimal  $M$  as suggested by Theorem 2. In these cases, although perfect alignment between the potential function  $P$  and social welfare  $W$  may not be feasible, we can still find a mechanism that approximates the maximizer of  $W$  in creator competition. This leads us to formulate the following bi-level optimization problem:

$$\max_{M \in \text{BRCM}} W(\mathbf{s}^*(M)) \quad (9)$$

$$\text{s.t., } \mathbf{s}^*(M) = \underset{\mathbf{s}}{\text{argmax}} P(\mathbf{s}; M) \quad (10)$$

In problem (9), the inner optimization (10) is executed by creators: for any given  $M$ , we have justified that the creators' strategies is very likely to settle at a PNE  $\mathbf{s}^*(M)$  that corresponds to a maximizer of  $P(\mathbf{s}; M)$ . However, the exact solution to the inner problem is neither analytically solvable by the platform (owing to the combinatorial nature of  $P$ ) nor observable from real-world feedback (due to creators' potentially long feedback cycles). Therefore, we propose to approximate its solution by simulating creators' strategic response sequences, on top of which we solve (9). The simulator is given in Algorithm 1, which functions as follows: at each step, a random creator  $i$  first selects a random improvement direction  $\mathbf{g}_i$ . If creator  $i$  discovers that adjusting her strategy in this direction yields a higher utility, she

---

**Algorithm 1 (simStra)** Simulate content creators' strategy evolving dynamic
 

---

**Input:** Time horizon  $T$ , learning rate  $\eta$ , utility function strategy set  $(u_i(\mathbf{s}), \mathcal{S}_i)$  for each player, current mechanism  $M[\mathbf{f}]$  parameterized by  $\mathbf{f}$ .

**Initialization:** Initial strategy profile  $\mathbf{s}^{(0)} = (\mathbf{s}_1^{(0)}, \dots, \mathbf{s}_n^{(0)})$ .

**for**  $t = 0$  **to**  $T - 1$  **do**

Generate  $i \in [n]$  and  $\mathbf{g}_i \in \mathbb{S}^{d-1}$  uniformly at random.

**if**  $u_i(\mathbf{s}_i^{(t)} + \eta \mathbf{g}_i, \mathbf{s}_{-i}^{(t)}) \geq u_i(\mathbf{s}^{(t)})$  **then**

$\mathbf{s}_i^{(t+\frac{1}{2})} = \mathbf{s}_i^{(t)} + \eta \mathbf{g}_i$ .

Find  $\mathbf{s}_i^{(t+1)}$  as the projection of  $\mathbf{s}_i^{(t+\frac{1}{2})}$  in  $\mathcal{S}_i$ .

**else**

$\mathbf{s}_i^{(t+1)} = \mathbf{s}_i^{(t)}$

**Output:**  $\mathbf{s}^{(T)}$ .

---

updates her strategy along  $\mathbf{g}_i$ ; otherwise, she retains her current strategy. This approach is designed to more closely mimic real-world scenarios where content creators may not have full access to their utility functions, but instead have to perceive them as black boxes. While they may aim to optimize their responses to the current incentive mechanism, identifying a new strategy that definitively increases their utilities can be challenging. Therefore, we model their strategy evolution as a trial-and-exploration process. Algorithm 1 is a variant of better response dynamics, incorporating randomness and practical considerations to more accurately emulate creator behavior, and will be employed as a subroutine in Algorithm 2. We should note that the specifics of the simulator are not critical to our proposed solution: the optimizer can select any equilibrium-finding dynamic to replace our Algorithm 1, as long as it is believed to better represent creators' responses in reality.

Another challenge of solving (9) lies in the presence of ranking operations in  $W$ , which makes it non-differentiable in  $\mathbf{s}$  and renders first-order optimization techniques ineffective. Consequently, we resort to coordinate update and apply finite differences to estimate the ascending direction of  $W$  with respect to each  $M$  parameterized by  $\mathbf{f} = (f_1, \dots, f_n) \in \mathcal{F}$ . Our proposed optimization algorithm for solving (9) is presented in Algorithm 2, which is structured into  $L_1$  epochs. At the beginning of each epoch, the optimizer randomly perturbs the current  $M$  along a direction within the feasible polytope and simulates creators' responses for  $L_2$  steps using Algorithm 1. Welfare is re-evaluated at the end of this epoch, and the perturbation on  $M$  is adopted if it results in a welfare increase.

## 6. Experiments

To validate our theoretical findings and demonstrate the efficacy of Algorithm 2, we simulate the strategic behavior of content creators and compare the evolution of social welfare under various mechanisms. These include Algorithm 2 and several baselines from both the  $\mathcal{M}^3$  and BRCM classes.

---

**Algorithm 2** Optimize  $W$  in BRCM
 

---

**Input:** Time horizon  $T = L_1 L_2$ , learning rate  $\eta_1, \eta_2$ ,  $(u_i(\mathbf{s}), \mathcal{S}_i)$  for each creator.

**Initialization:** Unit basis  $\{\mathbf{e}_i\}_{i=1}^n$  in  $\mathbb{R}^n$ , initial strategy profile  $\mathbf{s}^{(0)} = (\mathbf{s}_1^{(0)}, \dots, \mathbf{s}_n^{(0)})$ , initial parameter  $\mathbf{f}^{(0)} = (f_1^{(0)}, \dots, f_n^{(0)}) \in \mathcal{F}$  and mechanism  $M[\mathbf{f}^{(0)}]$ .

**for**  $t = 0$  **to**  $L_1 - 1$  **do**

Generate  $i \in [n]$  and  $\mathbf{g}_i \in \{-\mathbf{e}_i, \mathbf{e}_i\}$  uniformly at random.

Update  $\mathbf{f}_i^{(t+\frac{1}{2})}$  as the projection of  $\mathbf{f}_i^{(t)} + \eta_1 \mathbf{g}_i$  on  $\mathcal{F}$ .

Simulate  $\mathbf{s}^{(t+1)} = \text{simStra}(\mathbf{s}^{(t)}; L_2, \eta_2, \{\mathbf{u}_i, \mathcal{S}_i\}_{i=1}^n, M[\mathbf{f}^{(t+\frac{1}{2})}])$ . // Implemented by Algo. 1

**if**  $W(\mathbf{s}^{(t+1)}) > W(\mathbf{s}^{(t)})$  **then**

$\mathbf{f}^{(t+1)} = \mathbf{f}^{(t+\frac{1}{2})}$ .

**else**

$\mathbf{f}^{(t+1)} = \mathbf{f}^{(t)}$ .

---

### 6.1 Specification of Environments

We conduct simulations on game instances  $\mathcal{G}(\{\mathcal{S}_i\}, \{\mathbf{c}_i\}, \mathcal{X}, \sigma, M, \{r_i\})$  constructed from synthetic data and MovieLens-1m dataset (Harper and Konstan, 2015).

**Game instances constructed from synthetic dataset** For the synthetic data, we first generate the user population  $\mathcal{X}$  as follows: we fix the embedding dimension  $d$  and randomly sample  $Y$  cluster centers, denoted as  $\mathbf{c}_1, \dots, \mathbf{c}_Y$ , on the unit sphere  $\mathbb{S}^{d-1}$ . For each center  $\mathbf{c}_i$ , we generate users belonging to cluster- $i$  by first independently sampling from a Gaussian distribution  $\tilde{\mathbf{x}} \sim \mathcal{N}(\mathbf{c}_i, v^2 I_d)$ , and then normalize it to  $\mathbb{S}^{d-1}$ , i.e.,  $\mathbf{x} = \tilde{\mathbf{x}} / \|\tilde{\mathbf{x}}\|_2$ . The sizes of the  $Y$  user clusters are denoted by a vector  $\mathbf{z} = (z_1, \dots, z_Y)$ . In this manner, we generate a population  $\mathcal{X} = \cup_{i=1}^Y \mathcal{X}_i$  with size  $m = \sum_{i=1}^Y z_i$ . The number of creators is set to  $n = 10$ , with action sets  $\mathcal{S}_i = \mathbb{S}^{d-1}$ . The relevance function  $\sigma(\mathbf{x}, \mathbf{s}) = \frac{1}{2}(\mathbf{s}^\top \mathbf{x} + 1)$  is the shifted inner product such that its range is exactly  $[0, 1]$ .  $\{r_i\}_{i=1}^n$  is set to  $\{\frac{1}{\log_2(2)}, \frac{1}{\log_2(3)}, \frac{1}{\log_2(4)}, \frac{1}{\log_2(5)}, \frac{1}{\log_2(6)}, 0, \dots, 0\}$ . These synthetic datasets simulate situations where content creators compete over a clustered user preference distribution.

We consider two types of game instances, denoted  $\mathcal{G}_1$  and  $\mathcal{G}_2$ , distinguished by their cost functions:

1. In  $\mathcal{G}_1$ , creators have zero cost and their initial strategies are set to the center of the largest user group. This environment models the situation where the social welfare is already trapped at suboptimal due to its unbalanced content distribution. We aim to evaluate which mechanism is most effective in assisting the platform to escape from such a suboptimal state.
2. In  $\mathcal{G}_2$ , creators have non-trivial cost functions  $c_i = 0.5\|\mathbf{s}_i - \bar{\mathbf{s}}_i\|_2^2$ , where the cost center  $\bar{\mathbf{s}}_i$  is randomly sampled on  $\mathbb{S}^{d-1}$ . Their initial strategies are set to the corresponding cost centers, i.e., all creators start with strategies that minimize their costs. This environment models a ‘‘cold start’’ situation for creators: they do not have any preference nor knowledge about the user population and gradually learn about the environment under the platform’s incentivizing mechanism.

In our experiment, we set  $(d, v, Y, m) = (10, 0.3, 8, 52)$  and the cluster sizes  $\mathbf{z} = (20, 10, 8, 5, 3, 3, 2, 1)$ . The 8 clusters are divided into 3 groups  $((20), (10, 8), (5, 3, 3, 2, 1))$ , namely group-1,2,3, corresponding to the majority, minority, and niche groups.

**Game instances constructed from MovieLens-1m dataset** We use deep matrix factorization (Fan and Cheng, 2018) to train user and movie embeddings predicting movie ratings from 1 to 5 and use them to construct the user population  $\mathcal{X}$  and creators’ strategy set  $\{\mathcal{S}_i\}$ . The dataset contains 6040 users and 3883 movies in total, and the embedding dimension is set to  $d = 32$ . To validate the quality of the trained representation, we first performed a 5-fold cross-validation and obtain an averaged RMSE = 0.739 on the test sets, then train the user/item embeddings with the complete dataset. To construct a more challenging environment for creators, we avoid using movies that are excessively popular and highly rated or users who are overly active and give high ratings to most movies. This ensures that the strategy of “producing popular content for the majority of active users” does not become a dominant strategy under any rewarding mechanism. Thus, we filtered out users and movies who have more than 500 predicted ratings higher than 4. After the filtering, we have  $m = |\mathcal{X}| = 2550$  and  $|\mathcal{S}_i| = 1783, \forall i \in [n]$ . The remaining users are used as the user population  $\mathcal{X}$ , and remaining movies become the action set  $\{\mathcal{S}_i\}$  for  $n = 10$  creators. To normalize the relevance score to  $[0, 1]$ , we set  $\sigma(\mathbf{s}, \mathbf{x}) = \text{clip}(\langle \mathbf{s}, \mathbf{x} \rangle / 2.5 - 1, 0, 1)$ .  $\{r_i\}_{i=1}^n$  is set to  $\{\frac{1}{\log_2(2)}, \frac{1}{\log_2(3)}, \frac{1}{\log_2(4)}, \frac{1}{\log_2(5)}, \frac{1}{\log_2(6)}, 0, \dots, 0\}$ . We also consider two types of game instances, namely  $\mathcal{G}_1$  and  $\mathcal{G}_2$ , as we elaborated on in the construction of synthetic dataset. Specifically, in  $\mathcal{G}_1$  creators’ initial strategies are set to the most popular movie among all users (i.e., the movie that enjoys the highest average rating among  $\mathcal{X}$ ) and the cost functions are set to be zero. In  $\mathcal{G}_2$ , we set creators’ cost functions to  $c_i = 10\|\mathbf{s}_i - \bar{\mathbf{s}}_i\|_2^2$  and let creator  $i$  start at the cost center  $\bar{\mathbf{s}}_i$ .  $\{\bar{\mathbf{s}}_i\}_{i=1}^n$  are sampled at random from all the movies.

## 6.2 Algorithm and Baseline Mechanisms

We simulate the welfare curve produced by Algorithm 2 alongside five baseline mechanisms below.

1.  $\text{BRCM}_{opt}$ : This refers to the dynamic mechanism realized by optimization Algorithm 2. The starting point is set to  $\mathbf{f}^{(0)} = (1, 1, 1, 1, 1, 0, \dots, 0)$ . For synthetic environment, the parameters are set to  $T = 1000, L_1 = 200, L_2 = 5, \eta_1 = \eta_2 = 0.1$  while  $T = 500, L_1 = 100, L_2 = 5, \eta_1 = 0.5, \eta_2 = 0.1$  for the MovieLens environment.
2.  $\text{BRCM}^*$ : This denotes the theoretically optimal mechanism within BRCM, as indicated by Theorem 2. The corresponding parameters of  $M$  are derived based on the knowledge of  $\{r_i\}_{i=1}^n$ .
3.  $\text{BRCM}_1$ :  $\text{BRCM}_1 = M[1, \frac{1}{2}, \frac{1}{3}, \frac{1}{4}, \frac{1}{5}, 0, \dots, 0] \in \text{BRCM}$ . This baseline aims to assess the impact of deviation from the theoretically optimal mechanism on the result.
4.  $M^3(0)$ : This mechanism assigns each content creator a reward equal to the relevance score, i.e.,  $M(\sigma_i, \sigma_{-i}) = \sigma_i$ . It is obvious that this mechanism belongs to the  $\mathcal{M}^3$  class and is therefore denoted as  $M^3(0)$ . Under  $M^3(0)$ , each creator’s strategy does not affect other creators’ rewards at all, and thus every creator will be inclined to match the largest

user group as much as their cost allows. This mechanism acts as a reference to indicate the worst possible scenario.

5.  $M^3(expo.)$ : The mechanism based on exposure, defined in Section 4 with  $K = 5, \beta = 0.05$ .
6.  $M^3(enga.)$ : The mechanism based on engagement, defined in Section 4 with  $K = 5, \beta = 0.05$ .

### 6.3 Results

We let creators play  $\mathcal{G}_1$  and  $\mathcal{G}_2$  repeatedly under mechanisms specified in Section 6.2 and record the social welfare and average group/user utility distribution at the end of simulations with Algorithm 1. The results under two environments are shown in Figure 1 and 2, respectively.

**Simulation based on synthetic dataset** As illustrated in Figure 1a, BRCM family consistently outperformed  $\mathcal{M}^3$ . As anticipated,  $M^3(0)$  does little to enhance social welfare when creators have already primarily focused on the most populous user group. The  $M^3(expo.)$  and  $M^3(enga.)$  mechanisms demonstrate a notable improvement over  $M^3(0)$  as they instigate a competitive environment for creators striving to reach the top- $K$  positions. Nevertheless, they still do not perform as effectively as  $BRCM_1$ , even though  $BRCM_1$ 's parameter deviates from the theoretically optimal one. Within the BRCMs,  $BRCM_{opt}$  exhibits remarkable performance and even surpasses the theoretically optimal instance  $BRCM^*$ . One possible explanation for the empirical sub-optimality of  $BRCM^*$  is the stochastic nature of creators' response dynamics, which might prevent the convergence to PNE associated with the maximum welfare without sufficient optimization. This observation underscores the importance of Algorithm 2, as it empowers the platform to pinpoint an empirically optimal mechanism in more practical scenarios. As depicted in Figure 1b, the primary source of advantage stems from the increased utility among minority and niche user groups: compared to  $M^3(expo.)$  and  $M^3(enga.)$ , BRCM class results in higher average utility for groups 2 and 3 while preserving overall satisfaction for group-1.

Similar observations can be made for  $\mathcal{G}_2$ . However, it is worth noting that  $BRCM_{opt}$  underperformed slightly in comparison to  $BRCM^*$  as shown in Figure 1c. Despite this, the BRCM class of mechanisms continued to significantly surpass those in  $\mathcal{M}^3$ . Figure 1d further highlights that BRCM mechanisms lead to a more equitable distribution of average user utility across different user groups. Nevertheless, the gap in comparison becomes less pronounced, which is probably due to the existence of costs. Creators burdened with such costs are inherently inclined towards serving specific user groups, making them less susceptible to the influence of platform's incentives.

**Simulation based on MovieLens-1m dataset** Additional results obtained from MovieLens-1m dataset reinforce our findings. In both the  $\mathcal{G}_1$  and  $\mathcal{G}_2$  environments, the BRCM family continues to outperform  $\mathcal{M}^3$  overall. Specifically,  $BRCM_{opt}$ ,  $BRCM_1$ , and  $BRCM^*$  consistently demonstrate strong performance in social welfare, highlighting the robustness of BRCM across different environments. When creators initially adopt the most popular strategy in  $\mathcal{G}_1$ ,  $M^3(0)$  does not yield any improvement since no creator would change their strategy in such a situation under  $M^3(0)$ . In the case of  $\mathcal{G}_2$ , the advantage of BRCM over  $\mathcal{M}^3$

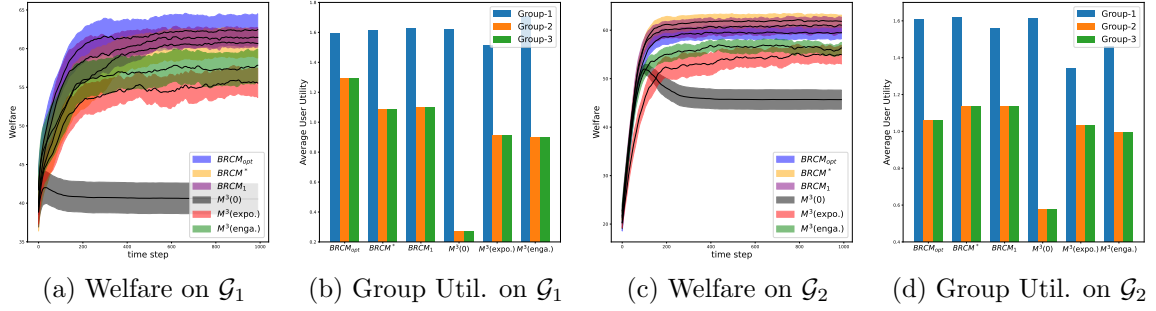


Figure 1: Social welfare curve and average user utilities per group. Error bars represent half standard deviation range ( $0.5\sigma$ ), and are generated from simulations on 10 randomly sampled game instances.

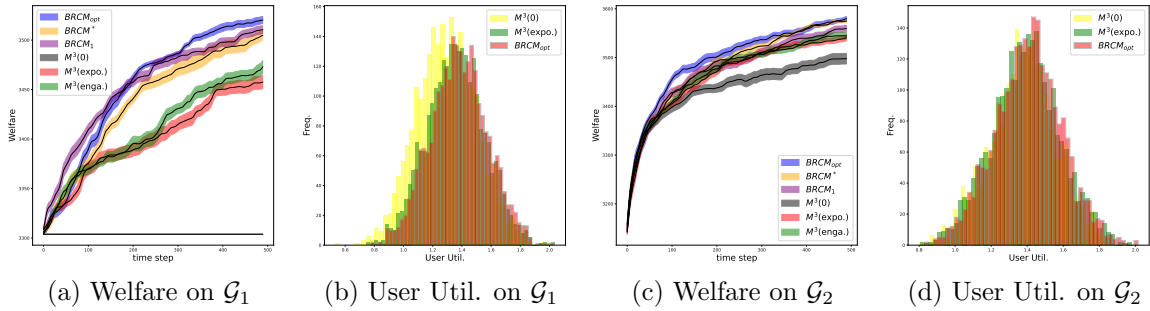


Figure 2: Social welfare curve and average user utility distributions under two different environments. Error bars represent 0.2 standard deviation range, and they are generated from 10 independent runs. Game instances are generated from MovieLens-1m dataset.

diminishes slightly, which aligns with our observations from the synthetic dataset. The main reason is that the cost function discourages creators to deviate from their default strategies. Additionally, Figure 2b provides further evidence that the welfare gain achieved by BRCM arises from enhanced utility for a wider range of users.

## 7. Conclusion

Our work reveals an intrinsic limitation of the monotone reward principle, widely used by contemporary online content recommendation platforms to incentivize content creators, in optimizing social welfare. As a rescue, we introduce BRM, a novel class of reward mechanisms with several key advantages. First, BRM ensures a stable equilibrium in content creator competition, thereby fostering a consistent and sustainable content creation environment. Second, BRM can guide content creators' strategic responses towards optimizing social welfare, providing at least a local optimum for any given welfare metric. Finally, BRM offers a parameterized subspace that allows the platform to empirically optimize social welfare, enhancing platform performance dynamically.

For future work, we identify two potential directions. From a theoretical standpoint, it would be intriguing to ascertain whether a stronger welfare guarantee for BRM could be



established when the scoring function is equipped with certain simple structures, e.g., dot product. On the empirical side, we look for developments of our suggested mechanism by addressing some practical considerations. For instance, how can we enhance the robustness of BRM to account for the estimation noise in relevance scores? And how can a platform optimize welfare subject to budget constraints? Deeper insights into these questions could significantly enhance our understanding of the rapidly evolving online content ecosystems.

## References

- Omer Ben-Porat and Moshe Tennenholtz. Shapley facility location games. In *International Conference on Web and Internet Economics*, pages 58–73. Springer, 2017.
- Omer Ben-Porat and Moshe Tennenholtz. A game-theoretic approach to recommendation systems with strategic content providers. *Advances in Neural Information Processing Systems*, 31, 2018.
- Omer Ben-Porat, Gregory Goren, Itay Rosenberg, and Moshe Tennenholtz. From recommendation systems to facility location games. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 1772–1779, 2019.
- Jesús Bobadilla, Fernando Ortega, Antonio Hernando, and Abraham Gutiérrez. Recommender systems survey. *Knowledge-based systems*, 46:109–132, 2013.
- Nicholas Carr. *The shallows: What the Internet is doing to our brains*. WW Norton & Company, 2020.
- Bruno De Borger and Kurt Van Dender. Prices, capacities and service levels in a congestible bertrand duopoly. *Journal of Urban Economics*, 60(2):264–283, 2006.
- Jicong Fan and Jieyu Cheng. Matrix completion by deep matrix factorization. *Neural Networks*, 98:34–41, 2018.
- Daniel Fleder and Kartik Hosanagar. Blockbuster culture’s next rise or fall: The impact of recommender systems on sales diversity. *Management science*, 55(5):697–712, 2009.
- Angela Glotfelter. Algorithmic circulation: how content creators navigate the effects of algorithms on their work. *Computers and composition*, 54:102521, 2019.
- F Maxwell Harper and Joseph A Konstan. The movielens datasets: History and context. *Acm transactions on interactive intelligent systems (tiis)*, 5(4):1–19, 2015.
- Thomas Hodgson. Spotify and the democratisation of music. *Popular Music*, 40(1):1–17, 2021.
- Jiri Hron, Karl Krauth, Michael I Jordan, Niki Kilbertus, and Sarah Dean. Modeling content creator incentives on algorithm-curated platforms. *arXiv preprint arXiv:2206.13102*, 2022.
- Meena Jagadeesan, Nikhil Garg, and Jacob Steinhardt. Supply-side equilibria in recommender systems. *arXiv preprint arXiv:2206.13489*, 2022.

- Kalervo Järvelin and Jaana Kekäläinen. Cumulated gain-based evaluation of ir techniques. *ACM Transactions on Information Systems (TOIS)*, 20(4):422–446, 2002.
- Meta. Meta is experimenting with new monetization options for creators, 2022. <https://www.digitalinformationworld.com/2022/03/meta-is-experimenting-with-new.html>.
- Dov Monderer and Lloyd S Shapley. Potential games. *Games and economic behavior*, 14(1):124–143, 1996.
- Kun Qian and Sanjay Jain. Digital content creation: An analysis of the impact of recommendation systems. *Available at SSRN 4311562*, 2022.
- Savy. Will the new youtube algorithm impact your content?, 2019. <https://savyagency.com/new-youtube-algorithm/>.
- TikTok. What is the tiktok creator fund? here’s how to join + start making money, 2022. <https://www.backstage.com/magazine/article/tiktok-creator-fund-explained-how-to-join-75090/>.
- Takashi Ui. Robust equilibria of potential games. *Econometrica*, 69(5):1373–1380, 2001.
- Fan Yao, Chuanhao Li, Denis Nekipelov, Hongning Wang, and Haifeng Xu. How bad is top- $k$  recommendation under competing content creators? In *International Conference on Machine Learning*. PMLR, 2023.
- Youtube. Youtube partner program overview & eligibility, 2023. <https://support.google.com/youtube/answer/72851>.
- Piercarlo Zanchettin. Differentiated duopoly with asymmetric costs. *Journal of Economics & Management Strategy*, 15(4):999–1015, 2006.

## Appendix A. Supplementary Material

### A.1 Additional Examples of User Utility Function

For simplicity of notations we always assume  $\sigma_1 \geq \dots \geq \sigma_n$ . As discussed in Section 3, if the platform presents the top- $K$  ranked content in terms of their relevance quality, user  $j$ 's utility function has the following form:

$$W_j(\mathbf{s}) = \sum_{k=1}^n r_k \sigma_k, \quad (11)$$

where  $\sigma_k = \sigma(\mathbf{s}_k, \mathbf{x}_j)$  is the relevance score between user  $j$  and content creator ranked at the  $k$ -th position, and  $\{r_k\}_{k=1}^n$  are user- $j$ 's ‘‘attention’’ over the  $k$ -th ranked content such that  $r_k = 0, k \geq K + 1$ .

It is worth noting that our user utility model is compatible with various matching strategies. In this regard, we provide additional examples that incorporate a modified version of the top- $K$  approach, taking into account considerations of advertised content. For instance, let's consider a scenario where  $K = 5$  and the platform intends to promote the content originally ranked at position 6 to position 2 with probability  $p \in (0, 1)$ . Consequently, the resulting utility function can be expressed as follows:

$$\begin{aligned} \tilde{W}_j(\mathbf{s}) &= p(r_1\sigma_1 + r_2\sigma_6 + r_3\sigma_2 + r_4\sigma_3 + r_5\sigma_4) + (1-p)(r_1\sigma_1 + r_2\sigma_2 + r_3\sigma_3 + r_4\sigma_4 + r_5\sigma_5) \\ &= r_1\sigma_1 + [pr_3 + (1-p)r_2]\sigma_2 + [pr_4 + (1-p)r_3]\sigma_3 + [pr_5 + (1-p)r_4]\sigma_4 + (1-p)r_5\sigma_5 + pr_2\sigma_6 \\ &\triangleq \sum_{k=1}^n \tilde{r}_k \sigma_k. \end{aligned}$$

This example shows that user utility function under any position-based perturbation of top- $K$  ranking can be expressed in the form of (11), and in general the values of  $r_k, k > K$  can be non-zero.

### A.2 Examples of $\mathcal{M}^3$

In this section we formally justify that the two examples given in Section 4 belong to the class of  $\mathcal{M}^3$ .

1. When the creators' utilities are set to the total content exposure (Ben-Porat et al., 2019; Hron et al., 2022; Jagadeesan et al., 2022), we have  $M(\sigma_i, \sigma_{-i}) = \mathbb{I}[i \leq K] \frac{\exp(\beta^{-1}\sigma_i)}{\sum_{j=1}^K \exp(\beta^{-1}\sigma_j)}$ , with a temperature parameter  $\beta > 0$  controlling the spread of rewards.

The validity of three merit-based properties are straightforward. In terms of monotonicity, we have  $\sum_{i=1}^n M(\sigma_i, \sigma_{-i}) = 1$  which is a constant and thus monotone.

2. When the creators' utilities are set to the total user engagement (Yao et al., 2023), we have  $M(\sigma_i, \sigma_{-i}) = \mathbb{I}[i \leq K] \frac{\exp(\beta^{-1}\sigma_i)}{\sum_{j=1}^K \exp(\beta^{-1}\sigma_j)} \pi(\sigma_1, \dots, \sigma_n)$ , where  $\pi(\sigma_1, \dots, \sigma_n) = \beta \log \left( \sum_{j=1}^K \exp(\beta^{-1}\sigma_j) \right)$ .

The first two merit-based properties are obvious (Normality and Fairness). In terms of monotonicity, we have  $\sum_{i=1}^n M(\sigma_i, \sigma_{-i}) = \beta \log \left( \sum_{j=1}^K \exp(\beta^{-1} \sigma_j) \right)$  which is monotone in each  $\sigma_j$ . To verify negative externality, it suffices to show the function  $\frac{\log(\sum_{j=1}^K \exp(\beta^{-1} \sigma_j))}{\sum_{j=1}^K \exp(\beta^{-1} \sigma_j)}$  is decreasing in  $\sigma_j, \forall j$ . Since  $\exp(x)$  is increasing in  $x$ , and function  $\frac{\log(t)}{t}$  is decreasing when  $t > e$ , we conclude that  $M$  satisfies negative externality when  $n \geq 3$ .

### A.3 Proof of Theorem 1

Before showing the proof, we define the following notion of *local* maximizer:

**Definition 4** We say  $\mathbf{s} = (\mathbf{s}_1, \dots, \mathbf{s}_n)$  is a local maximizer of  $W(\mathbf{s})$  if for any  $i \in [n]$  and any  $\mathbf{s}'_i \in \mathcal{S}_i$ ,

$$W(\mathbf{s}_1, \dots, \mathbf{s}_i, \dots, \mathbf{s}_n) \geq W(\mathbf{s}_1, \dots, \mathbf{s}'_i, \dots, \mathbf{s}_n).$$

The set of all the local maximizers of  $W$  is denoted by  $Loc(W)$ .

According to the definition, for any joint strategy profile  $\mathbf{s} \in Loc(W)$ , no creator can unilaterally change his/her strategy to increase the value of function  $W$ . And clearly we have  $\arg \max_{\mathbf{s} \in \mathcal{S}} W(\mathbf{s}) \in Loc(W)$ . Now we are ready to present the proof of Theorem 2.

**Proof** We start by showing that any TvN game instance with  $M \in \mathcal{M}^3$  possesses a unique NE at  $\mathbf{s}^* = (\mathbf{e}_1, \dots, \mathbf{e}_1)$ . It suffices to show that:

1. For any joint strategy profile  $(\mathbf{s}_1, \dots, \mathbf{s}_n)$  in which there are  $k < n$  creators occupy  $\mathbf{e}_1$ , there exists a creator who can receive a strict utility gain if she change her strategy to  $\mathbf{e}_1$ .
2. At  $\mathbf{s}^* = (\mathbf{e}_1, \dots, \mathbf{e}_1)$ , any player would suffer a utility loss when changing her strategy.

For the first claim, suppose there are  $k$  players in  $\mathbf{s}$  who play  $\mathbf{e}_1$  and let  $i$  be any player who does not play  $\mathbf{e}_1$ . In addition, there are  $t \leq n - k$  players who play the same strategy as  $\mathbf{s}_i$ . By the definition of  $M_3$ , we have

$$\begin{aligned} u_i(\mathbf{s}_i; \mathbf{s}_{-i}) &= 1 \cdot M(\underbrace{1, \dots, 1}_t, \underbrace{0, \dots, 0}_{n-t}) + (n+1) \cdot M(\underbrace{0, \dots, 0}_{n-k}, \underbrace{1, \dots, 1}_k) \\ &= 1 \cdot \frac{1}{t} \cdot \pi(\underbrace{1, \dots, 1}_t, \underbrace{0, \dots, 0}_{n-t}) + (n+1) \cdot 0 \\ &= \frac{1}{t} \cdot \pi(\underbrace{1, \dots, 1}_t, \underbrace{0, \dots, 0}_{n-t}). \end{aligned} \tag{12}$$

If player- $i$  changes her strategy from  $\mathbf{s}_i$  to  $\mathbf{s}'_i = \mathbf{e}_1$ , the new utility would be

$$\begin{aligned} u_i(\mathbf{s}'_i; \mathbf{s}_{-i}) &= (n+1) \cdot M(\underbrace{1, \dots, 1}_{k+1}, \underbrace{0, \dots, 0}_{n-k-1}) + \sum_{j \neq i} 1 \cdot M(0, \dots) \\ &= (n+1) \cdot \frac{1}{k+1} \cdot \pi(\underbrace{1, \dots, 1}_{k+1}, \underbrace{0, \dots, 0}_{n-k-1}) + 0 \\ &= \frac{n+1}{k+1} \cdot \pi(\underbrace{1, \dots, 1}_{k+1}, \underbrace{0, \dots, 0}_{n-k-1}), \end{aligned} \tag{13}$$

From (12) and (13),  $u_i(\mathbf{s}'_i; \mathbf{s}_{-i}) > u_i(\mathbf{s}_i; \mathbf{s}_{-i})$  holds if and only if

$$\frac{1}{t} \cdot \pi(\underbrace{1, \dots, 1}_t, \underbrace{0, \dots, 0}_{n-t}) < \frac{n+1}{k+1} \cdot \pi(\underbrace{1, \dots, 1}_{k+1}, \underbrace{0, \dots, 0}_{n-k-1}). \quad (14)$$

And a sufficient condition for (14) to hold is

$$m = 2n > n - 1 + \max_{0 \leq k \leq n-1} \left\{ \frac{k+1}{t} \cdot \frac{\pi(\underbrace{1, \dots, 1}_t, \underbrace{0, \dots, 0}_{n-t})}{\pi(\underbrace{1, \dots, 1}_{k+1}, \underbrace{0, \dots, 0}_{n-k-1})} \right\}. \quad (15)$$

Denote  $\tilde{\pi}_k = \pi(\underbrace{1, \dots, 1}_k, \underbrace{0, \dots, 0}_{n-k})$ . By the monotonicity of  $\pi$ , we have  $\tilde{\pi}_n \geq \dots \geq \tilde{\pi}_1 = M(1, 0, \dots, 0) > 0$ . Therefore, the RHS of (15) is a finite number. Moreover, when  $t \leq k+1$ , we have

$$\frac{k+1}{t} \cdot \frac{\tilde{\pi}_t}{\tilde{\pi}_{k+1}} \leq \frac{k+1}{t} \cdot \frac{\tilde{\pi}_{k+1}}{\tilde{\pi}_{k+1}} \leq \frac{n-1+1}{1} = n,$$

and when  $t > k+1$ , based on the negative externality principle of merit-based rewarding mechanism we have

$$\frac{k+1}{t} \cdot \frac{\tilde{\pi}_t}{\tilde{\pi}_{k+1}} = \frac{M(\underbrace{1, \dots, 1}_t, \underbrace{0, \dots, 0}_{n-t})}{M(\underbrace{1, \dots, 1}_{k+1}, \underbrace{0, \dots, 0}_{n-k-1})} \leq 1.$$

Therefore, the RHS of Eq. (15) is strictly less than  $2n - 1$ .

For the second claim, we have

$$u_i(\mathbf{s}_i^*; \mathbf{s}_{-i}^*) = \frac{n+1}{n} \tilde{\pi}_n,$$

and if player- $i$  changes her strategy from  $\mathbf{s}_i^* = \mathbf{e}_1$  to any  $\mathbf{s}'_i = \mathbf{e}_j, j \neq 1$ , her new utility becomes

$$u_i(\mathbf{s}'_i; \mathbf{s}_{-i}^*) = \tilde{\pi}_1 \leq \tilde{\pi}_n < \frac{n+1}{n} \tilde{\pi}_n = u_i(\mathbf{s}_i^*; \mathbf{s}_{-i}^*).$$

Therefore, we conclude that  $\mathbf{s}^* = (\mathbf{e}_1, \dots, \mathbf{e}_1)$  is the unique NE of  $\mathcal{G}$ .

Next we estimate the welfare loss of  $\mathbf{s}^*$  under any sequence  $\{r_i\}_{i=1}^K$ . First of all, note that for any  $\mathbf{s} = (\mathbf{s}_1, \dots, \mathbf{s}_n) \in \text{Loc}(W)$  and any  $2 \leq k \leq n$ , if there exists  $i \neq j$  such that  $\mathbf{s}_i = \mathbf{s}_j = \mathbf{e}_k$ , then there must be  $k' \in [n]$  such that  $\mathbf{e}_{k'} \notin \mathbf{s}_j$ . In this case,  $W$  strictly increases if  $\mathbf{s}_j$  changes to  $\mathbf{e}_{k'}$ . Therefore, for any  $2 \leq k \leq n$ , the number of elements in  $\mathbf{s}$  that equal to  $\mathbf{e}_k$  is either 0 or 1. Let the number of elements in  $\mathbf{s}$  that equal to  $\mathbf{e}_1$  be  $q$ . By definition,

$$W(\mathbf{s}) = (n+1) \sum_{i=1}^{\min(K,q)} r_i + (n-q)r_1, \quad (16)$$

$$W(\mathbf{s}^*) = (n+1) \sum_{i=1}^K r_i.$$

Since  $q$  maximizes the RHS of (16), we have  $1 \leq q \leq K$  and  $(n+1)r_{q+1} \leq r_1 \leq (n+1)r_q$ . Therefore,

$$\begin{aligned}
 \frac{\max_{\mathbf{s} \in \mathcal{S}} W(\mathbf{s})}{W(\mathbf{s}^*)} &\geq \frac{\min_{\mathbf{s} \in \text{Loc}(W)} W(\mathbf{s})}{W(\mathbf{s}^*)} \\
 &\geq \frac{(n+1) \sum_{i=1}^{\min(K,q)} r_i + (n-q)r_1}{(n+1) \sum_{i=1}^K r_i} \\
 &\geq \frac{(n+1) \sum_{i=1}^q r_i + (n-q)r_1}{(n+1) \sum_{i=1}^q r_i + (K-q)r_1} \\
 &= 1 + \frac{(n-K)r_1}{(n+1) \sum_{i=1}^q r_i + (K-q)r_1} \\
 &\geq 1 + \frac{(n-K)r_1}{[(n+1)q + (K-q)]r_1} \\
 &\rightarrow 1 - \frac{1+1/q}{1+nq/K} + \frac{1}{q}, n \rightarrow \infty.
 \end{aligned}$$

Since  $1 \leq q \leq K$ , we conclude that  $\frac{\max_{\mathbf{s} \in \mathcal{S}} W(\mathbf{s})}{W(\mathbf{s}^*)} > 1 - O(\frac{1}{n}) + \frac{1}{K}$  when  $n$  is sufficiently large. And therefore we conclude that

$$\frac{W(\mathbf{s}^*)}{\max_{\mathbf{s} \in \mathcal{S}} W(\mathbf{s})} \leq \frac{K}{K+1} + O\left(\frac{1}{n}\right).$$

■

#### A.4 Proof of Proposition 1

**Proof** To prove that any  $M \in \text{BRM}$  is merit-based, we need to verify the following by definition:

1.  $M(0, \sigma_{-i}) = \int_0^0 f_n(t) dt = 0$ ,  $M(1, \{0, \dots, 0\}) = \int_0^1 f_1(t) dt > 0$ .
2.  $M(\sigma_i, \sigma_{-i}) - M(\sigma_j, \sigma_{-j}) = \sum_{k=j}^{i-1} \int_{\sigma_{k+1}}^{\sigma_k} f_k(t) dt \geq 0$ .
3. for any  $\{\sigma_j\}_{j=1}^n, \{\sigma'_j\}_{j=1}^n$  such that  $\sigma_{-i} \preceq \sigma'_{-i}$ , we can transform  $\{\sigma_j\}_{j=1}^n$  to  $\{\sigma'_j\}_{j=1}^n$  by taking finite steps of the following operations: 1. increase a certain value of  $\sigma_j, j \neq i$  to  $\tilde{\sigma}_j$  and it does not change the order of the current sequence; 2. increase a certain value of  $\sigma_j, j \neq i$  to  $\tilde{\sigma}_j$ , and  $\sigma_i$ 's ranking position decreases after this change. We will show that after each operation the value of  $M(\sigma_i, \cdot)$  under the perturbed sequence does not increase.

Let the perturbed sequence be  $\tilde{\sigma}$ . For the first type of operation, if  $j < i$ , we have  $M(\sigma_i, \tilde{\sigma}_{-i}) = M(\sigma_i, \sigma_{-i})$ . If  $j > i$ , we have

$$\begin{aligned}
 M(\sigma_i, \tilde{\sigma}_{-i}) - M(\sigma_i, \sigma_{-i}) &= \int_{\tilde{\sigma}_j}^{\sigma_{j-1}} f_{j-1}(t) dt + \int_{\sigma_{j+1}}^{\tilde{\sigma}_j} f_j(t) dt - \int_{\sigma_j}^{\sigma_{j-1}} f_{j-1}(t) dt - \int_{\sigma_{j+1}}^{\sigma_j} f_j(t) dt \\
 &= \int_{\sigma_j}^{\tilde{\sigma}_j} (f_j - f_{j-1})(t) dt \leq 0.
 \end{aligned}$$

For the second type of operation, with out loss of generality let's assume  $\sigma_{i+1}$  has increased to  $\tilde{\sigma}_{i+1}$  such that  $\sigma_i \leq \tilde{\sigma}_{i+1} \leq \sigma_{i-1}$ . In this case we have

$$\begin{aligned} M(\sigma_i, \tilde{\sigma}_{-i}) - M(\sigma_i, \sigma_{-i}) &= \int_{\sigma_{i+2}}^{\sigma_i} f_{i+1}(t)dt - \int_{\sigma_{i+1}}^{\sigma_i} f_i(t)dt - \int_{\sigma_{i+2}}^{\sigma_{i+1}} f_{i+1}(t)dt \\ &= \int_{\sigma_{i+1}}^{\sigma_i} (f_{i+1} - f_i)(t)dt \leq 0. \end{aligned}$$

Therefore,  $M$  is merit-based. On the other hand, there exist instances in BRM that are not monotone. For example, if we let  $f_1(t) = 1$  and  $f_k(t) = 0, \forall k \geq 2$ . Then we have

$$\begin{aligned} M(1, 0, 0, \dots, 0) &= \int_0^1 f_1(t)dt > 0, \\ M(1, 1, 0, \dots, 0) &= \int_0^0 f_1(t)dt + \int_0^1 f_2(t)dt = 0. \end{aligned}$$

As a result,  $\pi(1, 0, 0, \dots, 0) > 0 = \pi(1, 1, 0, \dots, 0)$ , which violates monotonicity. ■

## A.5 Proof of Theorem 2

**Proof** For the first claim, consider the potential function of the following form:

$$P(\mathbf{s}) = \sum_{j=1}^m \sum_{i=1}^n \int_0^{\sigma_{l_j(i),j}} f_{i,j}(t)dt - \sum_{i=1}^n c_i(\mathbf{s}_i),$$

where  $\sigma_{i,j} = \sigma(\mathbf{s}_i, \mathbf{x}_j)$  and  $\sigma_{l_j(1),j} \geq \sigma_{l_j(2),j} \geq \dots \geq \sigma_{l_j(n),j}$ .

By the definition of potential games, we need to verify that for any set of functions  $\{f_{i,j}\}$  and a strategy pair  $\mathbf{s}_i, \mathbf{s}'_i \in \mathcal{S}_i$  for player- $i$ , it holds that

$$u_i(\mathbf{s}'_i, \mathbf{s}_{-i}) - u_i(\mathbf{s}_i, \mathbf{s}_{-i}) = P(\mathbf{s}'_i, \mathbf{s}_{-i}) - P(\mathbf{s}_i, \mathbf{s}_{-i}). \quad (17)$$

For any user  $j \in [m]$ , let  $\sigma_{i,j} = \sigma(\mathbf{s}_i, \mathbf{x}_j), \sigma'_{i,j} = \sigma(\mathbf{s}'_i, \mathbf{x}_j), \forall i \in [n]$ . It suffices to show that

$$M(\sigma_{i,j}, \sigma_{-i,j}) - M(\sigma'_{i,j}, \sigma_{-i,j}) = \sum_{i=1}^n \int_0^{\sigma_{l_j(i),j}} f_{i,j}(t)dt - \sum_{i=1}^n \int_0^{\sigma'_{l_j(i),j}} f_{i,j}(t)dt, \quad (18)$$

Since the summation of (18) over  $j$  gives (17). With out loss of generality, we omit subscript  $j$  in Eq. (18) and assume  $\sigma_1 \geq \dots \geq \sigma_{i'} \geq \dots \geq \sigma_i \geq \dots \geq \sigma_n$ . After player- $i$  changes her strategy from  $\mathbf{s}_i$  to  $\mathbf{s}'_i$ , the relevance ranking increases from  $i$  to  $i'$ , i.e.,  $\sigma_1 \geq \dots \geq \sigma_{i'-1} \geq \sigma'_i \geq \sigma_i \geq \dots \geq \sigma_n$ .

Therefore, we have

$$\text{LHS of (18)} = \int_{\sigma_{i'}}^{\sigma_i'} f_{i',j}(t)dt + \sum_{k=i'+1}^n \int_{\sigma_{k-1}}^{\sigma_k} f_{k,j}(t)dt, \quad (19)$$

$$\begin{aligned} \text{RHS of (18)} &= \sum_{k=1}^n \int_0^{\sigma_k} f_{k,j}(t)dt - \left( \sum_{k=1}^{i'-1} \int_0^{\sigma_k} f_{k,j}(t)dt + \int_0^{\sigma_i'} f_{i',j}(t)dt + \sum_{k=i'+1}^n \int_0^{\sigma_{k-1}} f_{k,j}(t)dt \right) \\ &= \int_0^{\sigma_{i'}} f_{i',j}(t)dt + \sum_{k=i'+1}^n \int_0^{\sigma_k} f_{k,j}(t)dt - \int_0^{\sigma_i'} f_{i',j}(t)dt - \sum_{k=i'+1}^n \int_0^{\sigma_{k-1}} f_{k,j}(t)dt \\ &= \int_{\sigma_{i'}}^{\sigma_i'} f_{i',j}(t)dt + \sum_{k=i'+1}^n \int_{\sigma_{k-1}}^{\sigma_k} f_{k,j}(t)dt. \end{aligned}$$

Hence, (18) holds for any  $j$  which completes the proof.

For the second claim, we can verify that when  $f_{i,j} = r_i, \forall i, j$ ,

$$\begin{aligned} P(\mathbf{s}) &= \sum_{j=1}^m \sum_{i=1}^n \int_0^{\sigma_{l_j(i),j}} f_{i,j}(t)dt - \sum_{i=1}^n c_i(\mathbf{s}_i) \\ &= \sum_{j=1}^m \sum_{i=1}^n r_i \sigma_{l_j(i),j} - \sum_{i=1}^n c_i(\mathbf{s}_i) \\ &= \sum_{j=1}^m W_j(\mathbf{s}) - \sum_{i=1}^n c_i(\mathbf{s}_i) \\ &= W(\mathbf{s}). \end{aligned}$$

■

## A.6 Proof of Corollary 1

**Proof** We show that any TvN game instance  $\mathcal{G}$  with  $M = M[r_1, \dots, r_K, 0, \dots, 0] \in \text{BRCM}$  possesses a unique NE  $\mathbf{s}^*$  which maximizes  $W(\mathbf{s})$ . From Theorem 2 we know that under  $M$ ,  $\mathcal{G}$  is a potential game and its potential function  $P$  is identical to its welfare function  $W$ . Therefore, any PNE of  $\mathcal{G}$  belongs to  $\text{Loc}(W)$ . Next we show that all elements in  $\text{Loc}(W)$  yield the same value of  $W$ , thus any PNE of  $\mathcal{G}$  maximizes social welfare  $W$ .

First of all, note that for any  $\mathbf{s} = (\mathbf{s}_1, \dots, \mathbf{s}_n) \in \text{Loc}(W)$  and any  $2 \leq k \leq n$ , if there exists  $i \neq j$  such that  $\mathbf{s}_i = \mathbf{s}_j = \mathbf{e}_k$ , then there must exist  $k' \in [n]$  such that  $\mathbf{e}_{k'} \notin \mathbf{s}_j$ . In this case,  $W$  strictly increases if  $\mathbf{s}_j$  changes strategy to  $\mathbf{e}_{k'}$ . Therefore, for any  $2 \leq k \leq n$ , the number of elements in  $\mathbf{s}$  that equal to  $\mathbf{e}_k$  is either 0 or 1. Let the number of elements in  $\mathbf{s}$  that equal to  $\mathbf{e}_1$  be  $q$ . By definition, the welfare function writes

$$W(\mathbf{s}) = (n+1) \sum_{i=1}^{\min(K,q)} r_i + (n-q)r_1. \quad (20)$$



It is clear that the  $q$  that maximizes (20) satisfies  $1 \leq q \leq K$  and  $(n+1)r_{q+1} \leq r_1 \leq (n+1)r_q$ , and all such  $q$  yields the same objective value of  $W$ . Therefore, we conclude that any PNE of  $\mathcal{G}$  attains the optimal social welfare  $W$ . ■