ActiveGLAE: A Benchmark for Deep Active Learning with Transformers

Lukas Rauch¹, Matthias Aßenmacher²³, Denis Huseljic¹, Moritz Wirth¹, Bernd Bischl²³, and Bernhard Sick¹

University of Kassel, Wilhelmshöher Allee 73, 34121 Kassel, Germany {lukas.rauch, dhuseljic, moritz.wirth, bsick}@uni-kassel.de
 Department of Statistics, LMU Munich, Ludwigstr. 33, D-80539 Munich, Germany
 Munich Center for Machine Learning (MCML), LMU Munich, Germany {matthias, bernd.bischl}@stat.uni-muenchen.de

Abstract. Deep active learning (DAL) seeks to reduce annotation costs by enabling the model to actively query instance annotations from which it expects to learn the most. Despite extensive research, there is currently no standardized evaluation protocol for transformer-based language models in the field of DAL. Diverse experimental settings lead to difficulties in comparing research and deriving recommendations for practitioners. To tackle this challenge, we propose the ACTIVEGLAE benchmark, a comprehensive collection of data sets and evaluation guidelines for assessing DAL. Our benchmark aims to facilitate and streamline the evaluation process of novel DAL strategies. Additionally, we provide an extensive overview of current practice in DAL with transformer-based language models. We identify three key challenges - data set selection, model training, and DAL settings - that pose difficulties in comparing query strategies. We establish baseline results through an extensive set of experiments as a reference point for evaluating future work. Based on our findings, we provide guidelines for researchers and practitioners.

Keywords: Active Learning \cdot Natural Language Processing \cdot Transformer \cdot Benchmarking

1 Introduction

Transformer-based pre-trained language models (PLMs) have exhibited state-of-the-art (SOTA) performance in various natural language processing (NLP) applications, including supervised fine-tuning [10] and few-shot learning [7,38]. The commonality of these deep neural networks (DNNs) is their ability of general language understanding acquired through self-supervised pre-training [42,43,13]. While pre-training reduces the need for annotated data for a downstream task, obtaining annotations (e.g., class labels) from humans is still time-intensive and costly in practice [44,11]. Additionally, real-world applications require reliable models that can quickly adapt to new data and learn efficiently with few annotated instances [58]. Active Learning aims to minimize annotation cost by

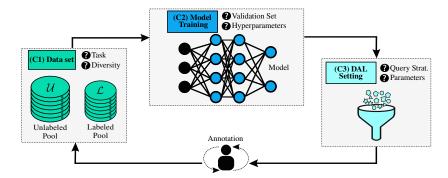


Fig. 1. DAL cycle with three essential challenges that influence the evaluation protocol.

allowing the model to query annotations for instances which it expects to yield the highest performance gains [54,17]. However, in the context of deep learning, evaluating deep active learning (DAL) is challenging due to several reasons [19,45]. First, to ensure the practical applicability of query strategies, it is essential to have a wide range of diverse data sets (i.e., tasks). Second, the iterative fine-tuning of PLMs in each cycle iteration with multiple influential factors (i.e., model hyperparameters and DAL settings) results in substantial runtime overhead. Third, in a realistic scenario, DAL poses a one-time learning problem with no validation set for hyperparameter optimization, requiring careful consideration during evaluation [21]. These challenges lead to researchers simplifying their experimental design, compromising the comparability of results and practical recommendations [19]. Thus, the benefits of applying DAL in a realistic scenario are still ambiguous [32]. For example, it remains unclear whether employing DAL query strategies yields any benefits compared to randomly querying instances. Despite current efforts to enhance comparability of DAL research in the vision domain [32,19,28,23,4], a standardized evaluation protocol or a widely-accepted benchmark for DAL in the NLP domain with PLMs is lacking.

To overcome these challenges, we propose the **Active General Language Adaption Evaluation** (ACTIVEGLAE) benchmark. ACTIVEGLAE comprises a wide range of NLP classification tasks, along with guidelines for a realistic and comparative evaluation of DAL. We aim to encourage research to employ a more comparable experimental design of DAL with PLMs, hopefully enabling the identification of best practices for real-world scenarios. Following our guidelines, we provide an extensive experimental study, which yields baseline results for three SOTA PLMs utilizing various popular DAL strategies. Our main **contributions** can be summarized as follows:

1. We highlight current practice and limitations in existing research in DAL with transformer-based PLMs through an extensive literature analysis revealing three critical challenges for a comparative and realistic evaluation. More specifically, the evaluation of a DAL process is heavily influenced by the selection of data sets (C1), the model training (C2), and the DAL set-

- ting (C3). Figure 1 illustrates these challenges along with their influential underlying factors.
- 2. We propose the ACTIVEGLAE benchmark comprising ten NLP classification tasks that cover a diverse range of text genres, data set sizes, class cardinalities, and degrees of difficulty. Additionally, we provide guidelines to enable a standardized evaluation protocol. To streamline the evaluation process in DAL, we will contribute the ACTIVEGLAE benchmark to Huggingface Datasets [26].
- 3. We conduct an extensive empirical study that provides baseline results for the ActiveGlae benchmark. These serve as a reference for assessing novel DAL processes and establish a minimum level of performance query strategies must exceed to be considered effective. Moreover, analyzing these baseline results and additional ablations regarding the identified challenges allows us to derive best practices for researchers and guidelines for practitioners.
- 4. We provide implementations⁴ for all experiments to facilitate further research. The implementations are based on Huggingface Transformers [62] to improve reusability. By providing each experiment's queried instances, we offer insights into the underlying DAL process to ensure reproducibility. Additionally, all experimental results are publicly available⁵ through Weights and Biases [5].

2 Problem Setting

We consider text classification problems where a D-dimensional instance is mapped to a feature vector $\mathbf{x} \in \mathcal{X}$ with the feature space $\mathcal{X} = \mathbb{R}^D$. An instance x is linked to a ground truth class label $y \in \mathcal{Y}$ with $\mathcal{Y} = \{1, ..., C\}$ as the space of C classes. We denote a model at cycle iteration t through its parameters θ_t , equipped with a pre-trained encoder backbone and a sequence classification head. The model $f^{\theta_t}: \mathcal{X} \to \mathbb{R}^C$ maps an instance **x** to a vector of class probabilities $\hat{\mathbf{p}} = f^{\theta_t}(\mathbf{x})$ corresponding to a prediction of the categorical class distribution. We investigate a pool-based DAL scenario with an unlabeled pool data set $\mathcal{U}(t) \subseteq \mathcal{X}$ and a labeled pool data set $\mathcal{L}(t) \subseteq \mathcal{X} \times \mathcal{Y}$. We initialize the DAL process at t=0 with a randomly sampled set of annotated instances. At each cycle iteration t, the DAL query strategy aggregates the most-useful instances in a batch $\mathcal{B}(t) \subset \mathcal{U}(t)$ with the size b. We denote an annotated batch as $\mathcal{B}^*(t) \in \mathcal{X} \times \mathcal{Y}$. We update the unlabeled pool $\mathcal{U}(t+1) = \mathcal{U}(t) \setminus \mathcal{B}(t)$ and the labeled pool $\mathcal{L}(t+1) = \mathcal{L}(t) \cup \mathcal{B}^*(t)$ with the annotated batch. At each cycle iteration t, the model θ_t can be retrained from scratch (model cold-stat) or initialized with model parameters from the previous iteration (model warm-start). This leads to an update of the model parameters θ_{t+1} . The DAL process ends upon depletion of the budget B, representing the maximum number of queries.

⁴ Github repository

⁵ Weights and Biases project

3 Current Practice of Evaluating Deep Active Learning

The current trend towards data-centric methods [68] and the adaptive capabilities of DNNs [58] has led to numerous studies on DAL with transformer-based PLMs. However, comparing DAL results is a complex challenge [37], as indicated by varying evaluation protocols in current work. This lack of standardization makes it difficult to determine a given task's most effective query strategy. We identified three challenges that researchers need to address when designing a DAL process (cf. Fig. 1). In the following, we analyze the current practice concerning these challenges and briefly describe our suggested benchmark approach. While we focus on the NLP domain, we also include insights from computer vision (CV) where we observe a trend towards unified evaluation protocols [19,23,32,28,37,4].

3.1 (C1) Data Set Selection

[65] [69] [20] [22] [34] [66]

Developing robust DAL processes that can be applied out-of-the-box (or at least task-specifically) is critical since they cannot be tested beforehand, and models only have one attempt to learn in a practical setting [21]. Additionally, a lack of variation in the selection of data sets may lead to biased and non-generalizable results. Thus, to ensure generalizable results, a DAL process needs to be evaluated on data sets covering a diverse range of text genres, pool sizes, class cardinalities, task difficulties, and label distributions. At the same time, a diverse data set selection across different publications leads to difficulties in comparing results.

Table 1. Data sets employed in current work with transformers in DAL

Current Practice. There is an abundance of benchmark classification data sets in NLP leading to a disjoint selection between publications [46]. Table 1 provides an overview of data sets employed in related work. While some specific data sets (e.g., AGN, SST2, TREC6) are used more frequently, the research landscape needs to be more cohesive. This lack of consensus reduces the comparability of results [3]. Current work reports diverse and contradictory findings across data sets, stressing the importance of further investigating the benefits of applying query strategies compared to randomly selecting instances in practice. Additionally, we found that related studies often employ data sets covering similar tasks, training data volumes, and task difficulties. We assume data sets are often bypassed due to a large unlabeled pool, which can result in high query times.

Our study. We propose the ACTIVEGLAE benchmark, a selection of data sets as a benchmark suite similar to (Super)GLUE [60,59]. We consider a wide variety of real-world tasks, aiming at spurring the general applicability of DAL. This diverse set of tasks allows us to highlight task-specific challenges and derive evaluation guidelines. We intend to improve the generalizability and comparability of DAL research.

3.2 (C2) Model Training

Conventional hyperparameter-tuning cannot be performed when simulating a real-world setting in a DAL process for several reasons [21]: First, the existence of a validation data set contradicts the purpose of DAL to reduce annotation effort (i.e., validation paradox [32]). Second, model hyperparameters (e.g., number of learning steps and learning rate) can only be determined once at the beginning of the cycle. Third, the iterative nature of DAL would necessitate hyperparameter optimization at each cycle iteration, leading to unwanted runtime overhead. Overcoming these challenges is crucial for successfully employing DAL in practice [37].

Current Practice. Table 4 in Appendix A depicts the adjustable model hyperparameters and the current practice in related work. In general, we identify three validation settings: (1) assuming the availability of all or parts of the validation data [35,51], (2) (dynamically) sample a validation set from the labeled pool [57], or (3) omitting the validation set entirely [31,20]. All approaches with a validation set employ early stopping (or selecting the model with the best validation results) and consider the number of epochs as an optimizable hyperparameter. Ji et al. [19] report that while early stopping can speed up the training process, it introduces randomness and decreases comparability. They recommend a fixed number of epochs suitable for the model architecture and data set. Recent studies suggest that model training is more important than the choice of a query strategy [33,20], as fine-tuning PLMs on small datasets can suffer from training instability [49,50,14]. A real-world setting without a validation set is similar to few-shot learning, particularly at the beginning of a DAL

process with a small labeled pool. [49] and [50] omit the validation set entirely and deploy fixed hyperparameters in a practical few-shot learning setting. [39] find out that the presence of a validation set led to a significant overestimation of the few-shot ability of language models. In parallel, we consider this a major problem of deploying DAL in practice. Jukić and Šnajder [20] adress this by introducing an early stopping technique utilizing the representation smoothness of PLMs layers from training. Training strategies usually follow the standard training procedure from [10], employing a fixed number of training epochs (3 to 15), the AdamW [30] optimizer with a learning rate between 2e-5 and 5e-5 and a learning rate scheduler with warmup (5-10% of the steps). Researchers apply a fixed and well-established training strategy to a particular model to focus on the results of query strategies. However, the lack of established benchmarks in DAL and partly incomplete hyperparameter specifications result in diverse training approaches (cf. Tab. 4), that decrease comparability across publications.

Our study. Our benchmark study adopts a similar approach to previous work on few-shot learning [49,50,39]. We simulate a real-world DAL process by entirely omitting the validation set without early stopping [32]. We employ various fixed model hyperparameters (e.g., epochs and learning rates) that are dataset-agnostic with different PLMs as baselines to highlight their impact on resulting model performance. Therefore, our study provides reference points for further research by presenting results for various hyperparameter configurations.

3.3 (C3) Deep Active Learning Setting

Evaluating DAL requires determining a DAL setting which includes key factors such as the choice of query strategy, query size, and budget. These factors are often set as fixed without having established default values from comparable benchmark studies or meaningful baselines serving as a reference point. Query strategies can be sorted into uncertainty, diversity, and hybrid sampling. Uncertainty sampling identifies the most-uncertain instances in the hypothesis space, while diversity sampling focuses on diversity in the feature space [67]. Hybrid approaches combine uncertainty and diversity sampling.

Current Practice. In Appendix A, Tab. 5 presents an overview of DAL settings and query strategies used in related work. Our benchmark study analyzes factors that influence the resulting model performance of query strategies in a DAL process. These factors include:

- Initialization and update: All prior studies use a model cold-start approach, where the model parameters are initialized from scratch at each cycle iteration (cf. Tab. 5). In contrast, a model warm-start initializes the model with parameters from the previous iteration. While a model warm-start may lead to faster convergence, it could likewise cause performance degradation due to potential bias towards the initial labeled pool [18,1]. In contrast, Lang et al. [23] and Ji et al. [19] find that a model warm-start stabilizes the learning curve in CV.

Uncertainty-based query strategies rely on the model's predictive uncertainty, which may require prior model training with task-specific information [67,66]. We refer to this as a data warm-start. Alternatively, if no initial labeled pool is available for model training, we refer to it as data cold-start. While related work commonly employs a data warm-start with a fixed initial pool size, Yuan et al. [67] and Yu et al. [66] aim to leverage the pre-trained knowledge of a transformer-based PLMs focusing on data cold-start in a DAL process.

- Stopping criterion: To ensure comparability, current studies usually use a fixed budget with a maximum limit of 2000 annotations as the stopping criterion. Alternatively, the budget may be data set-specific (e.g., 15% of the available unlabeled pool) [34,69]. Tran et al. [58] and Hacohen et al. [16] determine the budget based on the complexity of the learning task (e.g., with the number of classes). Once the budget depletes, the DAL process stops. Recent work in CV differentiates between budget sizes to simulate a diverse set of real-world scenarios. Hacohen et al. report that uncertainty-based strategies perform better with higher budgets. Note that [16] use the terms budget and warm-start interchangeably and refer to a high-data regime when a sizeable initial set is available (i.e., data warm-start) and vice versa. At the current state, there are no detailed investigations concerning the budget in NLP with transformer-based PLMs.
- Query size: The query size is a crucial since it affects the number of cycle iterations given a specific annotation budget. For example, a larger query size leads to fewer model updates and may affect model performance and runtime. While Lüth et al. [32] and Lang et al. [23] report better results with smaller query sizes in the CV domain, D'Arcy and Downey [9] demonstrate no difference between a query size of 12 and 25 with transformer-based PLMs. Current work mostly uses a fixed query size of 100 annotations or less [11,66], with some studies also applying a relative size, such as 2% of the unlabeled pool [33,34].
- Pool subset: Since the size of the unlabeled pool significantly impacts query time, researchers often avoid large data sets or introduce an unlabeled subset from which they query annotations [51]. For instance, [33] subsamples DBPedia [24] via stratified sampling once at the beginning of the DAL process to maintain the initial label distribution. However, [19] suggest avoiding sub-sampling as it can potentially alter the ranking of DAL query strategies.

Our study. We present baseline results for low and high-budget settings alongside two query sizes on ACTIVEGLAE. We concentrate on a fixed number of initial instances (i.e., data warm-start) and use the term budget size independent of the initial pool. We contend that the number of classes cannot easily determine the task complexity since other factors like class imbalance or pool size play a crucial role. Therefore, to ensure comparability across experiments and draw conclusions on the influence of the data set complexity, we employ a fixed DAL setting that is independent of the data set. We also explore the influence of model warm-start and model cold-start. While iteratively subsampling at each cycle iteration may introduce randomness [19], it significantly reduces experiment runtime. Thus, we examine the effect of employing a pool subset on model performance across query strategies.

4 ActiveGLAE - Data Sets and Tasks

We aim at creating a representative benchmark collection of real-world tasks enabling a standardized and realistic evaluation of DAL strategies. Thus, we carefully select a multitude of data sets (cf. Tab. 2 for a comprehensive overview) exhibiting different characteristics relevant to practical applications of DAL. Our selection covers balanced as well as imbalanced data sets and binary as well as multi-class settings. We choose class sets of low (3 to 6 classes), medium (14 classes), and high (77 classes) cardinality. Since class imbalance is a common problem in real-world scenarios, we consider naturally imbalanced data sets, rather than artificially introducing imbalance, for a more realistic representation. The data sets differ in size (10k - 650k examples) and encompass various classification tasks.

Table 2. Overview of ACTIVEGLAE data sets and tasks. When no test set is available (MNLI, QNLI, SST2), we use the validation set as a replacement. All data sets are available on Huggingface Datasets and respective links are added to the table.

Corpus	Train	Test	Task	#cls	Balanced	Text Source
AG's News	120k	7600	news classification	4	1	news articles
Banking77	10k	3000	conversational language	77	1	banking intents
DBPedia	560k	5000	ontology classification	14	1	wikipedia articles
FNC-1	40k	4998	stance detection	4	X	news articles
MNLI	390k	9815	textual entailment	3	1	miscellaneous
QNLI	104k	5463	question answering	2	1	wikipedia articles
SST-2	67k	872	sentiment classification	2	1	movie reviews
TREC-6	5452	500	question classification	6	1	miscellaneous
Wiki Talk	159k	64k	toxic comment detection	2	X	wikipedia talk pages
Yelp-5	650k	50k	sentiment classification	5	✓	yelp reviews

AG's News [70] is one of the larger data sets for multi-class news classification, with a target variable consisting of four classes and 120k observations in the training set. Further, it is currently the most popular one for DAL with transformers (cf. Tab. 1). Banking 77 [8] comes with the task of conversational language understanding alongside intent detection. We include it due to its yet unprecedented high-class cardinality for DAL applications. The small unlabeled pool of 10k observations makes this data set even more challenging. **DBPedia** [24] is representative of medium class cardinality (14 classes). It poses a rather easy multi-class (ontology) classification problem indicated by a high passive baseline performance, leaving much room for DAL strategies to prove their effectiveness. FNC-1 [40] was created as a subset of the Emergent data set [12] for the 2017 Fake News Challenge. Samples consist of news headlines and articles, with the stance detection task being to predict their relationship. It contains long texts and has a strongly imbalanced class distribution (> 70\% unrelated stance), posing an interesting and challenging task for DAL. MNLI [61], QNLI [60] and SST-2 [56] are taken from the popular GLUE benchmark. While the former two are sentence-pair inference tasks for textual entailment (MNLI) and question answering (QNLI), the latter is a single-sentence sentiment classification task (SST-2). Both question answering and sentiment classification represent important practical challenges, while entailment is a linguistically meaningful task. **TREC-6** [27] presents a multi-class classification task requiring question language understanding. It is a valuable addition to ACTIVEGLAE due to its short average text length (\sim 10 words) and the small training pool of 5.5k questions. Wikipedia Talk [63] is a large-scale data set of Wikipedia discussion comments, potentially containing toxic content. The binary classification task to detect toxicity in these comments is imbalanced (only \sim 10% toxic) and comes with a rather large training set size (\sim 159k samples). Yelp-5 [70] was introduced for (multi-class) sentiment detection and constitutes a good counterpart to the binary sentiment classification task (SST-2).

5 Experimental Setup

Baselines. To obtain the baseline results, we follow our insights from Section 3.2 and simulate a real-world DAL scenario without a validation set. We employ BERT [10], DistilBERT [48], and RoBERTa [29] as they are among the most popular contemporary models. We resort to a model for sequence classification from the Huggingface Transformers code base [62] to ensure reproducibility. We adopt the model hyperparameters from [20]: a short training (ST) with 5 epochs [10] and a long training (LT) with 15 epochs [66]. We use AdamW [30] with a learning rate of 5e-5 and a linear scheduler with a warmup of 5% [66].

To establish baseline performance values, we implement popular query strategies that cover uncertainty-based (ENTROPY), diversity-based (CORESET), and hybrid approaches (BADGE, CAL). We employ random sampling as the baseline query strategy. The model's [CLS] token embedding corresponds to the embedding of an instance x. For ENTROPY, and CAL, we aggregate a batch $\mathcal{B}(t)$ by greedily selecting the most-useful instances until we reach the desired query size b. For BADGE and CORESET, b instances are selected in a batch $\mathcal{B}(t)$ (cf. Appendix C for further details). We focus on a data warm-start and begin each DAL experiment by initializing 100 randomly selected instances (fixed per seed) from the unlabeled pool. We assess the impact of low and high budgets by setting them to 500 and 1600, respectively (c.f. Tab. 5). For each cycle iteration t, we select a query size b of 100 and randomly query a subset of 10,000 instances from the entire unlabeled pool $\mathcal{U}(t)$. This enables us to reduce the query times and substantially increase the number of experiments. To ensure a fair comparison, we maintain fixed hyperparameters and DAL settings across all tasks. For a comprehensive overview, please refer to Tab. 6 in Appendix B.

Ablations. In ablation studies, we only investigate BERT with ST and LT to reduce computational runtime. More specifically, we examine the impact on model performance across query strategies by (1) using a model warm-start instead of a model cold-start in each cycle iteration, (2) querying the entire unlabeled pool

without a subset, and (3) reducing the query size to 25 with the same budget resulting in 60 cycle iterations. Additionally, we adopt the learning strategy from [36], who recommend a lower learning rate (2e-5), an increased number of epochs (20) warmup ratio of 10% (LT⁺) to increase training stability on small datasets.

Evaluation. Following related work, we visualize the performance of DAL query strategies with learning curves for all experiments [51,66]. For balanced data sets, we use accuracy, while for imbalanced data sets (FNC-1, WikiTalk), we report the balanced accuracy [6] as metrics to report test performance after each cycle iteration. To facilitate comparability, we additionally present a single metric for each query strategy's model performance on the test set - the final (balanced) accuracy (FAC) and the area under the learning curve (AUC). The AUC score is normalized to ensure comparability [51]. In addition to reporting the results for each dataset individually, we compute an aggregate performance score by taking the average across the entire ActiveGLAE benchmark, with equal weighting for each dataset, following the methodology of GLUE. We repeat each experiment with five random seeds.

6 Results

In this section, we present our main baseline results as well as the ablations based on the three challenges - data set selection (C1), model training (C2), and DAL settings (C3) - we identified in the design of a DAL process in Sec. 3. For each challenge, we provide a main takeaway summarizing our key findings. Tab. 3 reports the AUC results of our extensive benchmark study on ACTIVEGLAE with BERT. Fig. 2 shows a selection of learning curves with ST,LT, and LT⁺ that supply the first two challenges (C1, C2). Additionally, we depict selected learning curves for our ablations to address the third challenge (C3). For additional details and the complete set of results, refer to Appendix D and E.

(C1) Data sets. Our results suggest that the effectiveness of a DAL query strategy crucially depends on the data set and the accompanying task, as the results vary notably (cf. Tab. 9 in Appendix D). We see in Tab. 3 that model performance across query strategies hinges on data set characteristics, including task difficulty, task type, class cardinality, and class balance. For instance, we observe in Fig. 2 that the performance differences are most noticeable in the imbalanced task (Wikitalk), and the query strategies' effectiveness vary across tasks. In fact, we record the highest model performance gains of DAL imbalanced data sets (Banks77 and Wikitalk) across all models. This parallels results shown in related work [32,64,11].

Takeaway. The results of query strategies vary notably across data sets in our benchmark suite. We observe the greatest gains in model performance with DAL in class-imbalance scenarios. To evaluate the robustness of query strategies and model training, using a diverse collection of datasets with varying tasks, difficulties, and class imbalances is crucial.

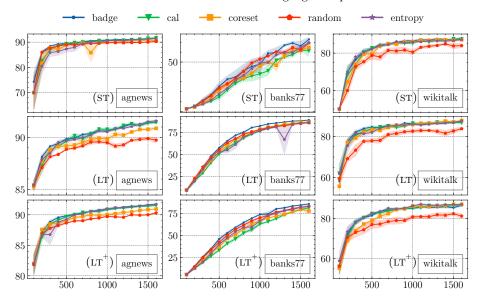


Fig. 2. Selected learning curves for BERT reporting test accuracy with ST, LT and LT⁺.

(C2) Model training. Our benchmark study emphasizes model training in DAL [33] and highlights the importance of the number of epochs as a hyperparameter when no validation set is available. Employing a short training ST with only five epochs leads to consistently worse model performance regardless of the query strategy or task. Especially when applying DAL with a low budget, we observe substantial disparities between ST and LT in the overall AUC (Tab. 3) and FAC (Tab.7, AppendixD) benchmark scores. This is prominently shown on Banks77 in Tab. 3, where the differences are as high as 22%. Although the differences diminish with a higher budget, extensive training time still leads to better model performance across all query strategies. We report similar results for DistilBERT and RoBERTa in Tab. 8 and 10 in Appendix D. Table 3 also illustrates that the ranking of query strategies is heavily influenced by model training, except for BADGE, which consistently outperforms the other strategies. Additionally, the ablation LT⁺ with a lower learning rate (2e-5) and more epochs (20) performs better than ST but generally worse than LT. However, we see in Fig. 2 that LT⁺ further stabilizes the learning curves with a lower learning rate and more epochs, which follows the findings of [36].

Takeaway. Increasing the number of epochs leads to improved model performance regardless of the budget and query strategy. While the performance boosts in the low-budget setting are larger, higher budget sizes also profit from longer training times (15-20 epochs). Model hyperparameters impact the overall performance more than the query strategy. The rankings of query strategies vary depending on the model hyperparameters, except for BADGE, which consistently outperforms all other strategies.

- (C3) Deep active learning setting. The ablations provide additional baseline results to serve as a reference point for future work. In the following, we examine the results based on key factors of a DAL setting that may influence model performance.
- Model initialization and update. Surprisingly, the results in Tab. 16 reveal that model warm-start improves overall model performance compared to model-cold-start regardless of the query strategy. The difference is especially pronounced when using a low budget with ST and for more complicated tasks like Banks77 or FNC-1. Although less pronounced, we also observe improvements for LT and in a high-budget setting. Interestingly, the performance disparities between ST and LT are drastically reduced across query strategies when employing a model warm-start. This is further illustrated in Fig. 3, where we can see that using ST for model warm-start can achieve even higher model performance than with LT in Banks77 (cf. Tab. 16, E).

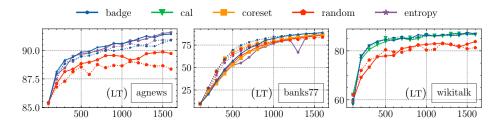


Fig. 3. Learning curves for BERT with LT to compare test accuracy between the baseline with **model cold-start** (straight lines) and the ablation with model warm-start (dotted lines).

- Stopping criterion: We consider the budget an essential parameter governing the resulting model performance of a query strategy. In the low-budget setting, only BADGE and CORESET can outperform RANDOM while CAL performs worse and ENTROPY has only a minimal improvement (cf. Tab. 3). This is in line with the findings of [16], who report RANDOM outperforming most DAL query strategies in low-budget settings. With a higher budget, the differences become more prevalent, and all query strategies outperform RANDOM. Interestingly, when considering the FAC in Tab. 7 in Appendix D, almost all query strategies outperform RANDOM. While we report similar results for DistilBERT (cf. Tab. 8, D), the overall model performance for RoBERTa diminishes with a query strategy in a high-budget setting (cf. Tab. 10, D). Additionally, we see in Tab. 3 that the ranking of query strategies change with different budgets, except for BADGE.
- Query strategy: While no query strategy clearly outperforms all other strategies, BADGE a exhibits consistently better performance. The AUC and the FAC are often superior for the low and the high data budgets compared to other query strategies. Fig. 9 in Appendix D further highlights this by showing nearly constant positive improvements upon RANDOM performance on our ACTIVEGLAE benchmark. Moreover, it emphasizes the variability in the results across tasks.

- Pool subset: Interestingly, we can see no meaningful drawback in the effectiveness of a query strategy when employing a dynamic pool subset (cf. Tab.14 E). Note that the pool is redrawn in each cycle iteration rather than fixed once, increasing the diversity of the queried pool. By reducing the pool size, the query time per cycle iteration is heavily reduced, which allows an extensive set of experiments and reduces the computational time accordingly. Without a subset, our baseline results exhibit an approximately 10-fold increase in average query time. Notably, uncertainty-based sampling (ENTROPY) even seems to improve by using the more diverse pool subsets, which can be seen in Fig. 4.

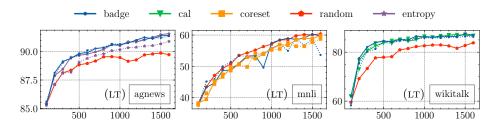


Fig. 4. Learning curves for BERT with LT to compare test accuracy between the baseline with a **pool subset** (straight lines) and the ablation with no subset (dotted lines).

- Query size: Comparing the ablation results with the baseline results, we notice a minimal impact on model performance across query strategies (cf. Tab.12, E). These findings align with the results of [4] from CV but differ from those of [32] in the CV domain. However, the investigated query sizes in CV are much larger (>1000), while we investigate in a smaller setting between 25 and 100. Additionally, in Fig. 5, we observe that more re-trainings (60 instead of 25) also increase the noise in the learning curve.

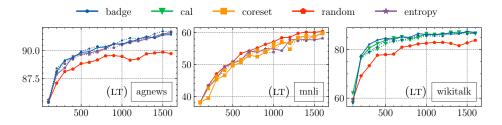


Fig. 5. Learning curves for BERT with LT to compare test accuracy between the baseline with an query size of 100 (straight lines) and the ablation with 25 (dotted lines).

Takeaway: Model warm-start improves performance across query strategies while mitigating the impact of model hyperparameters on the results. Utilizing a dynamically sampled pool subset does not adversly affect performance but substantially reduces query time. Minor adjustments to the query size do not have a notable influence on resulting model performance.

Table 3. Baseline **BERT AUC results** on ACTIVEGLAE with ST, LT, LT⁺, two budget sizes (500, 1600) and 5 repetitions (±standard deviation). **Best** and <u>second</u> best results are highlighted for each dataset. ↑ and ↓ demonstrate improvements over RANDOM. Ranking indicates the placement of a query strategy.

Т	Low Data Budget: 100 + 400 AGN B77 DBP FNC1 MNLI QNLI SST2 TREC6 WIKI YELP5 Average R														
T		AGN	B77	DBP	FNC1	MNLI	QNLI	SST2	TREC6	WIKI	YELP5	Average	R		
E	ST	$85.4{\pm}1.8$	11.0 ± 3.1	79.5 ± 4.2	31.7±4.6	41.2±0.9	63.6±2.0	81.9±1.9	84.2±3.8	68.1±1.4	43.5±2.0	59.2 ←	2		
random	LT	87.7 ± 0.3	34.5 ± 1.6	96.6 ± 0.4	43.92±4.8	46.1 ±1.6	67.6±1.9	82.1±2.3	90.7±0.9	72.2±3.6	48.8±1.6	67.3 ←	4		
ra	LT ⁺	$87.1 {\pm} 0.7$	24.3 ± 2.3	$93.6 {\pm} 1.2$	42.6±4.3	45.0±2.3	$66.5{\pm}2.0$	82.2±2.3	$89.8 {\pm} 2.4$	71.2±4.2	46.9±2.2	64.93 ←	2		
py	ST	82.8±3.6	8.3±1.4	74.2 ± 6.7	32.7±2.5	42.0±1.8	62.9±2.7	82.2±1.6	80.3±5.3	73.5±1.7	42.6±2.9	58.18 ↓0.83	5		
entropy	LT	88.3 ± 0.3	$32.3 {\pm} 1.4$	94.9 ± 2.2	46.9 ± 3.1	45.5±0.8	67.81 \pm 2.1	82.3±2.1	90.5 ± 2.2	77.6±2.6	46.5 ± 1.5	67.28 ↑0.26	3		
en	LT ⁺	87.0 ± 1.5	21.3 ± 2.8	$92.7 {\pm} 2.5$	38.8±1.9	45.7 ± 1.2	65.0 ± 2.9	83.1 ± 1.2	89.0±2.3	75.6±2.5	45.0 ± 2.2	64.34 \ \ 0.59	4		
9	ST	$86.4{\pm}1.2$	11.7±3.6	84.4±1.8	33.1±3.7	42.1±2.9	65.6 ± 2.1	81.9±1.6	85.5±3.4	73.3±2.1	45.4±1.1	60.96 1.95	1		
badge	lt	88.5 ± 0.2	34.1 ± 2.6	$96.9 \!\pm\! 0.6$	46.0 ± 4.5	44.9 ± 1.7	$66.5{\pm}2.6$	83.2 ± 0.8	$92.3 \!\pm\! 1.0$	78.7 ± 1.3	48.4 ± 1.6	67.97 10.95	1		
	LT ⁺	87.8 ± 0.6	25.4 ± 2.0	94.9 ± 1.0	42.6±3.6	44.6±1.3	$66.5{\pm}2.7$	82.7±2.1	91 ± 2.1	74.9±2.4	46.7±2.4	65.73 10.80	1		
coreset	ST	84.0 ± 1.8	9.3±1.1	74.6 ± 4.2	34.2±3.3	40.1 ± 2.1	62.9 ± 0.6	78.6 ± 5.1	82.7±3.5	70.7±2.6	43.7±1.3	58.12 \(\psi_0.89 \)	4		
res	LT	$88.2 {\pm} 0.4$	32.3 ± 3.9	96.3 ± 1.1	49.2 ±4.0	43.8±1.0	66.6 ± 1.8	82.3±2.1	91.5 ± 1.8	77.0±1.3	47.0±1.0	67.42 ↑0.40	2		
8	LT ⁺	$87.5 {\pm} 0.3$	$21.6 {\pm} 2.5$	$94.7 {\pm} 0.7$	44.4±3.0	45.9 ± 1.5	64.8 ± 2.9	80.4±2.4	90.9 ± 1.8	71.7±1.4	44.8±2.0	64.71 \$\div 0.22\$	3		
\exists	ST	84.5±3.7	7.9 ± 1.6	71.3±4.4	32.9±3.3	42.1±1.9	64.7±1.6	81.9±2.8	80.9±5.2	72.3±4.5	40.0±2.9	57.86 ↓1.15	-5		
cal	LT	88.2 ± 0.3	30.0 ± 1.5	94.5 ± 1.6	43.2±4.0	46.0 ± 2.1	67.7 ± 2.1	82.4±2.4	91.7 ± 1.1	78.2±1.6	47.5±1.2	66.94 \ \ 0.08	5		
	LT ⁺	87.44±0.8	19.62 ± 1.3	91.91 ± 1.9	40.72±2.9	45.24 ± 2.9	65.99 ± 3.2	82.20 ± 2.1	90.44 ± 1.8	74.73±1.9	44.52 ± 1.5	64.28 \(\psi_0.65 \)	5		
					H	ligh Data	Budget: 1	100 + 1500							
E	ST	$88.5{\pm}0.5$	39.8 ± 3.2	93.6 ± 1.1	43.8±5.6	52.6±0.8	72.8±1.2	85.6±0.6	92.1±0.8	78.4±1.4	52.5±0.5	70.0 ←	3		
	LT	$89.0 {\pm} 0.2$	65.3 ± 0.7	$98.1 {\pm} 0.1$	54.9 ± 2.2	54.2 ±1.0	74.3 ± 0.8	85.6±0.6	94.3 ± 0.4	79.2±1.6	53.4±0.6	74.83 ←	5		
ra	LT ⁺	88.90 ± 0.2	56.96 ± 1.3	97.35 ± 0.3	53.97±1.9	53.80 ± 1.3	73.71 ± 1.4	85.95±0.7	94.06 ± 0.8	77.73±2.2	53.18 ± 0.7	73.56 ←	5		
by	ST	$88.2 {\pm} 1.4$	$36.8 {\pm} 2.5$	$92.2{\pm}1.8$	49.5±1.2	51.4±1.5	$72.2{\pm}1.5$	86.2±0.8	$92.2{\pm}1.4$	82.5±0.6	51.0±0.6	70.22 ↑0.23	2		
entropy		90.05 ± 0.1	$62.2 {\pm} 3.7$	97.9 ± 0.6	61.2±1.8	52.7 ± 0.9	74.6 ± 1.2	86.1±0.5	95.1 ± 0.6	83.5±0.5	51.1±1.0	75.44 ↑0.61	4		
en	LT ⁺	$89.8 {\pm} 0.4$	$54.6 {\pm} 3.4$	97.3 ± 0.7	58.0 ± 1.0	53.1 ± 0.7	73.7 ± 1.5	86.7±0.7	94.6 ± 0.7	83.1±0.5	51.4±1.1	74.24 ↑0.68	2		
e,	ST	89.5 ± 0.3	41.3±7.2	95.1 ± 0.5	50.1±3.9	52.7 ± 1.2	73.2 ± 2.2	86.1±0.6	93.6 ± 1.0	82.9±0.6	53.1 ± 0.6	71.76 ↑1.77	1		
badge	LT	90.1 \pm 0.1	$67.8 \!\pm\! 0.9$	$98.5 {\pm} 0.2$	61.3 ± 2.1	52.93 ± 0.6	74.1 ± 0.9	86.4±0.5	$95.7 {\pm} 0.4$	84.1 ± 0.7	53.1 ± 0.7	76.41 1.58	1		
Р	LT ⁺	90.1 ± 0.3	59.3 ± 1.6	97.9 ± 0.3	58.6±1.2	53.3±0.9	74.2 ± 1.4	86.6 ± 0.6	95.5 ± 0.5	82.3±1.0	53.3 ± 0.8	75.11 11.55	1		
et	ST	88.1 ± 0.8	35.6 ± 1.9	92.3±1.2	49.6 ± 2.5	50.5±2.0	72.0 ± 0.7	83.9±1.8	92.7±0.9	81.8±1.2	51.2±0.3	69.79 \$\div 0.20	4		
coreset	LT	$89.6 {\pm} 0.3$	$64.6 {\pm} 1.8$	98.3 ± 0.3	62.4 ±1.3	52.3±0.9	73.8 ± 0.9	85.6±0.9	95.4±0.5	83.5±0.4	50.0±0.5	75.57 10.74	3		
8	LT ⁺	$89.5 {\pm} 0.1$	53.3 ± 1.9	97.9 ± 0.2	60.3±1.4	53.1±0.7	72.9 ± 1.6	85.0±0.9	95.1±0.5	81.4±0.5	50.7±0.5	73.92 10.36	3		
\top	ST	89.0 ± 1.1	32.9±3.7	91.3±1.1	47.7±3.3	51.8±1.4	73.4±1.0	86.3±0.8	92.4±1.4	82.2±1.3	49.9±1.0	69.71 ↓0.28	5		
cal	LT	90.0 ± 0.1	62.8 ± 1.1	97.4 ± 0.6	59.8±1.7	53.6±1.4	74.6 ±1.0	86.2±1.0	95.7 ± 0.4	83.8±0.8	52.3±0.8	<u>75.63</u> ↑0.80	2		
	LT ⁺	$89.9 {\pm} 0.3$	$50.6 {\pm} 1.2$	97.0 ± 0.5	58.1±0.8	53.2±1.4	74.1 ± 1.6	86.6±0.8	95.2±0.6	82.4±0.6	51.9 ± 1.1	73.90 ↑0.34	4		

7 Conclusion

In this article, we proposed the ACTIVEGLAE benchmark, which consists of various NLP classification tasks along with a robust evaluation protocol to foster comparability of DAL with PLMs. We analyzed the scientific environment and identified three crucial challenges when designing evaluation protocols in DAL: data set selection, model training, and DAL setting. Additionally, we conducted a comprehensive set of experiments to provide baseline results as a reference point for future work and derived guidelines for practitioners within the challenges. We found that the effectiveness of query strategies varies across tasks, making it essential to ensure their robustness to diverse NLP classification tasks to enable a real-world deployment. We confirmed the importance of model training in DAL and recommend an extended training period to improve overall model performance across query strategies. Additionally, we observed that model warmstart improves and stabilizes performance, and employing a pool subset reduces query time with minimal impact on model performance. We reported BADGE to perform consistently better than other query strategies on ActiveGLAE.

Ethics statement

Limitations This work represents a snapshot of the current practice of applying DAL to the NLP domain. This comes with the limitation that we do not explicitly go into detail about other fields, like e.g. Computer Vision or Speech Processing. Especially in the former of these two fields, an active research community is working on evaluating DAL [32,19,28,23,4], and the difference in modalities make a comparison across fields highly intriguing. Further, the experimental outcome of our work is not exhaustive. We tested a limited number of models and query strategies on a given number of data sets, which we considered representative, controlling for as much exogenous influence as possible. This should be seen as a blueprint for the experimental setup rather than a definite statement about the SOTA.

Ethical considerations To the best of our knowledge, no ethical considerations are implied by our work. There are only two aspects that are affected in a broader sense. First, the environmental impact of the computationally expensive experiments that come with evaluating DAL strategies. Given the ever-increasing model sizes and the already controversial debate around this topic, this is a crucial aspect to consider. The second point to be addressed is substituting human labor for labeling data sets by DAL. Especially when it comes to labeling toxic or explicit content, suitable DAL strategies might be one way to limit human exposure to such data.

References

- Ash, J.T., Adams, R.P.: On Warm-Starting Neural Network Training. CoRR (2020). https://doi.org/10.48550/arXiv.1910.08475
- 2. Ash, J.T., Zhang, C., Krishnamurthy, A., Langford, J., Agarwal, A.: Deep Batch Active Learning by Diverse, Uncertain Gradient Lower Bounds. CoRR (2020). https://doi.org/10.48550/arXiv.1906.03671
- 3. Aßenmacher, M., Heumann, C.: On the comparability of pre-trained language models. In: Proceedings of the 5th Swiss Text Analytics Conference and 16th Conference on Natural Language Processing. CEUR Workshop Proceedings, Zurich, Switzerland (Online) (Jun 2020), http://ceur-ws.org/Vol-2624/paper2.pdf
- Beck, N., Sivasubramanian, D., Dani, A., Ramakrishnan, G., Iyer, R.: Effective Evaluation of Deep Active Learning on Image Classification Tasks (2021). https://doi.org/10.48550/arXiv.2106.15324
- Biewald, L.: Experiment tracking with weights and biases (2020), https://www.wandb.com/, software available from wandb.com
- Brodersen, K.H., Ong, C.S., Stephan, K.E., Buhmann, J.M.: The Balanced Accuracy and Its Posterior Distribution. In: 2010 20th International Conference on Pattern Recognition. pp. 3121–3124 (Aug 2010). https://doi.org/10.1109/ICPR.2010.764
- 7. Brown, T., Mann, B., Ryder, N., Subbiah, M., Kaplan, J.D., Dhariwal, P., Neelakantan, A., Shyam, P., Sastry, G., Askell, A., Agarwal, S., Herbert-Voss, A., Krueger, G., Henighan, T., Child, R., Ramesh, A., Ziegler, D., Wu, J., Winter, C., Hesse, C., Chen, M., Sigler, E., Litwin, M., Gray, S., Chess, B., Clark, J., Berner, C., McCandlish, S., Radford, A., Sutskever, I., Amodei, D.: Language models are few-shot learners. In: Larochelle, H., Ranzato, M., Hadsell, R., Balcan, M., Lin, H. (eds.) Advances in Neural Information Processing Systems. vol. 33, pp. 1877–1901. Curran Associates, Inc. (2020), https://proceedings.neurips.cc/paper_files/paper/2020/file/1457c0d6bfcb4967418bfb8ac142f64a-Paper.pdf
- 8. Casanueva, I., Temčinas, T., Gerz, D., Henderson, M., Vulić, I.: Efficient intent detection with dual sentence encoders. In: Proceedings of the 2nd Workshop on Natural Language Processing for Conversational AI. pp. 38–45. Association for Computational Linguistics, Online (Jul 2020). https://doi.org/10.18653/v1/2020.nlp4convai-1.5, https://aclanthology.org/2020.nlp4convai-1.5
- 9. D'Arcy, M., Downey, D.: Limitations of active learning with deep transformer language models (2022), https://openreview.net/forum?id=Q80jAGkxwP5
- Devlin, J., Chang, M.W., Lee, K., Toutanova, K.: BERT: Pre-training of deep bidirectional transformers for language understanding. In: Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers). pp. 4171–4186. Association for Computational Linguistics, Minneapolis, Minnesota (2019). https://doi.org/10.18653/v1/N19-1423, https://aclanthology. org/N19-1423
- Ein-Dor, L., Halfon, A., Gera, A., Shnarch, E., Dankin, L., Choshen, L., Danilevsky, M., Aharonov, R., Katz, Y., Slonim, N.: Active Learning for BERT: An Empirical Study. In: Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP). pp. 7949–7962. Association for Computational Linguistics, Online (2020). https://doi.org/10.18653/v1/2020.emnlp-main.638

- 12. Ferreira, W., Vlachos, A.: Emergent: a novel data-set for stance classification. In: Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies. pp. 1163–1168. Association for Computational Linguistics, San Diego, California (Jun 2016). https://doi.org/10.18653/v1/N16-1138, https://aclanthology.org/N16-1138
- 13. Gao, L., Biderman, S., Black, S., Golding, L., Hoppe, T., Foster, C., Phang, J., He, H., Thite, A., Nabeshima, N., et al.: The pile: An 800gb dataset of diverse text for language modeling. CoRR (2020). https://doi.org/10.48550/arXiv.2101.00027
- 14. Gao, T., Fisch, A., Chen, D.: Making pre-trained language models better few-shot learners. In: Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers). pp. 3816–3830. Association for Computational Linguistics, Online (Aug 2021). https://doi.org/10.18653/v1/2021.acllong.295, https://aclanthology.org/2021.acl-long.295
- Gonsior, J., Falkenberg, C., Magino, S., Reusch, A., Thiele, M., Lehner, W.: To Softmax, or not to Softmax: That is the question when applying Active Learning for Transformer Models. CoRR (2022). https://doi.org//10.48550/arXiv.2210.03005
- Hacohen, G., Dekel, A., Weinshall, D.: Active Learning on a Budget: Opposite Strategies Suit High and Low Budgets (2022). https://doi.org/10.48550/arXiv.2202.02794
- 17. Herde, M., Huseljic, D., Sick, B., Calma, A.: A survey on cost types, interaction schemes, and annotator performance models in selection algorithms for active learning in classification. CoRR (2021). https://doi.org/10.48550/arXiv.2109.11301
- 18. Hu, P., Lipton, Z.C., Anandkumar, A., Ramanan, D.: Active Learning with Partial Feedback. CoRR (2019). https://doi.org//10.48550/arXiv.1802.07427
- Ji, Y., Kaestner, D., Wirth, O., Wressnegger, C.: Randomness is the Root of All Evil: More Reliable Evaluation of Deep Active Learning. In: 2023 IEEE/CVF Winter Conference on Applications of Computer Vision (WACV). pp. 3932–3941. IEEE, Waikoloa, HI, USA (2023). https://doi.org/10.1109/WACV56688.2023.00393
- 20. Jukić, J., Šnajder, J.: Smooth Sailing: Improving Active Learning for Pretrained Language Models with Representation Smoothness Analysis (2022). https://doi.org/10.48550/arXiv.2212.11680
- 21. Kottke, D., Calma, A., Huseljic, D., Krempl, G., Sick, B., et al.: Challenges of reliable, realistic and comparable active learning evaluation. In: Proceedings of the Workshop and Tutorial on Interactive Adaptive Learning. pp. 2–14 (2017)
- 22. Kwak, B.w., Kim, Y., Kim, Y.J., Hwang, S.w., Yeo, J.: TrustAL: Trustworthy Active Learning using Knowledge Distillation (2022). https://doi.org/10.48550/arXiv.2201.11661
- 23. Lang, A., Mayer, C., Timofte, R.: Best practices in pool-based active learning for image classification (2022), https://openreview.net/forum?id=7Rnf1F7rQhR
- 24. Lehmann, J., Isele, R., Jakob, M., Jentzsch, A., Kontokostas, D., Mendes, P.N., Hellmann, S., Morsey, M., van Kleef, P., Auer, S., Bizer, C.: DBpedia A large-scale, multilingual knowledge base extracted from Wikipedia. Semantic Web 6(2), 167–195 (2015). https://doi.org/10.3233/SW-140134
- Lewis, D.D., Gale, W.A.: A sequential algorithm for training text classifiers. In: Proceedings of the 17th Annual International ACM SIGIR Conference on Research and Development in Information Retrieval. p. 3–12. Springer-Verlag, Berlin, Heidelberg (1994)

- 26. Lhoest, Q., Villanova del Moral, A., Jernite, Y., Thakur, A., von Platen, P., Patil, S., Chaumond, J., Drame, M., Plu, J., Tunstall, L., Davison, J., Šaško, M., Chhablani, G., Malik, B., Brandeis, S., Le Scao, T., Sanh, V., Xu, C., Patry, N., McMillan-Major, A., Schmid, P., Gugger, S., Delangue, C., Matussière, T., Debut, L., Bekman, S., Cistac, P., Goehringer, T., Mustar, V., Lagunas, F., Rush, A., Wolf, T.: Datasets: A community library for natural language processing. In: Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing: System Demonstrations. pp. 175–184. Association for Computational Linguistics, Online and Punta Cana, Dominican Republic (2021), https://aclanthology.org/2021.emnlp-demo.21
- 27. Li, X., Roth, D.: Learning question classifiers. In: Proceedings of the 19th International Conference on Computational Linguistics -. vol. 1, pp. 1–7. Association for Computational Linguistics, Taipei, Taiwan (2002). https://doi.org/10.3115/1072228.1072378
- 28. Li, Y., Chen, M., Liu, Y., He, D., Xu, Q.: An Empirical Study on the Efficacy of Deep Active Learning for Image Classification (Nov 2022)
- Liu, Y., Ott, M., Goyal, N., Du, J., Joshi, M., Chen, D., Levy, O., Lewis, M., Zettlemoyer, L., Stoyanov, V.: RoBERTa: A Robustly Optimized BERT Pretraining Approach. CoRR (2019). https://doi.org/10.48550/arXiv.1907.11692
- 30. Loshchilov, I., Hutter, F.: Decoupled weight decay regularization. CoRR (2017). https://doi.org/10.48550/arXiv.1711.05101
- Lu, J., MacNamee, B.: Investigating the Effectiveness of Representations Based on Pretrained Transformer-based Language Models in Active Learning for Labelling Text Datasets (2020). https://doi.org/doi.org/10.48550/arXiv.2004.13138
- 32. Lüth, C.T., Bungert, T.J., Klein, L., Jaeger, P.F.: Toward Realistic Evaluation of Deep Active Learning Algorithms in Image Classification. CoRR (2023). https://doi.org/10.48550/arXiv.2301.10625
- 33. Margatina, K., Barrault, L., Aletras, N.: Bayesian active learning with pretrained language models. CoRR (2021). https://doi.org//10.48550/arXiv.2104.08320
- 34. Margatina, K., Barrault, L., Aletras, N.: On the importance of effectively adapting pretrained language models for active learning. In: Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers). pp. 825–836. Association for Computational Linguistics, Dublin, Ireland (May 2022). https://doi.org/10.18653/v1/2022.acl-short.93, https://aclanthology.org/2022.acl-short.93
- 35. Margatina, K., Vernikos, G., Barrault, L., Aletras, N.: Active Learning by Acquiring Contrastive Examples. In: Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing. pp. 650–663. Association for Computational Linguistics, Online and Punta Cana, Dominican Republic (2021). https://doi.org/10.18653/v1/2021.emnlp-main.51
- 36. Mosbach, M., Andriushchenko, M., Klakow, D.: On the Stability of Finetuning BERT: Misconceptions, Explanations, and Strong Baselines (2021). https://doi.org/doi.org/10.48550/arXiv.2006.04884
- 37. Munjal, P., Hayat, N., Hayat, M., Sourati, J., Khan, S.: Towards Robust and Reproducible Active Learning Using Neural Networks (2022). https://doi.org/10.48550/arXiv.2002.09564
- 38. OpenAI: Chatgpt: Optimizing language models for dialogue (2022), https://openai.com/blog/chatgpt/, accessed: 2023-01-10
- 39. Perez, E., Kiela, D., Cho, K.: True Few-Shot Learning with Language Models. CoRR (2021). https://doi.org/10.48550/arXiv.2105.11447

- 40. Pomerleau, D., Rao, D.: Fake News Challenge. http://www.fakenewschallenge.org/(2017)
- Prabhu, S., Mohamed, M., Misra, H.: Multi-class Text Classification using BERT-based Active Learning. CoRR (2021). https://doi.org/10.48550/arXiv.2104.14289
- Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., Sutskever, I.: Language models are unsupervised multitask learners. OpenAi Blog (2019)
- 43. Raffel, C., Shazeer, N., Roberts, A., Lee, K., Narang, S., Matena, M., Zhou, Y., Li, W., Liu, P.J.: Exploring the limits of transfer learning with a unified text-to-text transformer. The Journal of Machine Learning Research 21(1), 5485–5551 (2020)
- 44. Rauch, L., Huseljic, D., Sick, B.: Enhancing active learning with weak supervision and transfer learning by leveraging information and knowledge sources. In: IAL@PKDD/ECML (2022)
- Ren, P., Xiao, Y., Chang, X., Huang, P.Y., Li, Z., Gupta, B.B., Chen, X., Wang, X.: A survey of deep active learning. ACM Comput. Surv. 54(9) (2021). https://doi.org/10.1145/3472291
- Ren, P., Xiao, Y., Chang, X., Huang, P.Y., Li, Z., Gupta, B.B., Chen, X.,
 Wang, X.: A survey of deep active learning. ACM Comput. Surv. 54(9) (2021).
 https://doi.org/10.1145/3472291, https://doi.org/10.1145/3472291
- 47. Ru, D., Feng, J., Qiu, L., Zhou, H., Wang, M., Zhang, W., Yu, Y., Li, L.: Active sentence learning by adversarial uncertainty sampling in discrete space. In: Findings of the Association for Computational Linguistics: EMNLP 2020. pp. 4908–4917. Association for Computational Linguistics, Online (Nov 2020). https://doi.org/10.18653/v1/2020.findings-emnlp.441, https://aclanthology.org/2020.findings-emnlp.441
- 48. Sanh, V., Debut, L., Chaumond, J., Wolf, T.: DistilBERT, a distilled version of BERT: Smaller, faster, cheaper and lighter. CoRR (2020). https://doi.org/10.48550/arXiv.1910.01108
- 49. Schick, T., Schütze, H.: Exploiting cloze-questions for few-shot text classification and natural language inference. In: Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume. pp. 255-269. Association for Computational Linguistics, Online (2021). https://doi.org/10.18653/v1/2021.eacl-main.20, https://aclanthology.org/2021.eacl-main.20
- 50. Schick, T., Schütze, H.: It's not just size that matters: Small language models are also few-shot learners. In: Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies. pp. 2339–2352. Association for Computational Linguistics, Online (2021). https://doi.org/10.18653/v1/2021.naacl-main.185, https://aclanthology.org/2021.naacl-main.185
- 51. Schröder, C., Niekler, A., Potthast, M.: Revisiting uncertainty-based query strategies for active learning with transformers. In: Findings of the Association for Computational Linguistics: ACL 2022. pp. 2194–2203. Association for Computational Linguistics, Dublin, Ireland (2022). https://doi.org/10.18653/v1/2022.findings-acl.172, https://aclanthology.org/2022.findings-acl.172
- 52. Sener, O., Savarese, S.: Active Learning for Convolutional Neural Networks: A Core-Set Approach. CoRR (2018). https://doi.org/10.48550/arXiv.1708.00489
- 53. Seo, S., Kim, D., Ahn, Y., Lee, K.H.: Active Learning on Pre-trained Language Model with Task-Independent Triplet Loss. Proceedings of the AAAI Conference on Artificial Intelligence **36**(10), 11276–11284 (2022). https://doi.org/10.1609/aaai.v36i10.21378

- 54. Settles, B.: Active learning literature survey. Computer Sciences Technical Report 1648, University of Wisconsin–Madison (2010)
- 55. Settles, B., Craven, M.: An analysis of active learning strategies for sequence labeling tasks. In: Proceedings of the Conference on Empirical Methods in Natural Language Processing EMNLP '08. p. 1070. Association for Computational Linguistics, Honolulu, Hawaii (2008). https://doi.org/10.3115/1613715.1613855
- 56. Socher, R., Perelygin, A., Wu, J., Chuang, J., Manning, C.D., Ng, A., Potts, C.: Recursive deep models for semantic compositionality over a sentiment tree-bank. In: Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing. pp. 1631–1642. Association for Computational Linguistics, Seattle, Washington, USA (Oct 2013), https://aclanthology.org/D13-1170
- 57. Tan, W., Du, L., Buntine, W.: Diversity Enhanced Active Learning with Strictly Proper Scoring Rules. In: Advances in Neural Information Processing Systems (NeurIPS)). vol. 35 (2021)
- 58. Tran, D., Liu, J., Dusenberry, M.W., Phan, D., Collier, M., Ren, J., Han, K., Wang, Z., Mariet, Z., Hu, H., Band, N., Rudner, T.G.J., Singhal, K., Nado, Z., van Amersfoort, J., Kirsch, A., Jenatton, R., Thain, N., Yuan, H., Buchanan, K., Murphy, K., Sculley, D., Gal, Y., Ghahramani, Z., Snoek, J., Lakshminarayanan, B.: Plex: Towards Reliability using Pretrained Large Model Extensions. CoRR (2022). https://doi.org/10.48550/arXiv.2207.07411
- Wang, A., Pruksachatkun, Y., Nangia, N., Singh, A., Michael, J., Hill, F., Levy, O., Bowman, S.R.: SuperGLUE: A Stickier Benchmark for General-Purpose Language Understanding Systems. CoRR (2020). https://doi.org/10.48550/arXiv.1905.00537
- Wang, A., Singh, A., Michael, J., Hill, F., Levy, O., Bowman, S.R.: GLUE: A multi-task benchmark and analysis platform for natural language understanding. CoRR (2018). https://doi.org/10.48550/arXiv.1804.07461
- 61. Williams, A., Nangia, N., Bowman, S.: A broad-coverage challenge corpus for sentence understanding through inference (Jun 2018). https://doi.org/10.18653/v1/N18-1101, https://aclanthology.org/N18-1101
- 62. Wolf, T., Debut, L., Sanh, V., Chaumond, J., Delangue, C., Moi, A., Cistac, P., Rault, T., Louf, R., Funtowicz, M., Davison, J., Shleifer, S., von Platen, P., Ma, C., Jernite, Y., Plu, J., Xu, C., Le Scao, T., Gugger, S., Drame, M., Lhoest, Q., Rush, A.: Transformers: State-of-the-art natural language processing. In: Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations. pp. 38-45. Association for Computational Linguistics, Online (2020). https://doi.org/10.18653/v1/2020.emnlp-demos.6, https://aclanthology.org/2020.emnlp-demos.6
- 63. Wulczyn, E., Thain, N., Dixon, L.: Ex machina: Personal attacks seen at scale. In: Proceedings of the 26th International Conference on World Wide Web. p. 1391–1399. International World Wide Web Conferences Steering Committee, Republic and Canton of Geneva, CHE (2017). https://doi.org/10.1145/3038912.3052591, https://doi.org/10.1145/3038912.3052591
- 64. Yi, J.S.K., Seo, M., Park, J., Choi, D.G.: PT4AL: Using Self-Supervised Pretext Tasks for Active Learning (Jul 2022)
- 65. Yu, Y., Kong, L., Zhang, J., Zhang, R., Zhang, C.: AcTune: Uncertainty-Based Active Self-Training for Active Fine-Tuning of Pretrained Language Models. In: Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies. pp. 1422–1436. Association for Computational Linguistics, Seattle, United States (2022). https://doi.org/10.18653/v1/2022.naacl-main.102

- 66. Yu, Y., Zhang, R., Xu, R., Zhang, J., Shen, J., Zhang, C.: Cold-Start Data Selection for Few-shot Language Model Fine-tuning: A Prompt-Based Uncertainty Propagation Approach (2022). https://doi.org/10.48550/arXiv.2209.06995
- 67. Yuan, M., Lin, H.T., Boyd-Graber, J.: Cold-start Active Learning through Self-supervised Language Modeling. In: Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP). pp. 7935–7948. Association for Computational Linguistics, Online (2020). https://doi.org/10.18653/v1/2020.emnlp-main.637
- 68. Zha, D., Bhat, Z.P., Lai, K.H., Yang, F., Hu, X.: Data-centric AI: Perspectives and Challenges (2023). https://doi.org/10.48550/arXiv.2301.04819
- 69. Zhang, S., Gong, C., Liu, X., He, P., Chen, W., Zhou, M.: ALLSH: Active learning guided by local sensitivity and hardness. In: Findings of the Association for Computational Linguistics: NAACL 2022. pp. 1328–1342. Association for Computational Linguistics, Seattle, United States (Jul 2022). https://doi.org/10.18653/v1/2022.findings-naacl.99, https://aclanthology.org/2022.findings-naacl.99
- Zhang, X., Zhao, J., LeCun, Y.: Character-level convolutional networks for text classification. In: Cortes, C., Lawrence, N., Lee, D., Sugiyama, M., Garnett, R. (eds.) Advances in Neural Information Processing Systems. vol. 28. Curran Associates, Inc. (2015)

A Related Work

This section further details the current work in DAL with transformers in the NLP domain. Tab. 4 shows the deployed training strategies and models. Tab. 5 gives a detailed overview of the parameters of related work in the respective DAL setting along with selected query strategies. We classify the publications into three types: (i) comparison studies that empirically evaluate DAL, (ii) strategy papers that propose new query strategies, and (iii) training-focused articles that specifically focus on model training in the context of DAL.

Table 4. Overview of the model hyperparameters, optimization approaches, and selected models in current work for DAL with transformer-based PLMs.

	H	yperparam	eters		Model			0	ptimization
	epochs	learning rate	${\it scheduler}$	BERT	RoBERTa	Distiled	Validation	Source	Approach
[11]	5	5e-5	_	1	/	Х	1	complete	best model from validation results
[31]	15	1e-5	_	1	1	Х	Х	-	best model from train results
[67]	3	2e-5	linear	1	Х	Х	1	-	preliminary experiments on validation set
[47]	_	_	_	1	Х	X	/	-	_
[41]	1	3e-5	_	X	Х	1	1	complete	_
[33]	20	2e-5	10% linear	1	Х	X	/	5%,10% train set	early stopping with validation results
[35]	3	2e-5	_	1	Х	X	/	5%,10% train set	best model from validation results
[57]	30	2e-5	_	X	Х	1	1	dynamic 30% labeled	early stopping with validation results
[9]	-	1e-5	150	1	1	Х	1	-	early stopping with validation results
[51]	15	1e-5	_	1	Х	1	1	dynamic 10% labeled	early stopping with validation results
[15]	_	_	_	1	1	Х	-	-	_
[53]	_	2e-5	_	1	Х	Х	1	-	_
[65]	15	1,2e-5	10% linear	X	1	Х	1	500,1000	best model from validation results
[69]	?	2e-5	_	1	Х	Х	/	5%,10% train set	_
[20]	15	1e-5	-	1	Х	X	X	-	besov early stopping from train results
[22]	10	2e-5	-	1	X	X	1	10% train set	_
[34]	20	2e-5	-	1	X	X	1	5%,10% train set	best model from validation results
[66]	15	1,2,5e-5	-	X	1	Х	1	32 trains set	best model from validation results

Table 5. Overview of DAL parameters and query strategies in current work for DAL with PLMs. Type refers to the approach of the respective work. Note that we do not include all query strategies and only focus on the most prominent ones. If a work introduces a novel strategy and we do not include it in the table, it is marked with *.

	Туре	Randon	n Entropy	LC		Query st BADGE			DAL	DAL parameters L #init #query #budget model cold data col						
[11]	Comp.	/	Х	1	Х	/	Х	Х	Х	Х	1	100	50	350	1	Х
[31]	Comp.	/	/	X	X	Х	X	X	×	X	Х	10	10	1000	1	X
[67]	Strat.	1	/	X	X	1	X	X	1	1	Х	0	100	1000	1	1
[47]	Strat.*	/	/	х	Х	Х	х	X	Х	Х	Х	0.1%	32	2,4,6,8,10%	1	Х
[41]	Comp.	/	/	х	/	Х	Х	X	×	х	1	100	100	2000	1	Х
[33]	Train	/	/	Х	Х	/	Х	Х	/	1	Х	1%	1%	15%	1	Х
[35]	Strat.	/	/	х	Х	1	х	1	/	1	Х	1%	2%	15%	1	Х
[57]	Strat.*	/	/	X	Х	Х	1	X	Х	Х	Х	20	1,5,10,50,100	500	1	Х
[9]	Comp.	/	Х	Х	/	Х	1	X	Х	Х	Х	25	12,25,50	1000	1	Х
[51]	Comp.	/	/	1	Х	Х	Х	1	×	х	Х	25	25	525	1	Х
[15]	Train.	/	/	1	Х	X	Х	X	Х	Х	Х	25	25	525	1	Х
[53]	Strat.	/	/	1	/	/	1	Х	×	1	/	100	100	1000	1	Х
[65]	Strat.*	/	/	X	Х	/	/	1	Х	1	Х	100	100	1000	1	Х
[69]	Strat.*	/	/	х	Х	1	Х	1	×	Х	Х	0.1%	50	15%	1	Х
[20]	Train	/	/	х	/	Х	х	X	X	х	1	50	50	1000,2000	1	Х
[22]	Train	1	X	1	/	1	X	X	×	X	X	2%	2%	100%	1	Х
[34]	Train	1	1	1	Х	1	1	Х	/	1	X	1%	1%	15%	/	Х
[66]	Strat.*	1	/	X	1	Х	Х	1	1	1	X	0	64	512	1	1
glae	Bench.	1	/	X	/	1	X	1	Х	X	Х	100	100,25	500,1600	+	Х

B Training Settings

Tab. 6 shows the parameters we use for our experiments to obtain baseline performance values for BERT, DistilBERT, and RoBERTa. This table includes hyperparameters of model training and the parameters of the DAL setting. Due to computational reasons, we limit our ablations studies to BERT.

Table 6. Hyperparameter configurations for model training and parameters of the DAL setting. <u>Ablations</u> are highlighted.

	Model Tra	ining	
Parameter	BERT	${\bf DistilBERT}$	RoBERTa
Model Parameters	HF Sequence	HF Sequence	HF Sequence
Maximum Tokens	512	512	512
Epochs	5, 15, 20	5, 15	5, 15
Learning Rate	$5e-5, \underline{2e-5}$	5e-5	5e-5
Scheduler	Linear Warmup	Linear Warmup	Linear Warmup
Warmup Ratio	0.05, 0.1	0.05	0.05
Batch Size	20	20	20
AdamW ϵ	0.9	0.9	0.9
AdamW β_1	0.9	0.9	0.9
AdamW β_2	0.999	0.999	0.999
AdamW Bias Corr.		✓	
AdamW Weight Decay	0.01	0.01	0.01
Validation Set		Х	
De	eep Active Lear	ning Setting	
Model Cold-Start	True, <u>False</u>		/
Data Cold-Start		Х	
# Initialization	100	100	100
# Query	$100, \underline{25}$	100	100
# Budget	500, 1600	500, 1600	500, 1600
# Seeds	5	5	5
# Pool Subset	10000, <u>False</u>	10000	10000

C Query Strategies

We choose the most popular selection strategies for uncertainty-based, diversity-based, and hybrid sampling. Note that we omit query strategies that rely on the epistemic uncertainty of a model.

- 1. **Random**: Random sampling is considered the baseline in AL research, where instances are drawn randomly from the unlabeled data set $\mathcal{U}(t)$. The basic goal of al DAL query strategies is to achieve better results than random sampling.
- 2. Entropy [55]: Entropy sampling approximated the utility of instances from the unlabeled pool $\mathcal{U}(t)$ based on the entropy [25] of the predicted probability vector $\hat{\mathbf{p}}$. At cycle iteration t, we greedily select the instance with maximum entropy. In our study on ActiveGLAE, we report an average query time of 37 seconds per cycle iteration.
- 3. Coreset [52]: Coreset sampling selects a subset in the unlabeled pool $\mathcal{U}(t)$ that is representative of the entire data set and minimizes the bound between the average loss over any given subset and the remaining data points. At each iteration t, b instances \mathbf{x}^* are selected greedily in a batch $\mathcal{B}(t) \subset \mathcal{U}(t)$ to minimize the largest distance between an instance and its nearest center. In our study on ACTIVEGLAE, we report an average query time of 52 seconds per cycle iteration.
- 4. CAL [35]: Contrastive Active Learning selects instances that are similar in the embedding space, but the predicted probability vector $\hat{\mathbf{p}}$ is strongly contrastive to their neighbors. CAL calculates the similarity with the maximum mean Kullback-Leibler divergence. In our study on ACTIVEGLAE, we report an average query time of 180 seconds per cycle iteration.
- 5. BADGE [2]: Batch Active Learning by Diverse Gradient Embeddings is a hybrid query strategy that combines the predictive uncertainty and the diversity of instances. BADGE treats the magnitude of the gradients in the model's final output layer as the predictive uncertainty. In our study on ACTIVEGLAE, we report an average query time of 58 seconds per cycle iteration.

D Further Baseline Results

Tab. 3 and Tab. 7 provide the more fine-grained results on the respective data sets from ActiveGLAE. We further depict the results by visualizing the learning curves in Figs. 6, 7 and 8. Fig. 9 shows the improvements in the learning curve of LT with respect to random sampling. Tab. 8 and Tab. 10 display the AUC results from Roberta and Distilbert.

Table 7. Baseline **BERT FAC results** on ACTIVEGLAE with ST, LT, LT⁺, two budget sizes (500, 1600) and 5 repetitions (±standard deviation). **Best** and <u>second</u> best results are highlighted for each dataset. ↑ and ↓ demonstrate improvements over RANDOM.

	Low Data Budget: 100 + 400														
Т		AGN	B77	DBP	FNC1	MNLI	QNLI	SST2	TREC6	WIK	YELP5	Average			
ш	ST	89.00 ± 0.2	27.96 ± 9.5	98.58 ± 0.1	40.97 ± 12.3	51.65 ± 3.0	70.32 ± 6.2	86.17 ± 0.6	93.04 ± 0.6	77.98 ± 4.3	54.64 ±0.7	69.03 ←			
random	$_{ m LT}$	$88.96{\pm}0.2$	63.42 ± 1.2	98.57 ± 0.1	$55.23{\pm}2.5$	53.48 ± 2.9	74.17±1.3	$86.51 {\pm} 0.8$	94.48 ± 1.0	$78.15 {\pm} 2.9$	53.76±0.8	74.67 ←			
ra	LT ⁺	$88.98 {\pm} 0.1$	$50.21 {\pm} 1.1$	$98.58 {\pm} 0.1$	$53.34{\pm}1.5$	$52.37{\pm}1.8$	73.18 ± 2.2	$86.54 {\pm} 0.7$	94.44±0.9	$77.21 {\pm} 3.5$	53.94 ± 0.9	72.88 ←			
Py.	ST	87.95±3.1	23.19±2.6	98.24±0.3	50.20±3.9	49.81±3.0	72.00±4.7	86.95±0.9	94.12±0.9	84.17±1.5	50.99±5.3	69.76 ↑0.73			
entropy	LT	89.78 ± 0.2	$55.05{\pm}6.9$	98.83 ± 0.1	61.61 ± 2.1	51.32 ± 1.2	73.01±2.0	$86.28 {\pm} 0.9$	95.56±0.4	84.05 ± 0.9	51.55±1.4	74.70 ↑0.03			
en	LT^{+}	89.99 ± 0.2	47.21 ± 4.2	98.92 ± 0.1	55.69 ± 3.7	52.72 ± 1.3	72.77±3.9	86.44 ± 1.0	95.40±0.4	$83.48 {\pm} 0.6$	51.89±2.4	73.45 ↑0.57			
-e	ST	89.29±1.5	32.56±7.0	98.85±0.1	46.67±9.8	52.74 ± 2.5	72.73±3.6	86.54±0.6	95.76±0.3	84.58 ± 1.7	52.66±3.5	71.24 ↑2.21			
badge	LT	89.92 ± 0.3	$65.31 {\pm} 2.3$	98.97 ± 0.0	61.83 ± 2.6	50.98 ± 2.2	73.40 ± 2.3	87.36 ± 0.8	96.00 ± 0.3	$84.25{\pm}1.0$	53.11±1.0	76.11 11.44			
Þ	LT ⁺	90.11 ± 0.3	52.70 ± 3.1	98.96 ± 0.0	$58.13{\pm}1.4$	52.26 ± 1.1	72.40±3.3	$86.28{\pm}1.7$	96.52 ± 0.5	83.63 ± 1.0	53.27±1.2	74.43 1.55			
et	ST	89.03±0.4	27.15 ± 4.3	96.99 ± 3.2	47.99 ± 6.9	48.39 ± 1.6	70.13±5.3	84.13±2.8	94.80 ± 0.8	83.93±1.4	51.04±2.2	69.36 ↑0.33			
coreset	$_{ m LT}$	$89.27{\pm}0.4$	$60.37{\pm}3.5$	98.96 ± 0.0	61.31 ± 1.3	50.67 ± 2.3	71.83±4.2	$86.47{\pm}1.0$	96.52 ± 0.9	83.02 ± 2.0	49.69±1.1	74.81 ↑0.14			
8	LT ⁺	$89.55{\pm}0.4$	$46.64{\pm}2.7$	98.92 ± 0.1	$59.32{\pm}1.5$	52.63 ± 1.2	72.13±2.9	$85.11 {\pm} 0.6$	95.80 ± 0.4	$81.15{\pm}1.8$	50.42±1.3	73.17 ↑0.29			
_	ST	$89.84{\pm}0.4$	21.68 ± 5.7	$96.42{\pm}2.8$	49.72 ± 5.1	47.13 ± 5.9	76.05±2.7	86.44±1.1	94.88 ± 1.1	$83.53{\pm}0.9$	49.30±1.6	69.50 ↑0.47			
cal	$_{ m LT}$	90.16 ± 0.4	$57.58{\pm}2.9$	97.29 ± 0.9	57.92 ± 4.0	51.32 ± 1.8	75.30 ± 1.9	$85.60 \!\pm\! 1.5$	96.24 ± 0.4	84.76 ± 1.3	51.78 ± 1.5	74.79 ↑0.12			
	LT ⁺	90.03 ± 0.2	41.06 ± 3.4	$98.44 {\pm} 0.7$	$58.03{\pm}1.4$	$52.28{\pm}1.6$	73.89±1.9	$\underline{87.09}{\pm0.6}$	96.32±0.4	$82.80{\pm}1.3$	51.89±1.8	73.18 ↑0.30			
					Н	igh Data I	Budget: 10	0 + 1500							
E	ST	90.30 ± 0.3	$69.45{\pm}1.0$	98.77 ± 0.1	54.91 ± 3.0	61.19 ± 1.0	78.59 ± 1.0	87.61 ± 0.6	96.08 ± 0.8	84.01 ± 1.9	56.77±0.4	77.77 ←			
random	$_{ m LT}$	$89.74 {\pm} 0.5$	$85.82{\pm}0.5$	98.71 ± 0.1	$61.45{\pm}1.1$	60.39 ± 0.9	78.77±0.7	$87.25 {\pm} 0.8$	96.08 ± 0.7	$83.81{\pm}1.4$	55.99±0.3	79.80 ←			
ra	LT ⁺	90.31 ± 0.2	$82.90 {\pm} 0.7$	98.79 ± 0.1	$62.09{\pm}0.9$	$60.85{\pm}0.7$	79.12±0.9	$87.75 {\pm} 0.3$	96.28 ± 0.5	$81.21 {\pm} 2.5$	56.68 ± 0.5	79.60 ←			
py	ST	91.39 ± 0.4	$69.32{\pm}2.3$	99.11±0.0	64.20±1.4	53.75±9.6	79.42±1.5	88.53±1.1	97.44±0.5	87.24±0.6	55.81±0.7	78.62 ↑0.85			
entropy	$_{ m LT}$	$91.59 {\pm} 0.2$	$86.27{\pm}0.2$	99.09 ± 0.0	73.37 ± 2.1	58.22 ± 1.3	78.66 ± 1.5	$88.42 {\pm} 0.2$	97.28 ± 0.3	87.70 ± 0.3	54.92±0.9	81.55 1.75			
en	LT ⁺	91.74 ± 0.2	$82.79{\pm}1.8$	99.16±0.0	71.20 ± 2.2	59.33 ± 1.2	80.83 ± 1.3	$88.67 {\pm} 0.9$	97.16±0.4	87.00 ± 0.6	55.38±0.9	81.33 1.73			
-e	ST	91.61 ± 0.2	72.95±3.8	99.12 ± 0.0	64.69 ± 1.4	61.06 ± 1.0	79.60 ± 0.9	89.06 ± 0.5	97.56 ± 0.4	88.02 ± 0.6	57.44 ±0.5	80.11 ↑2.34			
badge	$_{ m LT}$	91.44 ± 0.1	88.91 ± 0.3	99.09 ± 0.0	$73.18{\pm}1.2$	59.63 ± 1.7	78.31±1.1	87.89 ± 1.0	97.68 ±0.4	86.96 ± 0.6	55.83±0.4	81.89 12.09			
Ф	LT ⁺	91.71 ± 0.1	$85.58 {\pm} 0.7$	99.15 ± 0.0	$71.58{\pm}1.9$	60.16 ± 1.4	79.21±1.3	89.27±0.6	97.52±0.6	$86.51 {\pm} 0.8$	57.21 ± 0.4	81.79 †2.19			
et	ST	90.56 ± 0.2	$64.88{\pm}2.6$	99.13 ± 0.0	58.97 ± 1.2	59.26 ± 2.5	78.09 ± 2.4	86.79 ± 0.3	97.04±0.4	87.12 ± 1.3	55.52 ± 0.7	77.74 ↓0.03			
coreset	LT	$90.87 {\pm} 0.3$	$86.40{\pm}2.2$	99.11 ± 0.0	$73.57 {\pm} 1.2$	$59.86{\pm}0.8$	77.65±3.3	$87.89 {\pm} 0.8$	97.64 ± 0.1	$\underline{87.87}{\pm}0.5$	52.92±0.5	81.38 1.58			
ö	LT ⁺	$90.94{\pm}0.1$	$77.53{\pm}6.5$	99.16 ± 0.0	$72.23 {\pm} 1.8$	58.24 ± 1.1	78.98 ± 1.4	87.87 ± 1.1	97.16 ± 0.3	87.00 ± 0.5	54.38 ± 1.4	80.35 10.75			
	ST	91.74 ± 0.2	61.38 ± 11.3	99.16 ± 0.0	54.44 ± 12.3	58.59 ± 1.7	78.59 ± 1.1	89.22 ± 0.6	97.68 ± 0.5	87.46 ± 1.0	55.85±1.0	77.41 _0.36			
cal	$_{ m LT}$	$91.44 {\pm} 0.3$	86.84 ± 0.5	99.03 ± 0.0	$72.35{\pm}1.3$	$60.25{\pm}1.0$	80.85 ± 1.2	$88.26{\pm}1.1$	97.56 ± 0.5	86.72 ± 1.1	55.77 ± 0.5	81.91 †2.11			
	LT ⁺	$91.54 {\pm} 0.2$	$81.29{\pm}2.0$	99.15 ± 0.0	$71.39 {\pm} 1.5$	59.36 ± 0.9	79.44±0.8	88.90 ± 0.7	97.60 ± 0.3	$86.95{\pm}0.7$	56.68 ± 0.8	81.23 1.63			

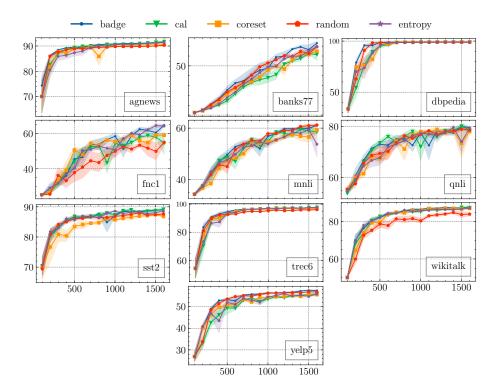


Fig. 6. Baseline learning curves for BERT on ActiveGLAE reporting test accuracy with st, a learning rate of 5e-5 and 5 repetitions. The shaded area marks the standard error.

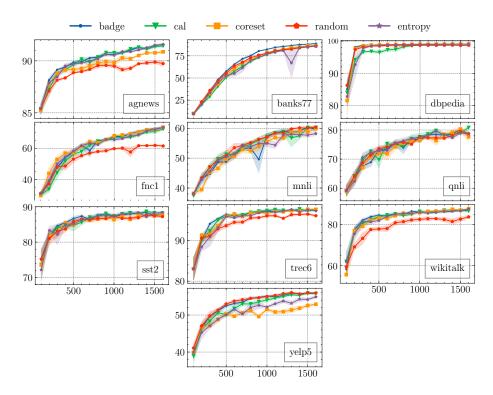


Fig. 7. Baseline learning curves for BERT on ActiveGLAE reporting test accuracy with Lt, learning rate of 5e-5 and 5 repetitions. The shaded area marks the standard deviation.

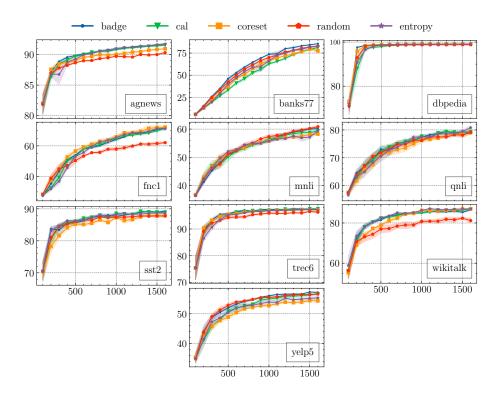


Fig. 8. Baseline learning curves for BERT on ACTIVEGLAE reporting test accuracy with ${\rm LT}^+$, learning rate of 2e-5 and 5 repetitions. The shaded area marks the standard deviation.

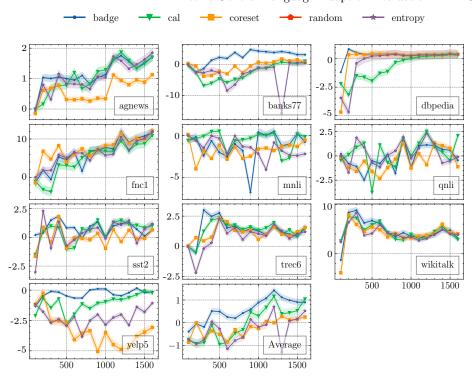


Fig. 9. Test accuracy improvement curve based on FAC relative to random sampling with LT on ACTIVEGLAE.

Table 8. Baseline **DistilBERT AUC results** on ACTIVEGLAE with three model training approaches (ST, LT), two budges sizes (500, 1600) and 5 repetitions (±standard deviation). **Best** and <u>second</u> best results are highlighted for each dataset. ↑ and ↓ demonstrate improvements over RANDOM.

	Low Data Budget: 100 + 400													
		AGN	B77	DBP	FNC1	MNLI	QNLI	SST2	TREC6	WIK	YELP5	Average		
random	ST	85.58±1.2	14.85 ± 1.0	86.74±1.9	25.90±1.0	37.07±1.2	62.21±1.4	79.86±0.9	80.39±2.5	$68.85{\pm}0.6$	44.93±1.0	58.64 ←		
random	LT	$86.48{\pm}0.6$	34.60 ± 1.9	96.42±0.5	31.92±1.0	39.75±1.8	64.57±1.4	80.06±1.0	89.10±1.8	72.63 ± 2.3	47.13 ± 0.9	64.27 ←		
entropy	ST	85.98 ± 0.7	9.40 ± 1.7	84.11±4.9	27.24±1.2	36.78 ± 2.3	61.69 ± 0.9	79.12±2.4	78.47±1.1	69.53 ± 4.5	42.90±1.5	57.52 \1.12		
chtropy	LT	87.36 ± 0.5	30.83 ± 1.7	95.99±0.6	32.31 ± 2.0	41.28±2.3	65.33 ± 0.9	80.91 ± 0.7	$89.38{\pm}1.8$	77.77 ± 1.2	45.23±1.7	64.64 ↑0.37		
badge	ST	86.56 ± 0.8	15.76 ± 0.9	89.67±1.7	26.04±0.8	37.39 ± 0.9	61.35 ± 2.0	80.41±1.4	82.65±0.6	73.19 ± 0.8	45.11±2.0	59.81 1.17		
badge	LT	87.31 ± 0.5	36.59 ± 1.6	97.16±0.4	32.85±2.3	39.62±2.2	65.82 \pm 1.6	80.46±0.8	91.10 ± 1.1	78.24 ± 0.5	46.63 ± 1.2	$65.58 \uparrow 1.31$		
coreset	ST	86.10±1.1	12.79 ± 1.5	84.96±3.7	26.31±0.8	37.38 ± 1.2	61.39±0.9	78.13±1.4	79.71±1.8	70.39 ± 0.6	43.71±1.1	58.09 \ \ 0.55		
COLCDCC	LT	87.01 ± 0.3	35.19 ± 1.1	96.96 ± 0.4	32.05±1.2	41.09 ± 1.9	65.21 ± 2.1	79.22±0.9	89.12 ± 1.7	$76.58{\pm}1.2$	46.16±1.0	64.86 ↑0.59		
cal	ST	86.01±0.9	9.12±2.8	79.10±4.1	27.82±1.5	37.48±1.5	61.92 ± 1.9	79.72±1.6	78.38 ± 1.7	71.84±3.2	41.31±3.5	57.27 \1.37		
car	LT	$87.25 {\pm} 0.6$	30.70 ± 0.7	94.96±0.9	31.90±1.1	40.37±2.5	65.09 ± 0.8	81.42±1.4	90.14 ± 0.9	76.33 ± 1.3	$45.38{\pm}1.6$	64.36 ↑0.09		
					High I	Oata Budg	et: 100 + 1	500						
random	ST	87.79±0.3	39.70 ± 1.5	95.35±0.5	34.95±1.8	47.54±1.8	70.68 ± 0.8	83.28±0.6	91.03±0.8	78.09 ± 1.8	51.35±0.5	67.98 ←		
random	LT	87.82 ± 0.2	64.07 ± 1.0	97.89±0.2	46.24±1.9	48.86±1.0	71.00±0.5	83.04±0.6	93.47±0.7	$78.84{\pm}2.3$	51.38 ± 0.6	72.26 ←		
entropy	ST	$88.82{\pm}0.3$	34.02 ± 2.0	94.88±1.3	37.91±2.8	46.22±2.4	70.56 ± 0.5	83.42±0.8	91.32 ± 0.4	80.91 ± 1.4	49.80±0.9	67.79 ↓0.19		
ептору	LT	89.27 ± 0.1	61.47 ± 0.7	98.14±0.2	51.78±2.5	49.03 ± 1.6	71.62 ± 0.3	84.13 ± 0.4	94.64 ± 0.7	83.25 ± 0.7	49.06±1.0	73.24 ↑0.98		
badge	ST	89.07±0.2	43.47±1.3	96.45±0.5	37.42±1.6	47.78±1.8	70.67±0.5	84.62±0.6	92.61±0.4	81.90±0.4	51.73 ±0.6	69.57 1.59		
CC lt	89.29±0.2	67.66 ±0.7	98.49 ±0.1	52.39 ± 1.6	48.76 ± 2.2	71.90±1.1	$83.68{\pm}0.8$	95.12±0.5	83.62 ± 0.4	$51.28 {\pm} 0.7$	74.22 1.96			
coreset	ST	88.59 ± 0.4	36.34 ± 1.3	95.11±1.0	39.47±1.8	47.16±1.8	71.01±0.9	82.02±0.7	91.46±0.8	81.51±0.4	50.17±0.5	68.28 ↑0.31		
COTCSCE	LT	$88.85{\pm}0.2$	64.86 ± 0.6	98.38 ± 0.1	52.91±1.4	49.41±1.7	71.23±1.2	82.30±0.5	94.30 ± 0.6	83.09 ± 0.5	49.39 ± 0.5	<u>73.47</u> ↑1.21		
cal	ST	88.99 ± 0.3	29.08 ± 2.5	93.49±1.2	40.27±1.8	47.94±1.6	70.61±1.1	83.43±1.4	91.23±0.7	82.06±1.0	48.75±1.3	67.58 ↑0.40		
cai	LT	89.32 ± 0.2	$60.58{\pm}1.3$	97.39±0.5	49.76±1.6	48.46±2.6	72.01 ± 0.3	84.07±0.6	94.76 ± 0.5	82.72 ± 0.6	50.90±0.8	73.00 †0.74		

Table 9. Baseline **DistilBERT FAC results** on ActiveGLAE with three model training approaches (St, Lt), two budges sizes (500, 1600) and 5 repetitions (\pm standard deviation). **Best** and <u>second</u> best results are highlighted for each dataset. \uparrow and \downarrow demonstrate improvements over RANDOM.

					Lov	v Data Bu	dget: 100 -	+ 400				
		AGN	B77	DBP	FNC1	MNLI	QNLI	SST2	TREC6	WIK	YELP5	Average
random	ST	87.87±0.2	$32.15{\pm}1.5$	98.29 ± 0.1	$29.48{\pm}2.4$	$43.53{\pm}4.4$	71.32 ± 2.5	84.36±0.6	93.44±0.9	78.59 ± 4.2	52.32 ± 0.6	67.13 ←
random	LT	87.61 ± 0.4	$61.04{\pm}1.3$	98.22 ± 0.2	$38.94{\pm}6.4$	47.08 ± 1.5	71.17 ± 1.3	83.58±1.1	93.64±1.4	80.21±2.9	51.40±1.2	71.29 ←
entropy	ST	88.94 ± 0.3	23.33 ± 2.9	98.20 ± 0.2	30.65 ± 1.9	43.96 ± 6.0	70.81 ± 0.7	83.26±0.5	93.68 ± 0.7	83.18±1.4	51.36 ± 0.5	66.74 \ \ 0.39
спору	LT	89.27 ± 0.4	$54.88{\pm}1.7$	98.78 ± 0.0	45.08 ± 8.4	46.50 ± 2.7	71.96 ± 2.0	83.94 ± 0.7	95.56 ± 0.4	83.35 ± 1.1	48.63 ± 1.2	71.80 ↑0.51
badge	ST	89.09 ± 0.3	35.63 ± 1.8	98.72 ± 0.1	$29.38{\pm}2.3$	44.11 ± 5.6	70.57 ± 1.4	84.70±1.2	94.96 ± 0.4	82.33±0.9	52.58 ± 0.5	68.21 1.08
bauge	LT	89.13 ± 0.2	63.69 ± 1.0	98.88 ± 0.0	$\underline{45.84}{\pm}4.0$	$46.35{\pm}3.5$	$\underline{71.20}{\pm}2.4$	83.46±1.1	94.76 ± 0.8	85.16 ± 0.9	51.33±0.6	$72.98 \uparrow 1.69$
coreset	ST	88.56 ± 0.5	$28.34{\pm}1.6$	98.31 ± 0.5	$34.48{\pm}6.0$	44.42 ± 2.7	71.27 ± 3.9	81.93±1.3	94.52 ± 0.7	83.45 ± 2.1	51.55±1.0	67.68 ↑0.55
COTCSCI	LT	88.49 ± 0.5	61.19 ± 1.1	98.75 ± 0.1	46.04 ± 6.0	48.63±4.1	$70.17{\pm}1.8$	82.89±0.7	95.08 ± 0.8	83.68 ± 1.0	48.99±1.3	72.39 1.10
cal	ST	89.07 ± 0.5	21.99 ± 2.3	97.98 ± 0.2	31.77 ± 1.4	46.03 ± 3.2	70.33 ± 2.1	84.17±1.2	93.32 ± 1.1	84.38 ± 0.8	49.48 ± 0.7	66.85 \ \ 0.28
car	LT	89.20 ± 0.3	52.91 ± 2.5	96.52±1.4	$42.78{\pm}4.0$	45.32 ± 3.5	72.71 ± 1.5	83.90±1.4	95.60±0.6	83.65±1.1	50.26±1.2	71.28 \$\displaystyle\dots\dots\dots\dots\dots\dots\dots\dots
					Hig	h Data Bu	dget: 100	+ 1500				
random	ST	89.29 ± 0.2	$65.29{\pm}2.0$	98.62 ± 0.1	$49.58{\pm}8.7$	57.10 ± 1.7	75.71 ± 0.8	84.82±1.2	95.88 ± 0.5	82.70±2.9	54.80 ± 0.6	75.38 ←
random	LT	89.20 ± 0.4	$84.47{\pm}0.6$	98.53 ± 0.1	$61.63{\pm}1.9$	56.94 ± 0.8	$75.53 {\pm} 0.6$	84.77±1.0	96.20 ± 0.5	82.27±2.7	54.22±0.3	78.38 ←
entropy	ST	90.62 ± 0.3	62.55 ± 2.0	99.06 ± 0.0	57.88 ± 3.9	55.37 ± 1.0	75.42 ± 1.9	85.11±2.6	97.04 ± 0.2	86.44±1.0	53.63±0.6	76.31 ↑0.93
спору	LT	90.75 ± 0.2	$84.85{\pm}0.9$	99.05±0.0	69.86 ± 1.3	54.57 ± 1.6	$75.94 {\pm} 0.5$	86.19±1.4	97.04±0.4	86.19±0.9	51.80±0.6	79.62 11.24
badge	ST	90.83 ± 0.2	70.04 ± 1.5	99.06 ± 0.0	51.96 ± 12.3	57.15 ± 1.4	77.00 ± 0.8	87.34±0.8	97.12 ± 0.6	86.32 ± 0.8	55.61 ± 0.2	77.24 1.86
bauge	LT	90.93±0.2	88.15 ± 0.5	99.06 ± 0.0	69.88 ± 1.9	$56.34{\pm}1.9$	$74.48 \!\pm\! 2.2$	86.35 ± 0.8	97.00 ± 0.3	86.11 ± 0.3	54.44 ± 0.5	80.27 1.89
coreset	ST	90.28 ± 0.3	58.90 ± 1.8	99.06 ± 0.0	$54.34{\pm}6.8$	54.67±3.6	76.24 ± 1.9	85.11±0.8	96.56 ± 0.3	87.51 ± 0.8	53.68 ± 0.8	75.63 ↑0.25
COTCOCC	LT	90.29 ± 0.3	85.54 ± 0.7	99.04 ± 0.0	$69.82{\pm}1.6$	$55.27{\pm}1.7$	75.65 ± 0.9	84.04±1.1	97.52±0.3			79.55 1.17
cal	ST	90.92 ± 0.2	53.29 ± 2.5	99.07±0.0	54.37 ± 5.7	56.18 ± 1.4	77.50 ± 0.8	85.83±0.6	97.32 ± 0.3	86.89 ± 0.6	53.06 ± 1.0	75.44 ↑0.06
	LT	$90.85 {\pm} 0.2$	84.81±1.0	98.96±0.0	67.40 ± 1.4	56.81 ± 1.5	76.63 ± 0.3	86.12±0.7	96.88 ± 0.5	86.34±0.4	54.86 ± 0.5	79.97 1.59

Table 10. Baseline **Roberta Auc** results on ActiveGLAE with three model training approaches (St, Lt), two budges sizes (500, 1600) and 5 repetitions (\pm standard deviation). **Best** and <u>second</u> best results are highlighted for each dataset. \uparrow and \downarrow demonstrate improvements over RANDOM.

Low Data Budget: 100 + 400													
		AGN	B77	DBP	FNC1	MNLI	QNLI	SST2	TREC6	WIK	YELP5	Average	
random	ST	87.77±0.9	17.24±1.7	88.91±1.8	$29.32{\pm}2.8$	48.71±1.2	76.78±1.2	81.99±2.3	83.47±2.2	73.90±3.2	53.01±0.6	64.11 ←	
random	LT	87.94 ± 0.3	46.38 ± 0.9	97.13±0.4	46.70 ± 3.7	55.13±2.3	77.68±1.0	85.74 ± 0.6	92.59±0.6	77.57±1.8	56.78 ± 0.5	$72.36 \leftarrow$	
entropy	ST	87.86 ± 1.1	13.75 ± 2.0	83.85 ± 2.0	38.85 ± 3.5	48.48±3.4	74.98 ± 4.2	81.45±4.2	82.97±2.4	79.39 ± 1.3	48.42±2.2	64.00 _0.11	
	LT	89.12 ± 0.1				51.73±2.7						72.55 †0.19	
badge	ST			l .		47.34±2.5	l .			l .		64.65 †0.54	
	LT				_							74.50 12.14	
coreset	ST	88.11±1.0		l .		l	l .			l .	48.36±3.3	61.39 \\ \pi2.72	
	LT	00.00=0.0				51.31±1.4						$72.88 \uparrow 0.52$	
cal	ST	87.69 ± 0.8	12.82±1.9	85.99±2.2	39.02 ± 5.3	45.95±1.6	72.09±2.8	81.66±2.7	82.78±2.3	76.33±7.0	49.35±3.4	63.37 \ \ 0.74	
	LT	89.13±0.4	38.80 ± 2.0	95.34 ± 0.5	50.24 ± 4.1	53.00±3.3	78.07±0.7	85.60 ± 4.3	93.03 ± 0.8	82.12±1.9	56.39±1.0	72.17 \(\psi_{0.19} \)	
					High D	ata Budge	et: 100 + 15	600					
random	ST	89.31 ± 0.4	49.79±0.5	95.89 ± 0.5	43.46 ± 3.0	59.38 ± 2.7	80.52 ± 1.1	87.43 ± 0.8	92.19±0.6	82.56±1.1	58.55±0.2	73.91 ←	
random	LT	89.21 ± 0.1	72.64 ± 0.6	98.04±0.1	$56.47 {\pm} 0.8$	64.26±2.2	80.04±0.9	88.12 ± 0.3	94.92±0.4	82.65±1.8	59.09 ± 0.4	78.54 ←	
entropy	ST	90.34 ± 0.3	42.72 ± 2.6	94.77±0.6	55.47 ± 3.1	53.11±2.1	74.67 ± 2.1	83.81±2.9	92.71±0.7	86.45 ± 0.7	55.15±1.4	72.92 ↓0.99	
спегору		90.80 ± 0.1		l .		l	l .			l .		<u>77.67</u> ↓0.87	
badge	ST	90.74±0.2	51.65 ± 2.5	96.67±0.6	51.83 ± 2.1	55.82±3.2	75.00 ± 1.6	83.28±2.3	92.00 ± 2.1	83.63±1.6	58.72 ± 0.4	73.93 ↑0.02	
		90.78 ± 0.2	76.55 ± 0.3	98.62 ± 0.1	67.59 \pm 1.4	54.60 ± 2.8	$73.98{\pm}1.5$	$83.12{\pm}1.9$	95.68 ± 0.2	85.11 ± 2.2	58.91±1.3		
CC 78.49 \u00e40.05	_												
coreset	1.	90.04±0.4				ı						70.47 _3.44	
												76.51 \(\psi_2.03\)	
cal						ı						71.64 \(\psi_2.27\)	
	LT	90.81±0.2	64.89±1.6	97.04±0.2	63.51±4.5	56.17±3.8	73.13±1.8	83.16±1.7	95.27±1.2	86.78 ± 0.5	59.32±0.3	77.01 \$\frac{1.53}{}\$	

Table 11. Baseline **Roberta FAC results** on ActiveGLAE with three model training approaches (St, Lt), two budges sizes (500, 1600) and 5 repetitions (±standard deviation). **Best** and <u>second</u> best results are highlighted for each dataset. ↑ and ↓ demonstrate improvements over RANDOM.

	Low Data Budget: 100 + 400														
		AGN	B77	DBP	FNC1	MNLI	QNLI	SST2	TREC6	WIK	YELP5	Average			
random	ST	89.25 ± 0.3	41.68 ± 2.8	98.30 ± 0.1	40.26 ± 12.7	60.98±6.7	81.30 ± 0.6	88.83 ± 0.5	$94.52{\pm}1.6$	85.08 ± 1.0	59.91 ± 0.3	74.01 ←			
random	LT	89.11 ± 0.2	73.72 ± 0.9	98.25±0.2	54.39 ± 12.0	47.87±17.3	$80.90{\pm}1.3$	88.56±0.7	94.72 ± 1.3	84.44±1.5	59.08 ± 0.9	77.10 ←			
entropy	ST	90.47±0.3	33.40 ± 3.6	98.22±0.3	49.92 ± 12.8	43.62±7.4	81.43 ± 0.8	87.41±1.7	95.20 ± 0.5	88.11±1.1	59.53 ± 0.4	72.73 \$\frac{1.28}{}			
спору	LT	90.58 ± 0.2	66.64±2.6	98.74 ± 0.1	58.76 ± 17.0	54.44±12.0	74.82 ± 12.1	73.62 ± 19.3	95.24 ± 0.9	87.32 ± 1.5	58.25 ± 1.0	75.84 \1.26			
badge	ST	90.88 ± 0.2	45.90 ± 3.7	98.78 ± 0.0	55.79 ± 4.3	61.67 ± 7.8	74.98 ± 12.8	82.02 ± 15.6	95.00 ± 1.4	87.22 ± 1.3	59.92 ± 0.5	75.21 1.20			
buage	LT	90.49 ± 0.3	76.93 ± 1.4	98.81 ± 0.0	66.09 ± 3.1	56.04±8.8	80.61 ± 2.5	81.88 ± 15.5	96.36 ± 0.6	87.85 ± 1.0	59.35±0.8	79.44 †2.34			
coreset	ST	89.56 ± 1.4	28.18 ± 8.4	98.00±0.6	44.65 ± 9.9	55.66 ± 14.1	81.33±1.1	81.63 ± 15.4	92.32 ± 4.2	85.59 ± 1.2	56.23±4.5	71.32 \(\psi_2.69\)			
COTCSCI	LT	90.12 ± 0.4	69.74±3.9	98.66 ± 0.1	$62.23{\pm}4.2$	53.36 ± 16.4	74.77 ± 12.7	85.28 ± 4.5	95.40 ± 0.7	87.31 ± 1.7	57.64 ± 1.0	77.45 ↑0.35			
cal	ST	90.46 ± 0.1	27.77±1.3	98.24±0.5	52.45 ± 3.4	62.22±7.0	82.10 ± 1.2	77.87 ± 14.7	94.08 ± 1.1	87.45±1.2	56.88 ± 3.2	72.95 \$\frac{1.06}{}			
cai	LT	90.56 ± 0.4	62.37±2.6	95.82 ± 0.6	64.83 ± 2.9	60.12±14.3	75.94 ± 13.2	88.97±1.4	96.52±0.4	86.83 ± 0.7	59.26 ± 0.6	<u>78.12</u> ↑1.02			
					Hig	h Data Bu	idget: 100 -	+ 1500							
random	ST	90.58 ± 0.2	78.32±1.3	98.54±0.1	56.15 ± 3.7	75.04 ± 0.6	83.95 ± 0.4	90.00 ± 0.7	96.08 ± 0.8	87.44±1.3	61.21±0.2	81.73 ←			
random	LT	90.32 ± 0.2	88.08 ± 0.6	98.54 ± 0.1	$64.38{\pm}1.6$	75.34 ± 0.5	83.23 ± 0.2	89.45 ± 0.6	96.64 ± 0.4	$85.88{\pm}1.5$	60.39 ± 0.6	$83.22 \leftarrow$			
entropy	ST	92.02 ± 0.3	73.31 ± 0.6	99.05±0.0	68.72 ± 10.9	59.36 ± 15.7	81.68 ± 3.4	82.43 ± 16.7	97.16 ± 0.2	89.70±0.3	60.88±0.9	80.43 \$\frac{1.30}{}			
спогору	LT	92.36 ± 0.4	89.56±0.3	99.02±0.0	80.95 ± 4.1	52.22±17.3	77.01 ± 13.3	91.22±1.1	97.08 ± 0.3	88.59 ± 0.8	61.03 ± 0.4	82.90 \ \ 0.32			
badge	$_{ m ST}$	92.23 ± 0.2	65.19 ± 32.0	99.01 ± 0.0	55.67 ± 20.3	57.24 ± 20.8	66.46 ± 15.4	72.64 ± 18.6	96.92 ± 0.3	89.06 ± 0.7	61.62±0.4	75.61 ↓6.12			
baage	LT	92.31 ± 0.4	91.53±0.3	99.03±0.0	71.31 ± 20.1	50.27 ± 20.6	74.34 ± 12.7	72.71 ± 19.2	96.88 ± 0.4	89.06 ± 0.4	61.21±0.7	79.86 \13.36			
coreset	ST	89.56 ± 1.4	28.18 ± 8.4	98.00±0.6	44.65 ± 9.9	55.66 ± 14.1	81.33 ± 1.1	81.63 ± 15.4	92.32 ± 4.2	85.59 ± 1.2	56.23±4.5	71.32 \$\frac{10.4}{}			
COTCDCC	LT	92.09 ± 0.3	89.95 ± 0.9	99.01±0.0	81.54 ± 1.2	48.47±19.0	70.33 ± 16.6	73.72 ± 19.4	96.96 ± 0.6	81.15 ± 15.6	54.63 ± 8.4	78.78 ↓4.44			
cal	ST	92.22 ± 0.3	67.29 ± 3.3	99.04 ± 0.0	64.77±3.8	50.66 ± 20.2	70.68 ± 16.9	75.05 ± 20.5	97.08 ± 0.4	89.28 ± 0.5	60.81±1.4	76.69 \$\frac{1}{5.04}\$			
	LT	92.23 ± 0.3	86.38±0.9	98.90 ± 0.1	59.19 ± 27.9	57.19 ± 16.4	70.41 ± 16.7	88.03±4.7	97.32±0.3	89.27±0.5	61.43 ± 0.3	80.03 \(\pm\)3.19			

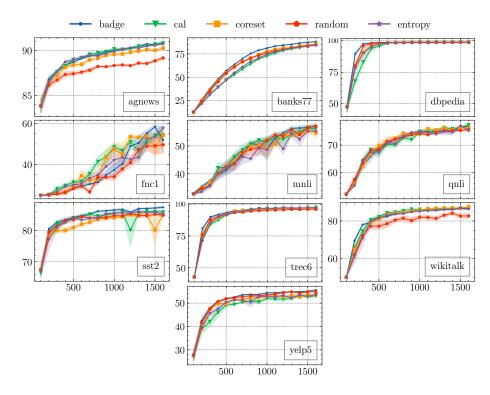


Fig. 10. Baseline learning curves for DistilBERT on ACTIVEGLAE reporting test accuracy with ST, learning rate of 5e-5 and 5 repetitions. The shaded area marks the standard error.

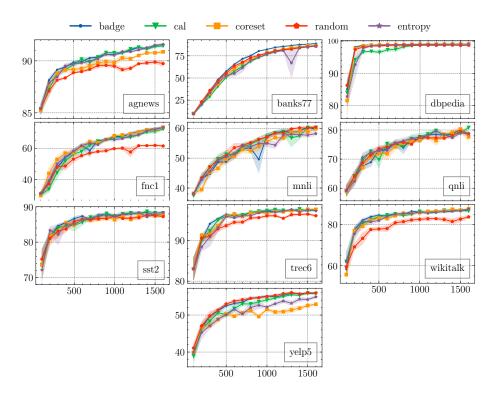


Fig. 11. Baseline learning curves for DistilBERT on ACTIVEGLAE reporting test accuracy with LT, learning rate of 5e-5 and 5 seeds. The shaded area marks the standard error.

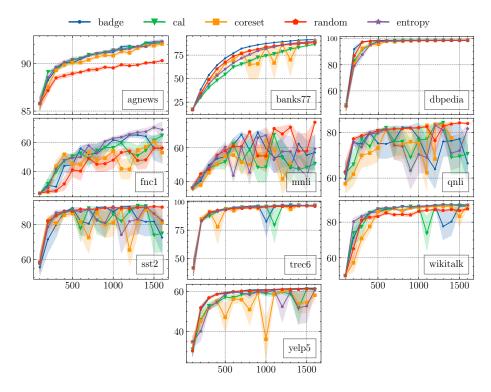


Fig. 12. Baseline learning curves for Roberta on ActiveGLAE reporting test accuracy with St, learning rate of 5e-5 and 5 repetitions. The shaded area marks the standard error.

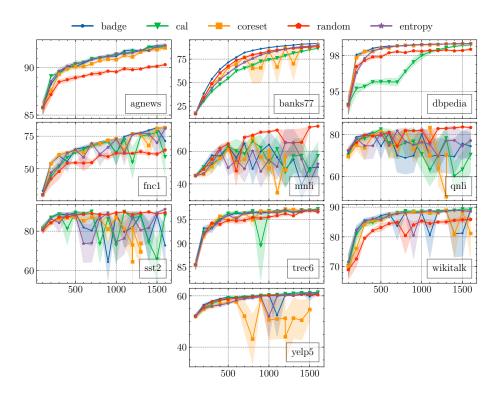


Fig. 13. Baseline learning curves for Roberta on ActiveGLAE reporting the test accuracy with Lt, a learning rate of 5e-5 and 5 repetitions. The shaded area marks the standard error.

E Ablations

For our ablations, we chose selected parameters in a DAL regime that can be important factors in the performance of query strategies and, accordingly can produce randomness in the experiment design:

- Query size: Instead of n=15 cycle iterations and a query size of b=100, we investigate a more fine-grained setting with n=60 and b=25. While the budget does not change, it leads to more model update steps and a higher runtime.
- **Pool subset**: Instead of using a subset of 10k of the unlabeled pool $\mathcal{U}^*(t)$ at each cycle iteration as our baseline, we query the complete unlabeled pool $\mathcal{U}(t)$. Depending on the available unlabeled pool size, it can increase the experiment runtime significantly (approximately by a factor of 10 per query batch).
- Model warm-start: Instead of re-training the model from scratch at each cycle iteration, we utilize the model parameters θ_{t-1} from the previous iteration for re-training.

We focus on BERT since it is the most popular one of the investigated PLMs. Due to computational reasons and experiment runtime, we only use six out of the ten ActiveGlae data sets for the pool subset ablation. Additionally, we transfer the results based on random sampling for investigating the pool subset and the query size from our baseline results since the results are independent of the respective ablation.

Table 12. Ablation **BERT AUC** results on ACTIVEGLAE with ST and LT, two budget sizes (500, 1600), and 5 repetitions (± standard deviation). **Best** and <u>second</u> best results are highlighted for each dataset. ↑ and ↓ demonstrate improvements over RANDOM. This ablation deals with the **query size**.

Low Data Budget: 100 + 400														
		AGN	B77	DBP	FNC1	MNLI	QNLI	SST2	TREC6	WIK	YELP5	Average	Baseline	
random	ST	$85.39{\pm}1.8$	11.02 ± 3.1	79.52 ± 4.2	31.66 ± 4.6	41.24±0.9	63.59 ± 2.0	81.96±1.9	84.19±3.8	68.11±1.4	43.46 ± 2.0	59.01 ←	59.01	
	LT	87.68±0.3	$34.52{\pm}1.6$	96.59 ± 0.4	43.92 ± 4.8	46.06±1.6	67.64 ± 1.9	82.10±2.3	90.72 ± 0.9	72.23±3.6	48.80 ± 1.6	$67.02 \leftarrow$	67.02	
entropy	ST	84.29 ± 2.3	12.51 ± 2.0	81.68 ± 6.1	33.94 ± 3.5	42.34±1.0	65.35 ± 1.9	82.35±1.6	85.33±1.4	76.83 ± 1.2	43.90 ± 0.6	60.85 1.84	58.18	
спагору	LT	88.63±0.3	$\underline{37.60}{\pm}2.5$	97.30±0.6	48.81 ± 2.9	46.58 ± 1.2	68.77±2.8	83.78±1.1	92.51 ± 0.9	79.23 ± 0.6	46.27 ± 0.9	<u>68.95</u> ↑1.93	67.28	
badge	ST	87.00±1.5	12.99 ± 2.7	86.93 ± 0.5	34.78 ± 3.8	43.48 ± 0.8	64.82 ± 2.7	82.31±3.0	87.31±2.1	76.42±1.0	46.43 ± 1.2	62.25 ↑3.24	60.96	
badge	LT	88.82 ± 0.3	39.59 ± 1.9	97.96 ± 0.5	48.84 ± 3.9	45.17 ± 2.2	68.46 ± 1.9	83.96 ± 0.7	93.96±0.7	79.24 \pm 1.1	49.46 ± 1.1	69.55 †2.53	67.97	
coreset	ST	84.51±1.3	10.73 ± 2.1	78.09 ± 2.5	35.58 ± 3.2	41.34 ± 2.5	63.68 ± 2.7	78.17±3.6	84.33±2.6	72.26 ± 2.0	43.47±1.8	59.22 ↑0.21	58.12	
	LT	88.34±0.3	$35.54{\pm}2.5$	97.31 ± 0.3	50.10±3.3	46.35 ± 2.8	67.15 ± 2.7	82.67±1.7	93.12 ± 0.9	77.51±1.1	45.70 ± 1.6	68.38 11.36	67.42	
cal	ST	84.19 ± 2.4	10.46 ± 2.0	78.73±7.6	35.68 ± 4.7	43.46±1.9	65.55 ± 2.0	81.84±2.1	82.46±3.9	75.78 ± 1.7	42.87 ± 2.1	60.10 11.09	57.86	
cai	LT	88.79 ± 0.4	$34.07{\pm}3.4$	96.14±0.8	49.40 ± 2.0	46.66±0.8	67.64±2.7	84.14±0.5	92.96 ± 0.5	78.28±1.6	47.50 ± 0.9	68.56 1.54	66.94	
						High Dat	a Budget:	100 + 1500						
random	ST	88.50±0.5	$39.84{\pm}3.2$	93.59 ± 1.1	$43.86{\pm}5.6$	52.62±0.8	72.79 ± 1.2	85.64±0.6	92.12 ± 0.8	78.41±1.4	52.51 ± 0.5	69.99 ←	69.99	
rundom	LT	88.97±0.2	$\underline{65.35}{\pm}0.7$	98.10 ± 0.1	54.92 ± 2.2	54.20 ±1.0	74.29 ± 0.8	85.61 ± 0.6	94.31 ± 0.4	79.21±1.6	53.38 ± 0.6	74.83 ←	74.83	
entropy	ST	88.20±0.9	39.58 ± 3.4	93.48 ± 2.0	48.56 ± 2.6	50.69 ± 1.0	72.97±1.0	85.78 ± 0.6	92.85 ± 0.8	83.02±0.7	49.77 ± 0.5	70.49 ↑0.50	70.22	
спагору	LT	90.05±0.1	$65.16{\pm}2.1$	98.51 ± 0.2	61.30 ± 1.3	52.82 ± 0.8	74.35±1.4	86.40 ± 0.5	95.53 ± 0.4	83.83 ± 0.4	49.90 ± 0.7	75.78 ↑0.95	75.44	
badge	ST	89.70±0.5	$42.32{\pm}2.5$	95.19 ± 0.2	49.74 ± 2.6	52.47 ± 0.3	73.16 ± 1.6	86.09±1.1	93.89 ± 0.8	82.84±0.4	53.04 ± 0.5	71.84 1.85	71.76	
Dauge	LT	90.28 ± 0.2	68.62 ± 1.2	98.71 ± 0.1	61.87 ± 1.6	52.65 ± 1.0	74.30 ± 0.7	86.28 ± 0.5	96.17±0.3	83.71 ± 0.7	53.40 ± 0.6	76.60 1.77	76.41	
coreset	ST	88.04±0.5	35.47 ± 3.6	91.95 ± 1.2	48.43 ± 1.9	49.80 ± 1.7	72.59 ± 1.4	83.85±1.6	92.76 ± 0.9	81.67±0.9	50.13 ± 0.7	69.47 \ \ 0.52	69.79	
	LT	89.58±0.2	$64.34{\pm}1.7$	98.50 ± 0.1	61.80 ± 1.8	53.07±1.4	74.22 ± 1.3	85.10±0.9	95.70 ± 0.4	83.35±0.7	$48.94{\pm}1.3$	75.46 ↑0.63	75.57	
cal	ST	88.68±0.9	34.03 ± 3.3	91.61±2.9	48.78 ± 3.0	51.93 ± 1.2	73.08 ± 0.6	85.70±0.6	92.32±1.2	83.20 ± 0.5	50.34 ± 0.4	69.97 \$\dagger\$0.02	69.71	
cai	LT	90.20 ± 0.2	$63.32 {\pm} 2.4$	98.13±0.2	62.07 \pm 1.0	53.31 ± 0.9	$74.08{\pm}1.1$	86.51 ± 0.7	95.85 ± 0.3	83.35±0.7	$51.85{\pm}0.6$	$75.87 \uparrow 1.04$	75.63	

Table 13. Ablation **FAC** results on ACTIVEGLAE with ST and LT, two budget sizes (500, 1600), and 5 repetitions (\pm standard deviation). **Best** and <u>second</u> best results are highlighted for each dataset. \uparrow and \downarrow demonstrate improvements over RANDOM. This ablation deals with the **query size**.

Low Data Budget: 100 + 400													
		AGN	B77	DBP	FNC1	MNLI	QNLI	SST2	TREC6	WIK	YELP5	Average	Baseline
random	ST	89.00±0.2	27.96 ± 9.5	98.58 ± 0.1	40.97 ± 12.3	51.65 ± 3.0	70.32 ± 6.2	86.17±0.6	93.04±0.6	77.98±4.3	54.64±0.7	69.03 ←	69.03
	LT	88.96 ± 0.2	63.42 ± 1.2	98.57 ± 0.1	$55.23{\pm}2.5$	53.48 ±2.9	74.17 ± 1.3	86.51±0.8	94.48±1.0	78.15±2.9	53.76 ± 0.8	$74.67 \leftarrow$	74.67
entropy	ST	88.93 ± 0.5	26.95 ± 9.1	98.57±0.3	45.70 ± 4.9	50.61 ± 1.2	70.72 ± 6.6	86.81±1.1	94.68±0.6	83.01±1.5	49.79 ± 1.7	69.58 ↑0.55	69.76
cheropy	LT	89.67 ± 0.2	62.03 ± 1.3	98.96 ± 0.0	57.94 ± 5.4	51.34±2.2	73.21 ± 1.8	86.44±0.9	95.96±0.7	83.64±1.4	48.93±0.5	74.81 ↑0.14	74.70
badge	ST	89.94 ± 0.5	27.25±11.0	98.83 ± 0.1	48.60 ± 3.5	51.56 ± 2.4	71.90 ± 6.7	87.52 ± 0.3	95.80 ± 0.9	83.25±1.4	53.13±1.3	70.78 1.75	71.24
baage	LT	90.18 ± 0.4	67.73±2.0	98.99 ± 0.0	61.72 ± 2.1	51.50 ± 1.6	75.20 ± 1.9	86.72±1.1	96.48 ± 0.5	$83.42{\pm}1.1$	53.65±1.0	76.56 1.89	76.11
coreset	ST	88.77±0.7	26.40±5.7	96.41±2.6	41.65±11.5	46.72 ± 2.6	73.33 ± 1.5	85.11±2.0	95.40±0.6	83.70 ± 1.3	49.29±4.2	68.68 \ \ \ 0.35	69.36
	LT	89.37 ± 0.4	$61.25{\pm}2.2$	98.96 ± 0.0	61.52 ± 2.7	51.52 ± 2.0	73.68 ± 2.0	84.77±1.5	95.60±0.7	83.25±1.8	47.80 ± 1.6	74.77 10.10	74.81
cal	ST	89.91±0.6	27.56±5.2	94.49 ± 5.3	48.29 ± 9.7	51.94 ± 2.7	73.55 ± 1.0	86.10±0.9	95.40±0.9	84.62±0.9	52.92±0.7	70.48 ↑1.45	69.50
car	LT	90.04 ± 0.4	58.96 ± 3.4	98.91 ± 0.1	57.77±3.7	51.81 ± 2.1	73.98±2.3	86.26±0.9	96.68±0.6	83.28±1.8	52.03±1.2	<u>74.97</u> ↑0.30	74.79
						High Data	a Budget:	100 + 1500					
random	ST	90.30 ± 0.3	$69.45{\pm}1.0$	98.77 ± 0.1	54.91 ± 3.0	61.19 ± 1.0	78.59 ± 1.0	87.61±0.6	96.08±0.8	84.01±1.9	56.77 ± 0.4	77.77 ←	77.77
rundom	LT	89.74 ± 0.5	85.82 ± 0.5	98.71 ± 0.1	61.45 ± 1.1	60.39±0.9	78.77±0.7	87.25±0.8	96.08±0.7	83.81±1.4	55.99±0.3	79.80 ←	79.80
entropy	ST	90.67 ± 0.4	62.51 ± 16.4	99.15 ± 0.0	55.94 ± 10.7	58.87 ± 1.7	79.81 ± 2.6	88.44±0.3	97.52±0.5	79.76 ± 14.9	55.97±0.7	76.87 \$\\$_0.90\$	78.62
опогору	LT	91.71 ± 0.3	87.01 ± 0.8	99.14 ± 0.0	73.62 ± 1.3	59.57±1.4	79.51 ± 0.7	87.87±0.9	97.44±0.3	86.60±0.9	53.56 ± 1.1	81.60 1.80	81.55
badge	ST	91.78 ± 0.3	73.62 ± 1.3	99.11±0.0	64.52 ± 2.5	61.89 ± 0.8	80.82 ± 1.6	89.15 ± 0.5	97.60 ± 0.4	87.61±0.8	57.12 ± 0.3	80.32 ↑2.55	80.11
baage	$_{ m LT}$	91.66 ± 0.3	87.96±2.6	99.13 ± 0.0	74.15 ± 2.2	59.85 ± 0.8	78.92 ± 1.6	88.28±0.4	97.36±0.4	86.83±0.9	56.46±0.5	82.06 12.26	81.89
coreset	ST	90.19 ± 0.2	60.95 ± 13.2	99.10±0.0	57.83 ± 5.2	59.61 ± 1.2	79.72 ± 0.9	87.64±0.7	97.04±0.8	87.60±1.2	54.87±0.9	77.46 \ \ 0.31	77.74
0010000	LT	90.61 ± 0.4	87.08 ± 0.9	99.11 ± 0.0	74.16 ± 2.5	59.79 ± 1.6	80.89 ± 1.1				51.44±1.7	81.57 1.77	81.38
cal	ST	91.28 ± 0.3	$64.66{\pm}4.8$	99.13 ± 0.1	61.53 ± 3.1	58.09 ± 5.3	78.23 ± 1.6	89.06 ± 0.4	97.28 ± 0.3	87.91±0.3	54.88 ± 0.3	78.20 ↑0.43	77.41
	LT	91.73 ± 0.0	86.37 ± 0.3	99.12 ± 0.0	73.28 ± 2.0	59.36 ± 1.7	78.28±1.9	87.89±1.7	97.48 ± 0.4	86.46±1.2	55.54±0.7	81.55 1.75	81.23

Table 14. Ablation **BERT AUC** results on a subset of ACTIVEGLAE with ST and LT, two budget sizes (500, 1600), and 5 repetitions (± standard deviation). **Best** and second best results are highlighted for each dataset. ↑ and ↓ demonstrate improvements over RANDOM. This ablation deals with the **pool subset**.

Low Data Budget: $100 + 400$										
		AGN	FNC1	MNLI	QNLI	SST2	WIK	Average	Baseline	
random	st	$85.39{\pm}1.8$	31.66 ± 4.6	$41.24{\pm}0.9$	63.59 ± 2.0	81.96±1.9	68.11±1.4	61.99 ←	61.99	
	LT	87.68±0.3	43.92 ± 4.8	$46.06{\pm}1.6$	67.64±1.9	82.10±2.3	72.23 ± 3.6	66.60 ←	66.60	
entropy	ST	$79.84{\pm}6.3$	31.46 ± 2.5	$41.83{\pm}1.5$	62.48±2.3	82.00±1.3	72.47±2.2	61.68 \(\psi_0.31 \)	62.71	
ептору	LT	87.64±0.3	41.92 ± 3.2	$\underline{46.39}{\pm}1.5$	66.13±3.5	82.46±0.8	76.99 ± 3.1	66.92 †0.32	68.08	
badge	$_{ m ST}$	$85.66{\pm}2.2$	33.78 ± 4.5	40.78 ± 1.2	64.24±2.0	81.91±2.9	73.60 ± 1.2	63.33 1.34	63.75	
badge	LT	88.51 ± 0.4	46.61 ± 4.0	46.47 ± 1.4	66.29 ± 1.7	83.06 ± 1.8	77.55 ± 1.8	68.08 1.48	67.98	
coreset	$_{ m ST}$	85.26 ± 2.0	35.22 ± 3.5	39.69 ± 3.0	61.78±3.4	76.62 ± 4.8	$64.95{\pm}2.6$	60.59 \$\frac{1.40}{}\$	61.78	
COLESCI	LT	87.63±0.4	47.27 ±3.9	$44.05{\pm}1.1$	66.10±3.0	80.55 ± 2.2	72.49 ± 4.0	$66.35 \downarrow 0.25$	67.86	
cal	$_{ m ST}$	$81.94{\pm}5.8$	$32.34{\pm}2.2$	$43.15{\pm}2.6$	62.55 ± 2.6	$80.95{\pm}2.5$	69.47 ± 3.0	61.73 \ \ \ 0.26	63.08	
Cai	LT	87.89 ± 0.4	44.40 ± 2.5	$45.84{\pm}1.2$	67.01 ± 1.8	82.88 ± 1.7	77.62 ± 2.2	<u>67.61</u> ↑1.01	67.62	
				High Dat	a Budget:	100 + 1500				
random	ST	88.50 ± 0.5	43.86 ± 5.6	52.62 ± 0.8	72.79 ± 1.2	85.64 ± 0.6	78.41±1.4	70.30 ←	70.30	
random	LT	88.97±0.2	54.92 ± 2.2	54.20 ± 1.0	74.29 ± 0.8	85.61±0.6	79.21 ± 1.6	72.87 ←	72.87	
entropy	ST	87.04±1.8	48.13±0.9	51.27 ± 1.1	71.84±1.0	86.04±0.3	82.00±1.0	71.05 ↑0.75	71.67	
ептору	LT	89.48±0.2	58.94 ± 0.6	$52.95{\pm}1.3$	73.80 ± 1.2	85.99 ± 0.1	83.20 ± 0.9	74.06 1.19	74.69	
badge	ST	89.31±0.6	48.15±3.9	51.20 ± 1.2	72.79 ± 0.9	85.87±0.9	82.68 ± 0.6	71.67 1.37	72.41	
baage	LT	90.14 \pm 0.2	61.36 ± 1.7	$\underline{53.48}{\pm}1.3$	73.89 ± 1.3	86.41 ± 0.7	83.37 ± 0.5	74.77 1.90	74.84	
coreset	ST	88.60 ± 0.5	50.62 ± 1.3	49.04 ± 2.7	71.88 ± 1.4	82.97±1.8	79.92 ± 1.0	70.51 ↑0.21	71.02	
	LT	89.16 ± 0.2	60.30 ± 1.1	$51.81 {\pm} 0.8$	73.46 ± 0.8	84.86±0.9	$82.22{\pm}1.6$	73.64 †0.77	74.56	
cal	ST	87.94±1.8	47.18 ± 2.8	52.14 ± 1.2	73.19 ± 0.9	85.34±1.9	81.24±1.4	71.17 ↑0.87	71.76	
	LT	89.77 ± 0.2	60.00±1.5	53.07 ± 1.0	74.06 ± 0.8	86.15 ± 0.7	83.70 ±0.7	<u>74.46</u> ↑1.59	74.69	

Table 15. Ablation **BERT FAC** results on a subset of ACTIVEGLAE with ST and LT, two budget sizes (500, 1600), and 5 repetitions (± standard deviation). **Best** and second best results are highlighted for each dataset. ↑ and ↓ demonstrate improvements over RANDOM. This ablation deals with the **pool subset**.

Low Data Budget: 100 + 400										
		AGN	FNC1	MNLI	QNLI	SST2	WIK	Average	Baseline	
random	ST	89.00±0.2	40.97 ± 12.3	51.65 ± 3.0	70.32 ± 6.2	86.17±0.6	77.98 ± 4.3	69.35 ←	69.35	
	LT	88.96±0.2	55.23 ± 2.5	53.48 ± 2.9	74.17±1.3	86.51 ± 0.8	78.15 ± 2.9	72.75 ←	72.75	
entropy	ST	86.27±3.3	44.06±7.6	52.04 ± 2.8	74.80 ± 2.4	84.43±4.7	82.74±1.7	70.72 ↑1.37	71.85	
спогору	LT	89.41 ± 0.2	58.55 ± 3.0	53.40 ± 2.0	74.76 ± 1.9	86.58 ± 0.5	82.19±1.7	74.15 1.40	74.34	
badge	ST	89.84 ± 0.3	40.31 ± 8.1	51.46 ± 3.1	75.14 ± 1.1	86.22 ± 1.4	83.64 ± 2.6	71.10 ↑1.75	72.09	
badge	LT	90.12±0.2	58.17 ± 2.6	$51.33{\pm}2.9$	74.48 ± 1.8	86.40±1.3	83.97±1.6	<u>74.08</u> ↑1.33	74.62	
coreset	ST	89.28±0.2	50.54 ± 6.1	46.38 ± 3.3	69.68 ± 3.4	83.10 ± 2.1	80.78 ± 2.7	69.96 ↑0.61	70.60	
COLCECT	LT	89.15±0.5	59.76 ± 1.2	50.57 ± 1.9	73.51 ± 2.3	86.10±0.9	83.91 ± 2.6	73.83 ↑1.08	73.76	
cal	ST	88.18±2.0	47.73 ± 4.6	$48.25{\pm}5.6$	75.43 ±2.3	85.69 ± 1.5	83.09 ± 1.6	71.40 ↑2.05	72.12	
car	LT	89.70±0.2	57.72 ± 4.5	52.24 ± 2.3	74.32±2.2	86.74±0.6	83.53±1.4	74.04 ↑1.29	74.18	
				High Data	a Budget:	100 + 1500				
random	ST	90.30±0.3	54.91 ± 3.0	61.19 ± 1.0	78.59 ± 1.0	87.61 ± 0.6	84.01±1.9	76.10 ←	76.10	
random	LT	89.74±0.5	61.45 ± 1.1	60.39 ± 0.9	78.77±0.7	87.25 ± 0.8	83.81 ± 1.4	76.90 ←	76.90	
entropy	ST	90.50±0.6	63.08 ± 2.4	59.90 ± 1.8	79.64 ± 1.4	89.08 ± 0.4	87.19 ± 0.7	78.23 ↑2.13	77.42	
спогору	LT	90.91±0.3	73.27 ± 1.9	53.64 ± 11.0	79.30 ± 0.5	88.42±0.3	87.14 ± 0.6	78.78 ↑1.88	79.66	
badge	ST	91.53±0.2	62.37 ± 2.0	59.60 ± 2.0	79.27±0.8	80.16±15.5	87.55±0.6	76.75 ↑0.65	79.01	
Dauge	LT	91.38 ± 0.2	$74.55 {\pm} 0.4$	$59.96{\pm}2.8$	79.04 ± 0.6	88.19 ± 0.7	86.26 ± 0.6	79.90 \(\frac{1}{3.00}\)	79.57	
coreset	ST	90.27±0.6	59.93±3.5	59.29 ± 1.8	79.52 ± 1.5	85.71±1.9	88.09±1.0	77.14 ↑1.04	76.80	
	LT	90.59±0.2	71.50 ± 0.9	58.75 ± 0.9	80.34±1.7	87.66±0.6	87.21±1.1	79.34 ↑2.44	79.62	
cal	ST	90.98±0.5	57.14±6.9	60.10 ± 3.1	80.16 ± 1.0	89.04 ± 0.8	87.64 ± 0.7	77.51 ↑1.41	76.67	
	LT	91.25±0.3	72.76 ± 2.1	59.03 ± 1.2	79.74±0.7	87.84±0.4	86.84±0.8	$79.58 \uparrow 2.68$	79.98	

Table 16. Ablation **BERT AUC** results on ACTIVEGLAE with ST and LT, two budget sizes (500, 1600), and 5 repetitions (± standard deviation). **Best** and <u>second</u> best results are highlighted for each dataset. ↑ and ↓ demonstrate improvements over RANDOM. This ablation deals with the **model warm-start**.

Low Data Budget: 100 + 400													
		AGN	B77	DBP	FNC1	MNLI	QNLI	SST2	TREC6	WIK	YELP5	Average	Baseline
random	ST	$85.39{\pm}1.8$	11.02 ± 3.1	79.52 ± 4.2	31.66 ± 4.6	41.24±0.9	63.59 ± 2.0	81.96±1.9	84.19±3.8	68.11 ± 1.4	$43.46{\pm}2.0$	59.01 ←	59.01
	LT	87.68±0.3	$34.52{\pm}1.6$	96.59 ± 0.4	$43.92{\pm}4.8$	46.06±1.6	67.64±1.9	82.10±2.3	90.72±0.9	72.23 ± 3.6	48.80 ± 1.6	67.02 ←	67.02
entropy	ST	85.91±2.2	19.68 ± 2.9	82.23 ± 5.2	40.70 ± 4.2	43.78 ± 0.7	67.11±2.2	82.90±1.4	85.86±3.7	75.86 ± 1.7	45.21 ± 1.3	62.92 ↑3.91	58.18
	LT	88.24 ± 0.6	$39.17{\pm}1.6$	95.55 ± 1.1	$47.45{\pm}6.3$	45.83±1.1	67.98±3.5	83.27 ± 1.4	91.01±1.2	$78.45 {\pm} 2.3$	$45.95{\pm}1.6$	68.29 1.27	46.57
badge	ST	86.16±2.0	24.77 ± 2.5	87.23±2.2	41.35 ± 5.1	45.28 ± 1.2	66.55 ± 3.2	82.64±1.4	87.45±2.7	75.86 ± 0.9	46.16±1.0	64.35 ↑5.34	60.96
badge	LT	88.35 ± 0.1	43.39 ± 1.4	96.36 ± 1.1	48.30 ± 5.3	46.64±1.3	68.41 ± 3.3	83.61 ± 1.1	91.90 ± 0.8	79.16 ± 1.4	$46.67{\pm}1.2$	69.28 †2.26	67.97
coreset	ST	85.91±2.0	$22.31{\pm}2.3$	87.69 ± 1.9	41.61 ± 4.3	44.14±1.5	66.49±3.4	80.46±4.3	86.59±2.6	73.78 ± 2.1	45.02 ± 1.7	63.40 ↑4.39	58.12
COLCOCC	LT	87.96±0.5	$\underline{42.76}{\pm}1.8$	96.33±1.1	45.81 ± 7.1	45.01±1.4	67.33±4.6	81.63±2.4	91.62 ± 1.4	$\underline{78.82}{\pm}1.8$	46.11 ± 1.6	<u>68.34</u> ↑1.32	67.42
cal	ST	86.26±1.8	19.71 ± 2.4	80.54±5.7	41.08 ± 4.5	42.91±2.0	65.91 ± 2.9	81.59 ± 2.4	86.57±2.9	74.84 ± 1.7	43.35 ± 1.2	62.28 ↑3.27	57.86
	LT	88.23±0.5	36.94 ± 2.2	94.92 ± 0.7	48.00 ± 4.2	46.10 ± 0.6	68.47±3.8	82.46±2.1	90.69 ± 2.1	78.68 ± 1.2	46.70 ± 1.7	68.12 1.10	66.94
						High Dat	a Budget:	100 + 1500					
random	ST	88.50 ± 0.5	$39.84{\pm}3.2$	93.59 ± 1.1	$43.86{\pm}5.6$	52.62±0.8	72.79 ± 1.2	$85.64{\pm}0.6$	92.12±0.8	78.41 ± 1.4	52.51 ± 0.5	69.99 ←	69.99
ranaom	LT	88.97±0.2	$65.35{\pm}0.7$	98.10 ± 0.1	54.92 ± 2.2	54.20 ± 1.0	74.29 ± 0.8	85.61±0.6	94.31±0.4	79.21 ± 1.6	53.38 ± 0.6	74.83 ←	74.83
entropy	ST	89.21±0.8	60.16 ± 1.2	94.43±1.4	58.64 ± 1.9	52.64±0.7	75.84 \pm 1.3	86.09 ± 0.5	93.67±1.2	83.36 ± 0.3	48.99 ± 0.3	74.30 ↑4.30	70.22
спиору	LT	89.80±0.2	$68.06{\pm}1.3$	97.97 ± 0.3	$\underline{61.25}{\pm}2.6$	53.27±1.0	75.40 ± 1.7	85.63 ± 0.7	94.97 ± 0.5	$84.04{\pm}0.6$	$48.31 {\pm} 0.7$	<u>75.87</u> ↑1.04	75.44
badge	ST	89.19 ± 0.5	65.20 ± 1.1	95.78 ± 0.6	59.14 ± 1.8	53.73 ± 1.0	75.52 ± 1.7	86.07 ± 0.9	94.25±0.8	83.31 ± 0.7	50.82 ± 0.7	75.30 ↑5.31	71.76
buage	LT	89.68 ± 0.1	72.43 ± 1.0	98.21 ± 0.3	61.14 ± 1.9	52.68 ± 0.8	75.43 ± 1.5	85.66 ± 0.5	95.52 ± 0.3	84.28 ± 0.9	49.42 ± 0.8	76.45 1.62	76.41
coreset		88.76±0.6		95.90 ± 0.5		l	_					74.42 ↑4.43	69.79
L.	LT	89.20±0.1		98.17 ± 0.3		l						75.69 †0.86	75.57
cal	ST	89.32±0.6	58.48 ± 1.2	93.83 ± 1.6	59.43 ± 2.7	51.81±1.7	74.85 ± 1.8	85.89 ± 0.9	94.08±0.8	83.27 ± 0.6	$48.46{\pm}0.8$	73.94 ↑3.95	69.71
	LT	89.78 ± 0.3	$58.07{\pm}2.5$	96.70 ± 0.6	61.54 ± 1.2	52.75±0.8	75.27±1.4	85.40±1.1	94.85±0.7	83.95 ± 0.6	49.05 ± 0.6	74.74 \ \ 0.09	75.63

Table 17. Ablation **BERT FAC** results on ACTIVEGLAE with ST and LT, two budget sizes (500, 1600), and 5 repetitions (± standard deviation). **Best** and <u>second</u> best results are highlighted for each dataset. ↑ and ↓ demonstrate improvements over RANDOM. This ablation deals with the **model warm-start**.

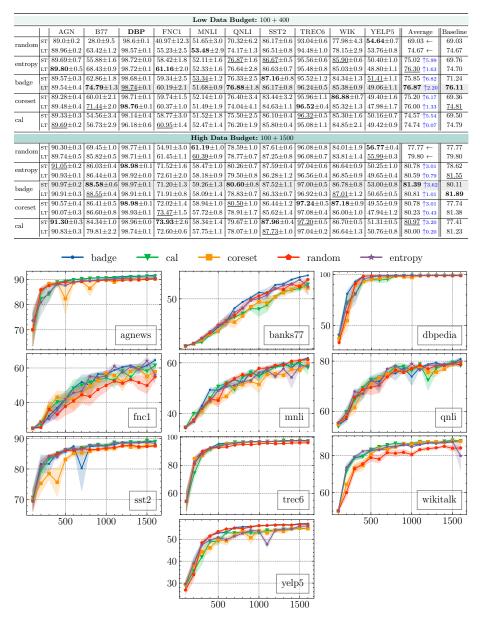


Fig. 14. Ablation learning curves for BERT on ACTIVEGLAE reporting the test accuracy with ST, a learning rate of 5e-5 and 5 seeds. The shaded area marks the standard error. This ablation deals with the query size.

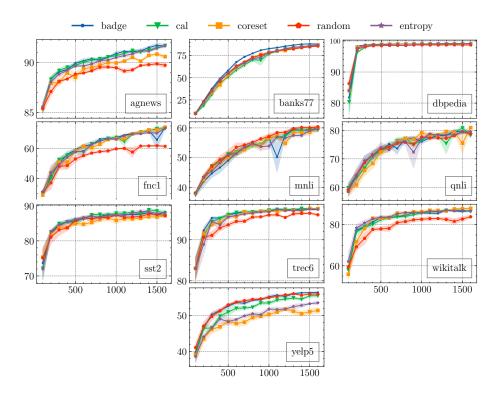


Fig. 15. Ablation learning curves for BERT on ACTIVEGLAE reporting the test accuracy with LT, a learning rate of 5e-5 and 5 seeds. The shaded area marks the standard error. This ablation deals with the query size.

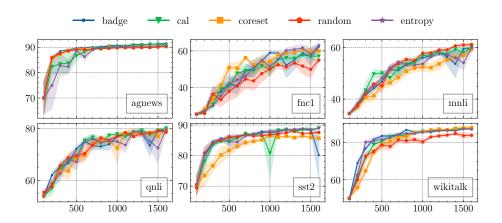


Fig. 16. Ablation learning curves for BERT on ACTIVEGLAE reporting the test accuracy with ST, a learning rate of 5e-5 and 5 seeds. The shaded area marks the standard error. This ablation deals with the **pool subset**.

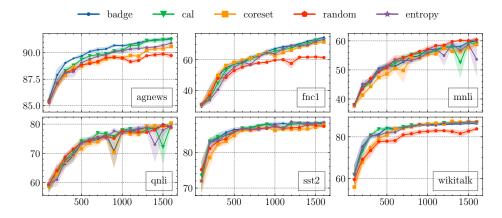


Fig. 17. Ablation learning curves for BERT on ACTIVEGLAE reporting the test accuracy with LT, a learning rate of 5e-5 and 5 seeds. The shaded area marks the standard error. This ablation deals with the **pool subset**.

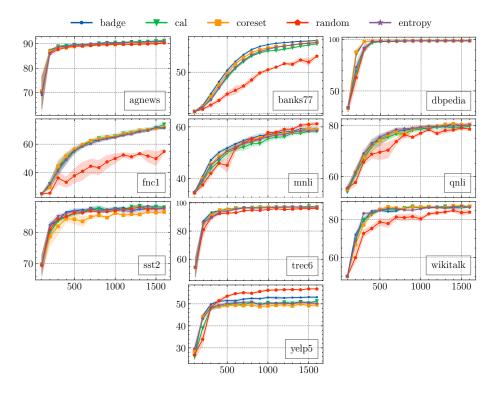


Fig. 18. Ablation learning curves for BERT on ACTIVEGLAE reporting the test accuracy with ST, a learning rate of 5e-5 and 5 seeds. The shaded area marks the standard error. This ablation deals with the model warm-start.

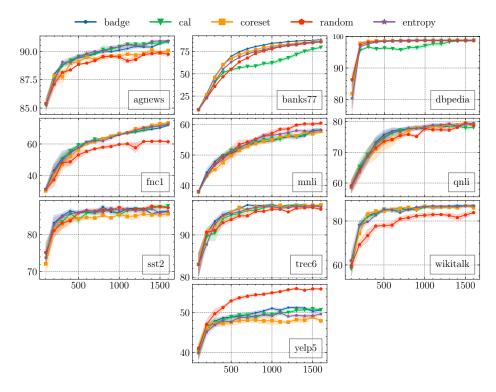


Fig. 19. Ablation learning curves for BERT on ACTIVEGLAE reporting the test accuracy with LT, a learning rate of 5e-5 and 5 seeds. The shaded area marks the standard error. This ablation deals with the model warm-start.