

A SAT Solver + Computer Algebra Attack on the Minimum Kochen–Specker Problem

Zhengyu Li^{1*}, Curtis Bright² and Vijay Ganesh¹

¹University of Waterloo, Canada.

²University of Windsor, Canada.

*Corresponding author(s). E-mail(s): brian.li@uwaterloo.ca;
Contributing authors: cbright@uwindsor.ca; vganesh@uwaterloo.ca;

Abstract

One of the foundational results in quantum mechanics is the Kochen–Specker (KS) theorem, which states that any theory whose predictions agree with quantum mechanics must be *contextual*, i.e., a quantum observation cannot be understood as revealing a pre-existing value. The theorem hinges on the existence of a mathematical object called a KS vector system. While many KS vector systems are known to exist, the problem of finding the minimum KS vector system has remained stubbornly open for over 55 years. In this paper, we present a new method based on a combination of a satisfiability (SAT) solver and a computer algebra system (CAS) to address this problem. Our approach shows that a KS system in three dimensions must contain at least 24 vectors and is over 35,000 times faster at deriving the previously known lower bound of 22 vectors than the prior CAS-based searches. Moreover, we generate certificates that allow verifying our results without trusting either the SAT solver or the CAS. The increase in efficiency derives from the fact we are able to exploit the powerful combinatorial search-with-learning capabilities of a SAT solver together with the CAS-based isomorph-free exhaustive generation method of orderly generation. To the best of our knowledge, our work is the first application of a SAT solver to a problem in the realm of quantum foundations and the first lower bound in the minimum Kochen–Specker problem with a computer-verifiable proof certificate.

Keywords: Satisfiability (SAT) solving, symbolic computation, symmetry breaking, isomorph-free generation, Kochen–Specker systems

Authors	Year	Bound
Kochen, Specker	1967	≤ 117
Jost	1976	≤ 109
Conway, Kochen	1990	≤ 31
Arends, Ouaknine, Wampler	2009	≥ 18
Uijlen, Westerbaan	2016	≥ 22
Li, Bright, Ganesh	2022	≥ 23
Kirchweger, Peitl, Szeider / Present work (independent)	2023	≥ 24

Table 1: A chronology of the bounds on the size of the minimum KS vector system. The present work (presented at CanaDAM 2023) was performed independently of Kirchweger, Peitl, Szeider (will be presented at IJCAI 2023).

1 Introduction

Quantum Mechanics (QM) is often described as one of the most successful physical theories of all time, and yet many questions regarding the foundations of QM continue to be hotly contested. Many interpretations of QM, i.e., mappings from mathematical formalisms of QM to physical phenomena, have been proposed in order to resolve these foundational questions. Hidden-variable theories are attempts at understanding counterintuitive QM phenomena through a deterministic lens by positing the existence of unobservable entities or hidden variables [1] that the standard QM theory does not account for (and hence is deemed incomplete). Over the years, many constraints have been imposed on hidden-variable theories, e.g., Bell’s inequalities that rule out the possibility of *local* hidden-variable theories that are also in agreement with the predictions of QM [2]. In a similar vein, Simon Kochen and Ernst Specker [3] (and independently John Bell [4]) proved their famous KS theorem that essentially asserts that non-contextual hidden variable theories cannot reproduce the empirical predictions of quantum mechanics.

The KS theorem rules out non-contextual hidden-variable theories by establishing the existence of a finite set of three-dimensional vectors (referred to as a *KS system*) witnessing a contradiction between non-contextuality (i.e., the assumption that observables can be assigned values prior to measurement and independent of measurement context) and the SPIN axiom of QM. The very first KS vector system, discovered in 1967, contains 117 vectors [3].

Since the publication of Kochen and Specker’s theorem in 1967, physicists and mathematicians have wondered how many vectors the smallest-sized KS vector system contains (see Table 1 and Section 3). Finding the minimum KS system (the KS problem) is not only of scientific and historical interest, but also has direct applications in quantum information processing [5]. The large size of all known KS systems has prevented physicists from using them for applications, including empirical tests of the KS theorem. Finding a minimum KS system could enable applications in the security of quantum cryptographic protocols based on complementarity [6], zero-error classical communication [7], and dimension witnessing [8].

1.1 The SAT+CAS Paradigm for Combinatorics

Despite the fantastic achievements of SAT solvers [9], they struggle on certain problems such as those containing many symmetries [10] or those requiring the usage of more advanced mathematical theories than propositional logic [11]. Much work has been done to remedy these drawbacks, including the development of sophisticated symmetry breaking techniques [12] and the development of solvers that support richer logic such as “SAT modulo theories” or SMT solvers [13]. However, the mathematical support of SMT solvers is quite limited when compared with the vast mathematical functionality available in a modern computer algebra system (CAS).

In response to this need for a solver that combines the efficient search capabilities of SAT solvers with the mathematical knowledge available in Computer Algebra Systems (CAS), a new kind of solving methodology was developed in 2015 by Edward Zulkoski, Vijay Ganesh, and Krzysztof Czarnecki [14] and independently by Erika Ábrahám [15], and has been further expanded since then by the MathCheck project [16]. This SAT+CAS solving methodology has been successfully applied to many diverse problems, including circuit verification [17, 18], automatic debugging [19], finding circuits for matrix multiplication [20], computing directed Ramsey numbers [21], and finding special kinds of sequences and matrices [22]. For other work in the intersection of symbolic computation and satisfiability checking see Matthew England’s summary [23] of the SC-Square project.

In this paper, we use the SAT+CAS solving methodology to dramatically improve the performance of searching for KS systems compared to an out-of-the-box SAT solver and all previous approaches developed to prove lower bounds in the minimum KS problem (Section 1.3). This is made possible by combining the powerful search and learning algorithms used in modern SAT solvers with an “isomorph-free exhaustive generation” approach preventing duplicate exploration of isomorphic parts of the search space. Such an approach was recently used to resolve Lam’s problem from projective geometry [24]. Although isomorph-free exhaustive generation has been used extensively in combinatorial enumeration, it has only recently been combined with SAT solving [25, 26].

The traditional approach to preventing a SAT solver from repeatedly exploring isomorphic parts of a search space is via the use of *symmetry breaking* techniques [10]. One such symmetry breaking approach is to add “static” constraints at the beginning of the search that reduce the size of the search space [27, 28]. Another approach is to “dynamically” break symmetries during the search [10, 29] such as in the SAT modulo symmetries (SMS) paradigm [30, 31]. Our approach is similar in that it also dynamically adds constraints to the problem during the solving process.

1.2 Automated Verification of Results

Verification is of utmost importance in the context of computer-assisted proofs given its mathematical nature, especially for proofs of nonexistence. Since our problem requires the solver to perform an exhaustive search, the validity of our nonexistence result is dependent on the encodings and the computational tools that used throughout the pipeline. For example, the nonexistence result crucially relies on the correctness of

the SAT solver’s search and the CAS’s isomorph-free exhaustive generation routine. However, the SAT+CAS method generates certificates that allow an independent third party to certify the correctness that the SAT solver’s search was performed correctly and also that the knowledge provided by the CAS is correct. Thus, one does not need to trust either the SAT solver or the CAS to trust that their results are correct—instead, one merely needs to trust the proof verifier is correct. This is quite significant, as SAT solvers and CASs are complicated pieces of software that typically cannot be guaranteed to be bugfree (and indeed bugs are sometimes uncovered). In contrast, a proof verifier is a much simpler piece of software. We provide details on the techniques used to certify our results in Section 8.1.

1.3 Our Contributions

In this paper, we present the first ever successful implementation of a SAT + CAS system with extensive verification aimed at problems in the realm of quantum foundations. We leverage and further improve the SAT+CAS paradigm to incorporate an isomorph-free generation method (as part of a new SAT+CAS tool, called Physics-Check), to obtain tighter lower bounds on the minimum KS problem with four orders of magnitude speedup over previous computational methods developed for this problem.¹

Specifically, we implement a robust push-and-run pipeline that incorporates a version of MapleSAT [32], the SMT solver Z3 [33], and a CAS-based isomorph-free exhaustive generation method known as orderly generation. We also describe new encoding techniques that enabled an efficient reduction of the minimum KS problem into a SAT problem. Finally, we propose an extension of the standard UNSAT proof certificate format DRAT (deletion, reverse asymmetric tautology) that enables us to construct certificates of nonexistence for KS systems without needing to trust either the SAT solver or the CAS. We provide a modified DRAT-trim [34] that can check the nonexistence proof certificates we produced.

Our new approach establishes a lower bound of 24 for the minimum size of a KS system, as opposed to the previous best of 22.² Our approach is about 35,000 times more efficient than the previous best approach [36] and we solidify previous results by finding candidates missing in previous results (see Section 8).

In order to make the paper relatively self-contained, we provide a thorough background on the KS problem (Section 2) and previous work (Section 3). Following this, we motivate our SAT encoding of the KS problem (Section 4), provide a detailed explanation of orderly generation in the context of the SAT+CAS method (Section 5), describe our usage of an SMT solver (Section 6), and describe how we exploit parallelism (Section 7). We also provide comparison of our results and runtime with previous work (Section 8).

¹We provide an easy-to-use open source repository (<https://github.com/curtisbright/PhysicsCheck>) for readers to reproduce our results.

²At the SC-Square workshop in 2022, we presented a preliminary version of this work in which we improved the lower bound to 23. The lower bound has also been improved to 24 independently by Kirchweger et al. [35] (see the remarks in Sec 3).

2 Background

We now introduce the SPIN axiom, 010-colorability, the KS theorem, and the KS vector system. We refer the reader to the quantum mechanics section in the Stanford Encyclopedia of Philosophy [1] for a deeper dive into these topics. We assume that the reader is familiar with Boolean logic and SAT solvers, please refer to the Handbook of Satisfiability [37] for a comprehensive overview.

2.1 The KS Theorem

Informally, the KS theorem states that there is a contradiction between the SPIN axiom of standard quantum mechanics and the assumption of non-contextuality. The Stanford Encyclopedia of Philosophy provides a comprehensive background to the KS theorem and stressed its importance in the foundations of quantum mechanics [1].

Spin of an Elementary Particle: In QM, spin is an intrinsic form of angular momentum carried by elementary particles. Its existence can be inferred from the Stern–Gerlach experiment [38]. In the context of this paper, a spin-1 particle is shot through a magnetic field in a given direction and continues undisturbed, deflects up, or deflects down—corresponding to 3 possible angular momentum states, namely 0, 1, and -1 . Thus, the square of this measurement in this direction is 0 or 1.

SPIN axiom: The SPIN axiom of QM states that given three pairwise orthogonal directions of measurement, the squared spin components of a spin-1 particle are 1, 0, 1 in these three directions. Thus, the observable corresponding to the question “is the squared spin 0?” measured in three mutually orthogonal direction always produce *yes* in exactly one direction and *no* in the other two orthogonal directions in 3-dimensional Euclidean space. This is the dual form presented in Uijlen and Westerbaan’s paper [36] using the ‘010’ convention rather than ‘101’, and we will follow this convection in our paper. The SPIN axiom follows from the postulates of quantum mechanics and is experimentally verifiable [39].

KS Vector System: A KS vector system can be represented in multiple ways and we describe it as a finite set of points on a sphere. As a consequence of the SPIN axiom, the squared-spin measurements along opposite directions must yield the same outcome, therefore we consider such directions equivalent and restrict the domain to the closed northern hemisphere. To define a KS vector system, we first formally define a vector system and the notion of 010-colorability. For the purposes of this paper, we limit ourselves to the 3 dimensional version of the KS problem as the size of the minimum Kochen–Specker higher dimensions has already been found [40], while the 3 dimensional case is still open despite extensive effort.

Definition 1. A *vector system* is a finite set of non-collinear points of the closed northern hemisphere of the unit sphere.

Definition 2. A vector system is *010-colorable* if there exists an assignment of 0 and 1 to each vector such that:

1. No two orthogonal vectors are assigned to 1.
2. Three mutually orthogonal vectors are not all assigned to 0.

Definition 3. A *Kochen–Specker (KS) vector system* is a vector system that is not 010-colorable.

Exhibiting the existence of a KS vector system proves the KS theorem, which essentially states that the closed northern hemisphere is not 010-colorable.

Definition 4. For a vector system \mathcal{K} , define its *orthogonality graph* $G_{\mathcal{K}} = (V, E)$, where $V = \mathcal{K}$, $E = \{(v_1, v_2) : v_1, v_2 \in \mathcal{K} \text{ and } v_1 \cdot v_2 = 0\}$.

Essentially, the vertices of $G_{\mathcal{K}}$ are the vectors in \mathcal{K} , and there is an edge between two vertices exactly when their corresponding vectors are orthogonal. Similarly, the notion of 010-colorability can be translated from a vector system to an orthogonality graph.

Definition 5. A graph G is *010-colorable* if there is a $\{0, 1\}$ -coloring of the vertices such that the following two conditions are satisfied simultaneously:

1. No two adjacent vertices are colored 1.
2. For each triangle, the vertices are not all colored 0.

It is not always the case that an arbitrary graph has a corresponding vector system, but if one does exist then we say that the graph is embeddable.

Definition 6. A graph $G = (V, E)$ is *embeddable* if it is a subgraph of an orthogonality graph for some vector system.

Being embeddable implies the existence of a vector system \mathcal{K} whose vectors have a one-to-one correspondence with the vertices of G in such a way that adjacent vertices are assigned to orthogonal vectors. An example of an unembeddable graph is the cyclic graph C_4 on 4 vertices, as the orthogonality constraints force a pair of opposite vertices to be mapped to collinear vectors (which are not allowed in a vector system).

Definition 7. An embeddable and non-010-colorable graph is called a *KS graph*. Every KS vector system can be reduced to a KS graph.

2.2 The Minimum KS Problem

The minimum KS problem is to find a KS system of minimum cardinality. That is, a system with the fewest number of vectors in 3-dimensional space (or equivalently a KS graph the fewest number of vertices). Every KS system has a KS graph, so if a KS graph with cardinality n does not exist then a lower bound on the minimum KS problem is at least $n + 1$.

2.3 Cube-and-conquer

The cube-and-conquer satisfiability solving paradigm was developed by [41] to solve hard combinatorial problems. The method applies two possibly different types of SAT solvers in two stages: First, a “cubing solver” splits a SAT instance into a large number of distinct subproblems specified by cubes—formulas of the form $x_1 \wedge \dots \wedge x_n$ where x_i are literals. Second, for each cube a “conquering solver” solves the original instance under the assumption that the cube is true. The cube-and-conquer method tends to be effective at quickly solving large satisfiability instances when the cubing solver can generate many cubes encoding subproblems of similar difficulty. It has since been applied to solve huge combinatorial problems such as the Boolean Pythagorean triples

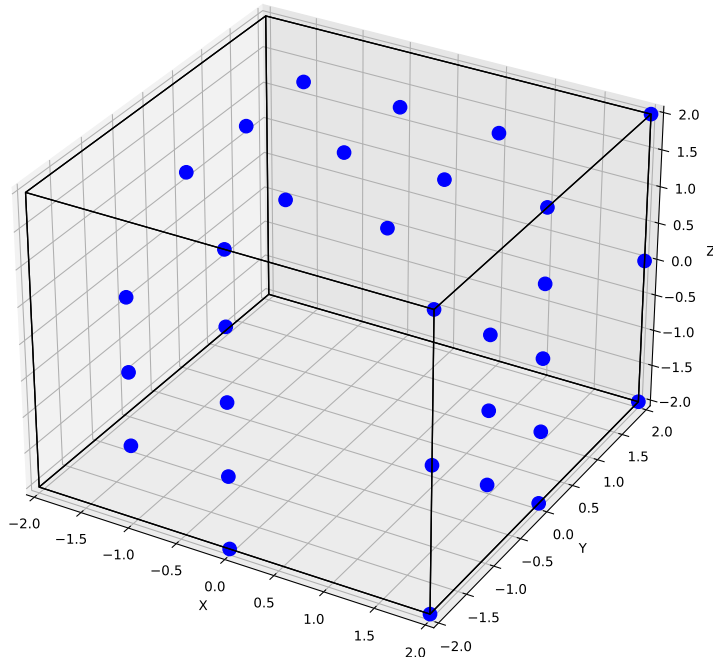


Fig. 1: The 31 vectors of the smallest known KS system (discovered by John Conway and Simon Kochen circa 1990).

problem [42], the computation of Schur number five [43], and a SAT-based resolution of Lam's problem [24].

3 Previous Work

Over the last 55+ years, many mathematicians and physicists such as Roger Penrose, Asher Peres, and John Conway have attempted to find a minimum 3-dimensional KS system (see Table 1). The first KS system was constructed in 1967 and it contained 117 vectors [3]. A KS system with 109 vectors was found by Res Jost [44]. The current smallest known KS system contains 31 vectors and was discovered by John Conway and Simon Kochen circa 1990 (see Figure 1). All of these discoveries were made analytically, without the assistance of any computational methods.

In 2011, Arends, Ouaknine, and Wampler proved several interesting properties of KS graphs and leveraged them to computationally establish that a KS system must contain at least 18 vectors [45]. Seven years later, Uijlen and Westerbaan showed that a KS system must have at least 22 vectors [36]. This computational effort used around 300 CPU cores for three months and relied on the *nauty* software package [46] to exhaustively search for KS graphs. Pavičić, Merlet, McKay, and Megill [40] have improved a variation of the KS problem, one in which each vector is part of a mutually orthogonal triple. Under this restriction they show a KS system must have at least 30 vectors in three dimensions and the minimum KS system has 18 vectors in four

dimensions. However, despite extensive efforts, the gap between the lower and upper bounds on the 3-dimensional KS system remains significant and the minimum size remains unknown.

Preliminary versions of the present work were announced at the *2022 SC-Square workshop*, at the *2023 Southeastern International Conference on Combinatorics, Graph Theory and Computing*, and at *CanaDAM 2023*. At the former two venues we presented searches for KS systems with up to 22 vectors, and at CanaDAM 2023 we extended this to an search for KS systems with up to 23 vectors. In each case the searches were exhaustive and no KS systems were found. Thus, a KS system in three dimensions must contain at least 24 vectors.

The authors recently became aware of the work of Kirchweger et al. [35] who completed an independent search for KS systems with up to 23 vectors with a similar approach as our technical report [47] but with a SAT modulo symmetries (SMS) solver and an alternate definition of canonicity. They do not use orderly generation as their definition of canonical does not satisfy property (2) from Sec. 5. For future work, we would like to determine the strengths and weaknesses of the SAT+CAS and SMS approaches and how they can be improved.

4 SAT Encoding of the Minimum KS Problem

A KS vector system \mathcal{K} can be converted into a KS graph $G_{\mathcal{K}}$. Each vector in \mathcal{K} is assigned to a vertex in $G_{\mathcal{K}}$, so that if two vectors are orthogonal, then their corresponding vertices are connected.

We say a KS graph is minimal if the only subgraph that is also a KS graph is itself. Arends, Ouaknine, and Wampler [45] proved that a three-dimensional minimal KS graph must satisfy the following properties:

1. The graph does not contain C_4 as a subgraph.
2. Each vertex of the graph has minimum degree 3.
3. Every vertex is part of a triangle graph C_3 .

We encode these three properties and the non-010-colorability of the KS graph in conjunctive normal form (CNF), as described below. If a SAT solver run on this encoding produces solutions, then these solutions are equivalent to graphs that satisfy all four properties.

A simple undirected graph of order n has $\binom{n}{2}$ potential edges, and we represent each edge as a Boolean variable. The edge variable e_{ij} is true exactly when the vertices i and j are connected, where $1 \leq i < j \leq n$. For convenience, we let both e_{ij} and e_{ji} denote the same variable since the graphs we consider are undirected. We also use the $\binom{n}{3}$ triangle variables t_{ijk} denoting that distinct vertices i , j , and k are mutually connected. In Boolean logic this is expressed as $t_{ijk} \leftrightarrow (e_{ij} \wedge e_{ik} \wedge e_{jk})$ which in conjunctive normal form is expressed via the four clauses $\neg t_{ijk} \vee e_{ij}$, $\neg t_{ijk} \vee e_{ik}$, $\neg t_{ijk} \vee e_{jk}$, and $\neg e_{ij} \vee \neg e_{ik} \vee \neg e_{jk} \vee t_{ijk}$. Again, the indices i , j , and k of the variable t_{ijk} may be reordered arbitrarily for notational convenience.

4.1 Encoding the Squarefree Constraint

To encode the property that a Kochen–Specker graph must be squarefree, we construct encodings that prevent the existence of any squares in the graph. Three squares can be formed on four vertices. Therefore, for each choice of four vertices i, j, k, l , we use clauses $\neg e_{ij} \vee \neg e_{jk} \vee \neg e_{kl} \vee \neg e_{li}$, $\neg e_{ij} \vee \neg e_{jl} \vee \neg e_{lk} \vee \neg e_{ki}$, and $\neg e_{il} \vee \neg e_{lj} \vee \neg e_{jk} \vee \neg e_{ki}$. By enumerating over all possible choices of four vertices and constructing the above CNF formula, we force the graph to be squarefree.

4.2 Encoding the Minimum Degree Constraint

For each vertex i , to ensure that i is connected to at least three other vertices, we take each subset S of $\{1, \dots, i-1, i+1, \dots, n\}$ with cardinality $n-3$ and construct the clause $\bigvee_{j \in S} e_{ij}$. By enumerating over all such subsets we enforce a minimum degree of 3 on vertex i . Thus, constructing similar formulae for all vertices $1 \leq i \leq n$, enforces that any vertex in the graph has a degree of at least 3.

4.3 Encoding the Triangle Constraint

We encode the property that every vertex is part of a triangle as follows: for each vertex i , we require 2 other distinct vertices to form a triangle, and there are $\binom{n-1}{2}$ possible triangles containing i . At least one of those triangles must be present in the KS graph—this is encoded by the clause $\bigvee_{j,k \in S} t_{ijk}$ where S is $\{1, \dots, i-1, i+1, \dots, n\}$ and $j < k$. Using this clause for each $1 \leq i \leq n$ ensures that every vertex is part of a triangle.

4.4 Encoding the Noncolorability Constraint

Recall that the key property of a KS graph is that it is non-010-colorable. A graph is non-010-colorable if and only if for all $\{0, 1\}$ -colorings of the graph a pair of color-1 vertices is connected or a set of three color-0 vertices are mutually connected.

For each $\{0, 1\}$ -coloring, a KS graph has a set V_0 of color-0 vertices and a set V_1 of color-1 vertices. Given a specific such coloring, the clause

$$\bigvee_{\substack{i,j \in V_1 \\ i < j}} e_{ij} \vee \bigvee_{\substack{i,j,k \in V_0 \\ i < j < k}} t_{ijk}$$

encodes that this coloring is not a 010-coloring of a graph—since either a pair of color-1 vertices is connected or three color-0 vertices are mutually connected. Note that we have to generate such a clause for all possible colorings, and conjunct them together to obtain a non-colorability constraint for graphs of order n . An assignment that satisfies such a constraint corresponds to a graph that is not 010-colorable under any possible coloring.

Due to the large number of possible $\{0, 1\}$ -colorings, we only consider colorings with less than or equal to $\lceil \frac{n}{2} \rceil$ colour-1 vertices. Colorings with more than $\lceil \frac{n}{2} \rceil$ color-1 vertices are unlikely to be 010-colourings and in practice were not useful in blocking

010-colourable graphs. For graphs up to order 22 these constraints actually removed *all* 010-colorable graphs from the search space.

4.5 Encoding Isomorphism Blocking Clauses

We aim to block as many isomorphic graphs using a small number of clauses before passing the instance to the SAT solver. Following [48], we use symmetry breaking constraints that enforce a lexicographical order among rows of the graph’s adjacency matrix.

Given an adjacency matrix A of a graph, define $A_{i,j}$ as the i th row of A without columns i and j . Codish et al. prove that up to isomorphism every graph can be represented by an adjacency matrix A for which $A_{i,j}$ is lexicographically equal or smaller than $A_{j,i}$ for all $1 \leq i < j \leq n$.

We express that $A_{i,j} = [x_1, x_2, \dots, x_n]$ is lexicographically equal or less than $A_{j,i} = [y_1, y_2, \dots, y_n]$ using $3n - 2$ clauses and auxiliary variables a_1, \dots, a_{n-1} [49]. The clauses are $\neg x_k \vee y_k \vee \neg a_{k-1}$, $\neg x_k \vee a_k \vee \neg a_{k-1}$, and $y_k \vee a_k \vee \neg a_{k-1}$ for $k = 1, \dots, n - 1$. The literal $\neg a_0$ is omitted and the clause $\neg x_n \vee y_n \vee \neg a_{n-1}$ is also included.

5 Orderly Generation via SAT+CAS

The symmetry breaking constraints described in Section 4.5 do not block all isomorphic copies of adjacency matrices. Thus, a crucial part of the PhysicsCheck pipeline is the use of a SAT+CAS combination of a SAT solver and an isomorph-free generation routine. The orderly isomorph-free generation approach was developed independently by [50, 51]. It relies on the notion of a *canonical representation* of an adjacency matrix.

Definition 8. *An adjacency matrix M of a graph is canonical if every permutation of the graph’s vertices produces a matrix lexicographically greater than or equal to M , where the lexicographical order is defined by concatenating the above-diagonal entries of the columns of the adjacency matrix starting from the left.*

An *intermediate* matrix of A is a square upper-left submatrix of A . If A is of order n then its intermediate matrix of order $n - 1$ is said to be its *parent*, and A is said to be a *descendant* of its intermediate matrices.

The orderly generation method is based on the following two consequences of Definition 8:

- (1) Every isomorphic class of graphs only has exactly one canonical representative.
- (2) If a matrix is canonical, then its parent is also canonical.

Note that the contrapositive of the second property implies that if a matrix is not canonical, then all of its descendants are not canonical. The orderly generation process only generates canonical matrices and they are built starting from the upper-left. Therefore, any noncanonical intermediate matrix that is encountered during an orderly generation exhaustive search can be discarded, as none of its descendants will be canonical.

As described in Figure 2, in our SAT+CAS implementation, when the SAT solver finds an intermediate matrix the canonicity of this matrix is determined by a canonicity-checking routine implemented in the PhysicsCheck system. If the matrix is

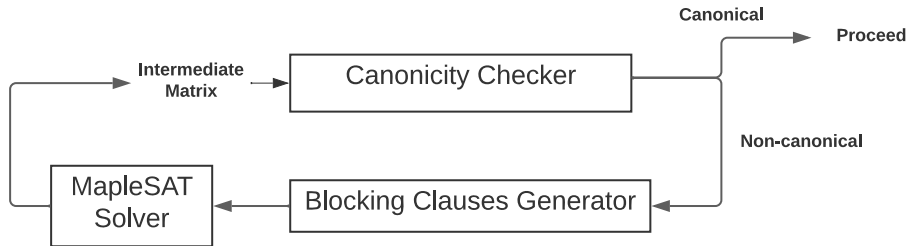


Fig. 2: A flowchart of the orderly generation algorithm implemented as part of PhysicsCheck’s SAT+CAS architecture.

n	SAT+O.G.	Speedup over SAT	Speedup over CAS
17	0.99 m	8.9×	25.6×
18	1.65 m	161.6×	276.1×
19	14.03 m	834.3×	677.6×

Table 2: The solving time for SAT + orderly generation and the speedup factor provided in each order $17 \leq n \leq 19$ when compared against SAT-only and CAS-only approaches. We did not provide the speedup factor for $n > 19$ since the SAT-only and CAS-only instances could not be solved within 12,000 minutes.

noncanonical, then a “blocking” clause is learned which removes this matrix (and all of its descendants) from the search. Otherwise, the matrix is canonical and the SAT solver proceeds as normal. When a matrix is noncanonical, the canonicity-checking routine also provides a “witness” of this fact (a permutation of the vertices that produces a lex-smaller adjacency matrix). We combine this process with the symmetry breaking clauses of Codish et al. that canonical matrices can be shown to satisfy [48, Def. 8].

The orderly generation technique provides a speedup that seems to increase exponentially in the order n of the KS graph—see Table 2, which provides experimental running times comparing the SAT+CAS approach against SAT-only and CAS-only approaches. These timings were run on an AMD EPYC 7502P CPU running at 1.5 GHz and the CAS compared against was the *nauty* graph generator [46] with the same configuration used in [36].

As described in Figure 3, we simplify the SAT instance using the SAT solver CaDiCaL [52] before solving the instance using MapleSAT [53]. As a preprocessing step, we also run the orderly generation process on graphs with up to 12 vertices and add the generated blocking clauses directly into the instance provided to CaDiCaL—this allows the simplification to incorporate some of the knowledge derived from the orderly generation process.

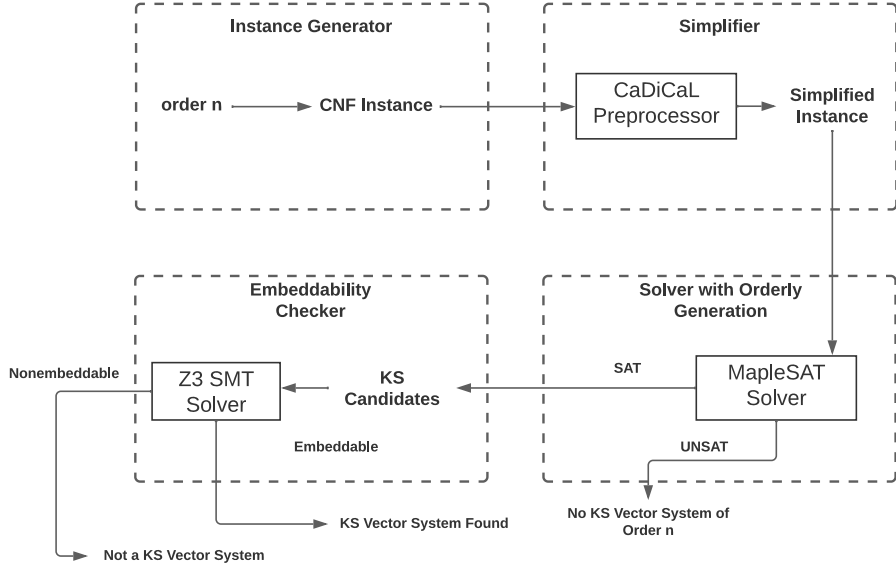


Fig. 3: A flowchart of PhysicsCheck for solving the KS problem. The instance generator generates the SAT instance, encoding the KS problem, which is simplified using CaDiCaL. The simplified instance is passed to the MapleSAT+CAS tool either sequentially or in parallel using cube-and-conquer. Finally, an embeddability checker applies the SMT solver Z3 to determine whether the candidates are embeddable.

6 Embeddability Checking

Solutions generated by the SAT solver are known as *KS candidates*. A KS candidate that is embeddable is a KS graph and its embedding is a KS system. Our embeddability checking algorithm consists of two parts. The first part is an integration of the vector assignment algorithm of [36] that finds all possible assignments describing the orthogonal relations between the vectors v_i in a KS candidate defined by a set of edges E . An assignment is a set of edge pairs $C = \{(e_{ij}, e_{ik}), (e_{lm}, e_{ln}), \dots\} \subseteq E^2$ where each pair of edges share one common vertex and each pair is disjoint from each other, meaning the same edge cannot exist in more than one pair. Each pair (e_{ij}, e_{ik}) in C can be interpreted as a cross product relationship between the vectors v_i, v_j , and v_k , since the presence of e_{ij} and e_{ik} in the KS graph means that vector v_i must be orthogonal to both v_j and v_k in any embedding of the candidate.

The second part of the algorithm applies an SMT solver to determine the satisfiability of an assignment. An assignment generated by Uijlen and Westerman's algorithm is converted into a set of cross and dot product equations, and these equations are passed to the theorem prover Z3 [33]. We denote the vector corresponding to vertex v_i as V_i in Z3, where V_i is a 3-tuple of real numbers. Given a specific vector assignment generated by the previous algorithm, we form the following constraints:

1. If $(e_{ij}, e_{ik}) \in C$, we add the cross product constraint $V_i = V_j \times V_k$.

2. If e_{ij} is one of the remaining edges of E but not contained in any pairs of C , we add the dot product constraint $V_i \cdot V_j = 0$.
3. If $i \neq j$ then V_i is not collinear to V_j and we add the noncollinearity constraint $V_i \times V_j \neq \vec{0}$.

A *free vector* is a vector that has not been fixed as the cross product of two other vectors. Of all possible assignments, we first choose the one with the least number of free vectors, since in practice such an assignment is likely to be solved more quickly.

It is important to note that for any vector assignment, each edge of the KS graph is encoded into either constraint 1 or constraint 2, making the encoding much shorter and efficient comparing to a naive encoding. Constraint 3 requires two vectors to be noncollinear rather than only being nonequal, since we do not enforce vectors to have unit length (for reasons of efficiency). This is a harmless optimization, since vectors can be projected onto the unit sphere without disturbing these constraints. The projected vectors may lie on the southern hemisphere of the unit sphere, but in such a case their negation lies on the northern hemisphere.

We also fix two orthogonal vectors to be the standard vectors $(1, 0, 0)$ and $(0, 1, 0)$ to cut down on the number of free variables. To check whether a graph is embeddable, we use Z3 to determine whether these nonlinear arithmetic constraints are satisfiable over the real numbers. Z3 applies a CDCL-style algorithm to decide the satisfiability of such equations [54]. If a solution is found, it is an assignment of vertices to vectors that satisfies all orthogonality constraints and the graph is therefore embeddable.

Embeddability checking of large graphs can be further optimized by precomputing minimal unembeddable graphs, as defined below.

Definition 9. *A graph G is said to be a **minimal unembeddable graph** if any proper subgraph of G is embeddable.*

A graph is unembeddable if it contains a minimal unembeddable subgraph. Therefore, to optimize embeddability checking, we precomputed all minimal unembeddable squarefree graphs up to order 12. Moreover, we only need to compute the embeddability of squarefree graphs with minimum degree strictly greater than 1, since if a graph G has a vertex v with degree less than 2, the embeddability of G follows from its subgraph $G - v$, which has already been checked on previous order.

The embeddability of most graphs can be determined using the first assignment in less than 1 second. If the satisfiability of an assignment is not determined within 10 seconds, we move on to a different orthogonality assignment and attempt the satisfiability check again until we determine the embeddability of a graph. Given a KS candidate, if the candidate contains a minimal unembeddable subgraph, then the candidate must be unembeddable. Using this property significantly speeds up the embeddability checking process, since nearly all candidates contained an unembeddable subgraph of order 10, 11, or 12 (see Section 8). In Figure 4 we provide the two minimal nonembeddable graphs of order 10 which appear frequently as subgraphs of KS candidates.

7 Parallelization

Here, we show how we apply parallelization to the solving process. In our implementation, parallelization is applied by dividing the SAT instance into smaller subproblems

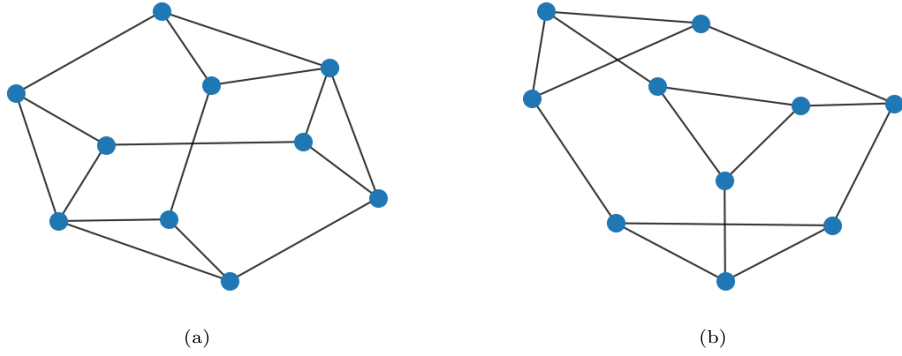


Fig. 4: The only two minimal nonembeddable graphs of order 10. These are the smallest squarefree graphs that are not embeddable.

n	Candidates	Simplifying	Solving
17	1	0.01 h	0.00 h
18	0	0.01 h	0.02 h
19	8	0.07 h	0.15 h
20	147	0.06 h	1.25 h
21	2,497	0.31 h	18.36 h
22	88,282	0.44 h	360.75 h
23	3,747,950	963.28 h	52,619.16 h

Table 3: A summary of our results on orders $17 \leq n \leq 23$.

using the cube-and-conquer approach [41]. The approach applies the lookahead solver `march_cu` [41] to partition a hard problem into many cubes and offers very efficient solving time for some combinatorial problems.

During the splitting, the lookahead solver tries to find the next variable that will split the search space the most evenly. Each splitting variable will be added to the SAT instance as a new unit clause, generating two subproblems (one with a positive unit clause and one with a negative unit clause) that can be solved in parallel. We terminate the cubing process when a significant number of the edge variables e_{ij} have been fixed in each subproblem.

We apply cube-and-conquer and naive parallel SAT solving on order 23 due to the combinatorial explosion caused by the large order. We eliminate 100 edge variables from subproblems during the cubing process, and as a result, 55,426 cubes are generated and solved in parallel. The cubes in order 23 were generated in 5,834.08 CPU hours and the cubing was also performed in parallel by executing two instances of `march_cu` whenever a cube was split into two.

8 Results

Given the CNF file with the encoded constraints, we use the aforementioned encoding techniques combined with the SAT+CAS approach to verify all previous results on KS systems up to order 21 with over a four order-of-magnitude speedup factor. Moreover, we improve on the best known lower bound for a minimum KS system (see Table 3). The computations up to order 22 were done on an Intel Xeon E5-2667 CPU and the computations in order 23 were done on Intel E5-2683 CPUs that belong to Canada’s national advanced research computing platform. All computations are measured in the total CPU time reported by the solver. Our search in order 21 is about 35,000 times faster than the previous computational search of Uijlen and Westerbaan which was distributed on approximately 300 CPU cores and took roughly three months [36]. Uijlen and Westerbaan were unable to determine the embeddability of one particular graph of order 14. Using our embeddability checking approach, this graph is quickly shown to be unembeddable. By comparing our sets of minimal unembeddable subgraphs with Uijlen and Westerbaan’s online dataset of small graphs³, we find our minimal unembeddable subgraphs from order 10 to 12 to be identical to theirs up to isomorphism.

We compared our Kochen–Specker candidates with Uijlen and Westerbaan’s findings, and verified their conclusion that there is no KS system with strictly less than 22 vectors. In order 20, we found four additional KS candidates that were not present in the collection of Uijlen and Westerbaan, indicating that their search missed some KS candidates. We present one of the missing graphs in Figure 6. We verified that these four additional graphs satisfy the constraints of a KS candidate and therefore would be KS systems were they embeddable, but unfortunately they are not.

In order 23, we adjust the colorability encoding in Section 4.4 by reducing the maximum number of color-1 vertices from $\lceil n/2 \rceil$ to $\lceil n/3 \rceil$ to counter the exponential blowup in the number of clauses. As a result, the SAT solver found 5,160,001 solutions in order 23, but 1,412,051 solutions could be 010-colored (using more than $\lceil n/3 \rceil$ color-1 vertices). After these 010-colorable graphs were removed we were left with 3,747,950 candidates and this matches the count found by Kirchweger et al. [35].

All KS candidates of order less than 24 are not embeddable. The embeddability check is done quickly since over 99.99% of the candidate contains one of the minimal nonembeddable subgraph up to order 12, which can be checked cheaply. Specifically, there are 1 order-22 candidate and 41 order-23 candidates that do not contain a minimal nonembeddable subgraph up to order 12. We also check that if those graphs contain a minimal unembeddable subgraph up to order 14, which was computed by Uijlen and Westerbann [36]. We conclude that all candidates less than order 23 contain a minimal unembeddable subgraph up to order 14, and there are two order-23 candidates that does not contain any known minimal unembeddable subgraphs (Figure 5), which matches the count found by Kirchweger et al. [35]. In our pipeline, only minimal unembeddable graphs up to order 12 are used since we computed them ourselves (Table 4). Candidates that do not contain any minimal nonembeddable subgraph up

³<https://kochen-specker.info/smallGraphs/>

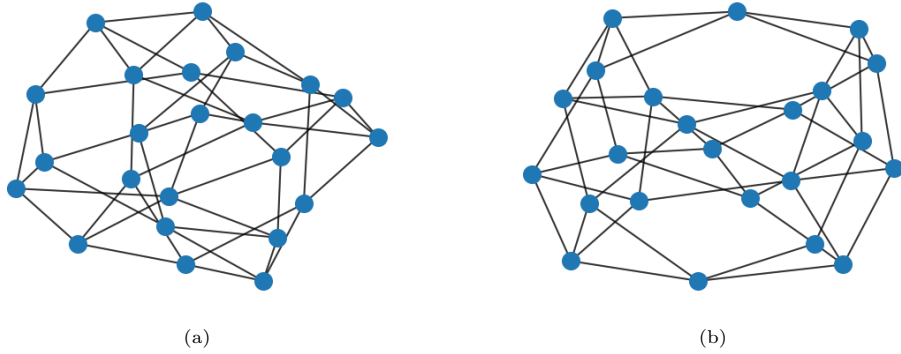


Fig. 5: The only two KS candidates that do not contain minimal nonembeddable graphs up to and including order 14. These two graphs are determined to be unembeddable by Z3.

Order	Squarefree + Min. Degree 2	Min. Unembed.	Runtime
4-9	164	0	30 s
10	563	2	249 s
11	3,257	5	1.3 h
12	23,699	10	27 h

Table 4: Counts for the number of minimal unembeddable graphs in orders up to 12 and the computation time for the embeddability check.

to order 12 are determined to be unembeddable using our embedability check pipeline. Therefore, we conclude that the minimum size of the KS system is at least 24.

8.1 Verification of Results

In order to verify the computations produced by the SAT solver we enabled DRAT proof logging in the SAT solver so that nonexistence certificates are generated. This makes it possible for a proof verifier to provide an independent certification of the correctness of the solver’s conclusion (assuming the correctness of the constraints in the SAT instance).

A DRAT proof consists of a trace of the clauses learned by the solver during its execution. A proof verifier checks that each clause can be derived from the previous clauses using simple rules known to be logically consistent. The CAS-derived non-canonical blocking clauses cannot be verified using the normal rules, so they were specially tagged to be verified separately. Instead, they are justified via a CAS-derived permutation that, when applied to the blocked adjacency matrix, produces a lex-smaller adjacency matrix (and therefore provides a witness that the blocked matrix is noncanonical and is safe to block).

We used a modified DRAT-trim [34] that was configured to trust the CAS-derived clauses. The CAS-derived clauses in the DRAT proof were prefixed by the character

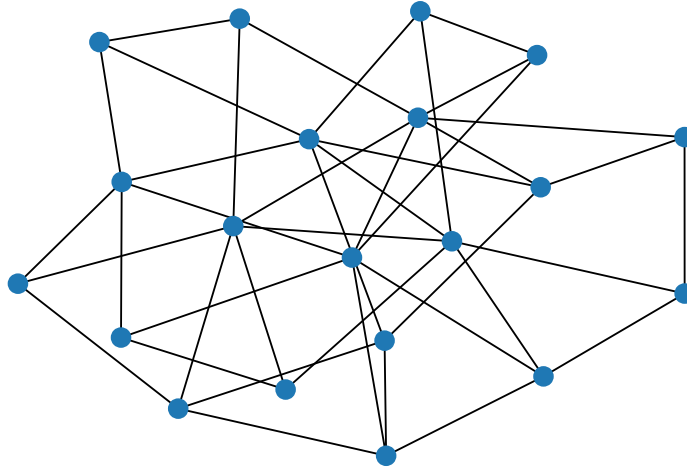


Fig. 6: One of the four graphs with 20 vertices that was not present in Uijlen and Westerberbaan’s enumeration. The four graphs satisfy all constraints mentioned in Section 4, but are not embeddable, and therefore do not constitute a KS system.

‘ τ ’ to signify they should be trusted. The trusted CAS-derived clauses were separately verified by a permutation-applying Python script that applied the witnesses produced by the CAS to verify the blocked matrices were noncanonical. Similarly, when a KS candidate was found the solver learns a trusted clause blocking the candidate (so that the search continues until all candidates have been found). The DRAT proof ends with the empty clause which by definition is not satisfiable. If the verifier is indeed able to verify the empty clause then we can have confidence that the SAT solver’s search missed no candidates.

We have certified the results up to and including order 22. The uncompressed proofs are about 1.9 TiB in total. The certification in orders 22 and 23 required using cube-and-conquer (like described in Sec. 7) to ensure that each DRAT proof could be verified with at most 4 GiB of memory. The certification in order 23 is ongoing.

We also conducted extensive cross-verification on the results (KS candidates) produced by the SAT solver. For example, each KS candidate is passed into a verification script implemented using the NetworkX [55] graph package to verify that they satisfy all encoded constraints (see Section 4). In the order 23 search, some 010-colorable graphs colorable with more than $\lceil n/3 \rceil$ color-1s were discarded during this step.

We also test the embeddability pipeline by performing a verification on all embeddable subgraphs. Specifically, if a graph is embeddable and corresponds to a set of vectors, we check that no pair of vectors in the set are collinear, and a pair of vectors are orthogonal if their corresponding vertices are connected.

The candidate counts of the previous search [36] were larger than ours because the previous search did not require each vertex to be part of a triangle. However, we cross-verified that all our KS candidates from order 17 to 21 (except for the four new

candidates that we discovered) are isomorphic to the previously known candidates that were discovered using the graph theory package `nauty`—a very different approach than ours. Our candidates were verified to be isomorphic to previous candidates using both SageMath [56] and NetworkX [55].

9 Conclusion

We give a computer-assisted proof showing that a Kochen–Specker vector system in three dimensions must contain at least 24 vectors. We provide a computational speedup of over four orders of magnitude over the previously used approach of Uijlen and Westerbaan (see Section 8). For the first time, we successfully implemented and applied the SAT+CAS paradigm along with orderly isomorph-free generation to provide a robust pipeline for problems in quantum foundations. Compared to previous work, our approach is less error-prone as it reduces the need for custom-purpose search algorithms. Instead, we use heavily-tested SAT solvers such as MapleSAT. Moreover, our method has extensive cross-verification in place and the ability to generate nonexistence proof certificates (see Section 8.1).

Finding the minimum KS system is not only a problem of great importance to quantum foundations, but has direct applications to various fields of quantum information processing, such as quantum cryptographic protocols [6], zero-error classical communication [7], and dimension witnessing [8]. As a consequence, a wide variety of techniques have been developed to address this question over the past several decades. We add a novel class of techniques to this body of work.

The SAT+CAS paradigm has been successfully used to resolve a number of mathematical problems in combinatorics, number theory, and geometry that had previously remained unsolved for many decades. With this work we extend the reach of the SAT+CAS paradigm, for the first time, to resolving combinatorial questions in the realm of quantum foundations.

10 Methods

The SAT instance generator consists of multiple Python functions, where each function generates a specific type of constraint described in Section 4. `CaDiCaL` is used to simplify the SAT instance and outputs the simplified instance once the solver reaches the number of conflicts set by the user. The simplified instance is passed to the `MapleSAT+CAS` tool either sequentially or in parallel using `cube-and-conquer`. We use `march_cu` [41] as the cubing solver and terminate the cubing process when `march_cu` fixes a certain number of the edge variables e_{ij} in each subproblem. Finally, an embeddability checker uses Uijlen and Westerbaan’s algorithm [36] to find vector assignments of KS candidates, then applies SMT solver `Z3` to determine whether the candidates are embeddable.

11 Code Availability

The `PhysicsCheck` pipeline is free software and can be accessed at <https://github.com/curtisbright/PhysicsCheck>.

References

- [1] Held, C.: The Kochen-Specker Theorem. Metaphysics Research Lab, Stanford University (2000). <https://plato.stanford.edu/entries/kochen-specker/>
- [2] Bell, J.S.: Speakable and Unspeakable in Quantum Mechanics: Collected Papers on Quantum Philosophy. Cambridge University Press, Cambridge (2004). <https://doi.org/10.1017/CBO9780511815676>
- [3] Kochen, S., Specker, E.P.: The Problem of Hidden Variables in Quantum Mechanics. *Journal of Mathematics and Mechanics* **17**, 59–87 (1967) https://doi.org/10.1007/978-94-010-1795-4_17
- [4] Bell, J.S.: On the problem of hidden variables in quantum mechanics. *Rev. Mod. Phys.* **38**, 447–452 (1966) <https://doi.org/10.1103/RevModPhys.38.447>
- [5] Canas, G., Arias, M., Etcheverry, S., Gómez, E.S., Cabello, A., Xavier, G.B., Lima, G.: Applying the simplest Kochen-Specker set for quantum information processing. *Physical review letters* **113**(9), 090404 (2014) <https://doi.org/10.1103/PhysRevLett.113.090404>
- [6] Cabello, A., D’Ambrosio, V., Nagali, E., Sciarrino, F.: Hybrid ququart-encoded quantum cryptography protected by Kochen-Specker contextuality. *Physical Review A* **84**(3), 030302 (2011) <https://doi.org/10.1103/PhysRevA.84.030302>
- [7] Cubitt, T.S., Leung, D., Matthews, W., Winter, A.: Improving zero-error classical communication with entanglement. *Physical Review Letters* **104**(23), 230503 (2010) <https://doi.org/10.1103/PhysRevLett.104.230503>
- [8] Gühne, O., Budroni, C., Cabello, A., Kleinmann, M., Larsson, J.-Å.: Bounding the quantum dimension with contextuality. *Physical Review A* **89**(6), 062107 (2014) <https://doi.org/10.1103/PhysRevA.89.062107>
- [9] Ganesh, V., Vardi, M.Y.: On the Unreasonable Effectiveness of SAT Solvers. Cambridge University Press, Cambridge (2020). <https://doi.org/10.1017/9781108637435.032>
- [10] Metin, H., Baarir, S., Colange, M., Kordon, F.: CDCLSym: Introducing Effective Symmetry Breaking in SAT Solving. Springer, New York (2018). https://doi.org/10.1007/978-3-319-89960-2_6
- [11] Bright, C., Kotsireas, I., Ganesh, V.: When satisfiability solving meets symbolic computation. *Communications of the ACM* **65**(7), 64–72 (2022) <https://doi.org/10.1145/3500921>
- [12] Aloul, F.A., Sakallah, K.A., Markov, I.L.: Efficient Symmetry Breaking for Boolean Satisfiability. Morgan Kaufmann Publishers Inc., San Francisco, CA,

- USA (2003). <https://dl.acm.org/doi/10.5555/1630659.1630699>
- [13] Barrett, C., Fontaine, P., Tinelli, C.: The Satisfiability Modulo Theories Library (SMT-LIB). www.SMT-LIB.org (2016)
- [14] Zulkoski, E., Ganesh, V., Czarnecki, K.: MathCheck: A Math Assistant via a Combination of Computer Algebra Systems and SAT Solvers. Springer, Cham (2015). https://doi.org/10.1007/978-3-319-21401-6_41
- [15] Abraham, E.: Building bridges between symbolic computation and satisfiability checking (2015). <https://doi.org/10.1145/2755996.2756636>
- [16] Bright, C., Ganesh, V., Heinle, A., Kotsireas, I., Nejati, S., Czarnecki, K.: MATHCHECK2: A SAT+CAS verifier for combinatorial conjectures (2016). https://doi.org/10.1007/978-3-319-45641-6_9
- [17] Kaufmann, D., Biere, A.: Improving AMulet2 for verifying multiplier circuits using SAT solving and computer algebra. *International Journal on Software Tools for Technology Transfer* (2023) <https://doi.org/10.1007/s10009-022-00688-6>
- [18] Mahzoon, A., Große, D., Scholl, C., Konrad, A., Drechsler, R.: Formal verification of modular multipliers using symbolic computer algebra and boolean satisfiability. In: *Proceedings of the 59th ACM/IEEE Design Automation Conference*. ACM, New York (2022). <https://doi.org/10.1145/3489517.3530605>
- [19] Mahzoon, A., Große, D., Drechsler, R.: Combining Symbolic Computer Algebra and Boolean Satisfiability for Automatic Debugging and Fixing of Complex Multipliers. *IEEE*. <https://doi.org/10.1109/isvlsi.2018.00071>
- [20] Heule, M.J.H., Kauers, M., Seidl, M.: New ways to multiply 3×3 -matrices. *Journal of Symbolic Computation* **104**, 899–916 (2021) <https://doi.org/10.1016/j.jsc.2020.10.003>
- [21] Neiman, D., Mackey, J., Heule, M.: Tighter bounds on directed Ramsey number $R(7)$. *Graphs and Combinatorics* **38**(5) (2022) <https://doi.org/10.1007/s00373-022-02560-5>
- [22] Bright, C., Kotsireas, I., Ganesh, V.: Applying computer algebra systems with SAT solvers to the Williamson conjecture. *Journal of Symbolic Computation* **100**, 187–209 (2020) <https://doi.org/10.1016/j.jsc.2019.07.024>
- [23] England, M.: SC-Square: Overview to 2021. In: Bright, C., Davenport, J. (eds.) *Proceedings of the 6th SC-Square Workshop*, pp. 1–6 (2022). <https://ceur-ws.org/Vol-3273/invited1.pdf>
- [24] Bright, C., Cheung, K.K.H., Stevens, B., Kotsireas, I., Ganesh, V.: A SAT-based Resolution of Lam’s Problem. AAAI Press, California USA (2021). https://doi.org/10.1007/978-1-4939-9726-7_10

[org/10.1609/aaai.v35i5.16483](https://doi.org/10.1609/aaai.v35i5.16483)

- [25] Junttila, T., Karppa, M., Kaski, P., Kohonen, J.: An adaptive prefix-assignment technique for symmetry reduction. *Journal of Symbolic Computation* **99**, 21–49 (2020) <https://doi.org/10.1016/j.jsc.2019.03.002>
- [26] Savela, J., Oikarinen, E., Järvisalo, M.: Finding Periodic Apartments via Boolean Satisfiability and Orderly Generation. EasyChair, UK (2020). <https://doi.org/10.29007/k8jd>
- [27] Crawford, J.M., Ginsberg, M.L., Luks, E.M., Roy, A.: Symmetry-breaking predicates for search problems. In: *Proceedings of the Fifth International Conference on Principles of Knowledge Representation and Reasoning. KR'96*, pp. 148–159. Morgan Kaufmann Publishers Inc., San Francisco, CA, USA (1996). <https://dl.acm.org/doi/10.5555/3087368.3087386>
- [28] Heule, M.J.H.: Optimal symmetry breaking for graph problems. *Mathematics in Computer Science* **13**(4), 533–548 (2019) <https://doi.org/10.1007/s11786-019-00397-5>
- [29] Sellmann, M., Hentenryck, P.V.: *Structural Symmetry Breaking*. Professional Book Center, California (2005). <http://ijcai.org/Proceedings/05/Papers/1121.pdf>
- [30] Kirchweger, M., Szeider, S.: SAT Modulo Symmetries for Graph Generation. Schloss Dagstuhl, Dagstuhl, Germany (2021). <https://doi.org/10.4230/LIPIcs.CP.2021.34>
- [31] Kirchweger, M., Scheucher, M., Szeider, S.: A SAT Attack on Rota’s Basis Conjecture. Schloss Dagstuhl - Leibniz-Zentrum für Informatik (2022). <https://doi.org/10.4230/LIPICS.SAT.2022.4>
- [32] Liang, J., Ganesh, V., Poupart, P., Czarnecki, K.: Exponential recency weighted average branching heuristic for SAT solvers. AAI Press, California (2016). <https://doi.org/10.1609/aaai.v30i1.10439>
- [33] de Moura, L., Bjørner, N.: Z3: An efficient SMT solver (2008). https://doi.org/10.1007/978-3-540-78800-3_24
- [34] Wetzler, N., Heule, M.J.H., Hunt Jr, W.A.: DRAT-trim: Efficient checking and trimming using expressive clausal proofs (2014). https://doi.org/10.1007/978-3-319-09284-3_31
- [35] Kirchweger, M., Peitl, T., Szeider, S.: Co-Certificate Learning with SAT Modulo Symmetries. *International Joint Conferences on Artificial Intelligence Organization, California. Main Track*, to appear (2023)

- [36] Uijlen, S., Westerbaan, B.: A Kochen-Specker system has at least 22 vectors. *New Generation Computing* **34**(1), 3–23 (2016) <https://doi.org/10.1007/s00354-016-0202-5>
- [37] Biere, A., Heule, M., Maaren, H.: *Handbook of Satisfiability* vol. 185. IOS press, Amsterdam (2009)
- [38] Gerlach, W., Stern, O.: Der experimentelle nachweis der richtungsquantelung im magnetfeld. *Zeitschrift für Physik* **9**, 349–352 (1922) <https://doi.org/10.1007/BF01326983>
- [39] Huang, Y.-F., Li, C.-F., Zhang, Y.-S., Pan, J.-W., Guo, G.-C.: Experimental test of the Kochen-Specker theorem with single photons. *Physical Review Letters* **90**(25) (2003) <https://doi.org/10.1103/physrevlett.90.250401>
- [40] Pavičić, M., Merlet, J.-P., McKay, B., Megill, N.D.: Kochen–Specker vectors. *Journal of Physics A: Mathematical and General* **38**(7), 1577–1592 (2005) <https://doi.org/10.1088/0305-4470/38/7/013>
- [41] Heule, M.J.H., Kullmann, O., Wieringa, S., Biere, A.: *Cube and conquer: Guiding CDCL SAT solvers by lookaheads* (2011). https://doi.org/10.1007/978-3-642-34188-5_8
- [42] Heule, M.J.H., Kullmann, O., Marek, V.W.: *Solving and Verifying the Boolean Pythagorean Triples Problem via Cube-and-Conquer*. Springer, Cham (2016). https://doi.org/10.1007/978-3-319-40970-2_15
- [43] Heule, M.: *Schur number five*. AAAI Press, California (2018). <https://doi.org/10.1609/aaai.v32i1.12209>
- [44] Jost, R.: Measures on the finite dimensional subspaces of a Hilbert space: remarks to a theorem by A. M. Gleason. *Studies in Mathematical Physics: Essays in Honour of Valentine Bergmann*, 209–228 (1976) <https://doi.org/10.1515/9781400868940-011>
- [45] Arends, F., Ouaknine, J., Wampler, C.W.: *On searching for small Kochen-Specker vector systems* (2011). https://doi.org/10.1007/978-3-642-25870-1_4
- [46] McKay, B.D., Piperno, A.: Practical graph isomorphism, II. *Journal of Symbolic Computation* **60**, 94–112 (2014) <https://doi.org/10.1016/j.jsc.2013.09.003>
- [47] Li, Z., Bright, C., Ganesh, V.: *A SAT Solver + Computer Algebra Attack on the Minimum Kochen–Specker Problem*. Technical report, <https://cbright.myweb.cs.uwindsor.ca/reports/nmi-ks-preprint.pdf> (2022)
- [48] Codish, M., Miller, A., Prosser, P., Stuckey, P.J.: Constraints for symmetry breaking in graph representation. *Constraints* **24**(1), 1–24 (2019) <https://doi.org/10.1007/s00148-019-0020-1>

- [49] Knuth, D.E.: The Art of Computer Programming, Volume 4, Fascicle 6: Satisfiability. Addison-Wesley Professional, Massachusetts (2015). <https://dl.acm.org/doi/abs/10.5555/2898950>
- [50] Faradžev, I.A.: Constructive enumeration of combinatorial objects (1978)
- [51] Read, R.C.: Every one a winner or how to avoid isomorphism search when cataloguing combinatorial configurations. Elsevier, Amsterdam (1978). [https://doi.org/10.1016/S0167-5060\(08\)70325-X](https://doi.org/10.1016/S0167-5060(08)70325-X)
- [52] Biere, A., Fazekas, K., Fleury, M., Heisinger, M.: CaDiCaL, Kissat, Paracooba, Plingeling and Treengeling Entering the SAT Competition 2020. University of Helsinki, Helsinki (2020). <http://hdl.handle.net/10138/318754>
- [53] Liang, J.H., Ganesh, V., Poupart, P., Czarnecki, K.: Learning Rate Based Branching Heuristic for SAT Solvers (2016). https://doi.org/10.1007/978-3-319-40970-2_9
- [54] Jovanović, D., de Moura, L.: Solving non-linear arithmetic (2012). https://doi.org/10.1007/978-3-642-31365-3_27
- [55] Hagberg, A.A., Schult, D.A., Swart, P.J.: Exploring Network Structure, Dynamics, and Function using NetworkX, Pasadena, CA USA (2008). <https://www.osti.gov/biblio/960616>
- [56] The Sage Developers: SageMath, the Sage Mathematics Software System (Version 9.6). (2022). <https://www.sagemath.org>