

# Algorithmics of Egalitarian versus Equitable Sequences of Committees

Eva Michelle Deltl<sup>1</sup>, Till Fluschnik<sup>\*,1,2</sup>, and Robert Brederock<sup>2</sup>

<sup>1</sup>Technische Universität Berlin, Faculty IV, Algorithmics and Computational Complexity, Germany,  
e.deltl@campus.tu-berlin.de

<sup>2</sup>Institut für Informatik, TU Clausthal, Germany, robert.brederock@tu-clausthal.de, till.fluschnik@tu-clausthal.de

## Abstract

We study the election of sequences of committees, where in each of  $\tau$  levels (e.g. modeling points in time) a committee consisting of  $k$  candidates from a common set of  $m$  candidates is selected. For each level, each of  $n$  agents (voters) may nominate one candidate whose selection would satisfy her. We are interested in committees which are good with respect to the satisfaction per day and per agent. More precisely, we look for *egalitarian* or *equitable* committee sequences. While both guarantee that at least  $x$  agents per day are satisfied, egalitarian committee sequences ensure that each agent is satisfied in at least  $y$  levels while equitable committee sequences ensure that each agent is satisfied in exactly  $y$  levels. We analyze the parameterized complexity of finding such committees for the parameters  $n, m, k, \tau, x$ , and  $y$ , as well as combinations thereof.

## 1 Prologue

Consider the very basic committee selection scenario where every agent may nominate one candidate for the committee. The only committee that gives *certain satisfaction to each* agent, which we call *egalitarian committee*, consist of all nominated candidates. A committee that gives *each agent the same satisfaction*, which we call *equitable committee*, would also have to consist of all nominated candidates, or of no candidate at all. Either outcome appears impractical. So, aiming for an equitable or egalitarian committee seems pointless in this setting.

With a small twist, however, it becomes a meaningful yet unstudied case: what happens when the agents can nominate candidates in different levels, or, to put differently, for different points in time? Are there non-trivial egalitarian or equitable committee sequences? Can we simultaneously guarantee a certain minimum number of nominations in each level? And if so, what is the computational complexity we have to face when trying to find such a committee?

What probably appears abstract at first glance is indeed quite natural: when selecting the menu for some event, each participant may nominate a food option (with levels being courses), when organizing a panel, each organizer may nominate a session topic (with levels being days with

|       | 1 | 2 |       | 1        | 2        |       | 1        | 2        |
|-------|---|---|-------|----------|----------|-------|----------|----------|
| $a_1$ | D | R | $a_1$ | <b>D</b> | R        | $a_1$ | <b>D</b> | R        |
| $a_2$ | S | M | $a_2$ | <b>S</b> | <b>M</b> | $a_2$ | S        | <b>M</b> |
| $a_3$ | D | H | $a_3$ | <b>D</b> | <b>H</b> | $a_3$ | <b>D</b> | H        |
| $a_4$ | S | T | $a_4$ | <b>S</b> | T        | $a_4$ | S        | <b>T</b> |
| $a_5$ | M | H | $a_5$ | M        | <b>H</b> | $a_5$ | <b>M</b> | H        |
| $a_6$ | R | M | $a_6$ | R        | <b>M</b> | $a_6$ | R        | <b>M</b> |

Figure 1: Illustration to Example 1. Left: Preferences indicating the favorite activity of each agent for each day. Middle: An egalitarian committee sequence. Right: An equitable committee sequence.

different topic frames), or when planning activities as sketched next.

*Example 1.* We want to bring together six agents at some weekend trip. Each one announces what they want to do on each day of the weekend. They will only form a group if each of them is happy with at least one of the chosen activities over all days. Possible activities are: dancing (D), hiking (H), museum (M), restaurant (R), sightseeing (S), and theater (T). The agents' preferences are given in Fig. 1. Assume we can choose two activities per day. To get an overall good satisfaction, we aim to ensure that a strict majority of agents is satisfied each day (in addition to requiring each agent being satisfied at least once). To realize this, we must select  $\{D, S\}$  for day one and  $\{M, H\}$  for day two. While this egalitarian committee sequence indeed maximizes satisfaction per day, the agents might not find this fair, because some are satisfied on two days while others are only satisfied once. We can fix this by aiming to ensure that each agent is satisfied *exactly once* and only a weak majority of agents is satisfied each day. To realize this, we select  $\{D, M\}$  for day one and  $\{M, T\}$  for day two, which gives an equitable committee sequence.

More formally, we study the following two problems and analyze their (parameterized) complexity with respect to the following parameters and their combinations: number  $n$  of agents, number  $m$  of candidates, number  $\tau$  of levels (e.g., time points), size  $k$  of each committee, number  $x$  of nominations the selected committee shall receive in each level, and number  $y$  of successful nominations each agent makes in total.<sup>1</sup>

<sup>\*</sup>Supported by the DFG, project AFFA (BR 5207/1 and NI 369/15).

<sup>1</sup>In Example 1, we have  $n = m = 6$ ,  $\tau = k = 2$ ,  $y = 1$ , as well as  $x = 4$  in the egalitarian and  $x = 3$  in the equitable case.

## EGALITARIAN COMMITTEE SEQUENCE ELECTION (GCSE)

**Input:** A set  $A$  of  $n$  agents, a set  $C$  of  $m$  candidates, a sequence of nomination profiles  $U = (u_1, \dots, u_\tau)$  with  $u_t: A \rightarrow C \cup \{\emptyset\}$ , and three integers  $k, x, y \in \mathbb{N}_0$ .

**Question:** Is there a sequence  $C_1, \dots, C_\tau$  of subsets of  $C$  each of size at most  $k$  such that

$$\forall t \in \{1, \dots, \tau\}: |\{a \in A \mid u_t(a) \in C_t\}| \geq x, \quad (1)$$

$$\text{and } \forall a \in A: \sum_{t=1}^{\tau} |u_t(a) \cap C_t| \geq y? \quad (2)$$

We also refer to the left-hand side of (1) and of (2) as committee and agent *score*, respectively. **EQUITABLE COMMITTEE SEQUENCE ELECTION (QCSE)** denotes the variant where we replace “ $\geq$ ” with “ $=$ ” in (2).

**Related Work.** From the motivations perspective, our model aims to select committees, which is a well-studied core topic of computational social choice. The three main goals of selecting committees discussed in the literature are individual excellence, proportionality, and diversity (cf. Elkind et al. [10]). The latter is usually reached by egalitarian approaches [1] (on which we also focus), where the quality of a committee is defined by the least satisfied voter.

Our model considers preferences with more than one level. Related, in the *multistage* setting [9, 14] one finds committee election problems with multiple preferences for each agent [4, 19]. While they also require a minimum satisfaction in each time step, they do not require a minimum satisfaction of agents. Instead, they have explicit constraints on the differences between two successive committees.

Also other aspects of selecting multiple (sub)committees have been studied before. Bredereck, Kaczmarczyk, and Niedermeier [5] augment classic multiwinner elections with a time dimension, also selecting a sequence of committees. The crucial differences with our work is that they do not allow agents (voters) to change their ballots over time. While Freeman, Zahedi, and Conitzer [12], Lackner [21], and Parkes and Procaccia [23] allow this, they consider online scenarios in contrary to our offline scenario. Moreover, they mostly focus on single-winner decisions and evaluate the quality of solutions quite differently. Bulteau et al. [6] also consider an offline setting but aim for justified representation, a fairness notion for groups of individuals.

**Our Contributions.** Fig. 2 gives a results overview from our parameterized analysis. We highlight the following: Each of GCSE and QCSE is solvable in uniform polynomial time

- for constantly many constant-size committees, but not for constantly many committees where each must have a committee score of at least a given constant (unless  $P = NP$ ); or
- for a constant number of agents, but not for a constant number of candidates (unless  $P = NP$ ).

We discovered the following differences between the egalitarian and equitable case:

- For two stages, GCSE is NP-hard while QCSE is polynomial-time solvable (QCSE is NP-hard for three stages);
- For parameter  $n + y$ , GCSE admits a polynomial problem kernel while QCSE presumably does not;
- When  $k = m$ , GCSE is polynomial-time solvable, while QCSE is still NP-hard in this case. Notably, GCSE is NP-hard even if  $k = m - 1$ .

Due to the space constraints, many details, marked by  $\star$ , can be found in the appendix.

## 2 Preliminaries and Basic Observations

We use standard notation from parameterized algorithmics [7]. A problem with parameter  $p$  is fixed-parameter tractable (in the class FPT), if it can be solved in  $f(p) \cdot s^c$ , where  $s$  denotes the input size, for some constant  $c$  and computational function  $f$  only depending on  $p$ ; i.e., it can be solved in uniform polynomial time  $O(s^c)$  for every constant value of  $p$ . A (decidable) parameterized problem is fixed-parameter tractable if and only if it admits a problem kernel, that is, a polynomial-time algorithm that maps any instance with parameter  $p$  to an equivalent instance of size at most  $g(p)$ , where  $g$  is some function only depending on  $p$ . We speak of a polynomial problem kernel if  $g$  is a polynomial.

**Basic Observations.** We first discuss two trivial cases for GCSE and QCSE regarding the value of  $y$  and of  $k$ .

**Observation 1.** *If  $y \in \{0, \tau\}$ , then GCSE and QCSE are solvable in linear time.*

Note that Observation 1 implies that for  $\tau = 1$ , each of GCSE and QCSE is linear-time solvable. Another trivial case for GCSE is the following.

**Observation 2.** *GCSE is linear-time solvable if  $k \geq m$ .*

We will see that Observation 2 does not transfer to QCSE: QCSE remains NP-hard, even if  $k \geq m$  (Proposition 3).

The following allows us to assume throughout to have at most number of agents many candidates.

**Lemma 1 ( $\star$ ).** *Each instance  $(A, C, U, k, x, y)$  of GCSE (of QCSE) can be mapped in linear time to an equivalent instance  $(A, C', U', k, x, y)$ ,  $|C'| \leq |A|$  of GCSE (of QCSE).*

**Corollary 1.** *(i) Each of GCSE and QCSE admits a problem kernel of size  $O(n^2 \cdot \tau)$ . (ii) There are at most  $(n + 1)^n$  pairwise different nomination profiles.*

## 3 Intractability

We discuss the general intractability of our problems as well as several special cases where they remain hard.

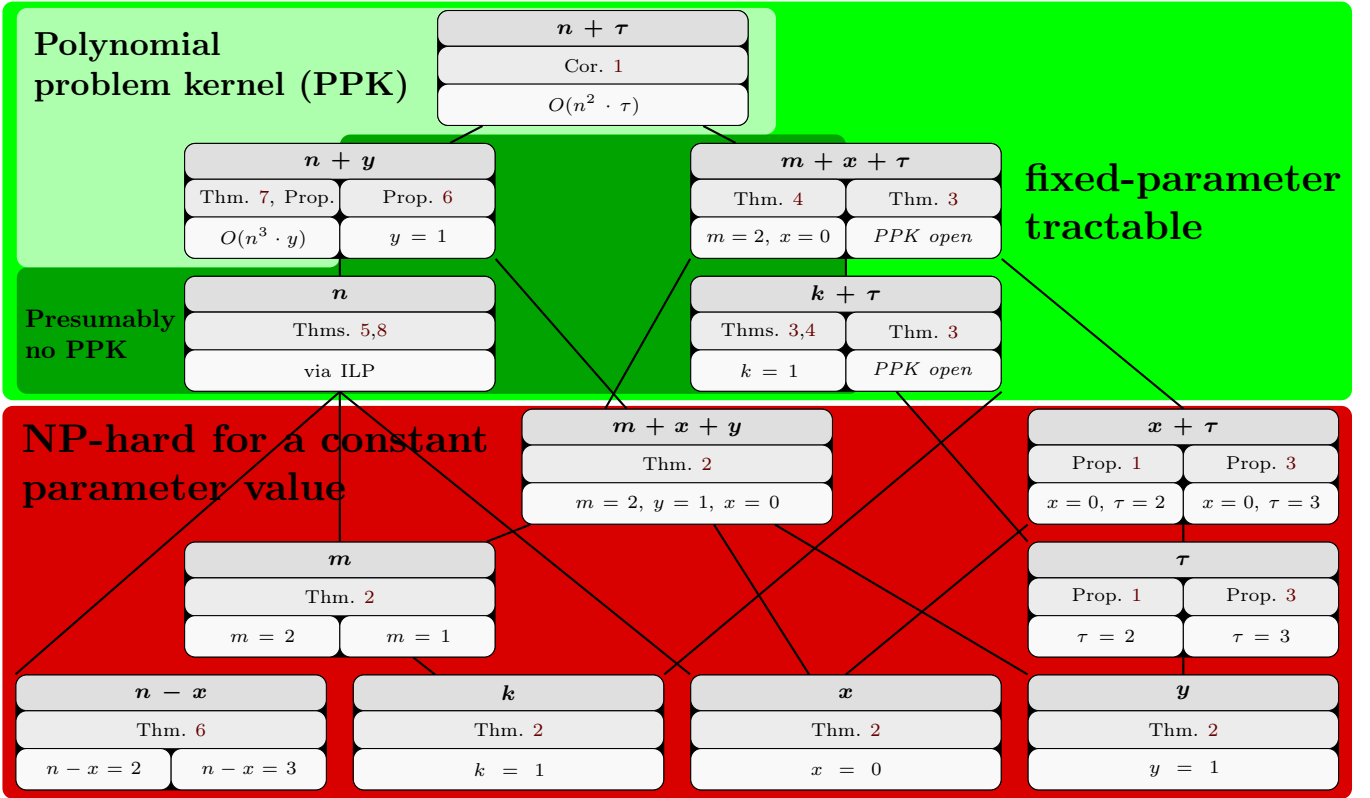


Figure 2: Overview of our results for GCSE and QCSE. Each box has three horizontal layers, the top layer gives the parameter, the middle layer the result's reference, and the bottom layer gives additional information. If a box is vertically split, then the left and right side corresponds to GCSE and QCSE, respectively; Otherwise, the information holds for both. The boxes are arranged according to the corresponding parameter hierarchy: If two boxes are connected by an edge, the upper one's parameter upper bounds the lower one's parameter (by some function).

### 3.1 Dichotomies Regarding the Number of Levels

Both GCSE and QCSE are easy problems if there is only one level. Yet, already for two levels, GCSE becomes NP-hard while QCSE stays efficiently solvable. For three levels, however, also QCSE becomes NP-hard. We have the following.

**Theorem 1.** *We have the following dichotomies for GCSE and QCSE regarding  $\tau$ :*

- (i) *If  $\tau = 1$ , then each of GCSE and QCSE is polynomial-time solvable.*
- (ii) *If  $\tau = 2$ , then (a) GCSE is NP-hard and, unless  $NP \subseteq coNP/poly$ , admits no problem kernel of size  $O(m^{2-\epsilon})$  for any  $\epsilon > 0$ , and (b) QCSE is polynomial-time solvable.*
- (iii) *If  $\tau \geq 3$ , then each of QCSE with  $k \geq m$  and GCSE is NP-hard and, unless the ETH breaks, admits no  $2^{o(n+m)} \cdot poly(n+m)$ -time algorithm.*

We first discuss (iia), then (iib), and finally (iii).

#### 3.1.1 Two Levels Make GCSE Intractable

**Proposition 1** ( $\star$ ). *Even for two levels and  $x = 0$ , GCSE is NP-hard and, unless  $NP \subseteq coNP/poly$ , admits no problem kernel of size  $O(m^{2-\epsilon})$  for any  $\epsilon > 0$ .*

The following problem is NP-hard [20].

CONSTRAINT BIPARTITE VERTEX COVER (CBVC)

**Input:** An undirected bipartite graph  $G = (V, E)$  with  $V = V_1 \uplus V_2$  and  $k_1, k_2 \in \mathbb{N}$ .

**Question:** Is there a set  $X \subseteq V$  with  $|X \cap V_i| \leq k_i$  for each  $i \in \{1, 2\}$  such that  $G - X$  contains no edge?

Note that we can assume that  $k_1 = k_2$ . CBVC is in FPT when parameterized by  $k_1 + k_2$  [11] but, unless  $NP \subseteq coNP/poly$ , admits no problem kernel of size  $O(|V|^{2-\epsilon})$  for any  $\epsilon > 0$  [18]. The construction behind the proof of Proposition 1 is the following (the correctness proof is deferred to the appendix).

**Construction 1.** Let  $I = (G = (V = V_1 \uplus V_2, E), k, k)$  be an instance of CBVC. We construct an instance  $I' := (A, C, (u_1, u_2), k, x, y)$  with  $x = 0$  and  $y = 1$  as follows. For each vertex  $v_{i,j}$  with  $i \in \{1, 2\}$  and  $j \in \{1, \dots, |V_i|\}$ , add a candidate  $c_{i,j}$  to  $C$ . For each edge  $\{v_{1,j}, v_{2,j'}\}$ , add agent  $a_{j,j'}$  to  $A$  which nominates  $c_{1,j}$  in level 1 and  $c_{2,j'}$  in level 2. This finishes the construction.  $\diamond$

#### 3.1.2 Two Levels Leave QCSE Tractable

Interestingly, in contrast to GCSE, just one additional level does not change the tractability of QCSE.

**Proposition 2.** *QCSE is polynomial-time solvable if  $\tau = 2$ .*

We provide reduction rules for a generalization of QCSE on two levels, and then reduce it to a special vari-

ant of CBVC. The generalization of QCSE with  $\tau = 2$  is the following.

X2 EQUITABLE COMMITTEE SEQUENCE ELECTION (X2QCSE)

**Input:** A set  $A$  of agents, a set  $C$  of candidates, a two nomination profiles  $U = (u_1, u_2)$  with  $u_t: A \rightarrow C \cup \{\emptyset\}$ , and five integers  $k_1, k_2, x_1, x_2, y \in \mathbb{N}_0$ .

**Question:** Is there  $C_1 \subseteq C$  with  $|C_1| \leq k_1$  and  $C_2 \subseteq C$  with  $|C_2| \leq k_2$  such that

$$\forall t \in \{1, 2\}: \quad |\{a \in A \mid u_t(a) \in C_t\}| \geq x_t,$$

$$\text{and } \forall a \in A: \quad \sum_{t=1}^2 |u_t(a) \cap C_t| = y?$$

We know that  $y \in \{0, 2\}$  are trivial cases. Thus, we assume that  $y = 1$  is the remainder. Our goal is to reduce X2QCSE to the following problem, which, as we will show subsequently, is polynomial-time solvable.

CONSTRAINT BIPARTITE INDEPENDENT VC w/ SCORE (CBIVCS)

**Input:** An undirected bipartite graph  $G = (V, E)$  with  $V = V_1 \uplus V_2$  and  $k_1, k_2, x_1, x_2 \in \mathbb{N}$ .

**Question:** Is there an independent set  $X \subseteq V$  with  $|X \cap V_i| \leq k_i$  and  $\sum_{v \in X \cap V_i} \deg(v) \geq x_i$  for each  $i \in \{1, 2\}$  such that  $G - X$  contains no edge?

**Lemma 2** ( $\star$ ). *CBIVCS is polynomial-time solvable.*

To reduce X2QCSE to CBIVCS we have to deal with agents nominating none or only one candidate. The first case is immediate.

**Data Reduction Rule 1.** If there is an agent nominating no candidate, then return *no*.

If an agent nominates only one candidate in one level and none in the other, we have to pick this nominated candidates.

**Data Reduction Rule 2** ( $\star$ ). If there is an agent  $a^*$  nominating one candidate  $c^*$  in one level  $t \in \{1, 2\}$ , and none in the other level  $t'$ , then do the following: Decrease  $k_t$  by one,  $x_t$  by  $|\{a \in A \mid u_t(a) = c^*\}|$ , replace each candidate in  $\{c' \in C \mid \exists a \in A : u_t(a) = c^* \wedge u_{t'}(a) = c'\}$  with  $\emptyset$ , and delete all agents from  $\{a \in A \mid u_t(a) = c^*\}$ .

Using Data Reduction Rule 1 and 2 exhaustively, we can finally reduce X2QCSE to CBIVCS, proving Proposition 2.

**Observation 3** ( $\star$ ). *There is a polynomial-time many-one reduction from X2QCSE to CBIVCS.*

### 3.1.3 Three Levels Make QCSE Intractable

We have seen that QCSE is polynomial-time solvable if  $\tau \leq 2$ . This changes for  $\tau \geq 3$ .

**Proposition 3.** *For at least three levels and  $x = 0$ , each of QCSE with  $k \geq m$  and GCSE is NP-hard and, unless the ETH breaks, admits no  $2^{o(n+m)} \cdot \text{poly}(n+m)$ -time algorithm.*

|       | 1                     | 2                | 3                |
|-------|-----------------------|------------------|------------------|
| $A_i$ | $\vdots$              | $\vdots$         | $\vdots$         |
| {     | $a_{i,1}:$            | $c_i$            | $\emptyset$      |
| {     | $a_{i,2}:$            | $\overline{c_i}$ | $c_i$            |
| {     | $a_{i,3}:$            | $\emptyset$      | $\overline{c_i}$ |
| {     | $\overline{a_{i,1}}:$ | $\overline{c_i}$ | $\emptyset$      |
| {     | $\overline{a_{i,2}}:$ | $c_i$            | $\overline{c_i}$ |
| {     | $\overline{a_{i,3}}:$ | $\emptyset$      | $c_i$            |
| {     | $\vdots$              | $\vdots$         | $\vdots$         |
| {     | $a_r:$                | $c_i$            | $c_q$            |
| {     | $\vdots$              | $\vdots$         | $\overline{c_p}$ |
| {     | $\vdots$              | $\vdots$         | $\vdots$         |

Figure 3: Illustration to Construction 2 with  $K_r = (x_i \vee x_q \vee \overline{x_p})$ .

For GCSE, the proof is via a polynomial-time many-one reduction from the famous NP-complete problem 3-SATISFIABILITY (3-SAT), which transfers the well-known ETH lower bound [17] as well as NP-hardness [13]. Given a set  $X$  of  $N$  variables and a 3-CNF formula  $\phi = \bigwedge_{i=1}^M K_i$  over  $X$ , 3-SAT asks whether there is a truth assignment  $f: X \rightarrow \{\perp, \top\}$  satisfying  $\phi$ .

**Construction 2.** Let  $I = (X, \phi)$  be an instance of 3-SAT with  $N$  variables and  $M$  clauses. We construct an instance  $I' := (A, C, U, k, x, y)$  of GCSE as follows (see Fig. 3 for an illustration). Let  $C := \{c_i, \overline{c_i} \mid x_i \in X\}$ . Let  $A_i := \bigcup_{j=1}^3 \{a_{i,j}, \overline{a_{i,j}}\}$  for each  $i \in \{1, \dots, N\}$ . and  $A := A_1 \cup \dots \cup A_N \cup \{a_1, \dots, a_M\}$ . See Fig. 3 for the nominations. Let  $k := N$ ,  $x := 0$ , and  $y := 1$ .  $\diamond$

The construction provides the following key property when  $I'$  is a *yes*-instance: for every variable, exactly one of the two corresponding candidates must be in the committee.

**Lemma 3** ( $\star$ ). *If  $I'$  is a yes-instance, then for every solution  $(C_1, C_2, C_3)$  it holds true that  $|C_j \cap \{c_i, \overline{c_i}\}| = 1$  and  $C_j \cap \{c_i, \overline{c_i}\} = C_{j'} \cap \{c_i, \overline{c_i}\}$  for all  $j, j' \in \{1, 2, 3\}$  and  $i \in \{1, \dots, N\}$ .*

*Proof of Proposition 3 (GCSE).* ( $\Rightarrow$ ) Let  $f$  be a satisfying truth assignment. We claim that  $(C', C', C')$  with  $C' = \{c_i \in C \mid f(x_i) = \top\} \cup \{\overline{c_i} \in C \mid f(x_i) = \perp\}$  is a solution to  $I'$ . Clearly,  $|C'| = N$ . Moreover, if  $f(x_i) = \top$ , then  $a_{i,j}$  is satisfied in level  $j$ , and  $\overline{a_{i,1}}$  is satisfied in level 3 and  $\overline{a_{i,j}}$  with  $j \in \{2, 3\}$  is satisfied in level  $j - 1$ . If  $f(x_i) = \perp$ , then  $\overline{a_{i,j}}$  is satisfied in level  $j$ , and  $a_{i,1}$  is satisfied in level 3 and  $a_{i,j}$  with  $j \in \{2, 3\}$  is satisfied in level  $j - 1$ . Since  $f$  is satisfying, there is exactly one level  $t$  with  $a_r$  being satisfied.

( $\Leftarrow$ ) Let  $(C_1, C_2, C_3)$  be a solution to  $I'$ . From Lemma 3 we know that  $C' = C_1 = C_2 = C_3$  and that  $C' \cap \{c_i, \overline{c_i}\} = 1$  for all  $i \in \{1, \dots, N\}$ . Let  $f(x_i) = \top$  if  $c_i \in C'$ , and  $f(x_i) = \perp$  otherwise. Clearly,  $f$  is a truth assignment. Suppose it is not satisfying, i.e., there is a clause  $K_r$  with no literal evaluated to true. Then, agent  $a_r$  is satisfied in no level, contradicting that  $(C_1, C_2, C_3)$  is a solution to  $I'$ .  $\square$

For QCSE, yet using again Construction 2, we instead reduce from the NP-hard problem EXACTLY 1-IN-3

SAT (X1-3SAT) [24], where, given a boolean 3-CNF formula  $\phi$  over a set  $X$  of variables, the question is whether there is a truth assignment  $f: X \rightarrow \{\perp, \top\}$  such that for every clause, there is exactly one literal evaluated to true?

Notably, Lemma 3 also holds true here. In fact, we can even allow  $k = 2N$ , since for each variable only one candidate is chosen, as otherwise there is an agent scoring more than once.

### 3.2 Few Candidates Are of No Help

One could conjecture that it should be possible to guess the committees, and hence get some, possibly non-uniformly polynomial running time when the number of candidates is constant. In this section, we will show that this conjecture is wrong unless  $P = NP$ : each of GCSE and QCSE are NP-hard even for two candidates.

**Theorem 2** ( $\star$ ). *Even for  $x = 0$ ,  $k = 1$ , and  $y = 1$ , each of GCSE with two candidates and QCSE with one candidate is NP-hard. Moreover, unless the SETH breaks, GCSE admits no  $(2 - \varepsilon)^\tau \cdot \text{poly}(\tau + n)$ -algorithm.*

For GCSE, we reduce from the well-known NP-complete problem SATISFIABILITY (SAT), which transfers the well-known SETH lower bound [16] as well as NP-hardness [13]. Given a set  $X$  of  $N$  variables and a CNF formula  $\phi = \bigwedge_{i=1}^M K_i$  over  $X$ , SAT asks whether there is a truth assignment  $f: X \rightarrow \{\perp, \top\}$  satisfying  $\phi$ .

The construction is quite intuitive: Each level corresponds to a variable, and each agent corresponds to a clause. In each level, if the corresponding variable appears as a literal in the agent's corresponding clause, then the agent nominates a candidate regarding whether it appears negated or unnegated.

**Construction 3.** Let  $I = (X, \phi)$  be an instance of SAT. Construct an instance  $I' := (A, C, U, k, x, y)$  as follows. Let  $A := \{a_1, \dots, a_M\}$ ,  $C := \{c_\top, c_\perp\}$ ,  $\tau := N$ ,  $x := 0$ ,  $k := 1$ , and  $y := 1$ . In level  $i$ , agent  $a_j$  nominates

$$\begin{cases} c_\top, & \text{if } x_i \text{ appears unnegated in } K_j, \\ c_\perp, & \text{if } x_i \text{ appears negated in } K_j, \text{ and} \\ \emptyset, & \text{otherwise.} \end{cases}$$

This finishes the construction.  $\diamond$

*Remark 1.* For QCSE, we reduce from X1-3SAT (see previous section) where no variable appears negated [25], where the construction is very similar to Construction 3 (yet  $c_\perp$  can be dropped). Hence, a lower bound based on the SETH as for GCSE remains open for QCSE.  $\triangleleft$

## 4 Tractability

In this section, we discuss non-trivial tractable cases of GCSE and QCSE. It turns out that fixed-parameter tractability starts with the number  $n$  of agents or the solution size  $k \cdot \tau$ , i.e., with the combination of the size  $k$  of each committee and the number  $\tau$  of levels. As to

the latter, recall that each of GCSE and QCSE is NP-hard if either  $k$  is constant or  $\tau$  is constant. Finally, we discuss efficient and effective data reduction regarding  $n$  and  $n + y$ .

### 4.1 Few Small Committees May be Tractable

We show that each of GCSE and QCSE when parameterized by the solution size  $k \cdot \tau$  is in FPT. That is, we can deal with many agents and candidates, as long as we are asked to elect few small committees. We also show that GCSE admits presumably no problem kernel of size polynomial in  $m \cdot \tau$ .

**Theorem 3.** *Each of GCSE and QCSE is solvable in  $2^{k \cdot \tau^2} \cdot \text{poly}(n + m + \tau)$  time, and hence fixed-parameter tractable when parameterized by  $k + \tau$ .*

We introduce generalized versions of GCSE and QCSE. Intuitively, they allow to fix certain parts of the solution. Moreover, one may request level-individual committee sizes, level-individual numbers of nomination the committees shall receive, and agent-individual numbers of successful nominations the agents still have to make.

PRE-ELECTED GCSE (PE-GCSE)

**Input:** A set  $A$  of agents, a set  $C$  of candidates, a sequence of nomination profiles  $U = (u_1, \dots, u_\tau)$  with  $u_t: A \rightarrow C \cup \{\emptyset\}$ , integers  $x_t, k_t \in \mathbb{N}_0$  for each  $t \in \{1, \dots, \tau\}$  and integers  $y_a \in \mathbb{N}_0$  for each  $a \in A$ .

**Question:** Is there a sequence  $C_1, \dots, C_\tau \subseteq C$  with  $|C_t| \leq k_t$  for every  $t \in \{1, \dots, \tau\}$  such that

$$\begin{aligned} \forall t \in \{1, \dots, \tau\}: & \quad |\{a \in A \mid u_t(a) \in C_t\}| \geq x_t, \\ \text{and } \forall a \in A: & \quad \sum_{t=1}^{\tau} |u_t(a) \cap C_t| \geq y_a. \end{aligned} \quad (3)$$

PRE-ELECTED QCSE (PE-QCSE) denotes the variant when replacing " $\geq$ " with " $=$ " in (3).

Each of PE-GCSE and PE-QCSE use slightly different approaches. However, the core idea is the same: in any solution, each agent has a fingerprint over all levels regarding whether or not her candidate is elected into the respective committee. Note that there are at most  $2^\tau$  fingerprints. Hence, we can guess such a fingerprint for any unsatisfied agent and branch. Together with the fact that the sum of the committee sizes in the sequence is at most  $k \cdot \tau$ , the result follows.

Throughout, we use the following. Fix any agent  $a \in A$ . We define for  $A' := A \setminus \{a\}$  the utility function

$$u_t - u_t(a): A' \rightarrow C \cup \{\emptyset\}, (u_t - u_t(a))(a') \mapsto u_t(a') \setminus u_t(a).$$

We first show the following Turing-reduction for PE-GCSE. The idea of this reduction is then used to obtain fixed-parameter tractability through Algorithm 1.

**Lemma 4** ( $\star$ ). *Let  $I := (A, C, U, (k_t)_t, (x_t)_t, (y_a)_{a \in A})$  be an instance with at least one agent  $a \in A$  with  $y_a > 0$  and at least one fingerprint with at least  $y_a$  non-empty entries. Then,  $I$  is a yes-instance of PE-GCSE if and only*

---

**Algorithm 1:** FPT-algorithm for PE-GCSE parameterized by  $k + \tau$  on input  $(A, C, U, (k_t)_t, (x_t)_t, (y_a)_a)$ .

---

```

1 main((A, C, U, (k_t)_t, (x_t)_t, (y_a)_a));
2 return no;
3 function main((A, C, U, (k_t)_t, (x_t)_t, (y_a)_a):
4   if  $k_t < 0$  for some  $t \in \{1, \dots, \tau\}$  then break
5   if  $\forall a \in A: y_a \leq 0$  then
6     foreach  $t \in \{1, \dots, \tau\}$  do
7       if  $x_t > 0$  then
8         if any level- $t$  committee of  $k_t$  most
           nominated candidates in  $C$ 
           w. r. t.  $u_t$  scores less than  $x_t$  then
           break
9     return yes
10  if  $\exists a \in A$  with  $y_a > 0$  but no fingerprint with at
      least  $y_a$  non-empty entries then break
11  Let  $a \in A$  be such that  $y_a > 0$  with at least
      one fingerprint with at least  $y_a$  non-empty
      entries
12  foreach  $X \in \{u_1(a), \emptyset\} \times \dots \times \{u_\tau(a), \emptyset\}$  with
      at least  $y_a$  non-empty entries do //  $\leq 2^\tau$ 
      many
13    foreach  $t \in \{1, \dots, \tau\}$  do
14      Set  $x'_t \leftarrow x_t - |\{a' \in A \mid u_t(a') =$ 
         $X_t \wedge X_t \neq \emptyset\}|$ ,  $u'_t \leftarrow u_t - u_t(a)$ , and
         $k'_t \leftarrow k_t - |X_t|$ 
15      foreach  $a' \in A' \leftarrow A \setminus \{a\}$  do
16        Set  $y'_{a'} \leftarrow y_{a'} - \sum_t |u_t(a') \cap X_t|$ 
17      main((A', C, U', (k'_t)_t, (x'_t)_t, (y'_a)_a))

```

---

if for any agent  $a \in A$  with  $y_a > 0$  and at least one fingerprint with at least  $y_a$  non-empty entries, one of the instances  $I^1, \dots, I^p$  is a yes-instance, where  $X^1, \dots, X^p \in \{u_1(a), \emptyset\} \times \dots \times \{u_\tau(a), \emptyset\}$  are the fingerprints with at least  $y_a$  non-empty entries and for each  $q \in \{1, \dots, p\}$ ,  $I^q = (A', C, U', (k'_t)_t, (x'_t)_t, (y'_a)_{a \in A'})$ , where  $A' := A \setminus \{a\}$ , and

- for each  $t \in \{1, \dots, \tau\}$ ,  $x'_t := x_t - |\{a' \in A \mid u_t(a') = X_t^q \wedge X_t^q \neq \emptyset\}|$ ,  $u'_t := u_t - u_t(a)$ ,  $k'_t := k_t - |X_t^q|$ , and
- for each  $a' \in A'$ ,  $y'_{a'} := y_{a'} - \sum_{t=1}^\tau |u_t(a') \cap X_t^q|$ .

**Proposition 4** ( $\star$ ). *Algorithm 1 is correct and runs in FPT-time regarding  $k + \tau$ .*

The proof for PE-QCSE works very similarly and is hence deferred to the appendix.

In terms of kernelization, we cannot improve much further: Presumably, there is no problem kernel of size polynomial in  $k + \tau$ . In fact, we have the following stronger result.

**Theorem 4** ( $\star$ ). *Unless  $NP \subseteq coNP/poly$ , GCSE admits no problem kernel of size polynomial in  $\tau$ , even if  $m = 2$  and  $x = 0$ .*

*Remark 2.* We leave open whether the composition can be adapted for QCSE. For this, the last  $q$  levels forming

the selection gadget must be changed or extended such that each agent gets the same score over the selection.  $\triangleleft$

## 4.2 Tractability Borders Regarding $n$

We first show that both problems become fixed-parameter tractable when parameterized by the number  $n$  of agents.

**Theorem 5.** *Each of GCSE and QCSE is fixed-parameter tractable when parameterized by  $n$ .*

*Proof.* Due to Lemma 1, we know that there are at most  $n$  candidates, and at most  $\nu := (n + 1)^n$  pairwise different nomination profiles. That is, we have at most  $\nu$  types, each having at most  $\binom{n}{k}$  committees of size  $k$  and score of at least  $x$  (we call such a committee *valid* subsequently; note that we can check whether a committee is valid in linear time).

Let  $x_{t,\phi}$  denote the variable for type  $t$  and valid committee  $\phi$ . Let  $n_t$  denote the number of type- $t$  profiles. For an agent  $a \in A$ , let  $\mathcal{X}_a$  denote the set of tuples  $(t, \phi)$  where valid committee  $\phi$  respects  $a$ 's nomination in level  $t$ . We then have the following integer programming constraints for GCSE:

$$\begin{aligned}
\forall a \in A: \quad & \sum_{(t,\phi) \in \mathcal{X}_a} x_{t,\phi} \geq y & (4) \\
\forall t: \quad & \sum_{\text{valid } \phi} x_{t,\phi} = n_t \\
\forall t, \text{ valid } \phi: \quad & 0 \leq x_{t,\phi} \leq n_t
\end{aligned}$$

As to Lenstra Jr. [22], having  $2^{O(n \log(n))}$  variables and constraints, and numbers upper bounded by  $\tau$ , the result follows. For QCSE, we replace “ $\geq$ ” with “ $=$ ” in (4).  $\square$

Theorem 5 is in fact tight in the following sense: decreasing  $n$  by  $x$  gives a useless parameter (presumably).

**Theorem 6** ( $\star$ ). *GCSE is NP-hard even if  $n - x = 2$  and  $m = 3$ , and QCSE is NP-hard even if  $n - x = 3$  and  $m = 2$ .*

The construction behind the proof of Theorem 6 is very similar to Construction 3 but with no empty nominations (we hence defer also the construction to the appendix).

The FPT-algorithm behind Theorem 5 is not running in single-exponential time. Combining  $n$  with  $y$  gives single-exponential running time.

**Theorem 7.** *Each of GCSE and QCSE is solvable in  $O((y + 1)^n \cdot 2^n \cdot n \cdot \tau)$  time.*

*Proof.* We give the proof for QCSE, and it is not hard to adapt it for GCSE. We use dynamic programming, where table

$D[t, \mathbf{y}]$  is true if and only if there are committees  $C_1, \dots, C_t$  each with committee size at most  $k$  and a score of at least  $x$  such that the score of each agent  $a_i$  at time  $t$  sums up to exactly  $y_i$ , where  $\mathbf{y} = (y_1, \dots, y_n)$ .

Set  $D[t, \mathbf{y}]$ , where  $t > 1$  and each entry of  $\mathbf{y}$  is at most  $y$ , to true if and only if there is a set-to-true  $D[t-1, \mathbf{y}']$  and a size-at-most  $k$  score-at-least  $x$  committee  $C' \subseteq C$  with respect to  $u_t$  such that  $\mathbf{y}' + \vec{c} = \mathbf{y}$ , where  $\vec{c} = (c_1, \dots, c_n) \in \{0, 1\}^n$  with  $c_i = 0 \iff u_t(a_i) \cap C' = \emptyset$  is called the fingerprint of  $C'$  regarding level  $t$ . Set

$$D[1, \vec{c}] := \begin{cases} \top, & \text{if there is a size-at-most } k \\ & \text{score-at-least } x \text{ committee } C' \subseteq C \\ & \text{with fingerprint } \vec{c} \text{ regarding level 1, and} \\ \perp, & \text{otherwise.} \end{cases}$$

Return *yes* if the entry  $D[\tau, (y_1, \dots, y_n)]$  is set to true, where  $y_1 = y_2 = \dots = y_n = y$ , and *no* otherwise.

The running time of filling the table is clear: We have at most  $\tau \cdot (y+1)^n$  entries and at most  $2^n$  different committees per level. We defer the correctness proof to the appendix.  $\square$

### 4.3 Efficient and Effective Data Reduction Regarding $n$ and $y$

While GCSE admits a problem kernel of size polynomial in  $n + y$ , QCSE does not presumably. Moreover, for GCSE, dropping  $y$  also leads to kernelization lower bounds. We have the following.

**Theorem 8** ( $\star$ ). *Unless  $NP \subseteq coNP/poly$ , (i) GCSE admits no problem kernel of size polynomial in  $n$ , even if  $m = 2$  and  $k = 1$ , and (ii) QCSE admits no problem kernel of size polynomial in  $n$ , even if  $m = 2$ ,  $k = 1$ , and  $y = 1$ . (iii) GCSE admits a problem kernel of size polynomial in  $n + y$ .*

We only discuss (iii) briefly (refer to the appendix for the remaining details).

**Proposition 5.** *GCSE admits a problem kernel of size polynomial in  $n + y$ .*

In the following, we (again) call a committee *valid* if its size is at most  $k$  and its score is at least  $x$ . For an agent  $a$ , we denote by  $Z(a)$  the set of all levels where there is a valid committee containing  $a$ 's nominated candidate. We call an agent  $a$  *non-critical* if  $|Z(a)| > n \cdot y$ , and *critical* otherwise. We have the followings.

**Data Reduction Rule 3** ( $\star$ ). *If every agent  $a$  is non-critical, then return a trivial *yes*-instance.*

Thus, if we have a non-trivial instance, then there must be a critical agent. We will see that the number of critical agents can upper bound the number of levels. To this end, we first delete levels which are irrelevant to critical agents as follows.

**Data Reduction Rule 4.** *If there is a level  $t^*$  such that there is at least one valid committee and every valid committee only includes candidates nominated by non-critical agents, then delete this level.*

*Proof.* Let  $I = (A, C, U, k, x, y)$  be the input instance and  $I' := (A, C, U', k, x, y)$  be the instance obtained by

the reduction rule. Clearly, if  $I'$  is a *yes*-instance, then  $I$  is a *yes*-instance. Hence, we show the converse next.

Assume towards a contradiction that for every solution  $\mathcal{C} := (C_1, \dots, C_{t^*}, \dots, C_\tau)$  it holds true that  $\mathcal{C}' := (C_1, \dots, C_{t^*-1}, C_{t^*+1}, \dots, C_\tau)$  is no solution to  $I'$ , i.e., there is a maximal set  $A^* \subseteq A$  of agents which is not satisfied when  $C_{t^*}$  is dropped. Let  $q := |A^*|$ . Recall that  $A^*$  consists of only non-critical agents. Let  $\overline{T} \subseteq \{1, \dots, \tau\} \setminus \{t^*\}$  be a minimum-size set of levels such that all agents of  $A \setminus A^*$  are satisfied (which exists since  $\mathcal{C}'$  satisfies all agents except for those in  $A^*$ ). Note that  $|\overline{T}| \leq (n - q) \cdot y$ . Let  $T := \{1, \dots, \tau\} \setminus (\overline{T} \cup \{t^*\})$ . Hence, for all  $a \in A^*$ , we have that  $|Z(a) \cap T| \geq |Z(a)| - |\overline{T} \cup \{t^*\}| \geq n \cdot y + 1 - ((n - q) \cdot y + 1) \geq q \cdot y$ . Thus, there is a solution to  $I'$ , yielding a contradiction.  $\square$

It follows that in every level, there must be a valid committee for any of the at most  $n$  critical agents, each of which has at most  $n \cdot y$  levels of this kind. This leads to the following.

**Lemma 5** ( $\star$ ). *If each of Data Reduction Rule 3 and 4 is inapplicable, then there are at most  $n^2 \cdot y$  levels.*

To conclude, GCSE admits presumably no problem kernel of size polynomial in  $n$ , but one of size polynomial in  $n + y$ . Interestingly, for QCSE the latter is presumably impossible.

**Proposition 6** ( $\star$ ). *Unless  $NP \subseteq coNP/poly$ , QCSE admits no problem kernel of size polynomial in  $n$ , even if  $m = 2$ ,  $k = 1$ , and  $y = 1$ .*

## 5 Epilogue

We settled the parameterized complexity for both GCSE and QCSE for several natural parameters and their combinations. We found that both problems become tractable only if either the number of agents or the solution size is lower bounding the parameter. Hence, short trips with few per-day activities like in our introductory example can be tractable even if many agents participate and if there are many activities available. Also the practically relevant setting where few agents have to select from many options, where egalitarian or even equitable solutions appear particularly relevant, can be solved efficiently.

Our two problems have a very similar complexity fingerprint, yet, they distinguish through the lens of efficient and effective data reduction: While GCSE admits a problem kernel of size polynomial in  $n + y$ , QCSE presumably does not. In other words, it appears unlikely that we can efficiently and effectively shrink the number of levels for QCSE.

**Other Variants.** Looking at the constraints in GCSE and QCSE, one quickly arrives at the following general problem. Herein, we generalize to preference functions, where each agent assigns some utility value to each candidate. Moreover, we use generalized OWA-based aggregation, e.g., allowing  $\max(\cdot)$  and thus modeling rules such as Chamberlin-Courant. Let  $\sim \in \{\leq, =, \geq\}$ ,

$\Lambda = \{\Lambda_k \in \mathbb{R}^k \mid k \in \mathbb{N}\}$  be a family of (OWA) vectors, and  $\mathcal{U}$  be a class of preference functions. We write  $\vec{u}(C')$  for the vector of utilities that  $u$  assigns to the candidates from  $C'$  sorted in nonincreasing order. See Brederbeck et al. [3] for details.

$(\sim_k \mid \sim_x, \sim_y)$ -BiCMCE $[\Lambda, \mathcal{U}]$

**Input:** A set  $A$  of agents, a set  $C$  of candidates, a sequential profile of preference functions  $U = (u_{a,t} : C \rightarrow \mathbb{N}_0 \mid a \in A, t \in \{1, \dots, \tau\})$  each from  $\mathcal{U}$ , and three integers  $k, x, y \in \mathbb{N}_0$ .

**Question:** Is there a sequence  $C_1, \dots, C_\tau \subseteq C$  such that

$$\forall t \in \{1, \dots, \tau\}: \quad |C_t| \sim_k k, \quad (5)$$

$$\forall t \in \{1, \dots, \tau\}: \quad \sum_{a \in A} \langle \Lambda_{|C_t|}, \vec{u}_{a,t}(C_t) \rangle \sim_x x, \quad (6)$$

$$\text{and } \forall a \in A: \quad \sum_{t=1}^{\tau} \langle \Lambda_{|C_t|}, \vec{u}_{a,t}(C_t) \rangle \sim_y y? \quad (7)$$

Let SUM denote the family of OWA-vectors containing only 1-entries, and NOM be the class of preference functions that contain only 0-entries except for at most one 1-entry. We have that GCSE is  $(\leq \mid \geq, \geq)$ -BiCMCE[SUM, NOM] and QCSE is  $(\leq \mid \geq, =)$ -BiCMCE[SUM, NOM]. It turns out that all variants except for  $(\leq \mid \leq, \leq)$ -BiCMCE[SUM, NOM] and  $(\geq \mid \geq, \geq)$ -BiCMCE[SUM, NOM] are NP-hard. In fact, most of the variants (including GCSE and QCSE) are NP-hard even if every voter does not change their vote over the levels. We defer the details to the appendix  $\star$ .

**Outlook.** Since our model is novel, also several future research directions come to mind. A parameterized analysis of the variants of  $(\sim_k \mid \sim_x, \sim_y)$ -BiCMCE $[\Lambda, \mathcal{U}]$  next to GCSE and QCSE could reveal where these variants differ from each other. One could consider a global budget instead of a budget for each level, that is, variants where  $|\bigcup_{t=1}^{\tau} C_t| \leq k$  or  $\sum_{t=1}^{\tau} |C_t| \leq k$ . Speaking of variants, another modification could be where the score of any two agents must not differ by more than some given  $\gamma$ . Finally, as a concrete question: does GCSE or QCSE admit a problem kernel of size polynomial in  $k$  if  $\tau$  is constant? (Recall that due to Theorem 4, we know that there is presumably no problem kernel for GCSE of size polynomial in  $\tau$  if  $k$  is constant.)

## Acknowledgements

We thank IJCAI'23 reviewers for constructive feedback.

## References

- [1] Haris Aziz, Piotr Faliszewski, Bernard Grofman, Arkadii Slinko, and Nimrod Talmon. “Egalitarian Committee Scoring Rules”. In: *Proceedings of the 27th International Joint Conference on Artificial Intelligence (IJCAI '18)*. 2018, pp. 56–62 (cit. on p. 2).
- [2] Hans L. Bodlaender, Stéphan Thomassé, and Anders Yeo. “Kernel bounds for disjoint cycles and disjoint paths”. *Theoretical Computer Science* 412.35 (2011), pp. 4570–4578 (cit. on p. 13).
- [3] Robert Brederbeck, Piotr Faliszewski, Andrzej Kaczmarczyk, Dušan Knop, and Rolf Niedermeier. “Parameterized Algorithms for Finding a Collective Set of Items”. In: *Proceedings of the 33rd Conference on Artificial Intelligence (AAAI '19)*. AAAI Press, 2020, pp. 1838–1845 (cit. on p. 8).
- [4] Robert Brederbeck, Till Fluschnik, and Andrzej Kaczmarczyk. “When Votes Change and Committees Should (Not)”. In: *Proceedings of the 31st International Joint Conference on Artificial Intelligence (IJCAI '22)*. ijcai.org, 2022, pp. 144–150 (cit. on p. 2).
- [5] Robert Brederbeck, Andrzej Kaczmarczyk, and Rolf Niedermeier. “Electing Successive Committees: Complexity and Algorithms”. In: *Proceedings of the 34th Conference on Artificial Intelligence (AAAI '20)*. 2020, pp. 1846–1853 (cit. on p. 2).
- [6] Laurent Bulteau, Noam Hazon, Rutvik Page, Ariel Rosenfeld, and Nimrod Talmon. “Justified Representation for Perpetual Voting”. *IEEE Access* 9 (2021) (cit. on p. 2).
- [7] Marek Cygan, Fedor V. Fomin, Lukasz Kowalik, Daniel Lokshtanov, Dániel Marx, Marcin Pilipczuk, Michal Pilipczuk, and Saket Saurabh. *Parameterized Algorithms*. Springer, 2015. [↗](#) (cit. on p. 2).
- [8] Andreas Darmann and Janosch Döcker. “On simplified NP-complete variants of Monotone 3-SAT”. *Discret. Appl. Math.* 292 (2021), pp. 45–58. [↗](#) (cit. on p. 13).
- [9] David Eisenstat, Claire Mathieu, and Nicolas Schabanel. “Facility Location in Evolving Metrics”. In: *Proceedings of the 41st International Colloquium on Automata, Languages, and Programming (ICALP '14)*. 2014, pp. 459–470 (cit. on p. 2).
- [10] Edith Elkind, Piotr Faliszewski, Piotr Skowron, and Arkadii Slinko. “Properties of multiwinner voting rules”. *Social Choice and Welfare* 48.3 (2017), pp. 599–632 (cit. on p. 2).
- [11] Henning Fernau and Rolf Niedermeier. “An Efficient Exact Algorithm for Constraint Bipartite Vertex Cover”. *Journal of Algorithms* 38.2 (2001), pp. 374–410. [↗](#) (cit. on p. 3).
- [12] Rupert Freeman, Seyed Majid Zahedi, and Vincent Conitzer. “Fair and Efficient Social Choice in Dynamic Settings”. In: *Proceedings of the 26th International Joint Conference on Artificial Intelligence (IJCAI '17)*. 2017, pp. 4580–4587 (cit. on p. 2).
- [13] M. R. Garey and David S. Johnson. *Computers and Intractability: A Guide to the Theory of NP-Completeness*. W. H. Freeman, 1979 (cit. on pp. 4, 5, 16).
- [14] Anupam Gupta, Kunal Talwar, and Udi Wieder. “Changing Bases: Multistage Optimization for Matroids and Matchings”. In: *Proceedings of the 41st International Colloquium on Automata, Languages, and Programming (ICALP '14)*. 2014, pp. 563–575 (cit. on p. 2).



- [15] Danny Hermelin, Stefan Kratsch, Karolina Soltys, Magnus Wahlström, and Xi Wu. “A Completeness Theory for Polynomial (Turing) Kernelization”. *Algorithmica* 71.3 (2015), pp. 702–730. [↗](#) (cit. on p. 13).
- [16] Russell Impagliazzo and Ramamohan Paturi. “On the Complexity of  $k$ -SAT”. *Journal of Computer and System Sciences* 62.2 (2001), pp. 367–375 (cit. on p. 5).
- [17] Russell Impagliazzo, Ramamohan Paturi, and Francis Zane. “Which Problems Have Strongly Exponential Complexity?” *Journal of Computer and System Sciences* 63.4 (2001), pp. 512–530 (cit. on p. 4).
- [18] Bart M. P. Jansen. “Constrained Bipartite Vertex Cover: The Easy Kernel is Essentially Tight”. In: *Proceedings of the 33rd International Symposium on Theoretical Aspects of Computer Science (STACS '16)*. Vol. 47. LIPIcs. Schloss Dagstuhl—Leibniz-Zentrum für Informatik, 2016, 45:1–45:13. [↗](#) (cit. on p. 3).
- [19] Leon Kellerhals, Malte Renken, and Philipp Zschoche. “Parameterized Algorithms for Diverse Multistage Problems”. In: *Proceedings of the 29th Annual European Symposium on Algorithms (ESA '21)*. Schloss Dagstuhl – Leibniz-Zentrum für Informatik, 2021, 55:1–55:17 (cit. on p. 2).
- [20] Sy-Yen Kuo and W. Kent Fuchs. “Efficient Spare Allocation for Reconfigurable Arrays”. *IEEE Design & Test of Computers* 4.1 (1987), pp. 24–31. [↗](#) (cit. on p. 3).
- [21] Martin Lackner. “Perpetual Voting: Fairness in Long-Term Decision Making”. In: 2020, pp. 2103–2110 (cit. on p. 2).
- [22] Hendrik W. Lenstra Jr. “Integer Programming with a Fixed Number of Variables”. *Mathematics of Operations Research* 8.4 (1983), pp. 538–548. [↗](#) (cit. on p. 6).
- [23] David C. Parkes and Ariel D. Procaccia. “Dynamic Social Choice with Evolving Preferences”. In: 2013, pp. 767–773 (cit. on p. 2).
- [24] Thomas J. Schaefer. “The Complexity of Satisfiability Problems”. In: *Proceedings of the 10th Annual ACM Symposium on Theory of Computing (STOC'78)*. ACM, 1978, pp. 216–226. [↗](#) (cit. on p. 5).
- [25] Tatjana Schmidt. “Computational complexity of SAT, XSAT and NAE-SAT for linear and mixed Horn CNF formulas”. PhD thesis. University of Cologne, 2010 (cit. on pp. 5, 13).

## Appendix

### A Additional Material for Section 2

We denote by  $B_N(i)$  the binary string of length  $2N$  with first  $N \in \mathbb{N}$  bits encoding number  $i - 1 \in \{0, \dots, 2^N - 1\}$  on  $N$  bits, where the first bit is the leading bit, and the last  $N$  bits is the complement encoding; e.g.,  $B_2(2) = (0, 1, 1, 0)$ . For  $c \in C$ , we denote by  $u_t^{-1}(c) = \{a \in A \mid u_t(a) = c\}$ .

#### A.1 Proof of Lemma 1

*Proof.* Let  $C' = \{c'_1, \dots, c'_n\}$  be a set of candidates with  $C' \cap C = \emptyset$ . Now, for each  $t \in \{1, \dots, \tau\}$ , do the following (consider  $A = \{a_1, \dots, a_n\}$  implicitly ordered). If  $i$  is the smallest index such that  $u_t(a_i) \in C$ , and  $j$  the smallest index such that  $c'_j$  is not yet nominated, replace each nomination of  $u_t(a_i)$  by  $c'_j$ . Correctness follows from the fact that  $u_t(a_i) = u_t(a_j) \iff u'_t(a_i) = u'_t(a_j)$  for every  $i, j \in \{1, \dots, n\}$  and  $t \in \{1, \dots, \tau\}$ .  $\square$

### B Additional Material for Section 3

#### B.1 Proof of Proposition 1

*Proof of Proposition 1.* ( $\Rightarrow$ ) Let  $X$  with  $X_i := X \cap V_i$  be a solution to  $I$ . We claim that  $C_i := \{c_{i,j} \mid v_{i,j} \in X_i\}$ ,  $i \in \{1, 2\}$ , is a solution to  $I'$ . Note that  $|C_i| = |X_i| \leq k$  for each  $i \in \{1, 2\}$ . Moreover, suppose that there is an agent  $a_{j,j'}$  not being satisfied. Then, by construction, edge  $\{v_{1,j}, v_{2,j'}\}$  is not covered—a contradiction.

( $\Leftarrow$ ) Let  $(C_1, C_2)$  be a solution to  $I$ . We claim that  $X = X_1 \cup X_2$  with  $X_i := \{v_{i,j} \mid c_{i,j} \in C_i\}$ ,  $i \in \{1, 2\}$ , is a solution to  $I$ . Note that  $|X_i| = |C_i| \leq k$  for each  $i \in \{1, 2\}$ . Moreover, suppose that there is an edge  $\{v_{1,j}, v_{2,j'}\}$  not being covered. Then, by construction, agent  $a_{j,j'}$  is not satisfied—a contradiction.  $\square$

#### B.2 Proof of Lemma 2

The main ingredient is the following, which follows from the connectivity together with the unique 2-coloring.

**Observation 4.** *Let  $I = (G = (V = V_1 \uplus V_2, E), k_1, k_2, x_1, x_2)$  be a yes-instance of CBIVCS and let  $C_q = (V^q = V_1^q \cup V_2^q, E_q)$  be a connected component of  $G$ . Then, for every solution  $X$  to  $I$ , it holds true that either  $V_1^q \subseteq X$  or  $V_2^q \subseteq X$ .*

*Proof of Lemma 2.* Let  $(G = (V = V_1 \uplus V_2, E), k_1, k_2, x_1, x_2)$  be an input instance of CBIVCS. Let  $C_1 = (V^1 = V_1^1 \cup V_2^1, E_1), \dots, C_p = (V^p = V_1^p \cup V_2^p, E_p)$  be the enumerated connected components of  $G$ . We define  $N_j^i := |V_j^i|$  and  $M_i := |E_i|$ . We define

the following dynamic programming table:

$$\begin{aligned} T[i, k'_1, k'_2, x'_1, x'_2] = \top &\iff \\ \exists \text{ set } X \subseteq \bigcup_{q=1}^i V^q &\text{ with } |X \cap \bigcup_{q=1}^i V_j^q| = k'_j \text{ and} \\ \sum_{v \in X \cap \bigcup_{q=1}^i V_j^q} \deg(v) &= x'_j \text{ for each } j \in \{1, 2\}, \text{ and} \\ X &\text{ is an independent vertex cover of } G[V^1 \cup \dots \cup V^i]. \end{aligned} \quad (8)$$

Clearly,  $T[1, N_1^1, 0, M_1, 0] = T[1, 0, N_2^1, 0, M_1] := \top$  and all other entries for  $i = 1$  are set to  $\perp$ . Now we have

$$\begin{aligned} T[i, k'_1, k'_2, x'_1, x'_2] = \top &\iff \\ T[i-1, k'_1 - N_1^i, k'_2, x'_1 - M_i, x'_2] = \top \\ \vee T[i-1, k'_1, k'_2 - N_2^i, x'_1, x'_2 - M_i] = \top. \end{aligned} \quad (9)$$

We return *yes* if there is an entry  $T[p, k'_1, k'_2, x'_1, x'_2]$  with  $k'_1 \leq k_1$ ,  $k'_2 \leq k_2$ ,  $x'_1 \geq x_1$ , and  $x'_2 \geq x_2$ , and *no* otherwise.

*Correctness:* We prove the statement via induction on the first entry  $i$ , using (9). By construction, the statement holds true for  $i = 1$ .

( $\Rightarrow$ ) Let  $T[i, k'_1, k'_2, x'_1, x'_2] = \top$ . As to (9), we have that either  $T[i-1, k'_1 - N_1^i, k'_2, x'_1 - M_i, x'_2] = \top$  or  $T[i-1, k'_1, k'_2 - N_2^i, x'_1, x'_2 - M_i] = \top$ . Let, due to symmetry,  $T[i-1, k'_1 - N_1^i, k'_2, x'_1 - M_i, x'_2] = \top$ . By induction, we have that there is a set  $X \subseteq \bigcup_{q=1}^{i-1} V^q$  with  $|X \cap \bigcup_{q=1}^{i-1} V_1^q| = k'_1 - N_1^i$  and  $|X \cap \bigcup_{q=1}^{i-1} V_2^q| = k'_2$ , as well as  $\sum_{v \in X \cap \bigcup_{q=1}^{i-1} V_1^q} \deg(v) = x'_1 - M_i$  and  $\sum_{v \in X \cap \bigcup_{q=1}^{i-1} V_2^q} \deg(v) = x'_2$ . Then  $X' := X \cup V_1^i$  fulfills the right side of (8).

( $\Leftarrow$ ) Let  $X \subseteq \bigcup_{q=1}^i V^q$  with  $|X \cap \bigcup_{q=1}^i V_j^q| = k'_j$  and  $\sum_{v \in X \cap \bigcup_{q=1}^i V_j^q} \deg(v) = x'_j$  for each  $j \in \{1, 2\}$ . Note that  $X \cap V^i \in \{V_1^i, V_2^i\}$  since  $X$  is an independent vertex cover of  $G[V^1 \cup \dots \cup V^i]$  (see Observation 4). Let  $X \cap V^i = V_1^i$  and  $X' := X \setminus V_1^i$ . We have  $X' \subseteq \bigcup_{q=1}^{i-1} V^q$  with  $|X' \cap \bigcup_{q=1}^{i-1} V_1^q| = k'_1 - N_1^i$  and  $|X' \cap \bigcup_{q=1}^{i-1} V_2^q| = k'_2$  and  $\sum_{v \in X' \cap \bigcup_{q=1}^{i-1} V_1^q} \deg(v) = x'_1 - M_i$  and  $\sum_{v \in X' \cap \bigcup_{q=1}^{i-1} V_2^q} \deg(v) = x'_2$ . By induction,  $T[i-1, k'_1 - N_1^i, k'_2, x'_1 - M_i, x'_2] = \top$ , and hence,  $T[i, k'_1, k'_2, x'_1, x'_2] = \top$ .  $\square$

#### B.3 Proof of Data Reduction Rule 2

*Proof.* Let  $I = (A, C, U, k_1, k_2, x_1, x_2, y)$  be the input instance, and let the instance  $I' := (A', C', U', k'_1, k'_2, x'_1, x'_2, y)$  be obtained by the reduction rule (we assume that the agent  $a^*$  nominates only one candidate  $c^*$  in the first level in  $I$ ).

( $\Rightarrow$ ) Let  $(C_1, C_2)$  be a solution to  $I$ . Note that due to  $a^*$ , we have that  $c^* \in C_1$ . Hence, no candidate in  $\{c' \in C \mid \exists a \in A : u_1(a) = c^* \wedge u_2(a) = c'\}$  is contained in  $C_2$ . Hence,  $(C'_1, C'_2)$  with  $C'_1 := C_1 \setminus \{c^*\}$  and  $C'_2 := C_2$  forms a solution to  $I'$ .

( $\Leftarrow$ ) Let  $(C'_1, C'_2)$  be a solution to  $I'$  where  $C'_2 \cap \{c' \in C \mid \exists a \in A : u_1(a) = c^* \wedge u_2(a) = c'\} = \emptyset$ . Then  $(C_1, C_2)$  with  $C_1 := C'_1 \cup \{c^*\}$  and  $C_2 := C'_2$  is a solution to  $I$ .  $\square$

## B.4 Proof of Observation 3

*Proof.* Let  $(A, C, (u_1, u_2), k_1, k_2, x_1, x_2, y)$  be an instance of X2QCSE. If  $y \in \{0, 2\}$ , then solve the problem in polynomial time and output a trivial *yes*- or *no*-instance of CBIVCS accordingly. Assume  $y = 1$ . Construct the instance  $(G = (V = V_1 \uplus V_2, E), k'_1, k'_2, x'_1, x'_2)$  as follows. Apply Data Reduction Rule 2 and 1 exhaustively. If an application of Data Reduction Rule 1 returned no, then return a trivial no-instance. Otherwise, every agent nominates exactly two candidates. For each candidate  $c \in \bigcup_{a \in A} u_1(a)$ , add a vertex  $v_c^1$  to  $V_1$ , and for each candidate  $c \in \bigcup_{a \in A} u_2(a)$ , add a vertex  $v_c^2$  to  $V_1$ . Now, for each agent  $a$ :  $c, c'$ , add the edge  $\{v_c^1, v_{c'}^2\}$  to  $E$ . This finishes the construction.

The correctness follows from the one-to-one correspondence of agents and edges.  $\square$

## B.5 Proof of Lemma 3

*Proof.* Suppose towards a contradiction that there is an  $i \in \{1, \dots, N\}$  and  $j \in \{1, 2, 3\}$  such that  $|C_j \cap \{c_i, \bar{c}_i\}| = 0$ . Without loss of generality let  $j = 1$ . Then in one level  $j'$ , it must be  $|C_{j'} \cap \{c_i, \bar{c}_i\}| = 2$ . Without loss of generality let  $j' = 2$ . Then, neither  $a_{i,1}$  nor  $\bar{a}_{i,1}$  are satisfied. Since  $u_3(a_{i,1}) \cup u_3(\bar{a}_{i,1}) = \{c_i, \bar{c}_i\}$ , it also holds true that  $|C_3 \cap \{c_i, \bar{c}_i\}| = 2$ . It is immediate that three candidates must be picked over the three levels to satisfy each agent in  $A_{i'}$  for every  $i' \in \{1, \dots, N\}$ . Recall that the total budget is  $3N$ . Thus, we have that  $|C_1| + |C_2| + |C_3| > 3N$ , contradicting the fact that  $(C_1, C_2, C_3)$  is a solution. Note that the case that there is an  $i \in \{1, \dots, N\}$  and  $j \in \{1, 2, 3\}$  such that  $|C_j \cap \{c_i, \bar{c}_i\}| = 2$  implies that there is an  $i' \in \{1, \dots, N\}$  and  $j' \in \{1, 2, 3\}$  such that  $|C_{j'} \cap \{c_{i'}, \bar{c}_{i'}\}| = 0$ .

So, assume that for all  $i \in \{1, \dots, N\}$  and  $j \in \{1, 2, 3\}$  we have that  $|C_j \cap \{c_i, \bar{c}_i\}| = 1$ . Suppose towards a contradiction that there are  $j, j' \in \{1, 2, 3\}$  and  $i \in \{1, \dots, N\}$  such that  $C_j \cap \{c_i, \bar{c}_i\} \neq C_{j'} \cap \{c_i, \bar{c}_i\}$ . Let  $\ell \neq \ell'$  be such that  $a_{i,\ell}$  is satisfied by  $C_j$  and  $a_{i,\ell'}$  is satisfied by  $C_{j'}$ . Then, for  $j'' \in \{1, 2, 3\} \setminus \{j, j'\}$ , we have that  $u_{j''}(a_{i,\ell''}) = \emptyset$  with  $\ell'' \in \{1, 2, 3\} \setminus \{\ell, \ell'\}$  by construction, yielding a contradiction.  $\square$

## B.6 Proof of Theorem 2

*Proof.* Let  $I = (X, \phi)$  be an instance of SAT. Construct instance  $I' := (A, C, U, k, x, y)$  using Construction 3. We prove that  $I$  is a *yes*-instance if and only if  $I'$  is a *yes*-instance.

$(\Rightarrow)$  Let  $f: X \rightarrow \{\top, \perp\}$  be a satisfying truth assignment. We claim that  $\mathcal{C} := (C_1, \dots, C_N)$  with  $C_i := \{c_{f(x_i)}\}$  is a solution to  $I'$ . Suppose not, that is, there is an agent  $a_j$  being non-satisfied, i.e.,  $\sum_{x_i}$  appears as literal in  $K_j$ ,  $|u_i(a_j) \cap C_i| = 0$ . Thus, clause  $K_j$  is not satisfied by  $f$ , a contradiction.

$(\Leftarrow)$  Let  $\mathcal{C} := (C_1, \dots, C_N)$  with  $C_i \neq \emptyset$  be a solution to  $I'$ . We claim that  $f: X \rightarrow \{\top, \perp\}$  with  $f(x_i) = \top$  if and only if  $c_\top \in C_i$  is a solution to  $I$ . Suppose not, that is, there is a clause  $K_j$  such that no literal is evaluated to true. Then agent  $a_j$  is not satisfied in any level,

contradicting the fact that  $\mathcal{C}$  is a solution to  $I'$ .

To get the statement for QCSE, adapt as follows. Take EXACTLY 1-IN-3 SAT as input problem and apply Construction 3. Then, add for each variable two new agents and another (new) level, where in both of the levels corresponding to the variable one of the two agents nominates  $c_\top$  and the other nominates  $c_\perp$ ; This enforces that for each variable a choice (corresponding to true or false) must be made.  $\square$

## C Additional Material for Section 4

### C.1 Proof of Lemma 4

*Proof.*  $(\Rightarrow)$  Let  $\mathcal{C} = (C_1, \dots, C_\tau)$  be a solution to  $I$ . Let  $X^q \in \{u_1(a), \emptyset\} \times \dots \times \{u_\tau(a), \emptyset\}$  be the fingerprint of  $a$  regarding  $\mathcal{C}$ . We show that  $I^q$  is a *yes*-instance by claiming that  $\mathcal{C}' = (C'_1, \dots, C'_\tau)$  is a solution to  $I^q$ , where  $C'_t := C_t \setminus X_t^q$ . Clearly,  $|C'_t| = |C_t| - |X_t^q| \leq k_t - |X_t^q| = k'_t$ . For  $a' \in A'$ , we have  $\sum_{t=1}^\tau |u_t(a) \cap C'_t| = \sum_{t=1}^\tau (|u_t(a) \cap C_t| - |u_t(a) \cap X_t^q|) \geq y_a - \sum_{t=1}^\tau |u_t(a) \cap X_t^q| = y'_a$ . Finally, for the  $x$ -scores, note that  $\sum_{c \in C'_t} |u_t^{-1}(c)| = \sum_{c \in C_t} |u_t^{-1}(c)| - |\{a' \in A \mid u_t(a') = X_t^q \wedge X_t^q \neq \emptyset\}| \geq x_t - |\{a' \in A \mid u_t(a') = X_t^q \wedge X_t^q \neq \emptyset\}| = x'_t$ .

$(\Leftarrow)$  Let  $\mathcal{C}' = (C'_1, \dots, C'_\tau)$  be a solution to  $I^q$ . We can assume that for every  $t \in \{1, \dots, \tau\}$  with  $u_t(a) \neq \emptyset$ ,  $C'_t \cap u_t(a) = \emptyset$ , since no agent nominates candidate  $u_t(a)$  by construction of  $u'_t$ . By construction, we know that  $a$ 's fingerprint  $X^q$  contains at least  $y_a$  non-empty entries. We claim that  $\mathcal{C} := (C_1, \dots, C_\tau)$  with  $C_t := C'_t \cup X_t^q$  is a solution to  $I$ . Clearly,  $|C_t| = |C'_t| + |X_t^q| \leq k'_t + |X_t^q| = k_t$ . We know that the  $y$ -score of  $a$  is fulfilled. For  $a' \in A'$ , we have  $\sum_{t=1}^\tau |u_t(a) \cap C_t| = \sum_{t=1}^\tau (|u_t(a) \cap C'_t| + |u_t(a) \cap X_t^q|) \geq y'_a + \sum_{t=1}^\tau |u_t(a') \cap X_t^q| = y_a$ . Finally, for the  $x$ -scores, note that  $\sum_{c \in C_t} |u_t^{-1}(c)| = \sum_{c \in C'_t} |u_t^{-1}(c)| + |\{a' \in A \mid u_t(a') = X_t^q \wedge X_t^q \neq \emptyset\}| \geq x'_t + |\{a' \in A \mid u_t(a') = X_t^q \wedge X_t^q \neq \emptyset\}| = x_t$ .  $\square$

### C.2 Proof of Proposition 4

*Proof.* Clearly, in each branch, we decrease  $k_t$  for at least one  $t \in \{1, \dots, \tau\}$ . Thus, we have at most  $k \cdot \tau$  branches, where in each we check for at most  $2^\tau$  fingerprints.

The correctness follows from Lemma 4. The algorithm returns *yes* if and only if input instance  $I = (A, C, U, (k_t)_t, (x_t)_t, (y_a)_a)$  is a *yes*-instance. The forward direction is clear: if it returns true in some branch, then, due to Lemma 4,  $I$  is a *yes*-instance. Hence, we prove the backward direction.

We prove via induction on the number of agents. If  $A = \emptyset$ , then the algorithm returns *yes* if and only if  $k_t \geq 0$  and  $x_t \leq 0$  for all  $t$ , which is correct. So let  $|A| \geq 1$ . Let  $I$  be a *yes*-instance.

Since  $I$  is a *yes*-instance, there is no  $t \in \{1, \dots, \tau\}$  with  $k_t < 0$ . If for all  $a \in A$  we have  $y_a \leq 0$ , and there is a  $t \in \{1, \dots, \tau\}$  with  $x_t > 0$ , then there are at least  $k_t$  candidates available to make a score of at least  $x_t$ . In this case, the algorithm returns *yes*. Finally, again since  $I$  is

a *yes*-instance, there is no  $a \in A$  with  $y_a > 0$  but no fingerprint with at least  $y_a$  non-empty entries.

If the algorithm did not report *yes* yet, it chooses a fingerprint  $X$  and recurses on instance  $I' = (A', C, U', (k'_t)_t, (x'_t)_t, (y'_a)_a)$ . Due to the Lemma 4, we know that  $I$  is a *yes*-instance if and only if  $I'$  is a *yes*-instance. Since  $I'$  has one agent less, by induction, the algorithm returns *yes*.  $\square$

### C.3 Proof of Theorem 4

**Construction 4.** Let  $I_1, \dots, I_p$  with  $p = 2^q$ ,  $q \in \mathbb{N}$ , be  $p$ -instances of GCSE with  $I_i = (A_i = \{a_i^1, \dots, a_i^{|A_i|}\}, C = \{c_0, c_1\}, U_i = \{u_i^1, \dots, u_i^\tau\}, k = 1, x = 0, y = 1)$  for all  $i \in \{1, \dots, p\}$ . Construct an instance  $I := (A, C, U, k, x, y)$  as follows. Let  $A = A_1 \cup \dots \cup A_p$ . Let  $U = (u_1, \dots, u_\tau, u_{\tau+1}, \dots, u_{\tau+q})$  where for  $i \in \{1, \dots, \tau\}$  we have  $u_i(a_j^\ell) = u_j^\ell(a_j^\ell)$  and for  $i \in \{1, \dots, q\}$  we have

$$u_{\tau+i}(a_j^\ell) = \begin{cases} c_0, & \text{if there is a 0 at the } i\text{th position} \\ & \text{of the } q\text{-binary encoding of } j \\ c_1, & \text{if there is a 1 at the } i\text{th position} \\ & \text{of the } q\text{-binary encoding of } j. \end{cases}$$

This finishes the construction.  $\diamond$

*Proof of Theorem 4.* Let  $I_1, \dots, I_p$  with  $p = 2^q$ ,  $q \in \mathbb{N}$ , be  $p$ -instances of GCSE with  $I_i = (A_i = \{a_i^1, \dots, a_i^{|A_i|}\}, C = \{c_0, c_1\}, U_i = \{u_i^1, \dots, u_i^\tau\}, k = 1, x = 0, y = 1)$  for all  $i \in \{1, \dots, p\}$ . Construct instance  $I := (A, C, U, k, x, y)$  using Construction 4. We prove that any of  $I_1, \dots, I_p$  is a *yes*-instance if and only if  $I$  is a *yes*-instance.

( $\Rightarrow$ ) Let  $r \in \{1, \dots, p\}$  be such that  $I_r$  is a *yes*-instance. Let  $(C_1, \dots, C_\tau)$  be a solution to  $I_r$ . Let  $b_1 \dots b_q$  be the  $q$ -binary encoding of  $r$ . Let  $C_{\tau+i} = \{c_{b_i \oplus 1}\}$  for all  $i \in \{1, \dots, q\}$ , where  $\oplus$  denotes the *exclusive or*. We claim that  $\mathcal{C} = (C_1, \dots, C_{\tau+q})$  is solution. Since  $(C_1, \dots, C_\tau)$  is a solution to  $I_r$ , we know that each agent from  $A_r$  is satisfied within the first  $\tau$  layers. Now note that the  $q$ -binary encoding of every  $r' \neq r$  has at least one bit in common with the encoding  $b_1 \oplus 1 \dots b_q \oplus 1$ . Thus, each agent of every instance different to  $I_r$  is satisfied in one of the last  $q$  levels. Thus,  $\mathcal{C}$  is a solution to  $I$ .

( $\Leftarrow$ ) Let  $\mathcal{C} = (C_1, \dots, C_{\tau+q})$  be a solution to  $I$  such that  $C_i \neq \emptyset$  for all  $i \in \{1, \dots, \tau + q\}$ . Let  $C_{\tau+i} = \{c_{b_i}\}$  for all  $i \in \{1, \dots, q\}$ . Since  $p = 2^q$ , there is an instance  $I_r$  with  $q$ -binary encoding  $b_1 \oplus 1 \dots b_q \oplus 1$ . Thus, no agent from  $A_r$  is satisfied in any of the last  $q$  levels, and thus must be satisfied by  $\mathcal{C}' := (C_1, \dots, C_\tau)$ . Hence,  $\mathcal{C}'$  is a solution to  $I_r$ .  $\square$

#### C.3.1 QCSE is in FPT w.r.t. $k + \tau$

We first show the following Turing-reduction for PE-QCSE.

**Lemma 6.** *Let  $I := (A, C, U, (k_t)_t, (x_t)_t, (y_a)_{a \in A})$  be an instance with at least one agent  $a \in A$  with  $y_a > 0$  and at least one fingerprint with exactly  $y_a$  non-empty entries.*

*Then,  $I$  is a yes-instance of PE-QCSE if and only if for any agent  $a \in A$  with  $y_a > 0$  and at least one fingerprint with exactly  $y_a$  non-empty entries, one of the instances  $I^1, \dots, I^p$  is a yes-instance, where  $X^1, \dots, X^p \in \{u_1(a), \emptyset\} \times \dots \times \{u_\tau(a), \emptyset\}$  are the fingerprints with exactly  $y_a$  non-empty entries and for each  $q \in \{1, \dots, p\}$ ,  $I^q = (A', C, U', (k_t^q)_t, (x_t^q)_t, (y_a^q)_{a \in A'})$ , where  $A' = A \setminus \{a\}$ , and*

- for each  $t \in \{1, \dots, \tau\}$ ,  $x_t^q := x_t - |\{a' \in A \mid u_t(a') = X_t^q \wedge X_t^q \neq \emptyset\}|$ ,  $u_t^q := u_t - u_t(a)$ ,  $k_t^q := k_t - |X_t^q|$ , and
- for each  $a' \in A'$ ,  $y_{a'}^q := y_{a'} - \sum_{t=1}^\tau |u_t(a') \cap X_t^q|$ .

*Proof.* ( $\Rightarrow$ ) Let  $\mathcal{C} = (C_1, \dots, C_\tau)$  be a solution to  $I$ . Let  $X^q \in \{u_1(a), \emptyset\} \times \dots \times \{u_\tau(a), \emptyset\}$  be the fingerprint of  $a$  regarding  $\mathcal{C}$ . We show that  $I^q$  is a *yes*-instance by claiming that  $\mathcal{C}' = (C'_1, \dots, C'_\tau)$  is a solution to  $I^q$ , where  $C'_t := C_t \setminus X_t^q$ . Clearly,  $|C'_t| = |C_t| - |X_t^q| \leq k_t - |X_t^q| = k_t^q$ . For  $a' \in A'$ , we have  $\sum_{t=1}^\tau |u_t(a') \cap C'_t| = \sum_{t=1}^\tau (|u_t(a') \cap C_t| - |u_t(a') \cap X_t^q|) = y_{a'} - \sum_{t=1}^\tau |u_t(a') \cap X_t^q| = y_{a'}^q$ . Finally, for the  $x$ -scores, note that  $\sum_{c \in C'_t} |u_t^{-1}(c)| = \sum_{c \in C_t} |u_t^{-1}(c)| - |\{a' \in A \mid u_t(a') = X_t^q \wedge X_t^q \neq \emptyset\}| \geq x_t - |\{a' \in A \mid u_t(a') = X_t^q \wedge X_t^q \neq \emptyset\}| = x_t^q$ .

( $\Leftarrow$ ) Let  $\mathcal{C}' = (C'_1, \dots, C'_\tau)$  be a solution to  $I^q$ . We can assume that for every  $t \in \{1, \dots, \tau\}$  with  $u_t(a) \neq \emptyset$ ,  $C'_t \cap u_t(a) = \emptyset$ , since no agent nominates candidate  $u_t(a)$  by construction of  $u_t^q$ . By construction, we know that  $a$ 's fingerprint  $X^q$  contains exactly  $y_a$  non-empty entries. We claim that  $\mathcal{C} := (C_1, \dots, C_\tau)$  with  $C_t := C'_t \cup X_t^q$  is a solution to  $I$ . Clearly,  $|C_t| = |C'_t| + |X_t^q| \leq k_t^q + |X_t^q| = k_t$ . We know that the  $y$ -score of  $a$  is fulfilled. For  $a' \in A'$ , we have  $\sum_{t=1}^\tau |u_t(a') \cap C_t| = \sum_{t=1}^\tau (|u_t(a') \cap C'_t| + |u_t(a') \cap X_t^q|) = y_{a'}^q + \sum_{t=1}^\tau |u_t(a') \cap X_t^q| = y_{a'}$ . Finally, for the  $x$ -scores, note that  $\sum_{c \in C_t} |u_t^{-1}(c)| = \sum_{c \in C'_t} |u_t^{-1}(c)| + |\{a' \in A \mid u_t(a') = X_t^q \wedge X_t^q \neq \emptyset\}| \geq x_t^q + |\{a' \in A \mid u_t(a') = X_t^q \wedge X_t^q \neq \emptyset\}| = x_t$ .  $\square$

In contrast to PE-GCSE, if for an agent  $a$  we have  $y_a = 0$ , we know that no candidate of  $a$  can additionally be elected into any committee. Hence, we have the following.

**Data Reduction Rule 5.** If for agent  $a \in A$  we have that  $y_a = 0$ , then for all  $t \in \{1, \dots, \tau\}$  set  $u_t := u_t - u_t(a)$ , and delete  $a$ .

We point out that Data Reduction Rule 5 will asymptotically not speed up our algorithm; however, we see potential for improvement of any practical running time.

**Proposition 7.** *Algorithm 2 is correct and runs in FPT-time regarding  $k + \tau$ .*

*Proof.* Clearly, in each branch, we decrease  $k_t$  for at least one  $t \in \{1, \dots, \tau\}$ . Thus, we have at most  $k \cdot \tau$  branches, where in each we check for at most  $2^\tau$  fingerprints.

The correctness follows from Lemma 6. The algorithm returns *yes* if and only if input instance  $I = (A, C, U, (k_t)_t, (x_t)_t, (y_a)_a)$  is a *yes*-instance. The forward direction is clear: if it returns true in some branch, then, due to Lemma 6,  $I$  is a *yes*-instance. Hence, we prove the backward direction.

---

**Algorithm 2:** FPT-algorithm for PE-QCSE parameterized by  $k + \tau$  on input  $(A, C, U, (k_t)_t, (x_t)_t, (y_a)_a)$ .

---

```

1 main((A, C, U, (k_t)_t, (x_t)_t, (y_a)_a));
2 return no;
3 function main((A, C, U, (k_t)_t, (x_t)_t, (y_a)_a)):
4   if  $k_t < 0$  for some  $t$  then
5     break
6   if  $A \neq \emptyset$  and  $\exists a \in A : y_a < 0$  then
7     break
8   Apply Data Reduction Rule 5 exhaustively;
9   if  $A = \emptyset$  or  $\forall a \in A : y_a = 0$  then
10    if  $\exists t \in \{1, \dots, \tau\} : x_t > 0$  then
11      break
12    else
13      return yes
14  if  $\exists a \in A$  with  $y_a > 0$  but no fingerprint with
    exactly  $y_a$  non-empty entries then
15    break
16  Let  $a \in A$  be such that  $y_a > 0$  at least one
    fingerprint with exactly  $y_a$  non-empty entries;
17  foreach  $X \in \{u_1(a), \emptyset\} \times \dots \times \{u_\tau(a), \emptyset\}$  with
    exactly  $y_a$  non-empty entries do //  $\leq 2^\tau$ 
    many
18    foreach  $t \in \{1, \dots, \tau\}$  do
19      Set  $x'_t \leftarrow x_t - |\{a' \in A \mid u_t(a') =$ 
         $X_t \wedge X_t \neq \emptyset\}|$ ;
20      Set  $u'_t \leftarrow u_t - u_t(a)$ ;
21      Set  $k'_t \leftarrow k_t - |X_t|$ ;
22      Set  $A' \leftarrow A \setminus \{a\}$ ;
23      foreach  $a' \in A'$  do
24        Set  $y'_{a'} \leftarrow y_{a'} - \sum_t |u_t(a') \cap X_t|$ ;
25      main((A', C, U', (k'_t)_t, (x'_t)_t, (y'_{a'})_a));

```

---

We prove via induction on the number of agents. If  $A = \emptyset$ , then the algorithm returns *yes* if and only if  $k_t \geq 0$  and  $x_t \leq 0$  for all  $t$ , which is correct. So let  $|A| \geq 1$ . Let  $I$  be a *yes*-instance.

Since  $I$  is a *yes*-instance, there is no  $t \in \{1, \dots, \tau\}$  with  $k_t < 0$  and no agent  $a \in A$  with  $y_a < 0$ . If for all  $a \in A$  we have  $y_a = 0$ , then there is no  $t \in \{1, \dots, \tau\}$  with  $x_t > 0$ . In this case, the algorithm returns *yes*. Finally, again since  $I$  is *yes*, there is no  $a \in A$  with  $y_a > 0$  but no fingerprint with exactly  $y_a$  non-empty entries.

If the algorithm did not report *yes* yet, it chooses a fingerprint  $X$  and recurses on instance  $I' = (A', C, U', (k'_t)_t, (x'_t)_t, (y'_{a'})_a)$ . Due to the Lemma 6, we know that  $I$  is a *yes*-instance if and only if  $I'$  is a *yes*-instance. Since  $I'$  has one agent less, by induction, the algorithm returns *yes*.  $\square$

### C.4 Proof of Theorem 6

**Construction 5.** Let  $(X, \phi)$  be an instance of 3-SAT where each clause contains exactly three literals and every variable appears as a literal exactly two times negated

and exactly two times unnegated, which remains NP-hard [8]. Construct  $(A, C, U, k, x, y)$  as follows. Let  $A := \{a_1, \dots, a_M\}$  and  $C := \{c_\top, c_\perp, c^*\}$ . Let  $\tau := N$ , where each level  $i$  correspond to variable  $x_i$ . In level  $i$ , agent  $j$  nominates  $c_\top$ , if  $x_i$  appears unnegated in  $K_j$ ,  $c_\perp$ , if  $x_i$  appears negated in  $K_j$ , and  $c^*$  otherwise. Let  $k := 2$ ,  $y := \tau - 2$ , and  $x := M - 2$ .  $\diamond$

*Proof.* The proof is analogous to the proof of Theorem 2, with the difference that  $c^*$  is in every committee (since  $x \geq M - 4$ ) and hence every clause-agent is satisfied in  $\tau - 3 = y - 1$  levels by  $c^*$ .

For QCSE, we reduce from X1-3SAT where every clause is of size exactly three and every variable appears exactly three times and never negated [25, Theorem 29]. Note that we hence can drop  $c_\perp$  from  $C$ . With  $x := M - 3$  the correctness now follows.  $\square$

### C.5 Proof of Theorem 7

*Proof.* We next prove the equivalence by induction on  $t$ . The base case  $t = 1$  is clear. Now assume that the equivalence holds true for up to  $t - 1$ .

( $\Rightarrow$ ) By construction, there is a set-to-true  $D[t - 1, \mathbf{y}']$  with  $\mathbf{y}' = (y'_1, \dots, y'_n)$  and a size-at-most  $k$  score-at-least  $x$  committee  $C' \subseteq C$  with respect to  $u_t$  such that  $\mathbf{y}' + \vec{c} = \mathbf{y}$ , where  $\vec{c} = (c_1, \dots, c_n)$  is the fingerprint of  $C'$ . By induction, there are committees  $C_1, \dots, C_{t-1}$  each with committee size at most  $k$  and a score of at least  $x$  such that the score of each agent  $a_i$  at time  $t$  sums up to exactly  $y'_i$ . Thus, for the sequence  $C_1, \dots, C_{t-1}, C_t := C'$  we have that each committee has size at most  $k$  and a score of at least  $x$  such that the score of each agent  $a_i$  at time  $t$  sums up to exactly  $y'_i + c_i$ .

( $\Leftarrow$ ) Let  $C_1, \dots, C_t$  be a sequence of committees each with size at most  $k$  and a score of at least  $x$  such that the score of each agent  $a_i$  at time  $t$  sums up to exactly  $y_i$ , and let  $\mathbf{y} = (y_1, \dots, y_n)$ . Let  $\vec{c} = (c_1, \dots, c_n)$  be the fingerprint of  $C_t$ . By induction, we know that  $D[t - 1, \mathbf{y} - \vec{c}]$  is true. By construction, since  $C_t$  is a size-at-most  $k$  score-at-least  $x$  committee, we know that  $D[t, \mathbf{y}]$  is also set to true.  $\square$

## D Additional Material for Section 4.3

**Proposition 8.** *Unless  $NP \subseteq coNP/poly$ , GCSE admits no problem kernel of size polynomial in  $n$ , even if  $m = 2$  and  $k = 1$ .*

We give a polynomial-parameter transformation [2] from

MULTICOLORED CLIQUE (MCC)

**Input:** A  $k$ -partite graph  $G = (V = V^1 \uplus \dots \uplus V^k, E)$ .

**Question:** Is there  $C \subseteq V$  such that  $G[C]$  is a clique and  $|C \cap V^i| = 1$  for all  $i \in \{1, \dots, k\}$ ?

Hermelin et al. [15] proved that MCC when parameterized by  $k \log(|V|)$  is WK[1]-hard and admits no polynomial problem kernel unless  $NP \subseteq coNP/poly$ .

**Construction 6.** Let  $I = (G = (V = V_1 \uplus \dots \uplus V_k, E))$  be an input instance of MCC with  $V_i = \{v_i^1, \dots, v_i^N\}$  for all  $i \in \{1, \dots, k\}$ , where  $N := |V_i|$ . Moreover, suppose that for each  $i \neq i'$ , the number of edges between the two colors classes equals  $M > N$ . We construct an instance  $(A, C, U, k, x, y)$  of GCSE as follows. Let  $C = \{c^*, c_\top\}$  and  $A = A_V \cup A_E \cup \bigcup_{i, i' \in \{1, \dots, k\}, i \neq i'} A_{i, i'}$  where

$$\begin{aligned} A_V &:= \{a_i \mid i \in \{1, \dots, k\}\}, \\ A_E &:= \{a_{\{i, i'\}} \mid i, i' \in \{1, \dots, k\}, i \neq i'\}, \text{ and} \\ A_{i, i'} &:= \{a_{i, i'}^\ell \mid \ell \in \{1, \dots, 2 \log(N)\}\} \\ &\text{for each } i, i' \in \{1, \dots, k\}, i \neq i'. \end{aligned}$$

Let  $x := 1$ ,  $k := 1$ , and  $y := M - 1$ .

- (i) For each vertex  $v_i^j$ , there is a level  $L_i^j$  with  $u(a_i) = c^*$  and for all  $\ell \in \{1, \dots, 2 \log(N)\}$  and  $i' \in \{1, \dots, k\} \setminus \{i\}$ ,  $a_{i, i'}^\ell$  nominates  $c_\top$  if there is a 0 at position  $\ell$  of  $B_N(j)$ .
- (ii) For each edge  $\{v_i^j, v_{i'}^{j'}\}$ , there is a level  $L_{i, i'}^{j, j'}$  with  $u(a_{\{i, i'\}}) = c^*$  and  $a_{i, i'}^\ell$  nominates  $c_\top$  if there is a 1 at position  $\ell$  of  $B_N(j)$  and  $a_{i', i}^{\ell'}$  nominates  $c_\top$  if there is a 1 at position  $\ell'$  of  $B_N(j')$ .
- (iii) There are  $M - 2$  levels  $L_1^\dagger, \dots, L_{M-2}^\dagger$  where only the agents in  $A_{i, i'}$  for all  $i, i' \in \{1, \dots, k\}$  nominate  $c^*$ , and all other agents nominate nothing.
- (iv) Finally, there are  $M - N$  levels  $L_1^\ddagger, \dots, L_{M-N}^\ddagger$  where only the agents in  $A_V$  nominate  $c^*$ , and all other agents nominate nothing.

This finishes the construction.  $\diamond$

**Observation 5.** Let  $I'$  be a yes-instance. For every solution, the following holds true:

- (i) For every  $i \in \{1, \dots, k\}$ , there is at most one  $j \in \{1, \dots, N\}$  such that the committee in level  $L_i^j$  contains  $c_\top$ .
- (ii) For every pair  $i, i' \in \{1, \dots, k\}$ , there is at most one pair  $j, j' \in \{1, \dots, N\}$  such that the committee in level  $L_{i, i'}^{j, j'}$  contains  $c_\top$ .

*Proof.* (i) Suppose not, i.e., there is  $i \in \{1, \dots, k\}$ , with at least two distinct  $j, j' \in \{1, \dots, N\}$  such that the committee in level  $L_i^j$  and  $L_i^{j'}$  contains  $c_\top$ . Then, agent  $a_i$  gets score at most  $(M - N) + (N - 2) < y$ , a contradiction.

(ii) Suppose not, i.e., there is a pair  $i, i' \in \{1, \dots, k\}$ , with at least two pairs  $j_1, j'_1 \in \{1, \dots, N\}$  and  $j_2, j'_2 \in \{1, \dots, N\}$  such that the committee in level  $L_{i, i'}^{j_1, j'_1}$  and  $L_{i, i'}^{j_2, j'_2}$  contains  $c_\top$ . Then, agent  $a_{\{i, i'\}}$  gets score at most  $M - 2 < y$ , a contradiction.  $\square$

**Observation 6.** Let  $I'$  be a yes-instance. For every solution, the following holds true:

- (i) For every  $i \in \{1, \dots, k\}$ , there is exactly one  $j \in \{1, \dots, N\}$  such that the committee in level  $L_i^j$  contains  $c_\top$ .
- (ii) For every  $i, i' \in \{1, \dots, k\}$ , there is exactly one pair  $j, j' \in \{1, \dots, N\}$  such that the committee in level  $L_{i, i'}^{j, j'}$  contains  $c_\top$ .

*Proof.* (i) Suppose not, i.e., there is none for color  $i$ . Then to have agent  $a_{i, i'}^\ell$  for each  $\ell$  be satisfied, there

must be two levels  $L_{i, i'}^{j, j'}$  containing  $c_\top$ , a contradiction to Observation 5.

(i) Suppose not, i.e., there is none for colors  $i, i'$ . Then to have agent  $a_{i, i'}^\ell$  for each  $\ell$  be satisfied, there must be two levels  $L_i$  containing  $c_\top$ , a contradiction to Observation 5.  $\square$

**Observation 7.** Let  $I'$  be a yes-instance. For every solution, if level  $L_i^j$ 's committee contains  $c_\top$ , then for every  $i' \in \{1, \dots, k\}$  there is a  $j_{i'} \in \{1, \dots, N\}$  such that the committee in  $L_{i, i'}^{j, j_{i'}}$  contains  $c_\top$ .

*Proof.* Suppose not, i.e., the level containing  $c_\top$  is  $L_{i, i'}^{j, j_{i'}}$  with  $j' \neq j$ . Then there is an  $\ell \in \{1, \dots, 2 \log(N)\}$  such that  $a_{i, i'}^\ell$  is not satisfied:  $\ell$  is the position where  $B_N(j)$  has a 1 and  $B_N(j')$  has a 0 (which exists since  $j \neq j'$ ).  $\square$

*Proof of Proposition 8.* ( $\Rightarrow$ ) Let  $C = \{v_i^{j_i} \mid i \in \{1, \dots, k\}\}$  form a multicolored clique. We construct a solution as follows. In each level  $L_i^{j_i}$  and  $L_{i, i'}^{j_i, j_{i'}}$ , candidate  $c_\top$  is elected. In all other levels, candidate  $c^*$  is elected. Observe that each agent in  $A_V \cup A_E$  is satisfied (recall that there are  $M - N$  levels satisfying each agent from  $A_V$ ). Consider any agent  $a_{i, i'}^\ell$ . Note that  $a_{i, i'}^\ell$  is satisfied in each of the  $M - 2$  levels  $L_1^\dagger, \dots, L_{M-2}^\dagger$ . Since in levels  $L_i^{j_i}$  and  $L_{i, i'}^{j_i, j_{i'}}$  candidate  $c_\top$  is elected, if the  $\ell$ 's position in  $B_N(j_i)$  is a 0, then  $a_{i, i'}^\ell$  is satisfied in level  $L_i^{j_i}$ , otherwise, by construction,  $a_{i, i'}^\ell$  is satisfied in level  $L_{i, i'}^{j_i, j_{i'}}$ .

( $\Leftarrow$ ) Follows from Observations 5 to 7.  $\square$

## D.1 Proof of Data Reduction Rule 3

*Proof.* Via induction on the number  $n$  of agents. For  $n = 1$  the statement is clear. Hence, let the statement hold true for  $n - 1 > 1$ . Having  $n$  agents where each agent  $a$  has at least  $n \cdot y$  levels where there is a valid committee containing  $a$ 's nominated candidate. For some arbitrary agent  $a$ , choose exactly  $y$  levels  $t_1, \dots, t_y$  and valid committees  $C_{t_1}, \dots, C_{t_y}$  such that  $u_{t_i}(a) \in C_{t_i}$  for every  $i \in \{1, \dots, y\}$ . Note that  $a$  is satisfied. Delete  $a$  and the levels  $t_1, \dots, t_y$ . Note that for the remaining  $n - 1$  agents, we have that every agent  $a$  has at least  $(n - 1) \cdot y$  levels where there is a valid committee containing  $a$ 's nominated candidate. Due the the inductive hypothesis, we can return *yes*.  $\square$

## D.2 Proof of Lemma 5

*Proof.* Due to the inapplicability of Data Reduction Rule 3 there is at least one critical agent. Due to the inapplicability of Data Reduction Rule 4, we have that  $\{1, \dots, \tau\} = \bigcup_{a \text{ critical}} Z(a)$ . Since  $|\bigcup_{a \text{ critical}} Z(a)| \leq n^2 \cdot y$ , we hence have that  $|\{1, \dots, \tau\}| \leq n^2 \cdot y$   $\square$

## D.3 Proof of Proposition 6

Let  $b^i := B_{\log(p)}(i)$  and denote by  $\bar{b}_i$  the complement of  $b^i$ . Recall that  $b^i$  is of length  $2 \log(p)$ . With  $b^i(c)$  we denote that agents corresponding to ones in  $b^i$  nominate candidate  $c$ , and nothing otherwise.

We give an OR-cross-composition from the NP-hard X1-3SAT. We can assume that every variable appears in every clause at most once as a literal.

**Construction 7.** Let  $I_1 = (X, \phi_1), \dots, I_p = (X, \phi_p)$  be  $p = 2^q$  instances of X1-3SAT over the same set  $X$  of  $N$  variables, where  $\phi_i = \bigwedge_{j=1}^M K_j^{(i)}$  for every  $i \in \{1, \dots, p\}$  (we can assume these properties to hold for the input instances as they form a polynomial equivalence relation). We construct an instance  $I = (A, C, U, k, x, y)$  with  $x = 0$  and  $k = y = 1$  as follows (see Fig. 4 for an illustration). Let  $C := \{c_\top, c_\perp\}$  and  $c^* := c_\top$ . Let  $A = A' \cup A_X \cup \{a^*\}$ , where  $A' := \{a_1, \dots, a_M\}$ , and  $A_X := \{a_{x_i}^\ell, a_{\bar{x}_i}^\ell \mid i \in \{1, \dots, N\}, \ell \in \{1, \dots, q\}\}$ .

- (i) There are levels  $L_1^*, \dots, L_p^*$  where  $a^*$  nominates  $c^*$  in each level, and in  $L_j^*$  agents  $a_{x_i}^\ell$  and  $a_{\bar{x}_i}^\ell$  nominate  $c^*$  if there is a 0 in  $B_q(j)$  at position  $\ell$ , and  $\emptyset$  otherwise, for every  $i \in \{1, \dots, N\}$ . All the other agents nominate nothing.
- (ii) There are levels  $L_{i,j}$  with  $i \in \{1, \dots, N\}$  and  $j \in \{1, \dots, p\}$  such that agent  $a_{x_i}^\ell$  nominates  $c_\top$  if there is a 1 in  $B_q(j)$  at position  $\ell$  and agent  $a_{\bar{x}_i}^\ell$  nominates  $c_\perp$  if there is a 1 in  $B_q(j)$  at position  $\ell$ , and each nominate  $\emptyset$  otherwise. All the other agents nominate nothing.
- (iii) There are levels  $L_i^{(j)}$  with  $i \in \{1, \dots, N\}$  and  $j \in \{1, \dots, p\}$  such that for each  $h \in \{1, \dots, M\}$ , we have that

$$\text{agent } a_h \text{ nominates } \begin{cases} c_\top, & \text{if } x_i \text{ appears in } K_h^{(j)}, \\ c_\perp, & \text{if } \bar{x}_i \text{ appears in } K_h^{(j)}, \\ \emptyset, & \text{otherwise,} \end{cases}$$

agent  $a_{x_i}^\ell$  nominates  $c_\top$  if there is a 1 in  $B_q(j)$  at position  $\ell$  and agent  $a_{\bar{x}_i}^\ell$  nominates  $c_\perp$  if there is a 1 in  $B_q(j)$  at position  $\ell$ , and each nominate  $\emptyset$  otherwise. All the other agents nominate no candidate.

This finishes the construction.  $\diamond$

Due to  $a^*$  having its only nominations in the levels  $L_1^*, \dots, L_p^*$ , we have the following.

**Observation 8.** *In every solution there is exactly one  $j \in \{1, \dots, p\}$  such that the committee in  $L_j^*$  contains  $c^*$ .*

**Lemma 7.** *Given any solution where  $j \in \{1, \dots, p\}$  is such that the committee in  $L_j^*$  contains  $c^*$ , then for every  $i \in \{1, \dots, N\}$ , the committee in each of  $L_{i,j'}$  and  $L_i^{(j')}$  is disjoint from  $\{c_\top, c_\perp\}$  if  $j \neq j'$  and contains exactly one candidate from  $\{c_\top, c_\perp\}$  if  $j = j'$ .*

*Proof.* Suppose firstly that  $j \neq j'$  but  $C_{i,j'} \cap \{c_\top, c_\perp\} \neq \emptyset$ , say  $c_\top \in C_{i,j'}$ . Due to the unique committee  $C_j^*$ , there is  $a_{x_i}^\ell$  having  $c^*$  nominated in  $C_j^*$  and  $c_\top$  in  $C_{i,j'}$  since there is a position  $\ell$  such that  $B_q(j)$  is 0 and  $B_q(j')$  is 1.

Next, suppose that there is  $C_{i,j} \cap \{c_\top, c_\perp\} = \emptyset$ . If  $C_i^{(j)} = \{c_\top\}$ , then there is  $a_{\bar{x}_i}^\ell$  being never satisfied. If  $C_i^{(j)} = \{c_\perp\}$ , then there is  $a_{x_i}^\ell$  being never satisfied. If  $C_i^{(j)} = \emptyset$  or  $C_i^{(j)} = \{c^*\}$ , then we find two such agents.  $\square$

*Proof of Proposition 6. ( $\Rightarrow$ )* Let  $I_t$  be a *yes*-instance. Let  $f: X \rightarrow \{\top, \perp\}$  be an exact-1-in-3 truth assignment, and let  $\bar{f}$  be the complementary assignment of  $f$ . In  $L_r^*$ ,  $c^*$  is nominated if  $r = t$ , and no candidate is nominated otherwise. For each  $i \in \{1, \dots, N\}$ , in  $L_{i,r}$ ,  $c_{\bar{f}(x_i)}$  is nominated if  $r = t$ , and no candidate is nominated otherwise. Finally, for each  $i \in \{1, \dots, N\}$ , in  $L_i^{(t)}$  candidate  $c_{f(x_i)}$  is nominated. By construction, each agent in  $A_X \cup \{a^*\}$  has exactly one committee respecting their nomination. Consider an agent  $a_j$  with  $j \in \{1, \dots, M\}$  having either no committee or at least two committees respecting their nomination. Note that by construction, we have that  $f(x_i) = \top$  if and only if  $c_\top \in C_i^{(t)}$ . Hence, in either case,  $f$  is not an exact-1-in-3 truth assignment, a contradiction.

*( $\Leftarrow$ )* Let  $\mathcal{C}$  be a solution to  $I$ , and let  $t \in \{1, \dots, p\}$  such that  $L_t^*$  is the unique level where  $c^*$  is nominated (see Observation 8). Due to Lemma 7, we know that each of  $C_i^{(t)} \cap \{c_\top, c_\perp\} \neq \emptyset$ . Let  $f: X \rightarrow \{\top, \perp\}$  be such that  $f(x_i) = \top \iff c_\top \in C_i^{(t)}$ . Since we have that  $a_j$  has a score of  $y$  if and only if there are  $y$  variables in  $K_j^{(t)}$  set to true by  $f$ , it follows that  $f$  is an exact-1-in-3 truth assignment for  $I_t = (X, \phi_t)$ .  $\square$

## E Additional Material for Section 5

Table 1 gives an overview on the computational complexity results for the variants. The following is immediate (by selecting no or all candidates).

**Observation 9.** *Each of  $(\leq | \leq, \leq)$ -BiCMCE[SUM, NOM] and  $(\geq | \geq, \geq)$ -BiCMCE[SUM, NOM] is in P.*

**Proposition 9.** *Each of the following problems is NP-hard, where  $\sim^* \in \{\leq, =, \geq\}$  and  $\sim^\dagger \in \{=, \geq\}$ : (i)  $(\sim^* | \geq, \leq)$ -BiCMCE[SUM, NOM], (ii)  $(\sim^* | =, \leq)$ -BiCMCE[SUM, NOM], (iii)  $(\sim^\dagger | \leq, \leq)$ -BiCMCE[SUM, NOM], and, (iv)  $(\geq | \geq, =)$ -BiCMCE[SUM, NOM].*

The reduction is from the following NP-hard problem. REGULAR MULTICOLORED INDEPENDENT SET (RMIS)

**Input:** An undirected  $d$ -regular graph  $G = (V, E)$  with  $V = V_1 \uplus \dots \uplus V_r$  where each  $V_i$  forms an independent set.

**Question:** Is there an independent set  $S$  with  $|S \cap V_i| = 1$  for all  $i \in \{1, \dots, r\}$ ?

**Construction 8.** Let  $C := \{c_v \mid v \in V\} \cup C_= \cup \{c_+\}$  where  $C_= := \{c_v^e \mid v \in V\} \cup \{c_e^e \mid e \in E\}$ . Let  $A := A_V \uplus A_E \uplus A_+$  with  $A_V := \{a_v \mid v \in V\}$ ,  $A_E := \{a_e \mid e \in E\}$ , and  $A_+ := \{a_+^1, \dots, a_+^{d+1}\}$ . Let  $\tau := r + 1$ . For  $a_v$  with  $v \in V_i$ , agent  $a_v$  nominates  $c_v$  only in level  $i$ ,  $c_v^e$  only in the  $(r + 1)$ st level, and nothing in the other layers. For  $a_e$  with  $e = \{v, w\}$  and  $v \in V_i$  and  $w \in V_j$ , agent  $a_e$  nominates  $c_v$  in level  $i$ ,  $c_w$  in level  $j$ ,  $c_e^e$  in the  $(r + 1)$ st level, and nothing in the other layers. Each agent from  $A_+$  nominates no candidate in the first  $r$  levels and

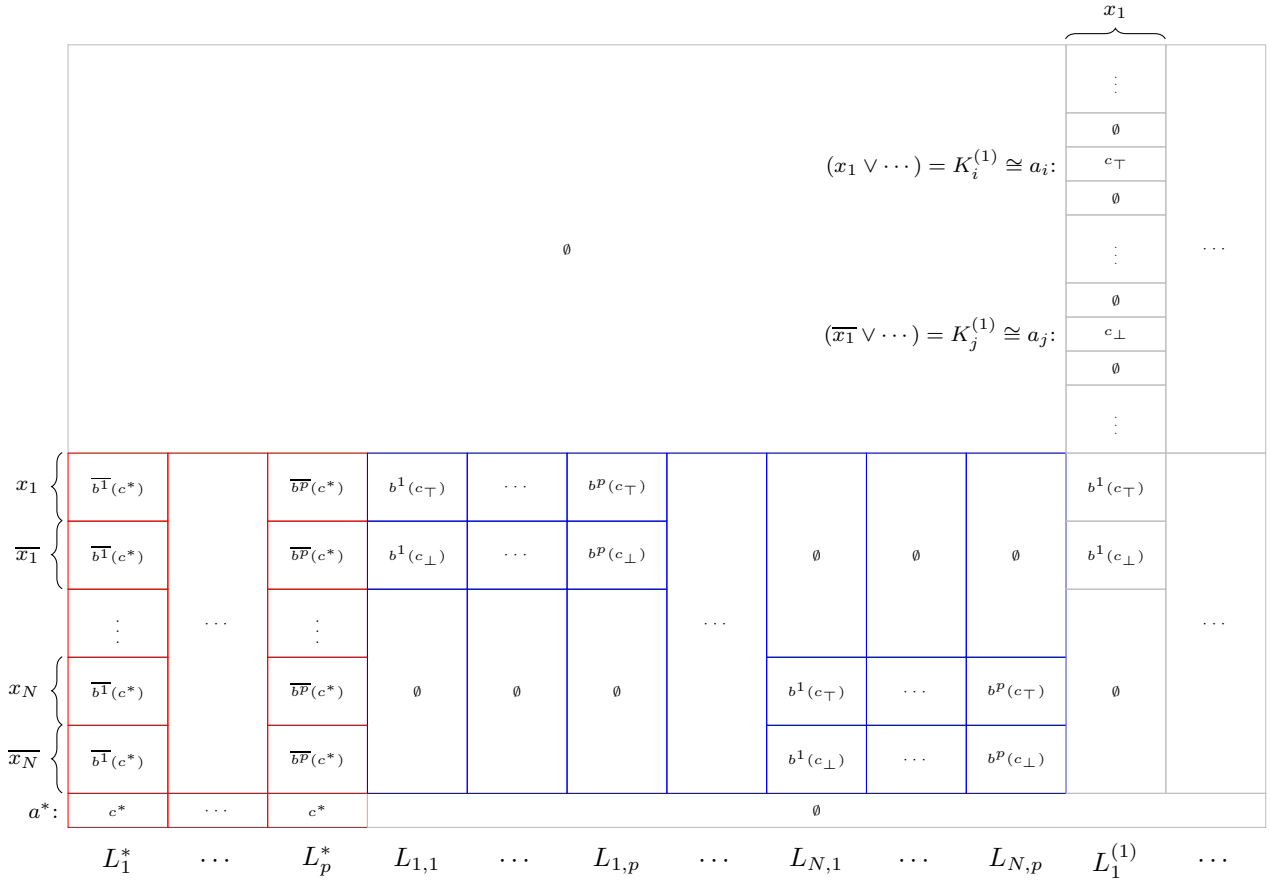


Figure 4: Illustration to Construction 7. In this illustrative example,  $K_i^{(1)}$  and  $K_j^{(1)}$  are the only clauses of  $\phi_1$  containing  $x_1$  as a literal.

|                 | “ $\leq k$ ” |                 |                 | “ $= k$ ” |       |                 | “ $\geq k$ ” |       |            |
|-----------------|--------------|-----------------|-----------------|-----------|-------|-----------------|--------------|-------|------------|
| $x \setminus y$ | $\leq$       | $=$             | $\geq$          | $\leq$    | $=$   | $\geq$          | $\leq$       | $=$   | $\geq$     |
| $\leq$          | P (Obs. 9)   | NP-h.           | NP-h.           | NP-h.     | NP-h. | NP-h.           | NP-h.        | NP-h. | NP-h.      |
| $=$             | NP-h.        | NP-h.           | NP-h.           | NP-h.     | NP-h. | NP-h.           | NP-h.        | NP-h. | NP-h.      |
| $\geq$          | NP-h.        | NP-h. (Prop. 3) | NP-h. (Prop. 1) | NP-h.     | NP-h. | NP-h. (Prop. 1) | NP-h.        | NP-h. | P (Obs. 9) |

Table 1:  $\sim_x$  versus  $\sim_y$  versus  $\sim_k$  for  $(\sim_k | \sim_x, \sim_y)$ -BiCMCE[SUM,NOM]. The darkgray-colored cell corresponds to GCSE, and the lightgray-colored cell to QCSE. Cor. 2 Prop. 9

candidate  $c_+$  in the  $(r + 1)$ st level. Let  $k := 1$ ,  $y := 1$ , and  $x := d + 1$ .  $\diamond$

*Proof.* Follows from the fact that in each variant, no agent is allowed to be satisfied more than once. However, in every level at least one candidate must be chosen, either due to the  $x$ -constraint or the  $k$ -constraint.  $\square$

The NP-hardness of  $(= | \geq, \geq)$ -BiCMCE[SUM,NOM] follows from the same reduction from CBVC (see Section 3.1) behind Proposition 1.

*Remark 3.* The following problem is in some sense dual to CBVC:

CONSTRAINT BIPARTITE INDEPENDENT SET (CBIS)

**Input:** An undirected bipartite graph  $G = (V, E)$  with  $V = V_1 \uplus V_2$  and  $k_1, k_2 \in \mathbb{N}$ .

**Question:** Is there a set  $X \subseteq V$  with  $|X \cap V_i| \geq k_i$  for each  $i \in \{1, 2\}$  such that  $G[X]$  contains no edge?

It is not hard to see that CBIS is NP-hard via a reduction from CBVC by the classic connection of IS to VC. Thus, for several problem variants like  $(\geq | \geq, \leq)$ -BiCMCE[SUM,NOM] we can adapt the reduction behind Proposition 1 using CBIS to obtain NP-hardness already for two levels.  $\triangleleft$

We next prove that our main problems GCSE and QCSE are NP-hard even if every level looks the same. The reduction will also apply for several variants (see Table 1).

**Proposition 10.** *Each of GCSE and QCSE is NP-hard, even if each agent nominates one and the same candidate in every level.*

The reduction is from the following strongly NP-hard problem [13].



### 3-PARTITION

**Input:** A multiset  $S = \{s_1, \dots, s_n\}$  of  $n = 3m$  positive integers with  $\sum_{i=1}^n s_i = T \cdot m$ .

**Question:** Is there a partition  $(S_1, \dots, S_m)$  into triplets such that for every  $i \in \{1, \dots, m\}$  it holds that  $\sum_{s \in S_i} s = T$ ?

**Construction 9.** Let  $I = (S = \{s_1, \dots, s_n\})$  of  $n = 3m$  positive integers with  $\sum_{i=1}^n s_i = T \cdot m$  be an instance of 3-PARTITION. We construct an instance  $I' := (A, C, U, k, x, y)$  as follows. Let  $C = \{c_1, \dots, c_n\}$  be the set of candidates, let  $A = A_1 \cup \dots \cup A_n$  with  $A_i = \{a_i^1, \dots, a_i^{s_i}\}$  be the sets of agents, let each agent from  $A_i$  nominate  $c_i$  in each of the  $m$  levels, and let  $x := T$ ,  $k := 3$ , and  $y := 1$ .  $\diamond$

**Observation 10.** *If  $I'$  is a yes-instance, then every solution  $(C_1, \dots, C_m)$  is a partition of  $C$  into triples with for every  $t \in \{1, \dots, m\}$ :  $\sum_{c \in C_t} |u_t^{-1}(c)| = x$ .*

*Proof.* As there are  $3m$  candidates, each with a one-to-one correspondence to a set  $A_i$ , and there are  $m$  levels where in each at most 3 candidates can be chosen, the first statement follows. Assume there is  $r \in \{1, \dots, m\}$  with  $\sum_{c \in C_r} |u_r^{-1}(c)| > x = T$ . Then,

$$\begin{aligned} \sum_{i=1}^n s_i &= \sum_{t=1}^m \sum_{c \in C_t} |u_t^{-1}(c)| \\ &\geq (m-1) \cdot T + \sum_{c \in C_r} |u_r^{-1}(c)| > m \cdot T, \end{aligned}$$

a contradiction.  $\square$

*Proof of Proposition 10.* Given instance  $I = (S = \{s_1, \dots, s_n\})$  of  $n = 3m$  positive integers with  $\sum_{i=1}^n s_i = T \cdot m$  of 3-PARTITION, we obtain instance  $I' := (A, C, U, k, x, y)$  using Construction 9. We show that  $I$  is a yes-instance if and only if  $I'$  is a yes-instance.

( $\Rightarrow$ ) Let  $(S_1, \dots, S_m)$  be a solution to  $I$  with  $S_t = \{s_{t,1}, s_{t,2}, s_{t,3}\}$ . We claim that  $(C_1, \dots, C_m)$  with  $C_t := \{c_{t,1}, c_{t,2}, c_{t,3}\}$  is a solution to  $I'$ . Since  $|C_t| \leq 3 = k$  and  $(S_1, \dots, S_m)$  is a partition, it remains to show that the score of each  $C_t$  is at least  $x = T$ . Note that there are exactly  $s_{t,i}$  many agents nominating  $c_{t,i}$ . Hence, we have that  $\sum_{c \in C_t} |u_t^{-1}(c)| = \sum_{i=1}^3 |u_t^{-1}(c_{t,i})| = \sum_{i=1}^3 s_{t,i} = \sum_{s \in S_t} s = T$ .

( $\Leftarrow$ ) Follows from Observation 10.  $\square$

In fact, the reduction above works for surprisingly many variants.

**Corollary 2.** *Each of the following problems with  $\sim^* \in \{\leq, =, \geq\}$  is NP-hard, even if each agent nominates the same candidate in every level:*

- (i)  $(\sim^* | =, =)$ -BiCMCE[SUM, NOM],
- (ii)  $(\sim^* | =, \geq)$ -BiCMCE[SUM, NOM],
- (iii)  $(\sim^* | \leq, =)$ -BiCMCE[SUM, NOM],
- (iv)  $(\sim^* | \leq, \geq)$ -BiCMCE[SUM, NOM],
- and (v)  $(= | \geq, =)$ -BiCMCE[SUM, NOM],