

Unified View of Damage leaves Planimetry & Analysis Using Digital Images Processing Techniques

Pijush Kanti Kumar

Department of Information Technology
Government College of Engineering & Textile Technology
Serampore, Calcutta, India
pijush752000@yahoo.com

DeepKiran Munjal

Department of Computer Applications
G. L. Bajaj Institute of Technology and Management
Greater Noida, Uttar Pradesh, India
deepa.munjal@gmail.com

Sunita Rani

Department of Engineering Administration
Noida Institute of Engineering and Technology
Greater Noida, Uttar Pradesh, India
Sunita.Tomar2022@gmail.com

Anurag Dutta

Department of Computer Science & Engineering
Government College of Engineering & Textile Technology
Serampore, Calcutta, India
anuragdutta.research@gmail.com

Liton Chandra Voumik

Department of Economics
Noakhali Science and Technology University
Noakhali, Bangladesh
litonvoumik@gmail.com

A. Ramamoorthy

Department of Mathematics
Velammal Engineering College, Anna University
Chennai, Tamil Nadu, India
ramzenithmaths@gmail.com

Abstract—The detection of leaf diseases in plants generally involves visual observation of patterns appearing on the leaf surface. However, there are many diseases that are distinguished based on very subtle changes in these visually observable patterns. This paper attempts to identify plant leaf diseases using image processing techniques. The focus of this study is on the detection of citrus leaf canker disease. Canker is a bacterial infection of leaves. Symptoms of citrus cankers include brown spots on the leaves, often with a watery or oily appearance. The spots (called lesions in botany) are usually yellow. It is surrounded by a halo of the leaves and is found on both the top and bottom of the leaf. This paper describes various methods that have been used to detect citrus leaf canker disease. The methods used are histogram comparison and k-means clustering. Using these methods, citrus canker development was detected based on histograms generated based on leaf patterns. The results thus obtained can be used, after consultation with experts in the field of agriculture, to identify suitable treatments for the processes used.

Index Terms—*Digital Image Processing, k – Means Clustering, Citrus Leaf Canker Disease*

I. INTRODUCTION

In today's world, the farmland volume serves as an additional source of food. Agriculture's productivity has a significant impact on the Indian economy. As a result, it is crucial to identify plant diseases in the field of agriculture. Use of an automatic disease recognition system is advantageous for spotting a plant pathogens in its very early stages. For example

in the case, the United States has pine trees that are susceptible to a dangerous disease called little leaf disorder. The affected tree grows slowly and perishes within six years. Parts of the Southern US, including Alabama and Georgia, are affected by it. Early diagnosis in these situations might have been beneficial. The only method currently in use for identifying and detecting *phytopathogens* is professional assessment using only one's unaided eye. This requires a sizable group of specialists and ongoing vegetation surveillance, both of which are very expensive when dealing with large farmlands. Meanwhile, in some nations, farmers lack access to the necessary resources and even the knowledge to speak with experts. Because of this, consulting experts is expensive and time-consuming. The recommended method works well in these circumstances for keeping an eye on huge expanses of harvests. Visual diagnosis of plant diseases is more time-consuming, less accurate, and only practicable in a few locations. However, using an automatic detection method will require less work, less time, and result in a higher degree of accuracy. Brown and yellow spots, early and late scorch, and certain other common bacterial, viral, and fungal diseases are all seen in plants. The size of the diseased area is measured using image processing, and the difference in color of the damaged area is also determined. The method used for breaking down or classifying an image into numerous components is known as image segmentation. Image segmentation can be done in a variety of cases right now, from the straightforward segmen-

tation process to sophisticated color segmentation methods. Usually, these product attributes to elements that people can easily differentiate into separate elements and see. There are numerous techniques for segmenting images because computers lack the ability to recognize objects intelligently. The image's unique components are the basis for the segmentation algorithm. This could be a section of an image, color features, or boundary details. Diseased leaf spots play an important role in plant growth environment. Diseases can also be easily identified with the help of affected areas in culture [1]. Usually, of course, leaves clearly show infected areas and are easily identifiable. Therefore, we can say that plant colour change is an essential aspect of notification. If the crop is in good health, the crop will have different colours, but if the crop dies from some harmful pathogen, it will automatically change colour. Plant diseases affect specific parts. This can lead to decreased productivity. The main method used in practice to detect plant diseases is early observation by a specialist, exposing the eye. In this feature retrieval-based investigation, influenced leaf parts were examined using the suggested diagonal disagreement of border, color, and appearance variability features. K-Means clustering was employed. Six different disease types were predicted using this method. Results of the performance assessments were eventually achieved. This reviewed work [2] is based on methods to reduce computational complexity through improved automated crop disease detection. This is due to the fact that it significantly harms the agricultural industry and makes the disease's symptoms visible. Once more, the possibility for treating and preventing infected plants is clear. In order to detect and categorize plant diseases, it is necessary to look for reliable, affordable, and accurate techniques. Test photographs of various cotton sheets were initially implemented. The pictures that are then captured using image processing approaches, and helpful features are extracted for additional analysis. uses a variety of statistical techniques to categorize the images in accordance with the precise issue of the influenced leaf spot regions. The analysis of the best corresponded to of characteristic conclusions for leaves impacted by the perfect solution was done using the selection of features. In the classification phase [3], feature values corresponding to the variance of edge, colour and texture features are stored in the image domain. Based on the affected areas of leaf diseases, the affected sites were identified.

II. MATERIALS AND METHODS

A. Materials

The following materials were taken into use.

- 1) Nikon Make 12.5 Megapixels Digital Camera
- 2) Personal Computer
- 3) White A4 Paper Sheet for background
- 4) MATLAB 2013 version or above
- 5) Photographs of the leaves were arranged in number.

B. Methods

1) *Graphical Method*: A leaf with a measurement region was positioned on graph paper with a 1 mm-wide grid. On graph paper, the sheets are meticulously and precisely defined with the aid of a pencil. It was determined how many grids the sheet's detail encompassed in total. The boundary detail is regarded as 1 if it takes up over fifty percent of the grid; otherwise, it is addressed as 0. The precise leaf area is represented by an array of grid numerals.

2) *Image Processing Method*: A wider audience are capable of determining leaf area thanks to the MATLAB-based technique used for the processing of images, which is a partially automated technique. Code is created using MATLAB 2013 or later. For the latest releases of the application, this code is functional. The procedure is as follows:

- 1) Study the picture.
- 2) RGB to grayscale conversion.
- 3) Create a binary picture from the image that is grayscale.
- 4) Do the leaf area calculation.

III. K MEANS CLUSTERING

Data can be grouped in a variety of ways, however the most popular method is the k-Means algorithm [4], which aims to make categories become more comparable while simultaneously maintaining them as far apart as feasible. In essence, distance calculations using Euclidean distance are performed using k-Means. Euclidean distance calculates the distance between two given points (x_1, y_1) and (x_2, y_2) using the following formula

$$Distance_{euclidian} = \sqrt{(x_2 - x_1)^2 + (y_2 - y_1)^2} \quad (1)$$

The above formula captures distance in 2D space, but the same holds true in multidimensional space as the number of terms added increases. The 'k' in k-Means represents the number of distinct clusters into which the data is divided. A fundamental caveat [5] of the k-Means algorithm is that the data must be continuous in nature. It will not work if your data is categorical in nature.

A. Data Preparation

As was previously addressed, the majority of methodologies for clustering, including k-Means, rely on the concept of separation. They compute their distance from a specific point and make an effort to reduce it. When distinct variables utilize distinct components, something occurs. For instance, I want to divide the general population of India into different groups since weight is measured in kilograms of weight while heights is measured in centimeters. As can be observed, the variable's components have a significant impact on the matrix of distances above. As a result, standardizing the information prior to seeking clustering activities is an excellent decision.

B. Algorithm

k-Means is an iterative clustering process. This is repeated until an optimal solution or cluster is reached in the problem space. The following pseudo-example covers the basic steps

involved in k -means clustering, which is commonly used to cluster data.

Start by deciding how many clusters you want, in the present instance three. The k -Means algorithm attempts to connect the closest points to the arbitrarily data centers it starts with.

C. Image acquisition

The leaf measuring the affected area is placed on a black background with no light reflection [6]. Hold the camera horizontally to the paper. The shooting distance is neither too close nor too far. The photo has been adjusted to cover only the background. See Fig. 2.

D. Observing the picture

The image is saved in the computer as b3.jpeg. This image is read for further processing by MATLAB.

E. Dividing the Image

The initial picture is divided into two distinct kinds of images in this phase based on how its colors vary. These pictures were chosen for their ability to show impacted and untouched leaf regions. This is done by the k -Means clustering method. The algorithm for this method is shown below.

- 1) Read the image.
- 2) Change an image's color space from RGB towards LAB.
- 3) Use k -means clustering to categorize the colors in the 'a*b*' space.
- 4) With the help of the k -means outcomes identify each pixel in the picture.
- 5) Make pictures that divide the initial picture into sections based on color.

After applying the above algorithm segmented images were obtained. See Fig. 3 and Fig. 4.

F. Convert the image (Cluster – I) into Binary image

After reading the image, I need to first convert this image from RGB to grayscale [7] and then convert the grayscale image to binary. In this image, the white – coloured areas indicate the unaffected parts of the leaves, as shown in the image in Fig. 5. Useful for calculating the total number of pixels in unaffected areas of the sheet.

G. Convert the image (Cluster – II) into Binary image

After converting the image into binary image, image in Fig. 6 is obtained where white coloured regions indicate affected regions of the leaf. It helps to calculate total number of pixels of affected regions [8] of the leaf.

H. Pixel Calculation

1) From Cluster I: WP (Pixels of unaffected regions) = 195612

where, WP denotes white pixels of Cluster - I.

2) From Cluster II: WP1 (Pixels of affected regions) = 41246

where, WP1 denotes white pixels of Cluster - II.

Now, total pixels of the leaf area that is obtained is shown below.

$$TP = WP + WP1 \quad (2)$$

$$TP = 195612 + 41246 = 236858$$

Percentage of affected pixels can be obtained by the following as

$$Error = \frac{WP1 \text{ (pixels of affected regions)}}{TP \text{ (Total pixels of the leaf area)}} \times 100$$

$$ERROR (\%) = 17.4138 \%$$

IV. RESULTS AND DISCUSSION

Leaves were selected from different plots and different types of citrus leaves to test the performance [9] of the new measurement system. Leaf area is calculated using the square grid method and is considered standard area. When we obtained sampled data from different affected leaves. Then you can get a clear idea about the whole damaged sheet in relation to the specific area. This proposed method is faster [10] and more accurate than any standard method.

V. CONCLUSION

This article discusses a method for measuring the area of citrus leaves using the processing of digital images. Calculating the quantity of leaves that are damaged has been demonstrated to be possible with the executed algorithmic structure. Although more time-consuming, grid calculating strategies are highly precise for measuring the surface area of leaves. The image processing method is also a fast method [11 - 21] with high accuracy [22] and precision [23]. You may modify the leaf picture at any moment if you solely preserve it [24]. This can serve as an empirical basis for creating an affordable leaf area meter that meets precision farming requirements. For precise area computations and disease incidence projections for chemical pesticides and application of fertilizer, the proportion of error aspect is crucial and required.

REFERENCES

- [1] Prathyakshini, Akshaya, and C. V. Aravinda, "Classification and Clustering of Infected Leaf Plant Using K-Means Algorithm," *Communications in Computer and Information Science*, pp. 468–474, 2018, doi: https://doi.org/10.1007/978-981-10-9059-2_41.
- [2] M. Zhang et al., "Chromosomal-level genome assembly of potato tuberworm, *Phthorimaea operculella*: a pest of solanaceous crops," *Scientific Data*, vol. 9, no. 1, Dec. 2022, doi: <https://doi.org/10.1038/s41597-022-01859-5>.
- [3] H. A. Gharib and A. M. Mandour, "Effect of Populus nigra spring and autumn leaves extract on Capsicum annum infected with pepper mild mottle virus," *Scientific Reports*, vol. 12, no. 1, Dec. 2022, doi: <https://doi.org/10.1038/s41598-022-24786-2>.
- [4] A. A. Najm, M. R. H. S. Hadi, F. Fazeli, M. T. Darzi, and A. Rahi, "Effect of Integrated Management of Nitrogen Fertilizer and Cattle Manure on the Leaf Chlorophyll, Yield, and Tuber Glycoalkaloids of Agrida Potato," *Communications in Soil Science and Plant Analysis*, vol. 43, no. 6, pp. 912–923, Mar. 2012, doi: <https://doi.org/10.1080/00103624.2012.653027>.

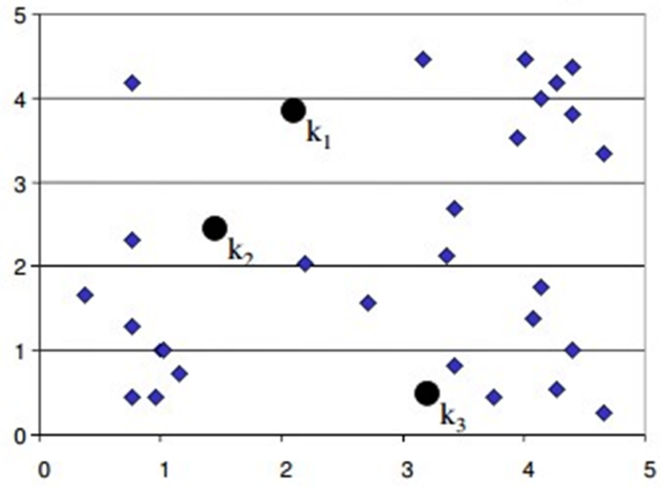
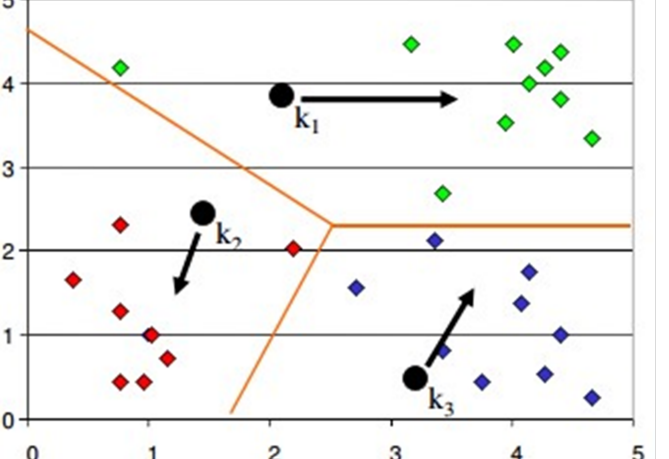
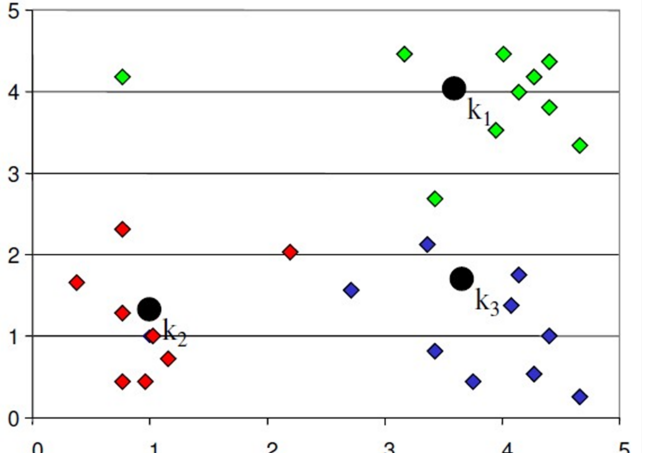
| | Description | Diagrammatic Representations |
|--------|--|--|
| Step 1 | Algorithm then moves the randomly allocated centres to the means of created groups |  <p>A scatter plot on a 5x5 grid showing three clusters of data points (blue diamonds) and three initial cluster centers (black circles) labeled k_1, k_2, and k_3. The points are distributed across the grid, and the centers are positioned near the mean of each cluster.</p> |
| Step 2 | In the next step, data points are again reassigned to these newly created centres |  <p>A scatter plot on a 5x5 grid showing the same three clusters of data points (blue diamonds) and three initial cluster centers (black circles) labeled k_1, k_2, and k_3. The data points are now reassigned to the new cluster centers, and the decision boundaries (orange lines) are shown. Arrows indicate the movement of the cluster centers towards the mean of their respective groups.</p> |
| Step 3 | Steps 2 & 3 are repeated until no member changes their association/ groups |  <p>A scatter plot on a 5x5 grid showing the final stable clusters of data points (blue diamonds, red diamonds, and green diamonds) and their final cluster centers (black circles) labeled k_1, k_2, and k_3. The points are now grouped into three distinct clusters, and the centers are positioned at the mean of each group.</p> |

Fig. 1. Step by Step application of the k Means Clustering

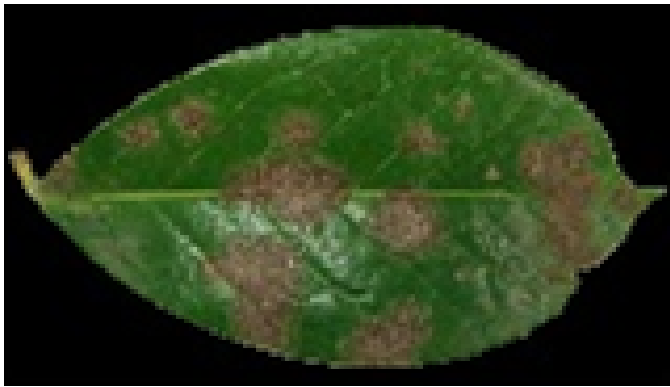


Fig. 2. Original Image

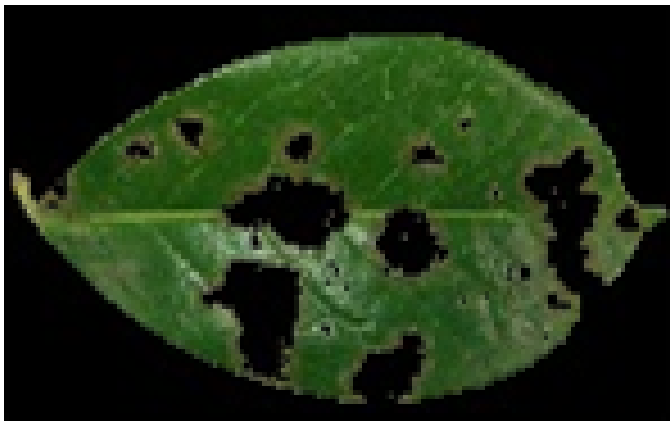


Fig. 3. Cluster I

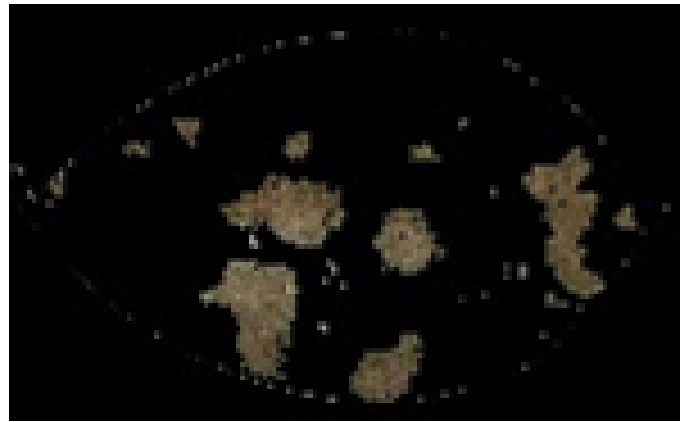


Fig. 4. Cluster II

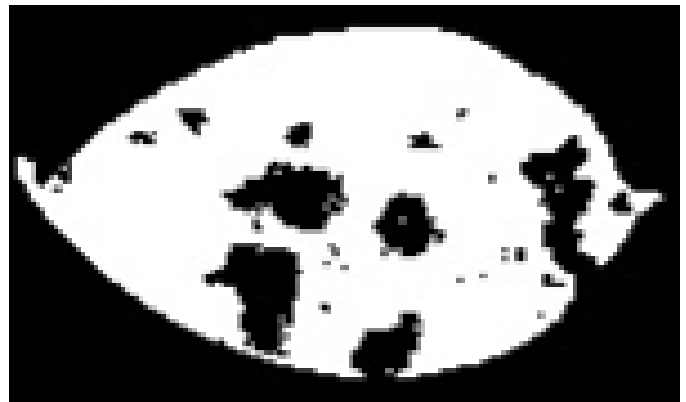


Fig. 5. Binary Version of Cluster I

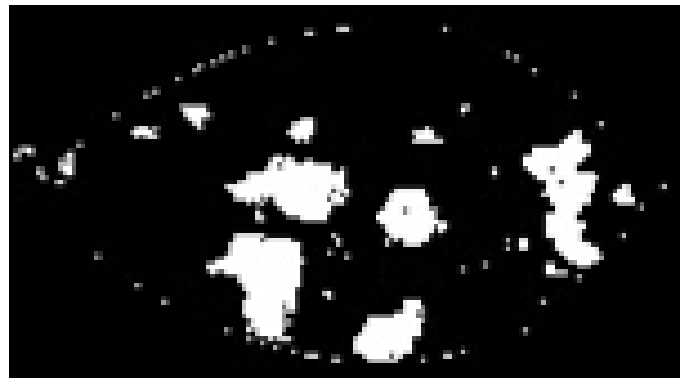


Fig. 6. Binary Version of Cluster II

- [5] B. J. Haas et al., "Genome sequence and analysis of the Irish potato famine pathogen *Phytophthora infestans*," *Nature*, vol. 461, no. 7262, pp. 393–398, Sep. 2009, doi: <https://doi.org/10.1038/nature08358>.
- [6] M. R. Smith and T. Martinez, "Improving classification accuracy by identifying and removing instances that should be misclassified," *The 2011 International Joint Conference on Neural Networks*, Jul. 2011, doi: <https://doi.org/10.1109/ijcnn.2011.6033571>.
- [7] Y. Wang, Y. Zheng, and Y. Liu, "Identifying vital nodes for influence maximization in attributed networks," *Scientific Reports*, vol. 12, no. 1, Dec. 2022, doi: <https://doi.org/10.1038/s41598-022-27145-3>.
- [8] T. Johns and S. L. Keen, "Taste evaluation of potato glycoalkaloids by the Aymara: A case study in human chemical ecology," *Human Ecology*, vol. 14, no. 4, pp. 437–452, Dec. 1986, doi: <https://doi.org/10.1007/bf00888308>.
- [9] A. Comesaña-Campos and J. B. Bouza-Rodríguez, "An application of Hebbian learning in the design process decision-making," *Journal of Intelligent Manufacturing*, vol. 27, no. 3, pp. 487–506, Feb. 2014, doi: <https://doi.org/10.1007/s10845-014-0881-z>.
- [10] S. B. Goodwin, B. A. Cohen, and W. E. Fry, "Panglobal distribution of a single clonal lineage of the Irish potato famine fungus," *Proceedings of the National Academy of Sciences*, vol. 91, no. 24, pp. 11591–11595, Nov. 1994, doi: <https://doi.org/10.1073/pnas.91.24.11591>.
- [11] A. Dutta, M. R. Choudhury, and K. Kundu, "Validation of Minimal Worst-Case Time Complexity by Stirling's, Ramanujan's, and Mortici's Approximation," *2022 3rd International Conference for Emerging Technology (INCET)*, May 2022, doi: <https://doi.org/10.1109/incet54531.2022.9824687>.
- [12] A. Dutta and M. Saha, "Contrasting Parallelized with Sequential Sorting," *2022 IEEE 7th International Conference on Recent Advances and Innovations in Engineering (ICRAIE)*, Dec. 2022, doi: <https://doi.org/10.1109/icraie56454.2022.10054300>.
- [13] A. Dutta, M. R. Choudhury, and K. Kundu, "Extrapolating linked list data structures to 3rd dimension," *Iran Journal of Computer Science*, Jan. 2023, doi: <https://doi.org/10.1007/s42044-022-00132-7>.
- [14] A. Dutta, J. Harshith, Y. Soni, A. Gupta, V. K. Gupta, and A. Gupta, "Computational Time Complexity for Sorting Algorithm amalgamated with Quantum Search," *2023 International Conference for Advancement in Technology (ICONAT)*, Jan. 2023, doi: <https://doi.org/10.1109/iconat57137.2023.10080217>.
- [15] A. Dutta, V. Chhabra, and P. K. Kumar, "A Unified Vista and Juxtaposed Study on Sorting Algorithms," *International Journal of Computer Science and Mobile Computing*, vol. 11, no. 3, pp. 116–130, Mar. 2022, doi: <https://doi.org/10.47760/ijcsmc.2022.v11i03.014>.

- [16] A. Dutta, L. C. Voumik, A. Ramamoorthy, S. Ray, and A. Raihan, "Predicting Cryptocurrency Fraud Using ChaosNet: The Ethereum Manifestation," *Journal of Risk and Financial Management*, vol. 16, no. 4, p. 216, Mar. 2023, doi: <https://doi.org/10.3390/jrfm16040216>.
- [17] A. Dutta, M. R. Choudhury, and A. K. De, "A Unified Approach to Fraudulent Detection," *International Journal of Applied Engineering Research*, vol. 17, no. 2, p. 110, Feb. 2022, doi: <https://doi.org/10.37622/ijaer/17.2.2022.110-124>.
- [18] M. Choudhury, A. Dutta, and A. Kumar De, "Data Corroboration of The Catastrophic Chernobyl Tragedy Using Arc-Length Estimate Conjecture," *Vertices: Duke's Undergraduate Research Journal*, vol. 1, no. 2, Jan. 2023, doi: <https://doi.org/10.55894/dv1.24>.
- [19] P. K. Kumar, A. Dutta, and P. Kumar, "Application of Graph Mining Algorithms for the Analysis of Web Data," *SSRN Electronic Journal*, 2023, doi: <https://doi.org/10.2139/ssrn.4365862>.
- [20] A. Dutta and P. K. Kumar, "Aeroponics: An Artificial Plant Cultivation Technique," Feb. 2023, doi: <https://doi.org/10.22541/au.167701276.63098263/v1>.
- [21] M. Choudhury and A. Dutta, "A Perusal of Transaction Details from Silk Road 2.0 and its Cogency using the Riemann Elucidation of Integrals," *AMCI*, vol. 11, no. 1, pp. 423–436, Dec. 2022.
- [22] A. Dutta, Pijush Kanti Kumar, A. De, P. Kumar, J. Harshith, and Y. Soni, "Maneuvering Machine Learning Algorithms to Presage the Attacks of *Fusarium oxysporum* on Cotton Leaves," Feb. 2023, doi: <https://doi.org/10.1109/delcon57910.2023.10127436>.
- [23] A. Dutta, A. Negi, J. Harshith, Dickson Selvapandian, S. Antony, and P. R. Patel, "Evaluation Modelling of Asteroids' Hazardousness using ChaosNet," Apr. 2023, doi: <https://doi.org/10.1109/i2ct57861.2023.10126386>.
- [24] A. Dutta, A. Stephan, A. Ramamoorthy, J. Harshith, Y. Soni, and Unnati Sadh, "Stellar Classification vis-à-vis Convolutional Neural Network," Mar. 2023, doi: <https://doi.org/10.1109/iccike58312.2023.10131846>.