Sparse estimation of parameter support sets for generalized vector autoregressions by resampling and model aggregation

Trevor D. Ruiz*1, Sharmodeep Bhattacharyya2, and and Sarah C. Emerson2

- Department of Statistics and Applied Probability, University of California, Santa Barbara, Santa Barbara, CA
 - ² Department of Statistics, Oregon State University, Corvallis, OR

Abstract

The central problem we address in this work is estimation of the parameter support set S, the set of indices corresponding to nonzero parameters, in the context of a sparse parametric likelihood model for count-valued multivariate time series. We develop a computationally-intensive algorithm that performs the estimation by aggregating support sets obtained by applying the LASSO to data subsamples. Our approach is to identify several well-fitting candidate models and estimate S by the most frequently-used parameters, thus aggregating candidate models rather than selecting a single candidate deemed optimal in some sense. While our method is broadly applicable to any selection problem, we focus on the generalized vector autoregressive model class, and in particular the Poisson case, due to (i) the difficulty of the support estimation problem due to complex dependence in the data, (ii) recent work applying the LASSO in this context, and (iii) interesting applications in network recovery from discrete multivariate time series. We establish benchmark methods based on the LASSO and present empirical results demonstrating the superior performance of our method. Additionally, we present an application estimating ecological interaction networks from paleoclimatology data.

Keywords: model selection; computationally-intensive methods; LASSO; vector time series

^{*}Corresponding Author: tdr@ucsb.edu

1 Introduction

Vector autoregressive (VAR) models describe the serial dependence in multivariate time series, including both inter- and intra-series correlations, but are densely parametrized: the number of parameters scales quadratically with the process dimension. Bach and Jordan [2004], Arnold et al. [2007] and Hsu et al. [2008] used the LASSO [Tibshirani, 1996] to apply VAR models to high-dimensional data, and more recently Basu et al. [2015] established theoretical support for the method. Variants on the LASSO specifically adapted to the VAR setting were introduced by Shojaie and Michailidis [2010], Song and Bickel [2011], and Fan et al. [2011], and alternative sparse estimation methods that sought to reduce overfitting were proposed by Han et al. [2015] and Davis et al. [2016]. Among applications, a central theme in estimating VAR models with sparsity is learning causal relationships between the observational units corresponding to the components of the multivariate process [Valdés-Sosa et al., 2005, Arnold et al., 2007, Lozano et al., 2009. Causality is narrowly defined in this context based on forecasting accuracy in the sense proposed by Granger [1969]: one process is causal for another if the former improves forecasts of the latter. Granger causality can be identified directly from the support set of VAR model parameters, a fact which underpins the explicitly causal interpretation of a VAR process as a graphical model [Dahlhaus and Eichler, 2003. Thus, in practice, sparse estimation is utilized specifically for identifying a causal network.

Network estimation is also a central application of generalized vector autoregressive (GVAR) models for discrete data [Mark et al., 2017, Hall et al., 2018]. These models — discrete-time stochastic processes $\{X_t\}_{t\in\mathbb{Z}}$ specified through a parametric model for $X_t|\mathcal{H}_t$ in the exponential family in which the parameter is a function of the process history \mathcal{H}_t — provide a VAR-like framework for non-Gaussian and discrete data [Cox et al., 1981, Fahrmeir and Tutz, 1994, Karlis, 2016, Fokianos, 2021]. For a subclass of GVAR models, LASSO estimates exhibit consistency and support recovery properties under certain conditions [Pandit et al., 2020, Han et al., 2023], and can be computed efficiently using methods for generalized linear models [Friedman et al., 2010]. Although LASSO estimation of GVAR models has only recently attracted attention in the statistical community, it has been in use in applications

for some time in the sciences [Brown et al., 2004, Pillow et al., 2008, Paul et al., 2008].

The parameter support set itself, apart from the values of model parameters, is thus an object of particular interest in the application of GVAR models, and consequently, the selection behavior of sparse estimators in practice with limited data is of special importance. However, the conditions under which theoretical guarantees hold are difficult to verify in practice, and moreover, the use of *ad hoc* approaches for fixing regularization hyperparameters can severely compromise performance. There is little guidance available on how to directly resolve these challenges.

In other contexts, data resampling has been used to formulate selection and sparse estimation methods that achieve strong empirical performance. Resampling allows for the possibility of obtaining collections of models with comparable sparsity levels that can be considered as candidates and leveraged in various ways to formulate more robust strategies for searching large model spaces. For example, if many resamples are considered, candidate models can be used to estimate the frequency with which parameters are selected across data subsets at different sparsity levels. Bach [2008] used these frequencies to reduce overfitting across the regularization path by returning only common parameter supports across all resamples. [Meinshausen and Bühlmann, 2010] performed selection without fixing regularization hyperparameters by choosing parameters having a maximum selection frequency above a certain threshold. Ruiz et al. [2020] considered estimating VAR models by pooling supports meeting optimality criteria across resamples.

In this work we propose a sparse estimation method based on simple aggregation operations applied to multiple estimates obtained from data resampling, and demonstrate the superiority of the approach compared with simpler alternatives. The method is developed in the context of first-order Poisson GVAR processes, but generalizes easily to any support set estimation or model selection problem. A high-level presentation of the methodology is given in Section 2. We provide empirical support for the method in Section 3 along with a discussion of special challenges in selecting parameter values for simulating process realizations. We give a data application in 4 illustrating the use of the methodology and its advantage over alternatives in practice. Section 5 closes the paper with a summary of findings.

2 Methods

 $\{X_t\}_{t\in\mathbb{Z}}$ is a generalized vector autoregressive (GVAR) process if for some exponential family probability density p and for every $t\in\mathbb{Z}$:

$$(X_{t,m} \mid X_s = x_s, s < t) \stackrel{indep.}{\sim} p(\cdot; \theta_{t,m} = \theta_m(x_{t-1}, x_{t-2}, \dots)), m \in \{1, \dots, M\}$$

Given an initial distribution ν_0 , the joint density of any finite-time process realization $\{x_t\}_{t=0}^T$ is:

$$\Pr(X_0 = x_0, \dots, X_T = x_T) = \nu_0(x_0) \prod_{t=1}^T \prod_{m=1}^M p(x_{t,m}; \theta_{t,m})$$

The Poisson GVAR(D) process has the Poisson density as p with a canonical parameter $\theta_{t,m}$ linear in D time lags:

$$p(x_{t,m}; \theta_{t,m}) = \frac{\exp\{x_{t,m}\theta_{t,m} - \exp(\theta_{t,m})\}}{x_{t,m}!} \quad \text{and} \quad \theta_{t,m} = \nu_m + \sum_{d=1}^{D} a'_{dm} x_{t-d}$$

This process is identifiable for any values of the parameters ν, A_1, \ldots, A_D provided D < T but moments do not exist without suitable constraints [Ruiz et al., 2022]. The conditional means are log-linear in past values:

$$\ln \{ \mathbb{E}(X_t \mid X_s, s < t) \} = \nu + \sum_{d=1}^{D} A_d X_{t-d}$$

The log-likelihood $\ell(\nu, A_1, \dots, A_d; x) = \ln\{\Pr(X_0 = x_0, \dots, X_T = x_T)\}$ can be written directly from the process definition above. Maximum likelihood estimates can be computed using standard techniques for generalized linear models. The basic approach is to arrange the multivariate time series into a single long pseudo-response vector, form a block-diagonal pseudo-covariate-matrix containing the lagged values, and estimate the regression pseudo-parameter:

$$\beta = \operatorname{vec}(\nu \, A_1 \cdots A_D)'$$

We express the estimand S as the set of indices designating the nonzero entries in β :

$$S = \{j : \beta_j \neq 0\}$$

The LASSO estimator of S is:

$$\hat{S}^{\lambda} = \{j: \hat{\beta}^{\lambda}_{j} \neq 0\} \quad \text{where} \quad \hat{\beta}^{\lambda}_{j} = \operatorname{argmin}_{\beta} \{-\ell(\beta; x) + \lambda \| \operatorname{vec}(A_{1} \cdots A_{D}) \|_{1} \}$$

The details of the regression formulation and computations are given as supplementary material for brevity. Here we simply note: (i) some care must be taken when applying regularization constraints so as not to penalize the intercept terms, which are distributed throughout the parameter vector unlike in a standard regression problem; and (ii) although the parameters A_d must be estimated simultaneously, the sparsity of the pseudo-covariatematrix should be leveraged for computational efficiency.

Our methods repeatedly calculate parameter estimates on data subsamples with and without regularization. To simplify the presentation, we introduce the shorthand notation in Table 1 for key operations: (i) resampling/subsampling; (ii) LASSO estimation of support sets; (iii) maximum likelihood estimation of parameters constrained to a support set; and (iv) calculation of an arbitrary error metric or optimality criterion of the analyst's choosing.

Table 1: Generic notations used throughout the paper.

Notation	Meaning	Example
$resample(\cdot)$	produce test and training	resample(data) = (train, test)
	subsamples/resamples	
$\hat{S}(\;\cdot\;;\lambda)$	compute LASSO supports	$\hat{S}(\text{train}; 0.012) = \{1, 3\}$
	for tuning hyperparameter λ	
$\hat{eta}(\cdot;S)$	compute MLE of parameter	$\hat{\beta}(\text{train}; \{1,3\}) = (6.1\ 00.76\ 0\cdots 0)^T$
	vector β constrained to a	
	specific support set S	
$e(\cdot;eta)$	compute a model-based er-	$e(\text{test}; (6.1\ 0\ 0.76\ 0\cdots 0)^T) = 153.8$
	ror metric on some data for	
	parameter value β	

The standard approach to sparse estimation using the LASSO is to select the regularization hyperparameter λ by optimizing a criterion such as goodness of fit or forecast accuracy. In other words, an analyst in practice would optimize $e\{\text{test }; \hat{\beta}^{\lambda}(\text{train})\}$ by a grid search over values of λ , where the data partitioning is employed to reduce the bias of the error estimate. If sample size is limited, the data may be repeatedly partitioned and average

error across partitions chosen as the quantity to optimize. However, we consider this to be a naive approach — optimizing fit and/or forecasts for the LASSO estimator does not, in general, produce a good estimator for the support set S, especially for vector autoregressive models [Arnold et al., 2007, Davis et al., 2016, Shojaie and Michailidis, 2010]. Due to the dense parametrization — the number of parameters DM(M+1) scales quadratically in the process dimension M and linearly in the model order D — often the model best approximating the true data-generating process is extremely sparse. If so, strong regularization is needed to accurately recover S, which induces heavy bias in the LASSO estimator. In this circumstance, the hyperparameter λ corresponding to the best estimate of S produces a poorly-fitting model that yields strongly biased predictions. We therefore consider, to start, a modification of the standard approach wherein regularization is used to determine candidate supports but the selection of an optimal model is based on unpenalized estimates. In short: optimize $e[\text{test}; \hat{\beta}\{\text{train}; \hat{S}(\text{train}; \lambda)\}]$ by a grid search instead of $e\{\text{test}; \hat{\beta}^{\lambda}(\text{train})\}$. We consider this as a benchmark method.

We propose two innovations. First we implement the 'bootstrapped LASSO' (BoLASSO) of Bach [2008], replacing the LASSO supports with the intersection of LASSO support estimates calculated from a specified number of subsamples of input data. In other words, we replace $\hat{S}(\cdot; \lambda)$ by:

$$\hat{S}_{\text{agg}}(\,\cdot\,;\boldsymbol{\lambda}) = \hat{S}(\text{resample}(\cdot);\boldsymbol{\lambda}) \cap \cdots \cap \hat{S}(\text{resample}(\cdot);\boldsymbol{\lambda})$$

However, we relax the strict intersection and instead introduce a threshold on the proportion of sets in the collection that contain a given index. Next, we propose selecting an optimal support set \hat{S}_{j}^{*} on each data partition j and aggregating the collection by returning those indices that occur in at least $100 \times \gamma\%$ of optimal supports. That is, if $\{\hat{S}_{j}^{*}\}$ are the optimal supports identified on each of the data partitions, then we take as a final estimate of S:

$$\hat{S}^* = \left\{i: J^{-1} \sum_j \mathbf{1} \big\{ i \in \hat{S}_j^* \big\} > \gamma \right\}$$

The model aggregation method is depicted in detail by the schematic in Fig. 1.

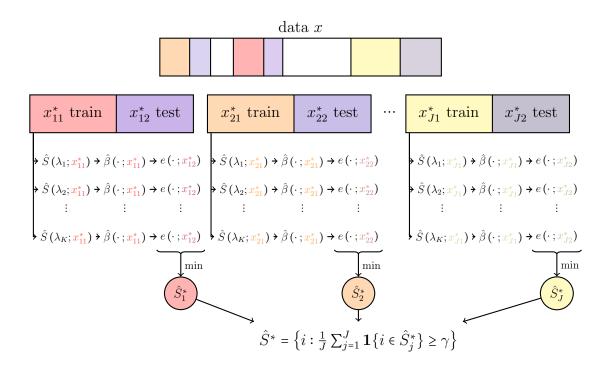


Figure 1: Schematic diagram of the model aggregation method. The functions $\hat{S}(\cdot;\cdot)$, $\hat{\beta}(\cdot;\cdot)$, and $e(\cdot;\cdot)$ are written with the order of arguments reversed to better indicate that the arrows mean passing the output of one function to the first argument of the next, e.g., $\hat{S}(\lambda_1;x_{11}^*) \to \hat{\beta}(\cdot;x_{11}^*)$ means $\hat{\beta}(\hat{S}(\lambda_1;x_{11}^*);x_{11}^*)$.

We refer to the first modification as 'support aggregation' and the second as 'model aggregation'. Both are, essentially, thresholded intersection operations – applied once to generate candidate models at the initial support estimation step and again to combine the best candidates in place of selecting a single model.

3 Simulations

We present the results of a simulation study designed to compare method performance in the context of estimating the M-dimensional Poisson GVAR(1) model:

$$X_{t,m}|X_{t-1} \stackrel{indep.}{\sim} \operatorname{Poisson}(\lambda_{t,m}), \quad m \in \{1,\dots,M\}$$

$$\log \lambda_t = \nu + AX_{t-1}$$

The parameter of interest is $A \in \mathbb{R}^{M \times M}$ and it is assumed to be s-sparse ($\|\text{vec}(A)\|_0 = sM^2$). For the study, synthetic data of length T were generated and each method was used to estimate the parameter A. The process dimension M, parametric sparsity s, and realization length T were varied systematically to generate the distinct simulation settings. At each setting, several values of the parameter A were generated, and for each distinct value, several data realizations were simulated.

Although the main objective is to compare our proposed method, the combination of support aggregation and model aggregation, with the benchmark of model selection via grid search, we also employed algorithms with each modification separately in order to assess the marginal effects of each algorithm feature. As such, four distinct estimation methods were applied to each dataset in the simulation study.

Study design

The study is a factorial design generated by three levels of process dimensions, M = 10, 15, 20, and three levels of sparsity, s = 0.01, 0.02, 0.05. For each factorial combination of sparsity and dimension, 10 different A matrices were generated. Further, for each distinct parameter matrix A three data realization lengths T = 500, 1000, 2000 were considered; 5 process

realizations of each length were simulated. In total, the number of datasets simulated is $5 \times 3 \times 10 \times 3 \times 3 = 1350$ (dataset replicates × realization lengths × parameter replicates × sparsity levels × dimensions).

Parameter generation

Poisson GVAR(1) process parameters cannot be drawn at random due to the existence of regimes in the parameter space that are either (i) unstable (unbounded means and/or variances) or (ii) unidentifiable in practice (produce data realizations containing no information about the parameters with high probability). Therefore some care is required in generating parameter values for simulating data.

In our study, parameters are generated by first simulating a stable proposal and then computing a 'recoverability' statistic to determine whether to accept proposals. Proposals are constructed by the following steps:

- 1. draw nonzero parameter magnitudes from a uniform distribution on (0,1)
- 2. allocate a sign to each parameter
- 3. fix the positions of nonzero parameters to satisfy stability constraints

To ensure that proposals are neither too difficult nor too easy to estimate, we compute an expected 'recoverability' score based on the expression for the signal-to-noise ratio in linear regression and similar to that used by Czanner et al. [2015] to quantify signal-to-noise for GLMs. We characterize parameter recoverability by the statistic:

recoverability(A, \nu; x) =
$$\frac{\text{dev}(0, \nu; x) - \text{dev}(A, \nu; x)}{\text{dev}(A, \nu; x)}$$

This statistic is the relative change in deviance attributable to the transition matrix A. (It can also be viewed as a generalization of the F-test for overall significance in regression.) We approximate its expected value by simulation: repeatedly simulate realizations using the parameters A and ν and compute the average relative change in deviance across realizations. Empirical experiments indicated a modest number (n = 10 replicates) of long (T = 100,000)

simulated realizations produces a stable estimate with relatively low variance. For our simulation study, intercepts were fixed at a constant value for each setting and proposals for A were accepted if the estimated expected recoverability was at least 0.5 but did not exceed 1.5 – that is, if the null model has an expected increase in deviance of 50%-150% relative to the true data-generating model.

Results

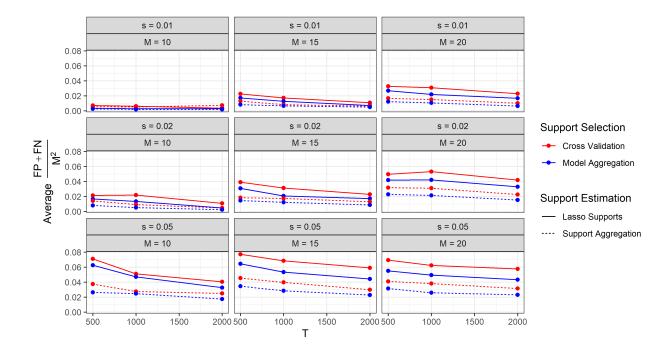


Figure 2: Average selection errors observed in simulation, reported as the average proportion of matrix entries that are incorrectly classified as zero or nonzero, for each combination of support estimation and support selection method. Average selection errors are plotted against simulated realization length. Separate panels are shown for each combination of sparsity s (row) and process dimension M (column).

Figure 2 shows the average selection error for each method — the percentage of erroneously-identified parameters in the estimated support set. Average error rates are plotted against realization length T for each combination of parameter sparsity s and process dimension M. The lowest-dimensional and sparsest case (M = 10 and s = 0.01) represents selection and estimation of a single nonzero autoregressive parameter out of a possible 100; and the

highest-dimensional and densest case (M=20 and s=0.05) represents selection and estimation of 20 nonzero parameters out of a possible 400. For all methods, the average error rates range from 0 to 10% across combinations of M, s, T, and selection errors decrease with T and increase with M and s. Only in the lowest-dimensional and sparsest setting do all methods perform equally well on average. Otherwise, support aggregation outperforms the LASSO and model aggregation outperforms model selection; the performance gaps widen as s and M increase. The combination performs favorably, maintaining a 0-2% error rate across cases. These improvements are driven largely by better control of false positive rates, as shown in Figure 3.

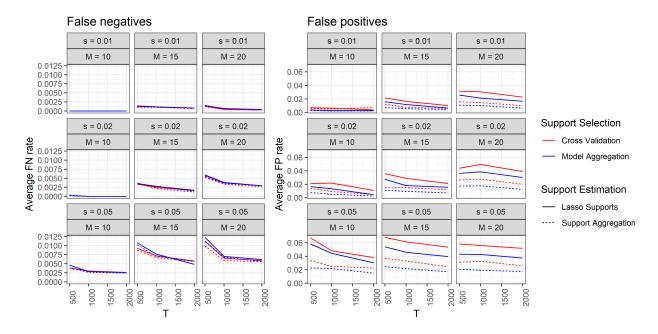


Figure 3: Average false positives (left) and false negatives (right) for each method as a function of simulated series length. Separate panels are shown for each combination of sparsity s (row) and process dimension M (column).

Figure 4 shows the marginal effect of each methodological innovation on a dataset-by-dataset basis. At left, the error rate from the support aggregation method is plotted against the error rate from the LASSO support estimation method keeping other algorithm features fixed; these comparisons are shown for every dataset generated in the simulation study and arranged in panels according to the combination of sparsity s and dimension M in the same layout as Figure 2. At right, the error rates for model aggregation are compared with those

for cross validation in the same manner. Simple regression lines are superimposed to help visualize trends, along with a y = x reference that indicates equal performance. The trends, and in fact the majority of the points themselves, are below the reference line, indicating that each innovation outperforms its benchmark independently of other algorithm features.

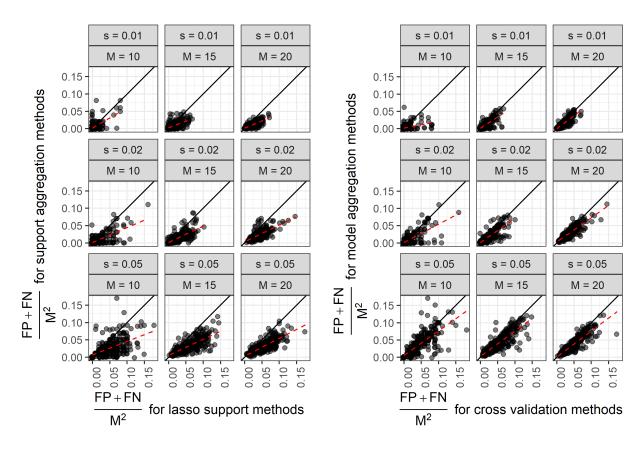


Figure 4: Marginal effect of algorithm features: support estimation method (left) and selection vs. aggregation (right). Separate panels are shown for each combination of sparsity s (row) and process dimension M (column).

4 Application

We demonstrate application of our methodology using paleoclimatology data from Barron et al. [2005b]; data are publicly available online through the World Data Service for Paleoclimatology managed by the National Centers for Environmental Information at NOAA Barron et al. [2005a]. The data are multivariate counts of individuals in eight diatom taxa

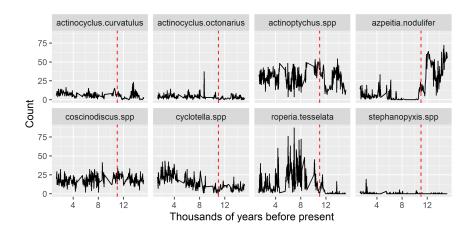


Figure 5: Counts of the numbers of individuals over time identified at the taxon level for eight diatom taxa present in marine sediment core samples from the Guayamas basin in Baja California; sea surface temperature reconstructions show a dramatic change following the end of the Pleistocene epoch, indicated by the dashed red line.

over time, shown in Fig. 5. Data were collected from samples taken at evenly-spaced depths in marine sediment cores from the Guayamas basin in Baja California; the depths sampled yield approximately homogeneous time intervals of 40-60 years between observations, and in all, the data span 16,000 years. The observation window covers the transition from the Pleistocene epoch to the Holocene epoch around 11,700 before present. Sea surface temperature reconstructions from the sampling location reflect a shift toward warmer average temperatures occurring at approximately that time.

We used our method to estimate a interaction networks describing serial interdependence between diatom taxa. By partitioning the data according to geological epoch and fitting separate models to each partition, we identified a clear and apparent change in the connectivity structure before and after the transition between geological epochs. This change was not identifiable using alternative estimation methods. We used log-linear Poisson GVAR(1) models to represent the dependence structure for each epoch and fit the two models using three methods each: a naive direct application of the LASSO; the benchmark method from our simulation study; and the aggregation method. Results are shown in Fig. 6. Due to its sparsity, only the aggregation method clearly supports the conclusion that there is a change in connectivity structure. Although there are some differences in connectivity as estimated by the alternative methods, there also remain inter-taxon links that persist across epochs

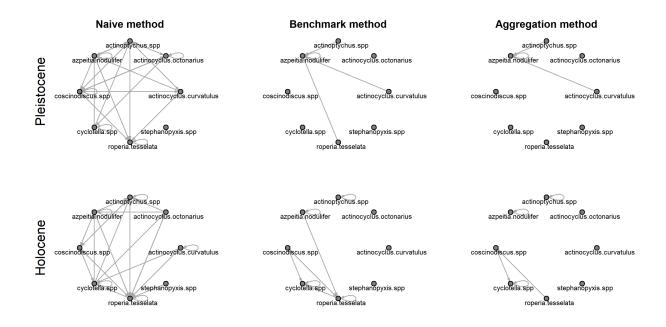


Figure 6: Interaction graphs representing inter-taxon dependencies before and after the climate change event as estimated by three methods: a 'naive' method that consists in directly applying the LASSO at left; the benchmark considered in our simulation study in center; and our proposed method at right. Only the proposed method identifies a clear and apparent change in connectivity.

that introduce ambiguity in interpreting the results; there is no such ambiguity using our method.

5 Discussion

This paper presents novel methodology for estimation of parameter supports using resampling and aggregation operations. The methodology is fully general but developed in the context of GVAR models for multivariate count-valued time series. We provide empirical validation demonstrating a consistent improvement over benchmark methods across process and parameter dimension, sparsity level, and series length or sample size; not only is there a consistent average effect, but the method outperforms alternatives for the vast majority of simulated datasets. The simulation study reveals that most of the advantage of our method lies in better control of false positive rates in estimating parameter supports. We illustrate the practical advantages of this behavior with a data analysis involving estimating ecological

interaction networks and comparing the connectivity structures for differences. While there is no ground truth in this context, the greater sparsity of estimates resulting from our method makes apparent differences in network structure that are otherwise obscured by additional parameters that reflect either errors or weak correlations.

It is worth highlighting that all of the benchmark methods we consider in our simulation study involve using maximum likelihood refits of LASSO estimates rather than the LASSO estimates themselves. Although we exclude 'raw' LASSO estimates from consideration in the simulations, we illustrate the effect of refitting in our data analysis by including the 'naive' method of direct LASSO estimation; the naive method produces a nearly-fully-dense model. Anecdotally, similar behavior was observed with simulated data in the course of developing the simulation study — the naive LASSO estimate that optimized deviance produced an unacceptably high selection error rate. Thus, the benchmarks in this paper would appear to represent a considerable improvement over the methods of Mark et al. [2017], Hall et al. [2018], Pandit et al. [2020] in the small-sample and low-dimensional setting.

The resampling and aggregation approach overcomes the problem of choosing exactly one regularization hyperparameter. However, the method still requires a good choice of regularization path at an appropriate resolution, and it introduces other hyperparameters that require some amount of tuning: the numbers of resamples and the threshold parameter for the aggregation operations. In practice, we found that these are not too challenging to specify, but do require some trial and error. We found that relatively low numbers of resamples — around 10 — were sufficient for stable performance across settings, and we cross-validated the entire estimation procedure(s) to select an optimal threshold parameter for model aggregation.

Although it is under-emphasized throughout the paper, the resampling of multiple time series can be accomplished in a number of ways. Ideally, if enough data are available, non-overlapping subsamples could be used to minimize the correlation between estimates on each subsample due to long-range dependence in the data. In our implementations, we subdivided data evenly into blocks and omitted one block at a time, concatenating the remaining data and introducing one discontinuity point across which the subsampled process is no longer stationary; the concatenated data was used for training and the held-out block was used

for testing. Thus, for our method, increasing the number of resamples taken diminishes the length of series used for validation. One might instead use a block bootstrap or a residual bootstrap method such as described by Kreiss and Lahiri [2012].

It is an important feature of our method that support sets are re-estimated across the regularization paths for each resample, rather than fixed based on a single estimate from the full dataset or some other heuristic. This is a key difference between our approach and the method by which Ruiz et al. [2020] generate and select model candidates for pooling. We found that conditioning our procedure on a fixed collection of candidate supports, although dramatically less computationally burdensome, produces a noteworthy deterioration of selection performance.

Finally, we note that the simulation of stable process realizations without artificial thresholds proved to be challenging, as there is no obvious necessary and sufficient condition on the parameters that ensures moments exist. Furthermore, some process parametrizations are extremely challenging to recover from data because the likelihood varies little across large neighborhoods with high probability. In the course of developing empirical validation of our methodology, we therefore also developed heuristics for selecting process parameters that are both stable and recoverable.

References

Andrew Arnold, Yan Liu, and Naoki Abe. Temporal causal modeling with graphical granger methods. In *Proceedings of the 13th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 66–75, 2007.

Francis R Bach. Bolasso: model consistent lasso estimation through the bootstrap. In *Proceedings of the 25th international conference on Machine learning*, pages 33–40, 2008.

Francis R Bach and Michael I Jordan. Learning graphical models for stationary time series. *IEEE transactions on signal processing*, 52(8):2189–2199, 2004.

J.A. Barron, D. Bukry, and J.L. Bischoff. High resolution guaymas basin geochemical, diatom, and silicoflagellate data. IGBP PAGES/World Data Center for Paleoclimatology,

- Data Contribution Series # 2005-022, 2005a. NOAA/NGDC Paleoclimatology Program, Boulder CO, USA.
- John A Barron, David Bukry, and Walter E Dean. Paleoceanographic history of the guaymas basin, gulf of california, during the past 15,000 years based on diatoms, silicoflagellates, and biogenic sediments. *Marine Micropaleontology*, 56(3-4):81–102, 2005b.
- Sumanta Basu, George Michailidis, et al. Regularized estimation in sparse high-dimensional time series models. *The Annals of Statistics*, 43(4):1535–1567, 2015.
- Emery N Brown, Robert E Kass, and Partha P Mitra. Multiple neural spike train data analysis: state-of-the-art and future challenges. *Nature neuroscience*, 7(5):456–461, 2004.
- David R Cox, Gudmundur Gudmundsson, Georg Lindgren, Lennart Bondesson, Erik Harsaae, Petter Laake, Katarina Juselius, and Steffen L Lauritzen. Statistical analysis of time series: Some recent developments. *Scandinavian Journal of Statistics*, pages 93–115, 1981.
- Gabriela Czanner, Sridevi V Sarma, Demba Ba, Uri T Eden, Wei Wu, Emad Eskandar, Hubert H Lim, Simona Temereanca, Wendy A Suzuki, and Emery N Brown. Measuring the signal-to-noise ratio of a neuron. *Proceedings of the National Academy of Sciences*, 112(23):7141–7146, 2015.
- Rainer Dahlhaus and Michael Eichler. Causality and graphical models in time series analysis. Oxford Statistical Science Series, pages 115–137, 2003.
- Richard A Davis, Pengfei Zang, and Tian Zheng. Sparse vector autoregressive modeling. Journal of Computational and Graphical Statistics, 25(4):1077–1096, 2016.
- Ludwig Fahrmeir and Gerhard Tutz. Multivariate Statistical Modeling Based on Generalized Linear Models. Springer-Verlag: New York, 1994.
- Jianqing Fan, Jinchi Lv, and Lei Qi. Sparse high-dimensional models in economics. *Annu. Rev. Econ*, 3:291–317, 2011.

- Konstantinos Fokianos. Multivariate count time series modelling. *Econometrics and Statistics*, 2021.
- Jerome Friedman, Trevor Hastie, Holger Höfling, and Robert Tibshirani. Pathwise coordinate optimization. *The Annals of Applied Statistics*, 1(2):302–332, 2007.
- Jerome Friedman, Trevor Hastie, and Rob Tibshirani. Regularization paths for generalized linear models via coordinate descent. *Journal of statistical software*, 33(1):1, 2010.
- Clive WJ Granger. Investigating causal relations by econometric models and cross-spectral methods. *Econometrica: journal of the Econometric Society*, pages 424–438, 1969.
- Eric C Hall, Garvesh Raskutti, and Rebecca M Willett. Learning high-dimensional generalized linear autoregressive models. *IEEE Transactions on Information Theory*, 65(4): 2401–2422, 2018.
- Fang Han, Huanran Lu, and Han Liu. A direct estimation of high dimensional stationary vector autoregressions. *Journal of Machine Learning Research*, 2015.
- Yuefeng Han, Ruey S Tsay, and Wei Biao Wu. High dimensional generalized linear models for temporal dependent data. *Bernoulli*, 29(1):105–131, 2023.
- Nan-Jung Hsu, Hung-Lin Hung, and Ya-Mei Chang. Subset selection for vector autoregressive processes using lasso. *Computational Statistics & Data Analysis*, 52(7):3645–3657, 2008.
- Dimitris Karlis. Models for multivariate count time series. *Handbook of discrete-valued time series*, pages 407–424, 2016.
- Jens-Peter Kreiss and Soumendra Nath Lahiri. Bootstrap methods for time series. In *Hand-book of statistics*, volume 30, pages 3–26. Elsevier, 2012.
- Aurélie C Lozano, Naoki Abe, Yan Liu, and Saharon Rosset. Grouped graphical granger modeling for gene expression regulatory networks discovery. *Bioinformatics*, 25(12):i110–i118, 2009.

- Ben Mark, Garvesh Raskutti, and Rebecca Willett. Network estimation via poisson autoregressive models. In 2017 IEEE 7th International Workshop on Computational Advances in Multi-Sensor Adaptive Processing (CAMSAP), pages 1–5, 2017.
- Nicolai Meinshausen and Peter Bühlmann. Stability selection. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*, 72(4):417–473, 2010.
- Parthe Pandit, Mojtaba Sahraee-Ardakan, Arash A Amini, Sundeep Rangan, and Alyson K Fletcher. Generalized autoregressive linear models for discrete high-dimensional data. IEEE Journal on Selected Areas in Information Theory, 1(3):884–896, 2020.
- Michaela Paul, Leonhard Held, and André M Toschke. Multivariate modelling of infectious disease surveillance data. *Statistics in medicine*, 27(29):6250–6267, 2008.
- Jonathan W Pillow, Jonathon Shlens, Liam Paninski, Alexander Sher, Alan M Litke, EJ Chichilnisky, and Eero P Simoncelli. Spatio-temporal correlations and visual signalling in a complete neuronal population. *Nature*, 454(7207):995–999, 2008.
- Trevor Ruiz, Sharmodeep Bhattacharyya, Mahesh Balasubramanian, and Kristofer Bouchard. Sparse and low-bias estimation of high dimensional vector autoregressive models. In *Learning for Dynamics and Control*, pages 55–64. PMLR, 2020.
- Trevor Ruiz, Sharmodeep Bhattacharyya, and Sarah C Emerson. A graphical sufficient condition for the stability of first-order log-linear poisson generalized vector autoregressive processes. Preprint available at SSRN: https://ssrn.com/abstract=4283477 or http://dx.doi.org/10.2139/ssrn.4283477, 2022.
- Ali Shojaie and George Michailidis. Discovering graphical granger causality using the truncating lasso penalty. *Bioinformatics*, 26(18):i517–i523, 2010.
- Song Song and Peter J Bickel. Large vector auto regressions. arXiv preprint arXiv:1106.3915, 2011.
- Robert Tibshirani. Regression shrinkage and selection via the lasso. *Journal of the Royal Statistical Society. Series B (Methodological)*, pages 267–288, 1996.

Pedro A Valdés-Sosa, Jose M Sánchez-Bornot, Agustín Lage-Castellanos, Mayrim Vega-Hernández, Jorge Bosch-Bayard, Lester Melie-García, and Erick Canales-Rodríguez. Estimating brain functional connectivity with sparse multivariate autoregression. *Philosophical Transactions of the Royal Society of London B: Biological Sciences*, 360(1457):969–981, 2005.

Anita J van der Kooij. Prediction accuracy and stability of regression with optimal scaling transformations. PhD thesis, Lieden University, 2007.

Hui Zou and Trevor Hastie. Regularization and variable selection via the elastic net. *Journal* of the royal statistical society: series B (statistical methodology), 67(2):301–320, 2005.

Appendix

A Algorithms

The algorithms used to produce estimates for numerical experiments and data analysis in the main body of the paper are presented in detail in this appendix. Essentially, we apply the coordinate descent method of Friedman et al. [2010] after manipulating the likelihood optimization problem into a form similar to univariate regression and partitioning coordinates into blocks for computational efficiency. The core technique is based on coordinate descent updates for the weighted least squares regression estimate with an elastic net penalty. We first present this method, with full derivations, then the approach of Friedman et al. [2010], and lastly the details of our implementation for GVAR(D) estimation.

Weighted least squares with elastic net. Consider estimation of the regression model

$$z = X\beta + \epsilon$$

where z is the response, X is the matrix of fixed covariate information, β is a vector of fixed but unknown parameters, and ϵ is a vector of uncorrelated random errors with mean zero.

The weighted least squares estimate of β is given by

$$\hat{\beta} = \operatorname{argmin}_{\beta} \left\{ \frac{1}{2} (z - X\beta)' W (z - X\beta) \right\}$$

where W is a diagonal matrix of known weights. Denote the objective function by

$$f(\beta) = \frac{1}{2}(z - X\beta)'W(z - X\beta) \tag{1}$$

The weighted least squares estimate with an elastic net penalty is obtained by adding a penalty term $P(\beta)$ to the objective function

$$\hat{\beta} = \operatorname{argmin}_{\beta} \left\{ \frac{1}{2} (z - X\beta)' W (z - X\beta) + \lambda P(\beta) \right\}$$
 (2)

where $P(\beta) = \frac{1-\alpha}{2} \|\beta\|_2^2 + \alpha \|\beta\|_1$ and λ is a hyperparameter that controls the strength of the penalty. The hyperparameter α controls the relative balance of the L_2 (ridge) and L_1 (LASSO) terms in the penalty.

The coordinate descent approach to computing $\hat{\beta}$ in Equation (2) is to iteratively minimize the objective function in each β_j conditional on the current values of the other parameters β_k for $k \neq j$ until convergence. Each iteration can be accomplished by a simple update rule that can be equivalently derived by a number of approaches [Zou and Hastie, 2005, van der Kooij, 2007, Friedman et al., 2007, 2010]. Here the rule is derived from the update given by Newton's method.

For the purpose of taking derivatives in β_j , the first portion of the objective function $f(\beta)$ can be rewritten as

$$f(\beta) = \frac{1}{2} \left(z - \sum_{k \neq j} x_k \beta_k - x_j \beta_j \right)' W \left(z - \sum_{k \neq j} x_k \beta_k - x_j \beta_j \right)$$

where x_j denotes the jth column of X. The first and second partial derivatives of this portion with respect to β_j are

$$\frac{\partial}{\partial \beta_j} f(\beta) = -\left(z - \sum_{k \neq j} x_k \beta_k - x_j \beta_j\right)' W x_j$$

$$= \beta_j x_j' W x_j - \left(z - \sum_{k \neq j} x_k \beta_k\right)' W x_j$$

$$= \beta_j x_j' W x_j - \left(z - z^{(j)}\right)' W x_j$$

$$\frac{\partial^2}{\partial^2 \beta_j} f(\beta) = x_j' W x_j$$

where $z^{(j)}$ denotes $\sum_{k\neq j} x_k \beta_k$. The quantity $(z-z^{(j)})$ is known as the jth partial residual.

Now, the derivatives of the penalty portion of the objective function are

$$\frac{\partial}{\partial \beta_{j}} \left(\lambda \frac{1 - \alpha}{2} \|\beta\|_{2}^{2} + \lambda \alpha \|\beta\|_{1} \right) = \lambda (1 - \alpha) \beta_{j} + \lambda \alpha \frac{\partial}{\partial \beta_{j}} |\beta_{j}|$$

$$= \begin{cases} \lambda (1 - \alpha) \beta_{j} + \lambda \alpha &, \text{ if } \beta_{j} > 0 \\ \lambda (1 - \alpha) \beta_{j} - \lambda \alpha &, \text{ if } \beta_{j} < 0 \\ \lambda (1 - \alpha) \beta_{j} + \lambda \alpha \partial |\beta_{j}| &, \text{ if } \beta_{j} = 0 \end{cases}$$

$$\frac{\partial^{2}}{\partial^{2} \beta_{j}} \left(\lambda \frac{1 - \alpha}{2} \|\beta\|_{2}^{2} + \lambda \alpha \|\beta\|_{1} \right) = \lambda (1 - \alpha)$$

where $\partial |\beta_j|$ denotes a subgradient. Supposing the current estimate is $\hat{\beta}^{(k)}$, the Newton update for minimization in the *j*th coordinate is

$$\hat{\beta}_{j}^{(k+1)} \longleftarrow \hat{\beta}_{j}^{(k)} - \frac{\frac{\partial}{\partial \beta_{j}} \left(f(\beta) + \lambda P(\beta) \right) \big|_{\beta = \hat{\beta}^{(k)}}}{\frac{\partial^{2}}{\partial^{2} \beta_{j}} \left(f(\beta) + \lambda P(\beta) \right) \big|_{\beta = \hat{\beta}^{(k)}}}$$
(3)

When articulated casewise according to whether $\hat{\beta}_{j}^{(k)} > 0$ or $\hat{\beta}_{j}^{(k)} < 0$ or $\hat{\beta}_{j}^{(k)} = 0$, Equation (3) gives the update rule (after minor algebraic simplification)

$$\hat{\beta}_{j}^{(k+1)} \longleftarrow \begin{cases} \frac{(z-z^{(j)})'Wx_{j}-\lambda\alpha}{x'_{j}Wx_{j}+\lambda(1-\alpha)} &, \text{ if } \hat{\beta}_{j}^{(k)} > 0\\ \frac{(z-z^{(j)})'Wx_{j}+\lambda\alpha}{x'_{j}Wx_{j}+\lambda(1-\alpha)} &, \text{ if } \hat{\beta}_{j}^{(k)} < 0\\ \frac{(z-z^{(j)})'Wx_{j}-\lambda\alpha c}{x'_{j}Wx_{j}+\lambda(1-\alpha)} &, \text{ if } \hat{\beta}_{j}^{(k)} = 0 \end{cases}$$

where $c \in [-1,1]$. Now if $|(z-z^{(j)})'Wx_j| \leq \lambda \alpha$, the (sub)gradient in Equation (3) is not a descent direction, and in this case, the optimal value of the objective function is achieved by setting $\hat{\beta}_j^{(k+1)}$ to zero. Rewriting the conditions in terms of $(z-z^{(j)})'Wx_j$ and dropping the iteration count k yields the update rule

$$\hat{\beta}_{j} \longleftarrow \begin{cases} \frac{(z-z^{(j)})'Wx_{j}-\lambda\alpha}{x'_{j}Wx_{j}+\lambda(1-\alpha)} &, \text{ if } (z-z^{(j)})'Wx_{j}>0 \text{ and } |(z-z^{(j)})'Wx_{j}|>\lambda\alpha\\ \frac{(z-z^{(j)})'Wx_{j}+\lambda\alpha}{x'_{j}Wx_{j}+\lambda(1-\alpha)} &, \text{ if } (z-z^{(j)})'Wx_{j}<0 \text{ and } |(z-z^{(j)})'Wx_{j}|>\lambda\alpha\\ 0 &, \text{ if } \text{ and } |(z-z^{(j)})'Wx_{j}|\leq\lambda\alpha \end{cases}$$

Finally, the update can be re-expressed in terms of the soft-threshold function

$$S(x,y) = sign(x)(|x| - y)_{+} = \begin{cases} x - y & \text{, if } x > 0 \text{ and } |x| > y \\ x + y & \text{, if } x < 0 \text{ and } |x| > y \\ 0 & \text{, if } |x| \le y \end{cases}$$

compactly as the coordinate update

$$\hat{\beta}_j \longleftarrow \frac{S\left(\left(z - z^{(j)}\right)' W x_j, \lambda \alpha\right)}{x_j' W x_j + \lambda(1 - \alpha)}$$

The coordinate descent algorithm using this update rule and a gradient norm stopping criterion is given as Algorithm A.1.

Algorithm A.1 Coordinate descent algorithm for computing the weighted least squares estimate with an elastic net penalty.

Require:

```
Data z, X; hyperparameters \lambda, \alpha; and convergence threshold \delta Initialize \hat{\beta}

while \|\nabla f(\hat{\beta})\|_2 > \delta do

for j = 1, ..., J do

z^{(j)} \longleftarrow \sum_{k \neq j} x_k \hat{\beta}_k
\hat{\beta}_j \longleftarrow \frac{S\left((z-z^{(j)})'Wx_j, \lambda\alpha\right)}{x'_j Wx_j + \lambda(1-\alpha)}
end for end while

Ensure: \hat{\beta}
```

Penalized IRLS for univariate generalized linear models. Consider the univariate generalized linear model: a response vector y and covariate information X where

$$y_i \stackrel{indep.}{\sim} p(\cdot; \theta_i)$$
 and $g(\mathbb{E}y) = g(\mu) = \eta = X\beta$

where p is an exponential family density of the form

$$p(y_i; \theta_i) \propto \exp\left\{\frac{y_i \theta_i - b(\theta_i)}{a(\phi_i)}\right\}$$

Assume that g is the canonical link function that results from equating $\eta = \theta$. The log-likelihood as a function of the linear predictor η is, up to a constant,

$$\ell(\eta; x, y) = \sum_{i=1}^{n} \left(\frac{y_i \eta_i - b(\eta_i)}{a(\phi_i)} \right)$$

The classical technique for unpenalized maximum likelihood estimation maximizes $\ell(\eta; x, y)$ iteratively by:

- 1. computing an approximation $\tilde{\ell}$ to the log-likelihood from current estimates;
- 2. maximizing the approximation $\tilde{\ell}$ to get new estimates;
- 3. repeating 1 2 until the estimates converge.

Conveniently, the approximation $-\tilde{\ell}$ takes the form of the loss function for a weighted least squares problem for which a closed form solution is available, which eases calculations in step 2.

Consider now computing the penalized MLE

$$\hat{\beta} = \operatorname{argmin}_{\beta} \left\{ -\ell(\eta; x, y) + \lambda P(\beta) \right\} \tag{4}$$

The same strategy for unpenalized estimation is applicable with the penalty, though generally iterative methods will replace closed form solutions for the optimization step (step 2). The objective function $-\ell(\eta; x, y) + \lambda P(\beta)$ can be approximated by the loss function for a penalized weighted least squares problem. For the elastic net penalty, the approximation can be maximized with respect to β via Algorithm A.1. The penalized MLE in Equation (4) with the elastic net penalty can therefore be found iteratively by:

- 1. computing the approximation $-\tilde{\ell}(\eta; x, y) + \lambda P(\beta)$ to the (negative) penalized log-likelihood from current estimates;
- 2. maximizing the approximation $-\tilde{\ell}(\eta; x, y) + \lambda P(\beta)$ with respect to one coordinate via the update rule in Algorithm A.1 to get new estimates;

3. repeating 1 - 2 for each coordinate and cycling through the coordinates until the estimates converge.

This procedure is given as Algorithm A.2.

Algorithm A.2 Coordinatewise IRLS algorithm for estimation of generalized linear models with an elastic net penalty.

```
Require: data x, y; hyperparameters \lambda, \alpha; convergence threshold \delta
Initialize \hat{\beta}
while \|\nabla \ell(\hat{\eta}; x, y)\|_2 > \delta do
for j = 1, ..., J do
W \longleftarrow (\operatorname{diag}(g'(\hat{\mu}))^{-1}
z \longleftarrow x\hat{\beta} - (y - \hat{\mu})W^{-1}
z^{(j)} \longleftarrow \sum_{k \neq j} x_k \hat{\beta}_k
\hat{\beta}_j \longleftarrow \frac{S((z-z^{(j)})'W_{x_j}, \lambda\alpha)}{x'_j W_{x_j} + \lambda(1-\alpha)}
end for end while
Ensure: \hat{\beta}
```

The update rules for z and W in Algorithm A.2 are derived from a Taylor expansion around current estimates. Let $\hat{\eta}$ denote the linear predictor from the current estimates $\hat{\beta}$, $\ell(\eta)$ denote the log-likelihood (suppressing the data arguments), v and W denote the gradient and Hessian of $\ell(\eta)$. A second-order Taylor expansion of the log-likelihood about $\hat{\eta}$ gives

$$\ell(\eta) \approx \ell(\hat{\eta}) + (\eta - \hat{\eta})'\ell'(\hat{\eta}) - \frac{1}{2}(\eta - \hat{\eta})'\ell''(\hat{\eta})(\eta - \hat{\eta})$$

$$= C + (\eta - \hat{\eta})'\ell'(\hat{\eta}) - \frac{1}{2}(\eta - \hat{\eta})'\ell''(\hat{\eta})(\eta - \hat{\eta})$$

$$= C + (\eta - \hat{\eta})'v - \frac{1}{2}(\eta - \hat{\eta})'W(\eta - \hat{\eta})$$

$$= C^* - \frac{1}{2}(\eta - \hat{\eta} - vW^{-1})'W(\eta - \hat{\eta} - vW^{-1})$$

$$= C^* - \frac{1}{2}(\eta - z)'W(\eta - z)$$

with $z = \hat{\eta} - vW^{-1}$. Now W and z depend on the current estimates and can be derived in

general for any GLM. Since by hypothesis $\mu_i = b'(\theta_i) = g^{-1}(\eta_i)$,

$$\frac{\partial \ell}{\partial \eta_i} = \left(\frac{y_i - b'(\theta_i)}{a_i(\phi)}\right) \frac{\partial \theta_i}{\partial \eta_i}
= \left(\frac{y_i - b'(\theta_i)}{a_i(\phi)}\right) \frac{\partial \theta_i}{\partial \mu_i} \frac{\partial \mu_i}{\partial \eta_i}
= \left(\frac{y_i - b'(\theta_i)}{a_i(\phi)}\right) \frac{1}{g'(\mu_i)} \frac{1}{b''(\theta_i)}
= (y_i - \mu_i) (a_i(\phi)g'(\mu_i)b''(\theta_i))^{-1}$$

When $a_i(\phi) = 1$ and g is the canonical link, $g'(\mu_i) = \frac{\partial \eta_i}{\partial \mu_i}$ and $b''(\theta_i) = \frac{\partial \mu_i}{\partial \theta_i}$, so

$$\frac{\partial \ell}{\partial \eta_i} = y_i - \mu_i$$

and

$$\frac{\partial^2 \ell}{\partial \eta_i \partial \eta_j} = \begin{cases} -\frac{1}{g'(\mu_i)} & i = j \\ 0 & i \neq j \end{cases}$$

So $W = \text{diag}(1/g'(\mu))$ and $v = (y_1 - \mu_1 \cdots y_N - \mu_N)$. Therefore, given current estimates, updating the approximation amounts to computing

$$z = X'\hat{\beta} - (y - \hat{\mu})W^{-1} \tag{5}$$

$$W = \left(g'(\hat{\mu})\right)^{-1} \tag{6}$$

Equations (5) and (6) give the updates that appear in the outer while loop of Algorithm A.2.

GVAR(D) estimation. Algorithm A.2 can be modified for efficient estimation of GVAR(D) models with an elastic net penalty using a blockwise update strategy for the inner while loop.

The GVAR(D) model for data $\{x_t \in \mathbb{R}^M\}_{t=0}^T$ is the random process $\{X_t \in \mathbb{R}^M\}_{t=0}^T$ characterized by the conditional mean structure

$$g(\mathbb{E}(X_t \mid X_{t-1} = x_{t-1}, \dots, X_{t-D} = x_{t-D})) = \nu + \sum_{d=1}^{D} A_d x_{t-d}$$

under the assumption that for each m = 1, ..., M and each t

$$X_{t,m} \mid X_{t-1} = x_{t-1}, \dots, X_{t-D} = x_{t-D} \stackrel{indep.}{\sim} p \left(\cdot \mid \theta_{t,m} = \nu_m + \sum_{d=1}^{D} a'_{d,m} x_{t-d} \right)$$

where $p(\cdot|\theta)$ is an exponential family density and g is the canonical link so that $\eta_{t,m} = \theta_{t,m} = g(\mu_{t,m}) = \mathbb{E}(X_{t,m}|X_{t-1},\ldots,X_{t-D})$. Denoting the data by $X = (X_0 \cdots X_T)$ log-likelihood by $\ell(B;X)$, the penalized maximum likelihood estimate of B is

$$\hat{B} = \arg\min_{B} \left\{ -\ell(B; X) + \lambda P(B) \right\}$$

where the explicit form of the likelihood depends only on the underlying density p. Here let P be the elastic net penalty applied only to the elements of A_1, \ldots, A_D

$$P(B) = \frac{1-\alpha}{2} \sum_{d,i,j} a_{dij}^2 + \alpha \sum_{d,i,j} |a_{dij}|$$

An iterative estimation algorithm based on Algorithm A.2 is derived below by vectorizing the problem and developing a blockwise update strategy.

The GVAR(D) model can be expressed as a multivariate generalized regression model

$$g(\mathbb{E}(Y|U)) = g(\mu) = \eta = UB$$

expressed in terms of Y, U, B where

$$Y = \begin{bmatrix} X'_T \\ X'_{T-1} \\ \vdots \\ X'_D \end{bmatrix} \quad U = \begin{bmatrix} 1 & X'_{T-1} & \cdots & X'_{T-D} \\ 1 & X'_{T-2} & \cdots & X'_{T-D-1} \\ \vdots & \vdots & \ddots & \vdots \\ 1 & X'_{D-1} & \cdots & X'_0 \end{bmatrix} \quad B = \begin{bmatrix} \nu' \\ A'_1 \\ \vdots \\ A'_D \end{bmatrix}$$

The core model relationship can be expressed in univariate terms by applying the vectorization transformations

$$\mathcal{Y} \stackrel{\text{def}}{=} \text{vec} Y$$
, $\mathcal{X} \stackrel{\text{def}}{=} U \otimes I_M$, and $\beta \stackrel{\text{def}}{=} \text{vec} B$

with the result

where $x_m = (x_{0,m} \cdots x_{T,m})'$ denote the univariate series in each component so that

$$g(\mathbb{E}(\mathcal{Y}|\mathcal{X})) = g(\text{vec}(\mu)) = \text{vec}(\eta) = \mathcal{X}\beta$$

It is straightforward to verify by inspection that if the elements of \mathcal{Y} are assumed to be Poisson conditional on \mathcal{X} with the corresponding mean, the likelihoods of β and B are identical, *i.e.*,

$$\ell(\beta; \mathcal{Y}, \mathcal{X}) = \ell(B; Y, U)$$

since the likelihood contributions from each $x_{t,m}$ are exactly the same. Therefore, the estimate \hat{B} can be recovered from the estimate

$$\hat{\beta} = \operatorname{argmin}_{\beta} \left\{ -\ell(\beta; \mathcal{Y}, \mathcal{X}) + \lambda P^*(\beta) \right\}$$

where $P^*(\beta) = P(B)$.

Due to the sparsity pattern in \mathcal{X} , the computations involved in the update rule for the lth coordinate in the vectorized problem can be articulated as operations involving only U and columns of Y. Specifically, denoting the row and column dimensions of U as N = T - D and P = DM+1 and the row and column dimensions of \mathcal{X} as K = NM and L = M(DM+1), direct application of the calculations for the coordinate update for the lth position in Algorithm A.2 to the vectorized problem in terms of \mathcal{Y}, \mathcal{X} gives

$$(\mathcal{Z} - \mathcal{Z}^{(l)})' \mathcal{W} \mathcal{X}_l = (x_m - x_m^{(p)})' W_m u_p$$
$$\mathcal{X}_l' \mathcal{W} \mathcal{X}_l = u_p' W_m u_p$$

where \mathcal{Z} is the working response vector, \mathcal{W} is the diagonal matrix of update weights, and the index transformation is given by

$$(n,m) = \left(k \bmod M + M \mathbb{1}\{k \bmod M = 0\}, \frac{k - k \bmod M}{M} + \mathbb{1}\{k = k \bmod M\}\right)$$
$$(p,m) = \left(k \bmod P + P \mathbb{1}\{k \bmod P = 0\}, \frac{k - k \bmod M}{P} + \mathbb{1}\{k = k \bmod P\}\right)$$

Note that the computation of $x_{mn}^{(p)} = \sum_{j\neq p} u_{nj} b_{jm}$ depends only on the *m*th column of *B*.

Consequently, a more efficient strategy is to divide the coordinate iterations into blocks corresponding to the blocks of B and compute the update rules using data stored in the formats specified by U and Y. A slight ridge penalty is included for numerical stability. This is given as Algorithm A.3 and that which is used in the simulation experiments and data analyses presented in the main paper.

Algorithm A.3 Coordinatewise IRLS algorithm for computing LASSO GVAR(D) estimates with blockwise updates.

```
Require:
```

```
Data Y, U, hyperparameters \lambda, \alpha, and convergence threshold \delta Initialize \hat{B}

while \|\nabla \ell(\hat{B}; X)\|_2 > \delta do

for m = 1, ..., M do

for p = 1, ..., DM + 1 do

W_m \longleftarrow (\operatorname{diag}(g'(\hat{\mu}_m))^{-1}

z_m \longleftarrow U\hat{b}_m - (x_m - \hat{\mu}_m)W_m^{-1}

z_{mn}^{(p)} \longleftarrow \sum_{j \neq p} u_{nj}\hat{b}_{jm} for n = 1, ..., N

\hat{b}_{pm} \longleftarrow \begin{cases} \frac{(z_m - z_m^{(p)})'W_m u_p}{u_p'W_m u_p} & \text{, if } p = 1 \\ \frac{S\left((z_m - z_m^{(p)})'W_m u_p, \lambda\alpha\right)}{u_p'W_m u_p + \lambda(1 - \alpha)} & \text{, if } p > 1 \end{cases}

end for end for end while

Ensure: \hat{B}
```