

# A Review on Classification of White Blood Cells Using Machine Learning Models

# Rabia Asghar, Sanjay Kumar, Arslan Shaukat

National University of Sciences and Technology (NUST), Islamabad, Pakistan rabiaasghar82@yahoo.com, chowdhry.sanjay@yahoo.com, arslanshaukat@ceme.nust.edu.pk
Corresponding Author: rabiaasghar82@yahoo.com

ABSTRACT The machine learning (ML) and deep learning (DL) models contribute to exceptional medical image analysis improvement. The models enhance the prediction and improve the accuracy by prediction and classification. It helps the hematologist to diagnose the blood cancer and brain tumor based on calculations and facts. This review focuses on an in-depth analysis of modern techniques applied in the domain of medical image analysis of white blood cell classification. For this review, the methodologies are discussed that have used blood smear images, magnetic resonance imaging (MRI), X-rays, and similar medical imaging domains. The main impact of this review is to present a detailed analysis of machine learning techniques applied for the classification of white blood cells (WBCs). This analysis provides valuable insight, such as the most widely used techniques and best-performing white blood cell classification methods. It was found that in recent decades researchers have been using ML and DL for white blood cell classification, but there are still some challenges. 1) Availability of the dataset is the main challenge, and it could be resolved using data augmentation techniques. 2) Medical training of researchers is recommended to help them understand the structure of white blood cells and select appropriate classification models. 3) Advanced DL networks such as Generative Adversarial Networks, R-CNN, Fast R-CNN, and faster R-CNN can also be used in future techniques.

**INDEX TERMS** Subtypes of White Blood Cells, Convolutional Neural Networks, Classification, Feature Extraction, Deep Learning, Autoimmune Diseases

# I. INTRODUCTION

White blood cells play a vital role in the human body's immune system. They identify and neutralize pathogens such as bacteria, viruses, and cancer cells. The classification of WBCs helps to diagnose and treat various diseases and medical conditions [1]. Machine learning techniques, both traditional and deep, have become widely adopted for different applications, including medical image analysis (MIA). MIA is critical in modern healthcare systems, aiding medical professionals in making well-informed decisions. It can diagnose various diseases, including brain tumors, lung cancer, anemia, leukemia, and malaria, using different image modalities like MRI, CT-Scans, Ultrasounds, PET, Blood Smear images, and hybrid modalities [2]. In medical image analysis (MIA), these image modalities are essential for analyzing and classifying hard and soft tissues in various body organs for diagnostic and research purposes [3]. It has attracted the attention of computer vision experts, where traditional and deep machine learning techniques have been applied in leukocyte segmentation, cancer detection, classification, medical image annotation, and image retrieval in computer-aided diagnosis (CAD) and computer-aided detection (CAD). The efficacy of these methods directly influences the clinical diagnosis and treatment, emphasizing the significance of technological advancements, such as high-speed computational resources and improved hardware and storage capabilities, for computer-aided diagnosis (CAD) [4-5]. One of the main application areas for CAD systems using traditional machine learning and deep learning for the segmentation and classification of leukocytes. Leukocytes provide valuable information to medical professionals, aiding in diagnosing various blood-related issues, including AIDS and blood cancer (leukemia). The goal of medical image analysis is to assist medical experts, doctors, hematologists, pathologists, and radiologists in the diagnosis of different diseases.

The changes in the count of white blood cells (WBCs) and their morphological alterations, for instance variations in size, shape, and color observed in blood smear images, can provide valuable insights into various health disorders [6-9].

1



The blood cells are categorized into three major types: white blood cells (leukocytes), red blood cells (erythrocytes), and platelets (thrombocytes). Leukocytes are subdivided into five types: monocytes, lymphocytes, neutrophils, basophils, and eosinophils, as shown in Fig.1. In the last twenty years, significant advancements have been made in traditional ML and DL methods for the classification and segmentation of WBCs in microscopic blood smear images. Conventional methods depend on manually analyzing these images, which is tedious and error-prone. As a result, the development of automated and computeraided systems has become crucial in clinical diagnosis and effective treatment. Automated analysis of WBCs in blood smear images can significantly reduce the workload of hematologists and provide fast, accurate, and efficient results to assist medical professionals in the diagnostic process [10-13]. There are two main methods to achieving automated WBC classification in blood smear images: traditional machine learning (ML) and deep learning (DL) techniques. These techniques have the potential to make medical hematology more efficient. The generalized overview of machine learning and deep learning techniques used to classify WBCs is depicted in Fig.2. Various computer-aided systems can automatically diagnose different types of hematic diseases, for example AIDS and blood cancer, by analyzing leukocytes. The traditional machine learning process involves interconnected steps such as segmenting the region of interest and extracting the features, followed by optimal classification [14-16]. The feature extraction phase in traditional machine learning methods is challenging and directly impacts the classification performance. Nowadays, deep learning approaches are highly used because of their high performance and are less complicated than machine learning. Advanced deep learning methods with transfer learning have further improved the implementation of automated systems for the classification of WBCs. This research reviews ML and DL techniques applied to blood smear images to classify white blood cells. A detailed study on MIA using deep learning and machine learning is already in focus, but there is still a gap in classifying white blood cells. This paper aims to address the gap by comprehensively analyzing machine learning and deep learning-based techniques for five types of white blood cell classification. The proposed work has the following contributions.

- ·This paper identifies and provides a thorough analysis of ML and DL models to classify white blood cells.
- · Performance of ML and DL methods are discussed, and their applications in clinical practice are investigated. For the future work the challenges and limitations of the models are discussed.

Section II presents the review methodology used in this study. In Section III, the dataset is explained in detail. Section IV discusses the significance of medical imaging techniques, divided into two subsections: Traditional Machine Learning and Deep Learning. Moving on, Section V reviews and highlights the limitations of previous studies and discusses the challenges faced. Section VI outlines the future directions for research in this field. Lastly, Section VII concludes the study and comprehensively discusses the findings.

## II. REVIEW METHODOLOGY

This review section discusses in detail the use of digital libraries during the research process.

The research done throughout the years to classify white blood cells is shown in Fig.3. The traditional machine learning (ML) and deep learning (DL) methodologies are discussed separately because there is clear evidence of the difference between these two methods. The researchers started from the conventional methods but, with time, shifted towards the deep learning models due to their promising performance. Deep learning methodologies have grown exponentially recently, specifically in leucocyte classification in blood smear images. In the last few decades, white blood cell (WBC) classification using deep learning models are delivering exceptional results.

A well-organized and planned process was essential to find the targeted literature which satisfies the search criteria and to use the existing resources [16]. In this review paper, we incorporated the most advanced and related research articles based on manual and automatic searches to fetch the significant content.

The approach starts by identifying the research questions. The two research questions (RQ) in the area of interest of this research are (i) How have systems been developed for the grouping of WBCs based on ML and DL? (ii) What are the applications of traditional machine learning and deep learning methods for effectively classifying WBCs in blood smear images? The keywords were extracted from RQs, as represented in Table 1.

**Table 1:** Keywords for searching databases

Blood Cells						
Leukocytes	A1	White blood cells	A2			
classification		detection				
White blood cells	A3	White blood cells	A4			
classification		segmentation				
Machine Learning						



Machine learning	B1	Deep learning	B2
Big data	B3	Artificial Intelligence	<b>B</b> 4

The next phase after identifying RQs is extracting relevant data by automatically searching electronic databases based on extracted keywords from RQs. The recent articles published from 2006 to 2023 are included in the proposed survey. Research articles were searched in significant repositories such as IEEE and Google Scholar. As we can see from Fig.4, most articles were taken from IEEE journals; some were taken from Springer and Elsevier journals, while few were taken from Hindawi, Wiley, and others. The inclusion and exclusion criteria depicted in Table 2.

Table 2: Inclusion and Exclusion Criteria for Proposed Research

#### **Inclusion Criteria**

Only English-language articles are included in the survey.

Most relevant articles to the topic are incorporated in the survey.

The articles having the better results and methodology are included in the survey.

# **Exclusion Criteria**

Articles other than English language articles are excluded.

Irrelevant articles are excluded.


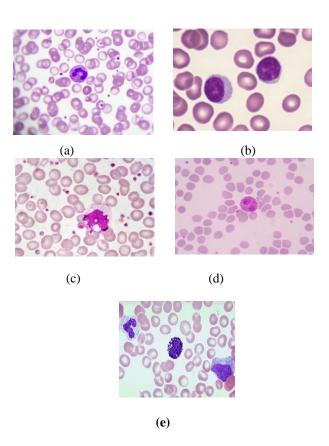


Figure 1: Categories of white blood cells (a) Neutrophils (b) Lymphocytes (c) Monocytes (d) Eosinophils (e) Basophils

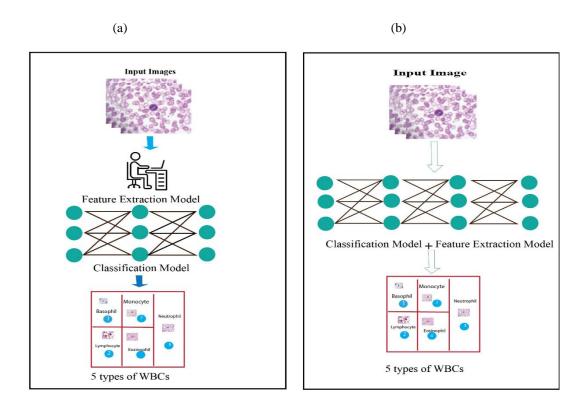

Many research articles were collected during the review on the classification of leukocytes, and an in-depth quality assessment of articles were performed to select the best papers. Quality assessment of a research paper is critical in assessing a research article's consistency, validity, and overall credibility. The quality assessment was performed by considering various aspects such as topic relevancy, having impactful methodology and advanced machine learning models used, dataset collection and data analysis, clarity and consistency of the results presented in the articles, journal reputation, and highly cited papers.



**Figure 2:** Neutrophils classification in blood images (a) Traditional machine learning model (b) Advanced deep learning model



Figure 3. Year-wise no. of research publications for white blood cell classification






Figure 4: Comprehensive Journal Analysis

#### III. Datasets

**Dataset** 

White blood cell datasets used by different authors have different sources and different number of images. Some datasets were collected for other purposes but used by various authors in the WBC classification process. A list of datasets used is listed in table 3 with the number of images.

Table 3 White blood cell datasets

No of Images

2	110 of Images			
ALL-IDB [56]	130			
Private Dataset [59]	70			
CellaVision [64]	100			
AA-IDB2 [65]	108			
Hayatabad Medical Dataset [67]	1030			
Isfahan Al-Zahra and Omid hospital [68]	312			
Private Dataset [71]	167/264			
ALL-IDB2/ Leishman stained peripheral blood smears [76]	160/160			
CellaVision [78]	450			
Public Dataset [83]	92800			
BCCD [84]	12444			
Kaggle [85]	12444			
BCCD [87]	12500			
BCCD [89]	375			
Kaggle/LISC [90]	12500/400			
LISC and BCCD [92]	6250			
Jiangxi Tecom Science Corporation/ CellaVision/ Bsisc/ LISC [93]	300/ 100/ 268/ 257			
KMC hospital, Manipal, India [94]	280			
ALL-IDB[99]	108			
Hybrid-Leukocyte database/ e Hybrid-Slide database [100]	891/ 377			
Acquired from Sixth People's Hospital of Shenzhen [102]	21			
Kaggle [103]	12,494			
SMC-IDB/ IUMS-IDB/ ALL-IDB [106]	367/ 195/ 108			
BCCD [108]	12447			
SBILab [111]	76			
BCCD [115]	2487			
Kaggle [118]	12444			



#### IV. SIGNIFICANCE OF MEDICAL IMAGING TECHNIQUE

Medical imaging analysis (MIA) is the procedure that can provide visual data about the organs in the body. It can help and provide sufficient information to radiologists and medical professionals. Through medical imaging, doctors can treat their patients efficiently. Medical imaging includes many modalities like X-rays, CT scans, MRIs, and microscopic blood smear images. These images are vital because doctors can automatically detect the disease with the help of these medical images.

**A.** White Blood Cell Classification Using TML Many studies have utilized traditional machine learning methods to classify WBCs. The most relevant studies have been included in this survey that have reported results correctly.

# i) Preprocessing-based techniques

Rosyadi et al. [17] presented research using optical microscopic to generate images of blood samples as a dataset. They obtained feature values from all images and applied K-means clustering for the classification. This research classified white blood cells, neutrophils, lymphocytes, monocytes, and eosinophils subtypes. The method consists of four stages: image preprocessing, segmentation, feature extraction, and classification. In the first phase of image preprocessing, images were transformed from RGB to grayscale and binary images. After that, in the second phase, resizing, cropping, and edge detection were applied. Five geometrical features were considered in the feature extraction phase: normalized area, solidity, eccentricity, circularity, and normalized perimeter. Then classification was performed using K mean clustering.

Furthermore, in this research, the focus was to analyze each feature for accuracy. After experimentation, it was concluded that the circularity feature was the most significant because it achieved 67% accuracy, which was the highest. The eccentricity feature had the lowest accuracy of up to 43 percent. So, they concluded that selecting features is more important than several features.

Gautam et al. [18] suggest a technique that started with preprocessing of microscopic images. Preprocessing involved the conversion of RGB images to grayscale, contrast stretching, and histogram equalization. After that, they applied segmentation through Otsu's thresholding method. Then geometrical features were extracted, such as perimeter, area, eccentricity, and circularity. Then Naïve bayes classifier was used for classification with the maximum likelihood method. They achieved an accuracy of 80.88%.

S.S. Savkare et al. [19] presented an alternative method for segmenting blood cells. The process started with preprocessing, using the median and Laplacian filters to enhance the image quality. After preprocessing, images were transformed from RGB to HSV. Then K-mean clustering was applied for segmentation of blood cells. Furthermore, they used morphological operation and watershed algorithm to refine the result to separate each cell. The proposed method through K-mean clustering produced satisfactory results.

## ii) Techniques with a focus on feature extraction

Usually, to assess the immune system of a patient's white blood cells, a differential counting method is used. This method involves using a flow cytometer and fluorescent markers, which could disturb the cell because of repetitive sample preparation. Apart from this method, Label-Free is a much better approach that uses an imaging flow cytometer and ML algorithms to classify unstained WBCs. It attained an impressive average F1-score of 97% along B and T subtypes, and each type is unique with an F1 score of 78%, i.e., impossible in earlier methods [20].

J. J. P. Tsai et al. proposed a multi-class SVM was used to hierarchical identify and categorize blood cell images. During this process, segmentation was employed on digital images to fetch geometric features from each segment, enabling the identification and classification of different types of blood cells [21]. The experiment demonstrated that utilizing hierarchical multi class support vector machine (SVM) classification led to improve. The experimental outcomes were compared with manual results, revealing that the intended method outperformed the manual classification of different blood cells. The research article [22] presented a model that combines image processing (IP) and machine learning (ML) techniques for the classification of WBCs. The proposed technique employed different IP algorithms for WBC segmentation and machine learning methods for categorization. Subsequently, shape-based features and deep features were utilized to describe the WBCs. For classification, a long-short-term memory (LSTM) model was applied. A dataset involves 349 blood images was used for type with 10-fold cross-validation, and from these images, 35 geometric and statistical features were extracted for training and testing purposes. Six ML techniques (decision tree classifier, Random Forest, K-Nearest Neighbor, Multinomial Logistic Regression, Naïve Bayes, and SVM) were used to categorize white blood cells, and their performance of techniques was compared in [23]. Using shape-based features, an accuracy of 80% was achieved, while deep features achieved 82.9% accuracy. When both are used 85.7% accuracy was obtained. To assess the algorithm's performance, five types of data was prepared for both training and testing purposes, resulting in 100 different combinations for each dataset. The result analysis showed that Multinomial Logistic Regression (MLR) gave the highest precision rate of 95%. After MLR, Random Forest



performed best in classifying the leukocyte cells. Moreover, it was concluded that different methods could enhance performance, such as bagging, bootstrapping, or boosting.

Huang et al. [24] presented a technique for white blood cell segmentation. Their motive was to help hematologists in white blood cell classification. They divided their research into several portions: nucleus segmentation and recognition, feature extraction, and classification. In nucleus segmentation, leukocyte nucleus enhancer (LNE) was used to enhance the contrast of nucleus colors. After implementing the LNE process, multiple levels of Otsu's thresholding were applied, effectively preserving only the leukocytes and suppressing other cell types. Then in the feature extraction phase, a gray-level co-occurrence matrix was employed in which 80 texture features were extracted. Subsequently, they incorporated shape-based features, including compactness and roughness. After the previous stage, they obtained a significant feature set. However, to reduce feature dimensions, they employed Principal Component Analysis (PCA). Classification was achieved using a genetic-based parameter selector (GBPS) with 50-time cross-validation. The study concluded that the proposed genetic algorithm was better for WBC classification compared to K-means clustering.

Yampri et al. [25] also proposed a technique for sub-classifying white blood cells. They used blood images as input and segmented out the WBC. Automatic thresholding was applied to segregate the nucleus and cytoplasm of cells, and then features were extracted. Eigen cells were used to remove parts by applying the following steps: conversion of cell image to vector, computation of mean and covariance of vector, and then computed eigen values and eigen vectors. Principle component analysis (PCA) was then used to transform the high dimension of eigen space to lower dimension space. They were able to achieve 92% of accuracy.

#### iii) Techniques with a focus on classification

A three-phased ML method was proposed for the better classification of WBCs. The process was divided into three phases, i.e., to find the nuclei and cytoplasm, extracting features, and classification. A novel process was designed to segment the whole nucleus regarding this segregation. Segmentation of cytoplasm involves location detection inside the convex region. In the next portion, four unique colors and three shapes features were extracted, and finally, in the last part, the SVM model was used for WBCs classification. The results of this model showed 94.20% accuracy with the BCCD data set, 92.21% with LISC data, and 94.65% with Raabin data sets of WBCs. But it is important to note that only Raabin-WBC sets solved the hyperparameter issues [26].

An innovative "Computer-aided diagnosis system" method was proposed to diagnose blood from its microscopic images. This process utilized white blood cell images at the microscopic level by using a hybrid approach. In this hybrid system, CNN was employed as a features extractor. The performance of these classifiers was measured and evaluated to identify the best one among them. Random Forest (RF) outperformed other classifiers with 98.7% accuracy [27].

The binary bat algorithm [28] is an improved form of the Binary Bat algorithm inspired by echolocation techniques used by bats. Using OBBA, the dataset's dimensionality was reduced by eliminating at least 11 similar features. Then four classifiers, KNN, Logistic Regression, RF, and DT, were applied to the dataset to classify the WBCs, and then their performances were compared. OBBA demonstrated remarkable performance, achieving an average accuracy of 97.3%. This surpassed other optimizers like the Optimized Crow Search Algorithm (OCSA), which attained an accuracy of 92.77%, and the Optimized Cuttlefish Algorithm (OCFA), with an accuracy of 95.17%. Lee [29] proposed an innovative technique of image segmentation based on grey-level thresholding. It was found that the cell-type specific reaction of the cells produces adequate evidence to allow classification to a precise rate. This method was tested on a dataset comprising 1149 white blood cells from 13 altered, clinically significant categories. These cells were randomly selected from 20 blood smears obtained from leukemia patients. Sorting these cells on the base of quantitative amounts in the segmented images produces an accuracy of 82.6%.

# **B.** Deep Neural Network Techniques

Many researchers have also proposed deep learning-based methods for classifying WBCs besides traditional machine learning techniques. Wibawa et al. [30] proposed a model for classifying two types of WBCs. They compared the results with three conventional machine learning methods. Those traditional methods used support vector machines and used nine features for classification. The comparison with earlier studies established that deep learning significantly surpasses conventional ML methods, achieving a remarkable accuracy of 95.5%.

Toğaçar [31] introduced a WBC classification approach based on the coefficient and Ridge feature selection method. This study utilized a CNN model with GoogleNet and ResNet50 for feature extraction. They achieved 97.95% accuracy in the classification and counting of WBCs. A convolutional neural network (CNN) was employed to identify and classify each



segmented WBC image as granular or non-granular. Subsequently, granular cells were further categorized into Eosinophils and Neutrophils, while non-granular cells were classified into Lymphocytes and Monocytes [32]. To enhance the dataset's robustness, augmentation approaches were implemented, resulting in improved accuracy for both binary and multiclassification of blood cell subtypes. They were able to achieve 98.51 % precision for the WBCs classification, and 97.7 % precision was achieved for subtypes classification.

The study involved the examination of four human blood samples using an Image flow cytometer. Two models were used to identify eight white blood cells, while the other two samples were for identifying eosinophils. The ML models were applied to both datasets to classify the human blood cells with 5-fold cross validation. Random Forest (RF) and Gradient Boosting (GB) were used for the first model, and for the second model, deep learning CNN architecture: ResNet and DeepFlow (DF) were employed for testing [33]. On the white blood cells dataset, the results demonstrate a balanced accuracy of 0.778 and 0.70, while on eosinophil data set showed a balanced accuracy of 0.871 and 0.856. The GB and RF classifiers demonstrated similar performance, with GB surpassing on the EOS dataset. For the WBC dataset, their precisions were 0.774 and 0.778, respectively, while for the EOS dataset, they achieved 0.825 and 0.871. Additionally, the DF outperformed the RN architecture on the WBC dataset, attaining a balanced accuracy of 0.703 compared to RN's 0.649.

Rawat et al. [34] introduced another deep learning method employing the DenseNet121 model for the classification of various types of white blood cells. The proposed model was estimated, with an accuracy of 98.84%. The results indicated that the DenseNet121 model with a batch size of 8 performed the best among all. The dataset, consisting of 12,444 images, was obtained from Kaggle. Nazlibilek et al. [35] proposed a highly effective DL-based method that leveraged image variation operations and generative adversarial networks (GAN) for accurately classifying white blood cells into five distinct types.

Sadeghian et al. [36] presented an advanced method to classify microscopic images into distinct types with high precision. In this study, they used the BCCD dataset, which is a downscaled blood cell detection dataset. Before feeding the dataset into proposed model, they subjected it to several procedures, such as division and augmentation. The model consisted of two stages: an initial alteration using a pre-trained model, followed by the integration of a ML classifier. They achieved a precision of 97.03%.

Macawile [37] introduced an effective automated approach for the identification of WBCs using DL techniques. The goal was to generate a binary mask for segmentation while simultaneously recognizing and classifying each image as a nucleus or cytoplasm. The findings were positive and revealed that the recommended technique enhanced efficiency and speed compared to the current manual method. They achieved an accuracy rate of 95.73%.

An imaging flow cytometry (IFC) automated system was proposed using ML strategy with deep learning (DL) approach to categorize cell cycle phases accurately. Two sample sets were stained to identify resting and active eosinophils, and two were stained to identify eight kinds of white blood cells. The accuracy of classical ML and DL was 0.778 and 0.703, respectively. The research findings indicated that stain-free images can effectively categorize cell types using all four classifiers. The study employed EOS and WBC datasets with well-established models trained on expert-driven traits. Notably, the 2-DCNN classifier demonstrated greater performance in WBC classification, particularly for low-quality datasets. In the BCCD dataset, Inception-V3 exhibited the lowest performance, achieving average precision, recall, and F1 scores of 40.1% [38].

The classification of platelets was addressed using image processing techniques. The proposed approach effectively handled the confusion arising from the similarity between large and normal platelets, resulting in a significant improvement in platelets classification accuracy from 82.6% to 98.8%. Enhanced Incremental Training, a novel approach for training deep neural networks (DNN), was recommended for classifying white blood cells. The proposed approach addresses the issue of automatic identification and handling of classes that cause confusion and negatively impact neural network predictions. By implementing this technique, the organizing accuracy and macro-average precision were significantly improved, increasing from 61.5% to 95% [39]. Togacar et al. [40] introduced a highly efficient computer-aided automated method for rapid detection and identification of white blood cell types in blood images. By utilizing Regional-Based Helixal Neural Networks, blood cells were identified and classified. The literature indicated that deep learning was superior to conventional image-processing approaches. The classification of lymphocyte cell types was 99.52% accurate.

Another method was proposed for identifying and classifying blood cells based on CNN. The research introduced two different approaches for white blood cell classification. The initial method utilized a CNN with transfer learning, where pre-trained weight parameters were applied to the images. In contrast, the second method employed SVM for the classification process. The classification results achieved 98.4% accuracy of CNN, and the accuracy of the SVM was 90.6%. The proposed technology improved the overall efficiency of the classification process [41].



M. Toğaçar et al. [42], suggested a framework for the identification of blood cells. The RCNN used the microscopic blood smear image for the experiment. X. Yao et al. [43] proposed another CNN-based method for identifying and classifying white blood cells. CNN used an optimizer to adjust parameters like learning rate based on the efficient net. The optimizer is used according to the change of loss and accuracy. The proposed model shown outstanding performance with high speed, achieving a 90% accuracy on a large dataset.

Khosrosereshki et al. [44] introduced an R-CNN-based model to identify the neutrophils, eosinophils, monocytes, and lymphocytes; two models were used. The first was Faster RCNN, and the second one was Yolov4. The study compared the classification accuracy of two models, Faster RCNN and Yolov4, and found that Faster RCNN obtained an accuracy of 96.25%. Notably, the one-stage model Yolov4 outperformed the two-stage model, Faster RCNN, with an accuracy of over 95%, indicating its superior performance. This technology improves the overall efficiency of the whole classification process.

Another deep-learning approach was presented to classify white and red blood cells [45]. The study utilized the Inception Recurrent Residual Convolutional Neural Network (IRRCNN) as a deep learning model for the task. The proposed IRRCNN is an advanced hybrid deep CNN architecture is based on residual networks, and RCNN. The model achieved remarkable accuracy in the experiments, with a 100% accuracy rate for classifying WBCs and 99.94% accuracy for RBCs. When this model was compared with other deep learning methods, it was found that performance had improved by 1.4% and 2.35%.

The proposed method uses PatternNet with Convolutional Neural Networks (CNNs) to classify WBCs. It effectively combines multiple models for improved accuracy and robustness. The ensemble model performed well in accuracy, precision, and specificity even during noisy data and had low computational costs. The proposed system was straightforward and adaptable, easily used for large datasets [46]. A CNN-based model with an optimized 33-layer network architecture [47] was proposed. It achieved an accuracy rate of 77.65%.

In their study [48] introduced an advanced algorithm that integrated deep learning features with artificial features. They utilized a DL model based on transfer learning. The proposed approach achieved an accuracy of 99.28%. A two-stage hybrid multilevel method was proposed in [49] for the efficient classification of WBCs. In the initial stage, they utilized a R-CNN network to find the regions containing white blood cells. The proposed CNN model achieved precision of 98.4%.

Agaian et al. [50] introduced a method based on a deep learning convolutional neural network (CNN) model. LISC and BCCD datasets were used in the proposed work. The results demonstrated a classification accuracy of 99.2%.

Deep learning-based technique was proposed to categorize blood samples [51]. The method utilized a convolutional neural network (CNN) for the classification process. The proposed approach for WBC classification involved several steps. With CNN models the achieved accuracy was 94.42%.

Tantikitti [52] proposed a model to classify WBCs into granular and non-granular types. The dataset was enhanced using robustness and augmentation techniques, improving accuracy in binary and multi-classification of blood cell types. The WBC classification achieved a precision of 88.51% for the test set, while the subtypes achieved 97.7% for the test set.

The classification of WBCs through CNN is quite helpful, but its cost of implementation is high [53]. So, in the proposed work, a hybrid method was presented for classifying WBC Leukemia. Initially, different features were extracted using VGGNet. Subsequently, these features were filtered using the Salp Swarm Algorithm (SSA) to remove noisy features. The proposed method was tested on two datasets, demonstrating high accuracy and reduced computational complexity. Salp Swarm Algorithm effectively selected 1000 features out of 25000 extracted by VGGNet, resulting in improved performance.

The comparison was made between the traditional method of classifying white blood cells and deep learning techniques [54]. Neural Networks, autoencoders, and CNN were used to classify the WBC through deep learning approaches. Popular WBC detection methods are recognized and presented in Table 4-8. The methods are divided into detection methodologies and combinations of ML and DL models—figure 5 shows country-wise contribution in the relevant research domain. Figure 6 shows the most commonly used white blood cell classification techniques.

After reviewing various articles presented in this literature, in general, the detection of white blood cells through traditional method focusses more on segmenting the cells after preprocessing the data. The segmented data used for feature extraction in white blood cell classification. Through this, the traditional method had better results because the identification of white blood cells is impossible without segmenting. This gives a higher accuracy, as shown in Table 2-4. The researcher used various



methods for segmenting the dataset and obtaining different results in classification. The traditional way reaches much higher accuracy, almost 99%. But the accuracy was low with larger datasets. Deep learning models are much better for more extensive datasets and have higher accuracy results. The deep learning techniques in Table 6 represent various methods applied to different datasets, each achieving extra accuracy. The significant difference in accuracy is based on the deep learning models applied. Some authors also implement the combination of different datasets. The authors used this technique to find the accuracy of their models on unknown datasets.

Deep learning models have been a significant breakthrough in various domains and have achieved impressive results in tasks. Machine learning constantly evolves, and researchers explore new techniques to improve performance. The authors contributed through multiple methods, and with time, this will enhance the performance of the models. As you see in this literature, the starting phase of traditional machine learning models is shifted toward deep learning models. But the deep learning models are now more mature and solving more complex problems with higher accuracy. There is a clear gap in using the latest advancements in deep learning, like transfer knowledge and the Meta-learning process. Apart from this, the authors focused on the same kind of datasets; one should collect new datasets based on the latest techniques and use them for their research.

Table4: WBCs nuclei detection in blood smear images

Author	Year	Method	Accuracy	Specificity	Sensitivity
Safuan et al. [55]	2018	Otsu thresholding	98.87%	96.87	99.10
		and watershed marker			
Huang et al. [56]	2012	Otsu thresholding	98%	-	-
Danyali et al. [57]	2015	Fuzzy divergence threshold	98%		
Manik et al. [58]		Adaptive thresholding	98.9%		
Li et al. [59]	2016	Dual thresholding	97.85%		
Wang et al. [60]	2106	Spectral and morphologic	90%		
Negm et al. [61]		K-mean clustering	99.157%	0.9952	0.99348
Khosroseresliki et al. [62]	2017	Simple thresholding	93.75%	-	-
Bouchet et al. [63]	2019	Fuzzy set algorithm	99.32%	-	-
Jha et al. [64]	2019	Hybrid model based on Mutual	98.7%	0.98	0.98
		Information			

Table 5: SVM for leucocytes classification

Author	Year	Method	Accuracy	Sensitivity	Specificity
Duan et al. [65]	2019	SVM	98.3%	-	-
Sajjad et al. [66]	2016	Support Vector Machine	98.6%	0.962	0.985
Amin et al.	2015	K-mean and	97%	84.3	97.3



[67]		SVM			
Again et al. [68]	2018	Support Vector Machine	94%	0.9577	0.9787

Table 6: Exploring Diverse Models in Blood Smear Images

Author	Year	Method	Accuracy	Sensitivity	Specificity
Gautam et al. [69]	2016	Naïve Bayesian classifier	80.88%	-	-
Tantikitti et al. [70]	2015	Decision Tree	92.2%	-	
Rawat et al. [71]	2017	PCA-SVM	94.6%	0.97	0.88
Shaikhina et al. [72]	2019	Decision Tree and Random Forest classifier	85%	81.8	88.9
Abdeldaim et al. [73]	2018	K-NN	98.6%	-	-
Mathur et al. [74]	2013	Naïve Bayesian Classifier	92.72%	0.90	-

Table 7: ANN used for WBCs classification

Author	Year	Method	Accuracy	Sensitivity	Specificity
Hegde et al. [75]	2019	ANN	99%	99.4	0.9918
Manik et al. [76]	2016	ANN	98.9%	-	-
Su MC et al. [77]	2014	ANN	99.11%	0.973	0.982
Lee et al. [78]	2014	Hybrid Neural Network based Classifier	91%	-	-
Rawat et al. [79]	2018	K-Means, ensemble artificial neural network (EANN)	95%	-	-
Nazlibilek et al. [80]	2014	Neural Network Classifier	95%	-	-
Sadeghian et al. [81]	2009	ANN	78%	-	-

Table 8: Different deep learning models for leukocytes classification

Author	Year	Method	Accuracy	Sensitivity	Specificity
M. J. Macawile et al. [82]	2018	AlexNet	96.63%	98.85%	99.61%
G. Liang et al. [83]	2018	CNN + RNN	91%	-	-



M. Sharma et al. 84	2019	CNN	97%	94%	98%
M. Togacar et al. [85]	2019	CNN	97.78%	-	-
E.H. Mohamed et al. [86]	2020	Pre-trained Deep Learning Models	97.03%	0.71	0.91
B. Ergen et al. [87]	2020	CNN, Feature Selection	97.95%	98	97.75
C. Zhao et al. [88]	2021	TWO-DCNN	96%	-	-
A. Cinar et al. [89]	2021	Alexnet- GoogleNet-SVM	99.73%, 98.23%	98.75	-
Wang et al. [90]	2019	CNN Architecture SSD and YOLOv3	90.09%	-	-
Kutlu et al. [91]	2020	R-CNN	97.52	88.90	-
Fan et al. [92]	2019	ResNet50	98%	-	-
Hegde et al. [93]	2019	Pre-train AlexNet model	98.9%	98.6%	98.7
Acevedo et al. [94]	2019	Pre train convolutional neural network	96.2%	-	-
Qin et al. [95]	2018	Deep Residual Learning	76.84%	-	-
Tiwari et al. [96]	2018	Double CNN model	97%	83%	-
Hung et al. [97]	2017	AlexNet and Fast R CNN Model	72%	-	-
Naz S. et al. [98]	2017	CNN, faster R CNN	94.71%	95.42	99.27
Vogado et al. [99]	2018	CNN model with support vector machine	99.20%	99.2	-
Habibzadeh et al. [100]	2018	ResNet and Inception	99.46%	99.89	-
Song et al. [101]	2014	CNN	94.50%	87.26	-
Fatih et al. [102]	2019	MRMR feature selection -ELM and CNN	97.37%	-	-
Rehman et al. [103]	2018	Deep CNN	97.78%	-	-
Bani-Hani et al. [104]	2018	CNN with the optimized genetic method	91%	91	97
Di Ruberto et al. [105]	2020	Pre trained AlexNet	97.93	99.6	-
Loey et al. [106]	2020	Pre trained CNN AlexNet	100%	100	98.2



Ma et al. [107]	2020	Generative Adversarial	91.7%	92%	-
		Network and			
		residual neural			
		network			
Baydilli et al. [108]	2020	Capsule Networks	96.86%	92.5	98.6
Tobias et al. [109]	2020	Faster Residual Neural Network	83.25%	-	-
Kassani et al. [110]	2019	Hybrid DL based model	96.17%	95.17	98.58
N.Baghel et al. [111]	2022	CNN	98.51%	98.4	-
A. Shahzad et al. [112]	2022	CNN	98.44%	99.96	99.98
C. Cheuque et al. [113]	2022	Multilevel CNN	98.4%	98.3	-
M. Hosseini et al. [114]	2022	Convolutional Neural Network	97%	94	98
K.Ramya et al. [115]	2022	CNN-PSO	99.2%	94.56	98.78
A.A.Khalil et al. [116]	2022	CNN	98%	-	-
S. Sharma et al. [117]	2022	DenseNet121	98.84%	98.85%	99.61

Table 9: Comparative Analysis

Author	Year		No of Images	Method	Accuracy
N.Baghel et al. [111]	2022	Private dataset	-	CNN	98.51%
C. Cheuque et al. [113]	2022	Private dataset	-	Multilevel CNN	98.4%
K.Ramya et al. [115]	2022	Merged LISC and BCCD	-	CNN-PSO	99.2%
S. Sharma et al. [117]	2022	Kaggle	12444	DenseNet121	98.84%
Riaz et al. [132]	2023	Catholic University of Korea /Public dataset	5000	deep convolutional generative adversarial network	99.9%
Mosabbir et al. [133]	2023	National Institutes of Health (NIH) dataset	27,558	CNN	97.92%
Tusneem et al. [134]		AML Cytomorphology LMU	18,365	CNN	99.7%%
Kakumani et al. [135]	2023	Kaggle	12515	Pre-trained inception v3	99.76%

The comparative analysis of deep learning models applied to different datasets reveals remarkable achievements in accuracy across various studies in Table 9. N. Baghel et al. [112] demonstrated the high effectiveness of Convolutional Neural Network (CNN), achieving an accuracy of 98.51%. Riaz et al. [132] used a Convolutional Generative Adversarial Network (GAN). They obtained with a accuracy of 99.9% on the Catholic University of Korea dataset. Mosabbir et al. [134] addressed the



challenging National Institutes of Health (NIH) dataset using CNN and achieved remarkable results, attaining an accuracy of 97.92%. Tusneem et al. [134] also used CNN and demonstrated its strength with an outstanding accuracy of 99.7%. Kakumani et al. [136] utilized a pre-trained InceptionV3 model on the Kaggle dataset and achieved an outstanding accuracy of 99.76%.

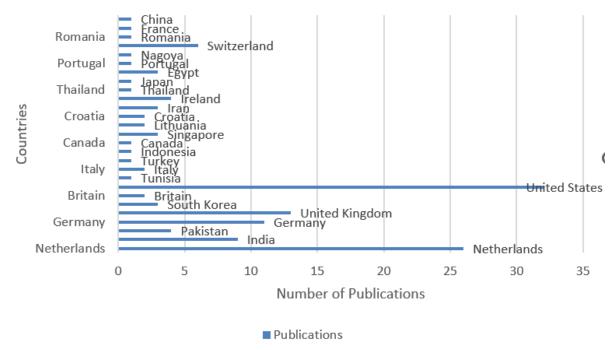


Figure 5. Country wise research publications

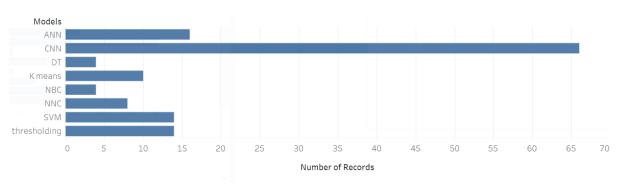


Figure 6. Commonly used model for blood cell classification



#### V. REVIEW AND LIMITATIONS OF PREVIOUS STUDIES AND CHALLENGES

Researchers have made significant contributions to classifying white blood cells in recent years. Most researchers have used three parameters for performance evaluation: accuracy, sensitivity, and specificity. Accuracy represents the proportion of correct predictions, sensitivity shows the rate of true positives (TP) classified by the model, while specificity shows the percentage of true negatives (TN) accurately identified by the system. These parameters are computed by using equations (1-3).

$$Accuracy = \frac{TP + TN}{TP + TN + FP + FN} \tag{1}$$

Sensitivity = 
$$\frac{TP}{TP+FN}$$
 (2)

Specificity = 
$$\frac{TN}{TN+FP}$$
 (3)

TP and TN represent correctly classified true positive and true negative samples, while FP and FN show incorrectly classified false positive and false negative instances. Among all techniques based on SVM, Sajjad et al. [66] achieved maximum accuracy, sensitivity, and specificity of 98.6%, 96.2%, and 98.5%. Using KNN, Abdeldaim et al. [73] achieved maximum accuracy of 98.6%. They were similarly, using ANN, Hegde et al. [75] produced accuracy, sensitivity, and specificity of 99%, 99.4%, and 99.18%. Using DL methods, Loey et al. achieved maximum precision and sensitivity of 100% each and specificity of 98.2%; However, many researchers achieved maximum performance, but still, there were some limitations and constraints of previous techniques. In this detailed literature analysis, we identified the essential requirements and conditions for future studies and the main benefits of TML and DL approaches [118]. The research community, however, faces several fundamental obstacles that must be accepted and resolved. In the field of MIA, some challenges include the lack of easily accessible, large, high-quality datasets, a shortage of dedicated medical professionals, and the complexity of Transfer Learning and Deep Learning methods. Several DML strategies mathematical and theoretical foundations are also the source of challenges [118-119]. Unsupervised or semi-supervised systems are needed to address these issues [120]. TML and DL-based MIA applications and systems still have significant work to adopt in real-time practice.

#### A. Lack of publicly accessible data sets

The lack of publicly accessible datasets is the main issue in medical image analysis. Scientists need to inspire health organizations to address this problem, researchers may find it convenient if high-quality data is available to the public. Initiatives promoting open data availability from various health organizations worldwide should also be encouraged. However, authorization should also be required (e.g., hospital data and conditional access to datasets). When data is readily available in large quantities, just like in other fields, the issue becomes more relevant for research (e.g., video summarization [121], IoT [122], energy management [123], and so on). Acquiring massive, high-quality datasets with accurate labeling is crucial for MIA applications.

## B. Generalization skills for trained predictors

The main challenge with MIA and leucocyte identification and classification is to train a predictor. A perfect learning method that balances computational efficiency with generalization capacity is needed to solve this issue. To build a model with impressive generalization capabilities, a learning approach that incorporates true or random labels is necessary. This approach provides efficient training algorithms and practical tools to handle available datasets using accurate or arbitrary labels. Many MIA tasks, including identifying brain tumors, lung cancer, breast cancer, and leucocytes, have shown significant empirical success. Despite the inherent challenges posed by non-convex optimization, basic techniques such as stochastic gradient descent (SGD) can efficiently discover viable solutions, effectively minimizing training errors. More interestingly, the networks created in this manner have strong generalization capabilities [124], even when there are far more parameters than training data [125]. Only reducing the training error during model training is insufficient. The choice of global minima greatly impacts the generalization behavior of the predictor. It is crucial to select the appropriate algorithm to minimize training error for better results. Different initialization, update, learning rate, and halting conditions for optimization algorithms will result in global minima with various degrees of generalizability.

# C. Reliable methods for real-world scenarios

TML and DL approaches are dependable for real-world health diagnosis systems [126], but developing accurate MIA and leucocyte classification models demands expertise and technical proficiency. In the future, researchers must investigate such accurate and reliable procedures that can be used in real-world healthcare situations without the necessity for medical specialists.



#### VI. FUTURE DIRECTIONS FOR RESEARCH

The biomedical engineering and research community should dedicate substantial effort to support MIA, particularly leukocyte examination in blood images, due to the significant challenges faced by the MIA community, as detailed in section V.

#### A. Data augmentation methods to complete the dataset deficit

This work addresses the issue of limited dataset availability in MIA and leucocyte classification. We present data augmentation approach and leverage transfer learning algorithms to enhance the identification of WBCs.

# B. Technical skills and medical experience required

TML and DL models have shown significant potential for computer-aided MIA-based diagnostic applications, and popular open source frameworks like TensorFlow, Caffe, and Keras offer access to these advanced models [127]. Developing effective machine learning models for medical image analysis (MIA) requires careful consideration and expertise in the clinical and medical domains. It is essential to choose and train the suitable model to achieve accurate and reliable results in MIA applications.

# C. Resource-aware DL models for classifying leukocytes

Medical Image Analysis (MIA) with the adoption of advanced DL models like GANs, R-CNN, Fast R-CNN, and faster R-CNN, along with the integration of TML and DL methods. These models have shown superior performance in tasks like brain tumor detection, leukocyte classification, breast cancer diagnosis, and various other MIA applications. However, their biggest concerns are the significant memory needs and computational costs. Therefore, it is necessary to investigate the computationally and environmentally friendly TML and DL models for leukocyte analysis in blood images.

# D. Models for the detection and classification of leukocytes

DNNs provide a superior alternative to conventional learning techniques. The end-to-end models, especially CNNs, stems from their efficient process and the capability to classify leucocytes into five classes [128]. These models compete with complex MIA models built on DNN based on data-driven learning methodologies. WBC detection and categorization in images can also be accomplished using a variety of end-to-end designs [129-131].

# E. TML AND DL universal evaluation in MIA

The MIA research community often relies on subjective evaluation methods, which can be challenging, inefficient, and prone to errors. Therefore, comprehensive evaluation techniques that can automatically assess the effectiveness of Traditional Machine Learning (TML) and Deep Learning (DL) models for MIA from various views.

#### VII. CONCLUSION AND DISCUSSION

This work provides a comprehensive review of the TML and DL techniques applied to WBCs classification. We thoroughly explored and compared various methods for WBC categorization in this context. The data for this research is compiled from 135 primary papers published between 2006 and 2023. These papers encompass TML and DL methodologies for leukocyte classification and their applications in medical diagnosis. The comprehensive analysis of these studies reveals the significant contributions of TML and DL techniques to Medical Image Analysis (MIA). The main objective of this work is to discover and highlight various TML and DL applications in MIA, particularly in the domain of leucocyte classification in blood smear images. This research aims to provide valuable insights into the complex characteristics of Traditional Machine Learning (TML) and Deep Learning (DL) in Medical Image Analysis (MIA) by thoroughly analyzing existing literature. The study's results emphasize the importance of conducting more research on using Traditional Machine Learning (TML) and Deep Learning (DL) methods effectively in Medical Image Analysis (MIA) and classifying leucocytes in blood smear images. Besides leucocyte classification, this study explored applications for advanced DL models. Collecting all these data in this study will help the research industry by indicating where they should focus their future investigation of TML and DL models for MIA. These methods have the potential to lead to significant advancements in speech analysis, natural language processing (NLP), and medical imaging in the future. In addition to WBCs, TML and DL approaches are employed to identify and categorize various MIA domains, such as the analysis of MRI, CT, X-ray, and ultrasound images. Blood smear images are a growing field in MIA that has drawn attention from the research community over the past three decades. This paper discusses the expected contributions and uses of TML and DL in MIA. Additionally, we recognized the problems, instructions, and solutions for the developments of TML and DL models in MIA, notably for classifying WBCs in blood smear images. The potential of TML and DL approaches will be used to expand our research to include different MIA domains, including MRI, CT, Ultrasound, and X-ray images.

#### References



- [1] P. Pandey, S. Pallavi, and S. C. Pandey, "Pragmatic medical image analysis and deep learning: An emerging trend," in Advancement of Machine Intelligence in Interactive Medical Image Analysis. Singapore: Springer, Jan. 2020, pp. 1–18. [Online]. Available: http://www.springer.com/series/16171,doi: 10.1007/978-981-15-1100-4 1.
- [2] S. Asgari Taghanaki, K. Abhishek, J. P. Cohen, J. Cohen-Adad, and G. Hamarneh, "Deep semantic segmentation of natural and medical images: A review," Artif. Intell. Rev., vol. 4, pp. 1–42, Jun. 2020.
- [3] M. Rahman, S. Antani, and G. Thoma, "A learning-based similarity fusion and filtering approach for biomedical image retrieval using SVM classification and relevance feedback," IEEE Trans. Inf. Technol. Biomed., vol. 15, no. 4, pp. 640–646, Jul. 2011.
- [4] H. P. Chan, L. M. Hadjiiski, and R. K. Samala, "Computer-aided diagnosis in the era of deep learning," Med. Phys., vol. 47, no. 5, pp. e218–e227, 2020.
- [5] M. R. Mohebian, H. R. Marateb, M. Mansourian, M. A. Mañanas, and F. Mokarian, "A hybrid computer-aided-diagnosis system for prediction of breast cancer recurrence (HPBCR) using optimized ensemble learning," Comput. Struct. Biotechnol. J., vol. 15, pp. 75–85, Jan. 2017.
- [6] M. Sajjad, S. Khan, M. Shoaib, H. Ali, Z. Jan, K. Muhammad, and I. Mehmood, "Computer aided system for leukocytes classification and segmentation in blood smear images," in Proc. Int. Conf. Frontiers Inf.Technol. (FIT), Dec. 2016, pp. 99–104.
- [7] N. S. M. Raja, S. L. Fernandes, N. Dey, S. C. Satapathy, and V. Rajinikanth, "Contrast enhanced medical MRI evaluation using tsallis entropy and region growing segmentation," J. Ambient Intell. Humanized Comput., vol. 2018, pp. 1–12, May 2018.
- [8] Y. Duan, J. Wang, M. Hu, M. Zhou, Q. Li, L. Sun, S. Qiu, and Y. Wang, "Leukocyte classification based on spatial and spectral features of microscopic hyperspectral images," Opt. Laser Technol., vol. 112, pp. 530–538, Apr. 2019.
- [9] H. Cao, H. Liu, and E. Song, "A novel algorithm for segmentation of leukocytes in peripheral blood," Biomed. Signal Process. Control, vol. 45, pp. 10–21, Aug. 2018.
- [10] E. Abdulhay, M. A. Mohammed, D. A. Ibrahim, N. Arunkumar, and V. Venkatraman, "Computer aided solution for automatic segmenting and measurements of blood leucocytes using static microscope images," J. Med. Syst., vol. 42, no. 4, p. 58, Apr. 2018.
- [11] L. Wang, S. Yang, S. Yang, C. Zhao, G. Tian, Y. Gao, Y. Chen, and Y. Lu, "Automatic thyroid nodule recognition and diagnosis in ultrasound imaging with the YOLOv2 neural network," World J. Surg. Oncol., vol. 17, no. 1, pp. 1–9, Dec. 2019.
- [12] R. B. Hegde, K. Prasad, H. Hebbar, and B. M. K. Singh, "Comparison of traditional image processing and deep learning approaches for classification of white blood cells in peripheral blood smear images," Biocyber. Biomed. Eng., vol. 39, no. 2, pp. 382–392, Apr. 2019.
- [13] M. Sajjad, S. Khan, K. Muhammad, W. Wu, A. Ullah, and S. W. Baik, "Multi-grade brain tumor classification using deep CNN with extensive data augmentation," J. Comput. Sci., vol. 30, pp. 174–182, Jan. 2019.
- [14] H. Kutlu, E. Avci, and F. Özyurt, "White blood cells detection and classification based on regional convolutional neural networks," Med. Hypotheses, vol. 135, Feb. 2020, Art. no. 109472.
- [15] M. Sajjad, S. Khan, Z. Jan, K. Muhammad, H. Moon, J. T. Kwak, S. Rho, S. W. Baik, and I. Mehmood, "Leukocytes classification and segmentation in microscopic blood smear: A resource-aware healthcare service in smart cities," IEEE Access, vol. 5, pp. 3475–3489, 2017.
- [16] F. Xing and L. Yang, "Robust nucleus/cell detection and segmentation in digital pathology and microscopy images: A comprehensive review," IEEE Rev. Biomed. Eng., vol. 9, pp. 234–263, Jan. 2016. Toh, Tzen S., Frank Dondelinger, and Dennis Wang. "Looking beyond the hype: applied AI and machine learning in translational medicine." EBioMedicine 47 (2019): 607-615.
- [17] T. Rosyadi, A. Arif, Nopriadi, B. Achmad, and Faridah, "Classification of leukocyte images using K-Means Clustering based on geometry features," in 2016 6th International Annual Engineering Seminar (InAES), Yogyakarta, Indonesia, Aug. 2016, pp. 245–249. doi: 10.1109/INAES.2016.7821942.
- [18] A. Gautam, P. Singh, B. Raman, and H. Bhadauria, "Automatic classification of leukocytes using morphological features and Naïve Bayes classifier," IEEE Reg. 10 Annu. Int. Conf. Proceedings/TENCON, pp. 1023–1027, 2017, doi: 10.1109/TENCON.2016.7848161
- [19] S. S. Savkare, and S. P. Narote, "Blood Cell Segmentation from Microscopic Blood Images," in 2015 International conference on Information Processing (ICIP), Puna, India, Dec. 2015, pp. 502-505. doi: 10.1109/INFOP.2015.7489435.



- [20] Toh, Tzen S., Frank Dondelinger, and Dennis Wang. "Looking beyond the hype: applied AI and machine learning in translational medicine." EBioMedicine 47 (2019): 607-615.
- [21] W. -L. Tai, R. -M. Hu, H. C. W. Hsiao, R. -M. Chen and J. J. P. Tsai, "Blood Cell Image Classification Based on Hierarchical SVM," 2011 IEEE International Symposium on Multimedia, 2011, pp. 129-136, doi: 10.1109/ISM.2011.29
- [22] Şengür, Y. Akbulut, Ü. Budak and Z. Cömert, "White Blood Cell Classification Based on Shape and Deep Features," 2019 International Artificial Intelligence and Data Processing Symposium (IDAP), 2019, pp. 1-4, doi: 10.1109/IDAP.2019.8875945.
- [23] A. Elen and M. K. Turan, "Classifying white blood cells using machine learning algorithms," Uluslar. Muhendis. Arast. Ve Gelistirme Derg., pp. 141–152, 2019.
- [24] D.-C. Huang and K.-D. Hung, "Leukocyte nucleus segmentation and recognition in color blood-smear images," in 2012 IEEE International Instrumentation and Measurement Technology Conference Proceedings, Graz, Austria, May 2012, pp. 171–176. doi: 10.1109/I2MTC.2012.6229443.
- [25] P. Yampri, C. Pintavirooj, S. Daochai, and S. Teartulakarn, "White Blood Cell Classification based on the Combination of Eigen Cell and Parametric Feature Detection," in 2006 1ST IEEE Conference on Industrial Electronics and Applications, Singapore, May 2006, pp. 1–4. doi: 10.1109/ICIEA.2006.257341.
- [26] Tavakoli, Sajad, et al. "New segmentation and feature extraction algorithm for classification of white blood cells in peripheral smear images." Scientific Reports 11.1 (2021): 1-13.
- [27] Malkawi, Areej, et al. "White blood cells classification using convolutional neural network hybrid system." 2020 IEEE 5th Middle East and Africa conference on biomedical engineering (MECBME). IEEE, 2020.
- [28] D. Gupta, J. Arora, U. Agrawal, A. Khanna, V.H.C. de Albuquerque, Optimized Binary Bat Algorithm for classification of White Blood Cells, Measurement (2019), doi: https://doi.org/10.1016/j.measurement.2019.01.002.
- [29] H. Lee and Y.-P.-P. Chen, "Cell morphology based classification for red cells in blood smear images," Pattern Recognit. Lett., vol. 49, pp. 155–161, Nov. 2014.
- [30] Wibawa, Made Satria. "A comparison study between deep learning and conventional machine learning on white blood cells classification." 2018 International Conference on Orange Technologies (ICOT). IEEE, 2018.
- [31] Toğaçar, Mesut, Burhan Ergen, and Zafer Cömert. "Classification of white blood cells using deep features obtained from Convolutional Neural Network models based on the combination of feature selection methods." Applied Soft Computing 97 (2020): 106810.
- [32] Baghel, N., Verma, U. & Nagwanshi, K.K. WBCs-Net: type identification of white blood cells using convolutional neural network. Multimed Tools Appl (2021). <a href="https://doi.org/10.1007/s11042-021-11449-z">https://doi.org/10.1007/s11042-021-11449-z</a>...
- [33] Lippeveld M, Knill C, Ladlow E, Fuller A, Michaelis LJ, Saeys Y, Filby A, Peralta D. Classification of human white blood cells using machine learning for stain-free imaging flow cytometry. Cytometry Part A. 2020 Mar;97(3):308-19.
- [34] J. Rawat, A. Singh, H. Bhadauria, J. Virmani, and J. S. Devgun, "Application of ensemble artificial neural network for the classification of white blood cells using microscopic blood images," Int. J. Comput. Syst. Eng., vol. 4, nos. 2–3, pp. 202–216, 2018.
- [35] S. Nazlibilek, D. Karacor, T. Ercan, M. H. Sazli, O. Kalender, and Y. Ege, "Automatic segmentation, counting, size determination and classification of white blood cells," Measurement, vol. 55, no. 3, pp. 58–65, 2014.
- [36] F. Sadeghian, Z. Seman, A. R. Ramli, B. H. A. Kahar, and M.-I. Saripan, "A framework for white blood cell segmentation in microscopic blood images using digital image processing," Biol. Procedures Online, vol. 11, no. 1, p. 196, 2009.
- [37] M. J. Macawile, V. V. Quinones, A. Ballado, J. D. Cruz, and M. V. Caya, "White blood cell classification and counting using convolutional neural network," in 2018 3rd International Conference on Control and Robotics Engineering (ICCRE), Nagoya, Apr. 2018, pp. 259–263.
- [38] G. Liang, H. Hong, W. Xie, and L. Zheng, "Combining Convolutional Neural Network with Recursive Neural Network for Blood Cell Image Classification," IEEE Access, vol. 6, pp. 36188–36197, 2018.
- [39] M. Sharma, A. Bhave, and R. R. Janghel, "White Blood Cell Classification Using Convolutional Neural Network," in Soft Computing and Signal Processing, vol. 900, J. Wang, G. R. M. Reddy, V. K. Prasad, and V. S. Reddy, Eds Singapore: Springer Singapore, 2019, pp. 135–143.



- [40] M. Togacar, B. Ergen, and M. E. Sertkaya, "Subclass Separation of White Blood Cell Images Using Convolutional Neural Network Models," Elektron. Ir Elektrotechnika, vol. 25, no. 5, pp. 63–68, Oct. 2019.
- [41] E. H. Mohamed, W. H. El-Behaidy, G. Khoriba, and J. Li, "Improved White Blood Cells Classification based on Pre-trained Deep Learning Models," J. Commun. Softw. Syst., vol. 16, no. 1, pp. 37–45, Mar. 2020.
- [42] M. Toğaçar, B. Ergen, and Z. Cömert, "Classification of white blood cells using deep features obtained from Convolutional Neural Network models based on the combination of feature selection methods," Appl. Soft Comput., vol. 97, p. 106810, Dec. 2020.
- [43] Journal, X. Yao, K. Sun, X. Bu, C. Zhao, and Y. Jin, "Classification of white blood cells using weighted optimize deformable convolutional neural networks convolutional neural networks," Artif. Cells, Nanomedicine, Biotechnol., vol. 49, no. 1, pp. 147–155, 2021.
- [44] M. A. Khosrosereshki and M. B. Menhaj, "A fuzzy based classifier for diagnosis of acute lymphoblastic leukemia using blood smear image processing," in Proc. 5th Iranian Joint Congr. Fuzzy Intell. Syst. (CFIS), Mar. 2017, pp. 13–18.
- [45] A. Bouchet, S. Montes, V. Ballarin, and I. Díaz, "Intuitionistic fuzzy set and fuzzy mathematical morphology applied to color leukocytes segmentation," Signal, Image Video Process., vol. 14, no. 3, pp. 557–564, Apr. 2019.
- [46] K. K. Jha and H. S. Dutta, "Mutual information-based hybrid model and deep learning for acute lymphocytic leukemia detection in single cell blood smear images," Comput. Methods Programs Biomed., vol. 179, Oct. 2019, Art. no. 104987.
- [47] Y. Duan, J. Wang, M. Hu, M. Zhou, Q. Li, L. Sun, S. Qiu, and Y. Wang, "Leukocyte classification based on spatial and spectral features of microscopic hyperspectral images," Opt. Laser Technol., vol. 112, pp. 530–538, Apr. 2019.
- [48] M. Sajjad, S. Khan, M. Shoaib, H. Ali, Z. Jan, K. Muhammad, and H. Moon, J. T. Kwak, Mehmood, "Computer aided system for leukocytes classification and segmentation in blood smear images," in Proc. Int. Conf. Frontiers Inf. Technol. (FIT), Dec. 2016, pp. 99–104.
- [49] S. Kermani, M. Amin, and A. Talebi, "Recognition of acute lymphoblas- tic leukemia cells in microscopic images using k-means clustering and support vector machine classifier," J. Med. Signals Sensors, vol. 5, no. 1, p. 49, 2015.
- [50] S. Agaian, M. Madhukar, and A. T. Chronopoulos, "A new acute leukaemia-automated classification system," Comput. Methods Biomech. Biomed. Eng., Imag. Visualizat., vol. 6, no. 3, pp. 303–314, May 2018.
- [51] A. Gautam, P. Singh, B. Raman, and H. Bhadauria, "Automatic classification of leukocytes using morphological features and Naïve bayes classifier," in Proc. IEEE Region 10 Conf. (TENCON), Nov. 2016, pp. 1023–1027.
- [52] S. Tantikitti, S. Tumswadi, and W. Premchaiswadi, "Image processing for detection of dengue virus based on WBC classification and decision tree," in Proc. 13th Int. Conf. ICT Knowl. Eng., Nov. 2015, pp. 84–89.
- [53] R. B. Hegde, K. Prasad, H. Hebbar, and B. M. K. Singh, "Development of a robust algorithm for detection of nuclei of white blood cells in peripheral blood smear images," Multimedia Tools Appl., vol. 78, no. 13, pp. 17879–17898, Jul. 2019.
- [54] M.-C. Su, C.-Y. Cheng, and P.-C. Wang, "A neural-network-based approach to white blood cell classification," Sci. World J., vol. 2014, Jan. 2014, Art. no. 796371.
- [55] S. N. M. Safuan, M. R. Md Tomari, and W. N. Wan Zakaria, "White blood cell (WBC) counting analysis in blood smear images using various color segmentation methods," Measurement, vol. 116, pp. 543–555, Feb. 2018.
- [56] D.-C. Huang, K.-D. Hung, and Y.-K. Chan, "A computer assisted method for leukocyte nucleus segmentation and recognition in blood smear images," J. Syst. Softw., vol. 85, no. 9, pp. 2104–2118, Sep. 2012.
- [57] H. Danyali, M. S. Helfroush, and Z. Moshavash, "Robust leukocyte segmentation in blood microscopic images based on intuitionistic fuzzy divergence," in Proc. 22nd Iranian Conf. Biomed. Eng. (ICBME), Nov. 2015, pp. 275–280.
- [58] S. Manik, L. M. Saini, and N. Vadera, "Counting and classification of white blood cell using artificial neural network (ANN)," in Proc. IEEE 1st Int. Conf. Power Electron., Intell. Control Energy Syst. (ICPEICES), Jul. 2016, pp. 1–5.
- [59] Y. Li, R. Zhu, L. Mi, Y. Cao, and D. Yao, "Segmentation of white blood cell from acute lymphoblastic leukemia images using dual-threshold method," Comput. Math. Methods Med., vol. 2016, May 2016, Art. no. 9514707.
- [60] Q. Wang, L. Chang, M. Zhou, Q. Li, H. Liu, and F. Guo, "A spectral and morphologic method for white blood cell classification," Opt. Laser Technol., vol. 84, pp. 144–148, Oct. 2016.



- [61] A. S. Negm, O. A. Hassan, and A. H. Kandil, "A decision support system for acute leukaemia classification based on digital microscopic images," Alexandria Eng. J., vol. 57, no. 4, pp. 2319–2332, Dec. 2018.
- [62] M. A. Khosrosereshki and M. B. Menhaj, "A fuzzy based classifier for diagnosis of acute lymphoblastic leukemia using blood smear image processing," in Proc. 5th Iranian Joint Congr. Fuzzy Intell. Syst. (CFIS), Mar. 2017, pp. 13–18.
- [63] A. Bouchet, S. Montes, V. Ballarin, and I. Díaz, "Intuitionistic fuzzy set and fuzzy mathematical morphology applied to color leukocytes segmentation," Signal, Image Video Process., vol. 14, no. 3, pp. 557–564, Apr. 2019
- [64] K. K. Jha and H. S. Dutta, "Mutual information-based hybrid model and deep learning for acute lymphocytic leukemia detection in single cell blood smear images," Comput. Methods Programs Biomed., vol. 179, Oct. 2019, Art. no. 104987.
- [65] Y. Duan, J. Wang, M. Hu, M. Zhou, Q. Li, L. Sun, S. Qiu, and Y. Wang, "Leukocyte classification based on spatial and spectral features of microscopic hyperspectral images," Opt. Laser Technol., vol. 112, pp. 530–538, Apr. 2019.
- [66] M. Sajjad, S. Khan, M. Shoaib, H. Ali, Z. Jan, K. Muhammad, and H. Moon, J. T. Kwak, Mehmood, "Computer aided system for leukocytes classification and segmentation in blood smear images," in Proc. Int. Conf. Frontiers Inf. Technol. (FIT), Dec. 2016, pp. 99–104.
- [67] S. Kermani, M. Amin, and A. Talebi, "Recognition of acute lymphoblas- tic leukemia cells in microscopic images using k-means clustering and support vector machine classifier," J. Med. Signals Sensors, vol. 5, no. 1, p. 49, 2015.
- [68] S. Agaian, M. Madhukar, and A. T. Chronopoulos, "A new acute leukaemia-automated classification system," Comput. Methods Biomech. Biomed. Eng., Imag. Visualizat., vol. 6, no. 3, pp. 303–314, May 2018.
- [69] A. Gautam, P. Singh, B. Raman, and H. Bhadauria, "Automatic classification of leukocytes using morphological features and Naïve bayes classifier," in Proc. IEEE Region 10 Conf. (TENCON), Nov. 2016, pp. 1023–1027.
- [70] S. Tantikitti, S. Tumswadi, and W. Premchaiswadi, "Image processing for detection of dengue virus based on WBC classification and decision tree," in Proc. 13th Int. Conf. ICT Knowl. Eng., Nov. 2015, pp. 84–89.
- [71] J. Rawat, A. Singh, H. S. Bhadauria, J. Virmani, and J. S. Devgun, "Classification of acute lymphoblastic leukaemia using hybrid hierarchical classifiers," Multimedia Tools Appl., vol. 76, no. 18, pp. 19057–19085, Sep. 2017.
- [72] T. Shaikhina, D. Lowe, S. Daga, D. Briggs, R. Higgins, and N. Khovanova, "Decision tree and random forest models for outcome prediction in antibody incompatible kidney transplantation," Biomed. Signal Process. Control, vol. 52, pp. 456–462, Jul. 2019. [Online]. Available: https://creativecommons.org/licenses/by/4.0/, doi: 10.1016/j.bspc.2017.01.012.
- [73] A. M. Abdeldaim, A. T. Sahlol, M. Elhoseny, and A. E. Hassanien, "Computer-aided acute lymphoblastic leukemia diagnosis system based on image analysis," in AAdvances in Soft Computing and Machine Learning in Image Processing. Springer, 2018, pp. 131–147.
- [74] A. Mathur, A. Tripathi, and M. Kuse, "Scalable system for classification of white blood cells from Leishman stained blood stain images," J. Pathol. Informat., vol. 4, no. 2, p. 15, 2013.
- [75] R. B. Hegde, K. Prasad, H. Hebbar, and B. M. K. Singh, "Development of a robust algorithm for detection of nuclei of white blood cells in peripheral blood smear images," Multimedia Tools Appl., vol. 78, no. 13, pp. 17879–17898, Jul. 2019.
- [76] S. Manik, L. M. Saini, and N. Vadera, "Counting and classification of white blood cell using artificial neural network (ANN)," in Proc. IEEE 1st Int. Conf. Power Electron., Intell. Control Energy Syst. (ICPEICES), Jul. 2016, pp. 1–5.
- [77] M.-C. Su, C.-Y. Cheng, and P.-C. Wang, "A neural-network-based approach to white blood cell classification," Sci. World J., vol. 2014, Jan. 2014, Art. no. 796371.
- [78] H. Lee and Y.-P.-P. Chen, "Cell morphology based classification for red cells in blood smear images," Pattern Recognit. Lett., vol. 49, pp. 155–161, Nov. 2014.
- [79] J. Rawat, A. Singh, H. Bhadauria, J. Virmani, and J. S. Devgun, "Application of ensemble artificial neural network for the classification of white blood cells using microscopic blood images," Int. J. Comput. Syst. Eng., vol. 4, nos. 2–3, pp. 202–216, 2018.
- [80] S. Nazlibilek, D. Karacor, T. Ercan, M. H. Sazli, O. Kalender, and Y. Ege, "Automatic segmentation, counting, size determination and classification of white blood cells," Measurement, vol. 55, no. 3, pp. 58–65, 2014.



- [81] F. Sadeghian, Z. Seman, A. R. Ramli, B. H. A. Kahar, and M.-I. Saripan, "A framework for white blood cell segmentation in microscopic blood images using digital image processing," Biol. Procedures Online, vol. 11, no. 1, p. 196, 2009.
- [82] M. J. Macawile, V. V. Quinones, A. Ballado, J. D. Cruz, and M. V. Caya, "White blood cell classification and counting using convolutional neural network," in 2018 3rd International Conference on Control and Robotics Engineering (ICCRE), Nagoya, Apr. 2018, pp. 259–263.
- [83] G. Liang, H. Hong, W. Xie, and L. Zheng, "Combining Convolutional Neural Network with Recursive Neural Network for Blood Cell Image Classification," IEEE Access, vol. 6, pp. 36188–36197, 2018.
- [84] M. Sharma, A. Bhave, and R. R. Janghel, "White Blood Cell Classification Using Convolutional Neural Network," in Soft Computing and Signal Processing, vol. 900, J. Wang, G. R. M. Reddy, V. K. Prasad, and V. S. Reddy, Eds Singapore: Springer Singapore, 2019, pp. 135–143.
- [85] M. Togacar, B. Ergen, and M. E. Sertkaya, "Subclass Separation of White Blood Cell Images Using Convolutional Neural Network Models," Elektron. Ir Elektrotechnika, vol. 25, no. 5, pp. 63–68, Oct. 2019.
- [86] E. H. Mohamed, W. H. El-Behaidy, G. Khoriba, and J. Li, "Improved White Blood Cells Classification based on Pre-trained Deep Learning Models," J. Commun. Softw. Syst., vol. 16, no. 1, pp. 37–45, Mar. 2020.
- [87] M. Toğaçar, B. Ergen, and Z. Cömert, "Classification of white blood cells using deep features obtained from Convolutional Neural Network models based on the combination of feature selection methods," Appl. Soft Comput., vol. 97, p. 106810, Dec. 2020.
- [88] Journal, X. Yao, K. Sun, X. Bu, C. Zhao, and Y. Jin, "Classification of white blood cells using weighted optimize deformable convolutional neural networks convolutional neural networks," Artif. Cells, Nanomedicine, Biotechnol., vol. 49, no. 1, pp. 147–155, 2021.
- [89] Çınar and S. A. Tuncer, "Classification of lymphocytes, monocytes, eosinophils, and neutrophils on white blood cells using hybrid Alexnet-GoogleNet-SVM," SN Appl. Sci., vol. 3, no. 4, p. 503, Apr. 2021.
- [90] J. Liu, A. Shahroudy, M. Perez, G. Wang, L.-Y. Duan, and A. C. Kot, "NTU RGB+D 120: A large-scale benchmark for 3D human activity understanding," IEEE Trans. Pattern Anal. Mach. Intell., vol. 42, no. 10, pp. 2684–2701, Oct. 2019.
- [91] H. Kutlu, E. Avci, and F. Özyurt, "White blood cells detection and classification based on regional convolutional neural networks," Med. Hypotheses, vol. 135, Feb. 2020, Art. no. 109472.
- [92] H. Fan, F. Zhang, L. Xi, Z. Li, G. Liu, and Y. Xu, "LeukocyteMask: An automated localization and segmentation method for leukocyte in blood smear images using deep neural networks," J. Biophotonics, vol. 12, no. 7, Jul. 2019, Art. no. e201800488.
- [93] R. B. Hegde, K. Prasad, H. Hebbar, and B. M. K Singh, "Feature extraction using traditional image processing and convolutional neural network methods to classify white blood cells: A study," Australas. Phys. Eng. Sci. Med., vol. 42, no. 2, pp. 627–638, Jun. 2019.
- [94] A. Acevedo, S. Alférez, A. Merino, L. Puigví, and J. Rodellar, "Recog- nition of peripheral blood cell images using convolutional neural net- works," Comput. Methods Programs Biomed., vol. 180, Oct. 2019, Art. no. 105020.
- [95] F. Qin, N. Gao, Y. Peng, Z. Wu, S. Shen, and A. Grudtsin, "Fine-grained leukocyte classification with deep residual learning for microscopic images," Comput. Methods Programs Biomed., vol. 162, pp. 243–252, Aug. 2018.
- [96] P. Tiwari, J. Qian, Q. Li, B. Wang, D. Gupta, A. Khanna, J. J. P. C. Rodrigues, and V. H. C. de Albuquerque, "Detection of subtype blood cells using deep learning," Cognit. Syst. Res., vol. 52, pp. 1036–1044, Dec. 2018.
- [97] J. Hung and A. Carpenter, "Applying faster R-CNN for object detection on malaria images," in Proc. IEEE Conf. Comput. Vis. Pattern Recognit. Workshops, vol. 2017, pp. 56–61.
- [98] M. I. Razzak and S. Naz, "Microscopic blood smear segmentation and classification using deep contour aware CNN and extreme machine learn- ing," in Proc. IEEE Conf. Comput. Vis. Pattern Recognit. Workshops (CVPRW), Jul. 2017, pp. 49–55.
- [99] L. H. S. Vogado, R. M. S. Veras, F. H. D. Araujo, R. R. V. Silva, and K. R. T. Aires, "Leukemia diagnosis in blood slides using transfer learning in CNNs and SVM for classification," Eng. Appl. Artif. Intell., vol. 72, pp. 415–422, Jun. 2018.
- [100] M. Habibzadeh, M. Jannesari, Z. Rezaei, H. Baharvand, and M. Totonchi, "Automatic white blood cell classification using pre-trained deep learn- ing models: Resnet and inception," in Proc. 10th Int. Conf. Mach. Vis. (ICMV), 2018, vol. 10696, Art. no. 1069612.
- [101] Y. Song, L. Zhang, S. Chen, D. Ni, B. Li, Y. Zhou, B. Lei, and T. Wang, "A deep learning based framework for accurate segmentation of cervical cytoplasm and nuclei," in Proc. 36th Annu. Int. Conf. IEEE Eng. Med. Biol. Soc., Aug. 2014, pp. 2903–2906.



- [102] F. Özyurt, "A fused CNN model for WBC detection with MRMR fea- ture selection and extreme learning machine," Soft Comput., vol. 24, pp. 8163–8172, Jun. 2019.
- [103] A. Rehman, N. Abbas, T. Saba, S. I. U. Rahman, Z. Mehmood, and H. Kolivand, "Classification of acute lymphoblastic leukemia using deep learning," Microsc. Res. Techn., vol. 81, no. 11, pp. 1310–1317, Nov. 2018.
- [104] D. Bani-Hani, N. Khan, F. Alsultan, S. Karanjkar, and N. Nagarur, "Classification of leucocytes using convolutional neural network optimized through genetic algorithm," in Proc. 7th Annu. World Conf. Soc. Ind. Syst. Eng., Oct. 2018, pp. 1–6.
- [105] C. Di Ruberto, A. Loddo, and G. Puglisi, "Blob detection and deep learning for leukemic blood image analysis," Appl. Sci., vol. 10, no. 3, p. 1176, Feb. 2020.
- [106] M. Loey, M. Naman, and H. Zayed, "Deep transfer learning in diagnosing leukemia in blood cells," Computers, vol. 9, no. 2, p. 29, Apr. 2020.
- [107] L. Ma, R. Shuai, X. Ran, W. Liu, and C. Ye, "Combining DC-GAN with ResNet for blood cell image classification," Med. Biol. Eng. Comput., vol. 4, pp. 1–14, Mar. 2020.
- [108] Y. Y. Baydilli and Ü. Atila, "Classification of white blood cells using capsule networks," Comput. Med. Imag. Graph., vol. 80, Mar. 2020, Art. no. 101699.
- [109] R. R. Tobias, L. Carlo De Jesus, M. E. Mital, S. Lauguico, M. Guillermo, R. R. Vicerra, A. Bandala, and E. Dadios, "Faster R-CNN model with momentum optimizer for RBC and WBC variants classification," in Proc. IEEE 2nd Global Conf. Life Sci. Technol. (LifeTech), Mar. 2020, pp. 235–239.
- [110] S. Hosseinzadeh Kassani, P. Hosseinzadeh kassani, M. J. Wesolowski, K. A. Schneider, and R. Deters, "A hybrid deep learning architecture for leukemic B-lymphoblast classification," 2019, arXiv:1909.11866. [Online]. Available: <a href="http://arxiv.org/abs/1909.11866">http://arxiv.org/abs/1909.11866</a>.
- [111] N. Baghel, U. Verma, and K. K. Nagwanshi, "WBCs-Net: type identification of white blood cells using convolutional neural network," Multimed Tools Appl, vol. 81, no. 29, pp. 42131–42147, Dec. 2022, doi: 10.1007/s11042-021-11449-z.
- [112] A. Shahzad, M. Raza, J. H. Shah, M. Sharif, and R. S. Nayak, "Categorizing white blood cells by utilizing deep features of proposed 4B-AdditionNet-based CNN network with ant colony optimization," Complex Intell. Syst., vol. 8, no. 4, pp. 3143–3159, Aug. 2022, doi: 10.1007/s40747-021-00564-x. C.
- [113] Cheuque, M. Querales, R. León, R. Salas, and R. Torres, "An Efficient Multi-Level Convolutional Neural Network Approach for White Blood Cells Classification," Diagnostics, vol. 12, no. 2, p. 248, Jan. 2022, doi: 10.3390/diagnostics12020248.
- [114] M. Hosseini, D. Bani-Hani, and S. S. Lam, "Leukocytes Image Classification Using Optimized Convolutional Neural Networks," Expert Systems with Applications, vol. 205, p. 117672, Nov. 2022, doi: 10.1016/j.eswa.2022.117672.
- [115] K. Balasubramanian, N. P. Ananthamoorthy, and K. Ramya, "An approach to classify white blood cells using convolutional neural network optimized by particle swarm optimization algorithm," Neural Comput & Applic, vol. 34, no. 18, pp. 16089–16101, Sep. 2022, doi: 10.1007/s00521-022-07279-1.
- [116] A. J. Khalil and S. S. Abu-Naser, "Diagnosis of Blood Cells Using Deep Learning," vol. 6, no. 2, 2022.
- [117] S. Sharma et al., "Deep Learning Model for the Automatic Classification of White Blood Cells," Computational Intelligence and Neuroscience, vol. 2022, pp. 1–13, Jan. 2022, doi: 10.1155/2022/7384131.
- [118] S. Hosseinzadeh Kassani, P. Hosseinzadeh kassani, M. J. Wesolowski, K. A. Schneider, and R. Deters, "A hybrid deep learning architecture for leukemic B-lymphoblast classification," 2019, *arXiv:1909.11866*. [Online]. Available: http://arxiv.org/abs/1909.11866
- [119] M. I. Razzak, S. Naz, and A. Zaib, "Deep learning for medical image pro-cessing: Overview, challenges and the future," in *Classification BioApps*. Ithaca, NY, USA: Cornell Univ., 2018, pp. 323–350.
- [120]F. Altaf, S. M. S. Islam, N. Akhtar, and N. K. Janjua, "Going deepin medical image analysis: Concepts, methods, challenges, and future directions," *IEEE Access*, vol. 7, pp. 99540–99572, 2019.
- [121]K. Muhammad, T. Hussain, J. Del Ser, V. Palade, and V. H. C. de Albuquerque, "DeepReS: A deep learning-based video summarization strategy for resource-constrained industrial surveillance scenarios," *IEEE Trans. Ind. Informat.*, vol. 16, no. 9, pp. 5938–5947, Sep. 2020.
- [122]T. Hussain, K. Muhammad, A. Ullah, J. Del Ser, A. H. Gandomi, M. Sajjad, S. W. Baik, and V. H. C. de Albuquerque, "Multi-view sum- marization and activity recognition meet edge computing in IoT environments," *IEEE Internet Things J.*, early access, Sep. 29, 2020, doi: 10.1109/JIOT.2020.3027483.
- [123] T. Han, K. Muhammad, T. Hussain, J. Lloret, and S. W. Baik, "An efficient deep learning framework for intelligent energy management in IoT networks," *IEEE Internet Things J.*, early access, Aug. 3, 2020, doi: 10.1109/JIOT.2020.3013306.



- [124] K. Muhammad, T. Hussain, and S. L. Baik, "Efficient CNN based summarization of surveillance videos for resource-constrained devices," *Pattern Recognit. Lett.*, vol. 130, pp. 370–375, Feb. 2020.
- [125]C. Zhang, S. Bengio, M. Hardt, B. Recht, and O. Vinyals, "Under-standing deep learning requires rethinking generalization," 2016, arXiv:1611.03530. [Online]. Available: http://arxiv.org/abs/1611.03530
- [126]I. Mehmood, T. Hussain, I. Hassan, S. Rho, and M. Sajjad, "Let the deaf understand: Mainstreaming the marginalized in context with personalized digital media services and social needs," in *Proc. IEEE Int. Conf. Multi-media Expo Workshops (ICMEW)*, Jul. 2017, pp. 220–225.
- [127]B. J. Erickson, P. Korfiatis, Z. Akkus, T. Kline, and K. Philbrick, "Toolk-its and libraries for deep learning," *J. Digit. Imag.*, vol. 30, no. 4,pp. 400–405, Aug. 2017.
- [128] K. Muhammad, T. Hussain, M. Tanveer, G. Sannino, and V. H. C. de Albuquerque, "Costeffective video summarization using deep CNN with hierarchical weighted fusion for IoT surveillance networks," *IEEE Internet Things J.*, vol. 7, no. 5, May 2020,doi: 10.1109/JIOT.2019.2950469.
- [129]C. Marzahl, M. Aubreville, J. Voigt, and A. Maier, "Classification of leukemic b-lymphoblast cells from blood smear microscopic images with an attention-based deep learning method and advanced augmentation techniques," in *ISBI C-NMC Challenge: Classification Cancer Cell Imaging*. Springer, 2019, pp. 13–22.
- [130] P. Huang, J. Wang, J. Zhang, Y. Shen, C. Liu, W. Song, S. Wu, Y. Zuo, Z. Lu, and D. Li, "Attention-aware residual network based manifold learning for white blood cells classification," *IEEE J. Biomed. Health Informat.*, early access, Jul. 29, 2020, doi: 10.1109/JBHI.2020.3012711.
- [131] M.A.Hussain, A. Ibtihaj, A. Shaukat, and Z.U. Islam. "Leukocytes segmentation and classification in digital microscopic images." In 2021 4th International Conference on Computing & Information Sciences (ICCIS), pp. 1-6. IEEE, 2021.
- [132] R. Ahmad, M. Awais, N. Kausar, and T. Akram, "White blood cells classification using entropy-controlled deep features optimization," *Diagnostics (Basel)*, vol. 13, no. 3, p. 352, 2023.
- [133] Bhuiyan M, Islam MS. A new ensemble learning approach to detect malaria from microscopic red blood cell images. Sensors International. 2023 Jan 1;4:100209.
- [134] T. A. Elhassan *et al.*, "Classification of atypical white blood cells in acute myeloid leukemia using a two-stage hybrid model based on deep convolutional autoencoder and deep convolutional neural network," *Diagnostics (Basel)*, vol. 13, no. 2, p. 196, 2023.
- [135] Kakumani AK, Katla V, Rekhawar V, Yellakonda AR. A Comparative Analysis for Leukocyte Classification Based on Various Deep Learning Models Using Transfer Learning. In2023 4th International Conference for Emerging Technology (INCET) 2023 May 26 (pp. 1-6). IEEE.