

ShockHash:

Towards Optimal-Space Minimal Perfect Hashing Beyond Brute-Force

Hans-Peter Lehmann*

Peter Sanders†

Stefan Walzer‡

Abstract

A minimal perfect hash function (MPHF) maps a set S of n keys to the first n integers without collisions. There is a lower bound of $n \log_2 e - \mathcal{O}(\log n)$ bits of space needed to represent an MPHF. A matching upper bound is obtained using the *brute-force* algorithm that tries random hash functions until stumbling on an MPHF and stores that function’s seed. In expectation, $e^n \text{poly}(n)$ seeds need to be tested. The most space-efficient previous algorithms for constructing MPHFs all use such a brute-force approach as a basic building block.

In this paper, we introduce ShockHash – **S**mall, **h**eavily **o**verloaded **c**uckoo **H**ash tables. ShockHash uses two hash functions h_0 and h_1 , hoping for the existence of a function $f : S \rightarrow \{0, 1\}$ such that $x \mapsto h_{f(x)}(x)$ is an MPHF on S . In graph terminology, ShockHash generates n -edge random graphs until stumbling on a *pseudoforest* – a graph where each component contains as many edges as nodes. Using cuckoo hashing, ShockHash then derives an MPHF from the pseudoforest in linear time. It uses a 1-bit retrieval data structure to store f using $n + o(n)$ bits.

By carefully analyzing the probability that a random graph is a pseudoforest, we show that ShockHash needs to try only $(e/2)^n \text{poly}(n)$ hash function seeds in expectation. This reduces the space for storing the seed by roughly n bits (maintaining the asymptotically optimal space consumption) and speeds up construction by almost a factor of 2^n compared to brute-force. When using ShockHash as a building block within the RecSplit framework we obtain ShockHash-RS, which yields the currently most space efficient MPHFs, i.e., competing approaches need about two orders of magnitude more work to achieve the same space.

1 Introduction

A perfect hash function (PHF) maps a set of N keys to the first M integers without collisions. If $M = N$, the

hash function is called *minimal* perfect (MPHF) and is a bijection between the keys and the N first integers $[N]$.

Minimal perfect hashing has many applications. For example, it can be used to implement *hash tables* with guaranteed constant access time [20]. Storing only payload data in the hash table cells, we obtain an *updatable retrieval data structure* [32], and storing only fingerprints [4, 15], we obtain an *approximate membership data structure*. Finally, the hashes can be used as small *identifiers* of the input keys [6], which are more efficient to deal with than large and complex keys.

There is a lower bound of about $N \log_2 e \approx 1.44N$ bits needed to represent an MPHF. There is also a theoretical construction matching this bound that runs in linear time and allows constant query time [23]. However, this construction does not work for realistic N , so that (minimal) perfect hashing remains an interesting topic for algorithm engineering. A long sequence of previous work has developed a range of practical approaches with different space-time tradeoffs.

Many approaches first construct an outer hash function $g : S \rightarrow \{1, \dots, k\}$ that partitions the input set S into small subsets S_1, S_2, \dots, S_k of sizes $s_1 \approx s_2 \approx \dots \approx s_k$ and then constructs a perfect hash function $h_i : S_i \rightarrow \{1, \dots, s_i\}$ on each subset. Given s_i , or better yet the prefix sums $p_i = s_0 + \dots + s_{i-1}$, an MPHF on S is given as $x \mapsto p_{g(x)} + h_{g(x)}(x)$.

On the one hand, there are holistic methods where such a partitioning step is not essential (though still possibly useful). These are (so far) all a constant factor away from the space lower bound (e.g. [3, 9, 28, 32]). One of the most space-efficient approaches among these is *SicHash* [28] that maps N keys to $N(1 + \varepsilon)$ unique table entries using a generalization of cuckoo hashing [16, 36]. The choice of hash function for each key is then stored in a retrieval data structure and a ranking data structure turns the constructed PHF into an MPHF. SicHash is not space-optimal partly because the cuckoo table tends to admit many valid placements of its keys, meaning a single input set is redundantly handled by many distinct states of the PHF data structure.

On the other hand, there are methods that use brute-force trial-and-error of hash functions on subsets

*Karlsruhe Institute of Technology, Germany.  †Karlsruhe Institute of Technology, Germany.  ‡Karlsruhe Institute of Technology, Germany.  

of size n [2, 5, 14, 19, 37], which takes roughly e^n trials. Hence, an aggressive partitioning step is required to obtain an acceptable overall running time. The currently most space efficient approach, *RecSplit* [14], is of this kind and recursively splits the input set into very small ($n \approx 16$) *leaf* subsets. Surprisingly, when using aggressive parallelization, this enables higher construction throughput than the best holistic methods even when being fairly far away from the space lower bound [5].

In this paper, we introduce *ShockHash* – Small, heavily overloaded cuckoo Hash tables, which can be seen as an extreme version of SicHash where we use two hash functions for each key and retry construction until we can completely fill the cuckoo hash table. That way, we achieve an MPHf without an intermediate non-minimal PHF. In graph terminology, ShockHash repeatedly generates an n -edge random graph where each key corresponds to one edge, connecting the candidate positions of the key. The table can be filled if and only if the graph is a *pseudoforest* – a graph where each component contains as many edges as nodes. The ShockHash idea is straightforward in principle but interesting in two respects. First, we can *prove* that when using basic cuckoo hashing with two choices (and thus 1-bit retrieval) there is only an insignificant amount of redundancy. Therefore, ShockHash approaches the information theoretic lower bound for large n and has running time $(e/2)^n \cdot \text{poly}(n)$ (nearly a factor 2^n faster than brute-force).

We obtain ShockHash-RS by using ShockHash instead of brute-force as a base case within the RecSplit framework. This brings algorithmic sophistication back into business: Though there is a small penalty in query time due to the additional access to a retrieval data structure, ShockHash-RS is now the most efficient method to construct nearly space-optimal MPHfs. At the most space efficient configurations (leaf size $n \approx 40$), ShockHash-RS construction is about two orders of magnitude faster than tuned RecSplit [5] when achieving the same space efficiency and using the same architecture. An important step in this harmonization of theory and practice is the observation that only an exponentially small fraction of the hash functions tried by ShockHash require the construction of a cuckoo hash table. The other cases can be covered with a simple bit-parallel filter that checks whether all entries of the cuckoo table are hit by some key. This removes much of the time overhead which made brute-force seemingly superior.

In Section 2, we introduce basic concepts like cuckoo hashing and retrieval data structures. In Section 3, we discuss related MPHf constructions from the literature. Then we introduce ShockHash in Section 4, and prove its space usage and construction time in Section 5. Section 6

explains ShockHash-RS, i.e. how we integrate ShockHash into the RecSplit framework. Section 7 gives further refinements including an outline on how to parallelize construction and how to integrate ShockHash into other perfect hashing approaches. Finally, we compare an implementation of ShockHash-RS with competitors from the literature in Section 8. We give a conclusion and an outlook to future work in Section 9.

Summary of Contributions

- Building block for space-efficient construction of MPHfs as an alternative to brute-force, with a speedup of 2^n
- Theoretical analysis explaining the experiments
- Efficient integration into the RecSplit framework
- Careful experimental comparison with the state-of-the-art. Competitors need two orders of magnitude more work to achieve similar space efficiency
- ShockHash can be integrated into further frameworks

2 Preliminaries

In the following section, we explain basic ingredients of ShockHash. This also includes the two perfect hash function constructions SicHash [28] and RecSplit [14] that ShockHash-RS is based on.

Cuckoo Hashing. Cuckoo Hashing [36] is a well known approach to handle collisions in hash tables. Each object gets two candidate cells via two hash functions. A query operation looks at the two cells and searches for the object. If an insertion operation tries to insert an object into a cell that is already full, the object already stored in the cell is taken out and recursively inserted using its other candidate position. Cuckoo hashing can be extended to use more than two hash functions [16], or cells with more than one object in them [12]. In this paper, we are only interested in the basic version with two hash functions and one object per cell.

The load threshold of a cuckoo hash table [17, 18, 29] is the number of keys that can be inserted before insertion likely fails. For cuckoo hashing with two candidate cells, the load threshold is $c = 0.5$.

Pseudoforests. Cuckoo hashing can be modeled as a random graph G , where each node represents a table cell and each edge represents one object, connecting its two candidate cells. It is easy to see that a cuckoo hash table can be constructed successfully if and only if the edges of G can be oriented such that the indegree of each node is ≤ 1 . In the following, we call this a 1-orientation. A 1-orientation exists if and only if G is a *pseudoforest*, i.e. every connected component of G is a pseudotree. A pseudotree is either a tree or a cycle with trees branching from it. A way to check whether a graph is a pseudoforest is to check whether each component contains at most as many edges as nodes.

Retrieval Data Structures. For a given set S of N keys, a retrieval data structure (or *static function* data structure) stores a function $S \rightarrow \{0,1\}^r$ that maps each key to a specific r -bit value. Because it may return arbitrary values for keys not in S , it is possible to represent the function without representing S itself. Representing a retrieval data structure needs at least rN bits of space and there are practical data structures that need $rN + o(rN)$ bits allowing linear construction time and constant query time. In particular, for $r = 1$, *Bumped Ribbon Retrieval (BuRR)* [13] reduces function evaluation to XORing a hash function value with a segment of a precomputed table and reporting the parity of the result. This table can be determined by solving a nearly diagonal system of linear equations (a “ribbon”). In practice, BuRR has a space overhead of about 1%.

SicHash. Small irregular cuckoo tables for perfect Hashing [28] constructs perfect hash functions through cuckoo hashing. It constructs a cuckoo hash table and then uses a retrieval data structure to store which of the hash function choices was finally used for each key. SicHash’s main innovation is using a careful mix of 1–3 bit retrieval data structures. It achieves a favorable space-performance tradeoff when being allowed 2–3 bits of space per key. It cannot go below this because using only 1-bit retrieval seems to lead far from minimality while using 2 or more bits for retrieval allows redundant choices that cannot achieve space-optimality. SicHash achieves a rather limited gain in space efficiency by *overloading* the table beyond the load thresholds and trying multiple hash functions. This mainly exploits the variance in the number of keys that can fit. SicHash leaves the success probability of constructing overloaded tables as an open question. ShockHash drives the idea of overloading to its extreme and gives a formal analysis for this case.

RecSplit. RecSplit [14] is a minimal perfect hash function that is mainly focused on space efficiency. First, all keys are hashed to buckets of constant expected size b . A bucket’s set of keys is recursively split into different subsets by searching for a *splitting* hash function that partitions the keys into smaller sets. This is repeated recursively in a tree-like structure until subproblems (leaves) with constant size n are left (in Ref. [14], the leaf size is called ℓ). Within the leaves, RecSplit then performs brute-force search for a minimal perfect hash function (also called *bijection*). The tree structure is based only on the size of the current bucket. This makes it possible to store only the seed values for the hash functions without storing structural information. Apart from encoding overheads for the seeds, this makes RecSplit information theoretically optimal within a bucket. The number of child nodes (*fanout*) in the two lowest levels is selected such that the amount of brute-force work is balanced

between splittings and bijections.

There also is a parallel implementation using multi-threading and SIMD instructions or the GPU [5]. The paper also proposes a new technique for searching for bijections called *rotation fitting*. Instead of just applying hash functions on the keys in a leaf directly, rotation fitting splits up the keys into two sets using a 1-bit hash function. It then hashes each of the two sets individually, forming two words where the bits indicate which hash values are occupied. Then it tries to find a way to cyclically rotate the second word, such that the empty positions left by the first set are filled by the positions of the second set. The paper shows that each rotation essentially gives a new chance for a bijection, so it is a way to quickly evaluate additional hash function seeds.

3 More Related Work

In addition to RecSplit and ShockHash, which we describe in the preliminaries, there is a range of other MPHFs.

Hash-and-Displace. (M)PHFs with Hash-and-Displace [2, 19, 37] allow fast queries and asymptotically optimal space consumption. Each key x is first hashed to a small bucket $b(x)$ of keys. For each bucket b , an index $i(b)$ of a hash function $f_{i(b)}$ is stored such $x \mapsto f_{i(b(x))}(x)$ is an injective function. For a particular bucket, this index is searched in a brute-force way. To accelerate the search, buckets are first sorted by their size. Further acceleration can be achieved by using heterogeneous expected bucket sizes. PTHash [37] is the currently best implementation of this approach.

Fingerprinting. Perfect hashing through fingerprinting [9, 32] hashes the N keys to γN positions using an ordinary hash function, where γ is a tuning parameter. The most space efficient choice $\gamma = 1$ leads to a space consumption of e (not $\log_2 e$) bits per key. A bit vector of length γN indicates positions to which exactly one key was mapped. Keys that caused collisions are handled recursively in another layer of the same data structure. At query time, when a key is the only one mapping to its location, a rank operation on the bit vector gives the MPHf value. Publicly available implementations include BBHash [30] and the significantly faster FMPH [3]. FMPHGO [3] combines the idea with a few brute-force tries to select a hash function that causes fewer collisions.

Table Lookup. A tempting way to replace expensive brute-force search is precomputation of solutions with subsequent table lookup – a standard technique used in many compressed data structures. For a rough idea, suppose for a subproblem with n keys, we first map them injectively to a range of size $U' \in \Omega(n^2)$ using an intermediate hash function (less would lead to collisions – birthday paradox). Then, using a lookup table of size $2^{U'}$, we can find precomputed perfect hash functions in

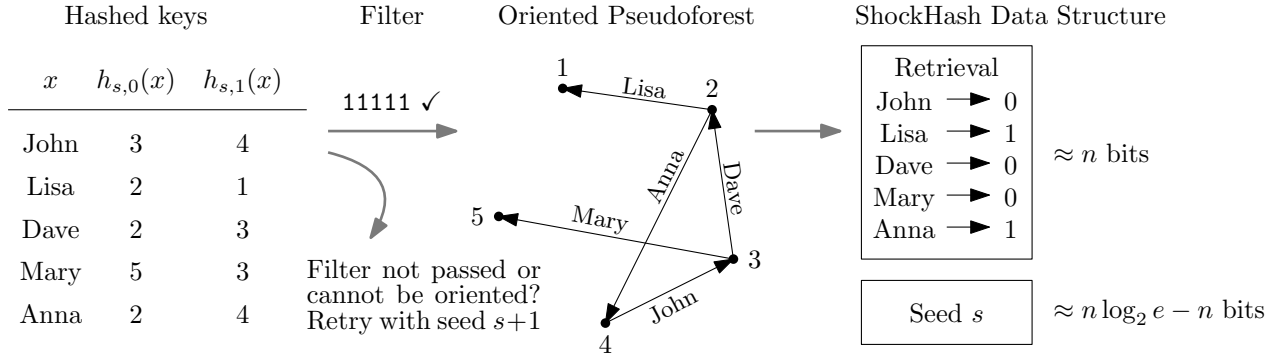


Figure 1: Illustration of the ShockHash construction. s is a seed value where the resulting graph is a pseudotree. During construction, many seeds need to be tried.

constant time. However, polynomial running time limits the subproblem size to $n \in \mathcal{O}(\sqrt{\log N})$, where N is the size of the overall input set. Putting in realistic values, one gets subproblem size much smaller than what can be easily handled even with plain RecSplit. Nevertheless, Hagerup and Tholey [23] develop this approach to a comprehensive theoretical solution of the perfect hashing problem yielding linear construction time, constant query time, and space $1 + o(1)$ times the lower bound. However, this method is not even well-defined for $N < 2^{150}$ [7]. A variant of RecSplit with rotation fitting [5] can use lookup tables of size 2^n to find feasible rotations in constant time. Unfortunately, this turns out to be slower than trying all rotations directly.

4 ShockHash

We now introduce the main idea of this paper, ShockHash. ShockHash is briefly mentioned in the extended version of Ref. [5], but without any analysis and with an implementation that cannot compete with brute-force. The asymptotic load threshold of a binary cuckoo hash table is $c = 0.5$ (see Section 2), so the success probability of constructing a table with n cells and more than $n/2$ keys tends to zero. ShockHash overloads a cuckoo hash table far beyond its asymptotic load threshold – it inserts n keys into a binary cuckoo hash table of size n . As we will see in Theorem 5.2, the construction succeeds after $(e/2)^n \text{poly}(n)$ tries in expectation. We then record the successful seed

$$s = \min\{s \in \mathbb{N} \mid \exists f \in \{0, 1\}^S : x \mapsto h_{s,f(x)}(x) \text{ is MPHf}\}$$

and a successful choice f between the two candidate positions of each key. The seed needs $0.44n + o(n)$ bits in expectation using Golomb-Rice codes [22, 38]. The choices are stored in a 1-bit retrieval data structure, requiring $n + o(n)$ bits. This means that the majority of the MPHf description is not stored in the seed, like

with the brute-force construction, but in the retrieval data structure. A query for key x retrieves $f(x)$ from the retrieval data structure and returns $h_{s,f(x)}(x)$. Figure 1 gives an illustration of the ShockHash construction.

The beauty of ShockHash is that it can check 2^n different possible hash functions (determined by the 2^n different functions represented by the retrieval data structure) in linear time. Refer to Theorem 5.2 for details. This enables significantly faster construction than brute-force while still consuming the same amount of space.

As discussed in Section 2, a seed leads to a successful cuckoo hash table construction if and only if the corresponding random (multi)graph forms a pseudoforest. Each component of size c is a pseudotree if and only if it contains no more than c edges. This can be checked in linear time using connected components algorithms, or in close to linear time using an incremental construction of an ordinary cuckoo hash table. Nevertheless, the check quickly becomes a bottleneck in practice.

Filter by Bit Mask. To address this bottleneck, we therefore use a filter to quickly reject most seeds, namely seeds for which some table cell is not a candidate position of any of the keys. If there is such a cell, we already know that cuckoo hashing cannot succeed. Otherwise, cuckoo hashing might succeed. The filter can be implemented using simple shift and comparison operations. Also, the filter can use registers, in contrast to the more complex full construction. It is one of the main ingredients for making ShockHash practical and is easily proven to be very effective:

LEMMA 4.1. *The probability for a seed to pass the filter, i.e. for every table cell to be hit by at least one key, is at most $(1 - e^{-2} + o(1))^n \approx 0.864^n$.*

Proof. Let X_i denote the number of times that cell $i \in [n]$ is hit. Then (X_1, \dots, X_n) follows a multinomial distribution. The variables X_1, \dots, X_n are *negatively*

associated in the sense introduced in [26] and satisfy

$$\mathbb{P}(\forall i \in [n] : X_i \geq 1) \leq \prod_{i=1}^n \mathbb{P}(X_i \geq 1),$$

the intuition being that since the sum $X_1 + \dots + X_n = 2n$ is fixed, the events $\{X_i \geq 1\}$ for $i \in [n]$ are less likely to co-occur compared to corresponding independent events. Since $X_i \sim \text{Bin}(2n, \frac{1}{n})$ for all $i \in [n]$ we have

$$\mathbb{P}(X_i \geq 1) = 1 - (1 - \frac{1}{n})^{2n} = 1 - e^{-2} + o(1) \approx 0.864$$

and the claim follows. \square

A more careful analysis reveals that the probability to pass the filter is around b^n where $b = 2e^\lambda/(\lambda e^2) \approx 0.836$ and where $\lambda \approx 1.597$ is the solution to $2 = \lambda/(1 - e^{-\lambda})$. We give a proof in Appendix B.

Rotation Fitting. A technique to speed up brute-force search for perfect hash functions is *rotation fitting* [5] (see Section 2). The same idea can be used in ShockHash to accelerate the search. We distribute the keys to two sets using an ordinary 1-bit hash function. We then determine the bit mask of output values that are hit in both of the sets. Like in the bit mask filter, only if the logical OR of both masks has all bits set, it is worth testing the seed more closely. If we now cyclically rotate one of the bit masks and try again, we basically get a new chance of all output values being hit, without having to hash each key again. This corresponds to an addition modulo n to all keys of the second set. We conjecture that – as in Ref. [5] – this reduces the number of hash function evaluations by a factor of n , while the space overhead tends to zero.

5 Analysis

In this section, we analyze the space usage and construction time of ShockHash. The main challenge is to lower bound the probability that a hash function seed enables successful construction of the heavily overloaded cuckoo hash table. In the following we assume that a seed is given. We suppress it in notation.

We are hence given two hash functions $h_0, h_1 : S \rightarrow [n]$ and wish to know the probability that there exists a function $f : S \rightarrow \{0, 1\}$ such that $x \mapsto h_{f(x)}(x)$ is bijective, an event we abbreviate with $\text{ori}(f)$. It will be useful to consider the graph

$$G = ([n], \{\{h_0(x), h_1(x)\} \mid x \in S\}).$$

While similar to an Erdős-Renyi random graph, G may have self-loops¹ and multi-edges. Our model matches

¹In our implementation, we avoid self-loops for better performance, but allowing self-loops is easier to analyze.

Model A in [21]. There is a one-to-one correspondence between functions f with $\text{ori}(f)$ and 1-orientations of G , i.e. ways of directing G such that each node has indegree at most 1.²

In the following, we give two different proofs for the main result. Theorem 5.1 is a very simple combinatorial argument that we discovered during the review period. It shows that the probability for G to be 1-orientable is at least $(e/2)^{-n} \sqrt{\pi/(2n)}$. Theorem 5.2 then shows that the probability is at least $(e/2)^{-n} \pi/e$. Therefore, the simple argument is only a factor of $\mathcal{O}(\sqrt{n})$ less tight than the original, much more complex proof.

THEOREM 5.1. *Let G be a multigraph with n nodes and n edges which are uniformly selected from $[n]^2$. Then the probability that G is a pseudotree is at least $(e/2)^{-n} \sqrt{\pi/(2n)}$.*

Proof. The probability space underlying G is that of sampling $2n$ vertices (with replacement) and creating an edge from the samples $2i-1$ and $2i$ for each $i \in [n]$. For G to be a pseudotree it is sufficient (though not necessary) that the first $n-1$ created edges form a tree. There are n^{n-2} labelled n -node trees (Cayley’s Formula [8]). Since the ordering of the edges and the order of the two samples forming an edge does not matter, each of the trees can be generated in $2^{n-1}(n-1)!$ ways. The last two samples can be anything, giving us n^2 choices. By applying Stirling’s approximation, namely

$$n! \in \left[\left(\frac{n}{e}\right)^n \sqrt{2\pi n} \cdot e^{1/(12n+1)}, \left(\frac{n}{e}\right)^n \sqrt{2\pi n} \cdot e^{1/(12n)} \right],$$

we can show that the total probability to draw a pseudotree is at least

$$\frac{n^{n-2} 2^{n-1} (n-1)! n^2}{n^{2n}} \geq \left(\frac{e}{2}\right)^{-n} \sqrt{\pi/(2n)}. \quad \square$$

For the tighter proof, we write $\text{PF}(G)$ for the event that G is a pseudoforest. As pointed out in Section 2:

$$(5.1) \quad \text{PF}(G) \Leftrightarrow \exists f : \text{ori}(f).$$

In our case with n nodes and n edges, $\text{PF}(G)$ implies that G is a *maximal* pseudoforest, where every component is a pseudotree and not a tree. Note that a pseudotree that is not a tree admits precisely two 1-orientations because the unique cycle can be directed in two ways and all other edges must be directed away from the cycle. A useful observation is therefore

$$(5.2) \quad \text{PF}(G) \Rightarrow \#\{f \mid \text{ori}(f)\} = 2^{c(G)}$$

where $c(G)$ is the number of connected components of G .

²This assumes that there are two ways of directing a self-loop.

The basic idea of our proof is as follows. The probability that a random function is minimal perfect is $e^{-n} \text{poly}(n)$ (see Lemma 5.3). Each of the 2^n functions $f : S \rightarrow \{0, 1\}$ has that chance of satisfying $\text{ori}(f)$ and yielding an MPHf. However, simply multiplying $e^{-n} \text{poly}(n)$ by 2^n does not necessarily yield an approximation for the probability that such an f exists. The key point here is that the 2^n functions determined by the 2^n different options for f are correlated. If there are some graphs with many 1-orientations, we may find many MPHfs at once and the probability that at least one 1-orientation exists is reduced. A key step will therefore be to show that we tend to find only a few MPHfs at once. This amounts to analyzing the distribution of the number of components in random maximal pseudoforests. The main proof in Theorem 5.2 then formally bounds the probability that a random graph can be 1-oriented, juggling different probability spaces.

In the following it will be useful to reveal G in two steps. First the degree of each node is revealed, by randomly distributing $2n$ stubs (or half-edges) among the n nodes. This yields a so-called *configuration model* [33] from which the edges are then obtained by randomly matching the stubs. The following Lemma should clarify what exactly it is we need.

LEMMA 5.1. *Let $x_1, \dots, x_{2n} \in [n]$ be independent and uniformly random. The graphs G_1, G_2, G_3 defined in the following have the same distribution as G .*

1. $G_1 = ([n], \{\{x_{2i-1}, x_{2i}\} \mid i \in [n]\})$.
2. $G_2 = ([n], \{\{x_i, x_j\} \mid \{i, j\} \in M\})$ where M is a uniformly random perfect matching of $[2n]$, i.e. a partition of $[2n]$ into n sets of size 2.
3. G_3 is defined like G_2 , except that M is obtained in a sequence of n rounds. In each round an unmatched number $i \in [2n]$ is chosen arbitrarily and matched to a distinct unmatched number j , chosen uniformly at random. The choice of i may depend on x_1, \dots, x_{2n} and on the set of numbers matched previously.

The reason for considering these alternative probability spaces for G is that they permit conditioning on partial information about G (such as its degree sequence implicit in x_1, \dots, x_{2n}) but retaining a clean probability space for the remaining randomness.

Proof. Compared to G , the definition of G_1 simply collects the $2n$ relevant hash values in a single list.³ Concerning G_2 , imagine that M is revealed first. Conditioned

³Here, we assume that h_0 and h_1 are fully random hash functions and given for free, which is common in previous papers (Simple Uniform Hashing Assumption) [10, 11, 34, 35].

on M , G_2 is composed of n uniformly random edges like G_1 . Concerning G_3 , the key observation is that M is a uniformly random matching even if the number to be randomly matched in every round is chosen by an adversary. A formal proof could consider any arbitrary adversarial strategy and use induction. \square

LEMMA 5.2. *Let G_n be the random graph sampled from the configuration model with n nodes of degree 2, i.e. the 2-regular graph obtained by randomly joining $2n$ stubs that are evenly distributed among n nodes. Then the number $c(G_n)$ of components of G satisfies $\mathbb{E}(2^{c(G_n)}) \leq e \cdot \sqrt{2n}$.*

We remark that a similar proof shows that $\mathbb{E}(c(G_n)) \in \mathcal{O}(\log n)$. Note also the similarity to the locker puzzle, which analyzes the length of the largest cycle in a random permutation [41].

Proof. We will find a recurrence for $d_n := \mathbb{E}(2^{c(G_n)})$. Consider an arbitrary node v of G_n and one of the stubs at v . This stub forms an edge with some other stub. We have $n - 1$ other nodes, each with 2 stubs, and we have the second stub at v . Each of these $2n - 1$ stubs is matched with v with equal probability. Therefore, the probability that v has a self-loop is $\frac{1}{2n-1}$.

(1) Conditioned on v having a self-loop, we have found an isolated node. The distribution of the remaining graph is that of G_{n-1} and the conditional expectation of $2^{c(G)}$ is therefore $\mathbb{E}(2^{1+c(G_{n-1})}) = 2d_{n-1}$.

(2) Now condition on the formed edge connecting v to $w \neq v$. We can now merge the nodes to a single one without affecting the number of components. The merged node inherits two unused stubs, one from v and one from w . The distribution of the remaining graph is that of G_{n-1} , so in this case, the conditional expectation of $2^{c(G)}$ is simply d_{n-1} .

These two cases lead us to the following recurrence:

$$d_n = \frac{1}{2n-1} 2d_{n-1} + \left(1 - \frac{1}{2n-1}\right) d_{n-1} = \left(1 + \frac{1}{2n-1}\right) d_{n-1}.$$

With the base case $d_0 = 1$, we can solve the recurrence and bound its value as follows, using that $\ln(1+x) \leq x$ for $x \geq 0$ as well as $H_n := \sum_{i=1}^n \frac{1}{i} \leq 1 + \ln n$:

$$\begin{aligned} d_n &= \prod_{i=1}^n \left(1 + \frac{1}{2i-1}\right) = \exp\left(\sum_{i=1}^n \ln\left(1 + \frac{1}{2i-1}\right)\right) \\ &\leq \exp\left(\sum_{i=1}^n \frac{1}{2i-1}\right) \leq \exp((1 + H_{2n-1})/2) \\ &\leq \exp(1 + \ln(2n)/2) \leq e \cdot \sqrt{2n}. \quad \square \end{aligned}$$

Let us now re-state the known result proven in RecSplit [14], which bounds the probability that a random function is minimal perfect. We will use this later when proving Theorem 5.2.

LEMMA 5.3. (SEE [14]) *A random function $h : S \rightarrow [n]$ on a set S of n keys, is minimal perfect (i.e. is a bijection) with probability $e^{-n} \sqrt{2\pi n} \cdot (1 + o(1))$.*

Proof. Given S , there are n^n possible functions from S to $[n]$ and $n!$ of them are bijective. Therefore, the probability that a randomly selected function is minimal perfect is $n!/n^n$. The claim is obtained by applying Stirling's approximation. \square

Now let us continue with the main theoretical contribution of this paper.

THEOREM 5.2. *Let $h_0, h_1 : S \rightarrow [n]$ be uniformly random functions. The probability that there exists $f : S \rightarrow \{0, 1\}$ such that $x \mapsto h_{f(x)}(x)$ is bijective is at least $(e/2)^{-n} e^{-1} \sqrt{\pi}$.*

Proof. Recall our shorthand $\text{ori}(f)$ for the event that $x \mapsto h_{f(x)}(x)$ is bijective.

For any non-negative random variable X we have

$$\mathbb{E}(X) = \mathbb{P}(X > 0) \cdot \mathbb{E}(X \mid X > 0).$$

Setting $X = \#\{f \mid \text{ori}(f)\}$ and rearranging this for $\mathbb{P}(X > 0)$ yields

$$\mathbb{P}(\exists f : \text{ori}(f)) = \frac{\mathbb{E}(\#\{f \mid \text{ori}(f)\})}{\mathbb{E}(\#\{f \mid \text{ori}(f)\} \mid \exists f : \text{ori}(f))}.$$

We will consider the numerator and denominator in turn.

Numerator: Expectation. Linearity of expectation (holding even for dependent variables) yields

$$\begin{aligned} \mathbb{E}(\#\{f \mid \text{ori}(f)\}) &= \sum_f \mathbb{P}(\text{ori}(f)) \\ &= \sum_f \mathbb{P}(x \mapsto h_{f(x)}(x) \text{ is bijective on } S). \end{aligned}$$

For any fixed f , the function $x \mapsto h_{f(x)}(x)$ assigns independent random numbers to each $x \in S$, i.e. is a random function as considered in Lemma 5.3 and hence bijective with probability $e^{-n} \sqrt{2\pi n} \cdot (1 + o(1))$. We therefore get

$$(5.3) \quad \mathbb{E}(\#\{f \mid \text{ori}(f)\}) \geq 2^n \cdot e^{-n} \sqrt{2\pi n}.$$

Denominator: Conditional Expectation. Using observations (5.1) and (5.2) we can shift our attention onto the graph G :

$$\mathbb{E}(\#\{f \mid \text{ori}(f)\} \mid \exists f : \text{ori}(f)) = \mathbb{E}(2^{c(G)} \mid \text{PF}(G)).$$

By virtue of Lemma 5.1 we can moreover move to a configuration model à la G_3 . We first reveal the locations x_1, \dots, x_{2n} of the $2n$ stubs (hence the degree

sequence of G_3) and then consider the following *peeling process* [24, 31, 43] that reveals edges of G_3 and simplifies G_3 in a step-by-step fashion.

As long as there exists a node v with only one stub, firstly, match it to a random stub to form a corresponding edge $\{v, w\}$ (consuming the two stubs) and, secondly, remove the node v and the newly formed edge $\{v, w\}$. These removals do not affect the number of components of the resulting graph (since v was connected to w), nor whether the resulting graph is a pseudoforest (since the component of w lost one node and one edge).

Let n' be the number of nodes that remain after peeling and let G' be the graph obtained by matching the remaining stubs. As discussed we have $\text{PF}(G_3) \Leftrightarrow \text{PF}(G')$ and $c(G') = c(G_3)$. Since the average degree of G_3 is 2 and since we removed one node and one edge in every round, the average degree of G' is also 2. There are two cases.

Case 1: Some node of G' has degree 0. Then $\neg \text{PF}(G')$ because some component of G' must have average degree > 2 .

Case 2: No node of G' has degree 0. Since we ran the peeling process, there is also no node of G' with degree 1. Hence, every node of G' has degree 2. This makes G' a collection of cycles. In particular $\text{PF}(G')$ holds. Moreover, the generation of G' is precisely the situation discussed in Lemma 5.2.

Because the two cases imply opposite results on G' being a pseudoforest, we know that $\text{PF}(G')$ holds if *and only if* we arrive in Case 2. While we have no understanding of the distribution of n' , we can nevertheless compute:

$$\begin{aligned} \mathbb{E}(2^{c(G)} \mid \text{PF}(G)) &= \mathbb{E}(2^{c(G_3)} \mid \text{PF}(G_3)) \\ &= \mathbb{E}(2^{c(G')} \mid \text{PF}(G')) = \mathbb{E}(2^{c(G')} \mid \text{Case 2}) \\ &\leq \max_{1 \leq i \leq n} \mathbb{E}(2^{c(G')} \mid \text{Case 2 with } n' = i) \\ (5.4) \quad &\leq \max_{1 \leq i \leq n} e^{\sqrt{2i}} = e^{\sqrt{2n}}. \end{aligned}$$

Putting the Observations Together. Combining our bounds on numerator 5.3 and denominator 5.4 gives the final result

$$\begin{aligned} \mathbb{P}(\exists f : \text{ori}(f)) &\geq 2^n e^{-n} \sqrt{2\pi n} / (e^{\sqrt{2n}}) \\ &= (e/2)^{-n} e^{-1} \sqrt{\pi}. \quad \square \end{aligned}$$

ShockHash tries different hash function seeds, which is equivalent to generating random graphs. Given the probability that the random graph is a pseudoforest, it is easy to determine the expected number of graphs ShockHash needs to try in order to find an MPHf. This leads directly to the space usage and construction time of ShockHash, which we analyze in the following.

THEOREM 5.3. *A ShockHash minimal perfect hash function mapping n keys to $[n]$ needs $\log_2(e)n + o(n)$ bits of space in expectation and can be constructed in expected time $\mathcal{O}((e/2)^n \cdot n)$.*

Proof. From Theorem 5.2, we know that the probability of the graph being 1-orientable is $\geq (e/2)^{-n}e^{-1}\sqrt{\pi}$. We construct these graphs uniformly at random, so the expected number of seeds to try is $\leq (e/2)^n e/\sqrt{\pi}$. The space usage is given by the $n + o(n)$ bits for the retrieval data structure, plus the bits to store the hash function index:

$$\begin{aligned} \mathbb{E}(\log_2(\text{seeds to try})) &\stackrel{*}{\leq} \log_2(\mathbb{E}(\text{seeds to try})) \\ &\leq \log_2((e/2)^n e/\sqrt{\pi}) = \log_2(e)n - n + \mathcal{O}(1). \end{aligned}$$

In the step annotated with $*$, we use Jensen’s inequality [25] and the fact that \log_2 is concave.

For determining if any of the 2^n functions corresponding to such a seed is valid, we can use an algorithm for finding connected components, as described in Section 4. This takes linear time for each of the seeds, resulting in an overall construction time of $\mathcal{O}((e/2)^n \cdot n)$. Constructing the retrieval data structure is then possible in linear time [13] and happens only once, so it is irrelevant for the asymptotic time here. \square

For the brute-force approach, each of the $e^n/\sqrt{2\pi n}$ expected trials needs n hash function evaluations, leading to a construction time of $\mathcal{O}(e^n\sqrt{n})$. Now, as shown in Theorem 5.3, ShockHash needs time $\mathcal{O}((e/2)^n \cdot n)$. This makes ShockHash almost 2^n times faster than the previous state of the art. Given the observations in Ref. [5], we conjecture that ShockHash with rotation fitting reduces the number of hash function evaluations by an additional factor of n , while the space overhead tends to zero.

6 ShockHash-RS = ShockHash + RecSplit

As mentioned in the introduction, real world MPHf constructions usually do not search for a function for the entire input set directly. Instead, they partition the input of size N and then search on smaller subproblems of size n . Even though ShockHash demonstrates significant speedups, by itself, it still needs exponential running time.

To demonstrate the usefulness of ShockHash in practice, we integrate it as a base case into the highly space efficient RecSplit framework (see Section 2) and obtain ShockHash-RS. We keep the general structure of RecSplit intact, and only replace the bijection search in the leaves. For each leaf, we store the mapping from its keys to their hash function indices. Finally, after all leaves are processed, we construct the 1-bit retrieval data structure with all the N entries together.

Fanouts. RecSplit tries to balance the difficulty between the splittings and the bijections. ShockHash improves the performance of the bijections significantly but does not modify the way that the splittings are calculated. In this paper, we focus only on the bijections. Similar techniques may work for splitting with Appendix A.3 outlining first ideas.

To balance the amount of work done between splittings and bijections, we need to adapt the splitting parameters using the same techniques as the RecSplit paper [14]. Instead of fanouts $\lceil 0.35n + 0.5 \rceil$ and $\lceil 0.21n + 0.9 \rceil$ for the two last splitting levels (see Section 2), our numerical evaluation gives $\lceil 0.10n + 0.5 \rceil$ and $\lceil 0.073n + 0.9 \rceil$ for ShockHash-RS. However, preliminary experiments show that this is not optimal in practice. ShockHash, especially with rotation fitting, is so much faster that the additional time invested into the splittings does not pay off. We find experimentally that setting the lowest splitting level to 4 and the second lowest to 3 achieves much better results in practice. To also provide faster and space-inefficient configurations, we set all fanouts to 2 when selecting leaf size $n \leq 24$.

SIMD Parallelization. In ShockHash, we use SIMD parallelism in two locations. First, we use SIMD to hash all keys and determine the bit mask of the two sets. A key point here is to collect the bitwise OR of individual lanes and to only add the lanes together after all keys are done. Second, we use SIMD to evaluate the bit mask filter (see Section 4) with different rotations in parallel. Our implementation uses AVX-512 (8 64-bit values) if available and AVX2 (4 64-bit values) otherwise.

7 Refinements, Variants and Future Directions

In the following section, we describe variants and implementation details of ShockHash. Additionally, we give ideas for future directions.

Implementation Details. Determining whether a given graph is a pseudoforest can be achieved in linear time using a connected components algorithm. However, this is likely not practical because the graph data structure needs to be built. In practice, we therefore use incremental cuckoo hash table construction with near linear time. In Appendix A.1, we describe another approach using a union-find data structure that is particularly interesting for the rotation fitting variant. However, in our experiments, we find incremental cuckoo hash table construction to be more efficient. In Appendix A.2, we describe a way to reduce the number of hash function evaluations in the rotation fitting variant. The idea is to fix the hash function for the first group of keys over a segment of k tried seeds. For large n , this saves considerable time while having negligible impact on the space consumption.

Parallelization. While our implementation of ShockHash-RS supports basic multi-threaded construction based on SIMDRecSplit [5], we do not discuss this here. A missing piece for a full parallelization is the BuRR retrieval data structure [13] which is currently only available as sequential code. BuRR construction is parallelizable on p cores with additional space overhead of about p machine words. However, for highly space-efficient MPHFs, which are the main focus of this paper, constructing the retrieval data structure is not a bottleneck. GPU parallelization might be difficult and inefficient for cuckoo hashing as it has irregular control flow and memory access. Since filtering asymptotically dominates the computations for highly space-efficient variants, one might look at a hybrid implementation where a GPU produces a stream of seeds defining random graphs that cover all nodes and where a multicore CPU performs further stages of computation.

Fast Splitting for RecSplit. ShockHash-RS significantly improves bijection search within the RecSplit framework which can make brute-force search for splittings a significant part of the running time in some configurations. In Appendix A.3 we therefore outline how to find a splitting with a constant number of trials in expectation. The idea is to replace the binary splitting hash function by one with a larger range and to store a compressed threshold value that leads to an exact split.

Beyond RecSplit. ShockHash-RS suffers from comparatively large query times as RecSplit queries have to traverse a splitting tree, decoding variable-bitlength data on each level. This overhead is not inherent in ShockHash itself and we could also integrate it into other frameworks. One way is to just use *two levels of hash-based splitting* allowing for variable sized leaves (see Appendix A.4). ShockHash can also be adapted to the *Hash-and-Displace* framework (see Section 3). For each bucket, we now look for hash function pairs whose overall result is a pseudoforest. Once more, the remaining decisions are made using cuckoo hashing and stored in a retrieval data structure. Compared to splitting based approaches, this is perhaps more elegant as the global hash range alleviates the need for storing and using splitting information like prefix sums. Refer to Appendix A.5 for more details.

8 Experiments

We run our experiments on an Intel i7 11700 processor with 8 cores and a base clock speed of 2.5 GHz. The machine runs Ubuntu 22.04 with Linux 5.15.0 and supports AVX-512 instructions. We use the GNU C++ compiler version 11.2.0 with optimization flags `-O3 -march=native`. For the competitors written in Rust, we compile in release mode with `target-cpu=native`. As input data, we use strings of uniform random length

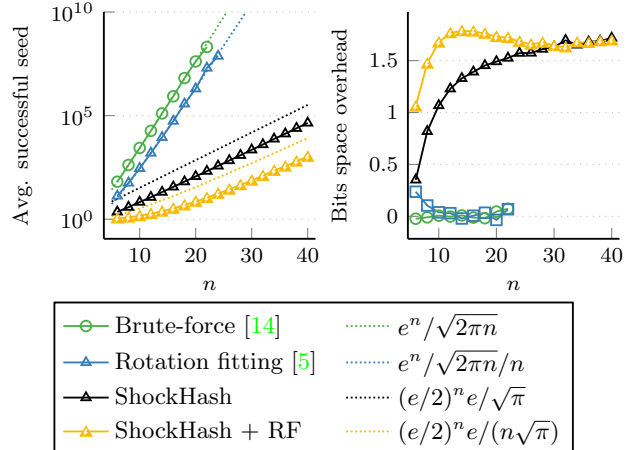


Figure 2: Left: Average successful seed of ShockHash compared with more simple brute-force techniques. Right: Idealized space overhead over the lower bound $\log_2(n^n/n!)$ in bits. If the average seed is s we charge $\log_2(s)$ bits, plus n bits for retrieval (if applicable).

$\in [10, 50]$ containing random characters except for the zero byte. Note that, as a first step, almost all compared codes generate a *master hash code* of each key using a high quality hash function. Any possible additional hash function can then be evaluated on the master hash code in constant time, independent of the input distribution. All experiments use a single thread. While almost all compared codes have a multi-threaded implementation, and perfect hashing can be parallelized trivially by partitioning, this is not the focus here. The code and scripts needed to reproduce our experiments are available on GitHub under the General Public License [39, 40].

8.1 Number of Trials in Theory and Practice.

In Figure 2, we compare the average number of hash function trials over multiple runs for each bijection search technique. From the different slopes of the curves, it is clearly visible that rotation fitting [5] saves a polynomial factor compared to plain brute-force, while ShockHash saves an exponential factor. Additionally, we plot the shown upper bounds for the number of trials of brute-force and ShockHash. For the rotation fitting variants, we plot the base variants divided by n , which is not formally shown to be a theoretical bound, but is an obvious conjecture. The plot shows that brute-force and rotation fitting are close to the given functions. For ShockHash, the measurements are even better than the theory, which indicates that our proof in Theorem 5.2 is not tight. Surprisingly, ShockHash seems to match the function we get when dividing our analysis by \sqrt{n} . We conjecture that the expected number of 1-orientations

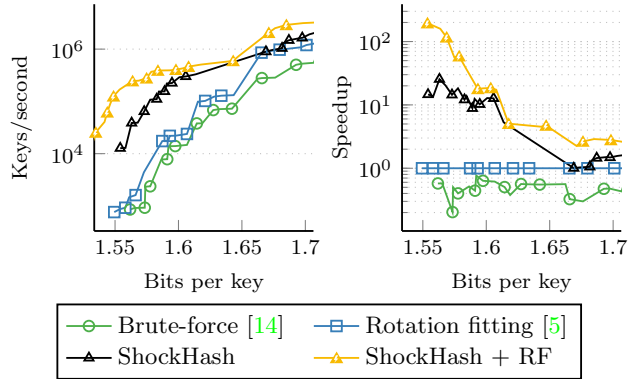


Figure 3: Space versus construction time of RecSplit, with different base case methods of calculating the leaves plugged in. Basic version without SIMD parallelization, $N = 1$ million. The plot on the right gives speedups⁴ relative to the current state of the art, the rotation fitting method [5]. We plot all Pareto optimal data points but only show markers for every second point to increase readability. Therefore, the lines might bend on positions without markers.

of a random pseudoforest might actually not be $e \cdot \sqrt{2n}$, but close to constant. This makes ShockHash an even better replacement for the brute-force technique.

Figure 2 also gives the difference between the idealized space consumption and the space lower bound $\log_2(n^n/n!)$. It indicates that ShockHash loses space sublinear in n , which becomes negligible for larger n . However, this explains why we need to select larger n in ShockHash-RS compared to RecSplit to achieve the same space consumption per key. Even with these larger n , ShockHash construction is significantly faster than brute-force.

8.2 ShockHash-RS. In this section, we evaluate ShockHash-RS, which uses ShockHash as a base case in the RecSplit framework. For BuRR retrieval [13] we use 2-bit bumping info and 128-bit words (64 bits for $n \leq 24$). To partition keys to buckets, we sort them by their key using IPS²Ra [1]. We also apply the idea to reduce hash function evaluations by fixing the hash function for half of the keys over multiple search iterations. Refer to Appendix A.2 for more details.

Figure 3 compares the space versus construction

⁴Note that giving speedups is non-trivial here because there might not be a configuration that achieves the same space usage that we could compare with. We therefore calculate the speedup relative to an interpolation of the next larger and next smaller data points. This is reasonable since RecSplit instances can be interpolated as well by hashing a certain fraction of keys into data structures with different configurations.

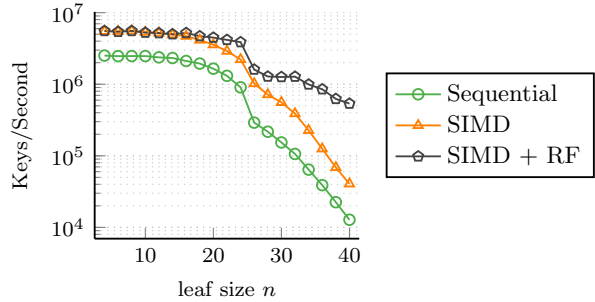


Figure 4: Construction performance of ShockHash-RS using different leaf sizes. With and without SIMD parallelization. $N = 1$ million keys, $b = 2000$.

time tradeoff of plain brute-force [14], brute-force with rotation fitting [5], and ShockHash (with and without rotation fitting). For each method we measure many parameter settings and only plot those that are Pareto-optimal, i.e., not dominated by another configuration of the same method regarding both space and construction time. Using the same amount of space, basic ShockHash can construct MPHFs up to 25 times faster than brute-force with rotation fitting. ShockHash with rotation fitting improves that to a factor of up to 195. Here, ShockHash further profits from the fact that filtering the rotations can happen efficiently in registers.

Figure 4 plots the construction performance of ShockHash-RS with different leaf sizes with and without SIMD parallelization, as well as with rotation fitting. ShockHash-RS mainly profits from rotation fitting if the leaf size is $n > 20$ – for small leaves it is likely that several rotations cover all leaf positions. Indeed, the solution of $(1 - 1/e^2)^n = 1/n$ is about 21 (see Lemma 4.1). Figure 4 also shows that the SIMD parallelization improves the construction time significantly for all values of n . The drop of construction performance at $n \geq 25$ is caused by the fact that we switch the splitting strategy (and the BuRR configuration) for increased space efficiency.

8.3 Comparison with Competitors. We now compare ShockHash-RS with competitors from the literature. Competitors include CHD [2], SicHash [28], PTHash [37], FMPHGO [3], RecSplit [14], and SIMDRecSplit [5]. We do not plot BBHash [30] because it is significantly outperformed by FMPH [3], another implementation of the same technique. While SIMDRecSplit also includes a fast GPU implementation, we do not compare it here, as it would be unfair because of the different hardware architecture.

Construction. Figure 5 compares the construction throughput of different competitors. Note that we are mainly interested in the space usage configurations close

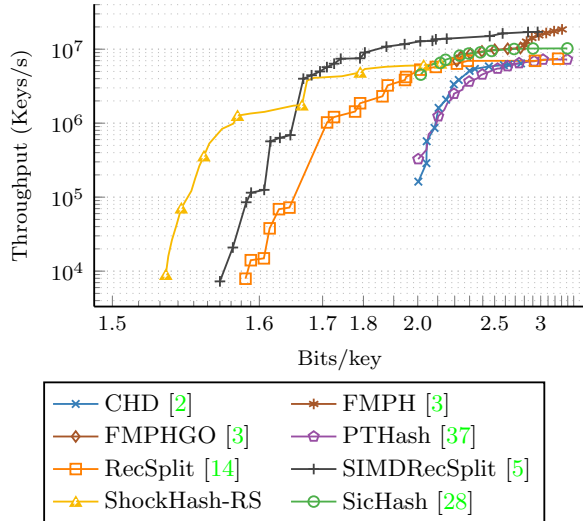


Figure 5: Pareto front of the space usage of different competitors. $N = 10$ million keys. Note that both axes are logarithmic. For ShockHash-RS, we use ShockHash with SIMD and rotation fitting inside RecSplit. For ShockHash-RS, SicHash and PTHash, we plot all Pareto optimal data points but only show markers for every fourth point to increase readability. Therefore, the lines might bend on positions without markers.

to the theoretical lower bound. Therefore, the Figure uses a logarithmic x-axis. Only the RecSplit based competitors achieve space usage below 1.9 bits per key. At configurations with less than 1.65 bits per key, ShockHash-RS can significantly outperform SIMDRecSplit. ShockHash-RS is focused even more on the space efficient configurations than SIMDRecSplit. Therefore, it does not achieve the same throughput as SIMDRecSplit for the less space efficient configurations. This is not surprising because with these configurations, searching for bijections is fast, so constructing the retrieval data structure has a significant performance penalty. If SIMD operations are not available for ShockHash-RS and competitors, ShockHash-RS shows even more significant speedups to the next best competitor, as already discussed in the previous section.

Table 1 gives a selection of typical configurations. For SicHash [28], PTHash [37] and FMPHGO [3], we use the configurations given in the original papers, where FMPHGO is configured to use the hash cache. For RecSplit-based techniques, we mainly use space-efficient configurations with $b = 2000$ and select the leaf size n such that a similar space consumption is achieved. Comparing the configurations with a space consumption of 1.56 bit per key, ShockHash-RS is about 75 times faster than the next competitor. Comparing different methods where each is given about 10 minutes of construction

Table 1: Query and construction performance of typical configurations of ShockHash-RS and competitors. $N = 10$ million keys. Space is given in bits per key and construction time is given in ns per key. For ShockHash-RS, we use ShockHash with SIMD and rotation fitting inside RecSplit.

Method	Space	Constr.	Query
FMPHGO, $\gamma=2.0, s=4, b=16$	2.860	90 ns	53 ns
FMPHGO, $\gamma=1.0, s=4, b=16$	2.212	135 ns	69 ns
PTHash, $c=11.0, \alpha=0.88, D-D$	4.379	135 ns	25 ns
PTHash, $c=7.0, \alpha=0.99, C-C$	3.524	198 ns	20 ns
PTHash, $c=6.0, \alpha=0.99, EF$	2.345	247 ns	34 ns
SicHash, $\alpha=0.9, p_1=21, p_2=78$	2.412	116 ns	40 ns
SicHash, $\alpha=0.97, p_1=45, p_2=31$	2.082	169 ns	41 ns
RecSplit, $n=8, b=100$	1.792	713 ns	74 ns
RecSplit, $n=14, b=2000$	1.585	125 521 ns	97 ns
SIMDRecSplit, $n=8, b=100$	1.808	117 ns	80 ns
SIMDRecSplit, $n=14, b=2000$	1.585	11 749 ns	108 ns
SIMDRecSplit, $n=16, b=2000$	1.560	137 902 ns	100 ns
ShockHash-RS, $n=30, b=100$	1.654	563 ns	82 ns
ShockHash-RS, $n=30, b=2000$	1.583	787 ns	114 ns
ShockHash-RS, $n=39, b=2000$	1.556	1 805 ns	118 ns
ShockHash-RS, $n=58, b=2000$	1.523	111 593 ns	115 ns

time, RecSplit is able to produce a perfect hash function with 1.58 bits per key. During the course of three years, this space consumption was improved to 1.56 bits per key (SIMDRecSplit) and now to only 1.52 bits per key (ShockHash-RS). Compared to SIMDRecSplit, ShockHash-RS makes the gap to the lower space bound of ≈ 1.442 bits per key about 30% smaller. Using a single CPU thread, ShockHash-RS achieves a space usage close to what was previously only achieved using a GPU [5].

Queries. Table 1 also shows the query throughput of typical configurations. RecSplit-based techniques have slower queries than the other techniques as they have to traverse several levels of a tree, decoding variable-bitlength data in each step. ShockHash-RS additionally needs to access a retrieval data structure. However, when comparing configurations that achieve a similar space efficiency, the query performance of ShockHash-RS is similar to competitors. This shows that the overhead of the retrieval operation is small compared to the work for traversing the heavily compressed tree. When query performance is the main concern, PTHash [37] trades space usage for much faster queries.

9 Conclusion and Future Work

By combining trial-and-error search with retrieval data structures computed using cuckoo hashing, ShockHash achieves an exponential speedup over plain brute-force (almost a factor 2^n). This enables the currently most work-efficient way to achieve near space-optimal minimal perfect hash functions and breaks the dominance of the previous best methods that relied on pure brute-force for their base-case subproblems.

ShockHash-RS (i.e. ShockHash in the RecSplit framework) is up to two orders of magnitude faster than the state of the art when comparing sequential codes (with and without SIMD acceleration). We expect that this will extend to parallel multicore and GPU implementations, at least when looking for highly space-efficient functions.

It would be interesting to use ShockHash outside the RecSplit framework in order to accelerate query times (likely tolerating slightly higher space consumption). This could be done directly by using a faster and more “flat” decomposition of the input problem into subproblems. ShockHash makes this more promising since it can support larger base cases than brute-force. One could also generalize perfect hash functions based on Hash-and-Displace [2, 37] to search for pseudo-forests rather than perfect hash functions directly.

We believe that further exponential reduction of the search space based on ShockHash will be possible in the future. A first step in that direction is *bipartite* ShockHash, which we developed during the review period. Instead of sampling random graphs, bipartite ShockHash samples *bipartite* random graphs – it uses two hash functions of range $[n/2]$, where one of them is shifted by $n/2$. During search, it builds a pool of hash function candidates and then tries all pairs that can be formed between them. By filtering the candidates *before* combining them, this achieves an additional exponential speedup on top of the one achieved by ShockHash. Further work is needed to properly tune and analyze bipartite ShockHash, but we give an initial description in a technical report [27].

Acknowledgements. This project has received funding from the European Research Council (ERC) under the European Union’s Horizon 2020 research and innovation programme (grant agreement No. 882500) as well as from the German Research Foundation (DFG) grant 465963632.



References

- [1] Michael Axtmann, Sascha Witt, Daniel Ferizovic, and Peter Sanders. Engineering in-place (shared-memory) sorting algorithms. *ACM Trans. Parallel Comput.*, 9(1):2:1–2:62, 2022. doi:10.1145/3505286.
- [2] Djamel Belazzougui, Fabiano C. Botelho, and Martin Dietzfelbinger. Hash, displace, and compress. In *ESA*, volume 5757 of *Lecture Notes in Computer Science*, pages 682–693. Springer, 2009. doi:10.1007/978-3-642-04128-0_61.
- [3] Piotr Beling. Fingerprinting-based minimal perfect hashing revisited. *ACM Journal of Experimental Algorithmics*, 2023.
- [4] Michael A. Bender, Martin Farach-Colton, Mayank Goswami, Rob Johnson, Samuel McCauley, and Shikha Singh. Bloom filters, adaptivity, and the dictionary problem. In *FOCS*, pages 182–193. IEEE Computer Society, 2018. doi:10.1109/FOCS.2018.00026.
- [5] Dominik Bez, Florian Kurpicz, Hans-Peter Lehmann, and Peter Sanders. High performance construction of RecSplit based minimal perfect hash functions. In *ESA*, volume 274 of *LIPICs*, pages 19:1–19:16. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2023. doi:10.4230/LIPICs.ESA.2023.19.
- [6] Fabiano C. Botelho, Rasmus Pagh, and Nivio Ziviani. Perfect hashing for data management applications. *CoRR*, abs/cs/0702159, 2007.
- [7] Fabiano C. Botelho, Rasmus Pagh, and Nivio Ziviani. Practical perfect hashing in nearly optimal space. *Inf. Syst.*, 38(1):108–131, 2013. doi:10.1016/J.IS.2012.06.002.
- [8] Arthur Cayley. A theorem on trees. *Quart. J. Math.*, 23:376–378, 1878.
- [9] Jarrod A. Chapman, Isaac Ho, Sirisha Sunkara, Shujun Luo, Gary P. Schroth, and Daniel S. Rokhsar. Meraculous: De novo genome assembly with short paired-end reads. *PLOS ONE*, 6(8):1–13, 08 2011. doi:10.1371/journal.pone.0023501.
- [10] Martin Dietzfelbinger and Friedhelm Meyer auf der Heide. A new universal class of hash functions and dynamic hashing in real time. In *ICALP*, volume 443 of *Lecture Notes in Computer Science*, pages 6–19. Springer, 1990. doi:10.1007/BFB0032018.
- [11] Martin Dietzfelbinger and Michael Rink. Applications of a splitting trick. In *ICALP (1)*, volume 5555 of *Lecture Notes in Computer Science*, pages 354–365. Springer, 2009. doi:10.1007/978-3-642-02927-1_30.
- [12] Martin Dietzfelbinger and Christoph Weidling. Balanced allocation and dictionaries with tightly packed constant size bins. In *ICALP*, volume 3580 of *Lecture Notes in Computer Science*, pages 166–178. Springer, 2005. doi:10.1007/11523468_14.
- [13] Peter C. Dillinger, Lorenz Hübschle-Schneider, Peter Sanders, and Stefan Walzer. Fast succinct retrieval and approximate membership using ribbon. In *SEA*, volume 233 of *LIPICs*, pages 4:1–4:20. Schloss Dagstuhl

- Leibniz-Zentrum für Informatik, 2022. doi:10.4230/LIPIC.SEA.2022.4.
- [14] Emmanuel Esposito, Thomas Mueller Graf, and Sebastian Vigna. RecSplit: Minimal perfect hashing via recursive splitting. In *ALENEX*, pages 175–185. SIAM, 2020. doi:10.1137/1.9781611976007.14.
- [15] Bin Fan, David G. Andersen, Michael Kaminsky, and Michael Mitzenmacher. Cuckoo filter: Practically better than bloom. In *CoNEXT*, pages 75–88. ACM, 2014. doi:10.1145/2674005.2674994.
- [16] Dimitris Fotakis, Rasmus Pagh, Peter Sanders, and Paul G. Spirakis. Space efficient hash tables with worst case constant access time. *Theory Comput. Syst.*, 38(2):229–248, 2005. doi:10.1007/S00224-004-1195-X.
- [17] Nikolaos Fountoulakis, Megha Khosla, and Konstantinos Panagiotou. The multiple-orientability thresholds for random hypergraphs. *Comb. Probab. Comput.*, 25(6):870–908, 2016. doi:10.1017/S0963548315000334.
- [18] Nikolaos Fountoulakis and Konstantinos Panagiotou. Sharp load thresholds for cuckoo hashing. *Random Struct. Algorithms*, 41(3):306–333, 2012. doi:10.1002/RSA.20426.
- [19] Edward A. Fox, Qi Fan Chen, and Lenwood S. Heath. A faster algorithm for constructing minimal perfect hash functions. In *SIGIR*, pages 266–273. ACM, 1992. doi:10.1145/133160.133209.
- [20] Michael L. Fredman, János Komlós, and Endre Szemerédi. Storing a sparse table with $O(1)$ worst case access time. *J. ACM*, 31(3):538–544, 1984. doi:10.1145/828.1884.
- [21] Alan Frieze and Michał Karoński. *Introduction to random graphs*. Cambridge University Press, 2016.
- [22] Solomon W. Golomb. Run-length encodings (corresp.). *IEEE Trans. Inf. Theory*, 12(3):399–401, 1966. doi:10.1109/TIT.1966.1053907.
- [23] Torben Hagerup and Torsten Tholey. Efficient minimal perfect hashing in nearly minimal space. In *STACS*, volume 2010 of *Lecture Notes in Computer Science*, pages 317–326. Springer, 2001. doi:10.1007/3-540-44693-1_28.
- [24] Svante Janson and Malwina J. Luczak. A simple solution to the k -core problem. *Random Struct. Algorithms*, 30(1-2):50–62, 2007. doi:10.1002/RSA.20147.
- [25] Johan Ludwig William Valdemar Jensen. Sur les fonctions convexes et les inégalités entre les valeurs moyennes. *Acta mathematica*, 30(1):175–193, 1906.
- [26] Kumar Joag-Dev and Frank Proschan. Negative association of random variables with applications. *The Annals of Statistics*, 11(1):286 – 295, 1983. doi:10.1214/aos/1176346079.
- [27] Hans-Peter Lehmann, Peter Sanders, and Stefan Walzer. Bipartite ShockHash: Pruning ShockHash search for efficient perfect hashing. *CoRR*, abs/2310.14959, 2023. doi:10.48550/ARXIV.2310.14959.
- [28] Hans-Peter Lehmann, Peter Sanders, and Stefan Walzer. Sichash - small irregular cuckoo tables for perfect hashing. In *ALENEX*, pages 176–189. SIAM, 2023. doi:10.1137/1.9781611977561.CH15.
- [29] Marc Lelarge. A new approach to the orientation of random hypergraphs. In *SODA*, pages 251–264. SIAM, 2012. doi:10.1137/1.9781611973099.23.
- [30] Antoine Limasset, Guillaume Rizk, Rayan Chikhi, and Pierre Peterlongo. Fast and scalable minimal perfect hashing for massive key sets. In *SEA*, volume 75 of *LIPICs*, pages 25:1–25:16. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2017. doi:10.4230/LIPIC.SEA.2017.25.
- [31] Michael Molloy. Cores in random hypergraphs and boolean formulas. *Random Struct. Algorithms*, 27(1):124–135, 2005. doi:10.1002/RSA.20061.
- [32] Ingo Müller, Peter Sanders, Robert Schulze, and Wei Zhou. Retrieval and perfect hashing using fingerprinting. In *SEA*, volume 8504 of *Lecture Notes in Computer Science*, pages 138–149. Springer, 2014. doi:10.1007/978-3-319-07959-2_12.
- [33] Mark E. J. Newman. *Networks: An Introduction*. Oxford University Press, 2010.
- [34] Anna Pagh and Rasmus Pagh. Uniform hashing in constant time and optimal space. *SIAM J. Comput.*, 38(1):85–96, 2008. doi:10.1137/060658400.
- [35] Anna Pagh, Rasmus Pagh, and Milan Ruzic. Linear probing with constant independence. In *STOC*, pages 318–327. ACM, 2007. doi:10.1145/1250790.1250839.
- [36] Rasmus Pagh and Flemming Friche Rodler. Cuckoo hashing. *J. Algorithms*, 51(2):122–144, 2004. doi:10.1016/j.jalgor.2003.12.002.
- [37] Giulio Ermanno Pibiri and Roberto Trani. PTHash: Revisiting FCH minimal perfect hashing. In *SIGIR*, pages 1339–1348. ACM, 2021. doi:10.1145/3404835.3462849.
- [38] Robert F. Rice. Some practical universal noiseless coding techniques. *Jet Propulsion Laboratory, JPL Publication*, 1979.
- [39] ShockHash - GitHub. <https://github.com/ByteHamster/ShockHash>, 2023.
- [40] MPHF Experiments - GitHub. <https://github.com/ByteHamster/MPHF-Experiments>, 2023.
- [41] Richard P Stanley. Enumerative combinatorics volume 1 second edition. *Cambridge studies in advanced mathematics*, 2011.
- [42] Robert Endre Tarjan. Efficiency of a good but not linear set union algorithm. *J. ACM*, 22(2):215–225, 1975. doi:10.1145/321879.321884.
- [43] Stefan Walzer. Peeling close to the orientability threshold - spatial coupling in hashing-based data structures. In *SODA*, pages 2194–2211. SIAM, 2021. doi:10.1137/1.9781611976465.131.

Appendix

A More Details on Refinements

In this section, we give additional details on the refinements and ideas outlined in Section 7.

A.1 Construction using Union-Find. An alternative to using connected components or cuckoo hashing for construction is to use a union-find data structure. A union-find data structure manages disjoint subsets of a given set, where initially each key is its own subset. The $\text{union}(x, y)$ operation merges the two subsets containing x and y . The $\text{find}(x)$ operation returns a representative for the set containing x . For this data structure, there is a very simple implementation based on building trees during union operations and collapsing them during find operations. With this, m union and find operations take time $\mathcal{O}(m \cdot \alpha(m))$, where α is the inverse Ackermann function [42]. The inverse Ackermann function grows extremely slowly, and has a value of less than 5 for any reasonable input size.

During ShockHash construction, if we look at the edges individually, an edge that connects one tree and one (pseudo)tree results in a larger (pseudo)tree. Connecting two nodes in a tree makes that tree a pseudotree. Finally, an edge that connects two pseudotrees creates a structure that is no longer a pseudotree. Using a union-find data structure, we can start with n individual sets, where each representative is labeled as a tree. We iteratively add additional edges and update the labels of the representatives to indicate whether a node is a tree or a pseudotree. Once we try to union two pseudotrees, we know that the given seed cannot lead to successful construction.

With rotation fitting, this becomes significantly more interesting. Because both sets remain constant, we can determine the union-find data structure for the larger set. The union-find data structure can then be re-used between different rotations. For the construction, it does not matter which set we rotate, because we can always apply the reverse rotation to the other set. Inserting the smaller set for each rotation value can determine an invalid seed more quickly. In practice, however, this does not improve the performance because the bit mask filters out most seeds anyway and does not require the more expensive union-find operations.

A.2 Partial Hash Calculation. Hashing the first set of keys during rotation fitting almost always yields a graph that, by itself, is a pseudoforest. The reason is that this is usually close to the load threshold $c = 0.5$ and n is small (which enables higher load [28]). Therefore, we can keep the hashes for the first set the same and just retry

hash functions for the second set. More precisely, if x is the hash function seed, we hash each key in the first set with seed $x - (x \bmod k)$, where k is a tuning parameter, and the keys of the second set with seed x . Therefore, the hash values of the first set can be cached over multiple iterations. In preliminary experiments, we find a value of $k = 8$ to be a good fit – values much larger than that have diminishing returns in performance improvement and start to influence the space consumption. At $k = 8$, however, the influence on the space consumption is negligible when n is large. Given that hashing the keys is a bottleneck during construction, this reduces the number of keys that need to be hashed by a factor of close to 2. We only apply this optimization for large $n > 32$.

A.3 Fast Splitting for RecSplit. Besides brute-force construction of leaves, the near-optimal space-efficiency of RecSplit [14] also hinges on brute-force splitting which is optimal up to a constant number of bits per split. Concretely, a binary split takes $\mathcal{O}(\sqrt{n})$ trials of 1-bit hash functions (i.e. work $n^{3/2}$) and needs $\log_2(n)/2 + \mathcal{O}(1)$ bits to store the seed in expectation.

We now outline how to achieve space $\log_2(n)/2 + \mathcal{O}(1)$ for a binary split with expected running time $\mathcal{O}(n)$. Assume n is even to avoid trivial rounding issues. The idea is to try splitting hash functions h_s with range $[cn]$ for some constant c where cn is even. Now we look for a threshold value t such that $h_s(x) \leq t$ for exactly $n/2$ keys of S . Such a threshold exists with constant probability. If it exists, it can be found in linear time using an appropriate selection algorithm. Storing a seed leading to a successful split takes $\mathcal{O}(1)$ bits and storing the threshold would need $\log_2 cn = \log_2 n + \mathcal{O}(1)$ bits.

We can reduce this to $\log_2(n)/2 + \mathcal{O}(1)$ by observing that for any constant d , the threshold will lie in a range of size $d\sqrt{n}$ around $cn/2$ with constant probability (the number of keys below $cn/2$ obeys a binomial distribution with expectation $n/2$). Thresholds in this range can be represented by just storing the difference to $cn/2$ which takes $\log_2(n/2) + \mathcal{O}(1)$ bits. If the threshold is outside this range, the seed failed and a new seed is tried. Overall, we have constant success probability (exact split by threshold possible and the threshold value is within the assumed range) so that we still need $\mathcal{O}(1)$ bits for the seed and $\log_2(n/2) + \mathcal{O}(1)$ bits overall. Note that by appropriately defining the assumed threshold range, we can use fixed-width binary encoding of the threshold so that the query cost for the split will be similar to the brute-force case.

We leave a more detailed analysis for future work that could compare the space overheads of threshold-based and brute-force splitting. Note that for $c = 1/n$ this method reverts to the brute-force approach, i.e., it is

to be expected that threshold based splitting can closely approach the space consumption for brute-force splitting.

A.4 Faster Queries without RecSplit. We can look for a different tradeoff between space and query performance by avoiding the recursive splitting used in RecSplit. We can replace it by 1-level splitting of each bucket, i.e., overall a 2-level hierarchy (that is also frequently used in compressed data structures like rank-select). In the most simple case, one would simply split each bucket randomly into leaves and store prefix sums of bucket sizes ($\log_2 N$ bits) as well as local prefix sums of leaf sizes (about $\log_2 b$ bits). Storing these prefix sums takes about

$$\frac{N}{b} \log_2 N + \frac{N}{n} \log_2 b$$

bits. We can ensure that this is small compared to the lower space bound of $N \log_2 e$, when $b \gg \log N$ and $n \gg \log \log N$.

Implementing this simple approach directly is likely to suffer from large construction time for the largest leaves. There are various ways to limit maximum leaf sizes. For example, we could store thresholds generalizing the approach to binary splitting in Appendix A.3. Or we could bump some keys from buckets or leaves similar to the approach used in BuRR and its variants [13]. We could also store per-bucket seeds to select a bucket local hash function that does not produce oversize leaves. This approach could be aided by choosing the number of leaves in a bucket proportional to the bucket size. Such measures cause additional space overhead, but it does not change the basic analysis. Also, correlations between the balancing information and the prefix sum values open many opportunities for compression. Overall, we get a quite large design space whose exploration we leave to future work.

A.5 Pseudoforest Hash-and-Displace. We could combine the idea of ShockHash with the idea of Hash and Displace outlined in Section 3: Keys are hashed to buckets for which we encode a seed specifying *two* hash functions. Construction searches for seeds that result in a pseudoforest. This should have a success probability that is much larger than directly finding an injective function – resulting in good space efficiency combined with fast construction. Query time will lie in between ShockHash-RS and basic Hash-and-Displace.

B Filter strength

In Section 4, we describe a filter based on bit masks that enables to skip cuckoo hash table construction for most of the hash function seeds. We then show that the probability for a seed to pass the filter is at most

$\approx 0.864^n$ (see Lemma 4.1). In the following, we now give the exact solution that also takes into account the correlation between the bits.

LEMMA B.1. *Assume $2n$ balls are randomly thrown into n bins. The probability that all bins receive at least one ball is $\Theta(b^n)$ where $b = 2e^\lambda/(\lambda e^2)$ and where λ is the unique solution to $2 = \lambda/(1 - e^{-\lambda})$. Numerical approximation gives $\lambda \approx 1.597$ and $b \approx 0.836$.*

Proof. Consider the following random variables:

- X_i for $i \in [n]$ is the number of balls in bin i . The sequence (X_1, \dots, X_n) follows a multinomial distribution.
- $Y_1, \dots, Y_n \sim \text{Po}(2)$ are i.i.d. Poisson random variables.
- $Z_1, \dots, Z_n \sim D(\lambda)$ are i.i.d. random variables with distribution

$$\mathbb{P}_{Z \sim D(\lambda)}[Z = i] = \begin{cases} 0 & \text{if } i = 0, \\ \frac{e^{-\lambda} \lambda^i}{(1 - e^{-\lambda}) \cdot i!} & \text{if } i \in \mathbb{N} \end{cases}$$

The idea is that $Z \sim D(\lambda)$ is like a Poisson random variable (which attains value i with probability $e^{-\lambda} \lambda^i / i!$) but conditioned to be positive. We have $\mathbb{E}[Z] = \lambda / (1 - e^{-\lambda})$ and choose λ such that $\mathbb{E}[Z] = 2$.

- $N_Y = \sum_{i=1}^n Y_i$, $N_Z = \sum_{i=1}^n Z_i$.

We use vector notation $\vec{\cdot}$ as a shorthand for corresponding sequences of numbers, e.g. $\vec{X} = (X_1, \dots, X_n)$. We denote by R the set of all outcomes of the balls-into-bins experiment and by R_+ the outcomes with at least one ball per bin, i.e.

$$R = \{\vec{x} \in \mathbb{N}_0^n \mid \sum_{i=1}^n x_i = 2n\},$$

$$R_+ = \{\vec{x} \in \mathbb{N}^n \mid \sum_{i=1}^n x_i = 2n\}.$$

Finally, the following abbreviations will be useful

$$q(\vec{x}) = \prod_{i=1}^n \frac{1}{x_i!}, \quad q(R) = \sum_{\vec{x} \in R} q(\vec{x}), \quad q(R_+) = \sum_{\vec{x} \in R_+} q(\vec{x}).$$

The random variables \vec{X} , \vec{Y} and \vec{Z} are closely related: The distributions of \vec{Y} and \vec{X} coincide when conditioning on $\{N_Y = 2n\}$ and the distributions of \vec{Y} and \vec{Z} coincide when conditioning on $\{Y \in R_+\}$ and $\{N_Z = 2n\}$. Our argument will rest on understanding normalisation terms mediating between the three settings, which are numbers

C_1, C_2, C_3 (that may depend on n but not on \vec{x}) such that for all $\vec{x} \in R$ we have

$$(B.1) \quad \mathbb{P}[\vec{X} = \vec{x}] = C_1 \cdot q(\vec{x})$$

$$(B.2) \quad \mathbb{P}[\vec{Y} = \vec{x} \mid N_Y = 2n] = C_2 \cdot q(\vec{x})$$

$$(B.3) \quad \mathbb{P}[\vec{Z} = \vec{x} \mid N_Z = 2n] = C_3 \cdot q(\vec{x}) \cdot \mathbf{1}_{\{\vec{x} \in R_+\}}$$

Let us verify this claim and compute C_1, C_2 and C_3 .

$$\begin{aligned} \mathbb{P}[\vec{X} = \vec{x}] &= \binom{2n}{x_1 \ x_2 \ \dots \ x_n} n^{2n} \\ &= \frac{(2n)!}{x_1! \cdot x_2! \cdot \dots \cdot x_n!} n^{-2n} = q(\vec{x}) \cdot \underbrace{\frac{(2n)!}{n^{2n}}}_{=C_1} \end{aligned}$$

$$\begin{aligned} \mathbb{P}[\vec{Y} = \vec{x} \mid N_Y = 2n] &= \frac{\mathbb{P}[\vec{Y} = \vec{x}]}{\mathbb{P}[N_Y = 2n]} \\ &= \frac{\prod_{i=1}^n \mathbb{P}[Y_i = x_i]}{\mathbb{P}[N_Y = 2n]} = \frac{\prod_{i=1}^n e^{-2} \cdot \frac{2^{x_i}}{x_i!}}{\mathbb{P}[N_Y = 2n]} \\ &= \frac{e^{-2n} \cdot 2^{2n} \prod_{i=1}^n \frac{1}{x_i!}}{\mathbb{P}[N_Y = 2n]} = q(\vec{x}) \underbrace{\frac{2^{2n}}{e^{2n} \mathbb{P}[N_Y = 2n]}}_{=C_2} \end{aligned}$$

In Equation (B.3) we get 0 on both sides if $\vec{x} \in R \setminus R_+$. Consider now $\vec{x} \in R_+$.

$$\begin{aligned} \mathbb{P}[\vec{Z} = \vec{x} \mid N_Z = 2n] &= \frac{\mathbb{P}[\vec{Z} = \vec{x}]}{\mathbb{P}[N_Z = 2n]} \\ &= \frac{\prod_{i=1}^n \mathbb{P}[Z_i = x_i]}{\mathbb{P}[N_Z = 2n]} = \frac{\prod_{i=1}^n \frac{e^{-\lambda}}{1-e^{-\lambda}} \cdot \frac{\lambda^{x_i}}{x_i!}}{\mathbb{P}[N_Z = 2n]} \\ &= q(\vec{x}) \underbrace{\frac{\lambda^{2n}}{e^{\lambda n} (1-e^{-\lambda})^n \mathbb{P}[N_Z = 2n]}}_{=C_3} \end{aligned}$$

By summing Equation (B.1) and Equation (B.2) over all $\vec{x} \in R$ we obtain

$$(B.4) \quad \begin{aligned} 1 &= C_1 \cdot q(R) \text{ and } 1 = C_2 \cdot q(R) \\ &\text{and hence } C_1 = C_2. \end{aligned}$$

By summing Equation (B.1) and Equation (B.3) over all $\vec{x} \in R_+$ we obtain

$$(B.5) \quad \begin{aligned} \mathbb{P}[\vec{X} \in R_+] &= C_1 \cdot q(R_+) \text{ and } 1 = C_3 \cdot q(R_+) \\ &\text{and hence } \mathbb{P}[\vec{X} \in R_+] = C_1/C_3. \end{aligned}$$

Putting Equations (B.4) and (B.5) together gives:

$$\begin{aligned} \mathbb{P}[\vec{X} \in R_+] &= C_1/C_3 = C_2/C_3 \\ &= \frac{2^{2n}}{e^{2n} \mathbb{P}[N_Y = 2n]} \frac{e^{\lambda n} (1-e^{-\lambda})^n \mathbb{P}[N_Z = 2n]}{\lambda^{2n}} \\ &= \left(\frac{2^2 e^\lambda (1-e^{-\lambda})}{e^2 \lambda^2} \right)^n \frac{\mathbb{P}[N_Z = 2n]}{\mathbb{P}[N_Y = 2n]} \\ &= \left(\frac{2e^\lambda}{e^2 \lambda} \right)^n \frac{\mathbb{P}[N_Z = 2n]}{\mathbb{P}[N_Y = 2n]} = b^n \frac{\mathbb{P}[N_Z = 2n]}{\mathbb{P}[N_Y = 2n]}. \end{aligned}$$

The last step is to show that the two probabilities are of the same magnitude. Take N_Y first. It is the sum of n independent random variables with constant variance. The central limit theorem suggests that the histogram of N_Y has a bell-curve-shape with mean $2n$ and standard deviation $\Theta(\sqrt{n})$, though a formal proof has to exploit that the greatest common divisor of the support of the underlying distribution $\text{Po}(2)$ is 1. This implies that $\mathbb{P}[N_Y = 2n] = \Theta(1/\sqrt{n})$. The same argument applies to N_Z and the claim follows. \square