

---

# LLaSM: LARGE LANGUAGE AND SPEECH MODEL

---

Yu Shu<sup>1†</sup>, Siwei Dong<sup>1†</sup>, Guangyao Chen<sup>1,2</sup>, Wenhao Huang<sup>3</sup>,  
Ruihua Zhang, Daochen Shi, Qiqi Xiang & Yemin Shi<sup>1\*</sup>

<sup>1</sup>LinkSoul.AI, <sup>2</sup>Peking University, <sup>3</sup>01.ai

† Equal contribution

\* Corresponding author: ymshi@linksoul.ai

## ABSTRACT

Multi-modal large language models have garnered significant interest recently. Though, most of the works focus on vision-language multi-modal models providing strong capabilities in following vision-and-language instructions. However, we claim that speech is also an important modality through which humans interact with the world. Hence, it is crucial for a general-purpose assistant to be able to follow multi-modal speech-and-language instructions. In this work, we propose **Large Language and Speech Model (LLaSM)**. LLaSM is an end-to-end trained large multi-modal speech-language model with cross-modal conversational abilities, capable of following speech-and-language instructions. Our early experiments show that LLaSM demonstrates a more convenient and natural way for humans to interact with artificial intelligence. Specifically, we also release a large Speech Instruction Following dataset LLaSM-Audio-Instructions. Code and demo are available at <https://github.com/LinkSoul-AI/LLaSM> and <https://huggingface.co/spaces/LinkSoul/LLaSM>. The LLaSM-Audio-Instructions dataset is available at <https://huggingface.co/datasets/LinkSoul/LLaSM-Audio-Instructions>.

## 1 Introduction

Speech contains semantic information and contains paralinguistic information like intonation at the same time, it carries more quantity of information than text. Additionally, speech is a more convenient and natural way for humans to interact with artificial intelligence. Therefore, following speech-and-language instructions is crucial when developing a general-purpose assistant.

However, most large language models [1, 2, 3] receive text input only, which restricts the ability of large language models. Vision-and-language multi-modal models [4, 5, 6, 7, 8, 9] offer the ability to understand the vision information, making a huge step toward general artificial intelligence (AGI), but it is still inconvenient for humans to input the tasks by typing a text instruction. The cascading paradigm methods [10, 11] use an automatic speech recognition (ASR) model to convert the speech input into the text input, then the model can process the task with the text input. However, it still leads to information consumption during the modal transformation from speech to text and might import mistakes of the ASR system. Recently, speech-language multi-modal models [12, 13] focusing on processing and generating speech and text with a large language model are capable of understanding and generating multi-modal content. The speech signals are encoded into discrete tokens, and then discrete speech tokens are expanded into the vocabulary of the LLM. In this way, the LLM needs to be retrained with plenty of multi-modal data and huge computing resources.

In this paper, we propose LLaSM, a large speech-and-language model with cross-modal conversational abilities, capable of understanding and following speech-and-language instructions. Following the manner of LLaVA [6], we leverage the well-trained speech modal encoder and the LLM, which makes LLaSM more resource-friendly. Specifically, we use Whisper [14] as a speech encoder to encode the speech signals into embeddings. Then a modal adaptor learns to

align speech embeddings with the input text embeddings of the large language model. The speech embeddings and the text embeddings are concatenated together to form interleaved sequences, then the interleaved sequences are input to the LLM for supervised fine-tuning. The training process is divided into two stages. In the first stage, we use the public ASR datasets for the modality adaptation pre-training. The speech encoder and the LLM are frozen, only the modal adaptor is trained to align the speech and text embeddings. As most of the model parameters remain frozen, only a small part of the parameters from the modal adaptor is trained during this stage, it is not resource-consuming. In the second stage, we use cross-modal instruction data for training to provide the model with the capacity to process cross-modal conversations and handle multi-modal instructions. The speech encoder is frozen while the parameters of the modal adaptor and the language model are updated for cross-modal instruction fine-tuning. Worth noting that existing open-source speech-text cross-modal instruction-following datasets are scarce, so we build and release a speech-text cross-modal instruction-following dataset **LLaSM-Audio-Instructions**. The dataset is constructed by carefully selecting dialogues from GPT4-LLM [15], ShareGPT [16], WizardLM [17], and using text-to-speech technology to generate a large amount of dialogue audio data. In total, it contains 199k conversations, in which there are 80k Chinese audio samples and 428k English audio samples, which is the largest Chinese and English speech-text cross-modal instruction-following dataset to our knowledge.

Our paper makes the following contributions:

- We build a speech-language multi-modal model that can understand and follow speech-language instructions, which provides a more convenient and natural way for humans to interact with artificial intelligence.
- We construct and release LLaSM-Audio-Instructions, a large-scale Chinese and English speech-text cross-modal instruction-following dataset. We release the data in <https://huggingface.co/datasets/LinkSoul/LLaSM-Audio-Instructions>.
- We release the code in <https://github.com/LinkSoul-AI/LLaSM> and the demo is shown in <https://huggingface.co/spaces/LinkSoul/LLaSM>.

## 2 Related Work

**Vision Large Language Model** has gained significant traction [4, 5, 6, 7, 8, 9] recently. Most of them leverage the pre-trained LLMs and vision encoders to perform vision tasks. Flamingo [18] aligns a pre-trained vision encoder and language model using gated cross-attention and is trained on billions of image-text pairs. BLIP-2 [19] employs a Flan-T5 [20] with a Q-Former to efficiently align visual features with the language model. Palm-E [5], featuring 562 billion parameters, integrates the 540B PaLM [2] and 22B Vision Transformer [21] into the largest vision-language model. LLaVA [6] leverages pre-trained CLIP [22] visual encoder and LLaMA [3] and conducts instruct tuning on GPT4-assisted visual instruction data. GPT-4 [4] also shows powerful visual understanding and reasoning abilities. The success of the multi-modal large language model in the visual domains has brought a lot of inspiration to the research in the speech domains as well.

**Speech Large Language Model** has gained more and more interest, for the success of the vision multi-modal LLMs. The cascading paradigm methods [10, 11] use an automatic speech recognition (ASR) model to convert the speech input into the text input, which still leads to information consumption and might import mistakes of the ASR system. Recently, speech-language multi-modal models [12, 13] focusing on processing and generating speech and text with a large language model are capable of understanding and generating multi-modal content. The speech signals are encoded into discrete tokens, and then discrete speech tokens are expanded into the vocabulary of the LLM. In this way, the LLM needs to be retrained with plenty of multi-modal data and huge computing resources.

## 3 Approach

### 3.1 Model

The focus of training multi-modal models is to fuse cross-modal complementary information of multi-modalities and effectively exploit the capabilities of well-trained large language models. The LLaSM model architecture is shown in Figure 1. We use Whisper [14] to encode the raw audio data into embeddings first, then a modal adaptor is trained during the pre-training stage to align the audio embeddings and the text embeddings. The audio embeddings and the text embeddings are concatenated together to form interleaved input sequences to input to the large language model. We choose Chinese-LLAMA2-7B [23] as our LLM, for its capabilities in both Chinese and English. During the cross-modal instruction fine-tuning stage, the modal adaptor and the LLM are trained with multi-tasks.

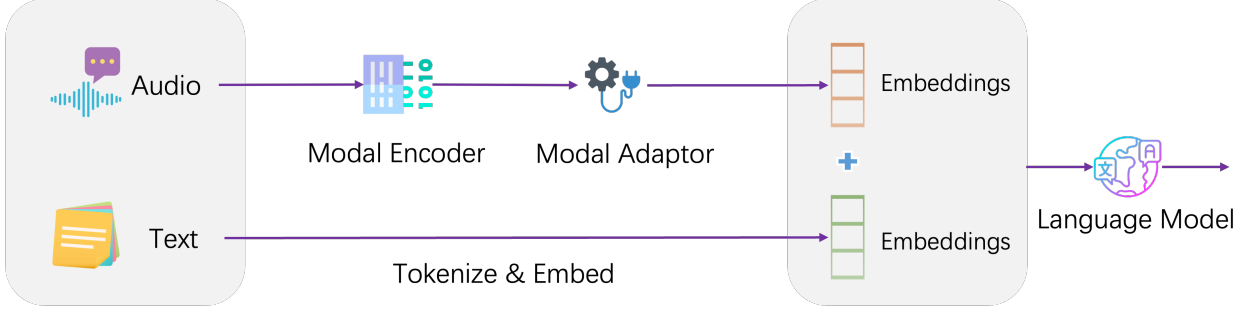


Figure 1: Model framework of the LLaSM

**The pre-training stage.** During this stage, the modal encoder and the LLM remain frozen. To enable the LLM to understand the audio embeddings from the modal encoder, the modal adaptor is trained with public ASR data to align the text and the audio embeddings. The data sample (audio data, text label) of ASR data is formatted as a tuple of (simple instruction, audio data, text label), in which the simple instruction is an automatic speech recognition instruction. According to the different languages of the audio data, an English simple instruction listed in Figure 2 or a Chinese simple instruction listed in Figure 3 will be chosen. The unified format of the pre-training multi-modal language  $X_{sample}$  is shown in Figure 4. Each data sample is formatted as  $X_{sample}$ , then we will replace the audio patch embeddings from the text sequence with the audio embeddings of the modal adaptor. The final interleaved input embeddings will be input to the large language model. The training target is to predict the text label of each data sample.

- "Transcribe the following speech into text."
- "Convert the spoken words into written text."
- "Transform the speech into a written transcript."
- "Record the oral communication as written text."
- "Render the verbal message into written form."
- "Transpose the spoken language into written script."
- "Translate the spoken words into written text."
- "Write down the words spoken in the speech."
- "Transform the spoken discourse into a written document."
- "Convert the spoken utterances into written transcription."
- "Create a written record of the spoken speech."

Figure 2: English simple instructions.

- "请将以下语音转译为文本"
- "请将这段语音转换成文字。"
- "能否把这段语音转成文字形式？"
- "把这段语音转写成文字。"
- "将此录音转化为文字。"
- "把这段音频转换成文字。"
- "能否把这段录音转成文字？"
- "把这段语音转化为文本。"
- "将这段录音转为文字。"
- "把这段语音转为文字格式。"
- "能否将这段录音转换成文本？"

Figure 3: Chinese simple instructions.

**The cross-modal instruction fine-tuning.** During this stage, only the modal encoder is frozen, the modal adaptor and the LLM are joint-trained with multi-tasks. We build complex cross-modal instructions using several conversational data. The questions from humans are generated to audio data by using Microsoft Azure text-to-speech API, then the training target is to predict the responses from the chatbot. A round of question and answer will be processed into a multi-modal sequence  $X_{sample}$ , and multiple rounds of question and answer will be concatenated with the EOS token. The unified format of the cross-modal instruction fine-tuning sequence is shown in Figure 5. As the effectiveness of text-only conversational data with multi-task instructions has been demonstrated in several open-source language-only instruction-tuning works [15, 16, 17], the cross-modal instructions are able to improve the capacity of following multi-modal instructions.

### 3.2 Data Collection

To enable the LLM to understand the audio signals, we collect several public ASR data sets to form the Modality Adaptation Pre-training Data with simple instructions of automatic speech recognition. And, for cross-modal instruction tuning, we use several open-source language-only instruction-tuning data sets to build the Cross-modal Instruction Fine-Tuning Data by generating the speech data. The details are as follows.

**Modality Adaptation Pre-training Data.** To align the embeddings of text and audio, we collect several public ASR data sets in both English and Chinese, including Aishell [24], LibriSpeech [25], Magicdata [26] and Primewords [27]. The data sample of ASR data usually consists of a pair of speech audio and text utterances, especially, when we add a simple instruction to the data sample as the task instruction. These simple instructions are listed in Figure 2 and Figure 3, which are different representations of the automatic speech recognition task in both English and Chinese. While pre-training, the simple instruction and the audio data are input to the model to predict the text label of the audio data.

$$\begin{aligned}
X_{sample} &= B\_INST + B\_SYS + SYSTEM + E\_SYS + \{content_{user}\} + E\_INST + \{content_{gpt}\} \\
content_{user} &= \{audio_{token}\} + "\backslash n" + I_{simple} \text{ ( or } content_{user} = I_{simple} + "\backslash n" + \{audio_{token}\} \text{ )} \\
content_{gpt} &= TEXT\_LABEL \\
audio_{token} &= AUDIO\_START\_TOKEN + AUDIO\_PATCH\_TOKEN * \{audio\_token\_len\} + AUDIO\_END\_TOKEN
\end{aligned}$$

Figure 4: The sample sequence format for the pre-training. We follow the manner of Llama-2, and  $B\_INST = '[INST]'$ ,  $E\_INST = '[/INST]'$ ,  $B\_SYS = '<<SYS>> \backslash n'$ ,  $E\_SYS = '\backslash n <</SYS>> \backslash n \backslash n'$ . The  $SYSTEM = 'You are a helpful language and speech assistant. You are able to understand the speech content that the user provides, and assist the user with a variety of tasks using natural language.'$ , and the  $TEXT\_LABEL$  is the text label of the ASR data sample. The  $audio\_token\_len$  is set to 64 by default. Special audio tokens are used,  $AUDIO\_START\_TOKEN = '<au\_start>'$ ,  $AUDIO\_END\_TOKEN = '<au\_end>'$ ,  $AUDIO\_PATCH\_TOKEN = '<au\_patch>'$ . The  $content_{user}$  consists of the  $audio_{token}$  and the  $I_{simple}$ , in which  $I_{simple}$  is a simple instruction and is randomly put before or after the  $audio_{token}$ . While training the BOS token and the EOS token will be added to each sample at the beginning and the end of the sequence, only the **green tokens** are used to compute the loss.

$$\begin{aligned}
X_{instruction} &= \langle BOS \rangle + X_{sample} + \langle EOS \rangle + X_{sample} + \langle EOS \rangle + \dots + \langle EOS \rangle \\
X_{sample} &= B\_INST + B\_SYS + SYSTEM + E\_SYS + \{content_{user}\} + E\_INST + \{content_{gpt}\} \\
content_{user} &= \{audio_{token}\}, \quad content_{gpt} = TEXT\_RESPONSE \\
audio_{token} &= AUDIO\_START\_TOKEN + AUDIO\_PATCH\_TOKEN * \{audio\_token\_len\} + AUDIO\_END\_TOKEN
\end{aligned}$$

Figure 5: The sample sequence format for the cross-modal instruction fine-tuning. We follow the manner of Llama-2, and  $B\_INST = '[INST]'$ ,  $E\_INST = '[/INST]'$ ,  $B\_SYS = '<<SYS>> \backslash n'$ ,  $E\_SYS = '\backslash n <</SYS>> \backslash n \backslash n'$ . The  $SYSTEM = 'You are a helpful language and speech assistant. You are able to understand the speech content that the user provides, and assist the user with a variety of tasks using natural language.'$ , and the  $TEXT\_RESPONSE$  is the text response from the chatbot. The  $audio\_token\_len$  is set to 64 by default. Special audio tokens are used,  $AUDIO\_START\_TOKEN = '<au\_start>'$ ,  $AUDIO\_END\_TOKEN = '<au\_end>'$ ,  $AUDIO\_PATCH\_TOKEN = '<au\_patch>'$ . The  $content_{user}$  is the  $audio_{token}$  which will be replaced by the audio embeddings during training. Each round of question and answer will be formatted as  $X_{sample}$ , which will be concatenated together with the EOS token. While training the BOS token will be added at the beginning of the sequence, and the EOS token will be added at the end of the sequence, only the **green tokens** are used to compute the loss.

**Cross-modal Instruction Fine-Tuning Data.** As the effectiveness of the open-source language-only instruction-tuning data sets has been demonstrated in previous works[15, 16, 17], a natural idea is to generate audio data of these language-only data sets to build a cross-modal instruction-tuning data. In the process of building this dataset, we first carefully filtered all the conversation data, by removing the conversations that are not suitable for vocalization, including codes, a large number of symbols, URLs, and other non-readable text. To ensure the data quality, in the second stage, all the answers from chat-bots in the conversations are filtered again. Those that do not contain valuable information are dropped. In the third stage, we use Microsoft Azure text-to-speech API [28] to generate speech data from humans in these data sets. The speech data of humans are used as the complex instructions and the responses from the chatbot are predicted during the instruction fine-tuning. Specifically, 80k conversation data which contains 160k samples is selected from WizardLM [17], 23k conversation data which contains 155k samples is selected from ShareGPT [16] and 96k conversation data which contains 192k samples is selected from GPT-4-LLM [15]. Table 1 shows the specific details of the dataset, which contains 199k conversation data and 508k samples in total. Several examples of the dataset are shown in Figure 6. We release this dataset as LLaSM-Audio-Instructions at <https://huggingface.co/datasets/LinkSoul/LLaSM-Audio-Instructions>.

Table 1: LLaSM-Audio-Instructions Data.

LLaSM-Audio-Instructions				
Source	Conversations	Samples	English Samples	Chinese Samples
WizardLM	80k	160k	159k	<1k
ShareGPT	23k	155k	140k	15k
GPT-4-LLM	96k	192k	128k	64k
Total	199k	508k	428k	80k

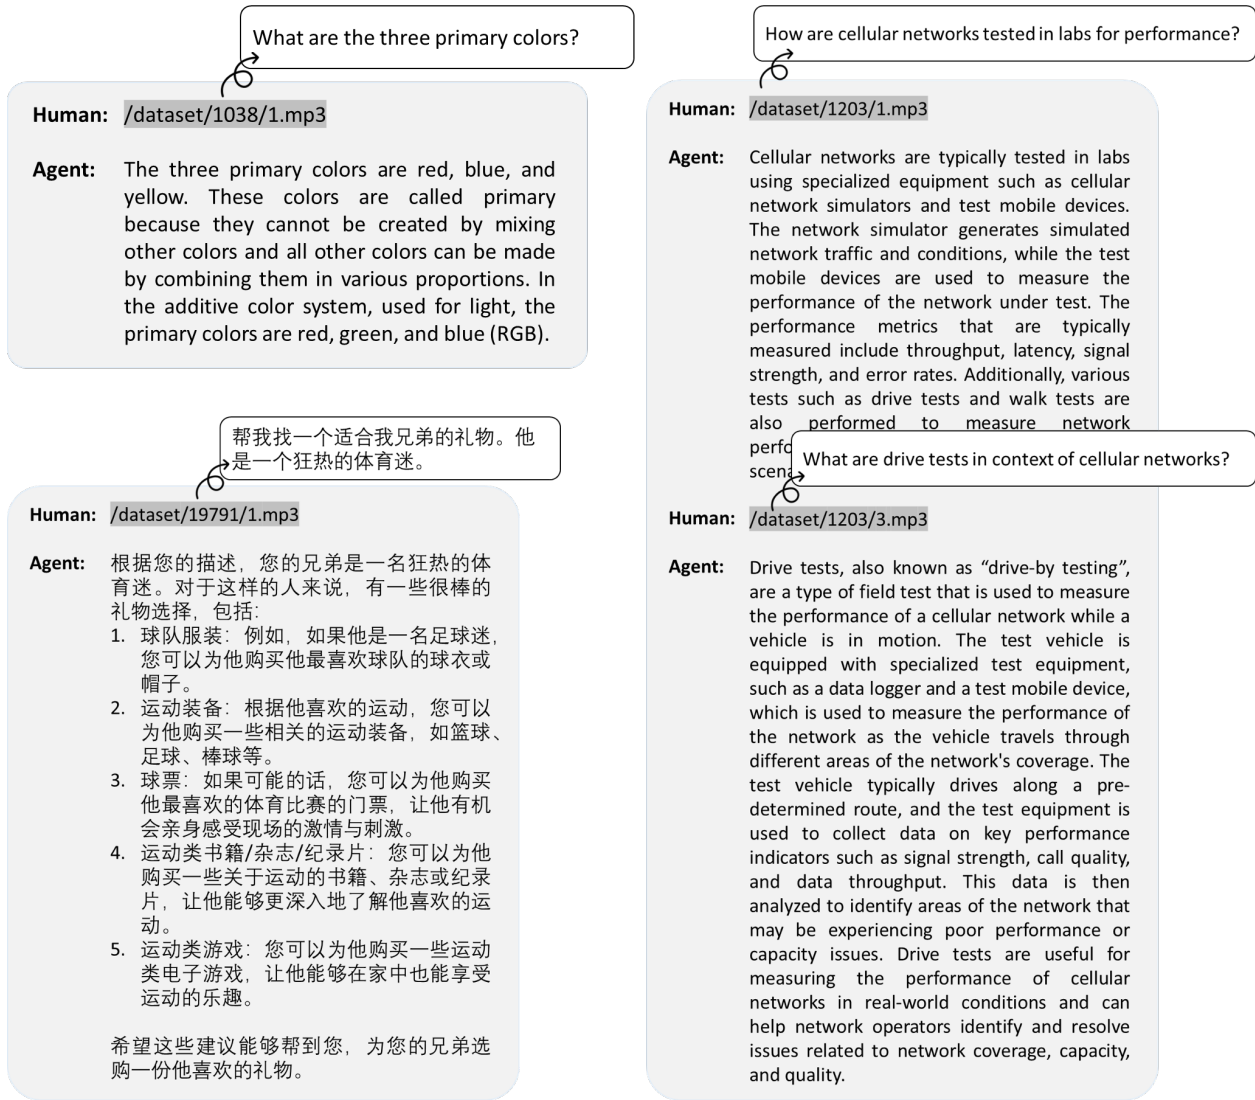


Figure 6: Data samples of the LLaSM-Audio-Instructions.

0:03

请介绍一下北京

北京是中国得首都，位于华北地区，是一个历史悠久、文化底蕴深厚得城市。它拥有丰富得人文景观和历史遗产，如故宫、天安门广场、长城等。此外，北京还是一个现代化得大都市，拥有许多现代化得建筑和设施，如北京塔、国家大剧院等。北京冬奥组委在2022年成功举办了冬季奥林匹克运动会，进一步提升了北京的国际影响力。

0:04

Which country in Africa is known for diamonds?

Diamonds are primarily found in Africa, specifically in countries such as Botswana, Democratic Republic of Congo, South Africa, and Sierra Leone. These diamonds are mined from kimberlite pipes, which are geological formations that contain diamonds.

0:04

如果去北京旅游，你有什么建议吗

如果您计划去北京旅游，我可以为您提供以下建议：  
 1. 游览北京的著名景点，如故宫、天安门广场、长城等。  
 2. 品尝北京的特色美食，如烤鸭、豆汁、炸酱面等。  
 3. 逛逛北京的夜市和商场，购买一些纪念品或者当地特产。  
 4. 参观一些历史博物馆和文化遗址，了解北京的历史和文化。  
 5. 体验一下北京的夜生活，如去酒吧、夜市等。  
 6. 如果您对中国文化感兴趣，可以参加一些文化体验活动，如学习书法、剪纸、京剧等。  
 希望这些建议能够对您有所帮助，如果您需要更多信息，请随时告诉我。

0:06

第一次和女孩约会会有什么建议吗？

在约会的初始阶段，以下是一些建议可以考虑的活动：  
 1. 约会前，可以通过社交媒体或短信聊天了解对方的兴趣爱好和喜欢的活动，这样可以为约会提供一些参考。  
 2. 约会时间可以选择一个适合双方的时间和地点，例如咖啡馆、餐厅、公园等。  
 3. 可以选择一些共同的兴趣爱好进行活动，例如看电影、演唱会、运动等。  
 4. 可以尝试一些新鲜的活动，例如射箭、攀岩、烹饪课等。  
 5. 可以选择一些文化活动，例如博物馆、画廊、历史遗迹等。  
 6. 可以选择一些轻松愉快的活动，例如逛街、逛公园、看日落等。  
 最重要的是，要根据对方的喜好和兴趣选择活动，并尽量让约会过程中的气氛轻松愉快。

0:02

Who is Jackie Chan?

Jackie Chan is a famous actor and stuntman from Hong Kong. He is known for performing his own stunts in his movies, and has become one of the most recognizable and successful actors in the action film genre. He has appeared in over 150 films and is one of the most popular and recognizable celebrities in the world.

0:03

中国最著名的诗人是谁？

中国最著名的诗人之一是李白（701年-762年），他被誉为“诗仙”，是唐代最伟大的诗人之一。他的诗歌清新豪放，充满想象力和浪漫主义情怀，对后世的诗歌创作产生了深远的影响。

0:03

Who is the richest man in the world?

The richest man in the world is currently Elon Musk, who is a business magnate, industrial designer, and engineer. He is the founder and CEO of SpaceX, co-founder and CEO of Tesla Inc., co-founder of Neuralink, and founder of The Boring Company. As of 2021, Musk' s net worth is estimated to be around \$251 billion USD, making him richest person in the world.

0:03

他的代表作有哪些？

李白的代表作品有很多，其中最著名的诗歌包括《将进酒》、《庐山谣寄卢侍御虚舟》、《夜泊牛渚怀古》、《早发白帝城》等。这些诗歌充满了豪放不羁的情怀和奔放的诗风，被誉为李白的代表作。

Figure 7: Examples of experiments.

## 4 Experiments

Experiments are shown in Figure 7.

## 5 Conclusion

This work presents LLaSM, a large language model with cross-modal conversational abilities, capable of understanding and following speech-and-language instructions. Experiments show that LLaSM demonstrates a more convenient and natural way for humans to interact with artificial intelligence. Specifically, to alleviate the scarcity of cross-modal speech-and-language instructions data, we build a large Speech Instruction Following data set LLaSM-Audio-Instructions. It is the largest Chinese and English speech-text cross-modal instruction-following data set to our knowledge. Finally, by adopting a visual modal encoder that can easily provide LLaSM with visual capabilities, we will explore combining both vision and audio modalities in future work.

## References

- [1] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Nee-lakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners, 2020.
- [2] Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, Parker Schuh, Kensen Shi, Sasha Tsvyashchenko, Joshua Maynez, Abhishek Rao, Parker Barnes, Yi Tay, Noam Shazeer, Vinodkumar Prabhakaran, Emily Reif, Nan Du, Ben Hutchinson, Reiner Pope, James Bradbury, Jacob Austin, Michael Isard, Guy Gur-Ari, Pengcheng Yin, Toju Duke, Anselm Levskaya, Sanjay Ghemawat, Sunipa Dev, Henryk Michalewski, Xavier Garcia, Vedant Misra, Kevin Robinson, Liam Fedus, Denny Zhou, Daphne Ippolito, David Luan, Hyeontaek Lim, Barret Zoph, Alexander Spiridonov, Ryan Sepassi, David Dohan, Shivani Agrawal, Mark Omernick, Andrew M. Dai, Thanumalayan Sankaranarayana Pillai, Marie Pellat, Aitor Lewkowycz, Erica Moreira, Rewon Child, Oleksandr Polozov, Katherine Lee, Zongwei Zhou, Xuezhi Wang, Brennan Saeta, Mark Diaz, Orhan Firat, Michele Catasta, Jason Wei, Kathy Meier-Hellstern, Douglas Eck, Jeff Dean, Slav Petrov, and Noah Fiedel. Palm: Scaling language modeling with pathways, 2022.
- [3] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruiti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models, 2023.
- [4] OpenAI. Gpt-4 technical report, 2023.
- [5] Danny Driess, Fei Xia, Mehdi S. M. Sajjadi, Corey Lynch, Aakanksha Chowdhery, Brian Ichter, Ayzaan Wahid, Jonathan Tompson, Quan Vuong, Tianhe Yu, Wenlong Huang, Yevgen Chebotar, Pierre Sermanet, Daniel Duckworth, Sergey Levine, Vincent Vanhoucke, Karol Hausman, Marc Toussaint, Klaus Greff, Andy Zeng, Igor Mordatch, and Pete Florence. Palm-e: An embodied multimodal language model, 2023.
- [6] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning, 2023.
- [7] Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. Minigpt-4: Enhancing vision-language understanding with advanced large language models, 2023.
- [8] Rohit Girdhar, Alaaeldin El-Nouby, Zhuang Liu, Mannat Singh, Kalyan Vasudev Alwala, Armand Joulin, and Ishan Misra. Imagebind: One embedding space to bind them all, 2023.
- [9] Quan Sun, Qiying Yu, Yufeng Cui, Fan Zhang, Xiaosong Zhang, Yuezhe Wang, Hongcheng Gao, Jingjing Liu, Tiejun Huang, and Xinlong Wang. Generative pretraining in multimodality, 2023.



- [10] Yongliang Shen, Kaitao Song, Xu Tan, Dongsheng Li, Weiming Lu, and Yueting Zhuang. Hugginggpt: Solving ai tasks with chatgpt and its friends in hugging face, 2023.
- [11] Rongjie Huang, Mingze Li, Dongchao Yang, Jiatong Shi, Xuankai Chang, Zhenhui Ye, Yuning Wu, Zhiqing Hong, Jiawei Huang, Jinglin Liu, Yi Ren, Zhou Zhao, and Shinji Watanabe. Audiogpt: Understanding and generating speech, music, sound, and talking head, 2023.
- [12] Dong Zhang, Shimin Li, Xin Zhang, Jun Zhan, Pengyu Wang, Yaqian Zhou, and Xipeng Qiu. Speechgpt: Empowering large language models with intrinsic cross-modal conversational abilities, 2023.
- [13] Paul K. Rubenstein, Chulayuth Asawaroengchai, Duc Dung Nguyen, Ankur Bapna, Zalán Borsos, Félix de Chaumont Quitry, Peter Chen, Dalia El Badawy, Wei Han, Eugene Kharitonov, Hannah Muckenhirn, Dirk Padfield, James Qin, Danny Rozenberg, Tara Sainath, Johan Schalkwyk, Matt Sharifi, Michelle Tadmor Ramanovich, Marco Tagliasacchi, Alexandru Tudor, Mihajlo Velimirović, Damien Vincent, Jiahui Yu, Yongqiang Wang, Vicky Zayats, Neil Zeghidour, Yu Zhang, Zhishuai Zhang, Lukas Zilka, and Christian Frank. Audiopalm: A large language model that can speak and listen, 2023.
- [14] Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. Robust speech recognition via large-scale weak supervision, 2022.
- [15] Baolin Peng, Chunyuan Li, Pengcheng He, Michel Galley, and Jianfeng Gao. Instruction tuning with gpt-4, 2023.
- [16] Dom Eccleston. Sharegpt. <https://github.com/domeccleston/sharegpt>, 2023.
- [17] Can Xu, Qingfeng Sun, Kai Zheng, Xiubo Geng, Pu Zhao, Jiazhan Feng, Chongyang Tao, and Daxin Jiang. Wizardlm: Empowering large language models to follow complex instructions, 2023.
- [18] Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katie Millican, Malcolm Reynolds, Roman Ring, Eliza Rutherford, Serkan Cabi, Tengda Han, Zhitao Gong, Sina Samangooei, Marianne Monteiro, Jacob Menick, Sebastian Borgeaud, Andrew Brock, Aida Nematzadeh, Sahand Sharifzadeh, Mikolaj Binkowski, Ricardo Barreira, Oriol Vinyals, Andrew Zisserman, and Karen Simonyan. Flamingo: a visual language model for few-shot learning, 2022.
- [19] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models, 2023.
- [20] Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, Albert Webson, Shixiang Shane Gu, Zhuyun Dai, Mirac Suzgun, Xinyun Chen, Aakanksha Chowdhery, Alex Castro-Ros, Marie Pellat, Kevin Robinson, Dasha Valter, Sharan Narang, Gaurav Mishra, Adams Yu, Vincent Zhao, Yanping Huang, Andrew Dai, Hongkun Yu, Slav Petrov, Ed H. Chi, Jeff Dean, Jacob Devlin, Adam Roberts, Denny Zhou, Quoc V. Le, and Jason Wei. Scaling instruction-finetuned language models, 2022.
- [21] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale, 2021.
- [22] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision, 2021.
- [23] Yu Shu, Siwei Dong, Guangyao Chen, Wenhao Huang, Ruihua Zhang, Daochen Shi, and Yemin Shi. Chinese llama2 7b. *arXiv*, 2023.
- [24] Hui Bu, Jiayu Du, Xingyu Na, Bengu Wu, and Hao Zheng. Aishell-1: An open-source mandarin speech corpus and a speech recognition baseline. In *Oriental COCODA 2017*, page Submitted, 2017.
- [25] Vassil Panayotov, Guoguo Chen, Daniel Povey, and Sanjeev Khudanpur. Librispeech: an asr corpus based on public domain audio books. In *Acoustics, Speech and Signal Processing (ICASSP), 2015 IEEE International Conference on*, pages 5206–5210. IEEE, 2015.
- [26] Magic data technology co., ltd., 2019.
- [27] Ltd. Primewords Information Technology Co. Primewords chinese corpus set 1, 2018. <https://www.primewords.cn>.
- [28] Microsoft. Microsoft azure text-to-speech api. <https://azure.microsoft.com/en-us/products/ai-services/ai-speech>.