A cutting-surface consensus approach for distributed robust optimization of multi-agent systems

Jun Fu, Senior Member, IEEE, and Xunhao Wu

Abstract—A novel and fully distributed optimization method is proposed for the distributed robust convex program (DRCP) over a time-varying unbalanced directed network under the uniformly jointly strongly connected (UJSC) assumption. Firstly, a tractable approximated DRCP (ADRCP) is introduced by discretizing the semi-infinite constraints into a finite number of inequality constraints and restricting the right-hand side of the constraints with a positive parameter. This problem is iteratively solved by a distributed projected gradient algorithm proposed in this paper, which is based on epigraphic reformulation and subgradient projected algorithms. Secondly, a cuttingsurface consensus approach is proposed for locating an approximately optimal consensus solution of the DRCP with guaranteed feasibility. This approach is based on iteratively approximating the DRCP by successively reducing the restriction parameter of the right-hand constraints and populating the cutting-surfaces into the existing finite set of constraints. Thirdly, to ensure finite-time termination of the distributed optimization, a distributed termination algorithm is developed based on consensus and zerothorder stopping conditions under UJSC graphs. Fourthly, it is proved that the cutting-surface consensus approach terminates finitely and yields a feasible and approximate optimal solution for each agent. Finally, the effectiveness of the approach is illustrated through a numerical example.

Index Terms—Distributed robust convex program, timevarying unbalanced directed graphs, semi-infinite constraints, finite-time termination

I. Introduction

ISTRIBUTED optimization refers to an optimization strategy for multi-agent systems in which agents agree on a consensus and feasible decision that guarantees the optimality of the global objective through local computation and agent communication. Distributed optimization has been extensively studied [1]–[3] and has been applicated in a wide range of fields such as multi-robot system scheduling [4], unmanned aerial vehicle (UAV) formation flight [5], cooperative localization in sensor networks [6], network resource allocation [7], and economic dispatch of smart grids [8]. Uncertain distributed optimization is considerably important,

This paper was supported in part by the National Nature Science Foundation of China under Grant 61825301.

The authors are with the State Key Laboratory of Synthetical Automation for Process Industries, Northeastern University, Shenyang 110819, China (e-mail: junfu@mail.neu.edu.cn; neuwxh2102043@163.com).

e.g., to guarantee stability or to ensure safety [9]. Uncertainties considered in distributed optimization include inaccurate gradient information [10], [11], communication noise [12], [13], communication time delay [14], data packet loss [15], constraints affected by uncertainty, etc. This article focuses on distributed optimization problems with uncertain constraints.

Techniques for dealing with distributed optimization with uncertain constraints have been widely researched. In the early work, Lee and Nedic [16], [17] introduced distributed random projection algorithms by designing random projections to ensure almost sure feasibility of the solution and using a distributed subgradient algorithm [18] to cooperatively minimize the global objective. In [19]-[25], some scenariobased algorithms were proposed, which are based on extracting a large number of scenarios from the uncertainty set to obtain a scenario problem (SP), and then applying existing constrained distributed optimization methods to solve the SP. These algorithms provide probabilistic feasibility of the resulting solutions. The above two algorithms require that the uncertainty parameters be randomly sampled from an underlying distribution. Thus, they unavoidably fail to find a feasible solution for all values of the uncertainty but can provide feasibility assurance in a probabilistic sense. However, in some practical applications, all agents need to locate guaranteed feasible and optimal consensus solutions for a given range of uncertainty, regardless of the distribution, to ensure that the multi-agent system has a good robustness

To address such issues, this paper considers a distributed robust convex program (DRCP) where the inequality constraints are influenced by bounded uncertainty. According to the treatment of uncertainty, the existing methods are categorized into two main types: the robust counterpart method [26]–[28] and the cutting-plane consensus algorithm [29], [30]. The former presents a direct strategy by transforming the DRCP into an equivalent and computationally tractable problem based on duality theory, which is then solved by an existing distributed algorithm [26]. This method asymptotically converges to a feasible optimal solution, whereas it is primarily used for uncertain linear and conic quadratic programs (see the preface of [9]). Moreover, this method requires the global information of constraints and uncertainty sets, and thus, the system considered by this method is not fully distributed. The later is a fully distributed algorithm that relies on iteratively extending cutting-planes into the finite set of constraints to approximate the DRCP, thereby enabling the algorithm to asymptotically converge to the optimal solution of the DRCP. However, this polyhedral approximation framework results in an outer approximation [29], which does not guarantee the feasibility of the solution. To the best of our knowledge, none of the existing fully distributed algorithms guarantee the feasibility of the solution in the DRCP. Besides, these algorithms for solving the DRCP fail to achieve finite-time termination, which is essential for practice. Therefore, the motivation of this article is to propose a novel and fully distributed approach for finding a feasible and approximate optimal consensus solution for the DRCP within a finite number of iterations.

From the aforementioned motivation, a cutting-surface consensus approach is proposed based on the centralized cuttingsurface method [31] and the right-hand restriction approach [32], [33] for solving the DRCP. Firstly, an approximated DRCP (ADRCP) is constructed by discretizing the semiinfinite constraints into a finite number of inequality constraints and restricting the right-hand side of the constraints with a positive parameter to retrieve computational tractability. Secondly, the ADRCP is solved by the distributed projected gradient algorithm, which is based on epigraphic reformulation [34] and the subgradient projected algorithm [35], and the resulting optimal solution is used to approximate that of the DRCP. Thirdly, a lower level program (LLP) is introduced to determine whether the obtained solution of the ADRCP is feasible to the original problem (DRCP). If infeasible, the ADRCP is tightened by populating the uncertain parameter corresponding to the maximum constraint violation into the existing finite set; otherwise, a feasible point of the DRCP is located and used to update the optimal solution candidate. Finally, if the stopping criterion is satisfied, the optimal solution candidate is taken as the desired approximate optimal solution of the DRCP; otherwise, the restriction parameters is reduced and then the routine is performed again with updated information based on the explored solution of the ADRCP until the desired solution is located. Based on the above procedures, a cutting-surface consensus approach has been formulated to converge to an optimal solution of the DRCP. The main contributions of this paper are summarized as follows.

- The DRCP with nonidentical constraints and nonidentical uncertainty sets is considered over a time-varying unbalanced directed network under the uniformly jointly strongly connected (UJSC) assumption since such a problem is more favorable in practical applications.
- 2) A novel and fully distributed cutting-surface consensus approach is proposed for solving the DRCP. Unlike the above-mentioned methods in [26]–[30], the proposed approach terminates finitely and yields a feasible solution for each agent satisfying consensus and zeroth-order stopping conditions to certain tolerances.
- 3) A distributed projected gradient (DPG) algorithm is developed for solving the ADRCP problem. Besides, we prove its convergence and convergence rate of $O(\ln t/\sqrt{t})$. Unlike the D-RFP algorithm in [34] that reaches almost sure feasibility of the solution, the DPG

- algorithm adopts Euclidean projection that ensures the feasibility of the solution to prevent infinite iterations of the cutting-surface consensus approach.
- 4) Based on the zeroth-order stopping conditions [36] and finite-time consensus algorithm [37], a distributed termination algorithm is developed and applied to the process of solving the ADRCP and the DRCP. Unlike the finite-time consensus technique [37]–[39] that only guarantees approximate consensus of the resulting solutions under strongly connected graphs, our algorithm can be used in UJSC networks and introduces zeroth-order stopping conditions to ensure all agents obtain approximate optimal solutions for convergent distributed optimization algorithms in the discrete-time setting.
- 5) It is mathematically proven that the cutting-surface consensus approach terminates within finite iterations.

The remaining parts of the paper are organized as follows. Section 2 presents the distributed robust convex optimization problem and network topology. Section 3 states the mathematical description and stopping criterion of the ADRCP and presents the associated algorithms. Section 4 presents the cutting-surface consensus approach for locating a feasible solution of the DRCP that reaches consensus and zeroth-order stopping conditions to certain tolerances within finite iterations, and it also presents a mathematical proof of this result. Section 5 analyzes the effect of the algorithm with a numerical example and compares it with existing methods. Section 6 provides conclusions and an outlook on future work.

Notation: \mathbb{R}^m denotes the set of all m dimensional real column vector; \mathbb{Z} denotes the set of all nonnegative integers; x^{\top} and A^{\top} denote the transpose of the vector x and the matrix A; I represents an identity matrix with compatible size; $\mathbf{1}_m$ denotes the m-dimensional column vector with all entries equal to 1; e_i is a column vector where the i-th element equals to 1 and the remaining elements equal to 0; $\|x\|$ represents the Euclidean norm of the vector x; |a| denotes the absolute value of a scalar $a \in \mathbb{R}$; $\operatorname{dist}(\overline{x}, X)$ denotes the Euclidean distance from a vector \overline{x} to a set X, i.e. $\operatorname{dist}(\overline{x}, X) = \inf_{x \in X} \|\overline{x} - x\|$; $P_X[\overline{x}]$ denotes the Euclidean projection of a vector \overline{x} on a closed convex set X, i.e. $P_X[\overline{x}] = \arg\min_{x \in X} \|\overline{x} - x\|$.

II. PROBLEM STATEMENT

We consider a multi-agent system of m agents in which the objective of all agents is to cooperatively solve a distributed robust convex program (DRCP) with nonidentical semi-infinite constraints of the form:

$$\min_{x \in X} F(x) = \sum_{i=1}^{m} f_i(x)$$
s.t. $g_i(x, y_i) \le 0 \quad \forall y_i \in Y_i \quad i = 1, 2, ...m$ (DRCP)

where x is a decision vector of agents, y_i is an uncertainty parameter of agent i, the global constraint set $X \subseteq \mathbb{R}^n$ is a non-empty and compact convex set, $Y_i \subseteq \mathbb{R}$ is a nonempty and compact convex set for all $i \in \mathcal{V}$, $f_i(x) : \mathbb{R}^n \to \mathbb{R}$ is the local cost function of agent $i, F(x) : \mathbb{R}^n \to \mathbb{R}$ is the global objective function, $g_i(x, y_i) : \mathbb{R}^n \times Y_i \to \mathbb{R}$ is the local constraint of agent i. Both f_i and g_i are assumed to be convex functions

with respect to x. Besides, g_i is assumed to be continuous on $X \times Y_i$ for all $i \in \mathcal{V}$. We set x^* as an optimal solution of DRCP, and x^* belongs to the optimal solution set \mathcal{F}^* .

Each agent only knows its local cost function f_i , constraints g_i , and uncertainty set Y_i , and this information can be different for each agent. It is defined that the local feasible set of agent i is $\mathcal{F}_i = \{x \in X | g_i(x, y_i) \leq 0, \forall y_i \in Y_i \}$. To ensure the solvability of the DRCP, we make the following assumptions.

Assumption 1 (Solvability and Interior Point): \mathcal{F} is not an empty set, and there is a point $\hat{x} \in \mathcal{F}$ satisfying

$$g_i(\hat{x}, y_i) < 0, \forall y_i \in Y_i \quad i = 1, ..., m$$

where \mathcal{F} is the intersection of local feasible sets of all agents, i.e. $\mathcal{F} = \bigcap_{i=1}^m \mathcal{F}_i$.

Remark 1: Since an optimization problem with uncertain local cost functions can be transformed into an epigraph reformulation problem with the same form as the (DRCP), it is without loss of generality that this paper only considers the uncertainty appearing in the local constraints.

The communication among agents is represented by timevarying directed graphs $\mathcal{G}(t) = (\mathcal{V}, \mathcal{E}(t))$, where $\mathcal{V} =$ $\{1,...,m\}$ denotes the vertex set, and $\mathcal{E}(t) = \{1,...,m\}^2$ is the edge set in the time slot $t \in \mathbb{Z}$. A directed edge $(i, j) \in \mathcal{E}(t)$ indicates that agent i can directly transmit information to agent j in the time slot t. (i, i) represents the self-loop of agent i. $\mathcal{G}(t)$ is strongly connected if every agent is reachable by all other agents. For any agent $i, j \in \mathcal{V}$, the minimum number of edges between two agents is called the distance from i to j, denoted as dist(i, j). The diameter of the graph is denoted as $\operatorname{diam}(\mathcal{G}(t)) = \max_{\forall i,j \in \mathcal{V}} \operatorname{dist}(i,j).$ In the time slot t, for agent i, its out-neighbors set is $N_i^{out}(t) = \{j | (i, j) \in \mathcal{E}(t)\},\$ and its in-neighbors set is $N_i^{in}(t) = \{j | (j,i) \in \mathcal{E}(t)\}$. Define the weight matrix $A(t) = [a_{ij}(t)] \in \mathbb{R}^{m \times m}$, which satisfies that $a_{ij}(t) > 0$ if $j \in N_i^{in}(t)$ and $a_{ij}(t) = 0$, otherwise. If $\sum_{i=1}^{m} a_{ij}(t) = 1$ for any $j \in \mathcal{V}$, then the matrix A(t) is column stochastic. If $\sum_{i=1}^{m} a_{ij}(t) = 1$ for any $i \in \mathcal{V}$, then the matrix A(t) is row stochastic. The matrix A(t) is doubly stochastic if it satisfies both the column and row stochastic conditions. In order to ensure that the information from any agent can be directly or indirectly transmitted to all other agents within finite time slots, the following assumption is made.

Assumption 2 (Uniformly Jointly Strongly Connectivity [35]) The time-varying graphs $\{\mathcal{G}(t)\}$ are uniformly jointly strongly connected (UJSC), i.e. for all $t \geq 0$, there is an interger S > 0 making $\mathcal{G}(t:t+S)$ strongly connected.

$$\mathcal{G}(t:t+S) = ([m], \mathcal{G}(t) \cup ... \cup \mathcal{G}(t+S-1)$$

The objective of our work is to propose an approach to solve the (DRCP) within a finite number of iterations under time-varying unbalanced directed graphs while guaranteeing the feasibility of the approximate optimal solution.

III. APPROXIMATION PROBLEM AND FINITE-TIME **TERMINATION METHOD**

This section introduces an approximation problem of the (DRCP) and proposes a distributed projected gradient (DPG) algorithm for solving this problem, which can be used in timevarying unbalanced directed networks under UJSC assumption. Then, we present the convergence of the DPG algorithm and discuss its convergence rate. Besides, we develop a distributed finite-time termination algorithm. By combining it with the DPG algorithm, all agents obtain approximate optimal and consensus solutions of the ADRCP within finite time slots.

A. Approximation Problem

Motivated by the upper bounding problem in [32], an approximation problem of the (DRCP) is introduced by discretizing the compact sets Y_i into the finite sets Y_i^k and restricting the right-hand sides of the constraints with positive parameters ϵ_i^k . The mathematical description of the approximation problem is as follows.

$$\begin{aligned} & \min_{x \in X} \quad F(x) = \sum_{i=1}^m f_i(x) \\ & \text{s.t.} \quad g_i(x, y_i) \leq -\epsilon_i^k \quad \forall y_i \in Y_i^k \quad i = 1, 2, ..., m \end{aligned} \tag{ADRCP}^k$$

s.t.
$$g_i(x, y_i) \le -\epsilon_i^k \quad \forall y_i \in Y_i^k \quad i = 1, 2, ..., n$$

where ϵ_i^k is a restriction parameter of agent i, and $\epsilon_i^k > 0$, Y_i^k is a finite set of agent i, and $Y_i^k \subset Y_i$. We set $x^{k,*}$ as an optimal solution of the (ADRCP^k), and $x^{k,*}$ belongs to the optimal solution set $\mathcal{F}^{k,*}$.

Remark 2: In the subsequent distributed cutting-surface consensus algorithm, the (ADRCPk) denotes the distributed optimization problem constructed by the finite sets Y_i^k and the restriction parameters ϵ_i^k of all agents at the iteration k. Here, ϵ_i^k represents the restriction parameter of the agent i at the k-th iteration of the cutting-surface consensus algorithm, and $Y_i^k \subset Y_i$ is a finite set containing values of the uncertainty parameter explored by agent i within the previous k iterations of this algorithm.

The problem (ADRCPk) is a standard distributed optimization problem with a finite number of local inequality constraints and a global constraint set over time-varying unbalanced directed graphs. In order to solve the (ADRCP^k), we propose a distributed projected gradient (DPG) algorithm under the UJSC assumption and prove the convergence and convergence rate of this algorithm. To show these results, we first introduce the following assumptions.

Assumption 3 (Solvability, Interior Point for (ADRCP^k)): Let $\mathcal{F}_i^k = \{x \in X | g_i(x, y_i) \le -\epsilon_i^k, \forall y_i \in Y_i^k\}$ for any $i \in \mathcal{V}$, and $\mathcal{F}^k = \bigcap_{i=1}^m \mathcal{F}_i^k$. Assume that \mathcal{F}^k is not an empty set, and there exists a point $\tilde{x} \in \mathcal{F}^k$ satisfying

$$g_i(\tilde{x}, y_i) < -\epsilon_i^k, \forall y_i \in Y_i^k \quad i = 1, ..., m$$

 $g_i(\tilde{x},y_i)<-\epsilon_i^k, \forall y_i\in Y_i^k\quad i=1,...,m$ Under Assumption 3, the (ADRCP^k) has a nonempty set of optimal solutions, i.e., $\mathcal{F}^{k,*} \neq \emptyset$. Note that a nonempty optimal solution set is the sufficient and necessary condition for the convergence of the distributed subgradient projected algorithm [40].

Assumption 4: The assumptions of row stochastic and weights rule are as follows:

- (i) The weight matrix $A(t) = [a_{ij}(t)]$ associated with $\mathcal{G}(t)$ is row stochastic, i.e. $\sum_{j=1}^{m} a_{ij}(t) = 1$ for any $i \in \mathcal{V}$ and
- (ii) There are self-loops in all $\mathcal{G}(t)$. Besides, there exists a constant $0 < \gamma < 1$ such that $a_{ij}(t) \ge \gamma$ if $a_{ij}(t) > 0$, and $a_{ii}(t) \geq \gamma$ for $\forall i, j \in \mathcal{V}$ and $\forall t \in \mathbb{Z}$.

Assumption 4(i) says that each agent employs a convex combination of all agents' states in the distributed optimization algorithms. Assumption 4(ii) ensures the agents' information interacts at a nonvanishing rate. Without this assumption, information from some agents may gradually lose its impact over time, and in the limit, leading to loss of information from these agents [35].

Assumption 5 (Stepsize Rule): The stepsize $\alpha(t) > 0$ satisfies the following conditions:

$$\begin{split} \sum_{t=0}^{\infty} \alpha(t) &= \infty, \quad \sum_{t=0}^{\infty} \alpha^2(t) < \infty, \\ \alpha(t) &\leq \alpha(l) \qquad \forall t > l \geq 0. \end{split}$$

Assumption 5 ensures the convergence of the distributed optimization algorithms to the optimal point.

Then, we start to design an optimization algorithm for solving the (ADRCP^k). In order to coordinate with the subsequent distributed cutting-surface consensus algorithm, we consider two main aspects in the algorithm design: One is that the algorithm can be applied to time-varying unbalanced directed networks under the UJSC assumption, same as the cutting-surface consensus algorithm, which will not affect the applicability and practical value of the cutting-surface consensus algorithm. The other is that the algorithm is capable of solving the (ADRCP^k) with nonidentical local constraints, and the resulting solution of each agent is feasible to its local constraints. To the best of our knowledge, existing distributed optimization algorithms (e.g. [35], [40]-[44]) are unable to take both of these requirements into account (see Table I), therefore, we propose a new distributed projected gradient (DPG) algorithm based on the following two steps:

Step (i): Proceed the following epigraphic reformulation for the (ADRCP^k) to handle the unbalancedness of the distributed network:

$$\min_{(x,u)\in\Theta} \sum_{i=1}^{m} \frac{\mathbf{1}_{m}^{\top} u}{m}
\text{s.t.} \quad f_{i}(x) - e_{i}^{\top} u \leq 0, \ i = 1, 2, ..., m,
g_{i}(x, y_{i}) \leq -\epsilon_{i}^{k} \quad \forall y_{i} \in Y_{i}^{k}, \ i = 1, 2, ..., m,$$
(1)

where $\Theta \subseteq \mathbb{R}^{n+m}$ is the Cartesian product of X and \mathbb{R}^m . Local objective function of agent i is replaced with a linear function $f_0(u) = \frac{\mathbf{1}_m^\top u}{m}$, while the local feasible set is $\Omega_i = \left\{ (x,u) \in \Theta | f_i(x) - e_i^\top u \leq 0 \land g_i(x,y_i) \leq -\epsilon_i^k, \forall y_i \in Y_i^k \right\}$.

To simplify the problem form of (1), we consider the following equivalent form:

$$\min_{\theta \in \Theta} \quad f_0(\theta) = c^{\top} \theta$$
s.t. $f_i(\theta) \le 0, \quad i = 1, 2, ..., m$

$$g_i(\theta) \le 0, \quad i = 1, 2, ..., m$$
(2)

where $\theta=(x,u)\in\Theta$, the local feasible set of agent i is $\Omega_i=\{\theta\in\Theta|f_i(\theta)\leq0\land g_i(\theta)\leq0\}$, and the global feasible set is $\Omega=\cap_{i=1}^m\Omega_i$.

Step (ii): Utilize the subgradient projection algorithm in [35] to resolve (2):

$$\theta_i(t+1) = P_{\Omega_i} \left[\sum_{j=1}^m a_{ij}(t)\theta_j(t) - \alpha(t)c \right]$$
 (3)

TABLE I

COMPARISONS BETWEEN THE PROPOSED DPG ALGORITHM AND THE
EXISTING SUBGRADIENT PROJECTED ALGORITHMS

| Literature | Time varying | Unbalanced | UJSC | Nonidentical constraints | Convergence property |
|------------|--------------|--------------|--------------|--------------------------|----------------------|
| [35] | ✓ | × | √ | × | sum |
| | × | × | × | ✓ | sum |
| [40] | \checkmark | ✓ | \checkmark | × | weighted sum |
| [41] | \checkmark | × | × | ✓ | sum |
| [42] | \checkmark | × | × | ✓ | sum |
| [43] | \checkmark | × | \checkmark | × | sum |
| [44] | \checkmark | \checkmark | \checkmark | × | sum |
| our work | \checkmark | ✓ | \checkmark | ✓ | sum |

Remark 3 (Dealing with Unbalancedness): The techniques for handling unbalancedness have been extensively studied. In the seminal work, [45] proposed a reweighting technique to address fixed unbalanced networks, but the Perron vectors of the graph and global information were required. [41] developed an additional adaptive algorithm that estimates the Perron vectors, and then employs a reweighting technique without the need for global information. Nonetheless, this algorithm cannot be applied to time-varying graphs. [46], [47] proposed a push-sum consensus protocol to handle the unbalancedness of time-varying graphs, but this algorithm appears to be complicated. Recently, [34] used an epigraph form of a constrained optimization problem to deal with unbalancedness, which is applicable to UJSC networks. Inspired by [34], we construct an epigraphic reformulation of the (ADRCP^k) in Step (i) of our algorithm. Different from the D-RFP algorithm in [34], at each time slot, we adopt the Euclidean projections to ensure that the update state of each agent lies within the local feasible set, ensuring the feasibility of the solution instead of almost sure feasibility in [34].

Finally, we prove the convergence and convergence rate of the DPG algorithm (see Appendix). Here are the results we obtained:

Theorem 1 (Convergence of DPG Algorithm): Let θ^* be an optimal solution of the (ADRCP^k), and θ^* belongs to the optimal solution set Ω^* . Under Assumptions 2, 3, 4, 5, the distributed projected gradient algorithm reaches convergence to an optimal consensus solution, i.e., $\exists \theta^* \in \Omega^*$: $\lim_{t \to \infty} \theta_i(t) = \theta^*$, $\forall i \in \mathcal{V}$.

Theorem 2 (Convergence Rate of DPG Algorithm): Let Assumptions 2, 3, 4 be satisfied. If $\{\alpha(t)\}$ is nonincreasing and $\alpha(t) = O(1/\sqrt{t})$, then for the distributed projected gradient algorithm, we have $|f_0(\hat{\theta}_i(t)) - f_0^*| = O(\ln t/\sqrt{t})$, where $\hat{\theta}_i(t) = \sum_{r=0}^t \alpha(r)\theta_i(r)/\sum_{\tau=0}^t \alpha(\tau)$.

B. Finite-Time Termination Algorithm

In Section III-A, we developed a DPG algorithm to solve the (ADRCP^k) and proved that the sequence $\{\hat{\theta}_i(t)\}_t$ of each agent converges at a sublinear rate towards θ^* . However, in practical applications, we cannot make the algorithm iterate infinitely to obtain the optimal solution θ^* . Therefore, it is essential to design an effective termination algorithm such that the DPG algorithm terminates after a finite number of time slots while all agents obtain approximate optimal

solutions of the (ADRCP^k). Currently, the most commonly used termination method in distributed optimization is to set a maximum number of iterations, which is always a conservative consideration as it is affected by the network structures, the initial values of the decision variables, and the convergence rate of the recursive algorithm [37]. In [37]–[39], finite-time consensus algorithms were proposed, equipped with the DPG algorithm, to obtain the approximate consensus solutions in finite time slots under strongly connected directed graphs. Nevertheless, this finite-time consensus algorithm is not sufficient for all agents to obtain approximate optimal solution. Specifically, if $\|\theta_i(t) - \theta_j(t)\| \le \epsilon$ for any $i, j \in \mathcal{V}$, there may exist the case that for any agent $i \in \mathcal{V}$ that $\|\theta_i(t) - \theta^*\| \gg \epsilon$.

Therefore, based on finite-time consensus algorithm [37] and the zeroth-order stopping conditions [36], we develop a finite-time termination algorithm for convergent distributed consensus algorithms in the discrete-time setting, which ensures that all agents obtain approximate optimal consensus solutions. Moreover, our algorithm is applicable to time-varying unbalanced directed graphs under the UJSC assumption.

Our aim is to make the approximation solution of each agent satisfy the consensus and zeroth-order stopping conditions to certain tolerances. The following is the stopping criterion: for any two agents $i \neq j$ and $i, j \in \mathcal{V}$

$$\|\theta_i(t) - \theta_i(t)\| \le \epsilon_1 \tag{4a}$$

$$\|\theta_i(t) - \theta_i(t-1)\| \le \epsilon_2 \tag{4b}$$

$$|f_i(\theta_i(t)) - f_i(\theta_i(t-1))| \le \epsilon_3, \tag{4c}$$

where (4a) refers to the consensus stopping condition, while (4b) and (4c) denote the zeroth-order stopping conditions based on the states θ_i and function values $f_i(\theta_i)$ respectively. Note that combining conditions (4b) and (4c) prevents the DPG algorithm from terminating prematurely on a very steep slope or a flat plateau.

Definition 1 (Local ϵ_1 -consensus [37]): Given $\epsilon_1 > 0$, if the state θ_i of agent $i \in \mathcal{V}$ satisfies $\max_{j \in N_i^{in}(t) \cup \{i\}} \|\theta_i(t) - \theta_j(t)\| \le \epsilon_1$, the agent i is deemed to reach local ϵ_1 -consensus.

Based on the stopping criterion (4), we propose a distributed finite-time termination algorithm. Firstly, each agent sends four-bit data to its out-neighbors between the time slots t and t+1. The data is $[h_i^1(t), e_i^1(t), e_i^2(t), e_i^3(t)]$. The first bit $h_i^1(t)$ is used to judge whether the stopping criterion (4) is satisfied which will be shown later. The second bit $e_i^1(t)$ is used to count the latest number of consecutively attaining local ϵ_1 -consensus in the time slot t. The remaining two bits $e_i^2(t)$ and $e_i^3(t)$ record the latest number of consecutively satisfying (4b) and (4c) for agent i and its in-neighbors in the time slot t.

Then, each agent calculates (5)-(8) in the time slot t+1 according to its and its in-neighbors' information.

$$h_i^1(t+1) = \min_{j \in N_i^{in}(t) \cup \{i\}} \left\{ h_i^1(t), e_i^1(t), e_i^2(t), e_i^3(t) \right\} + 1, \quad (5)$$

$$e_i^1(t+1) = \begin{cases} e_i^1(t) + 1, & \|\theta_i(t) - \theta_j(t)\| \le \epsilon_1 \\ & \forall j \in N_i^{in}(t) \cup \{i\}, \\ 0, & otherwise, \end{cases}$$
 (6)

$$e_i^2(t+1) = \begin{cases} e_i^2(t) + 1, & \|\theta_j(t) - \theta_j(t-1)\| \le \epsilon_2 \\ & \forall j \in N_i^{in}(t) \cup \{i\}, \\ 0, & otherwise, \end{cases}$$
(7)

$$e_i^3(t+1) = \begin{cases} e_i^3(t) + 1, & |f_j(\theta_j(t)) - f_j(\theta_j(t-1))| \le \epsilon_3 \\ & \forall j \in N_i^{in}(t) \cup \{i\}, \\ 0, & otherwise, \end{cases}$$
(8)

where $h_i^1(0) = 0$, $e_i^1(0) = 0$, $e_i^2(0) = 0$, $e_i^3(0) = 0$.

Proposition 1: Let D denote the diameter of the graph $\mathcal{G}(t:t+S)$, i.e., $D=\operatorname{diam}(\mathcal{G}(t:t+S))$. Consider the distributed finite-time termination algorithm given by (5)-(8) under Assumption 2. If there is an agent $i\in\mathcal{V}$ satisfying $h_i^1(t)\geq SD+1$, all agents meet the stopping criterion (4) in the time slot t.

Proof: We use the proof idea in [37] to prove this proposition. Under Assumption 2, there exists a directed path $(i,i_1),(i_1,i_2),...,(i_q,j)$ from i to j with $q \leq SD-1$ for any $i,j \in \mathcal{V}$. Since there is an agent $j \in \mathcal{V}$ satisfying $h^1_j(t) \geq SD+1$ at time slot t, then at time slot (t-1), it follows that $h^1_{i_q}(t-1) \geq SD$, $e^1_{i_q}(t-1) \geq SD$, $e^2_{i_q}(t-1) \geq SD$. Similarly, when the time slot is (t-2), it holds that $h^1_{i_{q-1}}(t-2) \geq SD-1$, $e^2_{i_{q-1}}(t-2) \geq SD-1$, $e^3_{i_{q-1}}(t-2) \geq SD-1$. Repeat the same steps, it follows that $h^1_i(t-q-1) \geq SD-q \geq 1$, $e^1_i(t-q-1) \geq SD-q \geq 1$.

Since the agent i is arbitrary, the system has already satisfied the stopping criterion (4) at time slot (t-q-1) and consistently satisfies (4) afterwards. Therefore, if there exists $i \in \mathcal{V}$ such that $h_i^1(t) \geq SD+1$, the network reaches the stopping criterion (4) in the time slot t.

If the diameter D is unknown, we can replace it with m-1, where m is the number of the agents in the distributed network.

Corollary 1: Under Assumptions 2, 3, 4, 5, the DPG algorithm terminates finitely by equipping it with the distributed finite-time termination algorithm given by (5)-(8). Besides, each agent obtains a feasible solution satisfying consensus and zeroth-order stopping conditions to certain tolerances.

Proof: It is straightforward to derive from Theorems 1, 2 and Proposition 1.

IV. ALGORITHM DEVELOPMENT AND ANALYSIS

Since the constraints of the (DRCP) are semi-infinite constraints, which means that an infinite number of inequality constraints are imposed on finite-dimensional decision variables, solving this problem is NP-hard. We cannot solve it by the existing distributed constrained algorithms (e.g., distributed projected subgradient algorithms [35]) since they can only address optimization problems with finite constraints. This section proposes a distributed cutting-surface consensus algorithm to solve the (DRCP), which locates feasible solutions satisfying consensus and zeroth-order stopping conditions to certain tolerances within a finite number of iterations. Besides, the main result of finite-time termination is established.

A. Distributed Cutting-Surface Consensus Approach

This paper refers to the algorithms of [31]-[33] to propose the cutting-surface consensus approach for solving the (DRCP), which contains three nested selection structures. The pseudocode and graphic illustration of the algorithm are shown in Algorithm 1 and Figure 1, respectively.

Algorithm 1 Distributed cutting-surface consensus algorithm for the distributed robust convex program (DRCP)

Initialization: For any $i \in \mathcal{V}$, restriction parameter $\epsilon_i^0 > 0$; finite or empty set $Y_i^0\subset Y_i$; optimal solution candidate z_i^0 , $\|z_i^0\|=+\inf$; decision parameter $x_i^0=\mathbf{0}\in\mathbb{R}^n$; iteration counter k = 0; reduction parameter r > 1.

- 1: Solve (ADRCP^k) by the DPG algorithm equipped with distributed termination algorithm proposed in Section III.
- 2: if solvable then
- Set x_i^k equal to the (ADRCP^k) approximate optimal solution point for agent i.
- Solve (LLP_i) to global optimality for agent i, and obtain $g_i^{\max}(x_i^k)$ and y_i^{\max} .

$$g_i^{\max}(x_i^k)\!=\!g_i(x_i^k,y_i^{\max})\!=\!\max_{y_i\in Y_i}g_i(x_i^k,y_i) \qquad (\text{LLP}_i)$$

- if $g_i^{\max}(x_i^k) \leq 0$ then 5:
- * Update the local feasible point of agent i for the 6: (DRCP) problem: $z_i^k = x_i^k$.
- * Execute Algorithm 2 to check whether the following stopping criterion is satisfied or not: for any two agents $i \neq j$, and $i, j \in \mathcal{V}$

$$||z_i^k - z_j^k|| \le \epsilon_4 \tag{9a}$$

$$||z_i^k - z_i^{k-1}|| \le \epsilon_5 \tag{9b}$$

$$|f_i(z_i^k) - f_i(z_i^{k-1})| \le \epsilon_6 \tag{9c}$$

if stopping criterion (9) is satisfied then Output z_i^k for all $i \in \mathcal{V}$ and **Terminate.**

* **Optimality cuts**: set $Y_i^{k+1} \leftarrow Y_i^k$, $\epsilon_i^{k+1} \leftarrow \epsilon_i^k/r$

12:

8:

9:

10:

11:

13:

 $* \text{ Set the point } z_i^k = z_i^{k-1} \\ * \textbf{Feasibility cuts} : \text{set } Y_i^{k+1} \leftarrow Y_i^k \cup \{y_i^{\max}\}, \epsilon_i^{k+1} \leftarrow \epsilon_i^k$ 14:


15:

16: **else**

• Solvability cuts: set $Y_i^{k+1} \leftarrow Y_i^k$, $\epsilon_i^{k+1} \leftarrow \epsilon_i^k/r$, $\forall i \in \mathcal{V}$ 17:

19: Set $k \leftarrow k+1$

1) The first selection structure: The (ADRCP^k) is neither a relaxation nor a restriction of the (DRCP) in general. In the initialization process, we choose any initial finite or empty set $Y_i^0 \subset Y_i$ and any initial restriction parameter $\epsilon_i^0 > 0$ for each agent. Since there are relatively large restriction parameters ϵ_i^k in the first few iterations of Algorithm 1, the global feasible set \mathcal{F}^k of the (ADRCP^k) may be an empty set, in which case, specifically, there exist two situations for the (ADRCP^k): one is that the local feasible set of a certain agent is empty, and the other is that the local feasible sets of all agents are non-empty

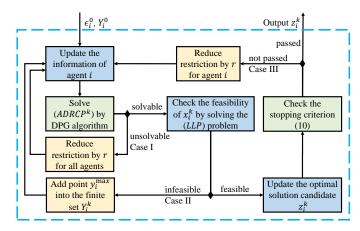

Graphic illustration of Algorithm 1. The steps in yellow and blue only require computation, information update and storage within the agent. The green steps require information exchange between each agent on this basis.

while their intersection is empty. We use the DRG algorithm to solve the (ADRCPk). For the first situation, each agent is forced to terminate and cannot obtain a solution. For the second situation, all agents update their states infinitely since the consensus stopping condition (4a) fails to be satisfied.

In Section III-B, we combine the DPG algorithm with the finite-time termination method to enable each agent to find an approximate optimal and consensus solution of the (ADRCP^k) within finite time slots under Assumption 3. In order to terminate the DPG algorithm for any combinations of Y_i^k and ϵ_i^k in finite time slots without Assumption 3, we set a maximum number of time slots T on the basis of the above algorithm. When the DPG algorithm cannot yield a solution or fail to reach the stopping criterion (4) within the time slot T, we can determine that the (ADRCPk) is unsolvable. Therefore, we relax the (ADRCP^k) by proportionally decreasing the restriction parameters ϵ_i^k for all agents (Solvability cuts). If the DPG algorithm terminates by satisfying the stopping criterion (4) within the time slot T, then we obtain the approximate optimal solution point for the (ADRCP^k) and update x_i^k .

2) The second selection structure: When the (ADRCP^k) is solvable, the obtained solution x_i^k of agent i has two cases. One is that x_i^k is in its local feasible region of the (DRCP), i.e., $x_i^k \in \mathcal{F}_i$, the other is that x_i^k is not in agent i's feasible region of the (DRCP), i.e., $x_i^k \notin \mathcal{F}_i$. To judge whether x_i^k belongs to \mathcal{F}_i , we introduce the lower level program (LLP_i).

If $g_i^{max}(x_i^k) \leq 0$, it indicates that $x_i^k \in \mathcal{F}_i$. Then, we assign the value of x_i^k to the (DRCP) optimal solution candidate z_i^k , and reduce ϵ_i^k proportionally to relax the (ADRCP^k) problem which is aimed to obtain a solution that is closer to the optimal solution point of the (DRCP) in later iterations (Optimality cuts). If $x_i^k \notin \mathcal{F}_i$, the obtained x_i^k has no practical significance and needs to be discarded. At this time, we expand the point $y_i^{\max} = \arg \max_{y_i \in Y_i} g_i(x_i^k, y_i)$ to Y_i^k to tighten the (ADRCP^k), aiming to make x_i^k locally feasible for the (DRCP) in later iterations (Feasibility cuts). This process is




Fig. 2. Grahpic illustration of the process in the second selection structure. The region enclosed by the red dashed line represents the (DRCP) feasible region. The three regions enclosed by the solid lines correspond to the $(\mathbf{ADRCP^k})$ feasible regions formed by three consecutive iterations of Algorithm 1. x_i^k is the approximate optimal solution of the $(\mathbf{ADRCP^k})$. x_i^1 is feasible to the (DRCP), thus an optimality cut is performed to reduce the restriction parameter $\epsilon_i^2=\epsilon_i^1/r=0.1.$ x_i^2 is infeasible to the (DRCP), thus a feasibility cut is performed to expand the finite set $Y_i^3=Y_i^2\cup\{y_i^{\max}\}=\{1,0.3\}.$ At the third iteration of Algorithm 1, the resulting solution x_i^3 of the (ADRCP^k) returns to feasible for the (DRCP).

illustrated by a numerical example¹, as shown in Figure 2.

Remark 4: Given that x_i^k is fixed for each agent $i \in \mathcal{V}$, the (LLP_i) is a standard optimization problem with a set constraint Y_i , where y_i is the decision variable. In order to ensure the local feasibility of the solutions generated by Algorithm 1, each agent needs to solve its (LLP_i) at global optimality by local computation. [30], [48] used convex numerical methods to locate the maximum violation for the convex (LLP_i) . When the (LLP_i) is nonconvex, [33] presents an effective numerical method under the assumption that g_i is continuously differentiable. Specifically, we first introduce an additional function $\chi(y_i)$:

$$\dot{\chi}(y_i) = \begin{cases}
0, & \chi(y_i) \ge g_i(x_i^k, y_i) \\
& \text{or } \dot{g}_i(x_i^k, y_i) \le 0, \\
\dot{g}_i(x_i^k, y_i), & \text{otherwise,}
\end{cases}$$
(10)

where x_i^k is fixed, $y_i \in Y_i$, $\dot{\chi}(y_i)$ represents the derivative of the function $\chi(y_i)$, and $\dot{g}_i(x_i^k,y_i)$ represents the derivative of the function $g_i(x_i^k,y_i)$ with respect to y_i . Set the compact set $Y_i = \{y_i|y_0 \leq y_i \leq y_f\}$ and $\chi(y_0) = g_i(x_i^k,y_0)$. Then, adopting an adaptive step-size solver with rigorous state-event location, we obtain the maximum constraint violation $\max_{y_i \in Y_i} g_i(x_i^k,y_i) = \chi(y_f)$. Moreover, y_i^{\max} is obtained from the last event triggered in the integration process.

3) The third selection structure: To ensure finite-time termination of Algorithm 1, we adapt the distributed finite-time termination algorithm in Section III-B to verify the stopping criterion (9), where (9a) refers to the consensus stopping

 $\begin{array}{l} ^{1}\text{Example: } \min_{x \in \mathcal{F}_{i}} -x(2) \quad \text{subject to } : g_{i}(x,y_{i}) \leq 0, \ \forall y_{i} \in Y_{i}, \\ \text{where } x = [x(1),x(2)]^{\top}, \ \mathcal{F}_{i} = [0,2] \times [0,1], \ Y_{i} = [0,2], \ \text{and} \ g_{i}(x,y_{i}) = \\ x(2) + [x(1)^{2} - 2x(1)]e^{-x(1)^{2} + y_{i}^{2} - 2x(1)y_{i}}. \end{array}$

Algorithm 2 Distributed termination algorithm for cuttingsurface consensus approach

Initialization: time slot t=0; parameter $e_i^4(t)=0$; $e_i^5(t)=0$; $e_i^6(t)=0$; $h_i^2(t)=0$.

Input: optimal solution candidate z_i^k for all agents; parameter S of the UJSC network; the diameter D of $\mathcal{G}(t:t+S)$; certain tolerances ϵ_4 , ϵ_5 , ϵ_6 .

Repeat

- 1: **Local information exchange:** send z_i^k , z_i^{k-1} , $e_i^4(t)$, $e_i^5(t)$, $e_i^6(t)$ and $h_i^2(t)$ to the out-neighbors of agent i between the time slot t and t+1.
- 2: Local variable calculate:

$$h_i^2(t+1) = \min_{j \in N_i^{in}(t) \cup \{i\}} \left\{ h_i^2(t), e_i^4(t), e_i^5(t), e_i^6(t) \right\} + 1, \tag{11}$$

$$e_i^4(t+1) = \begin{cases} e_i^4(t) + 1, & ||z_i^k - z_j^k|| \le \epsilon_4 \\ & \forall j \in N_i^{in}(t) \cup \{i\}, \\ 0, & otherwise, \end{cases}$$
 (12)

$$e_{i}^{5}(t+1) = \begin{cases} e_{i}^{5}(t)+1, & ||z_{j}^{k}-z_{j}^{k-1}|| \leq \epsilon_{5} \\ & \forall j \in N_{i}^{in}(t) \cup \{i\}, \\ 0, & otherwise, \end{cases}$$
(13)

$$e_{i}^{6}(t+1) = \begin{cases} e_{i}^{6}(t)+1, & |f_{j}(z_{j}^{k})-f_{j}(z_{j}^{k-1})| \leq \epsilon_{6} \\ & \forall j \in N_{i}^{in}(t) \cup \{i\}, \\ 0, & otherwise. \end{cases}$$
(14)

- 3: Set $t \leftarrow t + 1$
- 4: **if** $t > SD \& h_i^2(t) \ge SD + 1$ **then**
- 5: stopping criterion (9) is satisfied, **exit**
- 6: end if

Until: a predefined stopping rule (e.g. the time slot number that is greater than SD+1) is satisfied.

condition, while (9b) and (9c) denote the zeroth-order stopping conditions based on the candidate approximate solution z_i^k and function values $f_i(z_i^k)$ respectively. The pseudocode is shown in Algorithm 2.

Proposition 2: Consider Algorithm 2 under Assumption 2. If at the (SD+1)-th time slot, there exists an agent $i \in \mathcal{V}$ that satisfies $h_i^2(t) \geq SD+1$, then all agents meet the stopping criterion (9).

Proof: According to Proposition 1, the above result is straightforward.

Algorithm 2 provides Algorithm 1 with termination detection. If there exists an agent satisfying $g_i^{\max}(x_i^k) \leq 0$ in Step 5 of Algorithm 1, Algorithm 2 will start to execute. When the network satisfies the stopping criterion (9), all agents spontaneously issue an exit command to terminate Algorithm 1. Besides, an approximate optimal solution z_i^k of the (DRCP) is output for each agent.

Different from the distributed finite-time termination algorithm introduced in Section III-B, Algorithm 2 serves primarily

to judge the satisfaction of the stopping criterion (9) of the candidate approximate optimal solutions z_i^k for all agents at the k-th iteration, where the value of z_i^k does not change with respect to the time slots t, but it is affected by the iterations k. Besides, Algorithm 2 requires only a fixed number of time slots (SD+1) to determine whether Algorithm 1 needs to be terminated or not.

B. Convergence Analysis

This subsection presents the main result of Algorithm 1. At first, to ensure convergence of Algorithm 1, we make the following assumption.

Assumption 6 (Strict convexity): The global objective function F(x) of the (DRCP) is strictly convex, i.e., for any two point $x_1 \neq x_2$, $0 < \beta < 1$, there is

$$F(\beta x_1 + (1 - \beta)x_2) < \beta F(x_1) + (1 - \beta)F(x_2)$$

For the case that F(x) is a convex function, we can adopt a tie-break rule in solving the (ADRCP^k) to ensure the uniqueness of the solution.

Proposition 3 (Convergence): Let Assumptions 1, 2, 4, 5, 6 hold. For Algorithm 1, the sequence $\{x^{k,*}\}_k$ consisting of the optimal solution of the (ADRCP^k) converges to the optimal solution of the (DRCP), i.e., $\lim_{k\to\infty} x^{k,*} = x^*$.

Proof: In the loop of Algorithm 1, ϵ_i^k is a positive parameter that leads to restriction, while Y_i^k is a set consisting of a finite number of points obtained from the compact set Y_i that results in relaxation. Therefore, the (ADRCP^k) is neither a relaxation nor a restriction of the (DRCP) in general. It is difficult for us to directly analyze the relationship between the solutions of the two problems (ADRCP^k) and (DRCP). To prove this proposition, we first make the following settings:

$$\mathcal{F} = \left\{ x \in X | g_i(x, y_i) \leq 0, \ \forall y_i \in Y_i, \ i \in \mathcal{V} \right\},$$

$$\mathcal{F}^k = \left\{ x \in X | g_i(x, y_i) \leq -\epsilon_i^k, \ \forall y_i \in Y_i^k, \ i \in \mathcal{V} \right\},$$

$$\mathcal{A}^k = \left\{ x \in X | g_i(x, y_i) \leq -\epsilon_i^k, \ \forall y_i \in Y_i, \ i \in \mathcal{V} \right\},$$

$$\mathcal{B}^k = \left\{ x \in X | g_i(x, y_i) \leq 0, \ \forall y_i \in Y_i^k, \ i \in \mathcal{V} \right\},$$

where ϵ_i^k and Y_i^k are the parameters corresponding to the (ADRCP^k) at the k-th iteration of Algorithm 1. Taking F(x) as the objective function and each of the above four sets as the constraint, we obtain the corresponding optimal solutions x^* , $x^{k,*}$, $x^{k,a}$, $x^{k,b}$ by solving them in turn. Since the relation $Y_i^k \subset Y_i^{k+1}$ holds for any $k \geq 0$ and $i \in \mathcal{V}$, Y_i and \mathcal{B}^k are compact, and g_i are continuous on $X \times Y_i$ for any $i \in \mathcal{V}$, by Lemma 2.2 in [32], it holds that

$$\lim_{k \to \infty} F(x^{k,b}) = F(x^*). \tag{15}$$

Since the positive sequence $\left\{\epsilon_i^k\right\}_k$ is nonincreasing for $i\in\mathcal{V}$, it holds that for any $k\geq 0$

$$\mathcal{A}^k \subset \mathcal{A}^{k+1} \subset \cdots \subset \mathcal{A}^{\infty}$$
,

In addition, since $\epsilon_i^k \to 0$ as $k \to \infty$ for all agents, it follows that $\mathcal{A}^{\infty} = \mathcal{F}$. Based on the this result, we obtain that

$$\lim_{k \to \infty} F(x^{k,a}) = F(x^*). \tag{16}$$

According to the definitions of the sets \mathcal{F}^k , \mathcal{A}^k and \mathcal{B}^k , we can obtain that $\mathcal{A}^k \subset \mathcal{F}^k \subset \mathcal{B}^k$. Therefore, the following relation holds for any k > 0,

$$F(x^{k,b}) \le F(x^{k,*}) \le F(x^{k,a})$$
 (17)

By the squeeze theorem (see [49], P124) as well as the relations (15), (16) and (17), it holds that

$$\lim_{k \to \infty} F(x^{k,*}) = F(x^*). \tag{18}$$

By (18) and the strict convexity of the function F(x) (cf. Assumption 6), Proposition 3 is proved.

Proposition 4 (Finite-time Termination): Take any initial restriction parameters $\epsilon_i^0 > 0$, any initial finite or empty sets $Y_i^0 \subset Y_i$, and any reduction parameter r > 1. Under Assumptions 1, 2, 4, 5, 6, the distributed cutting-surface consensus algorithm terminates finitely and obtain solutions for all agents that satisfy consensus and zeroth-order stopping conditions to certain tolerances.

Proof: By Proposition 3, we obtain the convergence result of the distributed cutting-surface consensus algorithm. To prove the finite-time termination of the algorithm, we only need to exclude three possible infinite cases (Case I-III), which are presented in Figure 1.

1) Inexistence of infinite Case I: By Assumption 1, there exists at least one interior point \hat{x} for the (DRCP), we have

$$\hat{x} \in \hat{\mathcal{F}} = \bigcap_{i=1}^{m} \left\{ x \in X | g_i(x, y_i) \le -\epsilon_i^s, \forall y_i \in Y_i \right\}, \quad (19)$$

where ϵ_i^s is a positive scalar parameter for agent i satisfying $0 < \epsilon_i^s \le \min_{y_i \in Y_i} -g_i(\hat{x}, y_i)$. Assume that the (ADRCP^k) is unsolvable at the k-th iteration, i.e., $\mathcal{F}^k = \left\{x \in X | g_i(x, y_i) \le -\epsilon_i^k, \ \forall y_i \in Y_i^k, \ i = 1, ..., m\right\} = \emptyset$. Then, after at most $K_1 = \max_{i \in \mathcal{V}} \lceil \log_r \epsilon_i^k / \epsilon_i^s \rceil$ updates of restriction parameters ϵ_i^k , the relations $0 < \epsilon_i^{K_1} \le \epsilon_i^s$ and $Y_i^{K_1} \subset Y_i$ hold. According to this result and (19), we have $\mathcal{F}^{K_1} \supset \hat{\mathcal{F}} \ne \emptyset$. Therefore, after at most K_1 executions of Case I in Algorithm 1, the (ADRCP^k) becomes solvable.

2) Inexistence of infinite Case II: Referring to the proof idea in [32], we prove that the infinite Case II does not exist for any agent in the loop of Algorithm 1. For any $i \in \mathcal{V}$, we first consider a sequence of solutions of this agent in the (ADRCP^k). Since X is a compact set and Proposition 3 holds, we can select a converging subsequence for agent i satisfying $x_i^k \to \widetilde{x}$ as $k \to \infty$. Assume that at the k-th iteration, the point x_i^k does not satisfy its local constraints \mathcal{F}_i and \overline{y}_i^{\max} is obtained through solving the (LLP_i). Thus, the following relation holds:

$$g_i(x_i^k, \overline{y}_i^{\max}) > 0.$$

In step 15 of Algorithm 1, the point \overline{y}_i^{\max} is added into the finite set of agent i. Hence, for any $l>k\geq 0$, it follows that $\overline{y}_i^{\max}\in Y_i^l$. In Section III-A, the DPG algorithm guarantees the local feasibility of the solution due to the adoption of the Euclidean projection. Therefore, for any l,k $(l>k\geq 0)$, it holds that

$$g_i(x_i^l, \overline{y}_i^{\max}) \le -\epsilon_i^l.$$

Due to the compactness of $X \times Y_i$ and continuity of $g_i(x, y_i)$, $g_i(x, y_i)$ is uniformly continuous and hence

$$\exists \delta > 0 \ g_i(x, \overline{y}_i^{\max}) \le -\epsilon_i^l/2 < 0 \ \|x - x_i^l\| < \delta \ \forall l > k \ge 0$$
(20)

As a result of $x_i^k \to \widetilde{x}$, for any $\delta > 0$ there is

$$\exists K_2: \ \|x_i^l - x_i^k\| < \delta \ \forall l, k: \ l > k \ge K_2$$
 (21)

Combine with (20) and (21), we can conclude that,

$$\exists K_2: g_i(x_i^k, \overline{y}_i^{\max}) \le -\epsilon_i^l/2 < 0 \quad \forall k: k \ge K_2$$

Therefore, we can conclude that for any agent $i \in \mathcal{V}$, after at most K_2 iterations of Algorithm 1, the approximate optimal point $x_i^{K_2}$ of the agent i obtained by solving the (ADRCP^{K2}) satisfies its local constraints \mathcal{F}_i in the (DRCP).

3) Inexistence of infinite Case III: Suppose that the $(ADRCP^k)$ is solvable at the k-th iteration of Algorithm 1. By using DPG algorithm equipped with distributed finite-time termination algorithm, each agent can obtain an approximate optimal solution x_i^k of the $(ADRCP^k)$ (cf. Corollary 1). Moreover, for any agent $i \in \mathcal{V}$, we have

$$||x_i^k - x^{k,*}|| = \delta_i^k \tag{22}$$

where $k\geq 0$. δ_i^k is a positive scalar satisfying $0\leq \delta_i^k\ll \min\left\{\epsilon_4,\epsilon_5,\epsilon_6\right\}$ as the DPG algorithm is fully iterated by setting small parameters $\epsilon_1,\epsilon_2,\epsilon_3$, where $\max\left\{\epsilon_1,\epsilon_2,\epsilon_3\right\}\ll \min\left\{\epsilon_4,\epsilon_5,\epsilon_6\right\}$. Then, we can set $x_i^k=x^{k,*}+\delta_i^k\cdot v_i^k$, where v_i^k is a unit vector equals to $(x_i^k-x^{k,*})/\|x_i^k-x^{k,*}\|$. For any two agents $i,j\in\mathcal{V}$, suppose that they update $z_i^{k_i},z_j^{k_j}$ by Step 6 at the k_i -th and k_j -th iterations of Algorithm 1, respectively. Therefore, we have

$$||z_{i}^{k_{i}} - z_{j}^{k_{j}}|| = ||x_{i}^{k_{i}} - x_{j}^{k_{j}}||$$

$$= ||x^{k_{i},*} + \delta_{i}^{k_{i}} \cdot v_{i}^{k_{i}} - x^{k_{j},*} - \delta_{j}^{k_{j}} \cdot v_{j}^{k_{j}}||$$

$$\leq ||x^{k_{i},*} - x^{k_{j},*}|| + ||\delta_{i}^{k_{i}} \cdot v_{i}^{k_{i}} - \delta_{j}^{k_{j}} \cdot v_{j}^{k_{j}}||$$

$$\leq ||x^{k_{i},*} - x^{k_{j},*}|| + \delta_{i}^{k_{i}} + \delta_{j}^{k_{j}}.$$
(23)

where the two inequalities hold based on the triangle inequality. Next, we discuss the limit on both sides of (23) as $k_i \to \infty$ and $k_j \to \infty$. According to the convergence of $\left\{x^{k,*}\right\}_k$ (cf. Proposition 3), it follows that

$$\lim_{k \to \infty} \|x^{k,*} - x^*\| = 0.$$

By the triangle inequality, there is for any $k_i, k_i \geq 0$,

$$||x^{k_i,*} - x^{k_j,*}|| < ||x^{k_i,*} - x^*|| + ||x^{k_j,*} - x^*||.$$
 (24)

Take the limit on both sides of the inequality (24) as $k_i \to \infty$ and $k_j \to \infty$, it holds that

$$\lim_{k_{i},k_{j}\to\infty} \|x^{k_{i},*} - x^{k_{j},*}\|$$

$$\leq \lim_{k_{i}\to\infty} \|x^{k_{i},*} - x^{*}\| + \lim_{k_{i}\to\infty} \|x^{k_{j},*} - x^{*}\| = 0.$$
(25)

Next, take the limit on both sides of the inequality (23) and combine the relation (25), we can get:

$$\lim_{k_i,k_i\to\infty}\|z_i^{k_i}-z_j^{k_j}\|=\lim_{k_i,k_i\to\infty}\|x_i^{k_i}-x_j^{k_j}\|\leq\lim_{k_i,k_i\to\infty}\delta_i^{k_i}+\delta_j^{k_j}$$




Fig. 3. Network Topology: time-varying unbalanced directed graphs, where the black and blue arrows denote the communication among agents at time slot t and t+1. $\mathcal{G}(t:t+1)$ is strongly connected.

Since $\delta_i^{k_i} + \delta_j^{k_j} \ll \epsilon_4$ holds for any $k \geq 0$, the consensus stopping condition (9a) can be met in finite iterations of Algorithm 1. Similarly, we can verify that the last two conditions in the stopping criterion (9) can also be satisfied within finite iterations. Therefore, we can obtain that Algorithm 1 terminates finitely and the solutions for all agents satisfy consensus and zeroth-order stopping conditions to certain tolerances.

Proposition 5 (Local Feasibility): If Assumptions 1, 2, 4, 5, 6 are satisfied, then the distributed cutting-surface consensus algorithm generates local feasible solutions for the (DRCP), i.e., $z_i^k \in \mathcal{F}_i$, $\forall i \in \mathcal{V}$.

Proof: Since (LLP_i) is solved at optimality for each agent $i \in \mathcal{V}$, this result is straightforward.

Theorem 3: Under Assumptions 1, 2, 4, 5, 6, the distributed cutting-surface consensus algorithm terminates finitely and generates locally feasible solutions for all agents satisfying consensus and zeroth-order stopping conditions to certain tolerances. This holds for any initial restriction parameters $\epsilon_i^0 > 0$, any initial finite or empty sets $Y_i^0 \subset Y_i$, and any reduction parameter r > 1.

Proof: This result follows from Proposition 4 and 5. ■

V. NUMERICAL CASE STUDIES

In this section, a numerical case is presented to validate the effectiveness of the cutting-surface consensus algorithm (i.e., Algorithm 1). Firstly, we analyze and verify the finite-time termination of Algorithm 1 and confirm the effectiveness of the distributed termination algorithm developed in this paper by comparing it with the finite-time consensus termination algorithm in [37]. Then, we verify the local feasibility of the solutions obtained by Algorithm 1 and compare it with the state-of-the-art methods [29], [30]. Finally, we analyze the impacts of the restriction parameter ϵ_i^0 and the reduction parameter r on Algorithm 1. The implementation is carried out in MATLAB Version 9.5.0.944444 (R2018b, win64) and runs on an Intel(R) Core (TM) i7-7700HQ CPU @ 2.80GHz, 256GB terminal server.

Consider a distributed system comprised of six agents. The network topology of this system consists of time-varying unbalanced directed graphs, as shown in Figure 3. The optimization problem is formulated as follows.

$$\min_{x \in X} F(x) = \sum_{i=1}^{m} \|x - q_i\|^2$$
(26)

s.t.
$$g_i(x, y_i) = (x(1) - p_i)^2 + 2y_i x(2) - y_i^2 - 1 \le 0$$

 $\forall y_i \in [-1, 1] \quad i \in \mathcal{V},$

TABLE II
PARAMETERS OF THE PROBLEM

| Agent | Agent 1 | Agent 2 | Agent 3 | Agent 4 | Agent 5 | Agent 6 |
|--------------|---------|---------|---------|---------|---------|---------|
| $q_i \\ p_i$ | [0,6] | [0,0] | [1,1] | [-1,-1] | [1,-1] | [-1,1] |
| | -0.75 | -0.5 | -0.25 | 0.25 | 0.5 | 0.75 |




Fig. 4. Iterative process of Algorithm 1. The blue solid line indicates the evolution of $F = \sum_{i=1}^m f_i(z_i^k)$ with respect to iteration k. The red dashed line presents the global optimal value of the problem (26), where $x^* = [0, \sqrt{7}/4]^\top$. The horizontal coordinates of the black and red dotted-dashed lines represent the number of iterations required by the finite-time consensus termination algorithm in [37] and the termination algorithm developed in this paper, respectively.

where $x = [x(1), x(2)]^{\mathrm{T}}$, $X = \{x \in \mathbb{R}^2 | -2 \le x(1) \le 2, -1 \le x(2) \le 1\}$, $q_i \in \mathbb{R}^2$ and $p_i \in \mathbb{R}$ are agent *i*'s parameters for the local cost function and local constraint, respectively (see Table II for specific values).

A. Analysis of Finite-Time Termination

For Algorithm 1, we initiate the restriction parameter $\epsilon_i^0=100$ and the initial set $Y_i^0=\emptyset$ for each $i\in\mathcal{V}$, along with the reduction parameter r=10. For Algorithm 2, we set the termination parameters as $\epsilon_4=0.1$, $\epsilon_5=0.1$ and $\epsilon_6=0.1$. Moreover, for the DPG algorithm equipped with the distributed termination method, we set the stepsize as $\alpha(t)=\frac{1}{\sqrt{t}}$, and the termination parameters as $\epsilon_1=10^{-2}$, $\epsilon_2=10^{-6}$, $\epsilon_3=10^{-6}$.

For this example, the distributed cutting-surface consensus algorithm terminates after eight iterations. Figure 4 shows the iterative process of Algorithm 1, from which it can be seen that with the iteration of Algorithm 1, the global objective $F = \sum_{i=1}^m f_i(z_i^k)$ converges to the optimal value F^* of the problem (26). Note that in the first three iterations of Algorithm 1, since there exists at least an agent $i \in \mathcal{V}$ that fails to execute Step 6 in Algorithm 1, its candidate point z_i^k satisfies $\|z_i^k\| = \|z_i^0\| = +\infty$. Therefore, we have $\sum_{i=1}^m f_i(z_i^k) = +\infty$. In addition, we discuss the iterative process of the DPG

In addition, we discuss the iterative process of the DPG algorithm when the local constraints \mathcal{F}_i^k of all agents in the (ADRCP^k) are nonempty. Figure 5 presents that the DPG algorithm reaches convergence when the (ADRCP^k) is solvable, i.e. $\mathcal{F}^k = \bigcap_{i=1}^m \mathcal{F}_i^k \neq \emptyset$. Figure 6 illustrates that the DPG algorithm fails to reach consensus and optimality when the (ADRCP^k) is unsolvable, i.e. $\mathcal{F}^k = \emptyset$. As described in




Fig. 5. Iterative process of the DPG algorithm, when the $(\mathbf{ADRCP^k})$ is solvable $(\epsilon_i^k=0.1 \text{ and } Y_i^k=[1] \text{ for all agents})$. The six solid lines indicates the evolution of $||x_i^k(t)-x^{k,*}||$ with the time slot t, where $x_i^k(t)$ is agent i's state in the time slot t of the DPG algorithm. The red dashed line presents the value $||x_i^k(t)-x^{k,*}||=0$. The horizontal coordinates of the black and red dotted-dashed lines represent the number of iterations required by the finite-time consensus termination algorithm in [37] and the proposed termination algorithm, respectively. The zoomed-in part shows our optimality gap is smaller than that achieved by [37].




Fig. 6. Iterative process of the DPG algorithm, when the $(\mathbf{ADRCP^k})$ is unsolvable $(\epsilon_i^k=5$ and $Y_i^k=[1]$ for all agents). The six solid lines indicates the evolution of $||x_i^k(t)-\overline{x}^k(T)||$ with the time slot t, where $x_i^k(t)$ denotes agent i's state in the time slot t of the DPG algorithm, $T=10^{-7}$ and $\overline{x}^k(T)=\frac{1}{m}\sum_{i=1}^m x_i^k(T)$.

Section IV-A, to ensure finite-time termination of Algorithm 1, we set the maximum number of time slots $T=10^7$ to force the termination of the DPG algorithm for this situation.

Moreover, we compare our termination algorithm with the finite-time consensus algorithm in [37]. In solving the (DRCP), the finite-time consensus algorithm achieves termination in the fourth iteration of Algorithm 1, as shown in Figure 4. However, the resulting solution is not the approximate optimal solution for the (DRCP). In contrast, our distributed termination algorithm not only ensures the consensus of the solutions but also guarantees their approximate optimality upon termination of Algorithm 1. Besides, when solving the (ADRCP^k), our solution is more accurate than that of the finite-time consensus algorithm [37] under the same consensus




Fig. 7. Comparison of Algorithm 1 with the cutting-plane consensus algorithm in [29], [30] in terms of solution feasibility of the agent 1. The blue curve indicates the profile of $g_1(\hat{z}_1^k,y)$ regarding the uncertainty parameter y, where \hat{z}_1^k is the resulting solution of the cutting-plane consensus algorithm. Similarly, the black curve is the profile obtained according to the cutting-surface consensus approach.

TABLE III
FEASIBILITY OF THE SOLUTION OF AN AGENT TO ITS OWN CONSTRAINT

| Agent | Agent 1 | Agent 2 | Agent 3 | Agent 4 | Agent 5 | Agent 6 |
|-----------------|---------|--------------|--------------|--------------|---------|----------|
| cutting-surface | ✓ | ✓ | ✓ | ✓ | ✓ | √ |
| cutting-plane | × | \checkmark | \checkmark | \checkmark | ✓ | × |

accuracy ϵ_1 . This stems from the introduction of the zeroth-order stopping conditions (4b) and (4c), enabling the DPG algorithm to generate a more approximate optimal solution for each agent, as shown in Figure 5.

B. Analysis of Local Feasibility of The Solutions

In this subsection, we compare Algorithm 1 with the cutting-plane consensus algorithms in [29], [30] to present the superiority of our algorithm in terms of feasibility assurance of the resulting solutions. The cutting-plane consensus algorithms are based on successively populating cutting-planes into the finite set of constraints to externally approximate the (DRCP), which fails to ensure the feasibility of the resulting solutions. By comparison, Algorithm 1 is based on iteratively approximating the (DRCP) by successively reducing the restriction parameters ϵ_i^k of the right-hand constraints and expanding the finite sets Y_i^k , which enables each agent to obtain a feasible solution within a finite number of iterations. This result is illustrated by Figure 7 and Table III.

Additionally, compared with the cutting-plane consensus algorithms in [29], [30], our approach possesses the following three characteristics: 1) Our approach can handle optimization problems with different local cost functions; 2) Our approach eliminates the need to exchange local constraints with neighboring agents, which reduces communication costs and protects the privacy of each agent; 3) The constraints updated by our approach at each iteration are non-polyhedral, which allows us to deal with optimization problems with high-dimensional decision variables more efficiently [31].




Fig. 8. Effect of turning parameter ϵ_i^0 . The reduction parameter is r=2.




Fig. 9. Effect of turning parameter r. The initial restriction parameter is $\epsilon_s^i=100$ for any $i\in\mathcal{V}$.

C. Computational Performance of Adjusting ϵ_i^0 and r

Similar to [32] and [33], the parameters ϵ_i^0 and r have a great influence on the computational performance of Algorithm 1. In this optimization problem, we set all the ϵ_i^0 to equal values and Y_i^0 to the empty set.

For a fixed reduction parameter r=2, the effect of turning parameter ϵ_i^0 is shown in Figure 8, where $10^{-4} < \epsilon_i^0 < 10^5$. When the parameter ϵ_i^0 is small ($\epsilon_i^0 \le 1$), the number of solvability cuts remains zero as the (ADRCP^k) is solvable throughout the iterations of Algrithm 1. Besides, the number of optimality cuts sees a steady increase as ϵ_i^0 rises in this stage. Conversely, when the parameter ϵ_i^0 is large ($\epsilon_i^0 > 1$), the (ADRCP^k) becomes unsolvable in the initial iterations of Algorithm 1, leading to a growth in the number of solvability cuts with ϵ_i^0 . However, the number of optimality cuts remains basically unchanged in this stage. In addition, the number of feasibility cuts is basically unchanged regardless of the value of ϵ_i^0 . To sum up, as ϵ_i^0 rises, the number of iterations of Algorithm 1 increases due to the increase in optimality cuts (for small ϵ_i^0) and solvability cuts (for large ϵ_i^0).

For a fixed restriction parameter $\epsilon_i^0 = 100$, the effect of turning parameter r is shown in Figure 9, where $1 < r \le$

1000. When r is small (r < 10), increasing r leads to a sharp decrease in the quantities of optimality cuts and solvability cuts. Conversely, for larger values of r (r > 10), the number of optimality cuts and solvability cuts decreases gradually and eventually stabilizes. Regardless of the value of r, the number of feasibility cuts remains virtually unchanged. In summary, as r increases, the number of iterations of Algorithm 1 decreases along with the reduction in the quantities of optimality cuts and solvability cuts.

Remark 5: It is worth noting that there is a limit to the computational accuracy of MATLAB. Therefore, we cannot set ϵ_i^0 too small ($\epsilon_i^0 < 10^{-7}$), or r too large ($r > 10^3$), as this would lead to the number of feasibility cuts and iterations tends to infinity, thus preventing Algorithm 1 from terminating within a finite number of iterations.

VI. CONCLUSION

A cutting-surface consensus approach is proposed for solving the distributed robust convex optimization problems of multi-agent systems with guaranteed both feasibility and convergence, which is applicable to time-varying unbalanced directed graphs under the assumption of uniformly jointly strong connectivity. Then, it is proved that this approach converges to a feasible solution satisfying consensus and zeroth-order stopping conditions to certain tolerances within a finite number of iterations. Moreover, we use a numerical example to illustrate the effectiveness of the approach.

Direct extensions may lie in the following two aspects. First, in the current cutting-surface consensus approach, we use the distributed projected gradient (DPG) algorithm to solve the approximate problem (ADRCP^k). We could also design other constrained distributed optimization algorithms to solve the problem, ensuring that the resulting solutions of these algorithms are feasible to the (ADRCP^k). In addition, this paper mainly studies robust optimization with bounded uncertainty, and future research may consider studying more general distributionally robust optimization (DRO) problems with moment uncertainty in multi-agent systems.

APPENDIX

In this Appendix, referring to the proof idea of the distributed projected subgradient algorithm under fixed unbalanced graphs [41], we prove the convergence and convergence rate of the proposed DPG algorithm in Section III-A.

A. Proof of Theorem 1

Lemma 1 ([34] Lemma 2): Let $\{G(t)\}$ and $\{A(t)\}$ satisfy Assumptions 2, 4. For any $s \ge t$, define A(s:t) = A(s-1). A(t) where A(t:t) = I and $a_{ij}(s:t)$ denote the entries of A(s:t). For any $t \ge 0$, there exists a normalized vector $\pi(t)$, i.e., $1_m^{\top} \pi(t) = 1$, such that

- (a) there exist B > 0 and $0 < \lambda < 1$ such that $|a_{ij}(s)|$ $|t) - \pi_j(t)| \leq B\lambda^{s-t} \text{ for any } i,j \in \mathcal{V} \text{ and } s \geq t.$ (b) there is a constant $\eta \geq \gamma^{(m-1)S}$ such that $\pi_i(t) \geq \eta$ for
- any $i \in \mathcal{V}$ and $t \geq 0$.
- (c) $(\pi(t))^{\top} = (\pi(t+1))^{\top} A(t)$

Lemma 2 ([50] Corollary 2): Let U be the convex hull of $\bigcup_{i\in\mathcal{V}}\Omega_i$, i.e. $U=\operatorname{conv}(\bigcup_{i\in\mathcal{V}}\Omega_i)$. Suppose that Assumption 3 holds and Ω_i is a compact set, then there exists a constant $R \ge 1$ such that

$$\operatorname{dist}(x, \cap_{i \in \mathcal{V}} \Omega_i) \le R \max_{i \in \mathcal{V}} \operatorname{dist}(x, \Omega_i), \quad \forall x \in U.$$

 $\begin{aligned} \operatorname{dist}(x, \cap_{i \in \mathcal{V}} \Omega_i) &\leq R \max_{i \in \mathcal{V}} \operatorname{dist}(x, \Omega_i), \quad \forall x \in U. \\ \textit{Lemma 3 ([41] Lemma 4): } \operatorname{Let} \left\{v(t)\right\}, \left\{b(t)\right\}, \left\{u(t)\right\} \text{ and } \left\{e(t)\right\} \text{ be nonnegative sequences, where } \sum_{t=0}^{\infty} b(t) < \infty, \end{aligned}$ $\sum_{t=0}^{\infty} e(t) < \infty$ and

$$v(t+1) \le (1+b(t))v(t) - u(t) + e(t), \quad \forall t \ge 0.$$
 (27)

Then, the sequence $\{v(t)\}$ is convergent, and $\sum_{t=0}^{\infty} u(t) < \infty$. Proposition 6: Let Assumptions 2, 3, 4 be satisfied. Then for the algorithm (3), the following holds for any $v \in \Omega$ and

$$\sum_{i=1}^{m} \pi_{i}(t+1) \|\theta_{i}(t+1) - v\|^{2}$$

$$\leq \sum_{i=1}^{m} \pi_{i}(t) \|\theta_{i}(t) - v\|^{2} - 2\alpha(t)c^{\top}(\overline{\theta}(t) - v) + C^{2}\alpha^{2}(t)$$

$$+ 2C\alpha(t) \sum_{i=1}^{m} \pi_{i}(t) \|\theta_{i}(t) - \overline{\theta}(t)\| - \sum_{i=1}^{m} \pi_{i}(t+1) \|\phi_{i}(t)\|^{2}$$

where
$$C = ||c||$$
, $\overline{\theta}(t) = \sum_{j=1}^{m} \pi_j(t)\theta_j(t)$, $\forall t \ge 0$, and $\phi_i(t) = \theta_i(t+1) - \left[\sum_{j=1}^{m} a_{ij}(t)\theta_j(t) - \alpha(t)c\right]$.

Proof: Let $\tilde{\theta}_i(t) = \sum_{j=1}^m a_{ij}(t)\theta_j(t)$ and $v \in \Omega$. By Lemma 1(b) in [35], it holds that

$$\|\theta_{i}(t+1) - v\|^{2} = \|\tilde{\theta}_{i}(t) - v - \alpha(t)c + \phi_{i}(t)\|^{2}$$

$$\leq \|\tilde{\theta}_{i}(t) - v - \alpha(t)c\|^{2} - \|\phi_{i}(t)\|^{2}.$$
(29)

The first term on the right-hand side of (29) is equal to

$$\|\tilde{\theta}_i(t) - v\|^2 + 2\alpha(t)c^{\top}(v - \tilde{\theta}_i(t)) + \alpha^2(t)C^2.$$
 (30)

Next, we establish an upper bound for each term in (30). Since the matrix A(t) is row stochastic, it holds that $\hat{\theta}_i(t) - v =$ $\sum_{j=1}^{m} a_{ij}(t)(\theta_j(t)-v)$. By the convexity of $\|\cdot\|^2$, we have

$$\|\tilde{\theta}_i(t) - v\|^2 \le \sum_{j=1}^m a_{ij}(t) \|(\theta_j(t) - v)\|^2.$$
 (31)

Disregarding $2\alpha(t)$, the second term in (30) meets

$$c^{\top}(v - \tilde{\theta}_{i}(t)) = c^{\top}[v - \overline{\theta}(t) + \overline{\theta}(t) - \tilde{\theta}_{i}(t)]$$

$$\leq c^{\top}(v - \overline{\theta}(t)) + \left| c^{\top}\tilde{\theta}_{i}(t) - c^{\top}\overline{\theta}(t) \right|$$

$$\leq c^{\top}(v - \overline{\theta}(t)) + C \sum_{j=1}^{m} a_{ij}(t) \|\theta_{j}(t) - \overline{\theta}(t)\|,$$
(32)

where the first inequality derives from the triangle inequality, and the last inequality follows from the Cauchy-Schwarz inequality and the convexity of $\|\cdot\|$. Using the relations of (31) and (32), we can obtain the upper bound of (30). Then, we take this upper bound into (29) and execute a weighted sum on both sides of the (29), yielding:

$$\sum_{i=1}^{m} \pi_{i}(t+1) \|\theta_{i}(t+1) - v\|^{2}$$

$$\leq \sum_{i=1}^{m} \pi_{i}(t+1) \sum_{j=1}^{m} a_{ij}(t) \|\theta_{j}(t) - v\|^{2}$$

$$- \sum_{i=1}^{m} \pi_{i}(t+1) 2\alpha(t) c^{\top}(\overline{\theta}(t) - v)$$

$$+ \sum_{i=1}^{m} \pi_{i}(t+1) 2\alpha(t) C \sum_{j=1}^{m} a_{ij}(t) \|\theta_{j}(t) - \overline{\theta}(t)\|$$

$$+ \sum_{i=1}^{m} \pi_{i}(t+1) \alpha^{2}(t) C^{2} - \sum_{i=1}^{m} \pi_{i}(t+1) \|\phi_{i}(t)\|^{2}.$$
(33)

By Lemma 1(c), it holds that $\sum_{i=1}^m \pi_i(t+1) \sum_{j=1}^m a_{ij}(t) \|\theta_j(t) - v\|^2 = \sum_{i=1}^m \pi_i(t) \|(\theta_i(t) - v)\|^2$, $\sum_{i=1}^m \pi_i(t+1) \sum_{j=1}^m a_{ij}(t) \|\theta_j(t) - \overline{\theta}(t)\| = \sum_{i=1}^m \pi_i(t) \|\theta_i(t) - \overline{\theta}(t)\|$. Taking this result and $\sum_{i=1}^m \pi_i(t+1) = 1$ into (33), we can obtain (28) as desired.

Proposition 7: Let Assumptions 2, 3, 4 be satisfied. Then for the algorithm (3), the following relations hold.

- (a) Let $\beta(t) = \sum_{i=1}^m \|\phi_i(t)\|$. For any $t \geq 0$, $\beta^2(t) \leq m \sum_{i=1}^m \|\phi_i(t)\|^2$.
- (b) Let $D_1 = B \sum_{j=1}^m \|\theta_j(0)\|$ and $D_2 = mBC$. For any $i \in$
- stepsize sequence $\{\alpha(t)\}$ is nonincreasing, then $\psi(t+$ $1) < \lambda \psi(t) + \alpha(t)\beta(t).$

Proof: Parts (a) and (c) are straightforward. Here, we only prove that part (b) holds. Firstly, we write (3) as $\theta_i(t+1) = \sum_{j=1}^m a_{ij}(t)\theta_j(t) + \epsilon_i(t)$, where $\epsilon_i(t) \in$ $\mathbb{R}^{n} \text{ represents an error term. Hence, it holds that } \theta_{i}(t) = \sum_{j=1}^{m} [A(t:0)]_{ij} \theta_{j}(0) + \sum_{r=0}^{t-1} \sum_{j=1}^{m} [A(t:r+1)]_{ij} \epsilon_{j}(r).$ Due to $\overline{\theta}(t) = \sum_{j=1}^{m} \pi_{j}(t) \theta_{j}(t)$ and Lemma 1(c), we obtain $\overline{\theta}(t) = \sum_{j=1}^{m} \pi_{j}(0) \theta_{j}(0) + \sum_{r=0}^{t-1} \sum_{j=1}^{m} \pi_{j}(r+1) \epsilon_{j}(r).$ Therefore, $\|\theta_{i}(t) - \overline{\theta}(t)\| = \|\sum_{j=1}^{m} ([A(t:0)]_{ij} - \pi_{j}(0)) \theta_{j}(0) + \sum_{j=1}^{t-1} \sum_{j=1}^{m} ([A(t:0)]_{ij} - \pi_{j}(0)) \theta_{j}(0) + \sum_{j=1}^{t-1} \sum_{j=1}^{t-1} ([A(t:0)]_{ij} - T_{j}(0)) \theta_{j}(0) + \sum_{j=1}^{t-1} \sum_{j=1}^$ $\sum_{r=0}^{t-1} \sum_{j=1}^{m} \left([A(t:r+1)]_{ij} - \pi_j(r+1) \right) \epsilon_j(r) \| \le \sum_{j=1}^{m} \left| [A(t:0)]_{ij} - \pi_j(0) \right| \|\theta_j(0)\| + \sum_{r=0}^{t-1} \sum_{j=1}^{m} \left| [A(t:r+1)]_{ij} - \pi_j(r+1) \right| = \sum_{j=1}^{m} \left| [A(t:r+1)]_{i$ $1)|\|\epsilon_i(r)\|$. By Lemma 1(a), we have

$$\|\theta_i(t) - \overline{\theta}(t)\| \le B \sum_{j=1}^m \|\theta_j(0)\| \lambda^t + B \sum_{r=0}^{t-1} \lambda^{t-r-1} \sum_{j=1}^m \|\epsilon_j(r)\|.$$
(34)

Consider the algorithm (3), it satisfies that $\epsilon_i(t) = \phi_i(t)$ – $\alpha(t)c$. By utilizing the triangle inequality, it holds that $\|\epsilon_i(t)\| \leq \|\phi_i(t)\| + \alpha(t)C, \ \forall i \in \mathcal{V}$. Using the bound into (34), the result in part (b) is proved.

Corollary 2: In Proposition 7, if $\lim_{t\to\infty} \beta(t) = 0$, then $\lim_{t\to\infty}\psi(t)=0$. In addition, if $\lim_{t\to\infty}\alpha(t)=0$, then $\lim_{t \to \infty} \sum_{i=1}^{m} \pi_i(t) \|\theta_i(t) - \overline{\theta}(t)\| = 0.$

Proof: It is straightforward to derive from Lemma 7 in [35].

Based on Propositions 6 and 7. we obtain the following important result, which is crucial for proving the convergence of the distributed projected gradient algorithm.

Proposition 8: Let Assumptions 2, 3, 4 be satisfied. If $\{\alpha(t)\}\$ is nonincreasing, then for the algorithm (3), we have

$$\sum_{i=1}^{m} \pi_{i}(t+1) \|\theta_{i}(t+1) - v\|^{2} + ab\psi(t+1)$$

$$\leq \sum_{i=1}^{m} \pi_{i}(t) \|\theta_{i}(t) - v\|^{2} + ab\psi(t) - 2\alpha(t)c^{\top}(w(t) - v) + D_{5}\alpha^{2}(t)$$

$$-D_{4} \sum_{i=1}^{m} \|\phi_{i}(t)\|^{2} + D_{13}\alpha(t)\lambda^{t} + D_{23}\alpha(t) \sum_{r=0}^{t-1} \lambda^{t-r-1}\alpha(r)$$
where $w(t) = P_{\Omega}[\overline{\theta}(t)], b = \sqrt{\frac{\eta}{m}}, a = \frac{D_{3}B}{(1-\lambda)b}, D_{3} = 2C(1 + \frac{R}{\eta}), D_{4} = \frac{\eta}{2}, D_{5} = C^{2} + \frac{a^{2}}{2}, D_{13} = D_{1}D_{3} \text{ and } D_{23} = D_{2}D_{3}.$

Proof: By adding and subtracting $c^{\top}w(t)$ and using Lipschitz continuity of the function $f_0 = c^{\top} \theta$, we have $c^{+}(v-\overline{\theta}(t)) \leq c^{+}(v-w(t)) + C\|w(t)-\overline{\theta}(t)\|$. Subsequently, we find an upper bound for the term $||w(t) - \overline{\theta}(t)||$. According to Lemma 2, it follows that

$$\|w(t) - \overline{\theta}(t)\| = \operatorname{dist}(\overline{\theta}(t), \Omega) \le R \max_{i \in \mathcal{V}} \operatorname{dist}(\overline{\theta}(t), \Omega_i)$$

$$\le \sum_{i=1}^{m} \frac{R\pi_i(t)}{\eta} \operatorname{dist}(\overline{\theta}(t), \Omega_i) \le \sum_{i=1}^{m} \frac{R\pi_i(t)}{\eta} \|\theta_i(t) - \overline{\theta}(t)\|,$$
(36)

where the second inequality follows from $\pi_i(t)/\eta \geq 1$ (cf. Lemma 1(b)), and the last inequality is satisfied as $\operatorname{dist}(\theta(t), \Omega_i) \leq \|\theta_i(t) - \theta(t)\|$ (cf. formula (2) in [35]). Thus, $c^{\top}(v - \overline{\theta}(t)) \le c^{\top}(v - w(t)) + \frac{RC}{n} \sum_{i=1}^{m} \pi_i(t) \|\theta_i(t) - \overline{\theta}(t)\|.$ Using this bound for (28), we obtain

$$\sum_{i=1}^{m} \pi_{i}(t+1) \|\theta_{i}(t+1) - v\|^{2}$$

$$\leq \sum_{i=1}^{m} \pi_{i}(t) \|\theta_{i}(t) - v\|^{2} - 2\alpha(t)c^{\top}(w(t) - v) + C^{2}\alpha^{2}(t)$$

$$+ D_{3}\alpha(t) \sum_{i=1}^{m} \pi_{i}(t) \|\theta_{i}(t) - \overline{\theta}(t)\| - \sum_{i=1}^{m} \pi_{i}(t+1) \|\phi_{i}(t)\|^{2},$$
(37)

where $D_3 = 2C(1 + \frac{R}{n})$. Then, adding $ab\psi(t+1)$ to both sides of (37) and combining the results in Proposition 7(b), (c), we further have

$$\sum_{i=1}^{m} \pi_{i}(t+1) \|\theta_{i}(t+1) - v\|^{2} + ab\psi(t+1)$$

$$\leq \sum_{i=1}^{m} \pi_{i}(t) \|\theta_{i}(t) - v\|^{2} + ab\psi(t) + ab(\lambda - 1)\psi(t) + ab\alpha(t)\beta(t)$$

$$-2\alpha(t)c^{\top}(w(t) - v) + C^{2}\alpha^{2}(t) - \sum_{i=1}^{m} \pi_{i}(t+1) \|\phi_{i}(t)\|^{2}$$

$$+ D_{13}\alpha(t)\lambda^{t} + D_{23}\alpha(t) \sum_{r=0}^{t-1} \lambda^{t-r-1}\alpha(r) + D_{3}B\psi(t).$$
(38)

where $D_{13}=D_1D_3$, $D_{23}=D_2D_3$. Since $a=\frac{D_3B}{(1-\lambda)b}$, the two terms $ab(\lambda-1)\psi(t)$ and $D_3B\psi(t)$ cancel out. Moreover, we can also obtain $2ab\alpha(t)\beta(t) \leq a^2\alpha^2(t) + b^2\beta^2(t) \leq$ $a^2\alpha^2(t)+b^2m\sum_{i=1}^m\|\phi_i(t)\|^2$, where the last inequality follows from Proposition 7(a). Therefore, with $b^2=\frac{\eta}{m}$, it can be verified that $ab\alpha(t)\beta(t) - \sum_{i=1}^m \pi_i(t+1)\|\phi_i(t)\|^2 \le \frac{a^2}{2}\alpha^2(t) - \frac{\eta}{2}\sum_{i=1}^m \|\phi_i(t)\|^2$. By applying the above relations to (38), we get (35).

Finally, we prove the convergence of the algorithm (3), which relies on the results of Proposition 8 and Lemma 3.

Proof of Theorem 1:

To establish the convergence of the DPG algorithm, we mainly divide the process into two steps: (i) Applying Lemma 3 to (35); (ii) Proving convergence.

Step (i): Set $\theta^* \in \Omega^*$ $(\Omega^* \subset \Omega)$ as an optimal solution and define the nonnegative sequences $\{v(t)\}$, $\{b(t)\}$, $\{u(t)\}$ and $\{e(t)\}$ as follows:

$$v(t) = \sum_{i=1}^{m} \pi_i(t) \|\theta_i(t) - \theta^*\|^2 + ab\psi(t), \quad b(t) = 0,$$

$$u(t) = 2\alpha(t)c^{\top}(w(t) - \theta^*) + D_4 \sum_{i=1}^{m} \|\phi_i(t)\|^2,$$

$$e(t) = D_{13}\alpha(t)\lambda^{t} + D_{23}\alpha(t)\sum_{r=0}^{t-1} \lambda^{t-r-1}\alpha(r) + D_{5}\alpha^{2}(t).$$

From Proposition 8, we can obtain $v(t+1) \leq (1+b(t))v(t) - u(t) + e(t)$, $\forall t \geq 0$. Then, we demonstrate that $\{b(t)\}$ and $\{e(t)\}$ are summable. Since b(t) = 0, we have $\sum_{t=0}^{\infty} b(t) = 0 < \infty$. Next, consider each term in e(t). Firstly, $\sum_{t=0}^{\infty} D_5 \alpha^2(t) < \infty$ by Assumption 5. Secondly, using the fact $2\alpha(t)\lambda^t \leq \alpha^2(t) + \lambda^{2t}$ yields $\sum_{t=0}^{\infty} D_{13}\alpha(t)\lambda^t \leq \frac{D_{13}}{2} \left[\sum_{t=0}^{\infty} \alpha^2(t) + \sum_{t=0}^{\infty} \lambda^{2t}\right] < \infty$. Thirdly, by monotonicity of $\{\alpha(t)\}$, the second term in e(t) satisfies: $\alpha(t)\sum_{r=0}^{t-1} \lambda^{t-r-1}\alpha(r) \leq \sum_{r=0}^{t-1} \lambda^{t-r-1}\alpha^2(r)$. According to Lemma 7 in [35], we can obtain $\sum_{t=0}^{\infty} \sum_{r=0}^{t-1} \lambda^{t-r-1}\alpha^2(r) < \infty$. Thus, it holds that $\sum_{t=0}^{\infty} D_{23}\alpha(t)\sum_{r=0}^{t-1} \lambda^{t-r-1}\alpha(r) < \infty$. Hence, the sequence $\{e(t)\}$ is summable. By Lemma 3, there exists a constant $\delta > 0$ such that

$$\lim_{t \to \infty} \sum_{i=1}^{m} \pi_i(t) \|\theta_i(t) - \theta^*\|^2 + ab\psi(t) = \delta, \tag{39}$$

$$\sum_{t=0}^{\infty} \left[2\alpha(t)c^{\top}(w(t) - \theta^*) + D_4 \sum_{i=1}^{m} \|\phi_i(t)\|^2 \right] < \infty.$$
 (40)

Step (ii): Firstly, by (40), we have $\lim_{t\to\infty}\sum_{i=1}^m\|\phi_i(t)\|^2=0$. Thus, $\lim_{t\to\infty}\beta(t)=0$, which by Corollary 2 yields $\lim_{t\to\infty}\psi(t)=0$. It then follows from (39) that

$$\lim_{t \to \infty} \sum_{i=1}^{m} \pi_i(t) \|\theta_i(t) - \theta^*\|^2 = \delta.$$
 (41)

Next, since $\sum_{t=0}^{\infty} \alpha(t) = \infty$ and $c^{\top}(w(t) - \theta^*) \ge 0, \forall t \ge 0$, it then follows from (40) that $\lim_{t \to \infty} w(t) = \theta^*$.

It now remains to demonstrate that $\delta=0$. By using the triangle and Cauchy-Schwarz inequalities, it can be confirmed that $\|\theta_i(t)-\theta^*\|^2 \leq 3(\|\theta_i(t)-\overline{\theta}(t)\|^2+\|\overline{\theta}(t)-w(t)\|^2+\|w(t)-\theta^*\|^2)$. Next, since $\|\overline{\theta}(t)-w(t)\|\leq \frac{R}{\eta}\sum_{i=1}^m \pi_i(t)\|\theta_i(t)-\overline{\theta}(t)\|$ (cf. inequality (36)), we have $\|\overline{\theta}(t)-w(t)\|^2 \leq \frac{R^2}{\eta^2}\sum_{i=1}^m \pi_i(t)\|\theta_i(t)-\overline{\theta}(t)\|^2$ by the convexity of $\|\cdot\|^2$. As a result, $\frac{\|\theta_i(t)-\theta^*\|^2}{3}\leq \|\theta_i(t)-\overline{\theta}(t)\|^2+\frac{R^2}{\eta^2}\sum_{i=1}^m \pi_i(t)\|\theta_i(t)-\overline{\theta}(t)\|^2+\|w(t)-\theta^*\|^2$. Multiplying both

sides by $\pi_i(t)$ then summing over $i \in \mathcal{V}$ yields the following, with $R' = 1 + R^2/\eta^2$:

$$\sum_{i=1}^m \frac{\pi_i(t)}{3} \|\theta_i(t) - \theta^*\|^2 \leq R' \sum_{i=1}^m \pi_i(t) \|\theta_i(t) - \overline{\theta}(t)\|^2 + \|w(t) - \theta^*\|^2.$$

Taking $\lim_{t\to\infty}$ on both sides and using (41) yields:

$$\frac{\delta}{3} \le \lim_{t \to \infty} \|w(t) - \theta^*\|^2. \tag{42}$$

Here we have use the fact $\lim_{t\to\infty}\sum_{i=1}^m \pi_i(t)\|\theta_i(t)-\overline{\theta}(t)\|=0$ (cf. Corollary 2). Since $\delta\geq 0$ and $\lim_{t\to\infty}\|w(t)-\theta^*\|^2=0$, it holds that $\delta=0$. Therefore, we can obtain the convergence of the algorithm (3), i.e., $\lim_{t\to\infty}\theta_i(t)=\theta^*, \ \forall i\in\mathcal{V}$.

B. Proof of Theorem 2

Proposition 9: Suppose that the stepsize sequence $\{\alpha(t)\}$ is nonnegative and nonincreasing and Assumptions 2, 3, 4 hold. Define $\hat{\theta}_i(t) = \frac{\sum_{r=0}^t \alpha(r)\theta_i(r)}{\sum_{r=0}^t \alpha(r)}$, $\hat{w}(t) = \frac{\sum_{r=0}^t \alpha(r)w(r)}{\sum_{r=0}^t \alpha(r)}$. For the algorithm (3), the following holds:

$$C_0 \|\hat{\theta}_i(t) - \hat{w}(t)\| + c^\top (\hat{w}(t) - \theta^*) \le E(t), \quad \forall t \ge 0,$$
 (43)

where $E(t) = \frac{C_1 + C_2 \sum_{r=0}^t \alpha^2(r)}{\sum_{r=0}^t \alpha(r)}, \ C_0 = \frac{(1-\lambda)D_4}{2m(Rm+1)B}, \ C_1 = R_1 + \frac{D_{13}}{2(1-\lambda)}\alpha(0) + \frac{D_4D_1\alpha(0)}{2mB} \ \text{and} \ C_2 = \frac{D_{23}}{2(1-\lambda)} + \frac{D_5}{2} + \frac{D_4}{2m}(\frac{D_2}{B} + \frac{1}{4}) \ \text{with} \ R_1 = \frac{1}{2} \sum_{i=1}^m \pi_i(0) \|\theta_i(0) - \theta^*\| \ \text{for any} \ \theta^* \in \Omega^*.$ Moreover.

$$|f_0(\hat{\theta}_i(t)) - f_0^*| \le E(t)(1 + C/C_0).$$
 (44)

Proof: We proceed in three steps: (i) Using the inequality (35) in Proposition 8 to give an upper estimate for the sum $\sum_{r=0}^t \left\{ 2\alpha(r)c^\top(w(t) - \theta^*) + D_4 \sum_{i=1}^m \|\phi_i(r)\|^2 \right\}$ in terms of $\sum_{r=0}^t \alpha(r)$ and $\sum_{r=0}^t \alpha^2(r)$; (ii) Relating the left side of (43) to this sum by leveraging the convexity of $f_0(\theta) = c^\top \theta$ and Proposition 7; (iii) Proving (44) by using Lipschitz continuity of f_0 and (43).

Step (i): Let $\{v(t)\}$, $\{u(t)\}$, $\{b(t)\}$ and $\{e(t)\}$ be defined as in Step (i) of the proof of Theorem 1. Furthermore, set $\Phi(t) = \sum_{i=1}^{m} \|\phi_i(t)\|^2$. By using Proposition 8, we have that $v(t+1) \leq v(t) - u(t) + e(t)$, $\forall t \geq 0$, which then implies that

$$v(t+1) \le v(0) + \sum_{r=0}^{t} [e(r) - u(r)]$$
 (45)

By rearranging terms and using $v(t+1) \ge 0$, we have

$$\sum_{r=0}^{t} \left[\alpha(r) c^{\top}(w(r) - \theta^*) + \frac{D_4}{2} \Phi(r) \right] \le R_1 + \frac{1}{2} \sum_{r=0}^{t} e(r)$$
 (46)

where $R_1 = \frac{1}{2} \sum_{i=1}^m \pi_i(0) \|\theta_i(0) - \theta^*\|$. Next, we will establish an upper bound for the term $\sum_{r=0}^t e(r)$ from the following estimates:

$$\sum_{r=0}^{t} \alpha(r)\lambda^r \le \sum_{r=0}^{t} \alpha(0)\lambda^r \le \frac{\alpha(0)}{1-\lambda},\tag{47}$$

$$\sum_{r=1}^{t} \alpha(r) \sum_{s=0}^{r-1} \lambda^{r-1-s} \alpha(s) \le \sum_{r=1}^{t} \sum_{s=0}^{r-1} \lambda^{r-1-s} \alpha^{2}(s)$$

$$= \sum_{s=0}^{t-1} \alpha^{2}(s) \sum_{r=s+1}^{t} \lambda^{r-1-s} \le \sum_{s=0}^{t-1} \frac{\alpha^{2}(s)}{1-\lambda},$$
(48)

Hence, $\sum_{r=0}^t e(r) \leq \frac{D_{13}}{1-\lambda}\alpha(0) + (\frac{D_{23}}{1-\lambda} + D_5)\sum_{r=0}^t \alpha^2(r)$. Therefore,

$$\sum_{r=0}^{t} \left[\alpha(r) c^{\top}(w(r) - \theta^*) + \frac{D_4}{2} \Phi(r) \right] \leq M_1 + M_2 \sum_{r=0}^{t} \alpha^2(r) \tag{49}$$

with $M_1=R_1+\frac{D_{13}}{2(1-\lambda)}\alpha(0)$ and $M_2=\frac{1}{2}\left(\frac{D_{23}}{1-\lambda}+D_5\right)$. **Step (ii):** Then, we derive the lower bound on the left side of

Step (ii): Then, we derive the lower bound on the left side of (49). By convexity of f_0 , it holds that

$$c^{\top}(\hat{w}(t) - \theta^*) \le \sum_{r=0}^{t} \frac{\alpha(r)c^{\top}(w(r) - \theta^*)}{\sum_{\tau=0}^{t} \alpha(\tau)}.$$
 (50)

Next, we relate the term $\|\hat{\theta}_i(t) - \hat{w}(t)\|$ to $\sum_{r=0}^t \Phi(r)$. By the triangle inequality, we have

$$\|\hat{\theta}_i(t) - \hat{w}(t)\| \le \sum_{r=0}^t \frac{\alpha(r) \|\theta_i(r) - w(r)\|}{\sum_{\tau=0}^t \alpha(\tau)}.$$
 (51)

We now quantify the numerator of the right side of (51). Firstly, recall from the result in Proposition 7(b) that

$$\|\theta_i(t) - \overline{\theta}(t)\| \le D_1 \lambda^t + \sum_{s=0}^{t-1} \lambda^{t-s-1} [B\beta(s) + D_2 \alpha(s)].$$
 (52)

Secondly, using Lemma 2 and the properties of the $\operatorname{dist}(\cdot)$ function, we have

$$||w(r) - \overline{\theta}(r)|| = \operatorname{dist}(\overline{\theta}(r), \Omega) \le R \max_{i \in \mathcal{V}} \operatorname{dist}(\overline{\theta}(r), \Omega_i)$$

$$\le R \sum_{i=1}^{m} \operatorname{dist}(\overline{\theta}(r), \Omega_i) \le R \sum_{i=1}^{m} ||\theta_i(r) - \overline{\theta}(r)||,$$
(53)

By the triangle inequality and the inequalities (52) and (53), it follows that

$$\frac{\|\theta_i(r) - w(r)\|}{(Rm+1)B} \le \frac{D_1}{B} \lambda^r + \sum_{s=0}^{r-1} \lambda^{r-1-s} \left(\frac{D_2}{B} \alpha(s) + \beta(s)\right), (54)$$

which yields (see the definition of $\psi(t)$ in Proposition 7(c))

$$\frac{1}{(Rm+1)B} \sum_{r=0}^{t} \alpha(r) \|\theta_{i}(r) - w(r)\|$$

$$\leq \frac{D_{1}}{B} \sum_{r=0}^{t} \alpha(r) \lambda^{r} + \frac{D_{2}}{B} \sum_{r=1}^{t} \alpha(r) \sum_{s=0}^{r-1} \lambda^{r-1-s} \alpha(s) + \sum_{r=0}^{t} \psi(r)$$

$$\stackrel{(47),(48)}{\leq} \frac{D_{1}\alpha(0)}{(1-\lambda)B} + \frac{D_{2}}{(1-\lambda)B} \sum_{s=0}^{t} \alpha^{2}(s) + \sum_{r=0}^{t} \psi(r).$$
(55)

The sum $\sum_{r=0}^{t} \psi(r)$ can be bounded as follows. Based on the result in Proposition 7(c) and the fact that $\psi(0) = 0$ and $\psi(t) > 0$, $\forall t > 1$, there is

$$\sum_{r=0}^{t} \psi(r) \le \lambda \sum_{r=0}^{t-1} \psi(r) + \sum_{r=0}^{t-1} \alpha(r)\beta(r).$$
 (56)

According to $\alpha\beta \leq \frac{\alpha^2}{4} + \beta^2$, $\forall \alpha, \beta \in \mathbb{R}$, it holds that

$$\sum_{r=0}^{t} \psi(r) \le \frac{1}{1-\lambda} \sum_{r=0}^{t-1} \left(\frac{\alpha^2(r)}{4} + \beta^2(r) \right)$$
 (57)

Moreover, by Proposition 7(a), we have $\beta^2(r) \leq m\Phi(r)$. Thus

$$\sum_{r=0}^{t} \beta^{2}(r) \le m \sum_{r=0}^{t} \Phi(r)$$
 (58)

Using the inequalities (55), (57) and (58), we obtain

$$C_0 \sum_{r=0}^{t} \alpha(r) \|\theta_i(r) - w(r)\| \le M_3 + M_4 \sum_{r=0}^{t} \alpha^2(r) + \frac{D_4}{2} \sum_{r=0}^{t} \Phi(r)$$
(59)

with $C_0 = \frac{(1-\lambda)D_4}{2m(Rm+1)B}$, $M_3 = \frac{D_4D_1\alpha(0)}{2mB}$, $M_4 = \frac{D_4}{2m}(\frac{D_2}{B} + \frac{1}{4})$. (50) Combining the inequality (59) with (49) yields

$$C_0 \sum_{r=0}^{t} \alpha(r) \|\theta_i(r) - w(r)\| + \sum_{r=0}^{t} \alpha(r) c^{\top} (w(t) - \theta^*)$$

$$\leq (M_1 + M_3) + (M_2 + M_4) \sum_{r=0}^{t} \alpha^2(r),$$
(60)

where $C_1 = M_1 + M_3$, $C_2 = M_2 + M_4$. Dividing both sides by $\sum_{r=0}^{t} \alpha(r)$ and subsequently applying (50) and (51) leads to (43).

Step (iii): Since $\hat{\theta}_i(t) \in U$ for $\forall t \geq 0, \forall i \in \mathcal{V}$, it follows from triangle inequality and Lipschitz continuity of f_0 on U that

$$|c^{\top}(\hat{\theta}_{i}(t) - \theta^{*})| \leq |c^{\top}(\hat{\theta}_{i}(t) - \hat{w}(t))| + c^{\top}(\hat{w}(t) - \theta^{*})$$

$$\leq C||\hat{\theta}_{i}(t) - \hat{w}(t)|| + c^{\top}(\hat{w}(t) - \theta^{*})$$
(61)

Now, by (43), both $C_0 \|\hat{\theta}_i(t) - \hat{w}(t)\|$ and $c^{\top}(\hat{w}(t) - \theta^*)$ are bounded above by E(t). Hence, (44) is satisfied.

Proof of Theorem 2:

According to Proposition 9, this result is straightforward. ■

REFERENCES

- [1] T. Yang, X. Yi, J. Wu, Y. Yuan, D. Wu, Z. Meng, Y. Hong, H. Wang, Z. Lin, and K. H. Johansson, "A survey of distributed optimization," *Annu. Rev. Control*, vol. 47, pp. 278-305, May 2019.
- [2] A. Nedić and J. Liu, "Distributed optimization for control," Annu. Rev. Control Robot Auton. Syst., vol. 1, pp. 77-103, May 2018.
- [3] D. K. Molzahn, F. Dörfler, H. Sandberg, S. H. Low, S. Chakrabarti, R. Baldick, and J. Lavaei, "A survey of distributed optimization and control algorithms for electric power systems," *IEEE Trans. Smart Grid*, vol. 8, no. 6, pp. 2941-2962, Nov. 2017.
- [4] X. Fang, D. Pang, J. Xi, and X. Le, "Distributed optimization for the multi-robot system using a neurodynamic approach," *Neurocomputing*, vol. 367, no. 20, pp.103-113, Nov. 2019.
- [5] S. Halder, A. Ghosal, and M. Conti, "Dynamic super round based distributed task scheduling for uav networks," *IEEE Trans. Wirel. Commun.*, 2022, DOI: 10.1109/TWC.2022.3200366.
- [6] C. Wan, G. Jing, S. You, and R. Dai, "Sensor network localization via alternating rank minimization algorithms," *IEEE Trans. Control Netw.* Syst., vol. 7, no. 2, pp. 1040-1051, Jun. 2020.
- [7] H. Iiduka, "Distributed optimization for network resource allocation with nonsmooth utility functions," *IEEE Trans. Control. Netw Syst.*, vol. 6, no. 4, pp. 1354-1365, Dec. 2019.
- [8] Q. Li, Y. Liao, K. Wu, L. Zhang, J. Lin, M. Chen, J. M. Guerrero, and D. Abbott, "Parallel and distributed optimization method with constraint decomposition for energy management of microgrids," *IEEE Trans. Smart Grid*, vol. 12, no. 6, pp. 4627-4640, Nov. 2021.
- [9] A. Ben-Tal, L. E. Ghaoui, and A. Nemirovski, Robust optimization. Princeton, NJ, USA: Princeton Univ. Press, 2009.
- [10] A. Fallah, M. Gurbuzbalaban, A. Ozdaglar, U. Simsekli, and L. Zhu, "Robust distributed accelerated stochastic gradient methods for multiagent networks," in arXiv:1910.08701, 2019.
- [11] X. Meng and Q. Liu, "A consensus algorithm based on multi-agent system with state noise and gradient disturbance for distributed convex optimization," *Neurocomputing*, vol. 519, pp. 148-157, Jan. 2023.

- [12] Y. Zhu, G. Wen, W. Yu, and X. Yu, "Nonsmooth resource allocation of multiagent systems with disturbances: A proximal approach," *IEEE Trans. Control Netw. Syst.*, vol. 8, no. 3, pp. 1454-1464, Sep. 2021.
- [13] C. Iakovidou and E. Wei, "S-near-dgd: A flexible distributed stochastic gradient method for inexact communication," *IEEE Trans. Autom. Contr.*, vol. 68, no. 2, pp. 1281-1287, Feb. 2023.
- [14] C. Zhao, X. Duan, and Y. Shi, "Analysis of consensus-based economic dispatch algorithm under time delays," *IEEE Trans. Syst. Man Cybern.* Syst., vol. 50, no. 8, pp. 2978-2988, Aug, 2020.
- [15] J. Wu, T. Yang, D. Wu, K. Kalsi, and K. H. Johansson, "Distributed optimal dispatch of distributed energy resources over lossy communication networks," *IEEE Trans. Smart Grid*, vol. 8 no. 6, pp. 3125-3137, Nov. 2017.
- [16] S. Lee and A. Nedić, "Distributed random projection algorithm for convex optimization," *IEEE J. Sel. Top. Signal Process.*, vol. 7, no. 2, pp. 221-229, Apr. 2013.
- [17] S. Lee and A. Nedić, "Asynchronous gossip-based random projection algorithms over networks," *IEEE Trans. Autom. Contr.*, vol. 61, no. 4, pp. 953-968, Apr. 2016.
- [18] A. Nedić and A. Ozdaglar, "Distributed subgradient methods for multiagent optimization," *IEEE Trans. Autom. Contr.*, vol. 54, no. 1, pp. 48-61, Jan. 2009.
- [19] K. You, R. Tempo, and P. Xie, "Distributed algorithms for robust convex optimization via the scenario approach," *IEEE Trans. Autom. Contr.*, vol. 64, no. 3, pp. 880-895, Mar. 2019.
- [20] K. Margellos, A. Falsone, S. Garatti, and M. Prandini, "Distributed constrained optimization and consensus in uncertain networks via proximal minimization," *IEEE Trans. Autom. Contr.*, vol. 63, no. 5, pp. 1372-1387, May 2018.
- [21] A. Falsone, K. Margellos, M. Prandini, and S. Garatti, "A scenario-based approach to multi-agent optimization with distributed information," in *Proc. 21th IFAC World Congr.*, 2020, pp. 20–25.
- [22] L. Carlone, V. Srivastava, F. Bullo, and G. C. Calafiore, "Distributed random convex programming via constraints consensus," SIAM J. Control Optim., vol. 52, no. 1, pp. 629-662, Feb. 2014.
- [23] M. Chamanbaz, G. Notarstefano, and R. Bouffanais, "Randomized constraints consensus for distributed robust linear programming," in *Proc. 20th IFAC World Congr.*, 2017, pp. 4973-4978.
- [24] M. Chamanbaz, G. Notarstefano, and R. Bouffanais, "A randomized distributed ellipsoid algorithm for uncertain feasibility problems," in *Proc. 56th IEEE Annu. Conf. Decis. Control*, 2017, pp. 1305-1310.
- [25] G. Pantazis, F. Fele, and K. Margellos, "On the probabilistic feasibility of solutions in multi-agent optimization problems under uncertainty," *Eur. J. Control*, vol. 63, pp. 186-195, Jan. 2022.
- [26] K. Yang, Y. Wu, J. Huang, X. Wang, and S. Verdú, "Distributed robust optimization for communication networks," in *Proc. IEEE INFOCOM-*27th Conf. Comput. Commun., 2008, pp. 1157-1165.
- [27] K. Yang, J. Huang, Y. Wu, X. Wang, and M. Chiang, "Distributed robust optimization (dro), part i: framework and example," *Optim. Eng.*, vol. 15, no. 1, pp. 35-67, Mar. 2014.
- [28] S. Wang and C. Li, "Distributed robust optimization in networked system," *IEEE Trans. Cybern.*, vol. 47, no. 8, pp. 2321-2333, Aug. 2017.
- [29] M. Bürger, G. Notarstefano, and F. Allgöwer, "A polyhedral approximation framework for convex and robust distributed optimization," *IEEE Trans. Autom. Contr.*, vol. 59, no. 2, pp. 384-395, Feb. 2014.
- [30] M. Bürger, G. Notarstefano, and F. Allgöwer, "Distributed robust optimization via cutting-plane consensus," in *Proc. 51st IEEE Conf. Decis. Control*, 2012, pp. 7457-7463.
- [31] S. Mehrotra and D. Papp, "A cutting surface algorithm for semiinfinite convex programming with an application to moment robust optimization," SIAM J. Optim., vol. 24, no. 4, pp. 1670–1697, Oct. 2014.
- [32] A. Mitsos, "Global optimization of semi-infinite programs via restriction of the right-hand side," *Optimization*, vol. 60, no. 10-11, pp. 1291-1308, Jun. 2011.
- [33] J. Fu, J. M. Faust, B. Chachuat, and A. Mitsos, "Local optimization of dynamic programs with guaranteed satisfaction of path constraints," *Automatica*, vol. 62, pp. 184-192, Dec. 2015.
- [34] P. Xie, K. You, R. Tempo, S. Song, and C. Wu, "Distributed convex optimization with inequality constraints over time-varying unbalanced digraphs," *IEEE Trans. Autom. Contr.*, vol. 63, no. 12, pp. 4331-4337, Dec. 2018.
- [35] A. Nedić, A. Ozdaglar, and P. A. Parrilo, "Constrained consensus and optimization in multi-agent networks," *IEEE Trans. Autom. Contr.*, vol. 55, no. 4, pp. 922-938, Apr. 2010.
- [36] D. M. Himmelblau, Applied nonlinear programming. New York, NY, USA: McGraw-Hill, 1972.

- [37] P. Xie, K. You, and C. Wu, "How to stop consensus algorithms, locally?" in *Proc. 56th IEEE Annu. Conf. Decis. Control*, 2017, pp. 4544-4549.
- [38] V. Yadav and M. V. Salapaka, "Distributed protocol for determining when averaging consensus is reached," in *Proc. 45th Annu. Allerton Conf.*, 2007, pp. 715-720.
- [39] N. E. Manitara and C. N. Hadjicostis, "Distributed stopping for average consensus in undirected graphs via event-triggered strategies," *Automatica*, vol. 70, pp. 121-127, Aug. 2016.
- [40] W. Li, Z. Chen, Y. Lou, and Y. Hong, "On the convergence properties of a distributed projected subgradient algorithm," *IEEE Trans. Autom. Contr.*, vol. 68, no. 12, pp. 7546-7559, Dec. 2023.
- [41] V. S. Mai and E. H. Abed, "Distributed optimization over directed graphs with row stochasticity and constraint regularity," *Automatica*, vol. 102, pp. 94-104, Apr. 2019.
- [42] P. Lin, W. Ren, and Y. Song, "Distributed multi-agent optimization subject to nonidentical constraints and communication delays," *Automatica*, vol. 65, pp. 120-131, Mar. 2016.
- [43] S. Liu, Z. Qiu, and L. Xie, "Convergence rate analysis of distributed optimization with projected subgradient algorithm," *Automatica*, vol. 83, pp. 162-169, Sep. 2017.
- [44] H. Li, Q. Lv, and T. Huang, "Distributed Projection subgradient algorithm over time-varying general unbalanced directed graphs," *IEEE Trans. Autom. Contr.*, vol. 64, no. 3, pp. 1309-1316, Mar. 2019.
- [45] K. I. Tsianos and M. G. Rabbat, "Distributed dual averaging for convex optimization under communication delays," in *Proc. Amer. Contr. Conf.*, 2012, pp. 1067-1072.
- [46] A. Nedić and A. Olshevsky, "Distributed optimization over time-varying directed graphs," *IEEE Trans. Autom. Contr.*, vol. 60, no. 3, pp. 601-615, Mar. 2015.
- [47] C. Wang, S. Xu, D. Yuan, B. Zhang, and Z. Zhang, "Push-sum distributed dual averaging for convex optimization in multiagent systems with communication delays," *IEEE Trans. Syst. Man Cybern. Syst.*, vol. 53, no. 3, pp. 1420-1430, Mar. 2023.
- [48] A. Mutapcic and S. Boyd, "Cutting-set methods for robust convex optimization with pessimizing oracles," *Optim. Methods Softw.*, vol. 24, no. 3, pp. 381-406, May 2009.
- [49] M. Petra, M. Nicola, G. David, and L. L. Team, Calculus Early Transcendentals Differential & Multi-Variable Calculus for Social Sciences. Vancouver, BC, Canada: Simon Fraser Univ. Press, 2018.
- [50] A. Hoffmann, "The distance to the intersection of two convex sets expressed by the distances to each of them," *Math. Nachrichten*, vol. 157, no. 1, pp. 361-376, Jun. 1992.



Jun Fu (Senior Member, IEEE) received the Ph.D. degree in mechanical engineering from Concordia University, Montreal, QB, Canada, in 2009. He was a Postdoctoral Researcher with the Department of Mechanical Engineering, Massachusetts Institute of Technology (MIT), Cambridge, MA, USA, from 2010 to 2014. He is a professor with Northeastern University, Shenyang, China. His current research is on dynamic optimization, optimal control, switched systems and their applications. Dr. Fu received

the 2018 Young Scientist Award in Science issued by the Ministry of Education of China (the first awardee in Chinese Control Community). He is currently an Associate Editor for the Control Engineering Practice, the IEEE Transactions on Industrial Informatics, and the IEEE Transactions on Neural Networks and Learning Systems.



Xunhao Wu received the B.S. degree in automation from Northeastern University, Shenyang, China, in 2021, where he is currently pursuing the M.S. degree in control theory and control engineering with the State Key Laboratory of Synthetical Automation for Process Industries, Northeastern University, Shenyang, China. His current research interests cover robust optimization and its application in multi-agent systems.