
Evolving generalist controllers to handle a wide range of morphological variations

Corinna Triebold

Computer Science Department
Vrije Universiteit Amsterdam
Amsterdam, 1081 HV, Netherlands
c.e.h.triebold@student.vu.nl

Anil Yaman

Computer Science Department
Vrije Universiteit Amsterdam
Amsterdam, 1081 HV, Netherlands
a.yaman@vu.nl

September 20, 2023

ABSTRACT

Neuro-evolutionary methods have proven effective in addressing a wide range of tasks. However, the study of the robustness and generalisability of evolved artificial neural networks (ANNs) has remained limited. This has immense implications in the fields like robotics where such controllers are used in control tasks. Unexpected morphological or environmental changes during operation can risk failure if the ANN controllers are unable to handle these changes. This paper proposes an algorithm that aims to enhance the robustness and generalisability of the controllers. This is achieved by introducing morphological variations during the evolutionary process. As a result, it is possible to discover generalist controllers that can handle a wide range of morphological variations sufficiently without the need of the information regarding their morphologies or adaptation of their parameters. We perform an extensive experimental analysis on simulation that demonstrates the trade-off between specialist and generalist controllers. The results show that generalists are able to control a range of morphological variations with a cost of underperforming on a specific morphology relative to a specialist. This research contributes to the field by addressing the limited understanding of robustness and generalisability in neuro-evolutionary methods and proposes a method by which to improve these properties.

Keywords Generalizability, Robustness, Morphological variations, Evolution Strategies, Neural networks

1 Introduction

In recent years, research has demonstrated the successful and efficient application of evolution strategies (ES) in evolving artificial neural networks (ANNs) for addressing continuous control problems [27, 36]. Notably, ES have shown promising results in solving difficult tasks [33]. Continuous control problems involve complex dynamics and require controllers capable of handling continuous variables and actions. Thus they may require large networks to handle this complexity. By leveraging the power of ES, researchers have made progress in evolving ANNs with large number of parameters to handle these control tasks effectively. An agent in this case refers to the entity in the simulated environment, capable of performing actions to achieve certain outcomes. In their paper, [33], applied ES to learn behaviors of agents to solve several problems in OpenAI gym simulation environments [2], and found that ES presents a good alternative to popular methods like reinforcement learning [33]. In fact, the highly parallelisable nature of ES can provide an advantage over other methods when it comes to solving these problems quickly [27].

Nevertheless, an evolved ANN controller still is subject to the same issues and challenges that are present in all ANNs. One of these challenges is promoting robustness to enhance their ability in maintaining stable and reliable performance in face of uncertainties, perturbations or variations in the input [40, 20, 3]. Another important property of an ANN controller is generalizability, which allows the controller to handle inputs that were not encountered during training [31]. ANN controllers have been shown to be able to solve wide range of challenging tasks. However, increasing their robustness and generalizability remains an open research problem within the field of artificial intelligence.

In the case of ES for continuous control problems, ANN controllers are evolved for a specific agent morphology and environment [27]. The agent's morphology refers to the physical structure and shape of the agent. For instance, in the

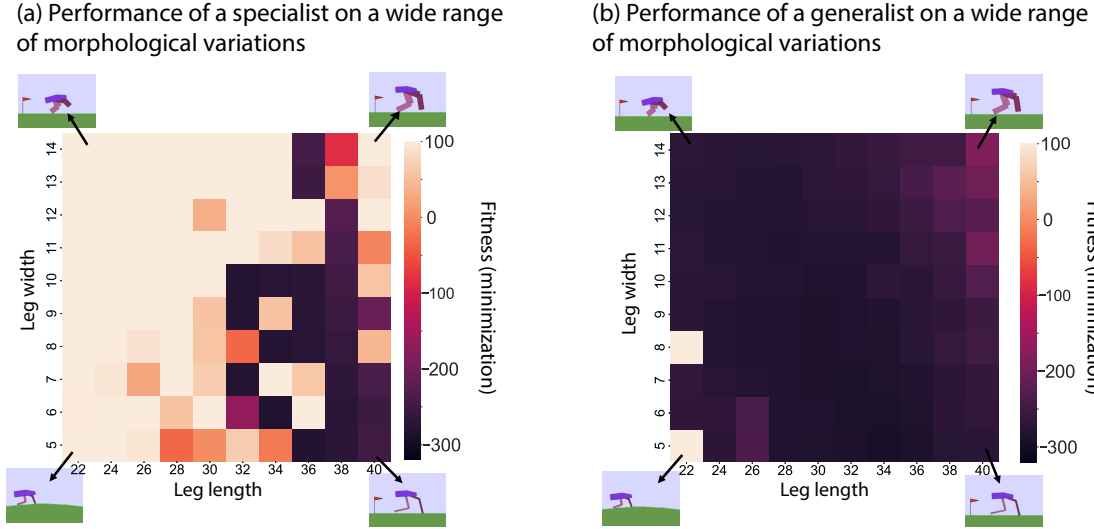


Figure 1: Generalist ANN controllers can handle a wide range of morphological variations. In the figures, each cell is a morphological variation specified by the leg length and width parameters corresponding on the x and y axes in the Bipedal Walker environment (in total of 100 morphological variations in this case). (a) Shows the performance of a specialist ANN controller that is evolved on a single morphology versus (b) shows the performance of a generalist ANN controller evolved using the approach proposed in this paper.

case of the Bipedal Walker agent in the OpenAI gym simulation environment, the agent’s morphology consists of the components: the legs, joints, and the hull, and how these components are shaped and configured to form the agent. Similarly, the environment is defined as the surrounding of the agent that allows two ways of interaction. Evolving an ANN controller for a specific morphology and environment can promote specialization, which can lead to overfitting to a particular morphology. This reduces the robustness and generalizability of the controller, and consequently, leads to a poor performance in handling changes in the agent’s morphology or environment. From a morphological variations point of view, a robust ANN should be able to handle changes in the agent’s morphology without sacrificing the performance too much [29]. Unfortunately, this is not the case; changes to the agent, such as damage to the legs, can have a severe impact on performance and, in the worst-case scenario, lead to complete failure [5, 32]. The vulnerability towards morphological changes due to specialization can be observed in Figure 1 (a), where an ANN controller that is optimized for a specific morphology to control the Bipedal Walker, tested on a range of morphological variations consisting of various leg length and widths. On the other hand, Figure 1 (b) shows the performance of a generalist ANN controller that is capable of providing sufficient performance on a wide range of morphological variations.

Similar issues can arise in the field of evolutionary robotics where ANN controllers are optimized to solve real world robotic tasks using evolutionary optimization approaches [8]. Conventionally, the behavior of a robot is learned in the real world in lab conditions, or first in simulation and then transferred to the robot in real world. However, unexpected morphological or environmental conditions can be encountered during operation. This can lead to poor performance or complete failure [29]. For example, physical damages can cause changes in the shape of the robot that the trained ANN controller is not capable of handling [5]. In these situations, immediate repair may not be possible [29, 30]. Besides the possibility of handling these unexpected situations, which can arise during operation, generalist controllers can also provide an advantage when transferring the behavior learned in simulation to the real world. The challenge widely known as the reality gap which has acquired much research attention in the field of robotics [17, 8, 16]. Therefore, it is imperative to make progress towards the direction of robustness and generalizability of these controllers to understand how these properties can handle these challenges and obtain benefit from their advantages.

Current approaches deal with these issues by designing and using pre-determined contingency plans. However, not every unexpected situation can be anticipated during development. Other methods usually rely on sensors and/or self-diagnosis to identify current state of the agent, and use for adaptation to changes [25, 32, 30, 29]. For instance, this information can be fed to the agent’s controller to change its behavior accordingly. However, this approach relies on the correct identification of the agent’s state so it may not always be reliable or available. If there is a malfunction of the sensors then the controller may not be able to maintain its performance. Other approaches aim to learn a behavior-performance map during development which can be used to select behaviors that are predicted to work well when an unexpected situation arises [5]. Alternatively, the ANN controller could be retrained to handle the changes or an entirely new controller could be optimized and deployed to ensure continued good performance. Both retraining

or creating a new controller cost time and computational power. Furthermore, it disrupts operation which may not be possible.

Accordingly, a question arises: is it possible to learn a controller that can handle a wide range of morphological variations? Ideally, there would be no need to take the morphology as the input to adjust the behavior. Neither would it need to change its parameters to adapt to these variations. From previous work, we know that morphological differences can have significant impact on behavior (i.e. the same controller can lead to different behaviors on different morphologies [28]). Nevertheless, we are interested in finding a generalist controller that can lead to a generalist behavior which can achieve the control of a range of morphological variations sufficiently well. On the other hand, we also know from the notion of the bias-variance tradeoff in machine learning [12] that, such a controller would have a tradeoff in terms of specialization vs. generalization. A specialist is likely to have high variance resulting in a poor generalization (i.e. overfitting to a single morphology), whereas, a generalist is likely to have high bias resulting in worse performance on a particular morphology (i.e. underfitting to a single morphology but performing better on a range of morphologies). Nevertheless, striking a good balance can prove advantageous in unexpected and volatile environments. Therefore, a rigorous analysis on the tradeoff between specialization vs. generalization is needed to use it in our advantage.

In networks trained through gradient-based approaches, robustness and generalizability are usually managed through methods like regularization, cross-validation, and adversarial training [20]. However, such methods are not widely used in neuro-evolution since these approaches rely on the use of data-sets or a loss function, which are not usually applicable for evolving ANNs [40]. From the perspective of evolved controllers, a limited number of works has investigated the robustness towards morphological variations, and these works focused on sensory-motor variations [3, 30]. Larger scale investigations on the robustness and generalizability of the controllers concerning agents' physical morphological variations are needed. To facilitate these investigations, there is also a need for the development of approaches and algorithms that can promote desired level of specialization or generalization.

To address these needs and challenges, in this paper, we present an algorithm that can promote evolution of generalist controllers. We hypothesize that introducing morphological variations during the evolutionary process can lead to the evolution of generalist controllers. We further expect that the generalizability comes with the tradeoff of specialization on a particular morphology. To test this hypothesis, we performed an extensive analysis on the relation between the amount of variation introduced during the evolutionary processes versus the level of robustness and generalization achieved. Furthermore, we hypothesize that the order that this variation is introduced can also make an impact. Thus, we propose and test three "training schedules", namely, incremental, random and random walk (with two parameters). Generalist controllers can perhaps be evolved by multi-objective optimization [6] where each objective is considered as the performance on a morphological variation. Then, the desired level of specialization vs. generalization on the objectives can be selected. However, this approach may not be scalable to a large number of variations (e.g. 64 considered in this paper) since it requires evaluating each controller on all objectives which can be computationally very expensive. Another simplistic approach would be to define single objective function that aims to maximize the performance on all morphological variations. Similarly, this approach also suffers from high demand in computational resources due to the evaluations on all morphologies. Moreover, performance of some morphologies can dominate others leading to a poor generalizability. Another approach could be to use multi-task optimization where each morphology can be considered as a separate task, and all tasks are aimed to be optimized simultaneously [15]. However, generalization is not the goal in this approach, rather, it would aim to find a specialist controller for each task simultaneously.

Our approach aims to reduce the computational cost by introducing a morphological variation in each generation. Simultaneously, we aim to find generalist controllers by evaluating the best controller in each generation on a set of morphological variations. Furthermore, to alleviate the domination of certain morphologies in optimization, we use evolutionary branching, an idea that is inspired by natural evolution. The evolutionary branching occurs by splitting the set of morphological variations into subsets, to further continue their evolution separately through different controllers when a single generalist controller is not sufficient to maintain a good performance on the whole set. This is achieved by removing the morphological variations with a performance lower than a standard variation below the average performance on the whole set morphologies. As a result, more and more specialized ANN controllers can emerge due to this branching, if it is not possible to find a single generalist controller for the whole set. Consequently, the space of morphological variation are partitioned, and a controller is assigned to these partitions. The results can have a resemblance to an ensemble of ANN controllers, but, in our case, each is assigned to control a particular morphological variation space. In nature, evolutionary branching can arise in situations where different traits provide a fitness advantage in different ecological niches [7].

We perform an extensive analysis on our algorithm on four test cases in the OpenAI gym environment: CartPole, Bipedal Walker, Ant and Walker2D. Our results confirm that, indeed, incrementally introducing morphological variations promotes the emergence of generalist controllers. Moreover, we observe a clear tradeoff between the specialists vs. generalists: the generalist controllers provide better performance on average on a wide range of morphological variations relative to the specialist controllers. They are more robust and generalizable to unseen morphological variations. However, they are not as good as a specialist on a particular morphology that the specialist evolved for.

Thus, the generalist controllers can be highly advantageous in situations where unexpected situations are likely to arise, and when it happens, they can maintain their performance within their limits of generalization without the need of adaptation.

The paper is organized as follows: Section 2 provides the background and related work; Section 3 introduces the proposed algorithm; Section 4 details our experiment setup; Section 5 presents our results; and Section 6 discusses the results, limitations and future work; and Section 7 provides our conclusions. In addition, we provide some additional information in the Supplementary Material.

2 Background

This section provides the background and related work on some of the concepts relevant to our work. First, we provide a background in neuro-evolution for continuous control problems, then we discuss the literature that relates to robustness and generalizability in ANN controllers, then we introduce evolutionary ensembles and evolutionary branching as it relates to the approach used in our work.

2.1 Neuro-evolution for continuous control problems

Neuro-evolution is a powerful optimization approach for ANNs especially for the cases when the objective function is non-differentiable, sparse, and is not easily defined (to achieve a desired behavior) [35, 11, 21]. In continuous control problems, action and state variables of an agent are in a continuous domain. Depending on the task, the number of these variables can be large. Therefore, these types of problems may require large ANN controllers to handle the complexity. On the other hand, increasing the size of ANN controllers leads to an increase in the number of parameters to optimize. This can be challenging to achieve with black-box optimization approaches without the use of the gradient information to indicate a promising search direction. Natural evolution strategies (NES) are a branch of evolutionary algorithms which can be used to solve black-box optimization problems. NES methods are capable of estimating gradient information. Thus, they can provide advantages in solving complex high-dimensional problems [42].

NES are a continuous optimization approach that work by sampling candidate solutions, in this case, vectors that encode the parameters of ANN controllers, from a multivariate distribution. These solutions evaluated on the fitness function (i.e. objective function) to find their fitness value which is then used to estimate the gradient information (also referred as the natural gradient). Then the sampling distribution is updated based on the gradient information [14, 42]. This process is repeatedly performed to achieve a desired fitness value. Several algorithms proposed under the NES category. Among those, xNES demonstrated to be one of the most powerful versions [34, 14].

2.2 Robustness and generalizability

Robustness of ANNs typically refers to their ability to maintain performance even when the input data contains variations or perturbations not seen in the training data or learning environment. A more robust network is less sensitive to changes in its input data. Robustness can be considered in two groups as: local and global robustness. Local robustness is concerned with the robustness of a particular input i.e. a given an input x and its perturbations x' within a certain radius δ , the output of the ANN should produce the same outputs. Global robustness demands that the local robustness property should be satisfied for all inputs [20]. In both control tasks and robotics, robustness is a vital and multi-faceted problem. While there are some differences these two fields also share a lot of overlap, for example, both are concerned with environmental, sensory or adaptive robustness [22]. Morphological robustness refers to the ability of an ANN to maintain task performance regardless of the variations in the agent's morphology [29]. For instance, these variations could be the result of damage or faulty production. This is different from morphological adaptiveness which aims to produce robots that can adapt their own morphology [25]. generalizability refers to the ability of an ANN to transfer its performance to situations that are not encountered during the training [31]. Morphological generalizability refers to the ability of an ANN controller to maintain its task performance even on the morphologies that were not encountered during training. The concepts of generalizability and robustness are closely related. Intuitively, ANNs that are more robust are expected to be more generalizable. Achieving morphological robustness and generalizability is valuable in robotics and neural network controllers as it allows the agents to handle real-world uncertainties, adapt to environmental changes, and maintain flexible and reliable task performance across a range of conditions.

The level of achieved robustness and generalizability of trained ANNs can depend on the type of network and the training data. In networks trained through backpropagation common techniques for increasing robustness and generalizability include regularization methods such as dropout or weight decay. Data augmentation techniques involve generating synthetic training data by applying various transformations, perturbations, or noise to the existing data [31]. Adversarial training which involves exposing the neural network to carefully crafted adversarial examples that are designed to deceive or mislead the network's predictions [40]. By training on these adversarial examples, the network learns to be more robust and resilient against potential attacks or input perturbations. Similarly, in their paper [38] applied domain randomization on the task of object localization. Instead of training a model on a single simulated environment the model was presented with a range of environments. By introducing variability during deep reinforcement learning the

aim was to increase the generalizability of the model without additional training. Another study pursued an approach for the transfer of a controller, trained through reinforcement learning, from simulation to the real world. This was achieved through automatic domain randomization which increased the difficulty of the tasks over time [26]. A similar approach was pursued in our algorithm where over time the evolving ANN is exposed to changing morphology variations.

2.3 Evolutionary ensembles

Ensemble learning methods make use of a divide and conquer approach. Many problems are simply too complex to be solved through the use of a single ANN [19]. By combining multiple networks the ensemble is able to break the problem into simpler sub-problems which are easier to solve. This process typically has three steps: member generation, member selection, and member combination. Examples of ensemble learning methods include bagging, stacking and boosting. Each of these techniques follows a different heuristic with respect of how to combine the outputs of the ensemble members. Ensemble learning methods have been found to be more robust and better at generalizing [9]. Evolutionary ensembles take the three steps of the ensemble learning process and treat them as optimization problems to which evolutionary computing can be applied [37]. Evolutionary computing methods are well-suited for generating ensemble members due to the fact that they generate pools of candidate solutions by design. The inherent selection mechanisms in evolutionary algorithms also facilitates evolutionary member selection. To ensure the effectiveness of evolutionary ensemble generation, it is crucial to pursue diversity among ensemble members by using different training data-sets, different learning algorithms, or using different weights and parameters for the individual models. These approaches enhance the ensemble’s overall performance and robustness [37]. In the case of the method proposed in this paper, the members are generated through evolutionary process and member selection is done through the branching method mentioned.

2.4 Evolutionary branching

Evolutionary branching is a natural phenomenon where a previously homogeneous population splits into two or more distinct clusters [13, 7]. Directional selection occurs when the environment of the population favors one phenotype allowing the individuals that exhibit this trait to survive and reproduce more often. Frequency-dependent selection can occur in both negative and positive directions. Positive frequency selection occurs when a phenotype or genotype increases in fitness because it is more common within the population. In contrast, negative frequency selection describes the process of increasing fitness when the presence of a phenotype or genotype in the population becomes less common [1]. Branching can also come about through isolation mechanisms that divide a population and prevent any further exchange of genetic material. Over time these selection and isolation mechanisms ultimately result in the formation of multiple distinct lineages or clusters within the population. Evolutionary branching leads to better adaption for the organisms and increased biodiversity [4].

3 Evolving generalist ANN controllers for morphological variations

In this section, we outline the algorithm we propose to promote robustness and generalization properties in ANN controllers. The pseudocode of the algorithm is provided in Supplementary Material, and the code is accessible publicly¹.

Although, it is possible to apply our algorithm for other forms of variation (i.e. environmental, agent or task variations), here, we consider robustness and generalisability in terms of handling morphological variations. This is achieved by introducing morphological variations during the evolutionary process. As a results, it is possible to discover a single generalist controller that can produce a generalist behavior to control a range of morphological variations sufficiently, without the need of being informed by the morphology information or adaptation of its parameters.

Consider a set of training morphologies $M = \{m_1, m_2, \dots, m_n\}$, and a set of generalist solutions $G = \{I_1, I_2, \dots, I_k\}$ where $k \leq n$. Formally, the process of finding generalist controllers can be defined as, finding G containing a minimum number of controllers where each of these controllers can perform sufficiently well on the control task of one or more morphologies in M . We assume that there is no overlap in the assignments of the morphologies that the controllers determined to control well. The larger the number of morphologies a controller I_i can perform sufficiently well, the more generalist it is. Ideally, when $k = 1$, there is only a single generalist controller that can achieve the control tasks of all morphological variations. The performance of the controllers I_i on the control tasks of a morphology set $K \subseteq M$ is defined as the average performance of the control task performance of I_i evaluated on all morphologies in K , denoted as: $\hat{f} = F(I_i, K) = \frac{1}{|K|} \sum_{j=1}^{|K|} \text{EVAL}(I_i, m_j)$ where $m_j \in K$ and EVAL is the evaluation function of controller I_i on m_j .

Although, we use NES in our experimental setup for their advantage in optimization of large dimensional continuous problem domains, our proposed algorithm employs a standard evolutionary process where any standard evolutionary

¹The code of our algorithm is publicly accessible at:
<https://github.com/cotrieo/evolving-generalist-controllers>

algorithm can be used. Besides the standard EA hyperparameters, the hyperparameters used in our algorithm are: a predefined fixed set of M and a training schedule T that introduces a morphology in M in a particular order in each generation during the evolutionary process. The algorithm starts with an empty set of G . In addition, we also keep an initially empty set O to include outlier morphologies during the evolutionary process. O is mainly used for evolutionary branching, but its need and exact use are clarified further in the following paragraphs.

The initial population is generated using standard initialization methods such as uniform random initialization from a domain range, and individuals evaluated on morphology m_i provided by the schedule T . Then, for each generation (including the first), the best individual I_{best} in P is selected based on the fitness value on m_i , and evaluated on all morphologies in set M and its average fitness \hat{f}' is found. In case of the first generation, I_{best} is added to G as I_1 , its fitness \hat{f}' saved as \hat{f}'_1 , and current morphology set saved as M_1 , for the following generations, we check if $\hat{f}' < \hat{f}'_1$ (assuming minimization problem), then, I_1 and \hat{f}'_1 are replaced by I_{best} and \hat{f}'_1 .

If the evolutionary process cannot find a fitness improvement for h number of generations then the morphologies where I_1 is not able to perform well are removed from M and added to O . This is determined by identifying the morphologies where fitness scores are lower than one standard deviation from the average fitness on all morphologies. This leads to *evolutionary branching* where, later, a new controller is aimed to evolve for O since the current generalist controller on M cannot achieve a good performance on them. Here, other thresholds (i.e. two or three standard deviations) were tested but did not lead to a good performance because probability of removing the outliers became less so good overall performance could not be maintained. Smaller thresholds on the other hand, lead to more specialists since the number of morphologies considered to be outliers will increase.

After this removal step, the evolutionary process continues on M in the same way until a satisfactory average fitness is found or the maximum number of evaluations is reached. At the end of this process, M is replaced by O and the whole process is repeated starting from an initial generation to evolve a generalist controller (but this time for the morphologies in outlier set O since it replaces M). This restart eliminates any information from the previous evolution. A clean slate allows the evolution to optimize for these morphologies without the bias of the previous generations. The whole process is repeated until maximum number of evaluations is reached or there are no morphologies left in O .

Overall, this process of keeping an outlier set and removing the morphologies that cannot be generalized partitions the learning space of the morphologies into smaller clusters (i.e. evolutionary branching). In a way, different ANN controller “species” evolve for various regions of the morphology space if a single ANN controller cannot perform well on the whole space. Thus, the algorithm produces a set of ANN controllers that are evolved to control well certain regions of the morphology space, and taken together forms an ANN controller ensemble for the whole morphology space that is considered. Ideally, the goal would be to find a single controller that can handle the variations on the whole morphological space considered, however, then the overall performance may suffer since there is always tradeoff between specialization vs. generalization.

4 Experimental setup

4.1 Morphological learning sets

We test our algorithm on four control problems in the OpenAI gym environment [2]. For each of these problems, we define 1, 16, 25, 49 and 64 morphological learning sets (M). The goal of defining these various number of sets is to test the impact of the size of the training sets in producing robust and generalizable ANN controllers. Each combination of the problem and learning set size were run for 30 times for statistical significance. The morphological variations are defined on the following problems:

1. CartPole: a classic control problem that aims to balance a pole attached on top of a cart by pushing the cart right and left. We define the morphological variations on 2 morphological parameters, length and mass of the pole, starting from 0.1 for both parameters and increasing by increments of 0.1.
2. Bipedal Walker: a locomotion task of a 2 dimensional bipedal agent with two legs. We define the morphological variations on 2 morphological parameters, leg length and width, starting from 5 and 22 by increments of 2 and 1 respectively.
3. Ant: a 3 dimensional locomotion task of a quadruped agent simulated on the Mujoco simulation environment. We define morphological variations on 2 parameters, the lengths of the upper and lower portion of the legs, starting from 0.2 and 0.4 by increments of 0.1.
4. Walker2D: a 2 dimensional locomotion of a bipedal agent simulated on the Mujoco simulation environment. We define morphological variations on 2 morphological parameters, length of the upper leg, starting from 0.225 by the increments of 0.025, and lower part of the legs, starting at 0.25 in increments of 0.05.

Figure 2 illustrates the morphological variation space of all agent types considered in this work. This visualization includes also the test sets that are discussed in Section 4.4. For the training sets (i.e. consisting of 1, 16, 25, 49 and 64 morphologies), the generation process starts from the same initial parameters and uses the same increment steps but

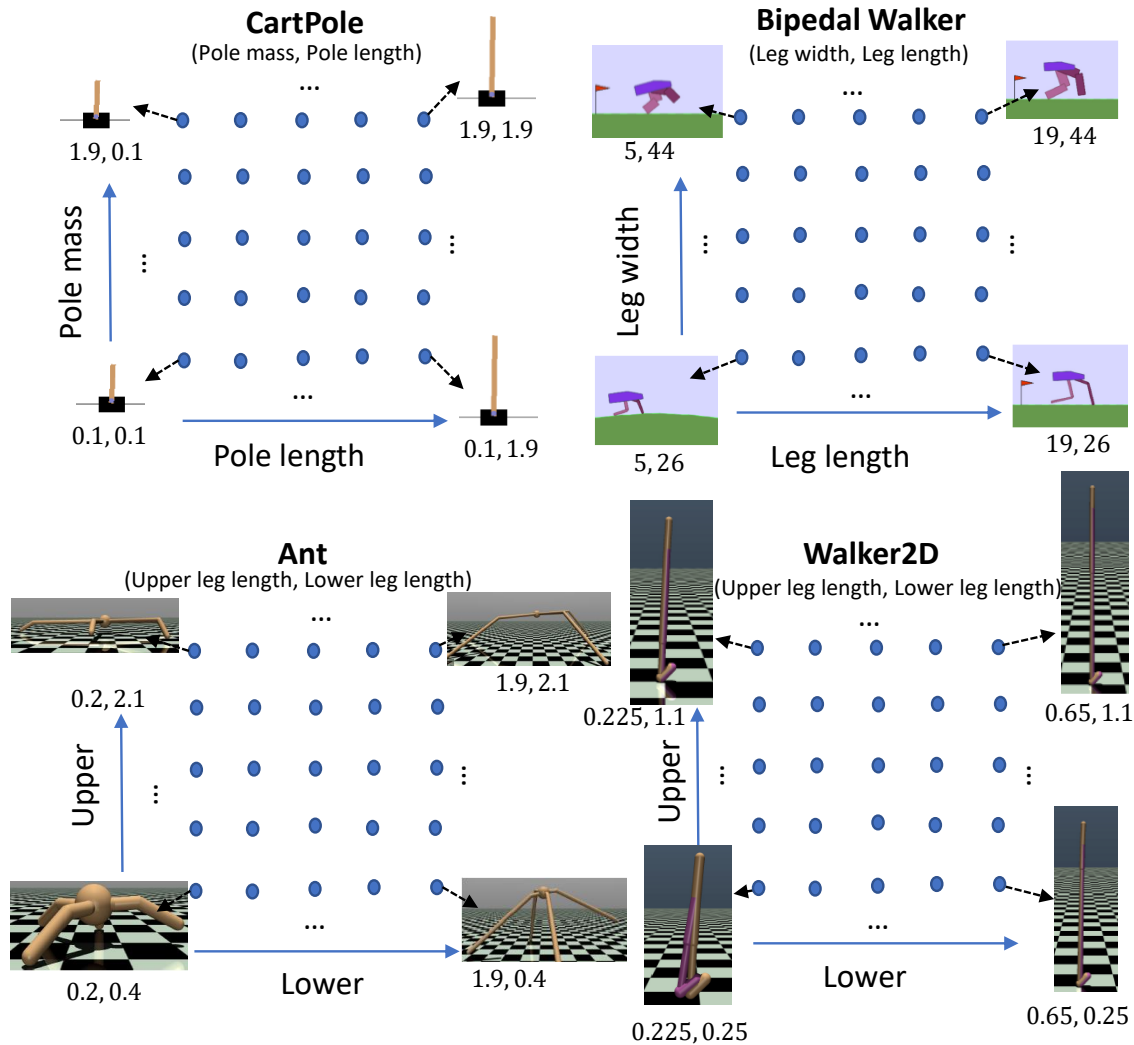


Figure 2: Agent variations on four agent types used in this paper.

ends up in different last parameters depending on the number of morphologies generated on two dimensional agent configuration space. Although in each agent type small incremental steps are used, the corresponding effects in the changes in the agents' morphologies were large as can be seen in Figure 2.

4.2 Experimental parameters

All problems were evolved with the same fully connected feedforward ANN topology consisting of an input, a hidden and an output layer. The tangent hyperbolic (Tanh) is used for the activation function for all the neurons in the network. Depending on the problem, we have the following parameters for the ANN controllers for each problem:

- CartPole: 4 input (+ 1 bias), 20 hidden (+ 1 bias) and 1 output artificial neurons, in total of 121 connection weights.
- Bipedal walker: 24 input (+1 bias), 20 hidden (+1 bias) and 4 output artificial neurons, in total of 584 connection weights.
- Ant: 27 input (+1 bias), 20 hidden (+1 bias) and 8 output artificial neurons, in total of 728 connection weights.
- Walker2d: 17 input (+1 bias), 10 hidden (+1 bias) and 6 output artificial neurons, in total of 246 connection weights.

The structure of the ANNs was decided based on previous research [27]. The parameters of the networks were directly represented as real-valued vectors to be optimized through the evolutionary process. As demonstrated by [31], there is no added benefit to multilayered networks for similar continuous control problems. Instead, they found that small single

layer networks are sufficient for solving benchmark continuous control tasks without significant loss in performance. Furthermore, a more simplistic ANN architecture has less connections, weights and parameters that need to be trained or evolved leading to improvements in run time. The Tanh was chosen based on the fact most of the tested environments deal with motor torques in the range $[-1, 1]$ allowing the outputs of the ANN to be directly used as input for the agent’s next step.

Aside from the parameters of the controllers, the evolutionary experiments were run with the following settings: the maximum number of generations of 5000 with a fixed number of population evaluation that is decided by the xNES algorithm in its default settings based on: $N = 4 + \lfloor (3 * \log(l)) \rfloor$ where l is the number of dimensions of the search space [39]. The maximum number of generations also includes the restart runs for the outlier sets in case of evolutionary branching. Thus, the total number of evaluations will be the same for different runs of the same problem instance, but may differ across different problems due to the difference in population size which is dependent on the dimensionality of the problem. The initial controller parameters were initialized randomly from a very small range (i.e. $[0.00001, 0.00001]$).

We employ the xNES algorithm in optimization of these controllers. The initial variation parameter for xNES initialized as 0.1 for the CartPole, Bipedal Walker and Mujoco Walker2D. Only the Ant required an even smaller setting of 0.01. These parameters were decided based on some preliminary analysis which led us to conclude that smaller parameters managed to generate initial populations with better immediate performance compared to the larger parameter settings. The objective fitness for the evolution was based on the rewards that the simulated agent could obtain, leading to different reward ranges for each problem. The Bipedal Walker is considered successful when it achieves +300 points in 1600 time steps. The threshold for good performance was set at 250 points since this amount represents that the Bipedal Walker has learned to walk and manages to get close to its goal coordinates. The CartPole, Ant and Walker2D have no inherent maximum fitness, theoretically they could continue to obtain points until their time limits are reached. However, the evolutionary process is concluded after a certain performance level has been reached to avoid large run times. Therefore, testing was performed to discover what amount of points could be considered good enough performance. For the CartPole the maximum was set at a 1000 points, 1 point per time step that it manages to keep the pole upright. The threshold above which performance was considered good was set at 800 points, this threshold means that the cart is able to keep the pole upright for 80% of the simulation time. For the Ant 2000 points means that the smallest generated Ant would manage to reach the end of the tiled plane quickly. Based on this the threshold of acceptable performance was set slightly lower at 1800. For the Walker2D the limit during evolution was set at 3000 points which like the Ant allows the smallest generated walker to reach the end of the tiled plane. The threshold for good performance was set at 1800 which means that the walker has at least learned to move forward and covered a good distance to the end of the environment. The threshold had to be set this low due to the extremely fragile nature of the walker. Furthermore, in default setting of the reward function, Ant and Walker2D involves a health reward that is provided only for being alive. This is set to 0 to avoid the evolutionary processes to exploit and getting stuck on behaviors that simply stay still during the whole evaluation process. All of these problems are considered as minimization problems, therefore, negative of the fitness measures are used during the evolutionary processes. The results are also presented based on the negative fitness.

4.3 Training schedules

We performed an additional experiments on CartPole and BipedalWalker to test various training schedules that introduce the morphological variations during the evolutionary process in a different order. We considered three training schedules: incremental, random and random walk but involved two parameter settings for random walk that led to total of 4 experiments.

In the incremental training schedule, the morphological variations are introduced in order on 2 dimensional parameter space starting from the initial x and y morphological parameters, and incrementing the parameters along the x axis first, followed by the increments on the parameters along the y axis. The random training schedule introduces a random morphology by sampling a morphological variation from x and y morphological parameters with equal probabilities. The random walk starts from a random x and y then selects the next variation to introduce from the neighborhood with equal probability. We implement two variations in random walk based on the step size of the selection of the next variation: 1 and 5.

4.4 Evaluation metrics

To test and compare the performance of robustness and generalisability of ANN controllers, we use three performance of average fitness on: (1) default morphology, (2) local variations set and (3) global variations set.

Default morphology is the performance of an evolved ANN controller on an arbitrarily selected morphology, i.e. the OpenAI environment comes with a default morphology settings for the agents.

Local variations set performance is the performance of an evolved ANN controller on the morphologies that are in and around the neighborhood of the default morphology (robustness). Including the training set, this set serves as a test for the ANNs a small number of unseen variations during the training with a set distance around the morphology

variations that they are trained on. This distance was set to 6 to ensure that at a minimum 36 unseen morphologies would be added. The larger the training morphology set of a controller is, the larger its local test set is.

Global variations set is the performance of an evolved ANN controller on the morphological variations that are larger than the local test set distance used for the robustness. This test space is kept the same for all ANNs no matter the number of morphologies they are trained on. This mean performance can indicate as a broad measure of performance of controllers in terms of their generalisability.

4.5 Statistical Analysis

The median of 30 independent runs was used to compare the robustness and generalisability results of the evolved ANN controllers on different sizes of morphology sets (i.e. 1, 16, 25, 49, and 64). This type of testing is normally done with a one way ANOVA, however, this test assumes that the samples are drawn from a normally distributed population. As the results show (i.e. see box plots in Result section), this assumption can not be satisfied. Therefore, the Kruskal-Wallis H test, a non-parametric alternative to the ANOVA, was applied [18]. This test only gives information about whether there is significant difference in between the groups, therefore Dunn’s post hoc test was applied to determine exactly which groups are different [10]. For the statistical analysis α was set to 0.05. The results of the statistical tests are included with the figures displaying the results with the bar over the box plots indicating which groups are significantly different.

5 Results

This section presents the results obtained on each problem separately in following subsections. We will provide results of each agent in the following sub-sections, subsequently, we will provide the results of the experiments on training schedules. Additional illustrations of the fitness trends during the evolutionary processes and evolutionary branching are given in Supplementary Material. Visual illustrations of simulated behavior of generalist controllers for each problem time are accessible online².

5.1 CartPole

Figure 3 provides the results on CartPole environment. Firstly, in this problem, evolutionary branching was not observed due to its simplicity, i.e. a single generalist controller was able to effectively control the whole range of morphologies we considered. Thus, the morphology space was not split into several controller ensembles.

On the default morphology (see Figure 3 (a)), while the number of training morphologies increases the average performance declines (assuming minimization). As a result, the controller that is specialized on the default morphology achieved the best average performance among the controllers that are evolved on the morphological variations. Since this task is relatively simple, all cases achieved the best score (thus there is not a strong statistical difference among the cases) but the case that is evolved on the default morphology achieved the best score consistently with the least variance. On the local variations set (see Figure 3 (b)), we observe a reverse trend relative to the performance on the default morphology. The median performance ranged between -670.28 and -896.15. Here, we observe an increasing performance trend (i.e. a decreasing negative fitness) while the size of the training morphology set increases. This shows that the controllers that are evolved on a larger morphological set are more robust in handling small perturbation of morphological variations. As the p -values indicate, the difference between the controllers that are evolved on the default or 16 morphologies vs. the controllers that are evolved on the size of 64 is statistically significant. As for the larger morphological sets, we observe that the performance distributions are more skewed towards lower score, thus better performance.

On the global variations set (see Figure 3 (c)), we observe a reverse performance trend relative to the default morphology similar to what is observed in local variations set. The results clearly demonstrate that, while the size of the morphological set increases, the performance of the controllers increase. Here, the controllers that are evolved on the default morphology achieved a median score of -420.05, while the controllers exposed to 64 morphologies obtained a median of -764.73 which is an improvement of about 85%. The p -values show that there is a statistically significant difference between the most cases (e.g. between 1 and 64, 1 and 49, 25 and 64).

Figure 3 (d) illustrates that while the size of the morphology sets increases, the controllers became more adept at handling a larger number of morphologies while still achieving a sufficient score of 800 points or more. The controllers that are evolved on the default morphology can control an average of 121 morphological variations sufficiently, accounting for the 37.35% of the global variation set. On the other hand, the controllers evolved with 64 morphologies achieved an average of handling 224 morphological variations sufficiently, encompassing approximately 69.14% of the global set. We demonstrate the performance of two controllers that are evolved with a training morphology size of 1 and 64 on wide range of morphologies in Figures 3 (e) and (f) respectively. In case of (e), the controller that is evolved with the size of 1 shows more specialization where it is not able to handle control task of the morphological variations larger than pole length of 0.4. Interestingly however, its performance can scale on the y -axes to different mass variations. The

²Visual illustration of the behavior of the generalist controllers is accessible at:
<https://youtu.be/eew4X5gBvLQ?si=29G5iBIpB5xhJEaT>

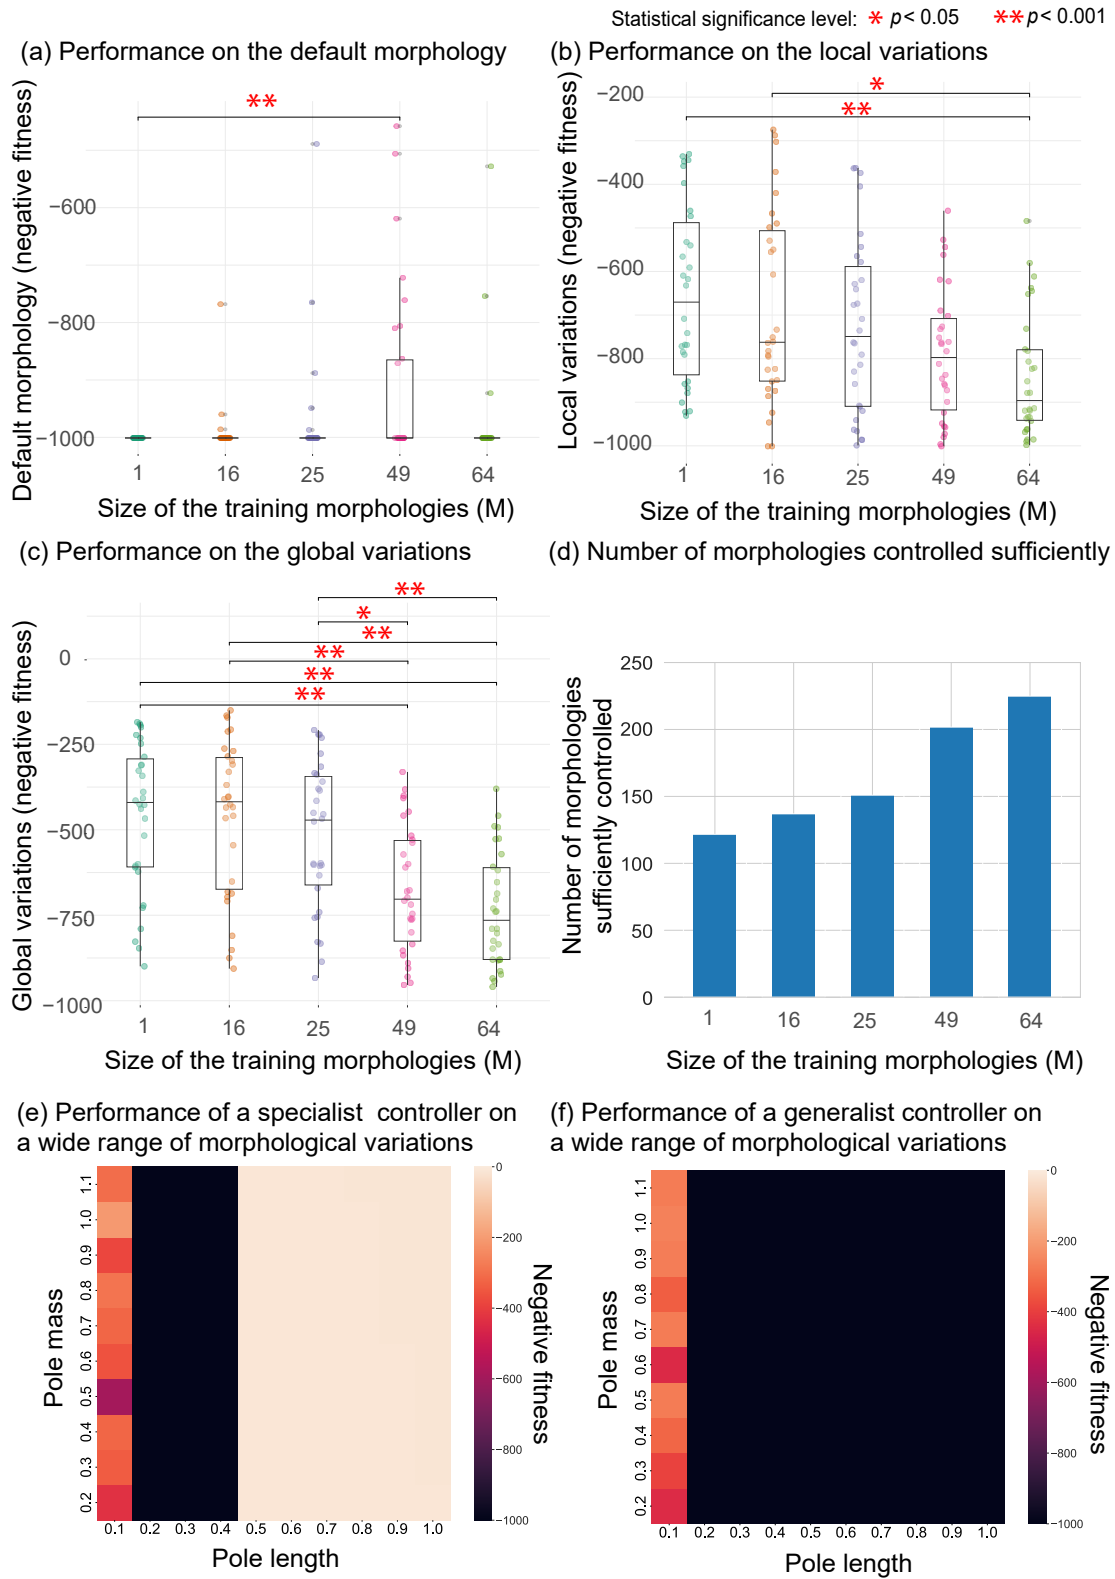


Figure 3: On CartPole, the controllers that are evolved on a smaller morphological training set show better performance on the default morphology (specialists), conversely, they show worse results on local and global variations that relative to the ones that are evolved on a larger set of morphological variations (generalists).

controller that is evolved with the size of 64 on the other hand, shows a more generalist behavior that can readily be transferred to different morphological variations across x and y -axes that introduce different parameters for the mass and length of the pole.

5.2 Bipedal Walker

In the Bipedal Walker task, a few runs were able to evolve a single generalist ANN controller without branching, many other runs resulted evolutionary branching. This may be due to the complexity of the problem that required several ANNs to partition the large morphological variation space and control each partition sufficiently well.

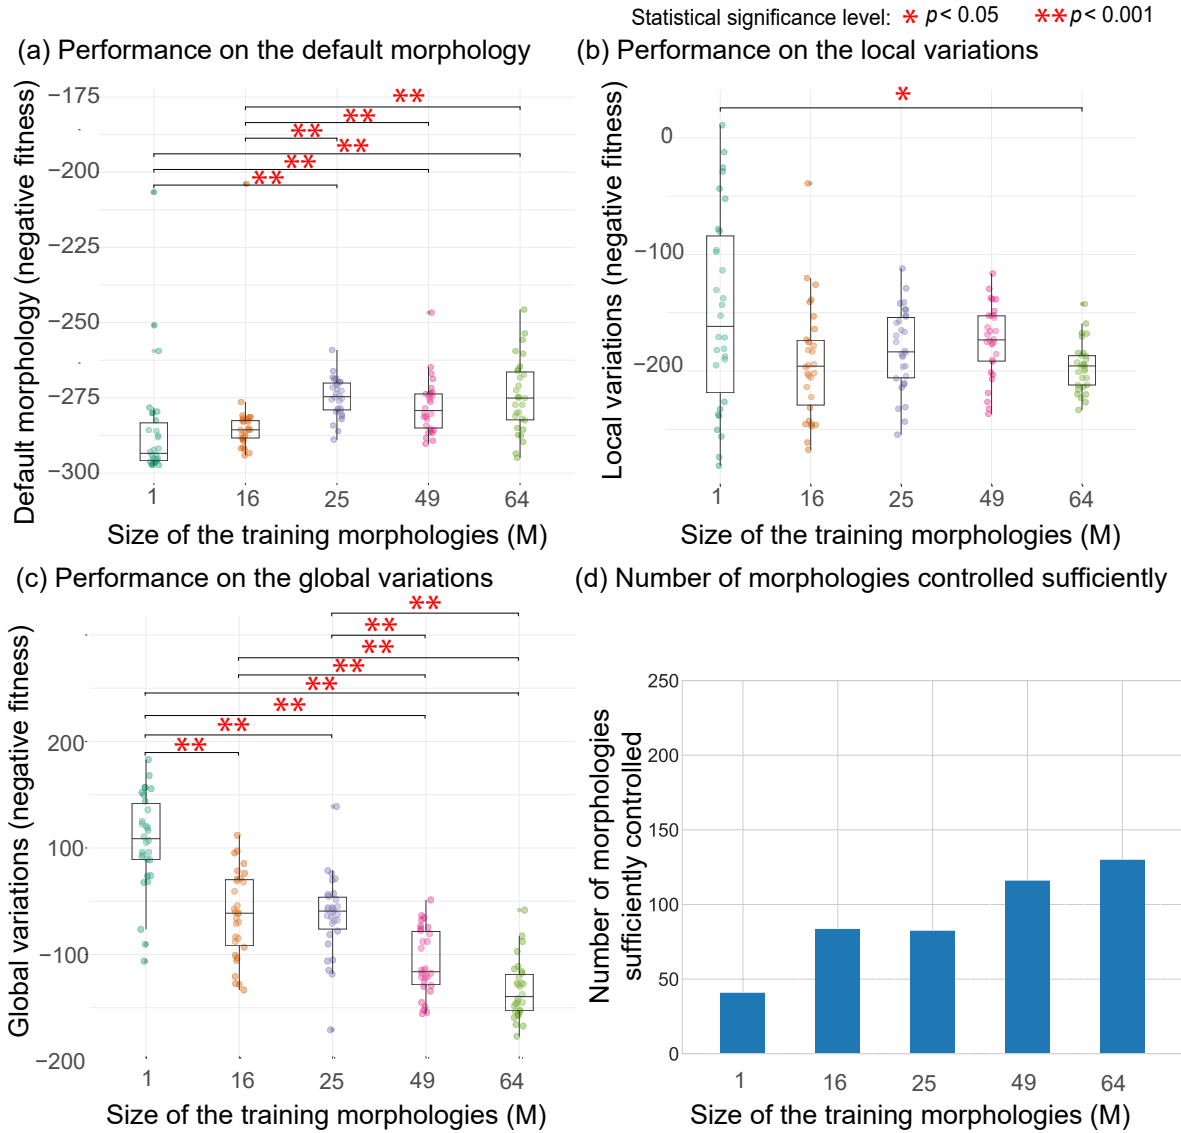


Figure 4: On Bipedal Walker, the controllers that are evolved on a smaller morphological training set show better performance on the default morphology (specialists), conversely, they show worst results on local and global variations relative to the ones that are evolved on a larger set of morphological variations (generalists).

On the default morphology (see Figure 4 (a)), we observe that the performance is reduced while the size of the training morphologies increases (assuming minimization). It is evident (based on the strong statistical difference) that introducing morphological variations during evolution has a negative impact on the performance on the default morphology. This is intuitive since in the cases of evolution with larger morphological variations, the time spend on evolving on different variations could be spent on the default morphology, which will increase the performance.

On the local variations set (see Figure 4 (b)), we observe a reverse trend observed in (a). The median of the performances ranged from -161.64 to -195.55 in processes that employ different size of morphology sets. The trend is slightly downward (thus increasing performance) while the size of the morphological sets increases. One interesting finding to note is that, while the sizes of morphological sets increases the variance reduces drastically. The p -value of the statistical test between the morphology sets of 1 and 64 showed a statistical significance. This supports the notion that the controllers evolved with a larger morphological set are more robust.

On the global variations set (see Figure 4 (b)), the reverse trend relative to (a) is even more stronger where the downward trend (thus increasing performance) is much more pronounced. The controllers that are evolved on the default morphology achieved a score of 8.71 whilst the controllers that are evolved with 64 morphologies achieved a median of -139.57. We also observe decreasing variation trend. The p -values indicates that the differences between the results are statistically significant.

Figure 4 (d) shows the number of morphologies the controllers is evolved to control sufficiently. We observe that, the controllers that employ larger sets of morphologies during evolution lead to sufficient control of larger number of morphologies. In Figure 1, the performance of a controller that is evolved on the default (a) and 64 morphologies (b) are shown respectively. We observe that the controller that is evolved on 64 morphologies is able to handle a wide range of morphological variations.

5.3 Ant

Due to the complexity of the Ant problem, we observe evolutionary branching, where several ANN controllers evolved to control partitions of the morphological variations.

On the default morphology (see Figure 5 (a)), we observe clear trend in the average of fitness that indicates that while the size of the morphological variations used during evolution increases, the average performance decreases. Furthermore, the differences are statistically significant. While the controllers evolved on the default morphology achieves an average fitness of -1482.11, the controllers that are introduced the largest morphological variations achieved an average fitness of -562.48.

On the local variations set (see Figure 5 (b)), we observe a steep downward trend (thus increased performance) that is reversed relative to the trend observed in (a). The median score for the controllers evolved on the default and 64 morphologies ranges from -587.78 to -1998.08 respectively. Furthermore, p -values indicate statistical significance between the cases.

On the global variations set (see Figure 5 (c)), similar to the local variations, we observe a steep downward trend when the size of the morphology set introduced during evolution increases. The median score from the default and 64 morphologies ranges between -131.54 and -1506.66 respectively. The p -values also indicate statistical significance between the results of these cases.

In Figure 5 (d), the number of environments that the ANN controllers can handle the control task sufficiently is also showing an increasing trend from 14 to 112 environments. Furthermore, we show in Figures 5 (e) and (f) a controller that is evolved on the default and 64 morphologies respectively. The results show that the controller evolved on 64 show much more generalizability handling sufficiently well a wide range of morphological variations.

5.4 Walker2D

On the default morphology (see Figure 6 (a)), we observe a clear upward trend while the size of morphologies increases that indicates that the performance of the controllers that are introduced morphological variations becomes worst (assuming minimization). The jump of the average fitness on the sizes of training morphology sets 1 and 64 show significant difference from an average of -2420.34 to -843.47. This can also indicate the difficult of learning a single Walker2D agent morphology with a generalist controller.

On the local variations set (see Figure 6 (a)), we observe a clear downward trend (whilst, increasing performance) while the size of the morphologies introduced during evolution increases. This trend is clearly reverse relative to the trend observed in (a). The controllers that are evolved on the default and 64 morphology achieve median performance between the range of -311.59 and -930.12 respectively. Furthermore, the p -values also indicate the statistical significance of the results.

We observe a similar and even stronger downward trend (increase in performance), on the global variations set (see Figure 6 (c)). In this case, the controllers that are evolved on the default and 64 morphologies achieve median of -203.25 and -729.04 respectively. Similarly, we observe that these results are statistically significant.

We observe in Figure 6 that while the size of the morphology set introduced during evolution increases, the controllers are increasingly capable of handling more environments. On the other hand, the increase in the number is not as well pronounced as in other problems. Similarly, in Figures 6 (e) and (f), we observe that the controllers that are evolved with a larger set are capable of performing better on a wider range of environmental variations relative to a controller that is evolved on the default morphology. This can indicate the difficulty of this task that the controllers are not as readily transferable to other morphological variations as it was in other problem instances.

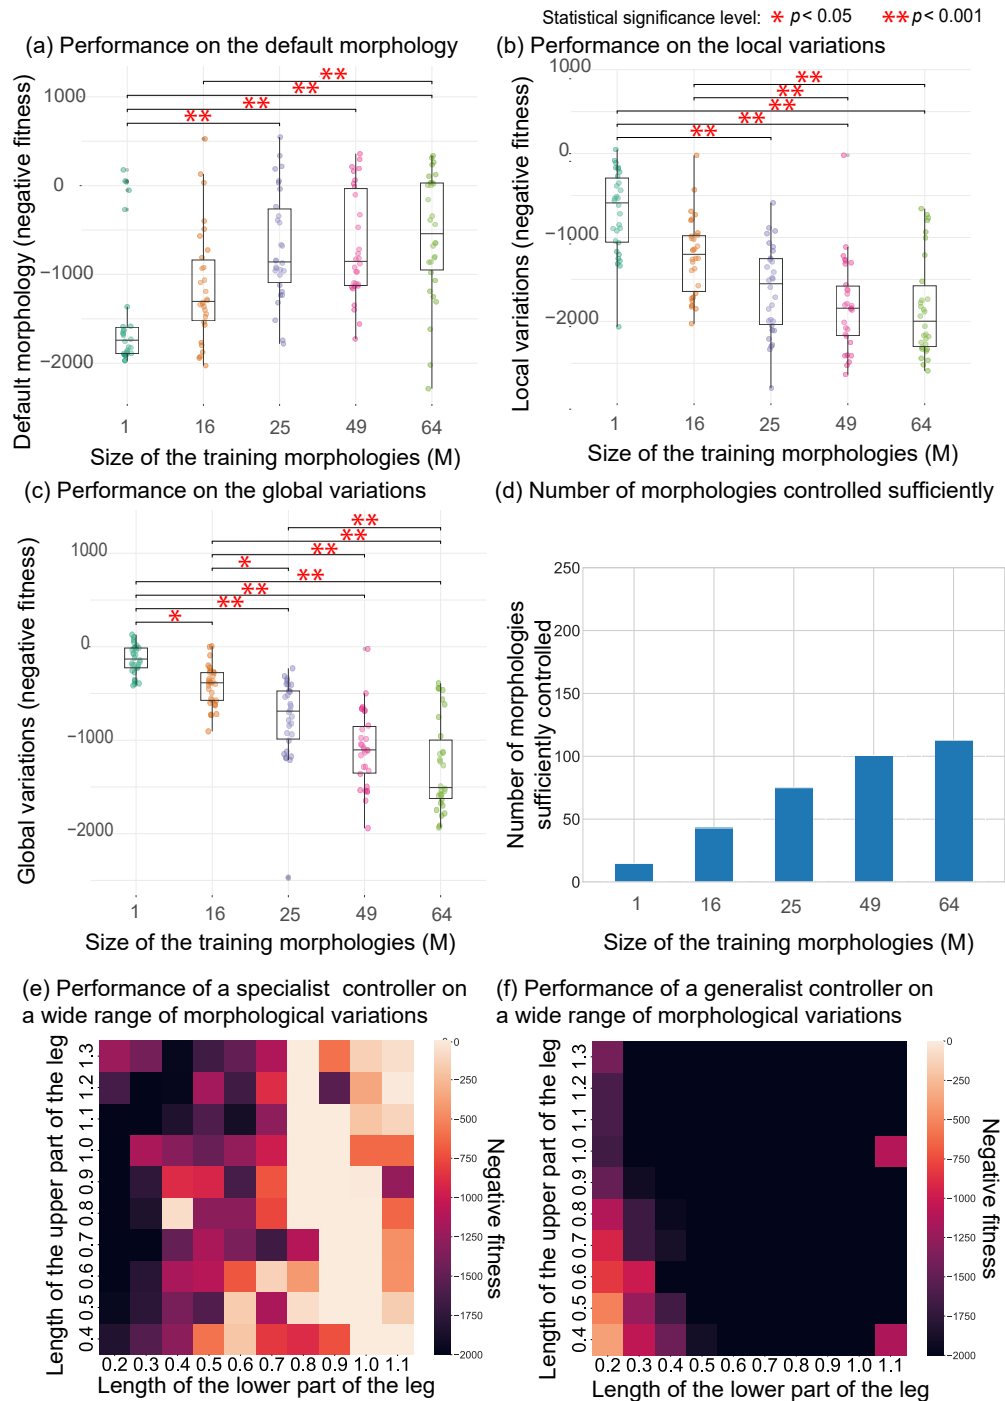


Figure 5: On Ant, the controllers that are evolved on a smaller morphological training set show better performance on the default morphology (specialists), conversely, they show worse results on the local and global variations relative to the ones that are evolved on a larger set of morphological variations (generalists).

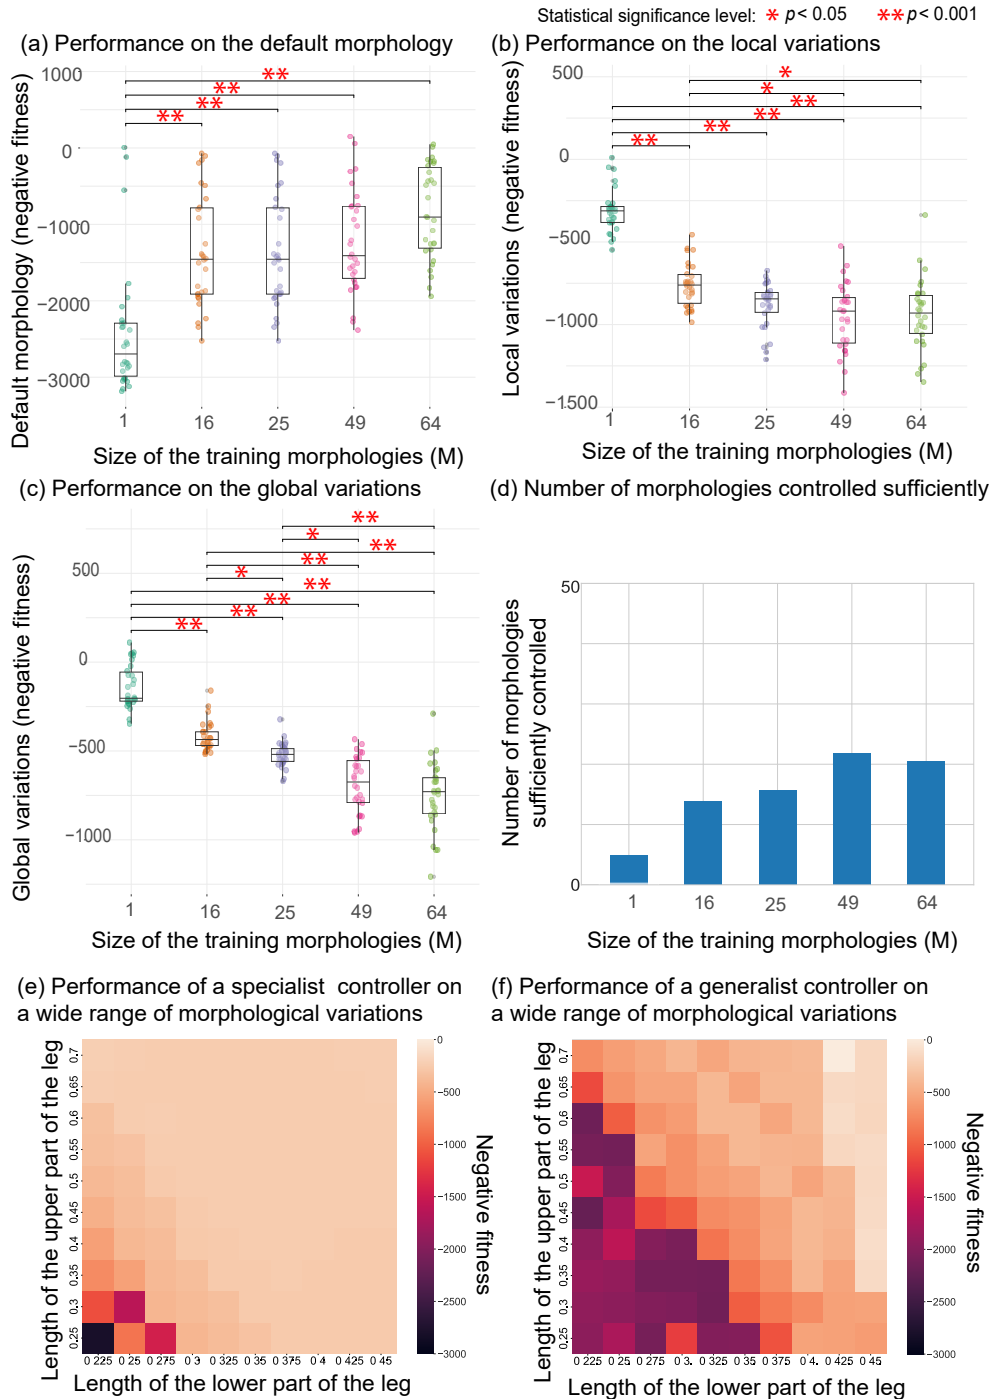


Figure 6: On Walker2D, the controllers that are evolved on a smaller morphological training set show better performance on the default morphology (specialists), conversely, they show worse results on the local and global variations relative to the ones that are evolved on a larger set of morphological variations (generalists).

5.5 Training schedules

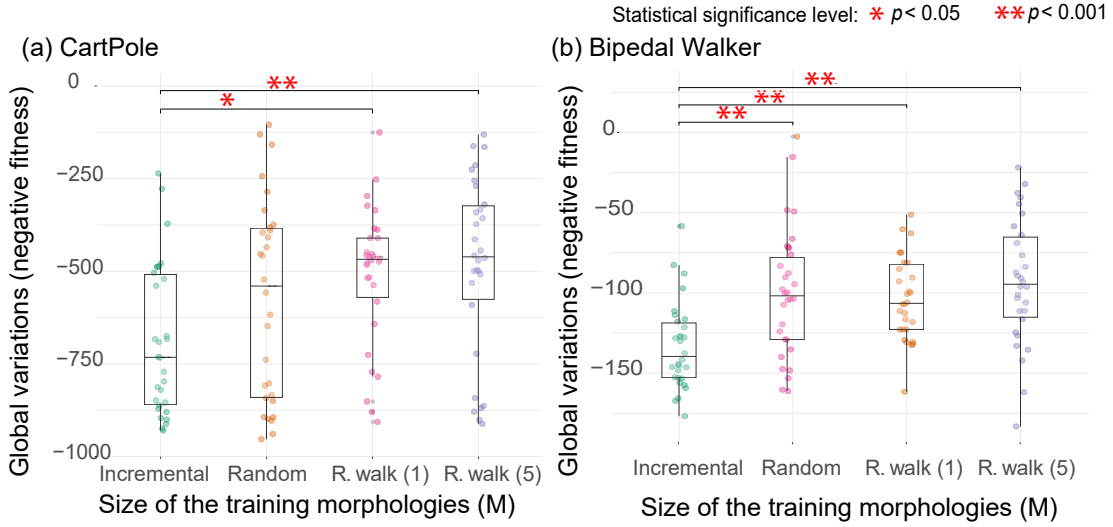


Figure 7: The incremental training schedule achieves the best results on the global variations set (lower the fitness is the better) relative to random and random walk with 1 and 5 step sizes on CartPole and Bipedal Walker problems.

Figure 7 shows the performance of four experiments using incremental, random, and random walk with step sizes of 1 and 5. These experiments were performed on the morphology size of 64 on CartPole and Bipedal Walker problems. The results show that the incremental training schedule achieves the best performance in terms of generalization. This may be due to the fact that, in the incremental training schedule there is a definite order that introduces variations with small morphological differences (depending on the definition of the training set) without any positive or negative bias on particular morphology variations. In the case of random, there is a uniform probability of introducing any morphology during the evolutionary process, but, the order is random so there may be large jumps in terms of morphological differences while these variations are introduced. In random walk with step size of 1, the selection of the morphologies is not uniform so some morphologies may have a bias in the evolution, and the morphological differences are not too much. In random walk with the step size of 5 on the other hand, there may be a bias in selection similar to random walk with step size 1, but morphological differences encountered during the evolution could be even larger. This shows up in the results where random walk with step size of 5 performs achieves the worst generalization.

6 Discussion

Taken together, the results strongly support the notion that the controllers that are evolved on a larger set of morphological variations show better robustness and generalization relative to the ones that are evolved on a fewer morphological variations. On the other hand, there is a tradeoff in that, the controllers that are evolved on a fewer morphological variation show better performance on a small and specific range of morphological variations (i.e. the performance on the default morphology) relative to the ones that are evolved on a larger set of variations. Thus, we can refer to the ones that are better on a limited range of variations specialists and the ones that can handle a wide range as the generalists. Although all problems conform with these observations, there are still some differences that may arise from the problem domain. For instance, controllers that are evolved for Walker2D problem were not as easy to scale to global variations as the other problems. This can indicate that there may be problem-specific differences that can influence the evolution of generalist controllers. Thus, in this problem, the trade-off between specialist and generalist was not very strong in terms of number of morphologies that are handled sufficiently well (which remained lower than 30 in all cases). On the other hand, in terms of average fitness, we see drastic differences in the robustness and generalizability in this problem as well. Due to the design of this problem, it is also more difficult to handle the control of this agent. Small changes in the morphology can lead to large behavioral differences. This can make it difficult to generalize all these morphological variants using a single generalist controller.

We observe that the generalist performance, relative to a specialist, can come at a loss on the performance on a specific morphology. This is expected and in line with the predictions based on the bias-variance trade-off. As the ANN controller becomes more generalist its bias may increase and variance may decrease relative to a specialist. This improves generalization but comes with the cost of specialization. How large this cost may depend on the problem.

Further experiments on the training schedules show the importance of the order of the variations are introduced during the evolutionary processes. Best performance on the global variations was achieved by the incremental training schedule where all morphological variations are introduced in order and with a small incremental steps. We observe a negative performance when the steps, and/or “possible” bias (i.e. in random walk case) in introducing some environments are increased. It is possible to design and test other forms of training schedules in the future, including dynamic ones that can change during the training. This has a potential of improving the results.

The results provide evidence that the proposed algorithm is capable of evolving more robust and generalist ANN controllers. However, there are several limitations to consider. The most significant limitation is that the algorithm currently treats the generalist as a by-product of specialist evolution. While this approach successfully evolves generalist controllers, it may be possible to perform evaluations on the whole range of morphologies as the objective function. This approach is currently too costly to pursue. If the computational cost of the evaluations across all morphology variations could be reduced, this could provide an effective process for evolving generalist ANNs.

Another improvement can consider scaling the fitness values depending on the morphological variations since some morphologies are expected to be better as a result of their morphological features. For instance, Ant and Walker2D can obtain more points simply as a result of being taller and thus being able to take bigger steps. This of course influences the mean performance across the test space. Scaling the fitness with information about the morphology could make the performances more comparable but requires analysis of how the fitness and morphology are related. Additionally, the algorithm currently does not employ other strategies to enhance generalization. As demonstrated by [33], methods like weight decay, commonly used in supervised learning for neural networks, could be adapted and employed to further improve the robustness and generalizability. Alternatively, methods from the field of curriculum learning could also be adapted [41, 24]. Though, by design, they do not necessarily promote generalizability but rather learning increasingly difficult tasks. This strategy can bring about controllers that are able to handle increasingly difficult tasks but this may not scale to previously seen or other tasks. Another interesting investigation could be by incorporating the limited evaluation approach [23, 43], where the generalist controllers are determined based on the “inherited” fitness over the morphological variations rather than specifically evaluating them on whole morphological training set.

Other limitations of this work include the reliance on a pre-determined set of hand-generated morphologies. This can still introduce some boundaries where these controllers can generalize. Nevertheless, generalization is often discussed in relative terms so we still would expect that they are better in generalization relative to the specialists.

In our experiments we included only morphological variations that effect both limbs equally. Other forms of variations, i.e. in case of damage in real world robotics, can result in unequal changes in the body. Therefore, the experimental setup could be extended to cover these cases to make the evolution of generalist controllers. Future work can also extend to real world robotics and to realistic scenarios where generalist controllers can play crucial role in reliable performance in unexpected environmental variations.

The algorithm can also be tested on other forms of variations such as, the environmental or task level. Furthermore, in this work, we only considered a single ANN topology and with a fixed number of neurons in its layers. Another interesting direction is to look into various types of ANNs and topologies to assess the impact of these in robustness and generalizability.

7 Conclusion

In this paper, we investigated the robustness and generalization of evolved ANN controllers with respect to morphological variations in control tasks. To do so, we proposed an algorithm to evolve ANN controllers that can handle a wide range of morphological variation. It is important to note that, these networks do not take any inputs relating to their morphology, nor do they change their parameters during operation to accommodate the morphological changes. Rather, they implement a generalist behavior that can be used over all morphological variations without any adjustment. This can provide a great advantage since it does not require learning a controller that is specific to a morphology or adaptation of the parameters during operation. This is achieved by introducing morphological variations during the evolutionary process. In addition, we show the impact of the order these variations are introduced in. We referred to this process as training schedules, and experimented with three possibilities: incremental, random and random walk.

Our extensive tests on four simulation tasks in the OpenAI gym simulation environment showed the tradeoff between the number morphological variations introduced during the evolutionary processes versus the evolution of controllers that are evolved to have various levels of robustness and generalization. We observed that, quite intuitively, the ANNs that encountered less number of morphological variations become more specialist, providing better result on a particular morphology where this performance is not readily transferable to other morphological variations. Whereas, the ANN controllers that encountered more morphological variation, showed better performance in a wide range of morphological variations including the ones that are not encountered during the evolutionary process. In addition, we showed that the training schedule made an impact in the results where the incremental training schedule produced networks with the highest level of robustness and generalization properties. Overall, our observations fully supported the notion that,

relative to specialists, generalists are more robust performers on a wider range of morphological variations, however, when it comes to a particular morphology, they are outperformed by the specialists.

The desired level of specialization vs. generalization may depend on the application. If there is not much variation expected, then a specialist can provide a better performance. In the face of a change however, a desired level of performance may not persist. On the other hand, if (frequent) changes are expected, then a generalist controller is much likely to outperform a specialist.

In conclusion, this paper contributes to the understanding of the tradeoff between specialization and generalization on evolved ANNs for control tasks. Future work should focus on refining the algorithm's approach and incorporating additional strategies to enhance further the robustness and generalization properties of the controllers.

References

- [1] Dustin Brisson. Negative frequency-dependent selection is frequently confounding. *Frontiers in Ecology and Evolution*, 6:10, 2018.
- [2] Greg Brockman, Vicki Cheung, Ludwig Pettersson, Jonas Schneider, John Schulman, Jie Tang, and Wojciech Zaremba. Openai gym. *arXiv preprint arXiv:1606.01540*, 2016.
- [3] Jonata Tyska Carvalho and Stefano Nolfi. The role of morphological variation in evolutionary robotics: Maximizing performance and robustness. *Evolutionary Computation*, pages 1–18, 2023.
- [4] Brian Charlesworth, Magnus Nordborg, and Deborah Charlesworth. The effects of local selection, balanced polymorphism and background selection on equilibrium patterns of genetic diversity in subdivided populations. *Genetics Research*, 70(2): 155–174, 1997.
- [5] Antoine Cully, Jeff Clune, Danesh Tarapore, and Jean-Baptiste Mouret. Robots that can adapt like animals. *Nature*, 521(7553): 503–507, 2015.
- [6] Kalyanmoy Deb, Amrit Pratap, Sameer Agarwal, and TAMT Meyarivan. A fast and elitist multiobjective genetic algorithm: Nsga-ii. *IEEE transactions on evolutionary computation*, 6(2):182–197, 2002.
- [7] Michael Doebeli and Ulf Dieckmann. Evolutionary branching and sympatric speciation caused by different types of ecological interactions. *The american naturalist*, 156(S4):S77–S101, 2000.
- [8] Stephane Doncieux, Nicolas Bredeche, Jean-Baptiste Mouret, and Agoston E Eiben. Evolutionary robotics: what, why, and where to. *Frontiers in Robotics and AI*, 2:4, 2015.
- [9] Xibin Dong, Zhiwen Yu, Wenming Cao, Yifan Shi, and Qianli Ma. A survey on ensemble learning. *Frontiers of Computer Science*, 14:241–258, 2020.
- [10] Olive Jean Dunn. Multiple comparisons using rank sums. *Technometrics*, 6(3):241–252, 1964.
- [11] Dario Floreano, Peter Dürri, and Claudio Mattiussi. Neuroevolution: from architectures to learning. *Evolutionary intelligence*, 1:47–62, 2008.
- [12] Stuart Geman, Elie Bienenstock, and René Doursat. Neural networks and the bias/variance dilemma. *Neural computation*, 4(1): 1–58, 1992.
- [13] Stefan AH Geritz, Johan AJ Metz, Éva Kisdi, and Géza Meszéna. Dynamics of adaptation and evolutionary branching. *Physical Review Letters*, 78(10), 1997.
- [14] Tobias Glasmachers, Tom Schaul, Sun Yi, Daan Wierstra, and Jürgen Schmidhuber. Exponential natural evolution strategies. In *Proceedings of the 12th annual conference on Genetic and evolutionary computation*, pages 393–400, 2010.
- [15] Abhishek Gupta, Yew-Soon Ong, and Liang Feng. Multifactorial evolution: toward evolutionary multitasking. *IEEE Transactions on Evolutionary Computation*, 20(3):343–357, 2015.
- [16] Nick Jakobi, Phil Husbands, and Inman Harvey. Noise and the reality gap: The use of simulation in evolutionary robotics. In *Advances in Artificial Life: Third European Conference on Artificial Life Granada, Spain, June 4–6, 1995 Proceedings 3*, pages 704–720. Springer, 1995.
- [17] Sylvain Koos, Jean-Baptiste Mouret, and Stéphane Doncieux. The transferability approach: Crossing the reality gap in evolutionary robotics. *IEEE Transactions on Evolutionary Computation*, 17(1):122–145, 2012.
- [18] William H Kruskal and W Allen Wallis. Use of ranks in one-criterion variance analysis. *Journal of the American statistical Association*, 47(260):583–621, 1952.
- [19] Yong Liu, Xin Yao, and Tetsuya Higuchi. Evolutionary ensembles with negative correlation learning. *IEEE Transactions on Evolutionary Computation*, 4(4):380–387, 2000.
- [20] Ravi Mangal, Aditya V. Nori, and Alessandro Orso. Robustness of neural networks: A probabilistic and practical approach. In *2019 IEEE/ACM 41st International Conference on Software Engineering: New Ideas and Emerging Results (ICSE-NIER)*, pages 93–96, 2019. doi:10.1109/ICSE-NIER.2019.00032.
- [21] Risto Miikkulainen. *Neuroevolution*, pages 716–720. Springer US, Boston, MA, 2010. ISBN 978-0-387-30164-8. doi:10.1007/978-0-387-30164-8_589. URL https://doi.org/10.1007/978-0-387-30164-8_589.

- [22] Takahiro Miki, Joonho Lee, Jemin Hwangbo, Lorenz Wellhausen, Vladlen Koltun, and Marco Hutter. Learning robust perceptive locomotion for quadrupedal robots in the wild. *Science Robotics*, 7(62):eabk2822, 2022.
- [23] Gregory Morse and Kenneth O Stanley. Simple evolutionary optimization can rival stochastic gradient descent in neural networks. In *Proceedings of the Genetic and Evolutionary Computation Conference 2016*, pages 477–484, 2016.
- [24] Sanmit Narvekar, Bei Peng, Matteo Leonetti, Jivko Sinapov, Matthew E Taylor, and Peter Stone. Curriculum learning for reinforcement learning domains: A framework and survey. *The Journal of Machine Learning Research*, 21(1):7382–7431, 2020.
- [25] Tønnes F Nygaard, Charles P Martin, Jim Torresen, Kyrre Glette, and David Howard. Real-world embodied ai through a morphologically adaptive quadruped robot. *Nature Machine Intelligence*, 3(5):410–419, 2021.
- [26] OpenAI, Ilge Akkaya, Marcin Andrychowicz, Maciek Chociej, Mateusz Litwin, Bob McGrew, Arthur Petron, Alex Paino, Matthias Plappert, Glenn Powell, Raphael Ribas, Jonas Schneider, Nikolas Tezak, Jerry Tworek, Peter Welinder, Lilian Weng, Qiming Yuan, Wojciech Zaremba, and Lei Zhang. Solving rubik’s cube with a robot hand, 2019.
- [27] Paolo Pagliuca, Nicola Milano, and Stefano Nolfi. Efficacy of modern neuro-evolutionary strategies for continuous control optimization. *Frontiers in Robotics and AI*, 7:98, 2020.
- [28] Rolf Pfeifer and Josh Bongard. *How the body shapes the way we think: a new view of intelligence*. MIT press, 2006.
- [29] Ruben Putter and Geoff Nitschke. Evolving morphological robustness for collective robotics. In *2017 IEEE Symposium Series on Computational Intelligence (SSCI)*, pages 1–8. IEEE, 2017.
- [30] Ruben Putter and Geoff Nitschke. Objective versus non-objective search in evolving morphologically robust robot controllers. In *2018 IEEE Symposium Series on Computational Intelligence (SSCI)*, pages 2033–2040, 2018. doi:10.1109/SSCI.2018.8628627.
- [31] Aravind Rajeswaran, Kendall Lowrey, Emanuel V Todorov, and Sham M Kakade. Towards generalization and simplicity in continuous control. *Advances in Neural Information Processing Systems*, 30, 2017.
- [32] Sebastian Risi and Kenneth O Stanley. Confronting the challenge of learning a flexible neural controller for a diversity of morphologies. In *Proceedings of the 15th annual conference on Genetic and evolutionary computation*, pages 255–262, 2013.
- [33] Tim Salimans, Jonathan Ho, Xi Chen, Szymon Sidor, and Ilya Sutskever. Evolution strategies as a scalable alternative to reinforcement learning. *arXiv preprint arXiv:1703.03864*, 2017.
- [34] Tom Schaul. Benchmarking exponential natural evolution strategies on the noiseless and noisy black-box optimization testbeds. In *Proceedings of the 14th annual conference companion on Genetic and evolutionary computation*, pages 213–220, 2012.
- [35] Kenneth O Stanley, Jeff Clune, Joel Lehman, and Risto Miikkulainen. Designing neural networks through neuroevolution. *Nature Machine Intelligence*, 1(1):24–35, 2019.
- [36] Felipe Petroski Such, Vashisht Madhavan, Edoardo Conti, Joel Lehman, Kenneth O Stanley, and Jeff Clune. Deep neuroevolution: Genetic algorithms are a competitive alternative for training deep neural networks for reinforcement learning. *arXiv preprint arXiv:1712.06567*, 2017.
- [37] Akbar Telikani, Amirhessam Tahmassebi, Wolfgang Banzhaf, and Amir H Gandomi. Evolutionary machine learning: A survey. *ACM Computing Surveys (CSUR)*, 54(8):1–35, 2021.
- [38] Josh Tobin, Rachel Fong, Alex Ray, Jonas Schneider, Wojciech Zaremba, and Pieter Abbeel. Domain randomization for transferring deep neural networks from simulation to the real world. In *2017 IEEE/RSJ international conference on intelligent robots and systems (IROS)*, pages 23–30. IEEE, 2017.
- [39] Nihat Engin Toklu, Timothy Atkinson, Vojtěch Míčka, Paweł Liskowski, and Rupesh Kumar Srivastava. EvoTorch: Scalable evolutionary computation in Python. *arXiv preprint*, 2023. <https://arxiv.org/abs/2302.12600>.
- [40] Inês Valentim, Nuno Lourenço, and Nuno Antunes. Adversarial robustness assessment of neuroevolution approaches. In *2022 IEEE Congress on Evolutionary Computation (CEC)*, pages 1–8. IEEE, 2022.
- [41] Rui Wang, Joel Lehman, Jeff Clune, and Kenneth O Stanley. Poet: open-ended coevolution of environments and their optimized solutions. In *Proceedings of the Genetic and Evolutionary Computation Conference*, pages 142–151, 2019.
- [42] Daan Wierstra, Tom Schaul, Tobias Glasmachers, Yi Sun, Jan Peters, and Jürgen Schmidhuber. Natural evolution strategies. *The Journal of Machine Learning Research*, 15(1):949–980, 2014.
- [43] Anil Yaman, Decebal Constantin Mocanu, Giovanni Iacca, George Fletcher, and Mykola Pechenizkiy. Limited evaluation cooperative co-evolutionary differential evolution for large-scale neuroevolution. In *Proceedings of the Genetic and Evolutionary Computation Conference*, pages 569–576, 2018.

8 Supplementary Information

8.1 The Algorithm

Algorithm 1 Evolving generalist controllers

```

1:  $M$  = set of  $n$  morphologies
2:  $G = \emptyset$ 
3: while  $n \neq 0$  do
4:    $O = \emptyset$ 
5:    $\hat{f}_i = 0$ 
6:    $m_i$  = current morphology
7:    $n = |M|$  ▷ number of morphologies
8:   while  $\hat{f}_i > \text{max fitness and evals} < \text{max evaluations}$  do
9:     generate new solution candidates
10:    evaluate candidates on  $m_i$ 
11:     $I_{best}$  = individual with highest fitness
12:     $f_{best}$  = fitness of  $I_{best}$ 
13:    update search distribution parameters
14:    for  $m$  in  $M$  do
15:      evaluate  $I_{best}$  on  $m$ 
16:    end for
17:     $\hat{f}'$  = mean fitness of fittest individual
18:    if  $\hat{f}' < \hat{f}$  then ▷ Assuming minimization
19:       $I_1 = I_{best}$ 
20:      add  $I_1$  to  $G$ 
21:       $\hat{f}_i = \hat{f}'$ 
22:    end if
23:     $m_i = m_{i+1}$ 
24:    if  $f_{best}$  has not improved for  $h$  generations then ▷ Stagnation
25:      for  $m$  in  $M$  do
26:        fitness = evaluate  $I_1$  on  $m$ 
27:        if fitness  $\leq (\hat{f}_i + \sigma)$  then
28:           $n' = n' + 1$ 
29:        else fitness  $> (\hat{f}_i + \sigma)$ 
30:          add  $m$  to  $O$ 
31:          remove  $m$  from  $M$ 
32:        end if
33:      end for
34:    end if
35:    if  $n' = n$  then
36:      break
37:    else
38:       $n = n'$ 
39:    end if
40:  end while
41:   $M = O$ 
42: end while
43: return  $G$ 
    
```

8.2 Fitness trends during the evolutionary processes

Figure 8 shows the fitness trends during the evolutionary processes on four agent types. In CartPole, evolutionary branching was not observed. A single generalist controller is learned less than 100 generations. In other environments, we can observe occasional fitness increase that indicate the restart of the evolutionary process that is run on the outlier sets.

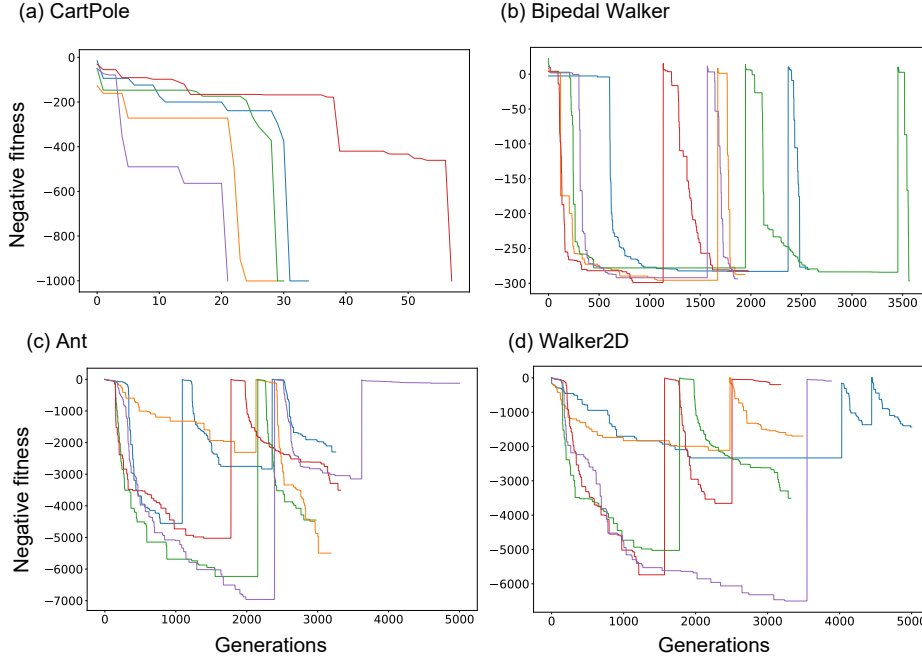


Figure 8: Illustration of fitness values of five independent evolutionary processes (on morphology size of 64) on four problems.

8.3 Evolutionary branching

Table 1 shows the average number of evolutionary branching (and standard deviation) observed based on the size of training morphologies in each problem type. CartPole did not show any branching, whereas Walker2D showed the largest number of branching. In Figure 9, illustrate the branching process and how it partitions the space of morphology variations.

Table 1: Table shows the mean and standard deviation of the number of clusters for each combination of environment and size of the training morphology set.

Size of training morphologies:	1	16	25	49	64
CartPole	1	1	1	1	1
Bipedal Walker	1	1.67 ± 0.96	1.367 ± 0.56	2.367 ± 0.61	2.53 ± 0.78
Ant	1	1.67 ± 0.84	1.7 ± 0.92	1.9 ± 1.12	2.33 ± 1.24
Walker2D	1	2.4 ± 1.04	2.9 ± 0.99	3.2 ± 1.06	3.1 ± 1.24

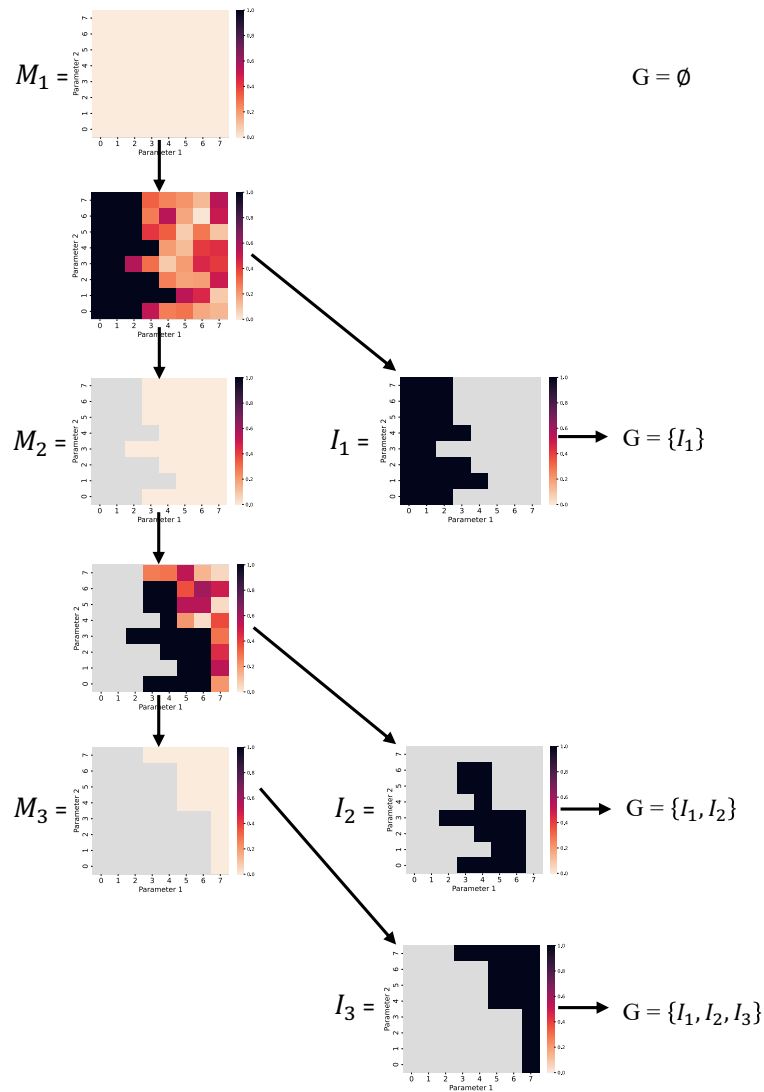


Figure 9: Visualization of an example of the evolutionary branching. The algorithm starts with an empty set G and a morphology set M_1 which results in a controller I_1 and a set of left-over morphologies M_2 . I_1 is added to G and the evolution restarts with M_2 . This repeats until enough controllers I have been found that together cover the morphology space and have been added to G . Overall, the process partitions the morphological space into clusters that can be controlled by generalist controllers as much as possible.