Guided rewiring of social networks reduces polarization and accelerates collective action

Lilli Frei¹, Jordan Everall¹ and Andrew K. Ringsmuth^{1,2}

¹Wegener Center for Climate and Global Change, University of Graz, Brandhofgasse 5, Graz, 8010, Styria, Austria.

²Complexity Science Hub Vienna, Josefstädter Straße 39, Vienna, 1080, Vienna, Austria.

Contributing authors: lillifrei.99@gmail.com; jordan.everall@uni-graz.at; andrew.ringsmuth@uni-graz.at;

Abstract

Global challenges like climate change may be considered as collective action problems that require sufficient cooperation with pro-mitigation norms, soon enough to be effective. Socio-political polarization is a barrier to collective action. Prior agent-based models of behavioural change on structured networks in a shared socio-political environment have shown that polarization emerges naturally in such systems and that the speed of consensus formation is limited by the rate at which polarized clusters can be dissolved. Here we study how guided social link rewiring affects the speed of network depolarization. We investigate rewiring algorithms representing random meetings, introduction by mutual acquaintances, and bridging between socially distant communities. We find that building lasting links between polarized individuals and communities can accelerate consensus formation when the sociopolitical environment is favourable. This strengthens the evidence that promoting connection between polarized communities could accelerate collective action on urgent global challenges.

Keywords: social network, common-pool resource, collective action, polarization, link rewiring

1 Introduction

Many societal challenges are social dilemmas in which individual rationality leads to irrational large-scale behaviour [1]. Examples include common-pool resource (CPR) management challenges such as deforestation, the depletion of carbon budgets and loss of biodiversity. Evidence of successful bottom-up CPR management shows that individuals can overcome myopic strategies that lead to resource depletion and limit their resource usage to a sustainable level [2, 3]. Such bottom-up management is more likely to succeed for small-scale CPRs that have clear boundaries and enforceable access rules but becomes more difficult for resources that are large relative to the scale of resource extraction by individuals [4]. Especially for global challenges like climate change, it is difficult to define and monitor clear boundaries, such as national or per-capita emissions permits [5]. The mismatch of scales between the large CPR and comparatively small extractions by individuals may make it difficult for individuals to perceive the resource's response to their actions. Without obvious feedback, individuals might not realize the need for restraint until critical thresholds have been crossed [6]. While formal institutions such as state governments or supranational institutions have the power to alter structures such that conservation strategies become individually rational, they depend on social support to ensure successful implementation and avoid backlash [7]. Without individual behaviour obviously threatening the resource, however, finding social support for conservation policies is challenging [8].

Although the urgency of global socio-ecological challenges such as climate action and pandemic containment has become clearer [9], governments struggle to enforce policies aimed at tackling them through collective action [10-12]. Rather, the opposite is the case; research shows that political and social polarization around such global challenges is high [13–15]. Empirical studies have found that high levels of political and social polarization can significantly inhibit collective action [11, 13, 16] and suggest that dissolving polarization could promote efficient policy-making and restore a functioning democracy [11, 12, 16]. In general, a polity is polarized when dominated by two opposite or contradictory tendencies that lack significant common ground [17]. This usually also involves increased support for extreme political views relative to more moderate ones [15]. Since individuals' opinions are highly impacted by their social context [3, 18, 19], polarization is catalyzed by social structures that reinforce ideological separation by excluding external information [14, 20, 21]. It may be that information does not enter polarized clusters because of filters that impair its flow. Such filtering may be individuals' natural reaction to exposure to more information than they can process [21]. It may also be externally imposed through media control, systematic censorship or algorithmic filtering [20, 21]. Even if information does reach polarized clusters, it may be discredited through targeted manipulation of trust [21]. In both cases, social restructuring can help to provide members of polarized clusters with relevant information or to restore chains of trust to external information sources [21, 22]. In the latter case, building trust in social, political, and scientific institutions is crucial, as simply confronting members with outside information will not help to dissolve the polarized cluster and may even reinforce the value system under attack [16, 21].

These empirical results underscore the importance of careful engagement with different views. Consistent with this, previous modeling work analyzing opinion dynamics has shown that the rate of depolarization is essentially determined by the frequency of interactions between different opinion clusters and the response assumed when opinions are exchanged [16, 23, 24]. These findings suggest that increasing opportunities for interaction between agents with dissimilar views through social rewiring might speed up depolarization and, accordingly, collective action. In this paper we test this hypothesis by extending a pre-existing agent-based model (ABM) on a social network. The ABM was introduced by Andersson et al. [24] and simulates the spread of a pro-conservation norm on a clustered scale-free social network embedded in a shared sociopolitical environment. Andersson et al. [24] used this framework to explore factors affecting the speed of collective action to conserve a large CPR. We extend this by adding link rewiring, which allows agents to alter their social environment by breaking links to neighbours and forming new links to non-neighbours. This allows an agent inside an opinion cluster to form links to agents outside the cluster and become exposed to dissimilar views.

We aim to identify any dependence of network depolarization rate on properties of link rewiring algorithms, and how this might be used to accelerate depolarization relative to static networks. We test three rewiring algorithms. First, purely random rewiring as a baseline scenario to analyse the effect of a variable network structure without further assumptions. Second, a 'local rewiring' algorithm based on current understanding of the processes by which social networks usually change: individuals are most likely to form new relationships with people who are similar and topologically close to them [20, 25, 26]. Finally, 'bridge rewiring' that incorporates recommendations for dissolving polarization from the literature and establishes links between differently thinking agents to increase their exposure to differing views [14, 20, 21].

2 Results

To learn how rewiring algorithms affect depolarization we study the time evolution of the average agent cooperativity (hereafter simply 'cooperativity') and polarization. Parameters are defined in the Methods section. We quantify polarization by calculating the standard deviation of the cooperativity in each network realization and averaging these to obtain the polarization shown in the plots.

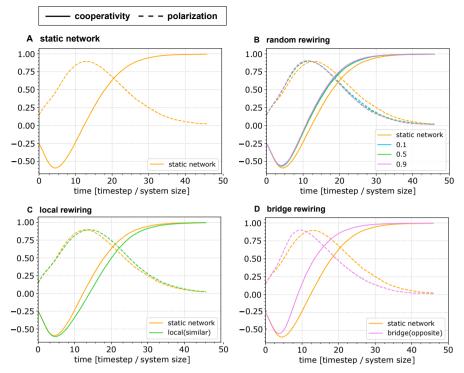


Fig. 1 Time evolution of cooperativity and polarization for a static and dynamic networks. The standard deviation of cooperativity represents polarization. A The static network scenario serves as a benchmark. Cooperativity initially declines rapidly due to the predominance of defectors at t = 0. The slightly positive (pro-cooperation) external field drives the system towards full cooperation through a slower process of polarized cluster dissolution. B Representative dynamics under random rewiring. The legend refers to different probabilities for establishing and breaking links. Convergence is faster compared to the static network, this is matched by a faster decline in polarization. Different rewiring probabilities have minimal impact on convergence. C Representative dynamics under bridge rewiring. Convergence is faster relative to the static network which is matched by an earlier decline in polarization.

2.1 Representative dynamics

In figure 1A-D we see that the qualitative stages of the dynamics originally observed by Andersson et al. for a static network [24] are maintained under dynamic network structures. In the first stage, the slight defector majority that is assumed to exist at t = 0 dominates and cooperativity declines. Agents with strong opinions spread them to their neighbours, resulting in growing opinion clusters that rapidly polarize the network. This is quantified by the increasing standard deviation of the cooperativity. Any interactions within the opinion clusters serve to reinforce opinions and, thus, polarization. Even without assuming bounded confidence, this cluster formation stage ends in a fully polarized state in which only extreme opinions are present. This corresponds to the maximum standard deviation. The next stage of the dynamics is a slower process of cluster dissolution (depolarization), where meaningful interactions take place only at the cluster perimeters, between agents holding opposing opinions. Here the assumption of a slightly positive external field, representing a socio-political environment favorable to resource conservation, is pivotal, as it slightly biases the interactions such that defector-to-cooperator conversion is more likely than cooperator-to-defector conversion. We refer to the time derivative of the cooperativity during the depolarization stage as the convergence rate.

The depolarization stage can itself be divided into two substages. In the first, cooperativity grows approximately exponentially. In the second, the convergence rate slows, likely due to the shrinking clusters' finite sizes in combination with fluctuations [24]. As social change depends more on achieving a cooperative majority than winning over the last few holdouts [24, 27, 28], we focus on the convergence rate within the exponential stage of cluster dissolution.

2.2 Random rewiring

We first study the effects of random (unguided) rewiring as a baseline for introducing dynamic network structure. Figure 1B compares the cooperativity and polarization dynamics under random rewiring with the dynamics in a static network. During the initial cluster formation stage, the two systems behave almost identically until the standard deviation reaches roughly half of its eventual maximum value. This is unsurprising since, in an unpolarized network, random rewiring does not on average introduce agents to opinions that are different from those in their local environment. However, once polarized clusters have formed, random rewiring allows agents inside opinion clusters to link with agents holding opposite opinions, effectively lengthening the cluster perimeters along which opinion change is possible. Since we assume a slightly positive external field, more frequent interactions between differently thinking agents cause a slightly earlier peak in polarization and then accelerate convergence towards a fully cooperative network. Concurrently, the rate of depolarization is also accelerated relative to the static network case. Random rewiring, however, cannot counteract the finite size effects that slow down convergence as full cooperation approaches. The similar effect of different rewiring probabilities suggests that convergence rates are insensitive to the exact rewiring probability chosen.

2.3 Local rewiring

We analyse how social rewiring dynamics commonly seen in real social networks affect the convergence rate through modified, local rewiring that limits potential new neighbours to those within two network steps. We further enforce a high level of homophily (see Methods). Figure 1C shows that this slows the convergence rate relative to random rewiring. Under local rewiring, links are established only with agents holding the same opinion, while links are broken with uniform probability across all neighbours. This increases the link density within opinion clusters and reduces inter-cluster links. The resulting decrease in interactions between agents holding different opinions lowers the chance of opinion change, which slows convergence.

2.4 Bridge rewiring

As recommended by [14, 20, 23], we implement an algorithm that guides the establishment of links between differently thinking agents. We limit the potential new neighbours to those outside agent i's own cluster and enforce a high level of heterophily (see Methods). Figure 1D shows that this reduces the initial dip in cooperation and then accelerates convergence relative to random rewiring. This is likely due to a reduction in link density between similar opinion clusters and concurrent increase in link density between polarized clusters resulting from agent i rewiring only to agents holding the opposite opinion while links are broken with uniform probability across all neighbours. Together with the assumed slightly positive external field, the resulting increased likelihood of cooperator-defector interaction reduces opinion reinforcement and extremization during the polarization stage and subsequently accelerates depolarization and convergence.

2.5 Effects of toplogical constraints and opinion preferences

Our local and bridge rewiring algorithms differ on two dimensions: a topological constraint (local or bridge) and an opinion preference determining whether agents link to agents with similar or opposite opinions (homo-/heterophily). To better understand the effects of each, we study the cooperativity and polarization dynamics under changes in each alone (see Methods). Figure 2A and B show that the effect of changing the topological constraint alone is relatively small, with both local(similar) and bridge(similar) rewiring leading to lower convergence rates than on a static network. Establishing links between agents with similar opinions leads to a decline in links between defectors and cooperators, thereby reducing the probability of meaningful interaction. We see that the initial drop in cooperation is slightly larger with the local(similar) algorithm. This is likely because local(similar) rewiring increases the link density within existing opinion clusters and thereby facilitates the initial spread of strongly defective opinions.

While the convergence rates under both local(similar) and bridge(similar) rewiring are lower than that achieved on the static network, the rate under bridge(similar) rewiring approaches the static network rate, particularly when the cooperativity exceeds 0.75. This may be because bridge(similar) rewiring creates links that connect different clusters of the same opinion. Since we

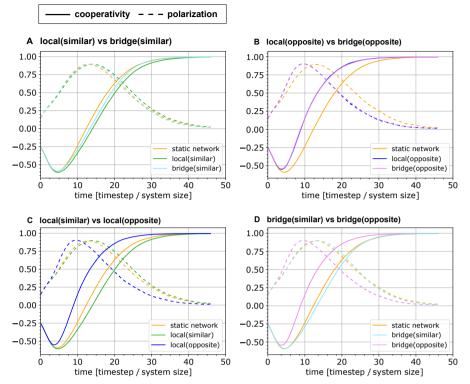


Fig. 2 Isolating the effects of topological constraint and opinion preference. Rewiring is topologically limited to agents within 2 network steps (local) or outside of agent *i*'s own cluster (bridge). In the (similar) algorithms a link is established only if the agents are of a similar opinion (homophily). In (opposite) rewiring, links are established only if the agents are of opposite opinion (heterophily). A and B compare the role of the limitation set on the pool of potential neighbours for (similar) and (opposite) rewiring. We observe that the role of the topological constraint on potential neighbours is small. C and D compare the role of homophily and heterophily when establishing links. The effect on convergence rate is significant. Homophily (i.e. (similar) rewiring) leads to reduced convergence rates while heterophily (i.e. (opposite) rewiring) increases convergence rates

include a clustering step in the link-building process (see Methods), this creates a 'super cluster', making it increasingly unlikely that a non-neighbour outside of agent *i*'s cluster is of the same opinion. The number of new connections made therefore decreases until all like-minded agents belong to the same cluster and no new connections are made. The rate of convergence is then equal to that which occurs on the static network.

We see quite different dynamics in panel B. Links are established only between agents holding opposite opinions, which increases the likelihood of interactions between them. Since those interactions most likely lead to more cooperative opinions due to the influence of the external field, the convergence rates are higher than those in the static network. Interestingly, the convergence rates of local(opposite) rewiring and bridge(opposite) rewiring are virtually

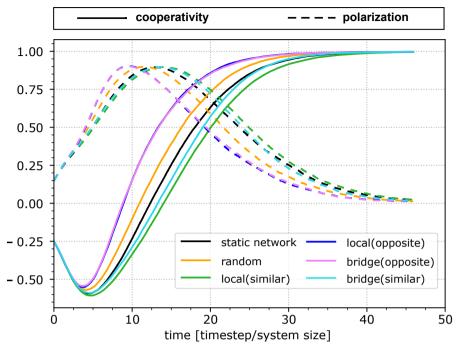


Fig. 3 Comparing network evolutions for all rewiring algorithms. Rewiring leads to accelerated convergence rates unless homophily is enforced when establishing links (i.e. (similar) rewiring). Bridge(opposite) and local(opposite) rewiring achieve the highest convergence rates. Local(similar) leads to the lowest convergence rate.

the same, suggesting that the topological constraint determining the pool of potential new neighbours does not significantly affect the convergence rate.

Panels C and D isolate the effects of homo- or heterophily when establishing links and we clearly see that these are significantly larger than the changes in convergence rate caused by limitations on the pool of potential neighbours. Moreover, it is not surprising that the assumption of homophily (i.e. local(similar) and bridge(similar)) leads to a lower convergence rate than the assumption of heterophily (i.e. local(opposite) and bridge(opposite)). Notably, while the initial dip in cooperation levels can be reduced by establishing links only between agents of opposite opinions, a corresponding reduction in the maximum polarization is not seen. However, the significantly narrower peaks in polarization indicated that the increased numbers of interactions between cooperators and defectors in the 'opposite' algorithms significantly shortens the polarization stage relative to those when no, or 'similar', rewiring are applied.

2.6 Comparing all effects

Figure 3 compares the effects of all rewiring algorithms and their variations (see Methods). We see that enabling a variable network structure accelerates convergence rates when random rewiring is applied and when heterophily is

enforced while establishing links. This is true for both topological constraints, which generally do not significantly impact the convergence rate. Thus, to promote depolarization it is important to foster meaningful interactions between cooperators and defectors. However, it is unimportant whether the actors are located in different regions of the network or along cluster boundaries. The algorithms assuming homophily for link establishment result in lower convergence rates than those observed on the static network structure. The convergence rate of the bridge(similar) algorithm approaches the rate observed without rewiring.

2.7 External field




Fig. 4 Effect of the external field on the convergence rate with random rewiring. A stronger external field accelerates the convergence rate when random rewiring is applied. The same holds true for local and bridge rewiring. The strength of the effect diminishes with increasing field strength.

(see Methods). While Andersson et al. [24] found that effects of varying intervals for stochastic external factors are only marginal, they also found a more interesting dependence on stubbornness and susceptibility. Since the implementations of stubbornness and susceptibility in the agent interaction are similar (see Methods), [24] found that the parameter dependence is qualitatively comparable. We therefore limit the sensitivity analysis to stubbornness. Figure 5A shows that the convergence rate peaks when stubbornness is assumed to be around 0.55; varying from this value in either direction leads to lower convergence rates. The heat map in figure 5B shows that for stubbornness levels outside of the interval [0.3,0.8] it becomes increasingly unlikely that a final state of full cooperation is reached. If the level of stubbornness is very low, individuals' opinions are volatile and the system becomes unpredictable. Coupled with stochasticity in model inputs, this leads to a high variance in the distribution of final states. The more stubborn agents are, the less likely they

As shown in figure 4, the strength of the external field is a deciding factor in convergence rate as well as the final state. As on the static network [24], a stronger influence from the external field accelerates the convergence rate for all rewiring algorithms. However, the response of the convergence rate diminishes as the field strength increases.

2.8 Stubbornness

The response of the agent affected in each interaction is determined by the external field, stochastic external factors as well as the level of stubbornness and susceptibility, which are drawn from a normal distribution for every agent and link

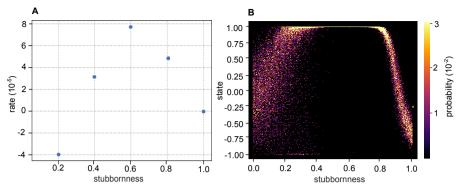


Fig. 5 Effects of stubbornness on convergence rate and final state with random rewiring. A illustrates the convergence rates corresponding to different levels of stubbornness. There is a peak in convergence rate when the level of stubbornness is assumed to be 0.55. The convergence is slower the further stubbornness departs from this. The heatmap in **B** depicts the final states corresponding to the different levels of stubbornness. Final states are volatile for levels of stubbornness below 0.3. For intermediate levels of stubbornness, the system reaches a final state with full cooperation when a positive external field is assumed. For high levels of stubbornness, it becomes increasingly unlikely that the initial majority of defectors can be persuaded, and the final state is more defective. The parameter dependence does not change significantly when local or bridge rewiring are applied. To show the small probability of values the saturation point of the color map is set at 3 percent of probability.

are to change their opinion. Since the model starts with a majority of defectors, the likelihood of defective end states is high when high stubbornness is assumed. Only at intermediate levels of stubbornness will agents go with the dominant flow. If this tends towards cooperation, as when a positive external field is applied, a cooperative end state is reached.

3 Discussion

Our results show that variable network structure leads to faster depolarization when links are established to agents holding different opinions. If instead agents are homophilic when rewiring, depolarization is slower than in a static network. This is true whether the potential neighbours are limited to friends of friends or outside an agent's local cluster. Convergence to full cooperation is further accelerated by a strongly pro-conservation sociopolitical environment but this does not qualitatively affect our findings with respect to the topological constraints and opinion preferences. Therefore, we find that reducing negative sentiment between agents of opposite opinions, such that they are able to form persistent links, can be a powerful lever for accelerating largescale collective action.

This is consistent with previous findings by Axelrod et al. [16] and Nguyen [21], that interactions between polarized clusters can act to maintain polarization when opposite opinions are actively discredited through manipulations of trust. To dissolve such echo chambers, trust relationships to agents and information sources outside echo chambers need to be carefully rebuilt [21], to increase tolerance of alternative views [16]. Centola [29], on the other hand, found that such heterophily can prevent a society from achieving a social tipping point and thus collective action. However, whereas Centola [29] assumed that agents can perceive the linear response of a collective good to their and others' behaviour, in our model it is assumed that such perception is impossible due to the common-pool resource's large size. As a result, interactions between agents play a vital role in spreading opinion changes beyond cluster boundaries, and this happens faster when agents link preferentially to those of opposite opinion.

It is natural to ask how our findings can inform measures to foster depolarization in the real world. We propose that the current role of social media in causing and maintaining polarization could potentially be limited and even reversed if algorithms that determine displayed content and recommend social links were modified to promote and maintain links between groups holding opposite opinions (i.e out-groups) [25]. Perhaps the key challenge in this process would be to reduce negative emotions and instead foster lasting empathy between the polarized groups. In an analysis of Twitter data, Williams et al. [20] found a negative correlation between the frequency of interaction between agents with opposite opinions and the negative sentiment expressed towards them. This suggested that either users with negative feelings towards those of opposite opinions are less likely to interact with them repeatedly, or that users who frequently interact with differently thinking users become less negative toward them over time (or both). If the latter inference holds, more interaction between opinion clusters could help to reduce negative sentiments and build empathy between polarized groups. To do this effectively, however, algorithms may need to be redesigned, away from simply maximising user engagement to also identifying and promoting common ground between individuals who disagree on some dimensions but may still agree on others [12, 14, 20]. According to Nguyen [21], for offline communities, restoring trust in political and scientific institutions is central to fostering lasting connections between actors who hold opposing views. This is because doing so could help to weaken the influence of structures such as echo chambers that could manipulate information from the outside [21].

Our results give qualitative insight into the effects of different rewiring strategies on the rates of convergence and depolarization in a social network. However, we caution that the simplicity of our model algorithms limits the translation of our findings to the real world. Crucially, we assumed that newly established connections are stable whether or not they connect agents holding similar or opposite opinions. This is a strong assumption, contrary to the evidence that disagreeing individuals tend to avoid contact [26]. This assumption could be relaxed in a future extension of our work by adding link decay rates that depend on the agents' states.

Our analysis reveals that both opinion preference and stubbornness can strongly affect social dynamics in the presence of rewiring. However, both are

treated quite simply. Opinion preference is a binary parameter (homo- or heterophily). Although stubbornness is chosen from a continuous spectrum, both it and opinion preference are assumed to be uniform across all agents. Generalising opinion preference to a wider range of discrete values or continuous spectrum, and/or assuming heterogeneity in agents' opinion preferences and stubbornness values, would be other interesting model extensions. A particularly interesting question is whether consensus time might depend nonlinearly on the distribution of opinion preferences such that only partial heterophily could accelerate consensus similarly to pure heterophily as seen in our model. This might make our findings easier to apply in real social networks. Moreover, varying the stubbornness between agents would imply coexistence of easily persuaded and intransigent agents. Based on the findings of Andersson et al. [24] we might expect the former to cluster around the latter, who are effectively 'influencers' with a range of opinions, thus reinforcing polarization. An interesting question is therefore whether and how strongly the depolarization dynamics depends on the stubbornness distribution. Beyond simply expanding the parameter space, a next step could be to convert parameters to coupled dynamical variables and analyze feedback between agents' opinion states, opinion preferences and stubbornness. Nguyen suggests that the closer an opinion is to an extreme end of the spectrum and the longer it has been since the opinion changed, the greater the opinion holder's stubbornness [21]. This could be captured by making stubbornness dependent on agents' current opinion state as well as its trajectory over time. A higher level of stubbornness might also entail a higher threshold that discourages actors from engaging with opposite opinions (homophily). Opinion preference, in turn, affects stubbornness as it shapes agents' future contact networks, and thus the possible future encounters that might alter agents' opinions and break through their stubborn adherence to their own opinion, creating a reinforcing feedback loop. Finally, including feedback from agents' opinion states to the sociopolitical environment could effectively introduce institution formation into the model. In modeling such a feedback loop, the sociopolitical environment could be made to depend on the average opinion level of the network.

Another way to more realistically portray agents' social environment would be to extend the current model of simple contagion, which involves an opinion update after one interaction, to one that represents complex contagion in which opinions are updated only after repeated interactions [30, 31]. Furthermore, expanding the current single variable agent opinion state into a multidimensional vector would allow us to represent multiple character and cultural traits [32, 33]. Such a representation could be used to analyse how social media algorithms could be designed to focus on peoples commonalities rather than highlighting their differences, which could be a crucial step towards building and maintaining empathy in online social networks [14, 26].

4 Methods

4.1 ABM model and setup

To gain qualitative insights into what qualities in link rewiring algorithms accelerate the dissolution of polarized clusters, we extend an ABM on a clustered scale-free network by Andersson et al. [24]. In contrast to the previous work, we include a variable network topology, which is realised through link rewiring. The ABM is similar to those used in statistical physics to model opinion dynamics without bounded confidence in the interaction step [24, 34]. We analyse polarization surrounding a collective action problem around a large-scale CPR that shows no obvious feedback to individual actions. Hence, the resource is not modelled explicitly, but implicitly by analysing the spread of cooperation with a pro-conservation behavioural norm [24, 35]. As a means of implementation we rely on the networks 2.3 package for Python 3.7.2. We use the Holme-Kim clustered scale-free network growth algorithm [36] with an average degree of $\langle k \rangle = 8$ to establish a network of 1089 agents. Agents that are connected by a link are referred to as neighbours or friends interchangeably. An agent's level of cooperation is represented by a continuous real valued variable $a \in [-1, 1]$, and is also referred to as the opinion of an agent. An opinion of -1 signifies total defection, 1 signifies total cooperation. We refer to the agents as defectors and cooperators accordingly. We differentiate between topological clusters, detected by the Louvain algorithm [37], and opinion clusters, which are made up of nodes sharing the same opinion. For each scenario, 80 independent iterations are run. Results are obtained by computing average trajectories over these iterations. Since we are concerned with building collective action from a state of inaction, our simulations begin with network states in which most agents defect.

The simulation iteratively follows eight steps:

- (1) Randomly select an agent i
- (2) Randomly select a neighbour j of i
- (3) Perform interaction between agent i and j as described in 4.2
- (4) Update *i*'s opinion state
- (5) Select a non-neighbour k of i following one of the rewiring algorithms
- (6) poss. establish a new link between i and k as described below
- (7) Randomly select a neighbour l of i
- (8) poss. break a link between i and l as described below

This process is iterated until the network converges to a steady state. While the probability of being chosen as agent i is independent of an agent's degree, the likelihood of being selected as a neighbor j for interaction increases with rising degree. Updating i's behaviour, rather than j's, ensures that agents with more connections are more influential as their opinion state changes more slowly over time.

4.2 Agent interaction

The change in the opinion a of an agent i when interacting with a neighbouring agent j is given by

$$\Delta a_i = |a_i - a_j| [w^-(1 - a_i) - w^+(1 + a_i)] \tag{1}$$

Where w^+ and w^- are the weights for an agent becoming more or less cooperative respectively. To simplify we set $w^+ = f(x_{ij}, r, \xi)$ and $w^- = 1 - w^+$ and obtain

$$\Delta a_i = |a_i - a_j| [2f(x_{ij}, r, \xi) - 1 - a_i]$$
⁽²⁾

where,

$$f(x_{ij}, r, \xi) = \begin{cases} 0 & \text{if } x_{ij} + \xi < -r \\ \frac{1}{2r}(x_{ij} + r - \xi) & \text{if } x_{ij} + \xi \in [-r, r] \\ 1 & \text{if } x_{ij} + \xi > r \end{cases}$$
(3)

and,

$$x_{ij} = w_i a_i + w_{ij} a_j + \phi \tag{4}$$

The function $f(x_{ij}, r, \xi)$ captures the response of the affected agent. The parameters w_i and w_{ij} represent the self-weight and the weight between agents *i* and *j*. This captures the local mechanisms of stubbornness as well as the susceptibility, which determines the effect of an agent on another. ξ is a random noise term that is distributed over the interval $\pm r$ and represents stochastic external factors that may affect the interaction, such as the mood the agent was in. ϕ captures global effects that influence all agents at all times and can be referred to as the external field. This simulates channels shared by all actors such as relevant political policies, media reporting or the moral hegemony of society[35].

The parameters are chosen according to Andersson et al. [24] and are summarized in table 1.

The external field is taken to be $\phi = 0.05$. It is chosen to be positive in order to reflect a society that incentivizes cooperative behaviour. The agentto-agent weights w_{ij} are drawn from a normal distribution with mean $\mu = 0.5$ and standard deviation $\sigma = 0.15$. We choose the self-weight to be $w_i = 0.6$ as it is assumed that people are more likely to keep their own opinion than change it, but are quite prone to opinion change, nevertheless [38]. The random noise term ξ is uncorrelated with the interaction and hence assumed to be uniformly rather than normally distributed. The width of the noise is set to r = 0.1. For a more detailed discussion of parameters we refer to [24].

Parameter/Variable	Represents	Value
External field (ϕ)	Global factors: Policy regulation, mass media, morals, etc	0.05
Self weight (w_i)	Resistance to influence: Stubbornness, ideological commit- ment, etc	0.6
Agent-agent weight (w_{ij})	Susceptibility: Friendship, animosity, charisma, etc	0.5
Agent-agent weight STD	Susceptibility variance	0.15
Initial cooperation ratio	Initial average cooperativity	-0.25
Initial cooperation SD	Variance in initial cooperativity	0.15
Randomness (r)	Noise intensity in agent interac- tions	0.1
Average degree	Degree of nodes added during net- work growth	8
Clustering	Relative level of clustering in net- works	0.5

Table 1 Summary of model parameters and variables to provide an overview.

4.3 Link rewiring

By adding a link rewiring step after interaction, we allow for a variable network structure where the neighbours of agent i can change over time. This potentially increases the variety of opinions an agent can be exposed to and may help to dissolve polarized clusters faster [22–24]. We formulate three rewiring algorithms to determine which properties of rewiring algorithms accelerate the dissolution of polarized clusters. The algorithms represent limiting cases on extreme ends of probability spectra and are not accurate representations of real-life interaction. They are meant to give first qualitative insights into how different ways of restructuring one's immediate social surroundings can affect the dissolution of polarization. Since the rewiring algorithms make two additional assumptions compared to the static network approach, we introduce algorithm variants, each differing by only one assumption, to isolate the effects of each algorithm assumption.

4.3.1 Random rewiring

Random rewiring is taken as a baselLine scenario in order to evaluate the role of unguided network change. Agent i establishes a link to a random non-neighbour k with a probability p. With a probability q a random agent l from the pool of neighbours of agent i is chosen and the link connecting the two is cut. q does not change with the number of neighbours. The finding that

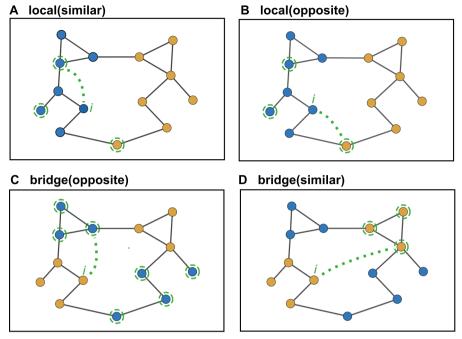


Fig. 6 Link establishing for different rewiring algorithms. The color of a node depicts its level of cooperation. Orange nodes are cooperators and blue nodes defectors. We focus on individual i and mark the agents available for establishing a link to with dashed circles. In **A**, **B** local rewiring, i can choose among agents within 2 network steps (i.e friends of friends). The dashed lines show examples of nodes to whom a link is actually established. In **A** local(similar) rewiring i only establishes a link if the agents are of the same general opinion. In **B** local(opposite) a link is established only if i and the chosen friend-of-friend are of opposite opinions. In **C**, **D** bridge rewiring i can establish links to agents outside its own topological cluster. In **C** bridge(opposite) a link is established only if the agents opinions differ. In **D** bridge(similar) i only establishes a link if it agrees with the chosen agent.

cognitive capacity and available time limit the number of friends an individual is able to hold [26] is included only indirectly, as an agent with high degree has a higher likelihood of being chosen as the neighbour with whom a link is cut. To maintain a stable average degree we assume p = q.

4.3.2 Local rewiring

The local rewiring algorithm includes two tendencies found in empirical studies to simulate a more realistic, yet highly simplified way of establishing friend-ships. Firstly, an individual's social surroundings influence the pool of people they are likely to meet, making them more likely to engage with people who are topologically close [25, 26, 39]. Secondly, individuals' engagements are subject to homophily, meaning they will most likely show preferential attachment to individuals with whom they have a lot in common [20, 26, 40].

For implementation we use an approach similar to Crawford et al. [41]. Figure 6A illustrates our assumptions. The color of a node depicts its opinion. We

focus on agent *i* and limit the pool of available agents *k* for rewiring to those non-neighbours that are within *d* network steps. These are marked with dashed circles. We set d = 2 (i.e. agent *i* can only choose among friends of friends). This is a practical choice as d = 3 ($\langle k \rangle^3 = 512$) would allow agent *i* to establish links with almost half of our chosen network. We introduce homophily by assuming that an agent *i* only establishes a link to selected agent *k* if they are of the same general opinion, where the general opinion is either above or below 0. I.e. a link is established if and only if $a_i \wedge a_k < 0$ or $a_i \wedge a_k \ge 0$. We include preferential attachment to maintain the network's small world characteristics. For breaking a link, a random neighbour *l* of agent *i* is selected. To maintain a constant average degree, a link is broken if and only if a link is established.

4.3.3 Bridge rewiring

In the bridge rewiring algorithm we incorporate recommendations for dissolving polarization. These mainly focus on the role of inter-community interactions and highlight their importance as information channels to increase individuals' exposure to differing views [14, 20, 22-24]. We implement bridge rewiring as a targeted mechanism that deliberately aims to increase connectivity between disparate communities. As figure 6C illustrates, we limit the potential new neighbours of agent i to the non-neighbours outside of i's own cluster. Clusters are identified by the Louvain algorithm [37]. Nevertheless it is likely that multiple communities of defectors separated by ones of cooperators exist within a network. To ensure that the newly established link is connecting agents of opposite opinion we assume that agents are subject to extreme heterophily. Agent i establishes a link to agent k if and only if their general opinion is opposite, i.e. if $a_i \ge 0 \land a_k < 0$ or $a_i < 0 \land a_k \ge 0$. We use the term, out-group to refer to non-neighbors outside agent i's cluster who hold an opposite opinion. As with the local rewiring algorithm, preferential attachment is included. In order to keep the average degree stable, agent *i* breaks a link with a random neighbour l if and only if a new link was established.

4.3.4 Rewiring variations

Compared to random rewiring the effects of two additional assumptions are tested in the local and bridge rewiring algorithm. The topological constraint places a limitation on the pool of potential neighbours. The opinion preference determines whether agents are constrained by homo- or heterophily in their decision whether or not to establish a link. In order to isolate the effects of each assumption, additional variations that differ by only one assumption are tested. We keep the terms local and bridge rewiring to refer to the topological constraint. A notation of (similar) and (opposite) is added to indicate whether links are established only if agents are of the same opinion (i.e homophily) or only if they are of a different opinion (i.e heterophily). Local(similar) therefore refers to the originally formulated local rewiring algorithm, in which agent i chooses a random agent k within two network steps and establishes a link if

they are of the same general opinion (see figure 6A). Local(opposite) describes a variation of the algorithm in which agent i establishes a link to agent k, who is selected within two network steps, if and only if they disagree in their general opinions (see figure 6B). Bridge(similar) (see figure 6D) and bridge(opposite) (see figure 6C) both limit the potential neighbours of agent i to non-neighbours outside of i's own cluster. However, a link is established only if the agents agree in the former, and only if they disagree in the latter.

4.4 Code availability

The Python3 scripts used for the simulations and evaluation are provided online at https://github.com/lifrei/It-s_how_we_talk_that_matters.git.

Acknowledgments. We thank D. Andersson, who provided us with the initial code and significantly helped during the first phase of the project.

References

- Kollock, P.: Social dilemmas: The anatomy of cooperation. Annual Review of Sociology 24(1), 183–214 (1998). https://doi.org/10.1146/annurev.soc. 24.1.183
- [2] Jager, W., Janssen, M.: Using artificial agents to understand laboratory experiments of common-pool resources with real agents. Complexity and Ecosystem Management, 75–102 (2002)
- [3] Janssen, M.: Evolution of cooperation in a one-shot prisoner's dilemma based on recognition of trustworthy and untrustworthy agents. Journal of Economic Behavior & Organization 65, 458–471 (2008). https://doi.org/ 10.1016/j.jebo.2006.02.004
- [4] Ostrom, E.: Beyond markets and states: Polycentric governance of complex economic systems. American Economic Review 100(3), 641–672 (2010). https://doi.org/10.1257/aer.100.3.641
- [5] Williges, K., Meyer, L.H., Steininger, K.W., Kirchengast, G.: Fairness critically conditions the carbon budget allocation across countries. Global Environmental Change 74, 102481 (2022). https://doi.org/10.1016/j. gloenvcha.2022.102481
- [6] Scheffer, M., Carpenter, S., Lenton, T., Bascompte, J., Brock, W., Dakos, V., van de Koppel, J., van de Leemput, I., Levin, S., Nes, E., Pascual, M., Vandermeer, J.: Anticipating critical transitions. Science (New York, N.Y.) 338, 344–348 (2012). https://doi.org/10.1126/science.1225244

- Brownstein, M., Kelly, D., Madva, A.: Individualism, structuralism, and climate change. Environmental Communication 16, 269–288 (2022). https://doi.org/10.1080/17524032.2021.1982745
- [8] Griskevicius, V., Cantú, S.M., van Vugt, M.: The Evolutionary Bases for Sustainable Behavior: Implications for Marketing, Policy, and Social Entrepreneurship. Journal of Public Policy & Marketing 31(1), 115–128 (2012). https://doi.org/10.1509/jppm.11.040
- [9] IPCC: In: Pörtner, H.O., Roberts, D.C., Tignor, M., Poloczanska, E.S., Mintenbeck, K., Alegría, A., Craig, M., Langsdorf, S., Löschke, S., Möller, V., Okem, A., Rama, B. (eds.) Summary for Policymakers. Cambridge University Press, Cambridge, UK (2022). In Press
- [10] Ringsmuth, A.K., Otto, I.M., van den Hurk, B., Lahn, G., Reyer, C.P.O., Carter, T.R., Magnuszewski, P., Monasterolo, I., Aerts, J.C.J.H., Benzie, M., Campiglio, E., Fronzek, S., Gaupp, F., Jarzabek, L., Klein, R.J.T., Knaepen, H., Mechler, R., Mysiak, J., Sillmann, J., Stuparu, D., West, C.: Lessons from covid-19 for managing transboundary climate risks and building resilience. Climate Risk Management **35**, 100395 (2022). https: //doi.org/10.1016/j.crm.2022.100395
- [11] Vasconcelos, V., Constantino, S., Dannenberg, A., Lumkowsky, M., Weber, E., Levin, S.: Segregation and clustering of preferences erode socially beneficial coordination. Proceedings of the National Academy of Sciences **118**, 2102153118 (2021). https://doi.org/10.1073/pnas. 2102153118
- [12] Pawloff, A., Formayer, H., Schlatzer, M.: Contrarians' Their Role in the Debate on Climate Change (Global Warming) and Their Influence on the Austrian Policy Making Process. https://www.klimafonds.gv.at
- [13] Carothers, T., O'Donohue, A.: Democracies Divided: The Global Challenge of Political Polarization. Brookings Institution Press, Washington D.C. (2019)
- [14] Gladston, I., Wing, T.: Social media and public polarization over climate change in the united states, 10 (2019)
- [15] McCarty, N.: Polarization: What Everyone Needs to Know. Oxford University Press, Oxford, UK (2019). https://doi.org/10.1093/wentk/ 9780190867782.001.0001
- [16] Axelrod, R., Daymude, J., Forrest, S.: Preventing extreme polarization of political attitudes. Proceedings of the National Academy of Sciences 118, 2102139118 (2021). https://doi.org/10.1073/pnas.2102139118

- [17] Stavrakakis, Y.: Paradoxes of polarization: Democracy's inherent division and the (anti-) populist challenge. American Behavioral Scientist 62(1), 43–58 (2018). https://doi.org/10.1177/0002764218756924
- [18] Gowdy, J.: Behavioral economics and climate change policy. Journal of Economic Behavior & Organization 68, 632–644 (2008). https://doi.org/ 10.1016/j.jebo.2008.06.011
- [19] Tavoni, A., Schlüter, M., Levin, S.: The survival of the conformist: Social pressure and renewable resource management. Journal of Theoretical Biology 299, 152–161 (2012). https://doi.org/10.1016/j.jtbi.2011.07.003
- [20] Williams, H.T.P., McMurray, J.R., Kurz, T., Hugo Lambert, F.: Network analysis reveals open forums and echo chambers in social media discussions of climate change. Global Environmental Change 32, 126–138 (2015). https://doi.org/10.1016/j.gloenvcha.2015.03.006
- [21] Nguyen, C.T.: Echo chambers and epistemic bubbles. Episteme 17(2), 141–161 (2020). https://doi.org/10.1017/epi.2018.32
- [22] Lee, E., Karimi, F., Wagner, C., Jo, H.-H., Strohmaier, M., Galesic, M.: Homophily and minority-group size explain perception biases in social networks. Nature Human Behaviour 3(10), 1078–1087 (2019). https:// doi.org/10.1038/s41562-019-0677-4
- [23] Fotouhi, B., Momeni, N., Allen, B., Nowak, M.: Conjoining Uncooperative Societies Facilitates Evolution of Cooperation. Nature Human Behaviour 2, 492–499 (2018). https://doi.org/10.1038/s41562-018-0368-6
- [24] Andersson, D., Bratsberg, S., Ringsmuth, A.K., de Wijn, A.S.: Dynamics of collective action to conserve a large common-pool resource. Scientific Reports 11(1), 9208 (2021) 2012.00892. https://doi.org/10.1038/ s41598-021-87109-x
- [25] Santos, F., Lelkes, Y., Levin, S.: Link recommendation algorithms and dynamics of polarization in online social networks. Proceedings of the National Academy of Sciences 118, 2102141118 (2021). https://doi.org/ 10.1073/pnas.2102141118
- [26] Dunbar, R.I.M.: The anatomy of friendship. Trends in Cognitive Sciences 22(1), 32–51 (2018). https://doi.org/10.1016/j.tics.2017.10.004
- [27] Otto, I., Donges, J., Cremades, R., Bhowmik, A., Hewitt, R., Lucht, W., Rockström, J., Allerberger, F., McCaffrey, M., Doe, S., Lenferna, A., Morán, N., Vuuren, D., Schellnhuber, H.: Social tipping dynamics for stabilizing earth's climate by 2050. Proceedings of the National Academy of Sciences **117**, 201900577 (2020). https://doi.org/10.1073/

pnas.1900577117

- [28] Gardiner, S.M.: A Perfect Moral Storm: The Ethical Tragedy of Climate Change. Environmental Ethics and Science Policy Series. Oxford University Press, Oxford, UK (2011). https://doi.org/10.1093/acprof:oso/ 9780195379440.001.0001
- [29] Centola, D.M.: Homophily, networks, and critical mass: Solving the startup problem in large group collective action. Rationality and Society (2013). https://doi.org/10.1177/1043463112473734
- [30] Centola, D.: The spread of behavior in an online social network experiment. Science (New York, N.Y.) 329, 1194–7 (2010). https://doi.org/10. 1126/science.1185231
- [31] Guilbeault, D., Centola, D.: Topological measures for identifying and predicting the spread of complex contagions. Nature Communications 12(1), 4430 (2021). https://doi.org/10.1038/s41467-021-24704-6
- [32] Pham, T.M., Alexander, A.C., Korbel, J., Hanel, R., Thurner, S.: Balance and fragmentation in societies with homophily and social balance. Scientific Reports 11, 17188 (2021). https://doi.org/10.1038/ s41598-021-96065-5
- [33] Axelrod, R.: The dissemination of culture: A model with local convergence and global polarization. The Journal of Conflict Resolution 41, 203–226 (1997)
- [34] Castellano, C., Fortunato, S., Loreto, V.: Statistical physics of social dynamics. Reviews of Modern Physics 81 (2007). https://doi.org/10. 1103/RevModPhys.81.591
- [35] Andersson, D.: Simple models for complex nonequilibrium problems in nanoscale friction and network dynamics. PhD thesis, Stockholm University (2020)
- [36] Holme, P., Kim, B.J.: Growing scale-free networks with tunable clustering. Physical Review E 65(2), 026107 (2002). https://doi.org/10.1103/ PhysRevE.65.026107
- [37] Blondel, V., Guillaume, J.-L., Lambiotte, R., Lefebvre, E.: Fast unfolding of communities in large networks. Journal of Statistical Mechanics Theory and Experiment 2008 (2008). https://doi.org/10.1088/1742-5468/2008/ 10/P10008
- [38] Mallinson, D., Hatemi, P.: Correction: The effects of information and social conformity on opinion change. PLOS ONE 15, 0230728 (2020).

https://doi.org/10.1371/journal.pone.0230728

- [39] Nasiri, E., Berahmand, K., Li, Y.: A new link prediction in multiplex networks using topologically biased random walks. Chaos, Solitons & Fractals 151, 111230 (2021). https://doi.org/10.1016/j.chaos.2021.1112
- [40] Kozma, B., Barrat, A.: Consensus formation on adaptive networks. Physical review. E, Statistical, nonlinear, and soft matter physics 77, 016102 (2008). https://doi.org/10.1103/PhysRevE.77.016102
- [41] Crawford, C., Nanda Kumar, R., Sen, S.: Resisting exploitation through rewiring in social networks: Social welfare increase using parity, sympathy and reciprocity. In: Proceedings of the 17th International Conference on Autonomous Agents and MultiAgent Systems. AAMAS '18, pp. 1915– 1917. International Foundation for Autonomous Agents and Multiagent Systems, Richland, SC (2018)