

# Undesignable RNA Structure Identification via Rival Structure Generation and Structure Decomposition

Tianshuo Zhou<sup>1</sup>, Wei Yu Tang<sup>1</sup>, David H. Mathews<sup>2,3,4</sup>, and Liang Huang<sup>1</sup>

<sup>1</sup> Oregon State University, Corvallis OR 97330, USA

<sup>2</sup> Department of Biochemistry and Biophysics, University of Rochester Medical Center, Rochester, NY 14642, USA

<sup>3</sup> Center for RNA Biology, University of Rochester Medical Center, Rochester, NY 14642, USA

<sup>4</sup> Department of Biostatistics & Computational Biology, University of Rochester Medical Center, Rochester, NY 14642, USA

**Abstract.** RNA design is the search for a sequence or set of sequences that will fold into predefined structures, also known as the inverse problem of RNA folding. While numerous RNA design methods have been invented to find sequences capable of folding into a target structure, little attention has been given to the identification of undesignable structures according to the minimum free energy (MFE) criterion under the Turner model. In this paper, we address this gap by first introducing mathematical theorems outlining sufficient conditions for recognizing undesignable structures, then proposing efficient algorithms, guided by these theorems, to verify the undesignability of RNA structures. Through the application of these theorems and algorithms to the Eterna100 puzzles, we demonstrate the ability to efficiently establish that 15 of the puzzles indeed fall within the category of undesignable structures. In addition, we provide specific insights from the study of undesignability, in the hope that it will enable more understanding of RNA folding and RNA design.

**Availability:** Our source code is available at <https://github.com/shanry/RNA-Undesign>.

**Appendix:** Supplementary Material is available in a separate file.

**Keywords:** RNA Design · Inverse Folding · Undesignability · Designability.

## 1 Introduction

Ribonucleic Acid (RNA) plays essential roles in the core activities within living cells such as transcription and translation [5], catalyzing reactions [6], and controlling gene expression [17]. Given a target structure, RNA design aims to find sequences that can fold into that structure. This problem, however, has been proved NP-hard [4] when the simple base-pair based energy model is adopted. The importance of RNA structure and the hardness of RNA design problem have motivated various RNA design methods [9,12,3,22,18,7,16,15,23].

While extensive research has been dedicated to designing RNA based on a target structure, there is a notable scarcity of literature investigating the undesignability of RNA design using realistic energy models. Undesignability refers to the inability to find an RNA sequence that can fold into a desired structure using a realistic energy model. Initially, specific cases of undesignability was discovered by the work [1] attempting to extend RNA-SSD, which identified two undesignable motifs and proposed alternative motifs that would consistently be favored by the conventional Turner energy models. Later work [8] has presented additional motifs that prevent designability, as observed using the maximum base pair model, which is not necessarily realistic. To the best of our knowledge, the examination of undesignable structures or motifs based on the nearest neighbor model [19,14,13] has not been thoroughly explored thus far.

To bridge the gap between RNA design and undesignability, we propose a systematic and scientifically grounded approach known as ‘‘Rival Structure Generation and Structure Decomposition’’ (RIGENDE). Our methodology operates on the principle of ‘‘proof by construction,’’ whereby undesignability is confirmed by the identification of rival structures that consistently outperform the target structure for any possible RNA sequence. RIGENDE can not only serve as a sanity check for empirical RNA design methods, allowing for the avoidance of executing heuristic-based algorithms in situations where no feasible solution exists, but also provide deeper insights into the energy models themselves. This, in turn, contributes to a more profound understanding of thermodynamic models used for the prediction of RNA secondary structures. The main contributions of this paper are:

1. Theorems. We establish the theoretical grounds for Undesignable RNA Structure Identification, characterizing the importance of rival structure(s) and structure decomposition.
2. Algorithms. Driven by the proposed theorems, we designed and implemented highly efficient algorithms to verify undesignability automatically.
3. Application. When applying to the puzzles from Eterna100 [2] benchmark, RIGENDE is able to prove 15 of them are undesignable. Remarkably, the verification process for each puzzle was completed within a matter of seconds or minutes.

## 2 RNA Design

### 2.1 Secondary Structure, Loop and Free Energy

An RNA sequence  $x$  of length  $n$  is specified as a string of base nucleotides  $x_1x_2 \dots x_n$ , where  $x_i \in \{A, C, G, U\}$  for  $i = 1, 2, \dots, n$ . A secondary structure  $\mathcal{P}$  for  $x$  is a set of paired indices where each pair  $(i, j) \in \mathcal{P}$  indicates two distinct bases  $x_ix_j \in \{CG, GC, AU, UA, GU, UG\}$  and each index from 1 to  $n$  can only be paired once. A secondary structure is pseudoknot-free if there don’t exist two pairs  $(i, j) \in \mathcal{P}, (k, l) \in \mathcal{P}$  such that  $i < k < j < l$ . In short, a pseudoknot-free secondary structure is a properly nested set of pairings in an RNA sequence. Alternatively,  $\mathcal{P}$  can be represented as a string  $y = y_1y_2 \dots y_n$ , where a pair of indices  $(i, j) \in \mathcal{P}$  corresponds to  $y_i = ‘‘(‘‘, y_j = ‘‘)’’’$  and any unpaired index  $k$  corresponds to  $y_k = ‘‘.’’’$ . The unpaired indices in  $y$  is denoted as unpaired( $y$ ) and the set of paired indices in  $y$  is denoted as pairs( $y$ ), which is equal to  $\mathcal{P}$ . In nature, some RNA structures contain crossing pairings called pseudoknots. Since the computational model we use does not allow these, we do not consider them. Henceforth we elide pseudoknot-free secondary structure to just secondary structure or structure for brevity.

The *ensemble* of an RNA sequence  $x$  is the set of all secondary structures that  $x$  can possibly fold into, denoted as  $\mathcal{Y}(x)$ . The *free energy*  $\Delta G(x, y)$  is used to characterize the stability of  $y \in \mathcal{Y}(x)$ . The lower the free energy  $\Delta G(x, y)$ , the more stable the secondary structure  $y$  for  $x$ . In the nearest neighbor energy model, a secondary structure is decomposed into a collection of loops, where each loop is a region enclosed by some base pair(s). Depending on the number of pairs on the boundary, main types of loops include hairpin loop,

internal loop and multiloop, which are bounded by one, two and more than two base pairs respectively. Thus each loop can be identified by a set of pairs. Fig. 1 showcases an example of secondary structure ( $y$ ) with various types of loops, where the some of the loops are notated as

1. Hairpin:  $H\langle(12, 18)\rangle$ .
2. Bulge:  $B\langle(10, 23), (11, 19)\rangle$ .
3. Stack:  $S\langle(3, 50), (4, 49)\rangle$ .
4. Internal Loop:  $I\langle(29, 43), (32, 39)\rangle$ .
5. Multiloop:  $M\langle(5, 48), (9, 24), (28, 44)\rangle$ .

The function  $LP(y)$  is used to denote the set of loops of  $y$ , see [Supplementary Section 1](#) for a list of all the loops in  $LP(y)$ . The free energy of a secondary structure is the aggregation of the free energy of each loop,

$$\Delta G(x, y) = \sum_{z \in LP(y)} \Delta G(x, z), \quad (1)$$

where each term  $\Delta G(x, z)$  is the energy for one specific loop in  $LP(y)$ . In fact, the energy of one loop is typically determined by nucleotides on the positions of enclosing pairs and their neighbored mismatch positions, which are named as “critical positions” in this article. When evaluating the energy of a loop, it suffices to input only the nucleotides on the “critical positions” of the loop, i.e.,

$$\Delta G(x, y) = \sum_{z \in LP(y)} \Delta G(x \vdash CR(z), z), \quad (2)$$

where  $CR(z)$  denotes the critical positions of loop  $z$  and  $x \vdash CR(z)$  denotes the nucleotides from  $x$  that are “projected” onto  $CR(z)$  ([See Supplementary Section 2 for the detailed functionality of projection operator](#)). The projection ( $\vdash$ ) allows us to focus on the relevant nucleotides for energy evaluation. For instance,

$$CR(H\langle(12, 18)\rangle) = \{12, 13, 17, 18\}; \quad CR(I\langle(29, 43), (32, 39)\rangle) = \{29, 30, 31, 32, 39, 40, 42, 43\}.$$

For convenience of later discussion, we also interchangeably put paired positions in brackets, i.e.,

$$CR(H\langle(12, 18)\rangle) = \{(12, 18), 13, 17\}; \quad CR(I\langle(29, 43), (32, 39)\rangle) = \{(29, 43), (32, 39), 30, 31, 40, 42\}.$$

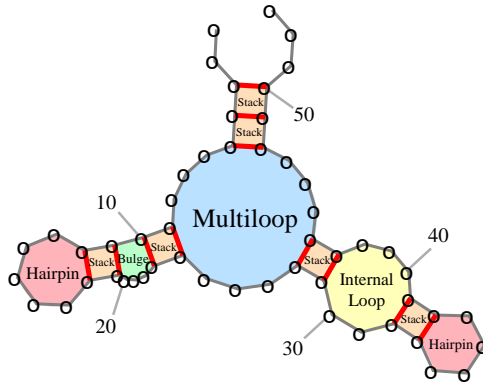


Fig. 1: An example of secondary structure and loops.

## 2.2 MFE and Structure Distance

The structure with the *minimum free energy* is the most stable structure in the ensemble, i.e., MFE structure,

$$\text{MFE}(x) \triangleq \underset{y \in \mathcal{Y}(x)}{\text{argmin}} \Delta G(x, y). \quad (3)$$

Notice that ties for the argmin are broken arbitrarily (technically,  $\text{MFE}(x)$  should be a set), thus there could be multiple MFE structures for  $x$ .

RNA design is actually the inverse problem of RNA folding. Given a target structure  $y^*$ , RNA design aims to find suitable RNA sequence  $x$  such that  $\text{MFE}(x) = y^*$ . Here we follow a more strict definition of MFE criterion adopted in some previous studies [4,8,21,20,23] on the designability of RNA, i.e.,  $x$  is a correct design if and only if  $y$  is the only MFE structure of  $x$ , which we call unique MFE (uMFE) criterion to differentiate it from the traditional MFE criterion. Formally,  $\text{uMFE}(x) = y^*$  if and only if

$$\forall y \in \mathcal{Y}(x) \text{ and } y \neq y^*, \Delta G(x, y^*) < \Delta G(x, y). \quad (4)$$

From the perspective of optimization, the satisfaction of MFE criterion requires that the structure distance between target structure  $y^*$  and MFE structure of  $x$  is minimized to 0. Therefore, many methods focus on optimizing  $d(y^*, \text{MFE}(x))$ . The function  $d(y', y'')$  represents the distance between two secondary structures  $y'$  and  $y''$ , which is defined as

$$d(y', y'') = |y'| - 2 \cdot |\text{pairs}(y') \cap \text{pairs}(y'')| - |\text{unpaired}(y') \cap \text{unpaired}(y'')|. \quad (5)$$

### 3 Undesignability

Based the uMFE criterion in Eq. 4, the straightforward meaning of undesignability is that such a condition can not be satisfied for any RNA sequence  $x$  given a target structure  $y^*$ . Alternatively, we give the formal definition of undesignability as follows.

**Definition 1.** *An RNA secondary structure  $y^*$  is undesignable by uMFE criterion if and only if*

$$\forall x, \exists y' \neq y^*, \Delta G(x, y') \leq \Delta G(x, y^*). \quad (6)$$

Similarly, we have the definition of undesignability under MFE criterion.

**Definition 2.** *An RNA secondary structure  $y^*$  is undesignable by MFE criterion if and only if*

$$\forall x, \exists y' \neq y^*, \Delta G(x, y') < \Delta G(x, y^*). \quad (7)$$

Following previous work [8] on undesignability (which adopts a naive maximum base pair model), the discussions in this paper are under the setting of the uMFE criterion and Definition 1. However, all statements can be directly applied to the Definition 2.

## 4 Theorems and Algorithms for Undesignability

### 4.1 Algorithm 0: Brute-Force Search

Given a target structure  $y^*$  of length  $n$ , the designed sequence  $x$  should have the same length. Therefore, the most straightforward method is to enumerate all RNA sequences of length  $n$ , and check whether there exist at least one RNA sequence that can fold into  $y^*$ . Considering the designed sequence should at least satisfy that nucleotides at the paired position of the target structure should be matchable, the number of brute-force enumeration is  $6^{|\text{pairs}(y^*)|} \times 4^{|\text{unpaired}(y^*)|}$ , as there are 6 choices for a pair and 4 types of nucleotides. Notice that  $2 \cdot |\text{pairs}(y^*)| + |\text{unpaired}(y^*)| = n$  and the RNA folding algorithms typically have a cubic time complexity with respect to sequence length  $n$ , the overall complexity  $\mathcal{O}(6^{|\text{pairs}(y^*)|} \times 4^{|\text{unpaired}(y^*)|} \cdot n^3)$  makes brute-force search impractical even for very short structures.

### 4.2 Theorem 1 and Algorithm 1: Identify One Rival Structure

One observation from RNA design is that when the designed RNA sequence  $x$  can not fold into the target structure  $y^*$ , sometimes  $x$  tends to fold into another structure  $y'$ . Another observation is that  $y'$  can be very close to  $y^*$ , i.e., their structure distance  $d(y^*, y')$ , can be very small. For example, when designing the puzzle

```

y*: ..... (..... (((.....))) ..... ) .....
y': ..... (..... (((.....))) ..... ) .....
x:  AUAAGCGUAAAAAAAAAGUGCGAAAAGCAUGAAAAAAAAACAGAAAAAAAAAAAAAAAAAAAA

```

Fig. 2: Example for Theorem 1 and Algorithm 1

“Simple Single Bond” (shown as  $y^*$  in Fig. 2) from the benchmark Eterna100, the designed sequence (shown as  $x$  in Fig. 2) tends to fold into another similar structure (shown as  $y'$  in Fig. 2).

In this instance, we know that at least for  $x$ ,  $y'$  is a more advantageous choice than  $y^*$ . We further hypothesize that  $y'$  is superior to  $y^*$  for any RNA sequence that can possibly fold into  $y^*$ . If the hypothesis holds, then we can assert that  $y^*$  is undesignable under uMFE criterion. This leads to the first theorem we proposed.

**Theorem 1.** *A structure  $y^*$  is undesignable, if*

$$\exists y' \neq y^*, \forall x, \Delta G(x, y') \leq \Delta G(x, y^*). \quad (8)$$

It is worth noting that the condition in Theorem 1 is a special case of the condition in Definition 1, despite both employing the same notations but in different order. The correctness of Theorem 1 can be proved by the Definition 1.

If Theorem 1 can be applied, the problem of undesignability boils down to showing that  $y'$  is superior to  $y^*$  for any RNA sequence, we can rewrite the condition 8 as

$$\exists y' \neq y^*, \forall x, \Delta \Delta G(y', y^*) \triangleq \Delta G(x, y') - \Delta G(x, y^*) \leq 0. \quad (9)$$

Combining Eq. 2, Eq. 9 can be written as the difference of two sets of energy units,

$$\exists y' \neq y^*, \forall x, \Delta \Delta G(y', y^*) \triangleq \sum_{z' \in \text{LP}(y')} \Delta G(x \vdash \text{CR}(z'), z') - \sum_{z^* \in \text{LP}(y^*)} \Delta G(x \vdash \text{CR}(z^*), z^*) \leq 0. \quad (10)$$

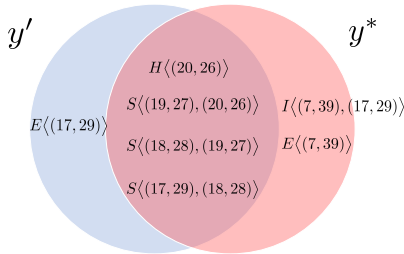
Fig. 3: Venn digram of loops in  $y'$  and  $y^*$ .

Table 1: Example of designability constraint

$I$	10	11	12	13	18	19	20	21
$X_1$	G	G	C	G	C	C	A	U
$X_2$	G	C	C	C	G	G	A	U
$X_3$	G	C	U	C	G	G	A	U
$X_4$	G	C	C	A	U	G	A	U
$X_5$	G	C	U	A	U	G	A	U

The loops in  $\text{LP}(y')$  and  $\text{LP}(y^*)$  are compared via the Venn diagram in Fig. 3. As we can see, the loops in  $y'$  and  $y^*$  overlap a lot. As a result, we can simplify Eq. 10 by canceling those intersected loops,

$$\exists y' \neq y^*, \forall x, \Delta \Delta G(y', y^*) \triangleq \sum_{z' \in \text{LP}(y') \setminus \text{LP}(y^*)} \Delta G(x \vdash \text{CR}(z'), z') - \sum_{z^* \in \text{LP}(y^*) \setminus \text{LP}(y')} \Delta G(x \vdash \text{CR}(z^*), z^*) \leq 0. \quad (11)$$

By Equation 11, the energy difference does not necessarily involve each nucleotide of  $x$ . It is equivalent to consider only the nucleotides participating the calculation of energy difference in Equation 11, which can be written as

$$\exists y' \neq y^*, \forall x' = x \vdash \Delta(y', y^*), \Delta \Delta G(x', y', y^*) \leq 0, \quad (12)$$

where

$$\Delta(y', y^*) \triangleq \bigcup_{z \in \text{LP}(y^*) \ominus \text{LP}(y')} \text{CR}(z), \quad (13)$$

and

$$\Delta\Delta G(x', y', y^*) \triangleq \sum_{z' \in \text{LP}(y') \setminus \text{LP}(y^*)} \Delta G(x' \vdash \text{CR}(z'), z') - \sum_{z^* \in \text{LP}(y^*) \setminus \text{LP}(y')} \Delta G(x' \vdash \text{CR}(z^*), z^*). \quad (14)$$

We name  $\Delta(y', y^*)$  as *Differential Positions* as it is a set containing only those positions whose nucleotides are involved in calculating the free energy difference between  $y'$  and  $y^*$ . Accordingly, each nucleotide of  $x'$  corresponds to one position in  $\Delta(y', y^*)$ , and the number of nucleotides in  $x'$  is the same as the size of  $\Delta(y', y^*)$ . Eq. 12 implies that enumerating all possible  $x'$  is equivalent to enumerating all possible  $x$ . Suppose the number of paired positions and unpaired positions in  $\Delta(y', y^*)$  are  $p$  and  $q$ , the total number of enumeration would be  $p^6 \times q^4$ . Moreover, the time cost of evaluating Eq. 14 is almost  $\mathcal{O}(1)$  as  $\text{LP}(y')$  and  $\text{LP}(y^*)$  only need to be computed once. As a result, it would be not hard to determine whether  $y'$  satisfies Theorem 1 when  $|\Delta(y', y^*)|$  is small, which motivates our first algorithm to efficiently verify undesignability, as described in Algorithm 1. In the case of example in Fig. 2,  $\Delta(y', y^*) = \{(7, 39), (17, 29), 6, 8, 16, 30, 38, 40\}$ , total number of enumerations of  $x'$  in Eq. 12 is 147456 which can be finished within 1 second on a single computer in our experiments.

---

**Algorithm 1:** Identify One Rival Structure
 

---

```

Input      :  $y^*, y'$ ;                                     /*  $y'$  comes from (unsuccessful) RNA Design) */
Output     :  $I, X$ ;                                       /*  $X$  will store all the  $x'$  that violates Theorem 1 */
1  $X \leftarrow \emptyset; I \leftarrow \Delta(y', y^*);$ 
2 foreach possible  $x'$  on  $I$  do
3 | if  $\Delta\Delta G(x, y', y^*) > 0$  then  $X \leftarrow X \cup \{x'\}$ ; /* If Eq. 12 violated, insert  $x'$  into  $X$  */
4 return  $I, X$ ;                                           /* If  $X$  is empty then  $y^*$  is undesignable */

```

---

In fact, if  $y'$  is always superior to  $y^*$ , any sequence compatible with  $y^*$  must be able to fold into  $y'$ , which leads to the following corollary.

**Corollary 1.** *If  $y'$  satisfies the condition in Theorem 1, then we have  $\text{pairs}(y') \subset \text{pairs}(y^*)$ .*

### 4.3 Theorem 2 and Algorithm 2: Identify Multiple Rival Structures

While Algorithm 1 is generally effective in verifying the potential rival structure  $y'$ , it is important to acknowledge that there are cases where the input structure  $y'$  does not consistently have a lower free energy than  $y^*$ . In such instances when Algorithm 1 yields a non-empty output set  $X$ , instead of confirming the undesignability of  $y^*$ , we can interpret  $X$  as a “designability constraint” imposed on the set of positions  $\Delta(y', y^*)$ . To introduce this concept of a “designability constraint”, consider Fig. 4, which presents the “Zigzag Semicircle” puzzle as the target structure  $y^*$ , along with a (unsuccessful) designed sequence  $x$  and  $y' = \text{MFE}(x)$ . Upon applying Algorithm 1, the outputs include  $\Delta(y', y^*) = \{(10, 21), (11, 19), 12, (13, 18), 20\}$  and a set  $X = \{X_1, X_2, \dots, X_{90}\}$ . Table 1 displays 5 compositions of nucleotides selected from  $X$ . See Supplementary Section 4 for a comprehensive list of  $X$ . If  $y^*$  stands as the unique MFE structure of a sequence

```

 $y^*$ : . . . . ( ( ( ( ( ( ( ( ( . . . . . ) ) . ) ) ) ) ) . . . .
 $y'$ : . . . . ( ( ( ( ( ( ( ( ( . . . . . ) ) . ) ) ) ) ) . . . .
 $x$ : AAAAUGAGCCCCACGAAAGGAGAGUGUCACAAA

```

Fig. 4: Example for Theorem 2 and Algorithm 2

$x$ ,  $x$  must adhere to the constraint  $X$  on  $\Delta(y', y^*)$ , i.e.,  $x \vdash \Delta(y', y^*) = X_i$  for some  $X_i \in X$ . Compared to the exponentially many possibilities on  $\Delta(y', y^*)$ , 90 is a small amount. This motivates use to formalize the “designability constraint”.

**Definition 3.** *A Designability Constraint for an RNA target structure  $y^*$  consists of two components:*

1.  $I$ : a set of positions or indices.

Table 2: Example of Constraint Contraction:  $C'_1, C'_2 = \text{Contraction}(C_1, C_2)$   
 The composition for positions 28, 29 can only be GC or GU

Constraint $C_1$					Constraint $C_2$					Constraint $C'_1$					Constraint $C'_2$				
$I$	28	29	30	31	$I$	28	29	32	51	$I$	28	29	30	31	$I$	28	29	32	51
$X_1$	G	C	C	C	$X_1$	G	C	A	G	$X_1$	G	C	C	C	$X_1$	G	C	A	G
$X_2$	G	U	C	U	$X_2$	G	C	A	U	$X_2$	G	U	C	U	$X_2$	G	C	A	U
$X_3$	G	G	U	U	$X_3$	G	U	U	C						$X_3$	G	U	U	C
$X_4$	G	G	U	C	$X_4$	A	G	U	U										

2.  $X$ : a set of compositions (nucleotides) such that if  $\text{uMFE}(x) = y^*$  then  $x$  must satisfy  $x \vdash I \in X$ .

As we can see, the returned tuple  $(I, X)$  of Algorithm 1 can be regarded as a designability constraint. The demonstrated designability constraint is so strong that it is likely be helpful to verify undesignability. Intuitively speaking, if we can find multiple designability constraints and those constraints are not compatible, i.e., no sequence can satisfy those constraints at the same time, then the target structure would be undesignable. This leads to our second theorem.

**Theorem 2.** A structure  $y^*$  is undesignable, if  $\exists Y = \{y'_1, y'_2, \dots, y'_k\}$  and  $y^* \notin Y$  such that the designability constraints  $\{C_i | C_i = (\Delta(y'_i, y^*), X_i), i = 1, 2, \dots, k\}$  are not compatible, where the tuple  $(\Delta(y'_i, y^*), X_i)$  is the output of running Algorithm 1 on  $y'_i \in Y$ .

The proof of Theorem 2 is attached to [Supplementary Section 3](#), which utilizes the following lemma deduced from Definition 1.

**Lemma 1.** A structure  $y^*$  is undesignable, if

$$\exists Y = \{y'_1, y'_2, \dots, y'_k\} \text{ and } y^* \notin Y, \text{ such that } \forall x, \Delta G(x, y') \leq \Delta G(x, y^*) \text{ for some } y' \in Y.$$

The algorithm for Theorem 2 is shown in Algorithm 2. Starting from a seed  $y'$  and  $x$ , Algorithm 2 first calls Algorithm 1. If the returned designability constraint  $(I, X)$  is empty, then  $y^*$  is undesignable by Theorem 1. Otherwise, a set of sequences  $\bar{X}$  will be constructed by composing  $x$  and  $x' \in X$  on the positions  $I$  (via the helper function **Compose**). The purpose is to fold those new sequences to generate new rival structure candidates. This process is repeated by recursion until an empty constraint is found or a set of designability constraints are proved to be incompatible. Each time a new designability constraint  $(I, X)$  is returned by calling Algorithm 1, it is compared to each of the previously found constraints and “constraint contraction” is conducted upon two given constraints. The “constraints contraction” of two constraints aims to delete the compositions within one constraint that doesn’t satisfy another constraint, and an example of constraint contraction is show in Table 2. (Refer to [Supplementary Section 2](#) for specific steps of constraint contraction.) The algorithm stops if there is no new rival structure candidate can be found.

#### 4.4 Theorem 3 and Algorithm 3: Structure Decomposition

While Algorithm 1 and 2 are efficient when the input  $\Delta(y^*, y')$  is small, it is not practical otherwise. For instance, Fig. 5 showcases the puzzle “multilooping fun” from Eterna100 benchmark. The difference between  $y^*$  and  $y'$  is so huge that is not suitable as input for Algorithm 1 and 2. Instead, we can find a rival structure for a pair-bounded structure  $y^*_{i \rightarrow j}$ . If  $y''_{i \rightarrow j}$  is always more advantageous as well as enclosed by a pair, then replacing  $y^*_{i \rightarrow j}$  with  $y''_{i \rightarrow j}$  in  $y^*$  will yield another structure  $y''$  that is qualified as a rival structure for  $y^*$ . **However, the key point for such a replacement is that both  $y^*_{i \rightarrow j}$  and  $y''_{i \rightarrow j}$  must be enclosed by a pair, ensuring that the free energy is the addition of the energy of loops within the pair and outside the pair.** To generalize this idea, we propose a simple way to decompose a target structure into smaller ones such that the undesignability of a decomposed structure can assure the undesignability of the original target structure. In particular, we focus on the type of structure which is dubbed as context-constrained structure.

**Definition 4.** A structure  $y = y_1 y_2 \dots y_n$  is context-constrained if  $(1, n) \in \text{pairs}(y)$ , i.e., its first and last positions are paired.

**Algorithm 2:** Identify Multiple Rival Structures

---

```

Input      :  $y^*, y', x$ ; /*  $y'$  and  $x$  come from (unsuccessful) RNA design */
Output    : undesignable/designable/unknown
1  $I, X = \text{Algorithm1}(y^*, y')$ ;
2 if  $X = \emptyset$  then return undesignable;
3  $C \leftarrow (I, X)$ ;  $\text{CSet} \leftarrow \{C\}$ ;  $Y \leftarrow \{y'\}$ ;
4  $\tilde{X} \leftarrow \text{Compose}(x, I, X)$ ; /* construct new sequences for folding */
5 return Recurse ( $y^*, \text{CSet}, Y, \tilde{X}$ );
6 Function Recurse ( $y^*, \text{CSet}, Y, \tilde{X}$ ); /* recursive function */
7  $\tilde{X}_{\text{new}} \leftarrow \emptyset$ ;  $Y_{\text{new}} \leftarrow Y$ ;
8 foreach  $x \in \tilde{X}$  do
9   if  $y^* = \text{uMFE}(x)$  then return designable; /* detect uMFE solution if designable */
10   $y' \leftarrow \text{MFE}(x)$ ; /* RNA folding yields a rival structure candidate */
11  if  $y' \in Y_{\text{new}}$  then continue;
12   $Y_{\text{new}} \leftarrow Y_{\text{new}} \cup \{y'\}$ ;
13   $I, X \leftarrow \text{Algorithm1}(y^*, y')$ ;  $C \leftarrow (I, X)$ ;
14  if  $X = \emptyset$  then return undesignable;
15   $\text{CSet}_{\text{next}} \leftarrow \text{CSet}$ ;
16  foreach  $\bar{C} \in \text{CSet}$  do
17     $\text{CSet}_{\text{next}} \leftarrow \text{CSet}_{\text{next}} \setminus \{\bar{C}\}$ ;
18     $C', \bar{C}' \leftarrow \text{Contraction}(C, \bar{C})$ ;  $\text{CSet}_{\text{next}} \leftarrow \text{CSet}_{\text{next}} \cup \{\bar{C}'\}$ ;
19    if  $C' = \emptyset$  or  $\bar{C}' = \emptyset$  then return undesignable;
20     $C \leftarrow C'$ ; /* update the latest constraint for next contraction */
21   $\text{CSet} \leftarrow \text{CSet}_{\text{next}} \cup \{C\}$ ;  $\tilde{X}_{\text{new}} \leftarrow \tilde{X}_{\text{new}} \cup \text{Compose}(x, I, X)$ ;
22 if  $|Y_{\text{new}}| == |Y|$  then return unknown;
23 return Recurse ( $y^*, \text{CSet}, Y_{\text{new}}, \tilde{X}_{\text{new}}$ )
24 Function Compose ( $x, I, X$ );
25  $\tilde{X} \leftarrow \emptyset$ ;
26 foreach  $x' \in X$  do
27    $\tilde{x} \leftarrow x$ ;
28   foreach  $i \in I$  do  $\tilde{x}_i = x'[i]$ ;
29    $\tilde{X} = \tilde{X} \cup \{\tilde{x}\}$ ;
30 return  $\tilde{X}$ ;

```

---

If a sequence  $x = x_1x_2\dots x_n$  satisfies  $x_1x_n \in \{\text{CG}, \text{GC}, \text{AU}, \text{UA}, \text{GU}, \text{UG}\}$ , then it has context-constrained MFE structure,

$$\text{MFE}_{\text{CC}}(x) \triangleq \underset{y \in \mathcal{Y}(x), (1,n) \in \text{pairs}(y)}{\text{argmin}} \Delta G(x, y). \quad (15)$$

A context-constrained structure  $y^*$  is the context-constrained uMFE structure of  $x$ , i.e.,  $\text{uMFE}_{\text{CC}}(x)$ , if and only if

$$\forall y \in \mathcal{Y}(x) \setminus \{y^*\}, \text{ if } (1, n) \in \text{pairs}(y), \text{ then } \Delta G(x, y^*) < \Delta G(x, y). \quad (16)$$

Accordingly, we can define context-constrained undesignability.

**Definition 5.** A context-constrained structure  $y^*$  is context-constrained-undesignable if and only if

$$\forall x, \exists y' \neq y^* \text{ and } y' \text{ is context-constrained, } \Delta G(x, y') \leq \Delta G(x, y^*).$$

The reason for introducing context-constrained concepts lies in the fact that a pair  $(i, j) \in \text{pairs}(y)$  can divide  $\Delta G(x, y)$  into two components: the free energy within the pair  $(i, j)$  and the free energy outside it. This allows us to succinctly express the idea of proving undesignability via structure decomposition in Theorem 3. The proof of Theorem 3 is included in [Supplementary Section 3](#).





The implementation of our algorithm also enable turning off special hairpins in energy model. As a result, in addition to the aforementioned 15 undesignable puzzles, our algorithms can automatically prove the Puzzle 50 is undesignable when special hairpins are not considered.

An additional noteworthy finding is that Algorithm 2 can also identify a uMFE (or MFE) solution (line 9) in the process of searching rival structure candidates by folding new sequences. Remarkably, the puzzle “Short String 4” (in the 22 unsolved puzzles) turned out to be designable, i.e., Algorithm 2 successfully generated an RNA sequence that adopts the target structure as the unique MFE structure. See [Supplementary Material Section 5](#) for the structure of “Short String 4” along with the designed sequence. Finally, the designability of remaining 5 puzzles remains uncertain, and their details including structures are presented in [Supplementary Material Section 6](#).

### 5.3 Insights

For those puzzles proved undesignable by the three algorithms, we further compared the identified rival structures<sup>5</sup> with original target structures. Main insights are summarized as follows.

1. The undesignability identified by Algorithm 1 is usually caused by some lonely pair or double pairs in the target structure, which is consistent to the observation of previous study [2] on the difficulty of puzzles. For example, the  $y'$  in Fig. 2 has one less pair compared to  $y^*$ . However, our approach can provide loop-level reasoning and quantitative explanation, which goes beyond heuristics.
2. If an undesignable structure can be proved by identifying multiple rival structures, the number of the rivals is not large and those rival structures can be very similar to each other. There are 4 cases (8, 9, 9, 2) in Table 3.
3. The constrained-context undesignable structures identified by Algorithm 3 often contains some hairpin enclosed by a single pair or double pairs as the cases highlighted in Table 3. However, it is hard to locate those regions by attempting RNA design and find a  $y'$  similar to target structure  $y^*$ , which demonstrates the cruciality of structure decomposition.

## 6 Conclusions and future work

Following the core idea of proof by construction, we propose three efficient and explainable algorithms (RIGENDE) for **proving undesignability** in the context of RNA design with the nearest neighbor model. Theoretically, the theorems we introduced can shed some light on why and how some structures are not designable. The establishment of those concepts such as **rival structure**, **designability constraint**, and **context-constrained undesignability** can be regarded as a milestone for automatically verifying undesignability. Applied to Eterna100 benchmark, RIGENDE can prove 15 of them are actually undesignable using popular Turner model implemented in ViennaRNA 2.0 and LinearFold. Without doubt, the found rival structures can help human understand more about RNA folding and RNA design. The main drawbacks of RIGENDE include:

1. The rival structure candidates are crucial for the algorithms to work, and current way of selecting candidates might not be good enough.
2. Currently the structure decomposition in Algorithm3 only considers a context-constrained span, which may not be able to cover other sophisticated cases.

In the future, we would address those drawbacks and try to prove more cases of undesignability,

1. Design better ways to find rival structure candidates.
2. Decompose structures in a more involved manner, though it may cost more time.
3. Experiment with more puzzles and RNA design settings to search for more general regularities of designability and undesignability.

<sup>5</sup> We released those rival structures at <https://github.com/shanry/RNA-Undesign/tree/main/data/results>.

Table 3: Eterna100 puzzles proved to be undesignable (context-constrained-undesignable substructures highlighted).

Id	Puzzle	Length	Rivals	Algorithm	Time	Structure
50	1, 2, 3 and 4 bulges	105	1	alg 1	0.08	
52	[RNA] Repetitious Seqs. 8/10	80	1	alg 1	0.03	
57	multilooping fun	36	1	alg 3	22.74	
60	Mat - Elements & Sections	105	8	alg 2	1.82	
61	Chicken feet	67	1	alg 3	231.61	
67	Simple Single Bond	61	1	alg 1	0.10	
72	Loop next to a Multiloop	73	1	alg 1	0.19	
80	Spiral of 5's	397	1	alg 1	0.17	
81	Campfire	212	9	alg 3	0.25	
86	Methaqualone C <sub>16</sub> H <sub>14</sub> N <sub>2</sub> O	355	1	alg 3	17.66	
87	Cat's Toy 2	97	1	alg 3	9.68	
88	Zigzag Semicircle	34	9	alg 2	1.51	
91	Thunderbolt	392	1	alg 3	1.04	
92	Mutated chicken feet	100	1	alg 3	223.57	
96	Cesspool	358	1	alg 3	14.27	
99	Shooting Star	364	2	alg 3	7.77	

## References

1. Aguirre-Hernández, R., Hoos, H.H., Condon, A.: Computational rna secondary structure design: empirical complexity and improved methods. *BMC bioinformatics* **8**(1), 1–16 (2007)
2. Anderson-Lee, J., Fisker, E., Kosaraju, V., Wu, M., Kong, J., Lee, J., Lee, M., Zada, M., Treuille, A., Das, R.: Principles for predicting rna secondary structure design difficulty. *Journal of molecular biology* **428**(5), 748–757 (2016)
3. Andronescu, M., Fejes, A.P., Hutter, F., Hoos, H.H., Condon, A.: A new algorithm for rna secondary structure design. *Journal of molecular biology* **336**(3), 607–624 (2004)
4. Bonnet, É., Rzazewski, P., Sikora, F.: Designing rna secondary structures is hard. *Journal of Computational Biology* **27**(3), 302–316 (2020)
5. Crick, F.: Central dogma of molecular biology. *Nature* **227**(5258), 561–563 (1970)
6. Doudna, J.A., Cech, T.R.: The chemical repertoire of natural ribozymes. *Nature* **418**(6894), 222–228 (2002)
7. Garcia-Martin, J.A., Clote, P., Dotu, I.: Rnaifold: a constraint programming algorithm for rna inverse folding and molecular design. *Journal of bioinformatics and computational biology* **11**(02), 1350001 (2013)
8. Haleš, J., Maňuch, J., Ponty, Y., Stacho, L.: Combinatorial rna design: designability and structure-approximating algorithm. In: *Combinatorial Pattern Matching: 26th Annual Symposium, CPM 2015, Ischia Island, Italy, June 29–July 1, 2015, Proceedings*. pp. 231–246. Springer (2015)
9. Hofacker, I.L., Fontana, W., Stadler, P.F., Bonhoeffer, L.S., Tacker, M., Schuster, P.: Fast folding and comparison of rna secondary structures. *Monatshefte für Chemie/Chemical Monthly* **125**(2), 167–188 (1994)
10. Huang, L., Zhang, H., Deng, D., Zhao, K., Liu, K., Hendrix, D.A., Mathews, D.H.: LinearFold: linear-time approximate RNA folding by 5'-to-3' dynamic programming and beam search. *Bioinformatics* **35**(14), i295–i304 (07 2019). <https://doi.org/10.1093/bioinformatics/btz375>, <https://doi.org/10.1093/bioinformatics/btz375>
11. Koodli, R.V., Rudolfs, B., Wayment-Steele, H.K., Designers, E.S., Das, R.: Redesigning the eterna100 for the vienna 2 folding engine. *BioRxiv* pp. 2021–08 (2021)
12. Lorenz, R., Bernhart, S.H., Zu Siederdissen, C.H., Tafer, H., Flamm, C., Stadler, P.F., Hofacker, I.L.: ViennaRNA package 2.0. *Algorithms for Molecular Biology* **6**(1), 1 (2011)
13. Mathews, D., Sabina, J., Zuker, M., Turner, D.: Expanded sequence dependence of thermodynamic parameters improves prediction of RNA secondary structure. *Journal of Molecular Biology* **288**(5), 911–940 (1999)
14. Mathews, D.H., Disney, M.D., Childs, J.L., Schroeder, S.J., Zuker, M., Turner, D.H.: Incorporating chemical modification constraints into a dynamic programming algorithm for prediction of RNA secondary structure. *Proceedings of the National Academy of Sciences U.S.A.* **101**(19), 7287–7292 (2004)
15. Portela, F.: An unexpectedly effective monte carlo technique for the rna inverse folding problem. *BioRxiv* p. 345587 (2018)
16. Rubio-Largo, Á., Vanneschi, L., Castelli, M., Vega-Rodríguez, M.A.: Multiobjective metaheuristic to design rna sequences. *IEEE Transactions on Evolutionary Computation* **23**(1), 156–169 (2018)
17. Serganov, A., Patel, D.J.: Ribozymes, riboswitches and beyond: regulation of gene expression without proteins. *Nature Reviews Genetics* **8**(10), 776–790 (2007)
18. Tameda, A.: Modena: a multi-objective rna inverse folding. *Advances and applications in bioinformatics and chemistry: AABC* **4**, 1 (2011)
19. Turner, D.H., Mathews, D.H.: NNDB: the nearest neighbor parameter database for predicting stability of nucleic acid secondary structure. *Nucleic Acids Research* **38**(suppl.1), D280–D282 (2010)
20. Ward, M., Courtney, E., Rivas, E.: Fitness functions for rna structure design. *bioRxiv* (2022)
21. Yao, H.T., Chauve, C., Regnier, M., Ponty, Y.: Exponentially few rna structures are designable. In: *Proceedings of the 10th ACM International Conference on Bioinformatics, Computational Biology and Health Informatics*. pp. 289–298 (2019)
22. Zadeh, J.N., Wolfe, B.R., Pierce, N.A.: Nucleic acid sequence design via efficient ensemble defect optimization. *Journal of Computational Chemistry* **32**(3), 439–452 (2010)
23. Zhou, T., Dai, N., Li, S., Ward, M., Mathews, D.H., Huang, L.: Rna design via structure-aware multifrontier ensemble optimization. *Bioinformatics* **39**(Supplement\_1), i563–i571 (2023)

# Supplementary Material

## Undesignable RNA Structure Identification via Rival Structure Generation and Structure Decomposition

Tianshuo Zhou<sup>1</sup>, Wei Yu Tang<sup>1</sup>, David H. Mathews<sup>2,3,4</sup>, and Liang Huang<sup>1</sup>

<sup>1</sup> Oregon State University, Corvallis OR 97330, USA

<sup>2</sup> Department of Biochemistry and Biophysics, University of Rochester Medical Center, Rochester, NY 14642, USA

<sup>3</sup> Center for RNA Biology, University of Rochester Medical Center, Rochester, NY 14642, USA

<sup>4</sup> Department of Biostatistics & Computational Biology, University of Rochester Medical Center, Rochester, NY 14642, USA

### 1 A List of Loops

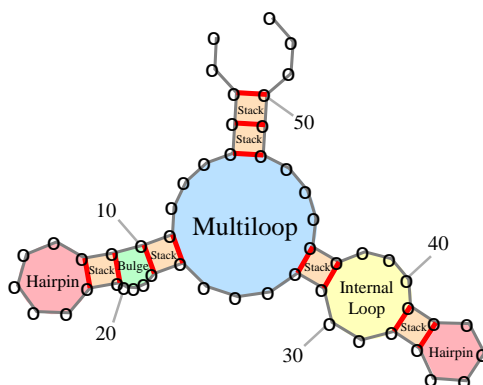


Fig. 1: An example of secondary structure  $y$  and loops  $LP(y)$ .

1. Stack:  $S\langle(3, 50), (4, 49)\rangle$
2. Stack:  $S\langle(4, 49), (5, 48)\rangle$
3. Multiloop:  $M\langle(5, 48), (9, 24), (28, 44)\rangle$
4. Stack:  $S\langle(9, 24), (10, 23)\rangle$
5. Bulge:  $B\langle(10, 23), (11, 19)\rangle$
6. Stack:  $S\langle(11, 19), (12, 18)\rangle$
7. Hairpin:  $H\langle(12, 18)\rangle$
8. Stack:  $S\langle(28, 44), (29, 43)\rangle$
9. Internal Loop:  $I\langle(29, 43), (32, 39)\rangle$
10. Stack:  $S\langle(32, 39), (33, 38)\rangle$
11. Hairpin:  $H\langle(33, 38)\rangle$
12. External Loop:  $E\langle(3, 50)\rangle$

## 2 Projection and Contraction

Projection $\vdash$	
<b>Input</b> : $x, I;$	/* $I = i_1, i_2, \dots, i_n$ is a list of indices */
<b>Output</b> : $x';$	/* $x$ projected onto $I$ */
<pre> 1 <math>x' \leftarrow \text{map}();</math> 2 <b>for</b> <math>i</math> <i>in</i> <math>I</math> <b>do</b> 3     <math>x'[i] \leftarrow x_i</math> 4 <b>return</b> <math>x'</math> </pre>	

Contraction	
<b>Input</b> : $C_1, C_2;$	/* Constraints from Algorithm 1 */
<b>Output</b> : $C'_1, C'_2;$	/* Constraints after removing contradictions */
<pre> 1 <math>(I_1, X_1) \leftarrow C_1;</math> 2 <math>(I_2, X_2) \leftarrow C_2;</math> 3 <math>I' \leftarrow I_1 \cap I_2;</math> 4 <b>if</b> <math>I' = \emptyset</math> <b>then</b> 5     <math>C'_1 \leftarrow (I_1, X_1);</math> 6     <math>C'_2 \leftarrow (I_2, X_2);</math> 7     <b>return</b> <math>C'_1, C'_2;</math> 8 <math>X'_1 \leftarrow \{x \vdash I' \mid x \in X_1\};</math> 9 <math>X'_2 \leftarrow \{x \vdash I' \mid x \in X_2\};</math> 10 <b>for</b> <math>x</math> <i>in</i> <math>X_1</math> <b>do</b> 11     <b>if</b> <math>x \vdash I' \notin X'_2</math> <b>then</b> <math>X_1 \leftarrow X_1 \setminus \{x\};</math> /* <math>x \in X_1</math> cannot be satisfied with <math>X_2</math> */ 12 <b>for</b> <math>x</math> <i>in</i> <math>X_2</math> <b>do</b> 13     <b>if</b> <math>x \vdash I' \notin X'_1</math> <b>then</b> <math>X_2 \leftarrow X_2 \setminus \{x\};</math> /* <math>x \in X_2</math> cannot be satisfied with <math>X_1</math> */ 14 <math>C'_1 \leftarrow (I_1, X_1);</math> 15 <math>C'_2 \leftarrow (I_2, X_2);</math> 16 <b>return</b> <math>C'_1, C'_2;</math> </pre>	

## 3 Proofs

**Theorem 1.** A structure  $y^*$  is undesignable, if

$$\exists y' \neq y^*, \forall x, \Delta G(x, y') \leq \Delta G(x, y^*). \quad (8)$$

**Theorem 2.** A structure  $y^*$  is undesignable, if  $\exists Y = \{y'_1, y'_2, \dots, y'_k\}$  and  $y^* \notin Y$  such that the designability constraints  $\{C_i \mid C_i = (\Delta(y'_i, y^*), X_i), i = 1, 2, \dots, k\}$  are not compatible, where the tuple  $(\Delta(y'_i, y^*), X_i)$  is the output of running Algorithm 1 on  $y'_i \in Y$ .

**Lemma 1.** A structure  $y^*$  is undesignable, if

$$\exists Y = \{y'_1, y'_2, \dots, y'_k\} \text{ and } y^* \notin Y, \text{ such that } \forall x, \Delta G(x, y') \leq \Delta G(x, y^*) \text{ for some } y' \in Y.$$

**Definition 5.** A context-constrained structure  $y^*$  is context-constrained-undesignable if and only if

$$\forall x, \exists y' \neq y^* \text{ and } y' \text{ is context-constrained, } \Delta G(x, y') \leq \Delta G(x, y^*).$$

**Theorem 3.** A structure  $y^*$  is undesignable if there exists a pair  $(i, j) \in \text{pairs}(y^*)$  such that the structure  $y_{i \rightarrow j}^*$  is context-constrained undesignable, where  $y_{i \rightarrow j}^* = y_i^* y_{i+1}^* \dots y_j^*$ .

### 3.1 Proof of Theorem 2

*Proof.* As the designability constraints  $\{C_i | C_i = (\Delta(y'_i, y^*), X_i), i = 1, 2, \dots, k\}$  are not compatible, there exists at least one constraint  $C_i$  that  $x$  can not satisfy. Considering  $C_i$  is the output of Algorithm 1 given the input  $y^*, y'_i$ , we have  $\Delta G(x, y'_i) \leq \Delta G(x, y^*)$ . By Lemma 1,  $y^*$  is undesignable.  $\square$

### 3.2 Proof of Theorem 3

*Proof.* Because  $y_{i \rightarrow j}^*$  is context-constrained-undesignable, by Definition 5 we have

$$\forall x_{i \rightarrow j}, \exists y'_{i \rightarrow j} \neq y_{i \rightarrow j}^* \text{ and } y'_{i \rightarrow j} \text{ is context-constrained, } \Delta G(x_{i \rightarrow j}, y'_{i \rightarrow j}) \leq \Delta G(x_{i \rightarrow j}, y_{i \rightarrow j}^*), \quad (17)$$

where  $x_{i \rightarrow j}$  is a sequence of length  $j - i + 1$  and  $y'_{i \rightarrow j}$  is a context-constrained structure of length  $j - i + 1$ .

In the nearest neighbor energy model, loops are enclosed by pair(s). Consequently, a pair  $(i, j) \in \text{pairs}(y^*)$ , can partition  $\Delta G(x, y^*)$  into two parts,

$$\Delta G(x, y^*) = \Delta G(x_{i \rightarrow j}, y_{i \rightarrow j}^*) + \Delta G(x_{\leftarrow i \rightarrow j}, y_{\leftarrow i \rightarrow j}^*), \quad (18)$$

where the two terms on right side signifies the free energy within and outside the pair  $(i, j)$  respectively. Here  $x_{\leftarrow i \rightarrow j}$  is the joined region of  $x_1 x_2 \dots x_i$  and  $x_j x_{j+1} \dots x_n$  and  $y_{\leftarrow i \rightarrow j}^*$  is the joined region of  $y_1^* y_2^* \dots y_i^*$  and  $y_j^* y_{j+1}^* \dots y_n^*$ .

Combining Eq. 17 and Eq. 18, we have

$$\forall x, \exists y'_{i \rightarrow j} \neq y_{i \rightarrow j}^* \text{ and } y'_{i \rightarrow j} \text{ is context-constrained, } \Delta G(x_{i \rightarrow j}, y'_{i \rightarrow j}) + \Delta G(x_{\leftarrow i \rightarrow j}, y_{\leftarrow i \rightarrow j}^*) \leq \Delta G(x, y^*), \quad (19)$$

i.e.,

$$\forall x, \exists y' \neq y^*, \Delta G(x, y') \leq \Delta G(x, y^*), \quad (20)$$

where

$$y' = y_1^* y_2^* \dots y_{i-1}^* y'_i \dots y'_j y_{j+1}^* \dots y_n^*. \quad (21)$$

$\square$

## 4 A comprehensive list of X

Table 1 contains the full list of  $X$  obtained from the output of Algorithm 1 applied on the example in Fig. 4

Table 1: A comprehensive list of  $X$ .

	10	11	12	13	18	19	20	21		10	11	12	13	18	19	20	21
1	G	G	C	G	C	C	A	U	46	G	C	U	U	G	G	C	U
2	G	C	C	C	G	G	A	U	47	G	C	C	C	G	G	G	U
3	G	C	U	C	G	G	A	U	48	G	C	U	C	G	G	G	U
4	G	C	C	A	U	G	A	U	49	G	C	C	A	U	G	G	U
5	G	C	U	A	U	G	A	U	50	G	C	U	A	U	G	G	U
6	G	G	C	U	G	C	A	U	51	G	C	C	U	G	G	G	C
7	G	C	C	U	G	G	A	C	52	G	C	C	U	G	G	G	U
8	G	C	C	U	G	G	A	U	53	G	C	U	U	G	G	G	C
9	G	G	U	U	G	C	A	U	54	G	C	U	U	G	G	G	U
10	G	C	U	U	G	G	A	C	55	G	G	C	G	C	C	U	C
11	G	C	U	U	G	G	A	U	56	G	G	C	G	C	C	U	U
12	G	G	C	G	C	C	C	C	57	G	G	U	G	C	C	U	C
13	G	G	C	G	C	C	C	U	58	G	G	U	G	C	C	U	U
14	G	G	U	G	C	C	C	C	59	G	G	A	C	G	C	U	U
15	G	G	U	G	C	C	C	U	60	G	G	C	C	G	C	U	U
16	G	G	A	C	G	C	C	U	61	G	C	C	C	G	G	U	C
17	G	G	C	C	G	C	C	U	62	C	C	C	C	G	G	U	G
18	C	C	C	C	G	G	C	G	63	G	C	C	C	G	G	U	U
19	G	C	C	C	G	G	C	U	64	G	G	G	C	G	C	U	U
20	G	G	G	C	G	C	C	U	65	G	G	U	C	G	C	U	C
21	G	G	U	C	G	C	C	C	66	G	G	U	C	G	C	U	U
22	G	G	U	C	G	C	C	U	67	G	C	U	C	G	G	U	C
23	C	C	U	C	G	G	C	G	68	C	C	U	C	G	G	U	G
24	G	C	U	C	G	G	C	U	69	G	C	U	C	G	G	U	U
25	G	C	C	A	U	G	C	U	70	G	C	C	A	U	G	U	U
26	G	C	U	A	U	G	C	U	71	G	C	U	A	U	G	U	U
27	G	G	A	U	G	C	C	C	72	G	G	A	U	G	C	U	C
28	U	G	A	U	G	C	C	A	73	U	G	A	U	G	C	U	A
29	G	G	A	U	G	C	C	U	74	G	G	A	U	G	C	U	U
30	C	C	A	U	G	G	C	G	75	G	C	A	U	G	G	U	U
31	G	C	A	U	G	G	C	U	76	G	G	C	U	G	C	U	C
32	G	G	C	U	G	C	C	C	77	U	G	C	U	G	C	U	A
33	U	G	C	U	G	C	C	A	78	G	G	C	U	G	C	U	U
34	G	G	C	U	G	C	C	U	79	G	C	C	U	G	G	U	C
35	G	C	C	U	G	G	C	C	80	C	C	C	U	G	G	U	G
36	C	C	C	U	G	G	C	G	81	G	C	C	U	G	G	U	U
37	G	C	C	U	G	G	C	U	82	G	G	G	U	G	C	U	C
38	G	G	G	U	G	C	C	C	83	U	G	G	U	G	C	U	A
39	U	G	G	U	G	C	C	A	84	G	G	G	U	G	C	U	U
40	G	G	G	U	G	C	C	U	85	G	G	U	U	G	C	U	C
41	G	G	U	U	G	C	C	C	86	U	G	U	U	G	C	U	A
42	U	G	U	U	G	C	C	A	87	G	G	U	U	G	C	U	U
43	G	G	U	U	G	C	C	U	88	G	C	U	U	G	G	U	C
44	G	C	U	U	G	G	C	C	89	C	C	U	U	G	G	U	G
45	C	C	U	U	G	G	C	G	90	G	C	U	U	G	G	U	U



$y^*$ : .....((.((.(.((.(.((.(.((.....))))))..).((.(.((.....))..).)).)).)).....  
 $x$ : CAAGAAGCGCGGACUGACAGAGAGGAUCGAAAGACUGACAAAGAGAGGGCGAAAGCAAUUGACAAAGAGGGGACGGUAAAAAAAAAAAAAAAAAAGAA

Fig. 2: The puzzle “Short String 4” ( $y^*$ ) and a designed sequence ( $x$ )

## 5 Designable Case

The puzzle “Short String 4” and a designed sequence are shown in Fig. 2.

## 6 Puzzles of uncertain designability

There are 5 puzzles in the Eterna100 benchmark whose designability is uncertain. Their puzzle names, puzzle IDs, and length are listed in Table 2, and the structures are shown in Figs. 3 to 7.

Table 2: Puzzles of uncertain designability

Puzzle ID	Puzzle Name	Length
68	Taraxacum officinale	282
78	Mat - Lot 2-2 B	284
90	Gladius	400
97	Hoglafractal	400
100	Teslagon	382

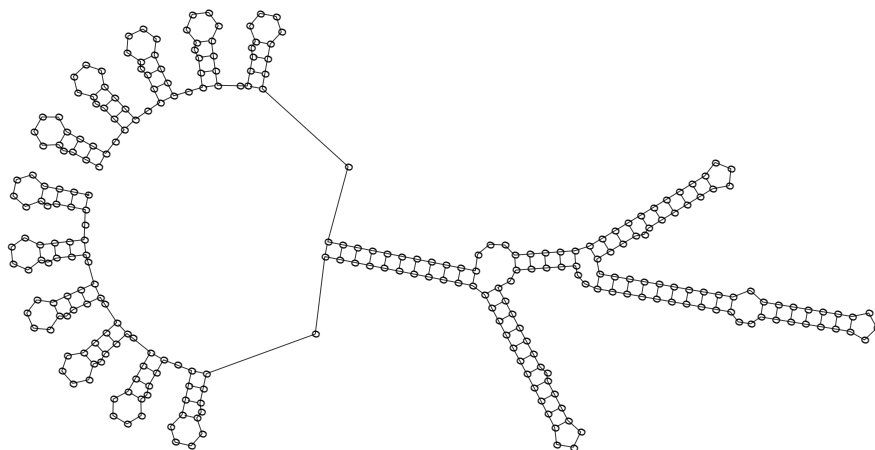


Fig. 3: Structure of “Taraxacum officinale”

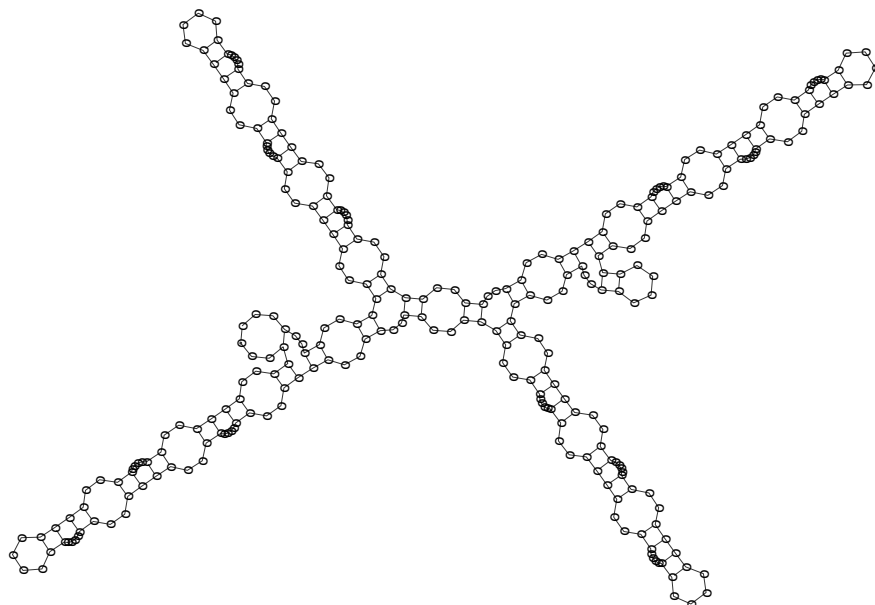


Fig. 4: Structure of “Mat - Lot 2-2 B”

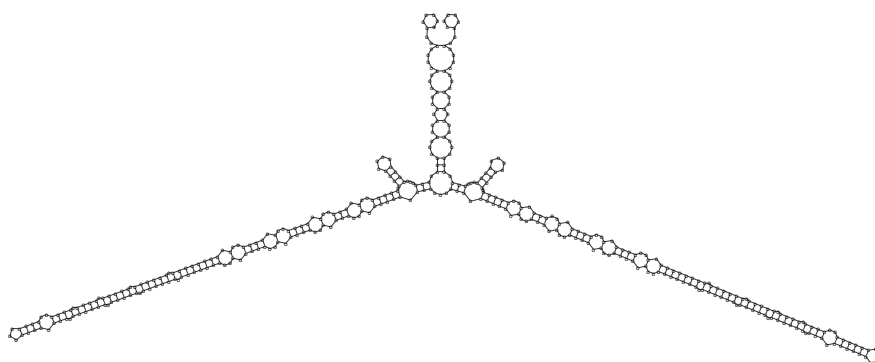


Fig. 5: Structure of “Gladius”

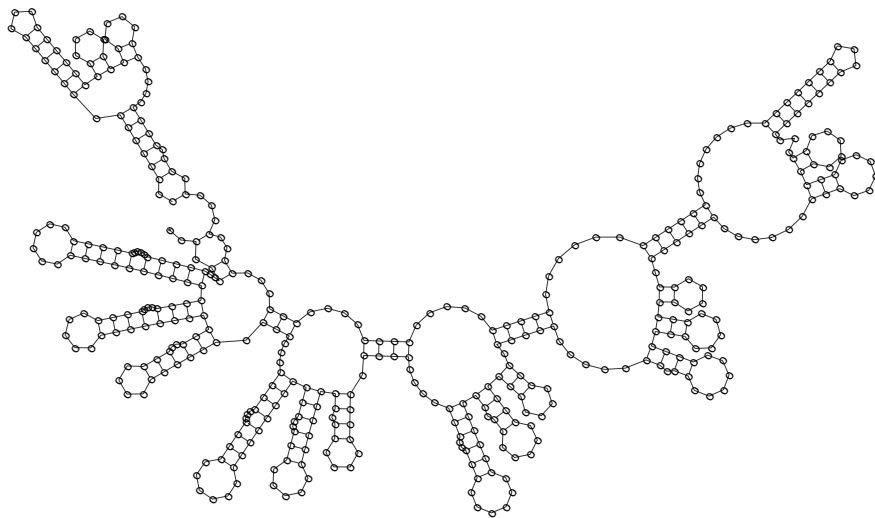


Fig. 6: Structure of "Hoglafractal"

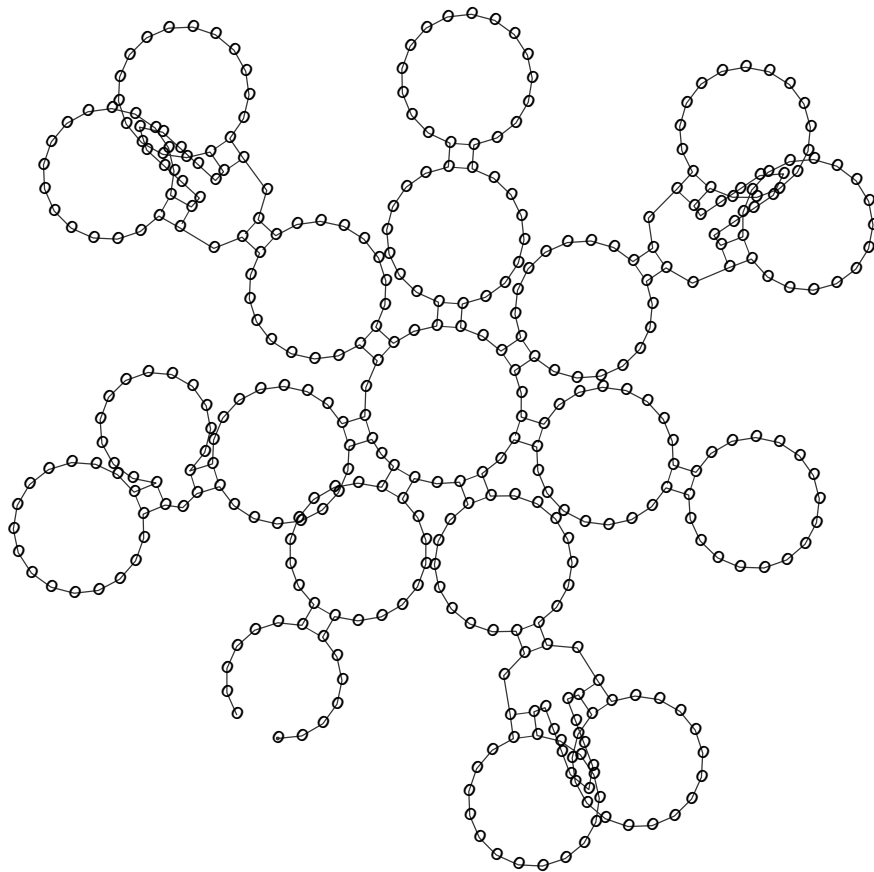


Fig. 7: Structure of “Teslagon”