

Agent-OM: Leveraging LLM Agents for Ontology Matching

Zhangcheng Qiang
Australian National University
Canberra, ACT, Australia
qzc438@gmail.com

Weiqing Wang
Monash University
Melbourne, VIC, Australia
teresa.wang@monash.edu

Kerry Taylor
Australian National University
Canberra, ACT, Australia
kerry.taylor@anu.edu.au

ABSTRACT

Ontology matching (OM) enables semantic interoperability between different ontologies and resolves their conceptual heterogeneity by aligning related entities. OM systems currently have two prevailing design paradigms: conventional knowledge-based expert systems and newer machine learning-based predictive systems. While large language models (LLMs) and LLM agents have revolutionised data engineering and have been applied creatively in many domains, their potential for OM remains underexplored. This study introduces a novel agent-powered LLM-based design paradigm for OM systems. With consideration of several specific challenges in leveraging LLM agents for OM, we propose a generic framework, namely Agent-OM (w.r.t. Agent for Ontology Matching), consisting of two Siamese agents for retrieval and matching, with a set of simple OM tools. Our framework is implemented in a proof-of-concept system. Evaluations of three Ontology Alignment Evaluation Initiative (OAEI) tracks over state-of-the-art OM systems show that our system can achieve results very close to the long-standing best performance on simple OM tasks and can significantly improve the performance on complex and few-shot OM tasks.

PVLDB Reference Format:

Zhangcheng Qiang, Weiqing Wang, and Kerry Taylor. Agent-OM: Leveraging LLM Agents for Ontology Matching. PVLDB, 18(1): XXX-XXX, 2025.
doi:XX.XX/XXX.XX

PVLDB Artifact Availability:

The source code, data, and/or other artifacts have been made available at <https://github.com/qzc438-research/ontology-llm>.

1 INTRODUCTION

Large language models (LLMs) are pre-trained with an enormous corpus of common knowledge and therefore have powerful generative capabilities. Despite the success of using LLMs in a wide range of applications, leveraging LLMs for downstream tasks still has several challenges. (1) LLMs are pre-trained models that do not capture late-breaking information. (2) LLM hallucinations are often observed in domain-specific tasks and hamper their reliability. LLMs often generate unfaithful responses that are syntactically sound but factually incorrect [34]. (3) LLMs are good models of linguistic competence, but have shown limited capabilities in non-linguistic tasks,

such as planning and routing [72]. LLMs are originally designed for sequential question-answering, but most real-world tasks are designed with complex logic rather than following a single path.

To overcome the limitations of LLM customisation for downstream tasks, LLM-based autonomous agents have become a prominent research area. In the field of artificial intelligence (AI), the notion of agents was first introduced in the famous Turing Test [71], referring to intelligent computational entities that can display human-like behaviours. Such AI agents have fallen short of human-level capabilities, as they can only act on simple and heuristic policy functions learnt from constrained environments and they lack efficient central control to simulate the human learning process [75]. LLMs, with remarkable success in demonstrating autonomy, reactivity, proactivity, and social ability, have attracted growing research efforts aiming to construct AI agents, so-called LLM agents [79].

The core concept of LLM agents is to employ the LLM as a controller or “brain” rather than as a predictive model only (a.k.a Model as a Service). LLM agents extend LLM’s capability with advanced planning, memory, and tools, and allow LLMs to communicate with open-world knowledge [78]. (1) Planning breaks down a complex task into simpler and more manageable subtasks. LLMs can also receive feedback on plans and perform reflection and refinement. The most practical technique used for LLM planning is chain of thought (CoT) [77]. (2) Tools allow LLMs to call external resources for additional information. They are often invoked by LLM actions. (3) Memory provides context to inherently stateless LLMs, including short-term and long-term memory. Short-term memory can be considered as context information obtained from planning and tools via in-context learning (ICL) [11]. Long-term memory often uses database storage with retrieval-augmented generation (RAG) [40] to retain information. Unlike fine-tuning, where models need to be retrained to learn new context data, ICL/RAG instead augments the LLM prompts with new information. ICL/RAG is more scalable for operating real-time and dynamic information. Almost 90% of use cases can be achieved by ICL/RAG-based search and retrieval [49]. A recent paper [58] also demonstrates that RAG surpasses fine-tuning across a wide spectrum of knowledge-intensive tasks.

Ontology matching (OM) is a classic alignment task, aiming to find possible correspondences between a pair of ontologies [19]. OM systems are developed to automate this matching process. There are two dominant design paradigms for OM systems: traditional knowledge-based OM systems that implement pre-defined logic and expert knowledge; and more recent machine learning-based OM systems that transform the matching task into machine-enhanced learning and prediction. The former expert systems require intensive expert knowledge, while the latter predictive systems need a large amount of high-quality data to train the model. The prevalence of LLMs and LLM agents has driven many successful domain-specific applications. However, in the context of OM, using LLMs

This work is licensed under the Creative Commons BY-NC-ND 4.0 International License. Visit <https://creativecommons.org/licenses/by-nc-nd/4.0/> to view a copy of this license. For any use beyond those covered by this license, obtain permission by emailing info@vldb.org. Copyright is held by the owner/author(s). Publication rights licensed to the VLDB Endowment.

Proceedings of the VLDB Endowment, Vol. 18, No. 1 ISSN 2150-8097.
doi:XX.XX/XXX.XX

and LLM agents is currently under-explored. Leveraging LLMs and LLM agents for OM tasks is not an intuitive task, and the challenges will be detailed in the Related Work section.

This paper introduces a novel agent-powered LLM-based design paradigm for OM systems. We propose a generic framework and implement it with a proof-of-concept system. The system extends the LLM capability beyond general question-answering, framing a powerful problem solver for OM tasks. Along with the system, we also develop a set of intuitive tools that facilitate information retrieval, entity matching, and memory storage. Our system is compared to state-of-the-art OM systems, achieving considerable matching performance improvements across three Alignment Evaluation Initiative (OAEI) tracks. Specifically, this paper makes the following contributions:

- We introduce a new agent-powered LLM-based design paradigm for OM systems and propose a novel Agent-OM framework. It consists of the following key components:
 - A LLM acts as a central “brain” to link different modules and instruct their functions via prompt engineering.
 - A pair of planning modules that use CoT for OM decomposition.
 - A set of OM tools using ICL/RAG to mitigate LLM hallucinations.
 - A shared memory module that uses dialogue and hybrid data storage to support the search and retrieval of entity mappings.
- We implement our proposed Agent-OM framework in a proof-of-concept system. The system deals with several critical downstream challenges in leveraging LLM agents for OM, such as cost-effective entity information retrieval, matching candidate selection, and search-based matching functions.
- The experimental results of the system show that Agent-OM achieves results very close to the best long-standing performance on simple OM tasks and significantly improves matching performance on complex and few-shot OM tasks.

The rest of the paper is organised as follows. Section 2 reviews related work. We illustrate the design of our agent-powered LLM-based OM framework in Section 3 and present implementation details in Section 4. Section 5 and 6 evaluate the system, with a discussion in Section 7. We discuss the limitations and future work in Section 8 and 9, respectively. Section 10 concludes the paper.

2 RELATED WORK

OM is typically a non-trivial but essential alignment task for data integration, information sharing, and knowledge discovery [67]. While matching is a prerequisite for interoperating applications with heterogeneous ontologies, OM systems are designed to partially or fully automate matching. The traditional approach using knowledge-based OM systems, such as LogMap [35, 36], Agreement-MakerLight (AML) [21, 22], and FCA-Map [41, 84] has been shown to be precise and effective. However, it is resource-consuming and labour-intensive. It is often difficult to find domain experts to evaluate the matches, and any group of experts may not be able to cover all domain concepts that an expert system requires. A new approach uses machine learning (ML), implemented in systems such as BERTMap [28], LogMap-ML [13], and VersaMatch [23]. ML-based OM systems employ the concept of training and testing in ML, using ontology entities as features for model training or for fine-tuning and then using the model to predict additional correspondences. Specifically, the leading system BERTMap uses a

common language model originating from natural language processing (NLP) (i.e. BERT [16]).

Although ML-based approaches have shown a significant improvement in matching performance, their training-testing paradigm is not feasible for LLMs. The number of parameters used in LLMs is much larger than those of common language models. This means re-training the entire LLMs is almost impossible, and fine-tuning such a large model requires a significant number of samples. A survey in [85] implies that 1000 is a reasonable number of training samples to fine-tune GPT-3, but generally speaking, a domain ontology has only around 100-200 entities. Furthermore, some LLMs are currently only accessible through a web service. This means that training or fine-tuning LLMs with real data risks leaking sensitive information, while using synthetic data, on the other hand, makes it difficult to ensure training quality.

Early studies using LLMs for OM can be found in [29] and [53]. Both works use a purely prompt-based approach via ChatGPT. The prompts are structured as a binary question: given an entity from the source ontology and an entity from the target ontology, the LLMs perform a classification task to determine whether these two entities are identical or not. A similar approach is also used in OLaLa [32] and [25], but their candidate generation is integrated with text embedding extractor models. The authors in [2] explore the potential of using LLMs for complex ontology OM challenges.

LLM agents begin to take shape in AutoGPT [7] and BabyAGI [52]. The recent release of *OpenAI GPTs* [54], *Microsoft Copilot* [46] and *Copilot Studio* [47] sparked an interest in “the world of LLM agents”. Building applications with LLM agents allows users to build their own custom GPTs to support custom business scenarios. In ontology-related tasks, LLM-driven agents have shown impressive performance in automating manual activities in the broader task of ontology engineering [24, 82]. These works pay attention to the use of conversational dialogue to enhance the agent’s capability with human feedback. While this is suitable for tasks that require humans to be in the loop (e.g. collecting competency questions in ontology engineering or validating extended terms in ontology learning), modern OM seeks to automate a complex task with minimal human intervention. Contrasting with these works, our aim is to design a new infrastructure that is able to instruct LLM agents to use planning to decompose a complex task into steps and to use tools to facilitate automated matching (a.k.a. function calling), instead of purely using agent-based conversational dialogue, or even when specialised as ontology-oriented dialogue as in [59, 83].

We introduce our novel agent-powered LLM-based design paradigm for OM systems. We have two generic agents; each one is self-contained and designed to instruct LLMs to use extensive planning, memory, and tools, thus unlocking their generative capacity to handle various types of OM tasks in different contexts. Meanwhile, as a key enabler for precise decision-making, we also put effort into limiting the current LLM’s flaws in hallucination, context understanding, and non-linguistic reasoning. Several OM-related tools have been created for this purpose. These tools enable LLM agents to simulate a genuine OM system, automating the entire matching process without human intervention. The overall infrastructure offers high scalability and allows extensive customisation. To the best of our knowledge, this study is the first attempt to introduce an LLM-agent-based framework for OM tasks.

3 MATCHING WITH LLM AGENTS

Given a source ontology (O_s) and a target ontology (O_t), OM aims to find an alignment (A) that contains a set of pairs-matched entities $\{(e_i, e_j) | e_i \in O_s, e_j \in O_t\}$. A classical matching process has two main steps: retrieval and matching. The retrieval step involves retrieving internal information from the ontology itself (R_{int}) and external information from a domain-specific thesaurus (R_{ext}). The matching step involves selecting the matching candidates (M_{sel}), running the matching algorithms (M_{alg}), and refining the matching results (M_{ref}). A classical OM can be formulated as:

$$R_{int} \Rightarrow R_{ext} \Rightarrow M_{sel} \Rightarrow M_{alg} \Rightarrow M_{ref} \quad (1)$$

Figure 1 shows the architecture of *Agent-OM*, our LLM-based agent-powered OM framework. It retains the original input and output of the classical OM but modularises the two main steps with autonomous LLM agents, namely Retrieval Agent (*Agent_R*) and Matching Agent (*Agent_M*). We call these two LLM agents “Siamese” because they have their own planning modules and related tools but share the same memory. The memory is responsible for storing the information retrieved from the Retrieval Agent (R_{sto}) and facilitating the search of the stored information by the Matching Agent (M_{sea}). Therefore, an agent-based OM is formulated as:

$$Agent_R_{(R_{int} \Rightarrow R_{ext} \Rightarrow R_{sto})} \Rightarrow Agent_M_{(M_{sea} \Rightarrow M_{sel} \Rightarrow M_{alg} \Rightarrow M_{ref})} \quad (2)$$

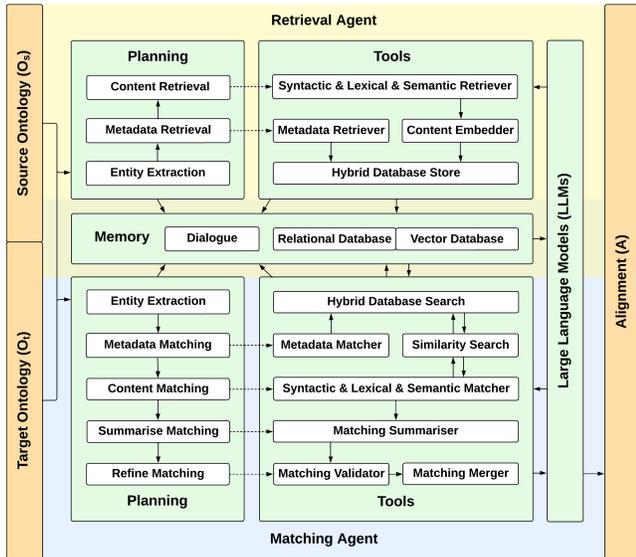


Figure 1: Architecture of *Agent-OM*.

For each autonomous agent, the workflow is described as follows. The planning module decomposes a complex task into several subtasks and defines the order of subtasks and tools to be invoked. The plan is stored in the dialogue and passed to the LLMs. LLMs then invoke the tools to perform the subtasks. The tools are allowed to communicate with each other, and intermediate results are stored in the dialogue. The tools can also access the database via the CRUD (create, read, update, and delete) functions provided. The entire workflow is driven by LLM prompts. We use solid lines to show the actual workflow controlled by the LLMs, and dotted lines to show the implicit link between a subtask and its corresponding tool activated by the LLMs.

3.1 Retrieval Agent

The Retrieval Agent is responsible for extracting entities from the ontologies, eliciting their metadata and content information, and storing them in the hybrid database. For each entity extracted from the source and target ontologies, the planning module generates the instruction for retrieving the relevant information and feeding it into the LLMs to invoke the corresponding retrieval tools. The entity’s metadata is retrieved by the metadata retriever and is directly stored in the relational database through the database store tool. For the entity’s content, the module elicits its syntactic, lexical, and semantic information through the corresponding retrievers. Unlike the entity’s metadata, the entity’s content is vectorised via an embedding model and then stored in the vector database to enable the similarity search based on relative distance in the embedding space. The tools used in the Retrieval Agent include Metadata Retriever, Syntactic & Lexical & Semantic Retriever, and Hybrid Database Store with Content Embedder, described as follows.

- Metadata Retriever (R_{int}): The metadata retriever collects the metadata of the input entity from the ontology, including its *category* (i.e. from the *source* ontology or from the *target* ontology) and *type* (i.e. *named class* or *property*).

- Syntactic Retriever (R_{int}): The syntactic retriever is responsible for providing a unified text preprocessing result. A common text preprocessing pipeline consists of tokenisation, normalisation, stop-words removal, and stemming/lemmatisation [3]. According to our prior study in OM, only tokenisation and normalisation help both matching completeness and correctness. The other two pipeline methods, stop-words removal and stemming/lemmatisation, could cause unwanted false mappings. For this reason, our syntactic retriever considers only tokenisation and normalisation. We select white spaces to separate the words so that the outputs are short sentences that are easier for LLMs to understand.

- Lexical Retriever (R_{int} & R_{ext}): We consider three key aspects of the entity’s lexical information: the general meaning (R_{ext}), the context meaning (R_{ext}), and the content meaning (R_{int}). In the context of OM, the general meaning is traditionally generated from Wikipedia [73] or similar corpus-based knowledge bases (KBs). As LLMs are trained from these KBs, we use the prompt “What is the meaning of {entity_name}?” for the same function. However, using only the general meaning is not sufficient. Using the context constraint “in the context of {context}” is effective in domain-specific tasks. Popular GPT-based domain applications, such as Law-GPT [42] and Medical-GPT [74], use similar approaches. Additionally, we also retrieve content information from `rdfs:label`, `rdfs:comment`, `skos:prefLabel`, and `skos:definition` properties, where the ontology creators may add comments or explanations. These are also useful for understanding the exact meaning of the entity.

- Semantic Retriever (R_{int}): The entity’s semantic information includes its basic triple-based relations and more complex logic-based axioms. In this paper, we only consider triple-based relations that can be verbalised into a more natural language-like presentation via a prompt-based verbalisation tool. Such prompt-based tools are not capable of handling complex logic-based axioms. These functions can only be achieved with external packages, such as OWL Verbaliser [37], Sydney OWL Syntax [15], and the DeepOnto [30] verbalisation module [31].

- Hybrid Database Store with Content Embedder (R_{sto}): We use a hybrid database system consisting of a traditional relational database and an advanced vector database. Entity metadata, such as the entity’s category and type, are stored in the traditional relational database. In contrast, natural language-based content information, such as the entity’s syntactic, lexical, and semantic information, is stored in the vector space for advanced similarity search. A unique key links these two databases.

3.2 Matching Agent

The Matching Agent is responsible for finding possible correspondences, ranking and refining the results according to different criteria, and selecting the most relevant candidate. For each entity extracted from the ontologies, the planning module generates the instruction for the matching types to be considered and feeds it into the LLMs to invoke the corresponding matching tools. The planning module first selects the source ontology as a starting point, extracting the entities from the ontology. Then, different matchers perform syntactic, lexical, or semantic matching functions to find the most relevant mappings to the input entity, using a hybrid search across the relational and vector databases. A predicted mapping is based on a summarised profile measure of syntactic matching, lexical matching, and semantic matching, with matching validation. The same procedure applies to the target ontology as a starting point, and the results of the common candidates are combined. The tools used in the Matching Agent include Hybrid Database Search, Metadata Matcher, Syntactic & Lexical & Semantic Matcher, Matching Summariser, Matching Validator, and Matching Merger.

- Hybrid Database Search (M_{sea}): The hybrid database search serves as an interface for the database accessible by the Metadata Matcher and Syntactic & Lexical & Semantic Matcher.
- Metadata Matcher (M_{sel}): The metadata matcher collects the type and category of the input entity.
- Syntactic & Lexical & Semantic Matcher (M_{sel}): The generation of syntactic/lexical/semantic matching for the input entity is based on a hybrid database search. Given an input entity, the matchers first perform a joint search to find this related syntactic/lexical/semantic information in the vector database. A similarity search is performed using cosine similarity, defined for entities **A** and **B** as:

$$S_C(\mathbf{A}, \mathbf{B}) = \frac{\mathbf{A} \cdot \mathbf{B}}{\|\mathbf{A}\| \|\mathbf{B}\|} = \frac{\sum_{i=1}^n A_i B_i}{\sqrt{\sum_{i=1}^n A_i^2} \sqrt{\sum_{i=1}^n B_i^2}} \quad (3)$$

We then apply an extended search in the relational database to filter the results based on the entity’s metadata.

- Matching Summariser (M_{alg}): We use reciprocal rank fusion (RRF) [14] to summarise the matching results. Viewing each piece of the entity’s information as a document, the purpose of reciprocal rank is to accumulate the inverse of the ranks r of documents d over multiple-ranking results from syntactic, lexical, and semantic matching, defined as:

$$RRF(d \in D) = \sum_{r \in R} \frac{1}{k + r(d)} \quad (4)$$

Conventionally, k is set to 0 as we do here. This ensures that the formula most highly rewards highly ranked entities. In our case, we are evaluating each entity that occurs in the top@k of each of the three rankings (i.e. syntactic matching, lexical matching,

and semantic matching), and combining their results as an overall matching summary.

- Matching Validator (M_{ref}): Validation is a critical step in minimising LLM hallucinations, as illustrated in SelfCheckGPT [44] and Self-RAG [5]. We also apply this method to the summarised results. We ask the LLM a binary question “Is {entity} in the context of {context} equivalent to {predicted_entity} in the context of {context}?” to check whether the predicted entity is equivalent to the input entity in the provided context. For computational efficiency, we iterate the comparison from rank 1 to n and stop when we find a “yes” answer.
- Matching Merger (M_{ref}): The matching merger is responsible for combining the results from a search of the source ontology and a search of the target ontology. In this study, we select the common correspondences found on both sides. As an agent-based system, this can be extended to use multi-agent negotiation via the correspondence inclusion dialogue [59].

4 IMPLEMENTATION DETAILS

We implement our design of the framework in a proof-of-concept system. The components and their implementation are as follows:

- LLMs: Our system supports a wide range of LLMs, including OpenAI GPT [56], Anthropic Claude [4], Mistral AI [50], Meta Llama [45], Google Gemma [26], and Alibaba Qwen [1]. We select a total of 9 models in this study. 5 models are API-accessed commercial LLMs, while the other 4 are open-source LLMs. Table 1 gives the details. For API-accessed LLMs, we include two models of different sizes for each category. For open-source LLMs, we select models with similar sizes (7-9 billion parameters) from different categories.

Table 1: Details of LLMs used in this study.

Family	Model	Size	Version
GPT	gpt-4o	N/A	gpt-4o-2024-05-13
	gpt-4o-mini	N/A	gpt-4o-mini-2024-07-18
Claude	claude-3-sonnet	N/A	claude-3-sonnet-20240229
	claude-3-haiku	N/A	claude-3-haiku-20240307
Mistral	mistral-small	N/A	mistral-small-2402
	mistral-7b*	4.1 GB	Ollama Model ID: f974a74358d6
Llama	llama-3-8b*	4.7 GB	Ollama Model ID: 365c0bd3c000
Gemma	gemma-2-9b*	5.4 GB	Ollama Model ID: ff02c3702f32
Qwen	qwen-2-7b*	4.4 GB	Ollama Model ID: e0d4e1163c58

* indicates open-source LLMs.

- Planning: We select the LangChain library [39]. The library provides a wide range of agents. We select the tool calling agent (the term “tool calling” is interchangeable with “function calling”). At the time of writing, the LangChain package only supports this type of agent used with commercial API-accessed LLMs. To extend our framework to open-source LLMs, we employ the similar concept of “chain” to simulate tool calling agents for open-source LLMs.
- Memory: (1) Short-term memory: We use a conversational dialogue to store the original intermediate output of each operating process, with no map-reduce applied. (2) Long-term memory: We select a hybrid database consisting of a traditional relational database and an advanced vector database. PostgreSQL [62] supports a standalone integration of the traditional relational database and the

extended vector database using pgvector [61]. We select OpenAI Embedding [55] for the content embedding in the vector database. Alternatives are VertexAIEmbeddings [27] or Sentence-BERT [64], but the dimension of the embedding changes between different embedding models.

- **Tools:** To demonstrate the flexibility of our framework, we present the usage of prompt-based tools and programming-based tools, as well as the tools that combine a mixture of prompt-based and programming-based tools.

4.1 Ontology Naming Conventions

In this work, the term *entity* is a general expression for ontology classes or properties (without specifying which). We use *entity_uri* to mean a fully expanded class name or property name with respect to its prefix. We use *entity_name* to mean a class name or property name without its prefix. For example, *entity_uri* is “http://cmt#ProgramCommitteeChair” and the *entity_name* is “ProgramCommitteeChair”.

Naming conventions for ontology entities fall into two categories: the name has a natural language meaning (Type 1); or the name is a URI or code (Type 2). We observe that LLMs can perform well with meaningful entity names (e.g. ProgramCommitteeChair and Chair_PC). Often in larger biomedical ontologies each entity name is a unique identifier or code, and the meaningful description of the entity is in its label or comment (e.g. MA_0000270 and NCI_C33736). For this type of naming convention, LLMs tend to generate the wrong synthesised label or comment corresponding to the code. For example, LLMs can mistakenly interpret the codes “MA_0000270” and “NCI_C33736” to be “limb” and “Extremity”, while the intended meanings of these two codes are “eyelid tarsus” and “Tarsal Plate”.

To handle the variety of ontology naming conventions and standardise their usage in LLM-based OM, we use a unified naming convention in this study. For an entity with a unique identifier or code, we use its label or comment instead. For example, we use “eyelid tarsus” and “Tarsal Plate” instead of “MA_0000270” and “NCI_C33736”. In case the two ontologies reuse the same entity, we add the type as a prefix for each entity. For example, if the “ProgramCommitteeChair” appears in both the source ontology and the target ontology, the unique identifier for each entity are “[INDEX]-Source-Class-ProgramCommitteeChair” and “[INDEX]-Target-Class-ProgramCommitteeChair”.

4.2 Running Example

To demonstrate the usability of our framework, we choose the CMT-ConfOf alignment as a sample alignment. The CMT Ontology is the source ontology and the ConfOf Ontology is the target ontology. These two ontologies contain similar concepts related to conference organisation. The running example aims to find the most relevant entity in the target ontology corresponding to the entity “http://cmt#ProgramCommitteeChair” in the source ontology.

4.2.1 Retrieval Agent. Table 2 illustrates the actions performed by the Retrieval Agent. We use a prompt to invoke the Metadata Retriever, Syntactic & Lexical & Semantic Retriever, and Hybrid Database Store with Content Embedder in sequential order.

For the input “http://cmt#ProgramCommitteeChair” from the source ontology, the output of the Syntactic Retriever is “program

committee chair”. The agent further invokes the Lexical Retriever to generate a detailed description: “In the context of a conference, ‘ProgramCommitteeChair’ refers to ...” The Semantic Retriever generates related triple relations, such as “ProgramCommitteeChair rdfs:subClassOf ProgramCommitteeMember”. These triples are verbalised into phrases using spoken language: The class “ProgramCommitteeChair” is a subclass of “ProgramCommitteeMember”.

While each entity has its own syntactic, lexical, and semantic information, a heuristic approach to deciding if two entities are the same is to generate a binary question for every pair of entities as a prompt to the LLM: “Is Entity1 equivalent to Entity2? Consider the following: The syntactic information of Entity1 is... The lexical information of Entity1 is... The semantic information of Entity1 is... The syntactic information of Entity2 is... The lexical information of Entity2 is... The semantic information of Entity2 is...” This approach has two limitations. (1) LLMs have token limits that restrict the number of tokens processed for each interaction. Combining all the retrieved information may exceed token limits. (2) The binary comparison is costly because the complexity of the comparison is the Cartesian product of the number of entities in the source ontology and the target ontology.

We bypass these limitations by (1) using an open question instead and (2) storing useful information in a searchable database. Figure 2 shows the entity metadata and content information stored in the relational database and the vector database, respectively. On one hand, the entity’s metadata is needed to find an exact match. In other words, the matched entity needs to have the same metadata as the target entity. For example, “http://cmt#ProgramCommitteeChair” is a class in the source ontology, so the matched entity should be a class in the target ontology. On the other hand, content information including an entity’s syntactic, lexical, and semantic information is used for a similarity-based match because they are usually retrieved as natural language, which can be more ambiguous than metadata. Similarity between natural language terms is commonly based on embedding vectors, for which the vector database enables fast similarity searches.

4.2.2 Matching Agent. Table 3 demonstrates the actions performed by the Matching Agent. We use a prompt to invoke the Metadata Matcher with Hybrid Database Search, Syntactic & Lexical & Semantic Matcher with Hybrid Database Search and Similarity Search, Matching Summariser, Matching Validator, and Matching Merger in sequential order.

For a given entity “http://cmt#ProgramCommitteeChair” from the source ontology, the most relevant entity found by the matchers are stored in short-term memory and combined using the RRF function. The result of the Matching Summariser is a list of predicted mappings. The last step is to refine the predicted mappings. The Matching Validator asks a binary question to compare whether the given entity is the same or different to the predicted relevant entity in ascending order. Because the agent receives a “yes” answer for the first iteration of the entity “http://confOf#Chair_PC”, the Matching Agent outputs “http://confOf#Chair_PC” as the most relevant entity found in the target ontology. The Matching Merger combined the results from the same procedure applied in the search from “http://confOf#Chair_PC” in the target ontology. These two terms are considered as matched entities only if the mapping can be

Table 2: Tools Used in the Retrieval Agent.

<p>Tool: Metadata Retriever</p> <p>Input: {entity_uri} = "http://cmt#ProgramCommitteeChair"</p> <p>Extract: {source_or_target} = "Source", {entity_type} = "Class"</p>
<p>Tool: Syntactic Retriever</p> <p>Input: {entity_uri} = "http://cmt#ProgramCommitteeChair"</p> <p>Extract: {entity_name} = "ProgramCommitteeChair" based on {entity_uri}.</p> <p>Function Calling: cleaning(entity_name)</p> <p>Output: "program committee chair" (AI-generated content)</p>
<p>Tool: Lexical Retriever</p> <p>Input: {entity_uri} = "http://cmt#ProgramCommitteeChair", {context} = "conference"</p> <p>Extract: {entity_name} = "ProgramCommitteeChair" based on {entity_uri}.</p> <p>{extra_information} based on {entity_name} related rdfs:label, rdfs:comment, skos:prefLabel, and skos:definition.</p> <p>Prompt: <i>Question: What is the meaning of entity_name? Context: {context} Extra Information: {extra_information}</i></p> <p><i>Answer the question within the context and using the extra information.</i></p> <p>Output: "In the context of a conference, 'ProgramCommitteeChair' refers to ..." (AI-generated content)</p>
<p>Tool: Semantic Retriever</p> <p>Input: {entity_uri} = "http://cmt#ProgramCommitteeChair"</p> <p>Function Calling: generate_subgraph(entity_uri)</p> <p>Output: subgraph</p> <p>Prompt: <i>Verbalise triples into phrases using spoken language: {subgraph}</i></p> <p>Output: "The class 'ProgramCommitteeChair' is a subclass of 'ProgramCommitteeMember' ..." (AI-generated content)</p>
<p>Tool: Hybrid Database Store with Content Embedder</p> <p>Input: {entity_uri} = "http://cmt#ProgramCommitteeChair", {source_or_target} = "Source", {entity_type} = "Class"</p> <p>Extract: {entity_id} = "023-Source-Class-ProgramCommitteeChair"</p> <p>Query: Create a relational database and store entity's metadata</p> <pre> DROP TABLE IF EXISTS ontology_matching CASCADE; CREATE TABLE (entity_id VARCHAR(1024) PRIMARY KEY, entity TEXT, source_or_target TEXT, entity_type TEXT); INSERT INTO ontology_matching (entity_id, entity, source_or_target, entity_type) VALUES ({entity_id}, {entity}, {source_or_target}, {entity_type}); </pre> <p>Input: {entity_syntactic} = "program committee chair", {entity_lexical} = "In the context of conference, 'ProgramCommitteeChair' refers to ...", {entity_semantic} = "The class 'ProgramCommitteeChair' is a subclass of 'ProgramCommitteeMember' ...", {matching_table} = "syntactic_matching/lexical_matching/semantic_matching"</p> <p>Extract: {entity_embedding} based on {entity_syntactic}/{entity_lexical}/{entity_semantic}.</p> <p>Query: Create a vector database and store entity's syntactic, lexical, and semantic information</p> <pre> CREATE EXTENSION IF NOT EXISTS vector; DROP TABLE IF EXISTS {matching_table}; CREATE TABLE {matching_table} (entity_id VARCHAR(1024) NOT NULL REFERENCES ontology_matching(entity_id), content TEXT, embedding vector(1536)); INSERT INTO {matching_table} (entity_id, content, embedding) VALUES ({entity_id}, {entity_syntactic}/{entity_lexical}/{entity_semantic}, {entity_embedding}); </pre> <p>Output: One relational database table (ontology_matching) and three vector database tables (syntactic_matching, lexical_matching, and semantic_matching).</p>

found bidirectionally (i.e. "http://cmt#ProgramCommitteeChair" is also found to be the most relevant entity in the source ontology for the search from "http://confOf#Chair_PC" in the target ontology).

5 EVALUATION

5.1 Evaluation Criteria

In information retrieval, a common assessment for matching tasks is based on comparing predicted results with expected output. Precision and recall are used to measure the correctness and completeness of the matching, respectively. When adapting these measures to OM, the predicted results generated by the system are denoted

Alignment (A), and the expected results provided by the domain experts are denoted Reference (R) [17]. Therefore, Precision and Recall for OM tasks are defined as:

$$Precision = \frac{|A \cap R|}{|A|} \quad Recall = \frac{|A \cap R|}{|R|} \quad (5)$$

F_β presents a harmonic mean value of precision and recall, measuring the overall matching performance. Assuming precision and recall are weighted equally in F_β , F_β is equivalent to the F1 score, defined as:

$$F_1 \text{ Score} = \frac{2}{Precision^{-1} + Recall^{-1}} \quad (6)$$

Table 3: Tools Used in the Matching Agent.

<p>Tool: Metadata Matcher with Hybrid Database Search</p> <p>Input: {entity_uri} = "http://cmt#ProgramCommitteeChair", {source_or_target} = "Source" {matching_table} = "syntactic_matching/lexical_matching/semantic_matching"</p> <p>Query: Get entity id</p> <pre> SELECT o.entity_id FROM ontology_matching o WHERE o.entity = {entity_uri} and o.source_or_target = {source_or_target}</pre> <p>Output: {entity_id} = "023-Source-Class-ProgramCommitteeChair"</p> <p>Query: Get entity metadata</p> <pre> SELECT o.entity_type, m.content_embedding From ontology_matching o, {matching_table} m WHERE o.entity_id = m.entity_id AND o.entity_id = {entity_id};</pre> <p>Output: {entity_type} = "Class", {content_embedding} = [...]</p>
<p>Tool: Syntactic & Lexical & Semantic Matcher with Hybrid Database Search and Similarity Search</p> <p>Input: {content_embedding} = [...], {matching_table} = "syntactic_matching/lexical_matching/semantic_matching", {similarity_threshold} = 0.90, {top_k} = 3, {source_or_target} = "Source", {entity_type} = "Class"</p> <p>Query: Search for similar entities</p> <pre> WITH vector_matches AS (SELECT entity_id, 1 - (content_embedding <=> `{content_embedding}`) AS similarity FROM {matching_table} WHERE 1 - (content_embedding <=> `{content_embedding}`) > {similarity_threshold}) SELECT o.entity_id, v.similarity as similarity FROM ontology_matching o, vector_matches v WHERE o.entity_id IN (SELECT entity_id FROM vector_matches) AND o.entity_id = v.entity_id AND o.source_or_target != {source_or_target} AND o.entity_type = {entity_type} ORDER BY similarity DESC LIMIT {top_k};</pre> <p>Output: {rankings} = [syntactic_matching: [], lexical_matching: ['095-Target-Class-Chair_PC'], semantic_matching: ['103-Target-Class-Member_PC', '092-Target-Class-Author', '123-Target-Class-University']] (AI-generated content)</p>
<p>Tool: Matching Summariser</p> <p>Function Calling: reciprocal_rank_fusion(rankings)</p> <p>Output: {matching_summary} = [(1.0, ["095-Target-Class-Chair_PC", "103-Target-Class-Member_PC"]), (0.5, ["092-Target-Class-Author"]), (0.33, ["123-Target-Class-University"])] (AI-generated content)</p>
<p>Tool: Matching Validator</p> <p>Input: {context} = "conference", {matching_summary} = [...]</p> <p>Extract: Each {predicted_entity} from {matching_summary}. Stop on finding a "yes" answer.</p> <p>Prompt: <i>Question: Is {entity} equivalent to {predicted_entity}? Context: {context}</i> <i>Answer the question within the context. Answer yes or no. Give a short explanation.</i></p> <p>Output: {entity_id} = "095-Target-Class-Chair_PC" "095-Target-Class-Chair_PC": "Yes. In the context of a conference, the term "program committee chair" is equivalent to "chair PC." Both refer to the individual responsible for leading the program committee, which is in charge of organizing and overseeing the review and selection of conference submissions." "103-Target-Class-Member_PC": "No. The program committee chair is not equivalent to a member of the program committee (PC). The chair is responsible for overseeing the entire review process, coordinating the activities of the PC members, and making final decisions on the conference program. In contrast, a PC member primarily reviews and evaluates submitted papers." (AI-generated content)</p> <p>Query: Get entity</p> <pre> SELECT o.entity FROM ontology_matching o WHERE o.entity_id = {entity_id}</pre> <p>Output: {entity} = "http://confOf#Chair_PC"</p>
<p>Tool: Matching Merger</p> <p>Output: Merge entities found in the target ontology that are equivalent to "http://confOf#Chair_PC" in the source ontology.</p>

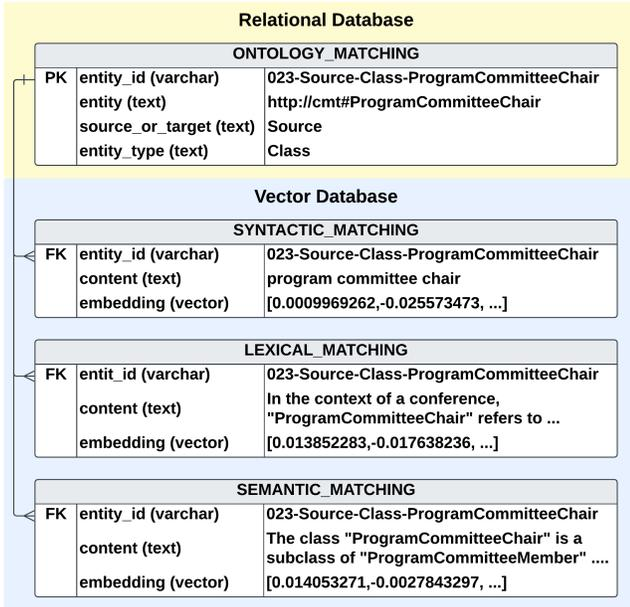


Figure 2: Storing “http://cmt#ProgramCommitteeChair”.

An ontology contains classes, properties, and individuals. In this paper, we consider only classes and properties, and individuals are excluded. Possible logical relations between classes (respectively properties) can be equivalence (\equiv) and subsumption (either \subseteq or \supseteq). In this study, we only consider the logical relation of equivalence (\equiv) between classes/properties.

5.2 Evaluation of Three OAEI Tracks

In this section, we test our proof-of-concept system with three OAEI tracks containing different types of OM tasks. These include few-shot tasks with a small proportion of trivial correspondences (5.2.1 Test Case), simple tasks with a large proportion of trivial correspondences (5.2.2 Test Case 1 and 5.2.3 Test Case 3), complex tasks with a large proportion of non-trivial correspondences (5.2.2 Test Case 2), with noisy references (5.2.3 Test Case 1), or requiring domain-specific knowledge (5.2.3 Test Case 2). We report the evaluation metrics for the best-performing singular model gpt-4o and its hyperparameter settings over a single run. We ran multiple trials and found slight differences in the results due to the non-determinism of LLMs, but these differences are insignificant with respect to the precision of the results we report. For all test cases in the three OAEI tracks, we select the hyperparameter settings of similarity_threshold = 0.90 and top@k = 3. See Section 6.2 for discussions on the hyperparameter settings of Agent-OM.

5.2.1 OAEI Conference Track. The OAEI conference track contains a pairwise alignment of 7 small and medium-sized conference-related ontologies with a total of 21 matching tasks [12, 68, 69, 81]. In each alignment, the trivial correspondences that can be used to train the models are very limited (commonly less than 10). All conference ontologies in this track use the Type 1 naming convention, where the names of classes and properties have actual meanings. In this study, we use the publicly available reference ra1-M3 as the reference (R), including class and property mappings.

Figure 3 compares Agent-OM with the results of the 15 OM systems in OAEI 2022 and OAEI 2023. Agent-OM achieves above-average performance. Its overall F1 score ranks 3/13 in 2022 and 5/12 in 2023. We note that ra1-M3 is known to be incomplete with valid equivalence mappings missing. We believe that Agent-OM could achieve better performance over a complete reference such as ra2-M3 or rar2-M3. These two are not publicly available at the time of writing.

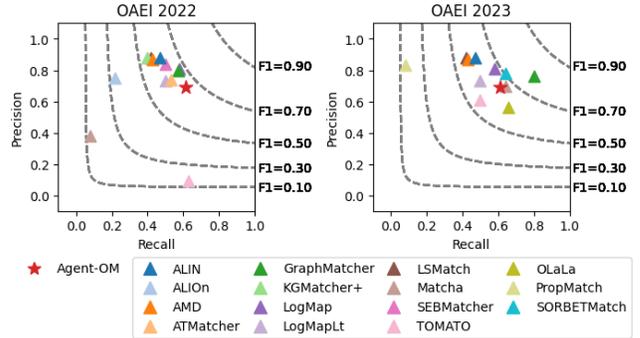


Figure 3: OAEI Conference Track Test Case.

5.2.2 OAEI Anatomy Track. The OAEI anatomy track contains only a reference alignment of human and mouse anatomy, created and evolved from [8, 10, 20]. Both ontologies use the Type 2 naming convention, where the names of classes and properties are biomedical codes. We report the results of our evaluation in two test cases: alignment with trivial correspondences and alignment with non-trivial correspondences.

(1) **Test Case 1:** The track originally contains a large proportion of trivial correspondences (e.g., “femoral artery” and “Femoral_Artery”). Figure 4 compares Agent-OM with the results of the 12 OM systems in OAEI 2022 and OAEI 2023 for alignment with trivial correspondences. Almost all OM systems achieve relatively high precision and recall when matching with trivial correspondences. For Agent-OM, its overall F1 score ranks the second highest in 2022 and 2023.

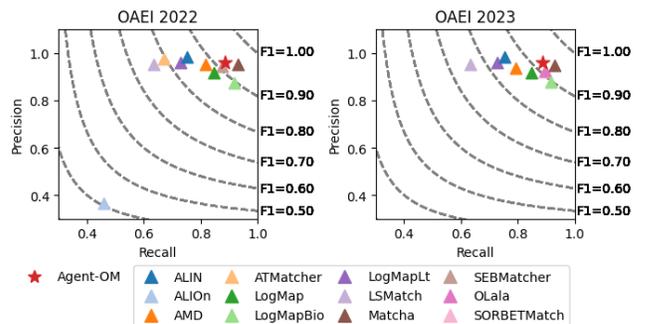


Figure 4: OAEI Anatomy Track Test Case 1.

(2) **Test Case 2:** We remove these correspondences from both the reference (R) and alignment (A) to focus the matching performance comparison on non-trivial correspondences. Figure 5 compares Agent-OM with the results of the 12 OM systems in OAEI 2022 and OAEI 2023 for alignment with non-trivial correspondences. We observe better performance by Agent-OM. The overall F1 score of Agent-OM is superior to the other 11 traditional OM systems,

better than 2 LLM-based systems (OLaLa and SORBETMatch), and only behind 1 deep learning (DL)-based OM system (Matcha). DL systems are expected to perform better with large training sets (i.e. trivial correspondences).

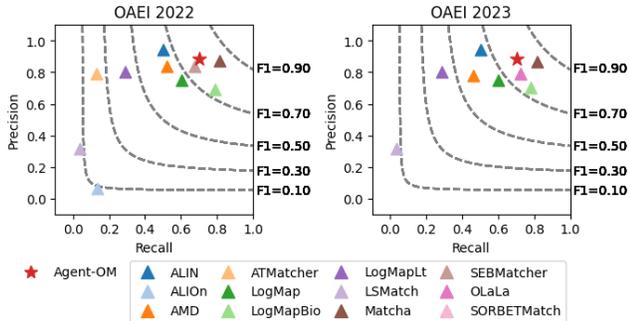


Figure 5: OAEI Anatomy Track Test Case 2.

5.2.3 *OAEI MSE Track*. The OAEI MSE track provides a reference alignment of ontologies in materials science and engineering [18]. The track contains three test cases aligning MaterialInformation [6], MatOnto [33], and EMMO [70]. MaterialInformation and MatOnto use the Type 1 naming convention, while EMMO uses the Type 2 naming convention.

(1) Test Case 1: This case provides the reference alignment of the small reduced version of MaterialInformation and the medium-sized MatOnto. The challenge of this task arises due to the reference intentionally including several subsumption correspondences, and OM systems may mistakenly map subsumptions into equivalence correlations. Figure 6 compares Agent-OM with the results of the 4 OM systems in OAEI 2022 and OAEI 2023. Agent-OM achieves the best performance, with the highest recall and F1 score in the OAEI 2022 and 2023 results.

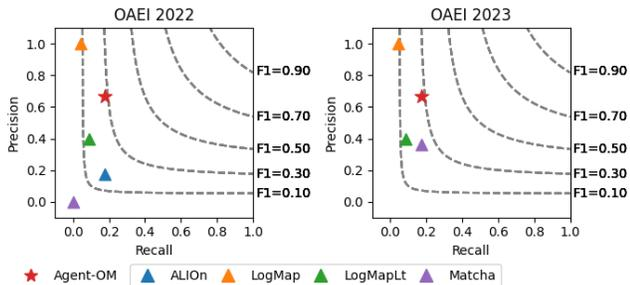


Figure 6: OAEI MSE Track Test Case 1.

(2) Test Case 2: This case provides the reference alignment of the full version of the large MaterialInformation and the medium-sized MatOnto. The challenge of this task is to understand and align the specific terminology, abbreviations, and acronyms used in materials science. For example, “Au” stands for “Gold”, “Ag” stands for “Silver”, and “Cu” stands for “Copper”. Figure 7 compares Agent-OM with the results of the 4 OM systems in OAEI 2022 and OAEI 2023. Agent-OM achieves the best performance in precision, recall, and overall F1 score across the OAEI 2022 and OAEI 2023 results.

(3) Test Case 3: This case provides the reference alignment of the full version of the large MaterialInformation and medium-sized EMMO. Unlike MatOnto used in Test Case 1 and Test Case 2, EMMO

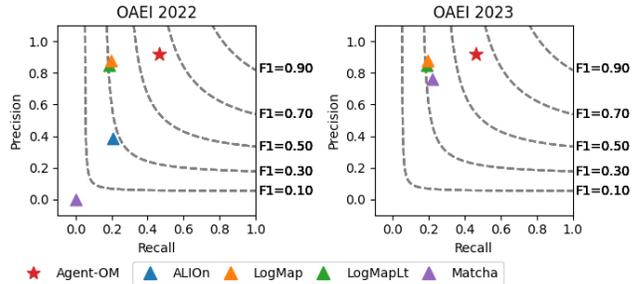


Figure 7: OAEI MSE Track Test Case 2.

extends the upper ontology called Basic Formal Ontology (BFO). This means that the classes in EMMO are somewhat standardised according to the BFO classes. Figure 8 compares Agent-OM with the results of the 4 OM systems in OAEI 2022 and OAEI 2023. The matching performance of Agent-OM is the best in the OAEI 2022 results and second in the OAEI 2023 results. It is better than LogMap and LogMapLt and only behind the DL-based OM system Matcha.

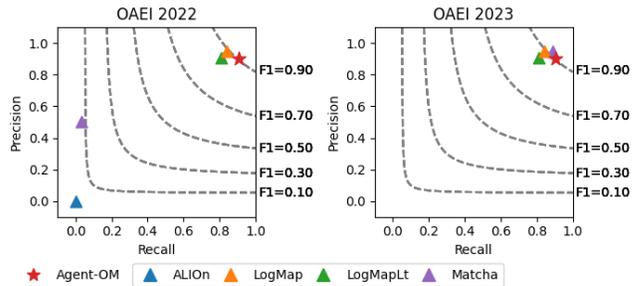


Figure 8: OAEI MSE Track Test Case 3.

6 ABLATION STUDY

6.1 System Components

6.1.1 *Architectures*. We compare Agent-OM with two simpler architectures where the OM is much more reliant on straightforward LLM use. (1) *LLM-Zero-Shot*: Given O_s and O_t , this approach extracts each $e1 \in O_s$ and $e2 \in O_t$. The comparison is purely based on LLMs without any additional information. (2) *LLM-Few-Shot*: Given O_s and O_t , this approach extracts each $e1 \in O_s$, $e2 \in O_t$ and their syntactic, lexical, and semantic information. The comparison uses LLMs to determine whether two concepts are identical or not based on the information provided.

The experiment is run on the CMT-ConfOf alignment demonstrated in Section 4.2. We use the GPT model gpt-4o-mini with similarity_threshold=0.90. Figure 9 compares Agent-OM with *LLM-Zero-Shot* and *LLM-Few-Shot*. *LLM-Zero-Shot* shows higher recall with lower precision, a phenomenon of LLM hallucinations. *LLM-Few-Shot* partially overcomes this deficiency by providing additional information, but token consumption is extremely high without optimising the matching candidate selection. Our Agent-OM architecture is advanced in handling these two main challenges with tool calling agents and hybrid database searches. Note that the CMT-ConfOf alignment demonstrated here is a small alignment task, while Agent-OM is expected to be relatively more effective and efficient in large-scale OM tasks.

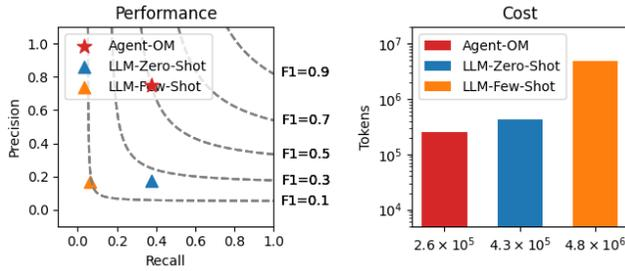


Figure 9: Comparison of LLM-based architectures.

6.1.2 *LLMs*. Figure 10 shows the results of testing different LLMs on the OAEI Anatomy Track. In general, API-accessed models perform better than open-source models. The leading model is gpt-4o, followed by gpt-4o-mini, claude-3-sonnet, mistral-small, and claude-3-haiku. Among open-source models, gemma-2-9b currently achieves the best performance, followed by mistral-7b and qwen-2-7b. The performance of llama-3-8b is relatively poor.

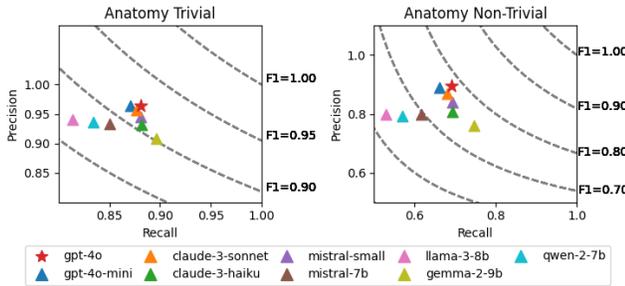


Figure 10: Comparison of different LLMs.

6.1.3 *Text Embedding Models*. We also test different text embeddings on the OAEI Anatomy Track. The default length of the embedding vector is 1536 for text-embedding-ada-002 and text-embedding-3-small, and 3072 for text-embedding-3-large. We do not observe a significant difference arising from varying the text embeddings from text-embedding-3-small to text-embedding-3-large. We also do not see that text-embedding-3-small and text-embedding-3-large perform better than text-embedding-ada-002.

6.1.4 *Hybrid Database*. The use of a hybrid database unlocks the potential for search-based OM. We define N_s and N_t as the number of entities extracted from the source ontology (O_s) and the target ontology (O_t). In classical LLM-based OM, the matching is based on binary questions to compare each pair of entities from O_s and O_t based on their relevant information. The number of tokens consumed is $N_s * N_t$ (for retrieval and matching). In search-based OM, we first retrieve entity information from O_s and O_t and store it in a hybrid database. Then, we apply the search function for each entity from source-to-target ($O_s \Rightarrow O_t$) and target-to-source ($O_s \Leftarrow O_t$) and find the top@k candidates with the highest similarity. Finally, we validate the candidates one by one using a binary question and merge the matching results ($O_s \Leftrightarrow O_t$). The number of tokens consumed is $N_s + N_t$ (for retrieval) + 0 (for search) + $k(N_s + N_t)$ (for validation) + 0 (for merge). Search-based OM is cost-effective because the inequality $(k + 1)(N_s + N_t) < N_s * N_t$ always holds in common OM task settings where $N_s, N_t \gg k + 1$. We also apply two approaches to reduce LLM hallucinations (i.e. false positive mappings in search results): validator and merger.

6.1.5 *Matching Validator*. We employ a validator by asking the LLM to self-check the candidate correspondences. It is helpful in detecting two common types of false positive mappings: (1) non-existent mappings and (2) counter-intuitive mappings. Figure 11 compares precision, recall, and F1 score without validation and with validation in the three OAEI tracks we analysed. The matching results with validation generally achieved an improvement in precision and F1 score, with a slight decrease in recall (we only find one exception in the MaterialInformationReduced-MatOnto alignment). This is in line with the findings in CoT with self-consistency (CoT-SC) [76], where the provision of a self-check can reduce LLM hallucinations. Note that our experiment set the similarity_threshold $T \in [0.90, 0.95]$, so the improvement in matching performance is not statistically significant, but the matching validator will have a great impact on performance with lower similarity thresholds.

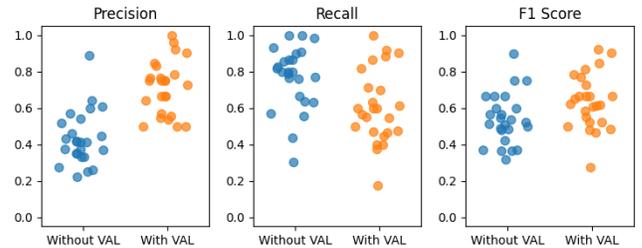


Figure 11: Comparison of without/with matching validator.

6.1.6 *Matching Merger*. We apply a merge function $O_s \Leftrightarrow O_t$ combining the results of $O_s \Rightarrow O_t$ and $O_s \Leftarrow O_t$ to improve the matching performance. Figure 12 shows the comparison of precision, recall, and F1 score in $O_s \Rightarrow O_t$, $O_t \Leftarrow O_s$, and $O_s \Leftrightarrow O_t$ in the three OAEI tracks we analysed. The merged matching results generally achieved a significant improvement in precision and F1 score, with a slight decrease in recall. The results are in line with the findings in RAG-Fusion [63], where providing two different paths to perform the same matching task can reduce LLM hallucinations.

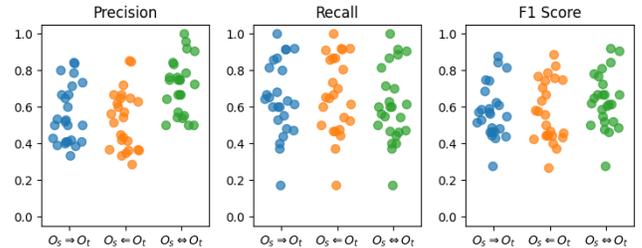


Figure 12: Comparison of $O_s \Rightarrow O_t$, $O_t \Leftarrow O_s$, and $O_s \Leftrightarrow O_t$

6.2 Hyperparameter Settings

6.2.1 *Similarity Threshold*. We test the similarity threshold $T \in [0.50, 0.55, 0.60, \dots, 0.90, 0.95, 1.00]$ in the three OAEI tracks we analysed. The optimal similarity threshold appears to be $T \in [0.90, 0.95]$, balancing the trade-off between precision and recall, thus achieving a higher overall F1 score (see an example of comparing different similarity thresholds in the CMT-ConfOf alignment in Figure 13). If we consider the similarity threshold as the required confidence interval (CI) for candidates for equivalence matching, this setting reflects that a 5%-10% probability of observing values outside the estimation is conventionally acceptable in probabilistic predictions.

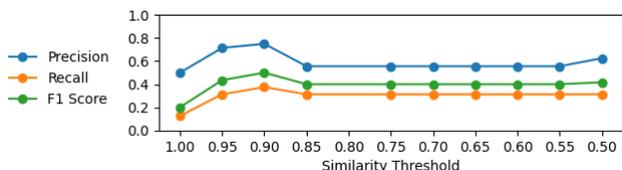


Figure 13: Comparison of different similarity thresholds.

6.2.2 Top@k. We also test the top@k values $k \in [1, 2, 3, \dots, 8, 9, 10]$ in the three OAEI tracks we analysed. We observe that $k = 1$ and $k = 2$ do not provide enough candidates for the LLM to select, while appropriate correspondences are rarely found where $k > 5$. We recommend setting $k \in [3, 4, 5]$ to balance the computational complexity and precision of the results. Note that we deal with the tie-break case where multiple entities have the same RRF scores. In such cases, the total number of entities tested may be greater than k because these equally-scored entities share the same ranking.

6.2.3 How to choose Similarity Threshold and Top@k? Ontologies are context-dependent conceptual models that follow different conventions and restrictions to reflect different application-level requirements [66]. The hyperparameter settings should be adjusted for each specific OM task. We observe that higher similarity thresholds and lower top@k values mean strict rules could result in high precision where most of the explicit true mappings can be found, but they may miss some implicit true mappings. On the other hand, lower similarity thresholds and higher top@k values mean loose rules could result in high recall, but the precision may be very low as more false positive mappings are generated during the matching process. This also indicates that the applied matching refinements (validator and merger) would be more powerful in settings with lower similarity thresholds and higher top@k values.

7 DISCUSSION

Google DeepMind classifies AI autonomy into 6 levels [51]. We believe that the potential of LLM is not only as a consultant (Level 2) or collaborator (Level 3) to answer binary classification questions in OM tasks, but it can also be an agent (Level 5) to simulate human behaviour in performing OM tasks, including data preprocessing, data preparation, data analysis, and data validation. Higher autonomy reduces barriers to accessing LLMs in OM tasks.

(1) Agent-based OM is more efficient than LLM-based OM. LLMs are computationally expensive. While LLM-based OM using binary classification questions has repetitive LLM prompting, agent-based OM leverages the vector database to store ontology retrieval results, reducing the financial cost of token consumption.

(2) Agent-based OM is also more effective than LLM-based OM. LLM-based OM is commonly observed to have high recall and low precision. Due to the nature of its large knowledge base, it is possible to discover positive correspondences but also unavoidable false positive mappings. LLMs are zero-shot reasoners [38], but they are also few-shot learners [11]. Their capacity for reasoning depends on the richness of the information provided. With the assistance of autonomous agents for extensive planning, tools, and memory, agent-powered LLM-based OM systems can access more detailed information and therefore feature the following advantages:

(a) Context Learning: LLMs have a large corpus of background knowledge, in line with the open-world assumption (OWA). Given

a context, LLMs could use more precise and accurate background knowledge and therefore perform better in lexical matching.

(b) Transitive Reasoning: LLMs can reason on transitive relationships. They can also understand general and domain-specific scenarios and apply lexical validation when necessary.

(c) Self Correction: LLMs have a strong capacity for self correction. Even given a wrong statement, LLMs have good judgment to automatically remove false mappings. For example, semantic matching can cause false mappings because it considers only the data structure and ignores the linguistic meaning of the entity. However, such a small piece of false information does not influence the correct truth that LLMs nevertheless learn.

Table 4 presents some examples of these unique characteristics. Despite the several success factors of agent-powered LLM-based OM systems, we also observe that:

(1) A matching process could be more complex. Although CoT may simulate how humans plan and perform tasks, it is still an incomplete model of human thought. Human reasoning employs a more complex network of thoughts, as humans tend to try different isolated paths (i.e. ToT, tree-of-thoughts [43, 80]), explore multiple paths (i.e. GoT, graph-of-thoughts [9]), or algorithms (i.e. AoT, algorithm-of-thoughts [65]), and backtrack, split, or merge to find the optimal solution to the problem. For example, people may use discovered mappings as input to the next iteration.

(2) Prompt engineering is the key to instructing efficient LLM agents. These prompts are currently hand-crafted. For prompt-based tools, different LLMs may have varying default chat templates. Finding generic hard prompts across all LLMs is almost impossible. However, we provide the simplest standardised version of the prompts from our experiments. The prompts used in our system currently support mainstream LLMs, such as OpenAI GPT models, Anthropic Claude models, Mistral AI models, Meta Llama 3, Google Gemma 2, and Alibaba Qwen 2. For those models not included in the list, we also provide an interface to add new LLMs to our system, but it may require minor code customisation to fit the LLMs used. We expect that our system will support more models via open-source community efforts in the future. We seek automatic prompt engineering approaches and will consider using soft prompts in further versions of Agent-OM.

(3) LLM hallucinations can be mitigated, but cannot be eliminated. The accuracy of the RAG remains an open question. Human-in-the-loop may be a solution [57]. Search optimisation for OM tasks, such as database indexing and cross-validation across databases, is an ongoing research area.

(4) There is a trade-off between precision and recall. Strict rules could result in high precision where most of the implicit true mappings can be found, but they may miss some explicit true mappings. On the other hand, loose rules could result in a high recall score, but the precision score may become very low as more mappings are generated during the matching process.

(5) For LLMs used for OM, we find a classical Moravec’s paradox: “hard problems are easy and the easy problems are hard” [60]. Although Agent-OM performs well in complex and few-shot OM tasks, it is not significantly outstanding in simple OM tasks. We will also consider integrating the LLM-based approach with traditional knowledge-based and machine learning-based approaches in such cases.

Table 4: Sample Tasks Tested via GPT-4o.

(a) Context Learning

Prompt: What is the meaning of chair? Give a short explanation.

Answer: A chair is a piece of furniture designed for a person to sit on, typically featuring a seat, backrest, and often four legs. It can also refer to the position of leading or presiding over a meeting or organization, such as the “chair” of a committee. (AI-generated content)

Prompt: What is the meaning of chair in the context of a conference? Give a short explanation.

Answer: In the context of a conference, the term “chair” refers to the person who is responsible for leading and moderating a session or the entire event. This individual typically introduces speakers, manages the schedule, facilitates discussions, and ensures that the session runs smoothly and on time. The chair plays a crucial role in maintaining the flow of the conference and engaging the audience. (AI-generated content)

(b) Transitive Reasoning

Prompt: We know that paper is equivalent to submission, and submission is equivalent to contribution. Is paper equivalent to contribution? Please answer yes or no. Give a short explanation.

Answer: Yes. If paper is equivalent to submission, and submission is equivalent to contribution, then by the transitive property of equivalence, paper is also equivalent to contribution. (AI-generated content)

Prompt: We know that meta-reviewer is the subclass of reviewer, and reviewer is the subclass of conference member. Is meta-reviewer the subclass of conference member? Please answer yes or no. Give a short explanation.

Answer: Yes. Since meta-reviewer is a subclass of reviewer, and reviewer is a subclass of conference member, by the transitive property of class inheritance, meta-reviewer is also a subclass of conference member. (AI-generated content)

(c) Self Correction

Prompt: We know that rejection is equivalent to submission, and submission is equivalent to contribution. Is rejection equivalent to contribution? Please answer yes or no. Give a short explanation.

Answer: No. While the statements “rejection is equivalent to submission” and “submission is equivalent to contribution” suggest a transitive relationship, the context and meaning of each term can vary. Rejection typically implies a refusal or denial, whereas contribution implies adding value or participating positively. Therefore, without additional context to clarify how these terms are being used, rejection is not necessarily equivalent to contribution. (AI-generated content)

8 LIMITATIONS

- (1) We evaluate only the T-Box matching datasets that focus on matching between named classes, object properties, and data type properties. A-Box matching datasets (including individual data instances) are not considered due to privacy concerns in our targeted application domain. Additional data engineering (e.g. data de-identification and fuzzing) may be required to apply LLMs to A-Box matching datasets to avoid personal and sensitive information exposure.
- (2) Due to the high cost of API calls for API-accessed commercial LLMs, experiments with the newest commercial models (e.g. gpt-4-turbo, claude-3-opus, and mistral-large) are not included in this study. According to our findings in Section 6.1.2, we hypothesise that these models could achieve better performance in OM tasks.
- (3) There may be additional resource requirements for running open-source LLMs locally. The run time for API-accessed commercial LLMs is controlled by the LLM providers.

9 FUTURE WORK

- (1) Multimodal OM: We have packaged our system into several natural language-based commands. It can be integrated with advanced LLM functions to support multimodal inputs. In this setting, the system can be controlled by voice or sign language, paving the way for OM to be accessible to disabled people.
- (2) Multilingual OM: Our system also supports multilingualism from different cultural backgrounds. We have tested our system in the OAEI 2022 and 2023 Multifarm Track, a modified conference dataset translated into nine different languages (Arabic, Chinese, Czech, Dutch, French, German, Portuguese, Russian, and Spanish).

We do not include the results in the evaluation because we cannot find enough benchmarks. There are limited systems that support this function, and only two traditional systems are currently available to benchmark the performance of Agent-OM. (3) Small language model (SLM) for OM: SLM (e.g. gemma-2b [26] and phi-3-3.8 [48]) are very useful in resource-constraint devices (e.g. mobile phones), but they have not shown an acceptable performance in function calling. Enabling effective function calling in SLM would be a challenging but promising area to explore.

10 CONCLUSION

In this paper, we introduce a new LLM-based design paradigm for OM systems. Agent-OM, an agent-powered LLM-based framework, is proposed and implemented with a proof-of-concept system. We compare our systems with state-of-the-art OM systems to perform different types of OM tasks. The system has shown a powerful capability to perform OM tasks at different levels of complexity, leveraging the potential of using LLM agents for OM. We also discuss our observations on the advantages and current limitations of using LLMs and LLM agents for OM tasks.

Our work focuses on pre-trained large foundation models that are impossible to retrain and hard to fine-tune. Our approach yields good results on LLMs for OM tasks without changing the LLM model itself, but by utilising CoT, ICL/RAG, and prompt engineering techniques. It is a simple, lightweight, and natural language-driven approach with high scalability. Agent-OM is all you need. While OM has been studied for two decades or more, we are now at a point where the goal of 100% accurate, fully-automated, and domain-independent OM seems to be within reach.

REFERENCES

- [1] Alibaba. 2024. Qwen Models. <https://qwenlm.github.io/>
- [2] Reihaneh Amini, Sanaz Saki Norouzi, Pascal Hitzler, and Reza Amini. 2024. Towards Complex Ontology Alignment using Large Language Models. arXiv:2404.10329 [cs.AI]
- [3] Murugan Anandarajan, Chelsey Hill, and Thomas Nolan. 2019. *Text Preprocessing*. Springer International Publishing, Cham, 45–59. https://doi.org/10.1007/978-3-319-95663-3_4
- [4] Anthropic. 2024. Claude Models. <https://docs.anthropic.com/en/docs/models-overview>
- [5] Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. 2023. Self-RAG: Learning to Retrieve, Generate, and Critique through Self-Reflection. arXiv:2310.11511 [cs.CL]
- [6] Toshihiro Ashino. 2010. Materials ontology: An infrastructure for exchanging materials information and knowledge. *Data Science Journal* 9 (2010), 54–61.
- [7] Auto-GPT. 2024. Auto-GPT. <https://github.com/Significant-Gravitas/AutoGPT>
- [8] Elena Beisswanger and Udo Hahn. 2012. Towards valid and reusable reference alignments—ten basic quality checks for ontology alignments and their application to three different reference data sets. In *Journal of biomedical semantics*, Vol. 3. Springer, Berlin, Heidelberg, 1–14. <https://doi.org/10.1186/2041-1480-3-S1-S4>
- [9] Maciej Besta, Nils Blach, Ales Kubicek, Robert Gerstenberger, Michal Podstawski, Lukas Gianinazzi, Joanna Gajda, Tomasz Lehmann, Hubert Niewiadomski, Piotr Nyczyk, and Torsten Hoefler. 2024. Graph of Thoughts: Solving Elaborate Problems with Large Language Models. arXiv:2308.09687 [cs.CL]
- [10] Olivier Bodenreider, Terry F Hayamizu, Martin Ringwald, Sherri De Coronado, and Songmao Zhang. 2005. Of mice and men: Aligning mouse and human anatomies. In *AMIA Annual Symposium Proceedings*. American Medical Informatics Association, 61–65.
- [11] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. Language Models are Few-Shot Learners. arXiv:2005.14165 [cs.CL]
- [12] Michelle Cheatham and Pascal Hitzler. 2014. Conference v2.0: An Uncertain Version of the OAEI Conference Benchmark. In *The Semantic Web – ISWC 2014*. Springer International Publishing, Cham, 33–48. https://doi.org/10.1007/978-3-319-11915-1_3
- [13] Jiaoyan Chen, Ernesto Jiménez-Ruiz, Ian Horrocks, Denvar Antonyrajah, Ali Hadian, and Jaehun Lee. 2021. Augmenting Ontology Alignment by Semantic Embedding and Distant Supervision. In *The Semantic Web*. Springer International Publishing, Cham, 392–408. https://doi.org/10.1007/978-3-030-77385-4_23
- [14] Gordon V. Cormack, Charles L A Clarke, and Stefan Buettcher. 2009. Reciprocal Rank Fusion Outperforms Condorcet and Individual Rank Learning Methods. In *Proceedings of the 32nd International ACM SIGIR Conference on Research and Development in Information Retrieval* (Boston, MA, USA) (SIGIR ’09). Association for Computing Machinery, New York, NY, USA, 758–759. <https://doi.org/10.1145/1571941.1572114>
- [15] Anne Cregan, Rolf Schwitter, and Thomas Meyer. 2007. Sydney OWL Syntax-towards a Controlled Natural Language Syntax for OWL 1.1. In *Proceedings of the OWLED 2007 Workshop on OWL: Experiences and Directions, Innsbruck, Austria, June 6-7, 2007 (CEUR Workshop Proceedings)*, Vol. 258. CEUR-WS.org, 1–10.
- [16] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. arXiv:1810.04805 [cs.CL]
- [17] Hong-Hai Do, Sergey Melnik, and Erhard Rahm. 2003. Comparison of Schema Matching Evaluations. In *Web, Web-Services, and Database Systems*. Springer, Berlin, Heidelberg, 221–237. https://doi.org/10.1007/3-540-36560-5_17
- [18] Engy Nasr. [n.d.]. Evaluation of Automatic Ontology Matching for Materials Sciences and Engineering. https://ad-publications.cs.uni-freiburg.de/theses/Master_Engy_Nasr_2020.pdf
- [19] Jérôme Euzenat and Pavel Shvaiko. 2013. *Ontology Matching*. Springer, Berlin, Heidelberg. <https://doi.org/10.1007/978-3-642-38721-0>
- [20] Euzenat, Jérôme and Meilicke, Christian and Stuckenschmidt, Heiner and Shvaiko, Pavel and Trojahn, Cássia. 2011. *Ontology Alignment Evaluation Initiative: Six Years of Experience*. Springer, Berlin, Heidelberg, 158–192. https://doi.org/10.1007/978-3-642-22630-4_6
- [21] Daniel Faria, Catia Pesquita, Emanuel Santos, Isabel F Cruz, and Francisco M Couto. 2014. AgreementMakerLight 2.0: Towards Efficient Large-Scale Ontology Matching. In *ISWC (Posters & Demos)*. Springer International Publishing, Cham, 457–460.
- [22] Daniel Faria, Catia Pesquita, Emanuel Santos, Matteo Palmonari, Isabel F. Cruz, and Francisco M Couto. 2013. The AgreementMakerLight Ontology Matching System. In *On the Move to Meaningful Internet Systems: OTM 2013 Conferences*. Springer, Berlin, Heidelberg, 527–541. https://doi.org/10.1007/978-3-642-41030-7_38
- [23] Jonathan Fürst, Mauricio Fadel Argerich, and Bin Cheng. 2023. VersaMatch: Ontology Matching with Weak Supervision. *Proc. VLDB Endow.* 16, 6 (feb 2023), 1305–1318. <https://doi.org/10.14778/3583140.3583148>
- [24] Hamed Babaei Giglou, Jennifer D’Souza, and Sören Auer. 2023. LLMs4OL: Large Language Models for Ontology Learning. arXiv:2307.16648 [cs.AI]
- [25] Hamed Babaei Giglou, Jennifer D’Souza, Felix Engel, and Sören Auer. 2024. LLMs4OM: Matching Ontologies with Large Language Models. arXiv:2404.10317 [cs.AI]
- [26] Google. 2024. Google Gemma Models. <https://blog.google/technology/developers/gemma-open-models/>
- [27] Google Cloud. [n.d.]. Vertex AI Embeddings. <https://cloud.google.com/vertex-ai/docs/generative-ai/embeddings/get-text-embeddings>
- [28] Yuan He, Jiaoyan Chen, Denvar Antonyrajah, and Ian Horrocks. 2022. BERTMap: A BERT-based Ontology Alignment System. arXiv:2112.02682 [cs.AI]
- [29] Yuan He, Jiaoyan Chen, Hang Dong, and Ian Horrocks. 2023. Exploring Large Language Models for Ontology Alignment. arXiv:2309.07172 [cs.AI]
- [30] Yuan He, Jiaoyan Chen, Hang Dong, Ian Horrocks, Carlo Allocca, Taehun Kim, and Brahmananda Sapkota. 2023. DeepOnto: A Python Package for Ontology Engineering with Deep Learning. arXiv:2307.03067 [cs.AI]
- [31] Yuan He, Jiaoyan Chen, Ernesto Jimenez-Ruiz, Hang Dong, and Ian Horrocks. 2023. Language Model Analysis for Ontology Subsumption Inference. In *Findings of the Association for Computational Linguistics: ACL 2023*. Association for Computational Linguistics, Toronto, Canada, 3439–3453. <https://doi.org/10.18653/v1/2023.findings-acl.213>
- [32] Sven Hertling and Heiko Paulheim. 2023. OLaLa: Ontology Matching with Large Language Models. arXiv:arXiv:2311.03837 [cs.LR]
- [33] iNovex IRAD. [n.d.]. MatOnto Project. <https://github.com/inovexcorp/MatOnto-Ontologies>
- [34] Ziwei Ji, Nayeon Lee, Rita Frieske, Tiezheng Yu, Dan Su, Yan Xu, Etsuko Ishii, Ye Jin Bang, Andrea Madotto, and Pascale Fung. 2023. Survey of Hallucination in Natural Language Generation. *ACM Comput. Surv.* 55, 12, Article 248 (mar 2023), 38 pages. <https://doi.org/10.1145/3571730>
- [35] Ernesto Jiménez-Ruiz and Bernardo Cuenca Grau. 2011. LogMap: Logic-Based and Scalable Ontology Matching. In *The Semantic Web – ISWC 2011*. Springer, Berlin, Heidelberg, 273–288. https://doi.org/10.1007/978-3-642-25073-6_18
- [36] Ernesto Jiménez-Ruiz, Bernardo Cuenca Grau, and Yujiao Zhou. 2011. LogMap 2.0: Towards Logic-Based, Scalable and Interactive Ontology Matching. In *Proceedings of the 4th International Workshop on Semantic Web Applications and Tools for the Life Sciences* (London, United Kingdom) (SWAT4LS ’11). Association for Computing Machinery, New York, NY, USA, 45–46. <https://doi.org/10.1145/2166896.2166911>
- [37] Kaarel Kaljurand. 2007. OWL Verbalizer. <https://github.com/Kaljurand/owl-verbalizer>
- [38] Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. 2023. Large Language Models are Zero-Shot Reasoners. arXiv:2205.11916 [cs.CL]
- [39] LangChain. [n.d.]. LangChain. <https://www.langchain.com/>
- [40] Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. 2021. Retrieval-Augmented Generation for Knowledge-Intensive NLP Tasks. arXiv:2005.11401 [cs.CL]
- [41] Guoxuan Li, Songmao Zhang, Jiayi Wei, and Wenqian Ye. 2021. Combining FCA-Map with representation learning for aligning large biomedical ontologies. In *OM@ISWC*. Springer, Berlin, Heidelberg, 207–208.
- [42] Hongcheng Liu, Yusheng Liao, Yutong Meng, and Yuhao Wang. 2023. LawGPT: Large Language Models for Chinese Law. https://github.com/LiuHC0428/LAW_GPT.
- [43] Jiayi Long. 2023. Large Language Model Guided Tree-of-Thought. arXiv:2305.08291 [cs.AI]
- [44] Potsawee Manakul, Adian Liusie, and Mark J. F. Gales. 2023. SelfCheckGPT: Zero-Resource Black-Box Hallucination Detection for Generative Large Language Models. arXiv:2303.08896 [cs.CL]
- [45] Meta. 2024. Meta Llama Models. <https://llama.meta.com/llama3/>
- [46] Microsoft. [n.d.]. Copilot. <https://www.microsoft.com/en-us/copilot>
- [47] Microsoft. [n.d.]. Copilot Studio. <https://www.microsoft.com/en-us/copilot/microsoft-copilot-studio>
- [48] Microsoft. 2024. Microsoft Phi Models. <https://news.microsoft.com/source/features/ai-the-phi-3-small-language-models-with-big-potential/>
- [49] Microsoft Azure. [n.d.]. GPT-RAG. <https://github.com/Azure/GPT-RAG>
- [50] Mistral AI. 2024. Mistral AI Models. <https://docs.mistral.ai/getting-started/models/>
- [51] Meredith Ringel Morris, Jascha Sohl-dickstein, Noah Fiedel, Tris Warkentin, Allan Dafoe, Aleksandra Faust, Clement Farabet, and Shane Legg. 2024. Levels of AGI: Operationalizing Progress on the Path to AGI. arXiv:2311.02462 [cs.AI]
- [52] Yohei Nakajima. 2024. BabyAGI. <https://github.com/yoheinakajima/babyagi>
- [53] Sanaz Saki Norouzi, Mohammad Saeid Mahdaveinejad, and Pascal Hitzler. 2023. Conversational Ontology Alignment with ChatGPT. arXiv:2308.09217 [cs.CL]

- [54] OpenAI. [n.d.]. GPTs. <https://openai.com/blog/introducing-gpts>
- [55] OpenAI. [n.d.]. OpenAI Embeddings. <https://platform.openai.com/docs/guides/embeddings>
- [56] OpenAI. 2024. OpenAI Models. <https://platform.openai.com/docs/models>
- [57] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. 2022. Training language models to follow instructions with human feedback. *Advances in Neural Information Processing Systems* 35 (2022), 27730–27744.
- [58] Oded Ovadia, Menachem Brief, Moshik Mishacli, and Oren Elisha. 2023. Fine-Tuning or Retrieval? Comparing Knowledge Injection in LLMs. arXiv:2312.05934 [cs.AI]
- [59] Terry R. Payne and Valentina Tamma. 2014. Negotiating over ontological correspondences with asymmetric and incomplete knowledge. In *Proceedings of the 2014 International Conference on Autonomous Agents and Multi-Agent Systems* (Paris, France) (AAMAS '14). International Foundation for Autonomous Agents and Multiagent Systems, Richland, SC, 517–524. <https://doi.org/10.5555/2615731.2615816>
- [60] Steven Pinker. 2003. *The language instinct: How the mind creates language*. Penguin UK.
- [61] PostgreSQL Global Development Group. [n.d.]. pgvector. <https://github.com/pgvector/pgvector>
- [62] PostgreSQL Global Development Group. [n.d.]. PostgreSQL. <https://www.postgresql.org/>
- [63] Adrian Raudaschl. [n.d.]. RAG-Fusion. <https://github.com/Raudaschl/rag-fusion>
- [64] Nils Reimers and Iryna Gurevych. 2019. Sentence-BERT: Sentence Embeddings using Siamese BERT-Networks. arXiv:1908.10084 [cs.CL]
- [65] Bilgehan Sel, Ahmad Al-Tawaha, Vanshaj Khattar, Ruoxi Jia, and Ming Jin. 2023. Algorithm of Thoughts: Enhancing Exploration of Ideas in Large Language Models. arXiv:2308.10379 [cs.CL]
- [66] Shenghui Wang. [n.d.]. Ontology Matching. <https://www.utwente.nl/en/ces/sal/exams/Linked-Data-and-Semantic-Web/ldsw-lecture6-om-2021-2a.pdf>
- [67] Pavel Shvaiko and Jérôme Euzenat. 2013. Ontology Matching: State of the Art and Future Challenges. *IEEE Transactions on Knowledge and Data Engineering* 25, 1 (2013), 158–176. <https://doi.org/10.1109/TKDE.2011.253>
- [68] Alessandro Solimando, Ernesto Jiménez-Ruiz, and Giovanna Guerrini. 2014. Detecting and Correcting Conservativity Principle Violations in Ontology-to-Ontology Mappings. In *The Semantic Web – ISWC 2014*. Springer International Publishing, Cham, 1–16. https://doi.org/10.1007/978-3-319-11915-1_1
- [69] Alessandro Solimando, Ernesto Jimenez-Ruiz, and Giovanna Guerrini. 2017. Minimizing conservativity violations in ontology alignments: Algorithms and evaluation. *Knowledge and Information Systems* 51 (2017), 775–819. <https://doi.org/10.1007/s10115-016-0983-3>
- [70] The European Materials Modelling Council (EMMC ASBL). [n.d.]. European Materials Modelling Ontology (EMMO). <https://github.com/emmo-repo/EMMO/tree/1.0.0-alpha2>
- [71] Alan M. Turing. 2009. *Computing Machinery and Intelligence*. Springer Netherlands, Dordrecht, 23–65. https://doi.org/10.1007/978-1-4020-6710-5_3
- [72] Karthik Valmeekam, Alberto Olmo, Sarath Sreedharan, and Subbarao Kambhampati. 2023. Large Language Models Still Can't Plan (A Benchmark for LLMs on Planning and Reasoning about Change). arXiv:2206.10498 [cs.CL]
- [73] Denny Vrandečić and Markus Krötzsch. 2014. Wikidata: a free collaborative knowledgebase. *Commun. ACM* 57, 10 (2014), 78–85. <https://doi.org/10.1145/2629489>
- [74] Haochun Wang, Chi Liu, Nuwa Xi, Zewen Qiang, Sendong Zhao, Bing Qin, and Ting Liu. 2023. HuaTuo: Tuning LLaMA Model with Chinese Medical Knowledge. arXiv:2304.06975 [cs.CL]
- [75] Lei Wang, Chen Ma, Xueyang Feng, Zeyu Zhang, Hao Yang, Jingsen Zhang, Zhiyuan Chen, Jiakai Tang, Xu Chen, Yankai Lin, Wayne Xin Zhao, Zhewei Wei, and Ji-Rong Wen. 2023. A Survey on Large Language Model based Autonomous Agents. arXiv:2308.11432 [cs.AI]
- [76] Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc Le, Ed Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. 2023. Self-Consistency Improves Chain of Thought Reasoning in Language Models. arXiv:2203.11171 [cs.CL]
- [77] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed Chi, Quoc Le, and Denny Zhou. 2023. Chain-of-Thought Prompting Elicits Reasoning in Large Language Models. arXiv:2201.11903 [cs.CL]
- [78] Lilian Weng. 2023. LLM Powered Autonomous Agents. <https://lilianweng.github.io/posts/2023-06-23-agent/>
- [79] Zhiheng Xi, Wenxiang Chen, Xin Guo, Wei He, Yiwen Ding, Boyang Hong, Ming Zhang, Junzhe Wang, Senjie Jin, Enyu Zhou, Rui Zheng, Xiaoran Fan, Xiao Wang, Limao Xiong, Yuhao Zhou, Weiran Wang, Changhao Jiang, Yicheng Zou, Xiangyang Liu, Zhangyue Yin, Shihan Dou, Rongxiang Weng, Wensen Cheng, Qi Zhang, Wenjuan Qin, Yongyan Zheng, Xipeng Qiu, Xuanjing Huang, and Tao Gui. 2023. The Rise and Potential of Large Language Model Based Agents: A Survey. arXiv:2309.07864 [cs.AI]
- [80] Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Thomas L. Griffiths, Yuan Cao, and Karthik Narasimhan. 2023. Tree of Thoughts: Deliberate Problem Solving with Large Language Models. arXiv:2305.10601 [cs.CL]
- [81] Ondřej Žamžal and Vojtěch Svátek. 2017. The Ten-Year OntoFarm and its Fertilization within the Onto-Sphere. *Journal of Web Semantics* 43 (2017), 46–53. <https://doi.org/10.1016/j.websem.2017.01.001>
- [82] Bohui Zhang, Valentina Anita Carriero, Katrin Schreiberhuber, Stefani Tsaneva, Lucia Sánchez González, Jongmo Kim, and Jacopo de Berardinis. 2024. OntoChat: a Framework for Conversational Ontology Engineering using Language Models. arXiv:2403.05921 [cs.AI]
- [83] Shiyao Zhang, Yuji Dong, Yichuan Zhang, Terry R Payne, and Jie Zhang. 2024. Large Language Model Assisted Multi-Agent Dialogue for Ontology Alignment. In *The 23rd International Conference on Autonomous Agents and Multi-Agent Systems*.
- [84] Mengyi Zhao, Songmao Zhang, Weizhuo Li, and Guowei Chen. 2018. Matching biomedical ontologies based on formal concept analysis. *Journal of biomedical semantics* 9, 1 (2018), 1–27. <https://doi.org/10.1186/s13326-018-0178-9>
- [85] Mingyu Zong and Bhaskar Krishnamachari. 2022. a survey on GPT-3. arXiv:2212.00857 [cs.CL]

A SYSTEM DOCUMENTATION

AGENT-OM: LEVERAGING LLM AGENTS FOR ONTOLOGY MATCHING

- The preprint of the paper is currently available at arXiv: <https://arxiv.org/abs/2312.00326>
- This repository contains a production version of the source code linked to the paper submitted to PVLDB 2025.
- The development version of the source code is stored at: <https://github.com/qzc438/ontology-llm> (access will be made available on request)

IMPORTANT NOTICE:

- For technical inquiries, please submit a GitHub issue.
- For feature discussion or potential extensions, please join our foundation model discussion group: <https://groups.google.com/g/agent-om>

QUICK START:

1. Install Database:

- Install PostgreSQL: <https://www.postgresql.org/download/>
- Install pgAdmin: <https://www.pgadmin.org/download/> (Optional for GUI access to the database)
- Install pgvector: <https://github.com/pgvector/pgvector>

```
psql -version
sudo -u postgres psql
alter user postgres password 'postgres'
sudo apt install postgresql-15-pgvector
```

2. Install Python Environment:

- Install Python: <https://www.python.org/downloads/>
- We report our results with Python 3.10.12: <https://www.python.org/downloads/release/python-31012/>

3. Install Python Packages:

- Install LangChain packages:

```
pip install langchain==0.2.10
pip install langchain-openai==0.1.17
pip install langchain-anthropic==0.1.20
pip install langchain-mistralai==0.1.10
pip install langchain_community==0.2.9
```

- Install other packages:

```
pip install pandas==2.0.3
pip install rdflib==7.0.0
pip install python-dotenv==1.0.1
pip install pyenchant==3.2.2
pip install tiktoken==0.6.0
pip install asyncpg==0.28.0
pip install psycopg2_binary==2.9.9
pip install pgvector==0.1.8
pip install commentjson==0.9.0
pip install transformers
pip install colorama==0.4.6
```

- Install visualisation packages:

```
pip install matplotlib==3.8.4
pip install notebook
pip install ipyparallel
```

4. Install Ollama:

- Ollama GitHub: <https://github.com/ollama/ollama>
- Ollama installation: <https://ollama.com/download>
- Ollama FAQs: <https://github.com/ollama/ollama/blob/main/docs/faq.md>
- Link Ollama to LangChain: <https://python.langchain.com/v0.1/docs/integrations/llms/ollama/>
- PyTorch installation: <https://pytorch.org/get-started/locally/>
- Ollama installation on Linux and CUDA 11.8:
- Install or update Ollama:

```
curl -fsSL https://ollama.com/install.sh | sh
```

- Install PyTorch:

```
pip3 install torch torchvision torchaudio --index-url https://download.pytorch.org/whl/cu118
```

- Ollama models: <https://ollama.com/library>
- Add a model:

```
ollama pull <MODEL_NAME>
```

- Find a model's metadata:

```
ollama show <MODEL_NAME>
```

- Remove a model:

```
ollama rm <MODEL_NAME>
```

- Check local models:

```
ollama list
```

- Update local models:

```
ollama list | cut -f 1 | tail -n +2 | xargs -n 1 ollama pull
```

Please check this link for further updates: <https://github.com/ollama/ollama/issues/4589>

5. Setup Large Language Models (LLMs):

- Create a file named as `.env` and write:

```
# https://platform.openai.com/account/api-keys  
OPENAI_API_KEY = <YOUR_OPENAI_API_KEY>  
# https://console.anthropic.com/settings/keys  
ANTHROPIC_API_KEY = <YOUR_ANTHROPIC_API_KEY>  
# https://console.mistral.ai/api-keys/  
MISTRAL_API_KEY = <YOUR_MISTRAL_API_KEY>
```

- To protect your API keys, please add `.env` into the file `.gitignore`:

```
.env
```

- Load API keys into the file `run_config.py`:

```
import os  
import dotenv  
  
dotenv.load_dotenv()  
os.environ["OPENAI_API_KEY"] = os.getenv("OPENAI_API_KEY")  
os.environ["ANTHROPIC_API_KEY"] = os.getenv("ANTHROPIC_API_KEY")  
os.environ["MISTRAL_API_KEY"] = os.getenv("MISTRAL_API_KEY")
```

- Select one LLM in the file `run_config.py`:

```

from langchain_openai import ChatOpenAI
from langchain_anthropic import ChatAnthropic
from langchain_mistralai import ChatMistralAI
from langchain_community.chat_models import ChatOllama

# load GPT models: https://platform.openai.com/docs/models/
# pricing: https://openai.com/api/pricing/
llm = ChatOpenAI(model_name='gpt-4-turbo-2024-04-09', temperature=0) # expensive
llm = ChatOpenAI(model_name='gpt-4o-2024-05-13', temperature=0)
llm = ChatOpenAI(model_name='gpt-4o-mini-2024-07-18', temperature=0)
llm = ChatOpenAI(model_name='gpt-3.5-turbo-0125', temperature=0)

# load Anthropic models: https://docs.anthropic.com/en/docs/about-claude/models
# pricing: https://www.anthropic.com/pricing#anthropic-api
llm = ChatAnthropic(model="claude-3-opus-20240229", temperature=0) # expensive
llm = ChatAnthropic(model="claude-3-sonnet-20240229", temperature=0)
llm = ChatAnthropic(model="claude-3-haiku-20240307", temperature=0)

# load Mistral API-accessed models: https://docs.mistral.ai/getting-started/models/
# pricing: https://mistral.ai/technology/
# default timeout = 120 is too short
llm = ChatMistralAI(model="mistral-large-2402", temperature=0, timeout=600) # expensive
llm = ChatMistralAI(model="mistral-medium-2312", temperature=0, timeout=600) # will soon be deprecated
llm = ChatMistralAI(model="mistral-small-2402", temperature=0, timeout=600)

# load Mistral open-source models: https://ollama.com/library/mistral
llm = ChatOllama(model="mistral:7b", temperature=0)

# load Llama models: https://ollama.com/library/llama3
llm = ChatOllama(model="llama3:8b", temperature=0)

# load Gemma models: https://ollama.com/library/gemma2
llm = ChatOllama(model="gemma2:9b", temperature=0)

# load Qwen models: https://ollama.com/library/qwen2
llm = ChatOllama(model="qwen2:7b", temperature=0)

```

- Select one embeddings service in the file `run_config.py`:

```

# https://platform.openai.com/docs/guides/embeddings/embedding-models
embeddings_service = OpenAIEmbeddings(model="text-embedding-ada-002")
vector_length = 1536
embeddings_service = OpenAIEmbeddings(model="text-embedding-3-small")
vector_length = 1536
embeddings_service = OpenAIEmbeddings(model="text-embedding-3-large")
vector_length = 3072

```

6. Setup Matching Task:

- Set your alignment in the file `run_config.py`. For example, if you would like to run the CMT-ConfOf alignment, then the settings are:

```

context = "conference"
o1_is_code = False
o2_is_code = False
alignment = "conference/cmt-confOf/component/"

```

- Set your matching hyperparameters in the file `run_config.py`. For example, if you would like to set the `similarity_threshold = 0.90` and `top_k = 3`, then the settings are:

```
similarity_threshold = 0.90
top_k = 3
```

- (Optional) Set `num_matches` in the file `run_config.py`. `num_matches` is a parameter that performs a “limit” function on the database queries. We set 50 here, but you can adjust this number to fit your database memory.

```
num_matches = 50
```

7. Run Experiment:

- Run the script:

```
python run_config.py
```

- The result of the experiment will be stored in the folder `alignment`.
- The performance evaluation of the experiment will be stored in the file `result.csv`.
- The cost evaluation of the experiment will be stored in the file `cost.csv`.

REPOSITORY STRUCTURE:

1. Data:

- `data`: store the data from three OAEI tracks.

2. Experiment:

- `om_ontology_to_csv.py`: Retrieval Agent Part 1.
- `om_csv_to_database.py`: Retrieval Agent Part 2.
- `om_database_matching.py`: Matching Agent.
- `run_config.py`: main function of the project.
- `run_series_conference.py`: run all the conference alignments at one time.
- `run_series_similarity.py`: run different similarity thresholds for one alignment at one time.
- `util.py`: util component of the project.
- `alignment`: store experiment results.
- `llm_matching.py`: examples using purely LLMs for general matching tasks.
- `llm_om_zero_shot.py`: examples of using purely LLMs without ontology information for ontology matching.
- `llm_om_few_shot.py`: examples of using purely LLMs with ontology information for ontology matching.

Frequently Asked Questions (FAQs):

(1) Why does the Retrieval Agent have two parts `om_ontology_to_csv.py` and `om_csv_to_database.py`?

Answer: You can simply combine these two parts together. We decompose this into two parts to make it easy to debug any issue that may occur in the database storage.

(2) How do I use the `run_series_conference.py`?

Answer: Please uncomment the following code in the file `run_config.py`.

```
import os
if os.environ.get('alignment'):
    alignment = os.environ['alignment']
```

(3) How do I use the file `run_series_similarity.py`?

Answer: Please set the variables in the file `run_series_similarity.py`.

For example, if you would like to check the similarities `[1.00, 0.95, ..., 0.55, 0.50]`, then the settings are:

```
start = 1.00
end = 0.50
step = -0.05
```

3. Evaluation:

- `generate_conference_benchmark.py`: generate the results of OAEI Conference Track.
- `generate_anatomy_mse_benchmark.py`: generate the results of OAEI Anatomy Track and OAEI MSE Track.
- `fix_multifarm_reference.py`: fix the URI issue of OAEI Multifarm Track.
- `benchmark_2022`: compare Agent-OM with the results of OAEI 2022.
- `benchmark_2023`: compare Agent-OM with the results of OAEI 2023.
- You may find a slight difference for each run. It is because:
 - <https://community.openai.com/t/run-same-query-many-times-different-results/140588>

4. Visualisation:

- `draw_benchmark.ipynb`: visualise the results of the evaluation.
- `draw_ablation_study.ipynb`: visualise the results of the ablation study.
- `result_csv`: store the original data of the results.
- `result_fig`: store the visualisation of the results.
- Our new visualisation is inspired by the following references:
 - <https://joernhees.de/blog/2010/07/22/precision-recall-diagrams-including-fmeasure/>
 - <https://towardsai.net/p/l/precision-recall-curve>

DEBUGGING LOG:

We have created a debugging log for this project. Click the link here.

ETHICAL CONSIDERATIONS:

- Agent-OM does not participate in the OAEI 2022 and 2023 campaigns.
- According to the OAEI data policy (date accessed: 2024-06-30), “OAEI results and datasets, are publicly available, but subject to a use policy similar to the one defined by NIST for TREC. These rules apply to anyone using these data.” Please find more details from the official website: <https://oaei.ontologymatching.org/doc/oaei-deontology.2.html>
- In this paper, AI-generated content (AIGC) is labelled as “AI-generated content”. AIGC can contain harmful, unethical, prejudiced, or negative content (<https://docs.mistral.ai/capabilities/guardrailing/>). However, ontology matching tasks only check the meaning of domain-specific terminologies, and we have not observed such content being generated.

CODE ACKNOWLEDGEMENTS:

- We use the LangChain Python package to generate LLM agents: https://api.python.langchain.com/en/latest/langchain_api_reference.html
- Our data-driven application architecture is inspired by: https://colab.research.google.com/github/GoogleCloudPlatform/python-docs-samples/blob/main/cloud-sql/postgres/pgvector/notebooks/pgvector_gen_ai_demo.ipynb

AUTHOR ACKNOWLEDGEMENTS:

- The authors would like to thank Sven Hertling for curating the datasets stored in the Matching Evaluation Toolkit (MELT) for the Ontology Alignment Evaluation Initiative (OAEI) 2022 and 2023.
- The authors would like to thank the organisers of Ontology Alignment Evaluation Initiative (OAEI) 2022 and 2023 Conference Track (Ondřej Zamazal and Lu Zhou), Anatomy Track (Mina Abd Nikooie Pour, Huanyu Li, Ying Li, and Patrick Lambrix), and MSE Track (Engy Nasr and Martin Huschka), for helpful advice on reproducing the benchmarks used in this paper.
- The authors would like to thank Jing Jiang from the Australian National University (ANU) for helpful advice on the semantic verbaliser used in this paper.
- The authors would like to thank Alice Richardson of the Statistical Support Network, Australian National University (ANU), for helpful advice on the statistical analysis in this paper.
- The authors would like to thank the Commonwealth Scientific and Industrial Research Organisation (CSIRO) for supporting this project.

LICENCE:

This work is licensed under a Creative Commons Attribution-NonCommercial-NoDerivs 4.0 International License.