# Scaffolding fundamentals and recent advances in sustainable scaffolding techniques for cultured meat development

AMM Nurul Alam<sup>1</sup>, Chan-Jin Kim<sup>1</sup>, So-Hee Kim<sup>1</sup>, Swati Kumari<sup>1</sup>, Eun-Yeong Lee<sup>1</sup>, Young-Hwa Hwang<sup>2</sup>, Seon-Tea Joo<sup>1,2\*</sup>

<sup>1</sup> Division of Applied Life Science (BK21 Four), Gyeongsang National University, Jinju 52852, Korea

<sup>2</sup> Institute of Agriculture & Life Science, Gyeongsang National University, Jinju 52852, Korea

# Contact information for the Corresponding author

Mailing Address: Institute of Agriculture & Life Science, Gyeongsang National University, Jinju 52852, Korea. E-mail stjoo@gnu.ac.kr

Short version of title (running head): Scaffolding for Cultured meat

#### Abstract

In cultured meat (CM) products the paramount significance lies in the fundamental attributes like texture and sensory of the processed end product. To cater to the tactile and gustatory preferences of real meat, the product needs to be designed to incorporate its texture and sensory attributes. Presently CM products are mainly grounded products like sausage, nugget, frankfurter, burger patty, surimi, and steak with less sophistication and need to mimic real meat to grapple with the traditional meat market. The existence of fibrous microstructure in connective and muscle tissues has attracted considerable interest in the realm of tissue engineering. Scaffolding plays an important role in CM production by aiding cell adhesion, growth, differentiation, and alignment. A wide array of scaffolding technologies has been

developed for implementation in the realm of biomedical research. In recent years researchers also focus on edible scaffolding to ease the process of CM. However, it is imperative to implement cutting edge technologies like 3D scaffolds, 3D printing, electrospun nanofibers in order to advance the creation of sustainable and edible scaffolding methods in CM production, with the ultimate goal of replicating the sensory and nutritional attributes to mimic real meat cut. This review discusses recent advances in scaffolding techniques and biomaterials related to structured CM production and required advances to create muscle fiber structures to mimic real meat.

Key words: Cultured meat, Scaffolding, Biomaterials, Edible scaffolding, Electrospinning, 3D bioprinting, real meat.

## 1. Introduction

The traditional meat production system is well recognized as a significant contributor to environmental deterioration. Livestock farming is responsible for close to fifteen percent of worldwide greenhouse gas emissions (GHG) and utilizes close to eighty percent of the habitable zone of earth for raising and nourishing cattle, moreover it only accounts for approximately 17% of the global calorie supply (Bonny et al., 2015; Swartz, 2019). The projected growth of the worldwide population by the year 2050, along with the rising demand for meat, limited availability of arable land, and constraints on animal production capacity, present a significant challenge to global food security (Aiking, 2011; Ray et al., 2013). Furthermore, the generation of waste in animal agriculture is a significant contributor to environmental pollution, primarily attributable to the consumer's inclination towards meat products. In the poultry sector, for instance, approximately 30% of the entire chicken carcass is often abandoned, with a bigger proportion being wasted in the bovine feed manufacturing business for protein meal (Welin, 2013). According to the Food and Agriculture Organization his contributes to the substantial quantity of food waste generated on a yearly basis (Gustafsson et al., 2013). It is always advisable to go for alternative meat production solutions like CM to deal with the issues related to meat production through livestock farming. CM holds the promise of creating meat that closely mimics the structure of traditionally farmed meat while minimizing the land required for production. The unsustainable practices involved in the existing techniques of meat production have necessitated the development of sustainable systems to create alternative protein sources in order to adequately nourish our future population (Datar & Betti, 2010).

CM is a nascent area of study that encompasses many technologies aimed at generating agricultural products that are biologically analogous to traditional meat through the cultivation of cell cultures. Utilizing stem cells CM production could be a viable and attractive substitute to conventional livestock-based meat production. Currently, researchers are studying simpler and new techniques to decrease the production cost of CM. A streamlined and enhanced technique utilizing a 10% concentration of equine serum has facilitated more effective cultivation of meat in comparison to prior methods. This breakthrough is anticipated to contribute to the creation of affordable and secure CM (Yun et al., 2023). According to, another study the simplest, cost-effective and time-efficient manner for purifying chicken satellite cells for CM is to pre-plate them at a temperature of 41°C for an uninterrupted duration of 4 hours (Kim et al., 2022). This advancement is anticipated to contribute to the creation of affordable and secure CM. Furthermore, meticulous monitoring of the production process inside a laboratory setting has the potential to eradicate foodborne infections like salmonella infection or mad cow disease. Moreover, the production of CM in conjunction with plant-derived sources has the potential to contribute to the economic aspect by mitigating costs and price, hence facilitating the growth of consumer demand. Notwithstanding these benefits, the process of introducing CM commercially to the market is impeded by numerous obstacles. It is imperative to note that the current CM falls short of satisfying consumer expectations in terms of both quality and quantity. Current CM products lack resemblance to real meat in terms of its structure, texture, color, flavor, sensory and nutritional composition (Fraeye et al., 2020; Pajčin et al., 2022; Zhang et al., 2021).

In order to precisely recreate the sensory and nutritional attributes associated with real meat, it is necessary to reproduce muscle development in a laboratory setting. Tissue engineering techniques can generate items that closely resemble real meat by introducing cells into an environment that reproduces natural tissue conditions (Bomkamp et al., 2022; Post, 2014). Prior and majority of current research efforts concentrated on the manufacturing process of CM (Benjaminson et al., 2002; Hanga et al., 2021; MacQueen et al., 2019; Singh et al., 2022; Stout et al., 2020). Scaffolds are porous structures that acts as templates for tissue formation (O'brien, 2011). They typically imitate the extracellular matrix, facilitating cellular attachment, proliferation, and/or differentiation. In CM, it is desired for the scaffold to assist in achieving certain desirable sensory features. Additionally, a crucial factor to consider is whether the scaffold should be an integral component of the end result, necessitating its edibility, compliance with food-grade standards, and nutritional value, or if it should be engineered to be easily removed. The primary goal of the scaffold is to promote the development of critical muscles, adipose tissue, and connective tissue. The final products derived from CM can undergo downstream processing to modify their properties, including texture and taste. These processing methods used are similar to those already used in the manufacturing of traditional meat products, such as chicken patties, minced beef, or sausages (King, 2019). In order to produce a structured CM product, such as a special cut, steak or fillet, it is necessary to employ

a scaffolding approach that enables cell proliferation, differentiation into key cell types, and spatial organization.

Scaffolding is pivotal for achieving the desired appearance and texture of meat cuts, ultimately enhancing the consumer experience (Ong et al., 2020). However, in the case of meat tissue that is highly structured and organized, such as muscle cuts and steaks, the use of highly vascularized scaffolds would be necessary. Aiming to generate organized meat at a large scale, relying exclusively on cell proliferation within the bioreactor may be inadequate. There is a need for the adoption of three-dimensional scaffolding aided cultivation system that can efficiently support the growth and differentiation of cells, and perhaps enable self-assembly to achieve certain organoleptic characteristics. Integrated scaffolding techniques like tissue perfusion bioreactors have been the subject of research in the field of bone tissue engineering (Bhaskar et al., 2018; Gomes et al., 2006) and arterial applications (Williams & Wick, 2004), suggesting their potential suitability for cardiac muscle applications. While the utilization of scaffold materials and 3D printing technology has made it possible for the manufacturing of muscle cells that are closer to meat, there is still a limitation in terms of reducing production costs to a level where they can be utilized as food. Furthermore, the task of creating edible materials poses a barrier due to the present unsuitability of the materials employed for in the production of ingestible CM (D. Y. Lee et al., 2023). The primary aim of this review is to analyze the scaffolds used in cellular agriculture, as well as explore potential processing techniques and biomaterials that could be incorporated into these scaffolds to improve the structural qualities of CM, with the goal of mimicking the characteristics of real meat.

## 2. Cultured meat

Edible meat, denoting the musculature of farmed animals, predominantly consists of skeletal muscular components comprised of aggregations of muscular fibers. During muscle tissue formation, individual muscle cells known as myoblasts undergo fusion with one another, resulting in the formation of multinucleated myotubes. These myotubes subsequently unite to become muscle fibers (Ostrovidov et al., 2014). On the contrary, CM is produced through tissue engineering techniques using stem cells under controlled environment setting as illustrated in figure 1. Initially, a biopsy is carried out on the animal to obtain the initial cells. The cells endure proliferation and differentiation subsequently into skeletal muscle cells. These cells are then maintained till they reach their particular maturation stage. At this moment, they can be collected and processed to make the final product (Gaydhane et al., 2018). Collection of stem cells can be done from either live animal biopsies or freshly slaughtered animals and grown in vitro to multiply cells (Arshad et al., 2017; Ben-Arye & Levenberg, 2019). In CM generally satellite cells are utilized which are the adult stem cells found in skeletal muscles and have the ability to develop into skeletal myotubes with minimal external input. Additionally, these cells can be used to differentiate into either muscle or fat cells by isolating specific type of stem cell that is isolated (Post, 2014).

Various categories of stem cells are available for both research and biomedical use. A typical instance is stem cells coming from adipose tissue, which have the ability to differentiate into multiple kinds of cells, such as muscle, bone, cartilage, and fat cells (Datar & Betti, 2010). Induced pluripotent stem cells (iPSCs) were first described by Takahashi and Yamanaka (2006). iPSCs can be obtained through noninvasive methods without causing harm to animals. Another kind, embryonic stem cells (ESCs) are also commonly used in stem cell research (Amit et al., 2000) and since discovered till now under investigation in the field of CM (Kim et al., 2022).

The development of CM products, such as patties, meatballs, and chicken nuggets, has been extensively investigated. Research papers have provided strong evidence in favor of the feasibility of CM products (Cassiday, 2018). Muscle stem cells possess a high propensity for differentiating into myotubes and myofibrils, represent a compelling avenue for the development of CM. These cells are widely employed in this context (Asakura et al., 2001). In order to gain a substantial portion of the market for real meat, it is imperative to thoroughly examine and develop a broad range of products using CM. There is a need to create a CM production process that can enhance the various flavor attributes, such as umami and bitterness, and regulate the chemical make-up of the growing medium in order to generate CM that closely resembles the taste of actual meat (Joo et al., 2022).

#### 3. Necessity of Scaffolds

In CM production stems cells placed on a biomaterial base known as a scaffold, microcarrier, or film. Scaffolds are kind of networks to provide support for the substrate, assist in the transportation of nutrients, and allow for cell respiration (Schätzlein & Blaeser, 2022). Scaffolds typically aids the replication of the extracellular matrix (ECM), providing a substrate for cell adhesion, proliferation, and differentiation. In CM process this scaffold base invigorates satellite cells to proliferate to build up a mass. Moreover, they enable the development of spatial heterogeneity within the resulting product, so achieving a meat-like structure (Stephens et al., 2018). Further development of edible directional scaffolds may replace the serum-free culture medium will significantly aid in reducing the CM production cost and animal welfare issues (Y. Chen et al., 2023).

In muscle stem cell growth, alignment, and adhesion are highly sustained by scaffold biomaterials. Scaffolding is essential for making dense, cohesive saturated meat to mimics flesh tissue's 3D milieu, particularly media perfusion and vascularization (Seah et al., 2022).

The primary objective of a scaffold is to replicate essential characteristics of the extracellular matrix (ECM), such as its mechanical integrity, flexibility, and nutritional composition. It is possible to replace the intricacy of the extracellular matrix (ECM) with less intricate scaffolding constructs that incorporate one or more essential structural proteins, growth factors, transcription factors, and other relevant components (Aisenbrey & Murphy, 2020).

### 4. Ideal characteristics of scaffolds

The scaffolds utilized in CM production must possess certain characteristics in order to effectively support tissue maturation. These characteristics include being biologically active, having a large surface area, being flexible and allowing for maximum growth medium diffusion. Additionally, it is important for these scaffolds to be edible, non-toxic, allergen free (Datar & Betti, 2010). The optimal porosity range for scaffolds is 30%–90%, with a pore size from 50 to 150 µm or higher for myogenic cells. The thickness of the scaffold usually depends on the processing techniques (Bomkamp et al., 2022). Microcarrier scaffolds are common in biomedical fields and offer multiple advantages compared to larger scaffolds. It has been observe that high cell densities and productivity are facilitated by their elevated surface area to mass ratio (Kong, Jing, et al., 2022). Microcarriers of bigger size enable improved cell attachment, whereas smaller microcarriers lead to higher growth rates as a consequence of increased shear stress (Norris et al., 2022).

Apart from microcarriers several other technologies are in use to manufacture scaffolds such as hydrogels, decellularized plants, 3D bioprinting, electrospinning, mold systems, injectable systems, etc. (Lee et al., 2019). While animal-derived extracellular matrix (ECM) proteins may not be suitable for use in cellular manufacturing (CM), it is possible to create these components using other methods such as microbial fermentation and plant molecular farming (Mohammadinejad et al., 2019). All the above techniques have some limitations such as unregulated dimension, inadequate consistency, residual chemicals, challenges in incorporating vascular networks and insufficient interconnectedness (Peng et al., 2018), which opens the door for further research to explore more suitable technologies and biomaterials in scaffold manufacturing.

According to previous studies using gelatin and soy protein aided in building ideal scaffolds to fulfill the necessary fibrous characteristics of meat (Ben-Arye et al., 2020; MacQueen et al., 2019). To mimic real meat the alignment of myoblasts is crucial and more investigation needs to develop aligned tissue structure. 3D scaffolds are routinely employed to facilitate cellular alignment and differentiation (Xiang et al., 2022) especially in the Biomedical fields. Technological challenges in scaffolding in CM seem highly complex due to the lack of a vascular system. To mimic real meat it is necessary to create a complex branching network of interrelated, consumable, versatile, and permeable material that allows for the circulation of nutrients and the attachment of myoblasts and other cell types (Bhat et al., 2014) which may be achievable by using appropriate scaffolds.

#### 5. Muscle Tissue Structure

In the field of culinary arts, it is of utmost significance to comprehend the correlation between the structure of muscles and the nutritional as well as sensory aspects of meat. The development techniques of CM are closely connected to the muscle tissue structure as muscle shape links to the nutritional and organoleptic characteristics of meat. In current practices, satellite cells are mostly collected from the skeletal muscles of cattle, chicken, pork, lamb, and fish (Post et al., 2020). The complex hierarchical tissue structure is responsible for the fibrous structure of meat. The muscle fiber is a primary functional unit and is surrounded by intramuscular fat tissues, connective tissue, vasculature, nerve tissues and are the primary determinants of muscle texture and quality parameters (Bomkamp et al., 2022; Listrat et al., 2016). To mimic the nutritional and structural attributes of real meat, CM techniques should be focused on recreating a tissue substantially composed of the same muscle structure like real meat muscle. Therefore, in order to devise pragmatic methodologies for the engineering of muscle tissue, it is imperative to understand the naturally existing muscular tissue (Figure 2).

The mouthfeel of intact meat pieces is attributed to a structured arrangement of proteins, organized in a certain order to produce elongated insoluble chains. These chains align in a parallel manner, ultimately forming elongated fibrils known as "myofibrils." The myofibrils further form the muscle fiber and are organized into elongated structures known as fascicles, which are the fundamental units of muscle tissue (Listrat et al., 2016). Myofibrils resemble like cables, which consist of contractile filaments made of elongated chains of actin and myosin. The filaments are partitioned into discrete contractile units known as sarcomeres. The distinct striated appearance of muscle cells is attributed to the arrangement of actin and myosin filaments that overlap within the myofibrils (Listrat et al., 2016; Lodish, 2008).

Intramuscular lipids play a crucial role in determining sensory and nutritional value of meat (Listrat et al., 2016) and plays a significant role in nutrition due to its provision of vitamins A, D, K, and E, as well as polyunsaturated fatty acids (Fish et al., 2020). Intramuscular fat predominantly consists of adipocytes, which are situated between muscle fibers and fascicles. The composition of intramuscular fat encompasses structural lipids, phospholipids, and intracellular lipid droplets located inside the muscle fibers (Listrat et al., 2016).

The primary source of load-bearing capacity in muscles is derived from the dense extracellular matrix (ECM), rather than the muscle fibers themselves. This highlights the significance of a robust support framework for fully developed muscle cells (Gillies & Lieber, 2011). In order to accurately replicate the mechanical properties of the extracellular matrix (ECM), it is imperative for tissue engineering approaches to employ scaffolding materials that closely

resemble the mechanical characteristics of the ECM. This is crucial for achieving a faithful representation of the native tissue. Extracellular matrix (ECM) exerts significant influence on the quality of traditional meat, manifesting in both its biological influence on muscle fibers in living organisms and alterations occurring during the postmortem aging process (Nishimura, 2015).

### 6. Scaffolding Biomaterials

Structural properties of scaffolds can be influenced by the utilization of scaffolding biomaterials. Scaffolding biomaterials habitually exhibit notable attributes such as exceptional biocompatibility, elevated porosity, and the capacity to reinstate the extracellular matrix (ECM) (Sharma et al., 2015). In the biomedical field, synthetic polymers are commonly employed as substitutes for the extracellular matrix (ECM) due to their desirable characteristics such as ease of processing, ability to decompose naturally, and minimal immune response (Chen & Liu, 2016). But A buildup of breakdown products could possibly modify the pH of the surrounding tissue, leading to unfavorable inflammatory reactions. That's why, Edible biomaterials, particularly those of natural origin, have attracted significant interest and are extensively employed in tissue regeneration in the biomedical fields due to their easy availability similarity in biological and chemical properties to real tissue (Su et al., 2021). In order to go towards a more environmentally friendly and sustainable scaffold development for CM production, the biomaterials should incorporate elements that are renewable, cost-effective, and easily abundant.

Scaffolds so far utilized in cellular agriculture offered in several formats, including fiber/ single dimension scaffold, film/ two-dimension scaffold, and three-dimension scaffold (microcarrier, sponge, hydrogel, etc.). A wide variety of scaffolding materials like proteins, polysaccharides, and polynucleotides are used in CM production from animal, plant, or synthetic origin (Stevens et al., 2008). Mechanical stretching of myoblasts can be achieved through the utilization of porous materials composed of cellulose, alginate, chitosan, or collagen (Narayanan et al., 2020). Edible biomaterials like elastin, gelatin, collagen, and fibronectin, originating from animals are high in Extra Cellular Matrix (ECM) and stimulate greater cellular growth (Reddy et al., 2021). Researchers are continuously studying different options and combinations of materials for producing sustainable scaffolds such as plant protein, animal protein, fish protein, marine animals, fungi, bread, seaweed, fruits, decellularized plants etc. A scaffold was recently created via the combination of gelatin and soymilk on which C2C12 cells exhibited a high expression of myosin, a crucial protein for myotube formation (Li et al., 2022). Different conventional and unconventional biomaterials so far used in the biomedical cell culture and CM has been illustrated in Table 1 for a better understanding of their efficacy and guideline for future research on scaffolding techniques.

To explore potential of different biomaterials as a scaffold for CM production requires additional investigation and development. Significant developments in the development of scaffolds discussed in detailed on the following sections.

#### 7. Edible scaffolds

For CM production edibility is the necessary need for scaffolds to ensure they possess the intended taste, nutrient composition, and texture (Norris et al., 2022). Thus, exploring edible and food-grade scaffolding materials is necessary to produce more sustainable and safer CM. There is a demand for an ingestible and esculent framework that is suitable for nurturing the growth of animal muscle tissue. Consumable material eases the process of CM by abolishing the step of separating scaffold from tissue (Enrione et al., 2017). Inedible and/or toxic compounds including solvents and crosslinkers should be minimized through intensive care to

the different biomaterial processing steps. Researchers are deliberately working on the development of edible and biodegradable scaffolds for CM production (Post et al., 2020).

Different efforts of manufacturing edible scaffolds have been discussed here for better understanding of the pros and cons for future sustainable research and developments. An edible scaffolds was produced using a method of cold-casting using micro molding, in which The films have been created using non-mammalian components (Acevedo et al., 2018). Orellana et al. (2020) developed a composite preparation possessing unique characteristics like bioactivity (salmon gelatin), crosslinking (calcium alginate), gelling (agarose), and plasticizing (glycerol).

Although the incorporation of non-animal materials is encouraged for cell CM, the efficient and proper processing of animal by-products such skin, ligaments, intestine and bones may also contribute to improving the sustainability of the traditional livestock farming. The application of animal by-products such as collagen (Ferraro et al., 2016) can be effectively deployed as edible casings, hence mitigating environmental contamination. In lieu of utilizing animal by products, a scaffold including aligned porous structures was developed using the directional freeze-drying technology applied to an edible collagen hydrogel which offered porous space for cell adhesion and growth and enhanced the directional development of cells due to plentiful tripeptide (Y. Chen et al., 2023).

Plant proteins and polysaccharides from different sources are frequently preferred as biomaterials for cell culture meat scaffolds. Decellularized spinach leaves as an edible scaffold were found to be similar to gelatin-coated glass to develop CM and was cost effective, potential, sustainable and ecological (Jones et al., 2021). A List of decellularized scaffold material options given in table 1 for better understanding and future research directions. Plant proteins such as soy, pea, zein and glutenin are competitive, abundant and able to transformed into films with appropriate mechanical characteristics for CM development (Dong et al., 2004). The

protein films made from glutenin and zein effectively promoted the growth of aligned cells and the further development of aligned myotubes (Xiang et al., 2022). Glutenin and zein could be promising candidates for upcoming research in the production of CM. Textured vegetable proteins (TVP) can be used for making fibrous scaffolds (Bakhsh et al., 2022). In addition to lowering the price of scaffold and CM, it could be beneficial to look for additional sources of premium plant protein that are available at affordable costs.

#### 8. Electrospinning

Electrospinning is a highly adaptable and efficient method that is utilized in several disciplines, including textiles, structural engineering, nano-devices, filtration, health safety items, biological fields, and tissue engineering. It offers a user-friendly interface, cost-effective with little solution utilization, Easy to replicate and modify with adjustable fiber size and the ability to be tailored to specific requirements (Thenmozhi et al., 2017).

The manufacture of nano fibers through the application of electrostatic forces has been recognized and examined by scientific and technological studies for a period of 120 years. In 1887, Charles Vernon was the first to address the manufacturing of nanofibers. He described the process of obtaining thin glass fibers, likely with a diameter smaller than a micrometer, employing a technique called "drawing" (Tong & Sumetsky, 2011). Nevertheless, the exploration of electrostatic forces began much earlier with Gilbert during 1600, who noticed the formation of a cone and jet when a charged amber stone was brought close to a droplet (Luo et al., 2012). John Francis Cooley submitted the first patent for electrospinning in 1900, marking a major breakthrough for future study (Agarwal et al., 2016). In 1914, researchers assessed the behavior of a droplet produced on a metallic capillary tip, which enabled them to mathematically simulate fluids that are exposed to electrostatic forces (Rafiei & Haghi, 2015).

Carbohydrates, such as monosaccharides, oligosaccharides, and polysaccharides, have practical applications in the food delivery industry through electrospinning techniques. These carbohydrates can be classified based on their biological sources, which include higher plants (such as cellulose, starch, pectin), animals (such as chitosan, chitin), algae (such as alginate and carrageenan), and microorganisms (such as xanthan, dextran, and cyclodextrins) (Fathi et al., 2014). Cellulose, Chitosan and their derivatives starch and dextran have been identified as suitable materials for electrospinning outer wall materials (Desai et al., 2008; Ghorani & Tucker, 2015; Kong & Ziegler, 2012; Sun et al., 2013). Researchers created edible nanofibrous thin films using electrospinning (Wongsasulak et al., 2010).

The alignment and the porous architecture within the scaffolds known to serve a significant role in emulating the structural characteristics of real meat. In CM production it is imperative to explore innovative approaches for fabricating aligned scaffolding architectures like electrospun nano fibers. Even though electrospinning in the food processing is largely employed in food packaging and delivery systems (Coelho et al., 2021; Khoshnoudi-Nia et al., 2020), the possibility of this technique to generate microfibers has piqued the interest of researchers for CM technologies.

Electrospinning is a simple method that only requires a few mechanical component: high voltage power supply, syringe pump, syringe with a needle or capillary tip (spinneret), and collector (plate/drum) (Esfanjani & Jafari, 2016). The electrospinning technique requires the application of electric field with high-voltage to charge the surface of a droplet containing a polymer solution. This charge enables a liquid jet to be released through a spinneret (Mendes et al., 2017). Electrospinning can be divided into two distinct phases, at first, a biomaterial solution is loaded into a syringe and injected through the needle with the high voltage electric field, where spherical droplets form into a Taylor cone (Figure 3). Later the solvent evaporates

to get thinner and conical droplets solidly to create micro or nanofiber filaments which deposits on a grounded or rotating collector (Ghorani & Tucker, 2015). The electrospinning technique is known for its efficient, low-cost, and sustainable process to produce fine fibers using biopolymer materials (Zhang et al., 2018). Electrospinning is intriguing for scaffold construction because it is easy, controlled, have extensive surface area (Rijal et al., 2017), reproducible, and it can produce polymers with distinct properties (Riboldi et al., 2005).

Nanofiber scaffolds should be composed of safe and edible components like polysaccharides and proteins that are well suited for CM production because they can easily break down, are compatible with living cells, have biological effects, and can be safely consumed (Ben-Arye & Levenberg, 2019). Most of the research works on nano fibers using electrospinning technique are in the biomedical field. Biomedical studies conducted to evaluate the influence of permeability and orientation of random and aligned electrospun nanofibers on skeletal muscle cells (Park & Lek, 2016). Immersion rotary jet spinning technique used to focus CM and scaffold constructed with gelatin which was seeded with bovine aortic smooth muscle cells and rabbit skeletal muscle myoblast to mimic muscle tissues (MacQueen et al., 2019). This study was not successful to produce a final product to mimic natural contractile muscle. There have been limited research utilizing electrospinning techniques to create nano fibers for the purpose of cell proliferation or adhesion in the CM production process. However, this method is gaining popularity since it aims to replicate actual flesh. Figure 3 provides a concise overview of several current research papers, offering a deeper understanding of electrospinning techniques in the CM field.

Alternative spinning processes, like as rotary jet spinning, can be employed to generate nanofibers possessing diverse advantageous characteristics for CM (MacQueen et al., 2019). Needleless electrospinning has developed as a more effective method for large-scale

manufacture of ultrathin fibers as opposed to conventional needle electrospinning (Yu et al., 2017). In needleless electrospinning the maintenance is easier and no clogging of spinneret found than needle e-spinning. Whereas it is difficult to maintain the consistency of the solution concentration and viscosity (Yu et al., 2017). In theory, the e-spinning jets can be generated from any type of spinnerets, provided that the electrostatic force surpasses the critical limit of the electrospinning solution (Niu et al., 2012). The same needle-free approach can be employed to rotary spinnerets that are partially submerged in the polymer solution (Jirsak et al., 2010). Moreover, needleless approach may be useful to avoid the clogging of needle for many non-animal based biomaterials in the CM production. Nevertheless, this type of techniques needs to be studied and verified for the possible development of nanofiber scaffolds for CM production.

#### 9. Three Dimensional (3D) bioprinting

The utilization of three-dimensional (3D) printing in meat processing is already underway, since it offers the added advantages of producing bespoke geometrics and large-size structures (Dick et al., 2019). 3D bioprinting is a specialized area within 3D printing that focuses on the precise organization of bioinks, which are composed of a combination of biomaterials and living cells, in a step-by-step manner and enables the fabrication of three-dimensional biological structures (Murphy & Atala, 2014). Tissue engineering (Chu et al., 2021; Demirtaş et al., 2017), drug screening (Ma et al., 2018; Nie et al., 2020), and regenerative medicine (S. Y. Lee et al., 2023) are only couple of areas that have made substantial use of this technology due to its remarkable efficacy, precision, and accuracy.

The application of three-dimensional bioprinting into the production procedure of CM is now in its preliminary phases. The current state of 3D printed meat is still dependent on components that are derived from animals. According to S. Y. Lee et al. (2023), 3D bioprinting has brought about major advancements in the fabrication of CM, which is a field of research that has been deemed to be at the cutting edge. Tissue engineering and 3D printing combinedly has the potential to significantly enhance the quality of CM by the creation of a product that closely resembles the appearance of animal flesh (Balasubramanian et al., 2021; K. Handral et al., 2022; Lanzoni et al., 2022). Previous research has provided theoretical concepts for this methodology and theorized about the potential advantages that it may give. In spite of this, these works do not contain a in depth review of the progress that has been made in this particular field, and there has been no special evaluation that has been conducted to offer direction for the future progression of this research direction.

3D bioprinting focuses on the concerns in the existing scaffolding techniques utilized in CM and trying to effectively govern tissue maturation, potentially leading to suboptimal nutritional and organoleptic characteristics in CM. The utilization of 3D bioprinting techniques enables exact control over the ratios of cells, their spatial arrangement, and the densities of specific cell types (Gungor-Ozkerim et al., 2018). In the recent years, there has been an increasing interest among academics in exploring various bioink formulations for their usefulness in the field of tissue engineering and regenerative medicine. This interest has been spurred on by the advent of 3D printing. A summary of the most important discoveries and developments in bioink research during the past few years may be found in Table 2.

This advancement in bioprinting holds the potential to produce CM that closely resembles traditional meat in terms of texture and overall characteristics. Fabrication of 3D tissue construction is possible by bio printing with pre-programmed structures and geometries containing biomaterials and/or living cells, this combination is known as bioink (Gungor-Ozkerim et al., 2018). The process of 3D bioprinting distinguishes itself from the exclusive cultivation of meat due to its ability to fabricate muscle cells, fat cells, and extracellular matrix

(ECM) supporting cells within a scaffold that facilitates cellular growth and proliferation (Sun et al., 2018). Following the completion of the printing procedure, the meat undergoes an additional maturation phase, typically facilitated by bioreactors that facilitate the transportation of nutrients (Zhang et al., 2018).

The fibrous composition of a 3D printed scaffold plays a crucial role in augmenting the sensory attributes of printed meat products. 3D bioprinting was successfully used to mimic porcine skeletal muscle tissue. Ozbolat & Hospodiuk suggested that extrusion-based bio printing is feasible for constructing CM scaffolds. Furthermore, they can imitate natural tissues which is convenient (Ozbolat & Hospodiuk, 2016). A combination of pea protein isolate and soy protein isolate with RGD-modified alginate is recommended as potential bioinks for 3D printed scaffolds in bovine satellite cell cultivation with up to 90% cell viability (Ianovici et al., 2022). Using cellularized gel fibers, beef steak like tissue was created from bovine satellite cells and printed onto a support bath with tendon-gel integrated bioprinting-TIP technique (Kang et al., 2021).

Some researchers mention other methods than 3D bioprinting with biomaterials may have bottlenecks like food incompatibility, residual effects, high cost, etc. (Levi et al., 2022). The rheological characteristics of meat-based ink, the deposition process after printing, and the stability of the printed scaffold during post-processing (cooking) are crucial variables that must be considered in order to achieve the necessary requirements for 3D bioprinting of CM. For CM production, 3D bio printing technology may promise way to obtain tissue structure from muscle cells.

Companies started with meat alternative extended their investments for the commercial production of CM and fish. Figure 4 illustrates the major players in 3D CM production investors and their latest standpoint in the industry. Companies that initially entered the market

of meat analogs have expanded their investments to 3D bioprinting facilities in large scale for the commercial production of cultured meat and fish. Figure 4 depicts the key stakeholders involved in the manufacture of three-dimensional (3D) bioprint generated manufacturing of CM, together with their most recent positions within the industry.

## **10.** Conclusion

- Intensive research is required to bring the organoleptic and structural characteristics of real meat into CM. In order to mimic real meat, the design or structure of scaffold would be of paramount important in coming days. 3D scaffold or nanofilms/fibers could be helpful for cell attachment in a structured way.
- 2. Wide range of biomaterials studied for creating scaffolds to culture animal cells, but sustainable biomaterials need to be inexpensive, nontoxic, edible, degradable and easily available. Many edible conventional and unconventional materials such as plant protein, decellularized leaves, plant polysaccharides, algae, insect, breads have been used as scaffolding materials and noted in this review which are natural, having significant nutritional value and safe. Further study on these biomaterials will be helpful to develop sustainable scaffolds.
- 3. Although different types of scaffolding techniques are in use for the production of CM, the major focus should be the development of structured product through aligned and directional cell growth to mimic the real meat muscle cut. With this focus, electrospinning techniques and 3D bioprinting could be promising for the creation of elongated nanofibers, directional cell growth and structured end product considering suitable edible biomaterials that are well adapted with these processes.

Acknowledgment: This research was supported by a National Research Foundation of Korea (NRF) grant funded by the Korean government (MSIT) (No. 2020R1I1A206937911), and the

Korean Institute of Planning and Evaluation for Technology in Food, Agriculture, Forestry and Fisheries (IPET) through the Agri-Bioindustry Technology Development Program, funded by the Ministry of Agriculture, Food, and Rural Affairs (MAFRA) (Project No. 321028-5), Korea.

**Conflicts of Interest:** The authors declare that they have no conflicts of interest.

### References

- Acevedo, C. A., Orellana, N., Avarias, K., Ortiz, R., Benavente, D., & Prieto, P. (2018). Micropatterning technology to design an edible film for in vitro meat production. *Food and Bioprocess Technology*, 11, 1267-1273. <u>https://doi.org/10.1007/s11947-018-2095-4</u>
- Acevedo, C. A., Sánchez, E., Orellana, N., Morales, P., Olguín, Y., Brown, D. I., & Enrione, J. (2019). Re-epithelialization appraisal of skin wound in a porcine model using a salmon-gelatin based biomaterial as wound dressing. *Pharmaceutics*, 11(5), 196. <u>https://doi.org/10.3390/pharmaceutics11050196</u>
- Agarwal, S., Burgard, M., Greiner, A., & Wendorff, J. (2016). *Electrospinning: a practical guide to nanofibers*. Walter de Gruyter GmbH & Co KG.
- Ahrens, J. H., Uzel, S. G., Skylar-Scott, M., Mata, M. M., Lu, A., Kroll, K. T., & Lewis, J. A. (2022). Programming cellular alignment in engineered cardiac tissue via bioprinting anisotropic organ building blocks. *Advanced Materials*, 34(26), 2200217. <u>https://doi.org/10.1002/adma.202200217</u>
- Aiking, H. (2011). Future protein supply. *Trends in Food Science & Technology*, 22(2-3), 112-120. <u>https://doi.org/10.1016/j.tifs.2010.04.005</u>
- Aisenbrey, E. A., & Murphy, W. L. (2020). Synthetic alternatives to Matrigel. *Nature Reviews Materials*, 5(7), 539-551. <u>https://doi.org/10.1038/s41578-020-0199-8</u>
- Akar, N. A., Peközer, G. G., & KÖSE, G. (2019). Fibrous bone tissue engineering scaffolds prepared by wet spinning of PLGA. *Turkish Journal of Biology*, 43(4), 235-245. https://doi.org/10.3906/biy-1904-63
- Alheib, O., da Silva, L. P., da Silva Morais, A., Mesquita, K. A., Pirraco, R. P., Reis, R. L., & Correlo, V. M. (2022). Injectable laminin-biofunctionalized gellan gum hydrogels loaded with myoblasts for skeletal muscle regeneration. *Acta Biomaterialia*, 143, 282-294. <u>https://doi.org/10.1016/j.actbio.2022.03.008</u>
- Allan, S. J., Ellis, M. J., & De Bank, P. A. (2021). Decellularized grass as a sustainable scaffold for skeletal muscle tissue engineering. *Journal of Biomedical Materials Research Part A*, 109(12), 2471-2482. <u>https://doi.org/10.1002/jbm.a.37241</u>
- Amit, M., Carpenter, M. K., Inokuma, M. S., Chiu, C.-P., Harris, C. P., Waknitz, M. A., Itskovitz-Eldor, J., & Thomson, J. A. (2000). Clonally derived human embryonic stem cell lines maintain pluripotency and proliferative potential for prolonged periods of culture. *Developmental biology*, 227(2), 271-278. <a href="https://doi.org/10.1006/dbio.2000.9912">https://doi.org/10.1006/dbio.2000.9912</a>
- Apsite, I., Uribe, J. M., Posada, A. F., Rosenfeldt, S., Salehi, S., & Ionov, L. (2020). 4D biofabrication of skeletal muscle microtissues. *Biofabrication*, 12(1), 015016. <u>https://doi.org/10.1088/1758-5090/ab4cc4</u>

- Arshad, M. S., Javed, M., Sohaib, M., Saeed, F., Imran, A., & Amjad, Z. (2017). Tissue engineering approaches to develop cultured meat from cells: A mini review. *Cogent Food & Agriculture*, 3(1), 1320814. <u>https://doi.org/10.1080/23311932.2017.1320814</u>
- Asakura, A., Rudnicki, M. A., & Komaki, M. (2001). Muscle satellite cells are multipotential stem cells that exhibit myogenic, osteogenic, and adipogenic differentiation. *Differentiation*, 68(4-5), 245-253. <u>https://doi.org/10.1046/j.1432-0436.2001.680412.x</u>
- Ayres, C. E., Bowlin, G. L., Pizinger, R., Taylor, L. T., Keen, C. A., & Simpson, D. G. (2007). Incremental changes in anisotropy induce incremental changes in the material properties of electrospun scaffolds. *Acta Biomaterialia*, 3(5), 651-661. https://doi.org/10.1016/j.actbio.2007.02.010
- Badrossamay, M. R., McIlwee, H. A., Goss, J. A., & Parker, K. K. (2010). Nanofiber assembly by rotary jet-spinning. *Nano letters*, *10*(6), 2257-2261. <u>https://doi.org/10.1021/nl101355x</u>
- Bakhsh, A., Lee, E.-Y., Ncho, C. M., Kim, C.-J., Son, Y.-M., Hwang, Y.-H., & Joo, S.-T. (2022). Quality characteristics of meat analogs through the incorporation of textured vegetable protein: A systematic review. *Foods*, 11(9), 1242. <u>https://doi.org/10.3390/foods11091242</u>
- Balasubramanian, B., Liu, W., Pushparaj, K., & Park, S. (2021). The epic of in vitro meat production—a fiction into reality. *Foods*, 10(6), 1395. <u>https://doi.org/10.3390/foods10061395</u>
- Bar-Shai, N., Sharabani-Yosef, O., Zollmann, M., Lesman, A., & Golberg, A. (2021). Seaweed cellulose scaffolds derived from green macroalgae for tissue engineering. *Scientific reports*, 11(1), 11843. <u>https://doi.org/10.1038/s41598-021-90903-2</u>
- Beier, J. P., Klumpp, D., Rudisile, M., Dersch, R., Wendorff, J. H., Bleiziffer, O., Arkudas, A., Polykandriotis, E., Horch, R. E., & Kneser, U. (2009). Collagen matrices from sponge to nano: new perspectives for tissue engineering of skeletal muscle. *BMC biotechnology*, 9, 1-14. <u>https://doi.org/10.1186/1472-6750-9-34</u>
- Ben-Arye, T., & Levenberg, S. (2019). Tissue engineering for clean meat production. Frontiers in Sustainable Food Systems, 3, 46. <u>https://doi.org/10.3389/fsufs.2019.00046</u>
- Ben-Arye, T., Shandalov, Y., Ben-Shaul, S., Landau, S., Zagury, Y., Ianovici, I., Lavon, N., & Levenberg, S. (2020). Textured soy protein scaffolds enable the generation of threedimensional bovine skeletal muscle tissue for cell-based meat. *Nature Food*, 1(4), 210-220. <u>https://doi.org/10.1038/s43016-020-0046-5</u>
- Benjaminson, M. A., Gilchriest, J. A., & Lorenz, M. (2002). In vitro edible muscle protein production system (MPPS): Stage 1, fish. Acta astronautica, 51(12), 879-889. <u>https://doi.org/10.1016/S0094-5765(02)00033-4</u>
- Bhaskar, B., Owen, R., Bahmaee, H., Rao, P. S., & Reilly, G. C. (2018). Design and assessment of a dynamic perfusion bioreactor for large bone tissue engineering scaffolds. *Applied biochemistry and biotechnology*, 185, 555-563. <u>https://doi.org/10.1007/s12010-017-2671-5</u>

- Bhat, Z. F., Bhat, H., & Pathak, V. (2014). Prospects for in vitro cultured meat–a future harvest. In *Principles of tissue engineering* (pp. 1663-1683). Elsevier. https://doi.org/10.1016/B978-0-12-398358-9.00079-3
- Bolívar-Monsalve, E. J., Ceballos-González, C. F., Borrayo-Montaño, K. I., Quevedo-Moreno,
  D. A., Yee-de León, J. F., Khademhosseini, A., Weiss, P. S., Alvarez, M. M., & Trujillo-de Santiago, G. (2021). Continuous chaotic bioprinting of skeletal muscle-like constructs. *Bioprinting*, 21, e00125. <u>https://doi.org/10.1016/j.bprint.2020.e00125</u>
- Bomkamp, C., Skaalure, S. C., Fernando, G. F., Ben-Arye, T., Swartz, E. W., & Specht, E. A. (2022). Scaffolding biomaterials for 3D cultivated meat: prospects and challenges. *Advanced Science*, 9(3), 2102908. <u>https://doi.org/10.1002/advs.202102908</u>
- Bonny, S. P., Gardner, G. E., Pethick, D. W., & Hocquette, J.-F. (2015). What is artificial meat, and what does it mean for the future of the meat industry? *Journal of Integrative Agriculture*, *14*(2), 255-263. <u>https://doi.org/10.1016/S2095-3119(14)60888-1</u>
- Cai, S., Wu, C., Yang, W., Liang, W., Yu, H., & Liu, L. (2020). Recent advances in surface modification for regulating cell adhesion and behaviors. *Nanotechnology Reviews*, 9(1), 971-989. <u>https://doi.org/10.1515/ntrev-2020-0076</u>
- Campuzano, S., Mogilever, N. B., & Pelling, A. E. (2020). Decellularized plant-based scaffolds for guided alignment of myoblast cells. *BioRxiv*, 2020.2002. 2023.958686. <u>https://doi.org/10.1101/2020.02.23.958686</u>
- Cassiday, L. (2018). Clean meat. inform, 29(2), 6-14.
- Chantre, C. O., Campbell, P. H., Golecki, H. M., Buganza, A. T., Capulli, A. K., Deravi, L. F., Dauth, S., Sheehy, S. P., Paten, J. A., & Gledhill, K. (2018). Production-scale fibronectin nanofibers promote wound closure and tissue repair in a dermal mouse model. *Biomaterials*, 166, 96-108. <u>https://doi.org/10.1016/j.biomaterials.2018.03.006</u>
- Chen, F.-M., & Liu, X. (2016). Advancing biomaterials of human origin for tissue engineering. *Progress in polymer science*, *53*, 86-168. <u>https://doi.org/10.1016/j.progpolymsci.2015.02.004</u>
- Chen, X., Li, L., Chen, L., Shao, W., Chen, Y., Fan, X., Liu, Y., Tang, C., Ding, S., & Xu, X. (2023). Tea polyphenols coated sodium alginate-gelatin 3D edible scaffold for cultured meat. *Food Research International*, *173*, 113267. https://doi.org/10.1016/j.foodres.2023.113267
- Chen, Y., Zhang, W., Ding, X., Ding, S., Tang, C., Zeng, X., Wang, J., & Zhou, G. (2023).
   Programmable scaffolds with aligned porous structures for cell cultured meat. *Food Chemistry*, 430, 137098.
   <u>https://doi.org/https://doi.org/10.1016/j.foodchem.2023.137098</u>
- Cheng, Y.-W., Shiwarski, D. J., Ball, R. L., Whitehead, K. A., & Feinberg, A. W. (2020). Engineering aligned skeletal muscle tissue using decellularized plant-derived scaffolds. *ACS biomaterials science & engineering*, 6(5), 3046-3054. <u>https://doi.org/10.1021/acsbiomaterials.0c00058</u>

- Chu, Y., Huang, L., Hao, W., Zhao, T., Zhao, H., Yang, W., Xie, X., Qian, L., Chen, Y., & Dai, J. (2021). Long-term stability, high strength, and 3D printable alginate hydrogel for cartilage tissue engineering application. *Biomedical Materials*, 16(6), 064102. <u>https://doi.org/10.1088/1748-605X/ac2595</u>
- Cidonio, G., Cooke, M., Glinka, M., Dawson, J., Grover, L., & Oreffo, R. (2019). Printing bone in a gel: using nanocomposite bioink to print functionalised bone scaffolds. *Materials Today Bio*, *4*, 100028. <u>https://doi.org/10.1016/j.mtbio.2019.100028</u>
- Coelho, S. C., Estevinho, B. N., & Rocha, F. (2021). Encapsulation in food industry with emerging electrohydrodynamic techniques: Electrospinning and electrospraying–A review. *Food Chemistry*, 339, 127850. <u>https://doi.org/10.1016/j.foodchem.2020.127850</u>
- Contessi Negrini, N., Toffoletto, N., Farè, S., & Altomare, L. (2020). Plant tissues as 3D natural scaffolds for adipose, bone and tendon tissue regeneration. *Frontiers in Bioengineering and Biotechnology*, 8, 723. <u>https://doi.org/10.3389/fbioe.2020.00723</u>
- Cui, B., Liang, H., Li, J., Zhou, B., Chen, W., Liu, J., & Li, B. (2022). Development and characterization of edible plant-based fibers using a wet-spinning technique. *Food Hydrocolloids*, 133, 107965. <u>https://doi.org/10.1016/j.foodhyd.2022.107965</u>
- Czaja-Bulsa, G., & Bulsa, M. (2017). What do we know now about IgE-mediated wheat allergy in children? *Nutrients*, 9(1), 35. <u>https://doi.org/10.3390/nu9010035</u>
- Datar, I., & Betti, M. (2010). Possibilities for an in vitro meat production system. *Innovative Food* Science & Emerging Technologies, 11(1), 13-22. <u>https://doi.org/10.1016/j.ifset.2009.10.007</u>
- Delcour, J. A., & Poutanen, K. (2013). *Fibre-rich and wholegrain foods: improving quality*. Elsevier.
- Demirtaş, T. T., Irmak, G., & Gümüşderelioğlu, M. (2017). A bioprintable form of chitosan hydrogel for bone tissue engineering. *Biofabrication*, 9(3), 035003. https://doi.org/10.1088/1758-5090/aa7b1d
- Desai, K., Kit, K., Li, J., & Zivanovic, S. (2008). Morphological and surface properties of electrospun chitosan nanofibers. *Biomacromolecules*, 9(3), 1000-1006. <u>https://doi.org/10.1021/bm701017z</u>
- Dick, A., Bhandari, B., & Prakash, S. (2019). 3D printing of meat. *Meat science*, 153, 35-44. <u>https://doi.org/10.1088/1758-5090/aa7b1d</u>
- Dong, J., Sun, Q., & Wang, J.-Y. (2004). Basic study of corn protein, zein, as a biomaterial in tissue engineering, surface morphology and biocompatibility. *Biomaterials*, 25(19), 4691-4697. <u>https://doi.org/10.1016/j.biomaterials.2003.10.084</u>
- Dutta, S. D., Ganguly, K., Jeong, M.-S., Patel, D. K., Patil, T. V., Cho, S.-J., & Lim, K.-T. (2022). Bioengineered lab-grown meat-like constructs through 3D bioprinting of antioxidative protein hydrolysates. ACS Applied Materials & Interfaces, 14(30), 34513-34526. <u>https://doi.org/10.1021/acsami.2c10620</u>

- Elli, L., Dolfini, E., & Bardella, M. T. (2003). Gliadin cytotoxicity and in vitro cell cultures. *Toxicology letters*, 146(1), 1-8. <u>https://doi.org/10.1016/j.toxlet.2003.09.004</u>
- Enrione, J., Blaker, J. J., Brown, D. I., Weinstein-Oppenheimer, C. R., Pepczynska, M., Olguín, Y., Sánchez, E., & Acevedo, C. A. (2017). Edible scaffolds based on non-mammalian biopolymers for myoblast growth. *Materials*, 10(12), 1404. <u>https://doi.org/10.3390/ma10121404</u>
- Enrione, J., Pino, K., Pepczynska, M., Brown, D. I., Ortiz, R., Sánchez, E., & Acevedo, C. A. (2018). A novel biomaterial based on salmon-gelatin and its in vivo evaluation as sterile wound-dressing. *Materials Letters*, 212, 159-164. https://doi.org/10.1016/j.matlet.2017.10.049
- Esfanjani, A. F., & Jafari, S. M. (2016). Biopolymer nano-particles and natural nano-carriers for nano-encapsulation of phenolic compounds. *Colloids and Surfaces B: Biointerfaces*, *146*, 532-543. <u>https://doi.org/10.1016/j.colsurfb.2016.06.053</u>
- Fathi, M., Martín, Á., & McClements, D. J. (2014). Nanoencapsulation of food ingredients using carbohydrate based delivery systems. *Trends in Food Science & Technology*, 39(1), 18-39. <u>https://doi.org/10.1016/j.tifs.2014.06.007</u>
- Ferraro, V., Anton, M., & Santé-Lhoutellier, V. (2016). The "sisters" α-helices of collagen, elastin and keratin recovered from animal by-products: Functionality, bioactivity and trends of application. *Trends in Food Science & Technology*, 51, 65-75. <u>https://doi.org/10.1016/j.tifs.2016.03.006</u>
- Fish, K. D., Rubio, N. R., Stout, A. J., Yuen, J. S., & Kaplan, D. L. (2020). Prospects and challenges for cell-cultured fat as a novel food ingredient. *Trends in Food Science & Technology*, 98, 53-67. <u>https://doi.org/10.1016/j.tifs.2020.02.005</u>
- Fraeye, I., Kratka, M., Vandenburgh, H., & Thorrez, L. (2020). Sensorial and nutritional aspects of cultured meat in comparison to traditional meat: much to be inferred. *Frontiers in Nutrition*, 7, 35. <u>https://doi.org/10.3389/fnut.2020.00035</u>
- Furuhashi, M., Morimoto, Y., Shima, A., Nakamura, F., Ishikawa, H., & Takeuchi, S. (2021). Formation of contractile 3D bovine muscle tissue for construction of millimetre-thick cultured steak. NPJ science of food, 5(1), 6. <u>https://doi.org/10.1038/s41538-021-00090-7</u>
- Garcia-Cruz, M., Postma, A., Frith, J., & Meagher, L. (2021). Printability and bio-functionality of a shear thinning methacrylated xanthan–gelatin composite bioink. *Biofabrication*, *13*(3), 035023. <u>https://doi.org/10.1088/1758-5090/abec2d</u>
- Garrett, A., Jaberi, A., Viotto, A., Yang, R., Tamayol, A., Malshe, A., & Sealy, M. P. (2021). Rotational Digital Light Processing for Edible Scaffold Fabrication. 2021 International Solid Freeform Fabrication Symposium,
- Gaydhane, M. K., Mahanta, U., Sharma, C. S., Khandelwal, M., & Ramakrishna, S. (2018). Cultured meat: state of the art and future. *Biomanufacturing Reviews*, *3*, 1-10. <u>https://doi.org/10.1007/s40898-018-0005-1</u>

- Ge, H., Tan, L., Wu, P., Yin, Y., Liu, X., Meng, H., Cui, G., Wu, N., Lin, J., & Hu, R. (2015).
   Poly-L-ornithine promotes preferred differentiation of neural stem/progenitor cells via ERK signalling pathway. *Scientific reports*, 5(1), 15535.
   <u>https://doi.org/10.1038/srep15535</u>
- Genova, T., Roato, I., Carossa, M., Motta, C., Cavagnetto, D., & Mussano, F. (2020). Advances on bone substitutes through 3D bioprinting. *International journal of molecular sciences*, 21(19), 7012. <u>https://doi.org/10.3390/ijms21197012</u>
- Ghorani, B., & Tucker, N. (2015). Fundamentals of electrospinning as a novel delivery vehicle for bioactive compounds in food nanotechnology. *Food Hydrocolloids*, *51*, 227-240. https://doi.org/10.1016/j.foodhyd.2015.05.024
- Gillies, A. R., & Lieber, R. L. (2011). Structure and function of the skeletal muscle extracellular matrix. *Muscle & nerve*, 44(3), 318-331. <u>https://doi.org/10.1002/mus.22094</u>
- Gomes, M. E., Bossano, C. M., Johnston, C. M., Reis, R. L., & Mikos, A. G. (2006). In vitro localization of bone growth factors in constructs of biodegradable scaffolds seeded with marrow stromal cells and cultured in a flow perfusion bioreactor. *Tissue engineering*, *12*(1), 177-188. <u>https://doi.org/10.1089/ten.2006.12.177</u>
- Goudoulas, T. B., & Germann, N. (2017). Phase transition kinetics and rheology of gelatinalginate mixtures. *Food Hydrocolloids*, 66, 49-60. <u>https://doi.org/10.1016/j.foodhyd.2016.12.018</u>
- Gungor-Ozkerim, P. S., Inci, I., Zhang, Y. S., Khademhosseini, A., & Dokmeci, M. R. (2018). Bioinks for 3D bioprinting: an overview. *Biomaterials science*, 6(5), 915-946. <u>https://doi.org/10.1039/C7BM00765E</u>
- Gustafsson, J., Cederberg, C., Sonesson, U., & Emanuelsson, A. (2013). The methodology of the FAO study: Global Food Losses and Food Waste-extent, causes and prevention"-FAO, 2011. In: SIK Institutet för livsmedel och bioteknik.
- Gutowska, A., Jeong, B., & Jasionowski, M. (2001). Injectable gels for tissue engineering. *The Anatomical Record: An Official Publication of the American Association of Anatomists*, 263(4), 342-349. <u>https://doi.org/10.1002/ar.1115</u>
- Hanga, M. P., de la Raga, F. A., Moutsatsou, P., Hewitt, C. J., Nienow, A. W., & Wall, I. (2021). Scale-up of an intensified bioprocess for the expansion of bovine adiposederived stem cells (bASCs) in stirred tank bioreactors. *Biotechnology and Bioengineering*, 118(8), 3175-3186. <u>https://doi.org/10.1002/bit.27842</u>
- Holmes, J. T., Jaberansari, Z., Collins, W., Latour, M. L., Modulevsky, D. J., & Pelling, A. E. (2022). Homemade bread: Repurposing an ancient technology for in vitro tissue engineering. *Biomaterials*, 280, 121267. https://doi.org/10.1016/j.biomaterials.2021.121267
- Hu, Y.-N., Sung, T.-J., Chou, C.-H., Liu, K.-L., Hsieh, L.-P., & Hsieh, C.-W. (2019). Characterization and antioxidant activities of yellow strain Flammulina velutipes (Jinhua mushroom) polysaccharides and their effects on ROS content in L929 cell. *Antioxidants*, 8(8), 298. <u>https://doi.org/10.3390/antiox8080298</u>

- Ianovici, I., Zagury, Y., Redenski, I., Lavon, N., & Levenberg, S. (2022). 3D-printable plant protein-enriched scaffolds for cultivated meat development. *Biomaterials*, 284, 121487. <u>https://doi.org/10.1016/j.biomaterials.2022.121487</u>
- Jeong, D., Seo, J. W., Lee, H. G., Jung, W. K., Park, Y. H., & Bae, H. (2022). Efficient Myogenic/Adipogenic Transdifferentiation of Bovine Fibroblasts in a 3D Bioprinting System for Steak-Type Cultured Meat Production. *Advanced Science*, 9(31), 2202877. https://doi.org/10.1002/advs.202202877
- Jirsak, O., Sysel, P., Sanetrnik, F., Hruza, J., & Chaloupek, J. (2010). Polyamic acid nanofibers produced by needleless electrospinning. *Journal of Nanomaterials*, 2010, 1-6. <u>https://doi.org/10.1155/2010/842831</u>
- Jones, J. D., Rebello, A. S., & Gaudette, G. R. (2021). Decellularized spinach: An edible scaffold for laboratory-grown meat. *Food Bioscience*, 41, 100986. https://doi.org/10.1016/j.fbio.2021.100986
- Joo, S.-T., Choi, J.-S., Hur, S.-J., Kim, G.-D., Kim, C.-J., Lee, E.-Y., Bakhsh, A., & Hwang, Y.-H. (2022). A comparative study on the taste characteristics of satellite cell cultured meat derived from chicken and cattle muscles. *Food Science of Animal Resources*, 42(1), 175. <u>https://doi.org/10.5851/kosfa.2021.e72</u>
- Jovic, T. H., Kungwengwe, G., Mills, A. C., & Whitaker, I. S. (2019). Plant-derived biomaterials: a review of 3D bioprinting and biomedical applications. *Frontiers in Mechanical Engineering*, 5, 19. <u>https://doi.org/10.3389/fmech.2019.00019</u>
- K. Handral, H., Hua Tay, S., Wan Chan, W., & Choudhury, D. (2022). 3D Printing of cultured meat products. *Critical Reviews in Food Science and Nutrition*, 62(1), 272-281. <u>https://doi.org/10.1080/10408398.2020.1815172</u>
- Kang, D.-H., Louis, F., Liu, H., Shimoda, H., Nishiyama, Y., Nozawa, H., Kakitani, M., Takagi, D., Kasa, D., & Nagamori, E. (2021). Engineered whole cut meat-like tissue by the assembly of cell fibers using tendon-gel integrated bioprinting. *Nature Communications*, 12(1), 5059. <u>https://doi.org/10.1038/s41467-021-25236-9</u>
- Khoshnoudi-Nia, S., Sharif, N., & Jafari, S. M. (2020). Loading of phenolic compounds into electrospun nanofibers and electrosprayed nanoparticles. *Trends in Food Science & Technology*, 95, 59-74. https://doi.org/10.1016/j.tifs.2019.11.013
- Kim, S.-H., Kim, C.-J., Lee, E.-Y., Son, Y.-M., Hwang, Y.-H., & Joo, S.-T. (2022). Optimal Pre-Plating Method of Chicken Satellite Cells for Cultured Meat Production. *Food Science of Animal Resources*, 42(6), 942-952. <u>https://doi.org/10.5851/kosfa.2022.e61</u>
- King, T. (2019). Meat re-imagined: Alternative proteins and what they mean for Australia. *Food Australia*, 71(3), 24-27. <u>https://doi.org/10.3316/ielapa.623036364777020</u>
- Kong, L., & Ziegler, G. R. (2012). Role of molecular entanglements in starch fiber formation by electrospinning. *Biomacromolecules*, *13*(8), 2247-2253. <u>https://doi.org/10.1021/bm300396j</u>

- Kong, Y., Jing, L., & Huang, D. (2022). Plant proteins as the functional building block of edible microcarriers for cell-based meat culture application. *Critical Reviews in Food Science* and Nutrition, 1-11. <u>https://doi.org/10.1080/10408398.2022.2147144</u>
- Kong, Y., Ong, S., Liu, M. H., Yu, H., & Huang, D. (2022). Functional composite microbeads for cell-based meat culture: effect of animal gelatin coating on cell proliferation and differentiation. *Journal of Physics D: Applied Physics*, 55(34), 345401. <u>https://doi.org/10.1088/1361-6463/ac7011</u>
- Lanza, R., Langer, R., Vacanti, J. P., & Atala, A. (2020). *Principles of tissue engineering*. Academic press.
- Lanzoni, D., Bracco, F., Cheli, F., Colosimo, B. M., Moscatelli, D., Baldi, A., Rebucci, R., & Giromini, C. (2022). Biotechnological and technical challenges related to cultured meat production. *Applied Sciences*, 12(13), 6771. <u>https://doi.org/10.3390/app12136771</u>
- Lee, D. Y., Lee, S. Y., Jung, J. W., Kim, J. H., Oh, D. H., Kim, H. W., Kang, J. H., Choi, J. S., Kim, G.-D., & Joo, S.-T. (2023). Review of technology and materials for the development of cultured meat. *Critical Reviews in Food Science and Nutrition*, 63(27), 8591-8615. <u>https://doi.org/10.1080/10408398.2022.2063249</u>
- Lee, J., Jung, H., Park, N., Park, S.-H., & Ju, J. H. (2019). Induced osteogenesis in plants decellularized scaffolds. *Scientific reports*, 9(1), 20194. https://doi.org/10.1038/s41598-019-56651-0
- Lee, M., Park, S., Choi, B., Kim, J., Choi, W., Jeong, I., Han, D., Koh, W.-G., & Hong, J. (2022). Tailoring a gelatin/agar matrix for the synergistic effect with cells to produce high-quality cultured meat. ACS Applied Materials & Interfaces, 14(33), 38235-38245. <u>https://doi.org/10.1021/acsami.2c10988</u>
- Lee, S. Y., Lee, D. Y., Jeong, J. W., Kim, J. H., Yun, S. H., Joo, S.-T., Choi, I., Choi, J. S., Kim, G.-D., & Hur, S. J. (2023). Studies on Meat Alternatives with a Focus on Structuring Technologies. *Food and Bioprocess Technology*, 16(7), 1389-1412. <u>https://doi.org/10.1007/s11947-022-02992-0</u>
- Leong, K., Cheah, C., & Chua, C. (2003). Solid freeform fabrication of three-dimensional scaffolds for engineering replacement tissues and organs. *Biomaterials*, 24(13), 2363-2378. <u>https://doi.org/10.1016/S0142-9612(03)00030-9</u>
- Levi, S., Yen, F.-C., Baruch, L., & Machluf, M. (2022). Scaffolding technologies for the engineering of cultured meat: Towards a safe, sustainable, and scalable production. *Trends in Food Science & Technology*, 126, 13-25. <u>https://doi.org/10.1016/j.tifs.2022.05.011</u>
- Li, A., Li, C., Gao, M., Yang, S., Liu, R., Chen, W., & Xu, K. (2021). Beef Cut Classification Using Multispectral Imaging and Machine Learning Method. *Frontiers in Nutrition*, 8, 755007. <u>https://doi.org/10.3389/fnut.2021.755007</u>
- Li, C.-H., Yang, I.-H., Ke, C.-J., Chi, C.-Y., Matahum, J., Kuan, C.-Y., Celikkin, N., Swieszkowski, W., & Lin, F.-H. (2022). The production of fat-containing cultured meat by stacking aligned muscle layers and adipose layers formed from gelatin-soymilk

scaffold. *Frontiers in Bioengineering and Biotechnology*, 10, 875069. https://doi.org/10.3389/fbioe.2022.875069

- Li, Y., Liu, W., Li, S., Zhang, M., Yang, F., & Wang, S. (2021). Porcine skeletal muscle tissue fabrication for cultured meat production using three-dimensional bioprinting technology. *Journal of Future Foods*, 1(1), 88-97. <u>https://doi.org/10.1016/j.jfutfo.2021.09.005</u>
- Liao, C. J., Chen, C. F., Chen, J. H., Chiang, S. F., Lin, Y. J., & Chang, K. Y. (2002). Fabrication of porous biodegradable polymer scaffolds using a solvent merging/particulate leaching method. Journal of Biomedical Materials Research: An Official Journal of The Society for Biomaterials, The Japanese Society for Biomaterials, and The Australian Society for Biomaterials and the Korean Society for Biomaterials, 59(4), 676-681. https://doi.org/10.1002/jbm.10030
- Listrat, A., Lebret, B., Louveau, I., Astruc, T., Bonnet, M., Lefaucheur, L., Picard, B., & Bugeon, J. (2016). How muscle structure and composition influence meat and flesh quality. *The Scientific World Journal*, 2016. <u>https://doi.org/10.1155/2016/3182746</u>
- Liu, Y., Hu, Q., Dong, W., Liu, S., Zhang, H., & Gu, Y. (2022). Alginate/Gelatin-Based Hydrogel with Soy Protein/Peptide Powder for 3D Printing Tissue-Engineering Scaffolds to Promote Angiogenesis. *Macromolecular Bioscience*, 22(4), 2100413. <u>https://doi.org/10.1002/mabi.202100413</u>
- Lodish, H. F. (2008). Molecular cell biology. Macmillan.
- Lu, L., Peter, S. J., Lyman, M. D., Lai, H.-L., Leite, S. M., Tamada, J. A., Uyama, S., Vacanti, J. P., Langer, R., & Mikos, A. G. (2000). In vitro and in vivo degradation of porous poly (DL-lactic-co-glycolic acid) foams. *Biomaterials*, 21(18), 1837-1845. <u>https://doi.org/10.1016/S0142-9612(00)00047-8</u>
- Lukas, D., Sarkar, A., & Pokorny, P. (2008). Self-organization of jets in electrospinning from free liquid surface: A generalized approach. *Journal of Applied Physics*, 103(8). <u>https://doi.org/10.1063/1.2907967</u>
- Luo, B., Tian, L., Chen, N., Ramakrishna, S., Thakor, N., & Yang, I. H. (2018). Electrospun nanofibers facilitate better alignment, differentiation, and long-term culture in an in vitro model of the neuromuscular junction (NMJ). *Biomaterials science*, 6(12), 3262-3272. <u>https://doi.org/10.1039/C8BM00720A</u>
- Luo, C., Loh, S., Stride, E., & Edirisinghe, M. (2012). Electrospraying and electrospinning of chocolate suspensions. *Food and Bioprocess Technology*, 5, 2285-2300. <u>https://doi.org/10.1007/s11947-011-0534-6</u>
- Ma, X., Liu, J., Zhu, W., Tang, M., Lawrence, N., Yu, C., Gou, M., & Chen, S. (2018). 3D bioprinting of functional tissue models for personalized drug screening and in vitro disease modeling. Advanced drug delivery reviews, 132, 235-251. https://doi.org/10.1016/j.addr.2018.06.011
- MacDonald, E., & Wicker, R. (2016). Multiprocess 3D printing for increasing component functionality. *Science*, 353(6307), aaf2093. <u>https://doi.org/10.1126/science.aaf2093</u>

- Machour, M., Hen, N., Goldfracht, I., Safina, D., Davidovich-Pinhas, M., Bianco-Peled, H., & Levenberg, S. (2022). Print-and-Grow within a Novel Support Material for 3D Bioprinting and Post-Printing Tissue Growth. Advanced Science, 9(34), 2200882. <u>https://doi.org/10.1002/advs.202200882</u>
- MacQueen, L. A., Alver, C. G., Chantre, C. O., Ahn, S., Cera, L., Gonzalez, G. M., O'Connor, B. B., Drennan, D. J., Peters, M. M., & Motta, S. E. (2019). Muscle tissue engineering in fibrous gelatin: implications for meat analogs. *NPJ science of food*, 3(1), 20. https://doi.org/10.1038/s41538-019-0054-8
- Madl, A. C., Madl, C. M., & Myung, D. (2020). Injectable cucurbit [8] uril-based supramolecular gelatin hydrogels for cell encapsulation. ACS macro letters, 9(4), 619-626. <u>https://doi.org/10.1021/acsmacrolett.0c00184</u>
- Mandrycky, C., Wang, Z., Kim, K., & Kim, D.-H. (2016). 3D bioprinting for engineering complex tissues. *Biotechnology advances*, 34(4), 422-434. https://doi.org/10.1016/j.biotechadv.2015.12.011
- Marques, D., Silva, J., Serro, A., Cabral, J., Sanjuan-Alberte, P., & Ferreira, F. (2022). 3D
  Bioprinting of Novel κ-Carrageenan Bioinks: An Algae-Derived Polysaccharide.
  Bioengineering 2022, 9, 109. In: s Note: MDPI stays neutral with regard to jurisdictional claims in published ....
- Mendes, A. C., Stephansen, K., & Chronakis, I. S. (2017). Electrospinning of food proteins and polysaccharides. *Food Hydrocolloids*, 68, 53-68. <u>https://doi.org/10.1016/j.foodhyd.2016.10.022</u>
- Mohammadinejad, R., Shavandi, A., Raie, D. S., Sangeetha, J., Soleimani, M., Hajibehzad, S. S., Thangadurai, D., Hospet, R., Popoola, J. O., & Arzani, A. (2019). Plant molecular farming: production of metallic nanoparticles and therapeutic proteins using green factories. *Green chemistry*, 21(8), 1845-1865. <u>https://doi.org/10.1039/C9GC00335E</u>
- Murphy, S. V., & Atala, A. (2014). 3D bioprinting of tissues and organs. *Nature biotechnology*, 32(8), 773-785. <u>https://doi.org/10.1038/nbt.2958</u>
- Narayanan, N., Jiang, C., Wang, C., Uzunalli, G., Whittern, N., Chen, D., Jones, O. G., Kuang, S., & Deng, M. (2020). Harnessing fiber diameter-dependent effects of myoblasts toward biomimetic scaffold-based skeletal muscle regeneration. *Frontiers in Bioengineering and Biotechnology*, 8, 203. <u>https://doi.org/10.3389/fbioe.2020.00203</u>
- Ng, S., & Kurisawa, M. (2021). Integrating biomaterials and food biopolymers for cultured meat production. *Acta Biomaterialia*, *124*, 108-129. https://doi.org/10.1016/j.actbio.2021.01.017
- Nie, J., Gao, Q., Fu, J., & He, Y. (2020). Grafting of 3D bioprinting to in vitro drug screening: A review. *Advanced healthcare materials*, 9(7), 1901773. <u>https://doi.org/10.1002/adhm.201901773</u>
- Nishimura, T. (2015). Role of extracellular matrix in development of skeletal muscle and postmortem aging of meat. *Meat science*, 109, 48-55. https://doi.org/10.1016/j.meatsci.2015.05.015

- Niu, H., Wang, X., & Lin, T. (2012). Needleless electrospinning: influences of fibre generator geometry. *Journal of the Textile Institute*, *103*(7), 787-794. https://doi.org/10.1080/00405000.2011.608498
- Norris, S. C., Kawecki, N. S., Davis, A. R., Chen, K. K., & Rowat, A. C. (2022). Emulsiontemplated microparticles with tunable stiffness and topology: Applications as edible microcarriers for cultured meat. *Biomaterials*, 287, 121669. <u>https://doi.org/10.1016/j.biomaterials.2022.121669</u>
- O'brien, F. J. (2011). Biomaterials & scaffolds for tissue engineering. *Materials today*, *14*(3), 88-95. <u>https://doi.org/10.1016/S1369-7021(11)70058-X</u>
- Ong, S., Choudhury, D., & Naing, M. W. (2020). Cell-based meat: Current ambiguities with nomenclature. *Trends in Food Science & Technology*, 102, 223-231. <u>https://doi.org/10.1016/j.tifs.2020.02.010</u>
- Ong, S., Loo, L., Pang, M., Tan, R., Teng, Y., Lou, X., Chin, S. K., Naik, M. Y., & Yu, H. (2021). Decompartmentalisation as a simple color manipulation of plant-based marbling meat alternatives. *Biomaterials*, 277, 121107. <u>https://doi.org/10.1016/j.biomaterials.2021.121107</u>
- Orellana, N., Sánchez, E., Benavente, D., Prieto, P., Enrione, J., & Acevedo, C. A. (2020). A new edible film to produce in vitro meat. *Foods*, 9(2), 185. https://doi.org/10.3390/foods9020185
- Ostrovidov, S., Hosseini, V., Ahadian, S., Fujie, T., Parthiban, S. P., Ramalingam, M., Bae, H., Kaji, H., & Khademhosseini, A. (2014). Skeletal muscle tissue engineering: methods to form skeletal myotubes and their applications. *Tissue Engineering Part B: Reviews*, 20(5), 403-436. <u>https://doi.org/10.1089/ten.teb.2013.0534</u>
- Ozbolat, I. T., & Hospodiuk, M. (2016). Current advances and future perspectives in extrusionbased bioprinting. *Biomaterials*, 76, 321-343. <u>https://doi.org/10.1016/j.biomaterials.2015.10.076</u>
- Pajčin, I., Knežić, T., Savic Azoulay, I., Vlajkov, V., Djisalov, M., Janjušević, L., Grahovac, J., & Gadjanski, I. (2022). Bioengineering outlook on cultivated meat production. *Micromachines*, 13(3), 402. <u>https://doi.org/10.3390/mi13030402</u>
- Palmieri, B., Vadala, M., & Laurino, C. (2018). Gluten-free diet in non-celiac patients: beliefs, truths, advantages and disadvantages. *Minerva gastroenterologica e dietologica*, 65(2), 153-162. <u>https://doi.org/10.23736/s1121-421x.18.02519-9</u>
- Park, Y.-S., & Lek, S. (2016). Artificial neural networks: Multilayer perceptron for ecological modeling. In *Developments in environmental modelling* (Vol. 28, pp. 123-140). Elsevier. <u>https://doi.org/10.1016/B978-0-444-63623-2.00007-4</u>
- Peng, W., Datta, P., Wu, Y., Dey, M., Ayan, B., Dababneh, A., & Ozbolat, I. T. (2018). Challenges in bio-fabrication of organoid cultures. *Cell Biology and Translational Medicine, Volume 3: Stem Cells, Bio-materials and Tissue Engineering*, 53-71. <u>https://doi.org/10.1007/5584\_2018\_216</u>

- Perez-Puyana, V., Wieringa, P., Yuste, Y., de la Portilla, F., Guererro, A., Romero, A., & Moroni, L. (2021). Fabrication of hybrid scaffolds obtained from combinations of PCL with gelatin or collagen via electrospinning for skeletal muscle tissue engineering. *Journal of Biomedical Materials Research Part A*, 109(9), 1600-1612. https://doi.org/10.1002/jbm.a.37156
- Post, M. J. (2014). Cultured beef: medical technology to produce food. *Journal of the Science* of Food and Agriculture, 94(6), 1039-1041. <u>https://doi.org/10.1002/jsfa.6474</u>
- Post, M. J., Levenberg, S., Kaplan, D. L., Genovese, N., Fu, J., Bryant, C. J., Negowetti, N., Verzijden, K., & Moutsatsou, P. (2020). Scientific, sustainability and regulatory challenges of cultured meat. *Nature Food*, 1(7), 403-415. https://doi.org/10.1038/s43016-020-0112-z
- Puppi, D., Mota, C., Gazzarri, M., Dinucci, D., Gloria, A., Myrzabekova, M., Ambrosio, L., & Chiellini, F. (2012). Additive manufacturing of wet-spun polymeric scaffolds for bone tissue engineering. *Biomedical microdevices*, 14, 1115-1127. <u>https://doi.org/10.1038/s43016-020-0112-z</u>
- Radomsky, M. L., Thompson, A. Y., Spiro, R. C., & Poser, J. W. (1998). Potential role of fibroblast growth factor in enhancement of fracture healing. *Clinical Orthopaedics and Related Research*®, 355, S283-S293.
- Rafiei, S., & Haghi, A. (2015). Nanoploymer Fibers: A Very comprehensive Review in Axial and Coaxial Electrospinning Process. Apple Academic Press, CRC Press.
- Ray, D. K., Mueller, N. D., West, P. C., & Foley, J. A. (2013). Yield trends are insufficient to double global crop production by 2050. *PloS one*, 8(6), e66428. <u>https://doi.org/10.1371/journal.pone.0066428</u>
- Razal, J. M., Kita, M., Quigley, A. F., Kennedy, E., Moulton, S. E., Kapsa, R. M., Clark, G. M., & Wallace, G. G. (2009). Wet-spun biodegradable fibers on conducting platforms: novel architectures for muscle regeneration. *Advanced functional materials*, 19(21), 3381-3388. <u>https://doi.org/10.1002/adfm.200900464</u>
- Reddy, M. S. B., Ponnamma, D., Choudhary, R., & Sadasivuni, K. K. (2021). A comparative review of natural and synthetic biopolymer composite scaffolds. *Polymers*, 13(7), 1105. <u>https://doi.org/10.3390/polym13071105</u>
- Reddy, N., & Yang, Y. (2011). Potential of plant proteins for medical applications. *Trends in biotechnology*, 29(10), 490-498. <u>https://doi.org/10.1016/j.tibtech.2011.05.003</u>
- Rezaei, A., Nasirpour, A., & Fathi, M. (2015). Application of cellulosic nanofibers in food science using electrospinning and its potential risk. *Comprehensive Reviews in Food Science and Food Safety*, 14(3), 269-284. <u>https://doi.org/10.1111/1541-4337.12128</u>
- Riboldi, S. A., Sampaolesi, M., Neuenschwander, P., Cossu, G., & Mantero, S. (2005). Electrospun degradable polyesterurethane membranes: potential scaffolds for skeletal muscle tissue engineering. *Biomaterials*, 26(22), 4606-4615. <u>https://doi.org/10.1016/j.biomaterials.2004.11.035</u>

- Rijal, N., Adhikari, U., & Bhattarai, N. (2017). Production of electrospun chitosan for biomedical applications. In *Chitosan Based Biomaterials Volume 1* (pp. 211-237). Elsevier. <u>https://doi.org/10.1016/B978-0-08-100230-8.00009-1</u>
- Robbins, E. R., Pins, G. D., Laflamme, M. A., & Gaudette, G. R. (2020). Creation of a contractile biomaterial from a decellularized spinach leaf without ECM protein coating: An in vitro study. *Journal of Biomedical Materials Research Part A*, 108(10), 2123-2132. <u>https://doi.org/10.1002/jbm.a.36971</u>
- Schätzlein, E., & Blaeser, A. (2022). Recent trends in bioartificial muscle engineering and their applications in cultured meat, biorobotic systems and biohybrid implants. *Communications Biology*, 5(1), 737. <u>https://doi.org/10.1038/s42003-022-03593-5</u>
- Seah, J. S. H., Singh, S., Tan, L. P., & Choudhury, D. (2022). Scaffolds for the manufacture of cultured meat. *Critical Reviews in Biotechnology*, 42(2), 311-323. <u>https://doi.org/10.1080/07388551.2021.1931803</u>
- Sealy, M., Avegnon, K., Garrett, A., Delbreilh, L., Bapat, S., & Malshe, A. (2022). Understanding biomanufacturing of soy-based scaffolds for cell-cultured meat by vat polymerization. *CIRP* Annals, 71(1), 209-212. <u>https://doi.org/10.1016/j.cirp.2022.04.001</u>
- Seo, J. W., Jung, W. K., Park, Y. H., & Bae, H. (2023). Development of cultivable alginate fibers for an ideal cell-cultivated meat scaffold and production of hybrid cultured meat. *Carbohydrate polymers*, 321, 121287. <u>https://doi.org/10.1016/j.carbpol.2023.121287</u>
- Sharma, S., Thind, S. S., & Kaur, A. (2015). In vitro meat production system: why and how? *Journal of food science and technology*, 52, 7599-7607. <u>https://doi.org/10.1007/s13197-015-1972-3</u>
- Simonet, M., Schneider, O. D., Neuenschwander, P., & Stark, W. J. (2007). Ultraporous 3D polymer meshes by low-temperature electrospinning: use of ice crystals as a removable void template. *Polymer Engineering & Science*, 47(12), 2020-2026. https://doi.org/10.1002/pen.20914
- Singh, A., Verma, V., Kumar, M., Kumar, A., Sarma, D. K., Singh, B., & Jha, R. (2022). Stem cells-derived in vitro meat: from petri dish to dinner plate. *Critical Reviews in Food Science and Nutrition*, 62(10), 2641-2654. https://doi.org/10.1080/10408398.2020.1856036
- Stephens, N., Di Silvio, L., Dunsford, I., Ellis, M., Glencross, A., & Sexton, A. (2018). Bringing cultured meat to market: Technical, socio-political, and regulatory challenges in cellular agriculture. *Trends in Food Science & Technology*, 78, 155-166. <u>https://doi.org/10.1016/j.tifs.2018.04.010</u>
- Stevens, B., Yang, Y., MohandaS, A., Stucker, B., & Nguyen, K. T. (2008). A review of materials, fabrication to enhance bone regeneration in methods, and strategies used engineered bone tissues. *Journal of Biomedical Materials Research Part B-Applied Biomaterials*, 85(2), 573-582. <u>https://doi.org/10.1002/jbm.b.30962</u>

- Stijnman, A. C., Bodnar, I., & Tromp, R. H. (2011). Electrospinning of food-grade polysaccharides. *Food Hydrocolloids*, 25(5), 1393-1398. https://doi.org/10.1016/j.foodhyd.2011.01.005
- Stout, A. J., Mirliani, A. B., Soule-Albridge, E. L., Cohen, J. M., & Kaplan, D. L. (2020). Engineering carotenoid production in mammalian cells for nutritionally enhanced cellcultured foods. *Metabolic engineering*, 62, 126-137. https://doi.org/10.1016/j.ymben.2020.07.011
- Su, X., Xian, C., Gao, M., Liu, G., & Wu, J. (2021). Edible materials in tissue regeneration. *Macromolecular Bioscience*, 21(8), 2100114. <u>https://doi.org/10.1002/mabi.202100114</u>
- Sun, X.-Z., Williams, G. R., Hou, X.-X., & Zhu, L.-M. (2013). Electrospun curcumin-loaded fibers with potential biomedical applications. *Carbohydrate polymers*, 94(1), 147-153. <u>https://doi.org/10.1016/j.carbpol.2012.12.064</u>
- Sun, X., Young, J., Liu, J. H., Chen, Q., & Newman, D. (2018). Predicting pork color scores using computer vision and support vector machine technology. *Meat and Muscle Biology*, 2(1). <u>https://doi.org/10.22175/mmb2018.06.0015</u>
- Swartz, E. (2019). Meeting the needs of the cell-based meat industry. *Chemical Engineering Progress*, *115*(10), 41-45.
- Tadsen, M., Friedrich, R. P., Riedel, S., Alexiou, C., & Mayr, S. G. (2019). Contact guidance by microstructured gelatin hydrogels for prospective tissue engineering applications. *ACS Applied Materials & Interfaces*, 11(7), 7450-7458. <u>https://doi.org/10.1021/acsami.8b21638</u>
- Takahashi, H., Yoshida, A., Gao, B., Yamanaka, K., & Shimizu, T. (2022). Harvest of qualitycontrolled bovine myogenic cells and biomimetic bovine muscle tissue engineering for sustainable meat production. *Biomaterials*, 287, 121649. <u>https://doi.org/10.1016/j.biomaterials.2022.121649</u>
- Takahashi, K., & Yamanaka, S. (2006). Induction of pluripotent stem cells from mouse embryonic and adult fibroblast cultures by defined factors. *cell*, *126*(4), 663-676. <u>https://doi.org/10.1016/j.cell.2006.07.024</u>
- Taqvi, S., & Roy, K. (2006). Influence of scaffold physical properties and stromal cell coculture on hematopoietic differentiation of mouse embryonic stem cells. *Biomaterials*, 27(36), 6024-6031. <u>https://doi.org/10.1016/j.biomaterials.2006.05.052</u>
- Tarassoli, S. P., Jessop, Z. M., Al-Sabah, A., Gao, N., Whitaker, S., Doak, S., & Whitaker, I. S. (2018). Skin tissue engineering using 3D bioprinting: An evolving research field. *Journal of Plastic, Reconstructive & Aesthetic Surgery*, 71(5), 615-623. <u>https://doi.org/10.1016/j.bjps.2017.12.006</u>
- Thenmozhi, S., Dharmaraj, N., Kadirvelu, K., & Kim, H. Y. (2017). Electrospun nanofibers: New generation materials for advanced applications. *Materials Science and Engineering: B*, 217, 36-48. <u>https://doi.org/10.1016/j.mseb.2017.01.001</u>

- Thyden, R., Perreault, L. R., Jones, J. D., Notman, H., Varieur, B. M., Patmanidis, A. A., Dominko, T., & Gaudette, G. R. (2022). An edible, decellularized plant derived cell carrier for lab grown meat. *Applied Sciences*, 12(10), 5155. <u>https://doi.org/10.3390/app12105155</u>
- Tobin, A. (2016). No Harm No Fowl: Startup to Grow Chickenless Chicken. Times of Israel.
- Tong, L., & Sumetsky, M. (2011). Subwavelength and nanometer diameter optical fibers. Springer Science & Business Media.
- Tzezana, R., Zussman, E., & Levenberg, S. (2008). A layered ultra-porous scaffold for tissue engineering, created via a hydrospinning method. *Tissue Engineering Part C: Methods*, 14(4), 281-288. <u>https://doi.org/10.1089/ten.tec.2008.0201</u>
- Verbeke, W., Spranghers, T., De Clercq, P., De Smet, S., Sas, B., & Eeckhout, M. (2015). Insects in animal feed: Acceptance and its determinants among farmers, agriculture sector stakeholders and citizens. *Animal Feed Science and Technology*, 204, 72-87. <u>https://doi.org/10.1016/j.anifeedsci.2015.04.001</u>
- Verbruggen, S., Luining, D., van Essen, A., & Post, M. J. (2018). Bovine myoblast cell production in a microcarriers-based system. *Cytotechnology*, 70, 503-512. <u>https://doi.org/10.1007/s10616-017-0101-8</u>
- Wang, W., Peng, Y., Sun, H., Zheng, X., & Wei, W. (2018). Spectral detection techniques for non-destructively monitoring the quality, safety, and classification of fresh red meat. *Food Analytical Methods*, 11, 2707-2730. <u>https://doi.org/10.1007/s12161-018-1256-4</u>
- Welin, S. (2013). Introducing the new meat. Problems and prospects. *Etikk i praksis-Nordic Journal of Applied Ethics*(1), 24-37. <u>https://doi.org/10.5324/eip.v7i1.1788</u>
- Williams, C., & Wick, T. M. (2004). Perfusion bioreactor for small diameter tissue-engineered arteries. *Tissue engineering*, *10*(5-6), 930-941. https://doi.org/10.1089/1076327041348536
- Wongsasulak, S., Kit, K. M., McClements, D. J., Yoovidhya, T., & Weiss, J. (2007). The effect of solution properties on the morphology of ultrafine electrospun egg albumen–PEO composite fibers. *Polymer*, 48(2), 448-457. <u>https://doi.org/10.1016/j.polymer.2006.11.025</u>
- Wongsasulak, S., Patapeejumruswong, M., Weiss, J., Supaphol, P., & Yoovidhya, T. (2010). Electrospinning of food-grade nanofibers from cellulose acetate and egg albumen blends. *Journal of Food Engineering*, 98(3), 370-376. https://doi.org/10.1016/j.polymer.2006.11.025
- Xiang, N., Yuen Jr, J. S., Stout, A. J., Rubio, N. R., Chen, Y., & Kaplan, D. L. (2022). 3D porous scaffolds from wheat glutenin for cultured meat applications. *Biomaterials*, 285, 121543. <u>https://doi.org/10.1016/j.biomaterials.2022.121543</u>
- Xu, E., Niu, R., Lao, J., Zhang, S., Li, J., Zhu, Y., Shi, H., Zhu, Q., Chen, Y., & Jiang, Y. (2023). Tissue-like cultured fish fillets through a synthetic food pipeline. *NPJ science* of food, 7(1), 17. <u>https://doi.org/10.1038/s41538-023-00194-2</u>

- Yang, F., Wang, S., Li, Y., Li, S., Liu, W., Li, Y., & Hu, H. (2022). Physical optimization of cell proliferation and differentiation using spinner flask and microcarriers. AMB Express, 12(1), 63. <u>https://doi.org/10.1186/s13568-022-01397-8</u>
- Yang, S., Leong, K.-F., Du, Z., & Chua, C.-K. (2002). The design of scaffolds for use in tissue engineering. Part II. Rapid prototyping techniques. *Tissue engineering*, 8(1), 1-11. <u>https://doi.org/10.1089/107632702753503009</u>
- Yu, M., Dong, R. H., Yan, X., Yu, G. F., You, M. H., Ning, X., & Long, Y. Z. (2017). Recent advances in needleless electrospinning of ultrathin fibers: from academia to industrial production. *Macromolecular Materials and Engineering*, 302(7), 1700002. https://doi.org/10.1002/mame.201700002
- Yun, S. H., Lee, S. Y., Lee, J., Joo, S.-T., Choi, I., Choi, J. S., Kim, G.-D., & Hur, S. J. (2023). Improved culture procedure for bovine muscle satellite cells for cultured meat. *Food Research International*, 113660. <u>https://doi.org/10.1016/j.foodres.2023.113660</u>
- Zagury, Y., Ianovici, I., Landau, S., Lavon, N., & Levenberg, S. (2022). Engineered marblelike bovine fat tissue for cultured meat. *Communications Biology*, 5(1), 927. <u>https://doi.org/10.1038/s42003-022-03852-5</u>
- Zanderigo, G. (2021). Printability assessment of edible bioinks for cultured meat extrusion based 3D bioprinting.
- Zaupa, A., Byres, N., Dal Zovo, C., Acevedo, C. A., Angelopoulos, I., Terraza, C., Nestle, N., Abarzúa-Illanes, P. N., Quero, F., & Díaz-Calderón, P. (2019). Cold-adaptation of a methacrylamide gelatin towards the expansion of the biomaterial toolbox for specialized functionalities in tissue engineering. *Materials Science and Engineering: C*, 102, 373-390. <u>https://doi.org/10.1016/j.msec.2019.04.020</u>
- Zernov, A., Baruch, L., & Machluf, M. (2022). Chitosan-collagen hydrogel microparticles as edible cell microcarriers for cultured meat. *Food Hydrocolloids*, *129*, 107632. <u>https://doi.org/10.1016/j.foodhyd.2022.107632</u>
- Zhang, A.-q., Xiao, N.-n., Deng, Y.-l., He, P.-f., & Sun, P.-l. (2012). Purification and structural investigation of a water-soluble polysaccharide from Flammulina velutipes. *Carbohydrate polymers*, 87(3), 2279-2283. https://doi.org/10.1016/j.carbpol.2011.10.061
- Zhang, J., Wang, L., Zhu, M., Wang, L., Xiao, N., & Kong, D. (2014). Wet-spun poly (εcaprolactone) microfiber scaffolds for oriented growth and infiltration of smooth muscle cells. *Materials Letters*, *132*, 59-62. https://doi.org/10.1016/j.matlet.2014.06.038
- Zhang, L., Hu, Y., Badar, I. H., Xia, X., Kong, B., & Chen, Q. (2021). Prospects of artificial meat: Opportunities and challenges around consumer acceptance. *Trends in Food Science & Technology*, *116*, 434-444. <u>https://doi.org/10.1016/j.tifs.2021.07.010</u>
- Zhang, Y. S., Oklu, R., Dokmeci, M. R., & Khademhosseini, A. (2018). Three-dimensional bioprinting strategies for tissue engineering. *Cold Spring Harbor perspectives in medicine*, 8(2), a025718. <u>https://doi.org/10.1101/cshperspect.a025718</u>

Zheng, Y.-Y., Chen, Y., Zhu, H.-Z., Li, C.-B., Song, W.-J., Ding, S.-J., & Zhou, G.-H. (2022). Production of cultured meat by culturing porcine smooth muscle cells in vitro with food grade peanut wire-drawing protein scaffold. *Food Research International*, 159, 111561. <u>https://doi.org/10.1016/j.foodres.2022.111561</u>

Origin	Category	Scaffolding material	Species	Achievements	References
Plant	Protein	Textured Soy Protein (TSP)/ Textured	Cattle	Alleviate bovine skeletal muscle cell growth and develop into a Cultured meat prototype.	(Ben-Arye et al., 2020)
		Vegetable Protein (TVP),		Plant protein-based scaffolds seem appealing due to their inexpensive and additional nutritional content biocompatibility.	(Gutowska et al., 2001)
					(Radomsky et al., 1998
		Wheat		Although wheat protein is a fascinating source of protein, its widespread use is limited due to allergen issues and	(Czaja-Bulsa & Bulsa, 2017)
				inflated public impression of wheat protein intolerances.	(Palmieri et al., 2018)
		Peanut	Pig	Scaffold derived from peanut protein aided flawless adhesion, the proliferation of pig smooth muscle cells with high cell survival rate and high- quality final product.	(Zheng et al., 2022)
		Soy and Peanut		Soy and peanut proteins are suggested to be labeled as allergens, although these are sustainable and low-cost.	(Post et al., 2020)
		Zein and Protein Isolates from Soy, Wheat, Oat, Cottonseed, Pea, and Peanut		Low cost, beneficial nutritional values, extensively used in the food industry, and well- known to consumers can make this a highly promising candidate as scaffold items in cultured meat manufacturing. Insufficient cell adherence might require protein modifications or incorporation of cell adherence moieties.	(Cai et al., 2020)
	Polysacc haride	Alginate, pectin, Konjac gum, Cellulose		Potential biomaterials due to their physiological functions and substantial cellular adhesion compatibility.	(Levi et al., 2022)
		Dextran	Cattle	bovine myoblast cells successfully cultured on microcarrier scaffolds prepared with dextran and polystyrene.	(Verbruggen et al., 2018)
Decellularized plant	Polysacc haride	Spinach		Edible, cost-effective, and similar to gelatin- coated glass to develop Cultured meat.	(Jones et al., 2021)
		Spinach		Studied on human mesenchymal cell culture.	(Robbins et al., 2020)
		Broccoli		Broccoli florets were grown to show that they can support BSCs in a dynamic reactor. Decellularized florets had good physical and nutritional properties, suggesting their possible use in cultured meat production and consumption.	(Thyden et al., 2022)
		Amenity grass leaf	Mouse	Cell alignment and proliferation of mouse C2C12 cells were assisted with natural morphology.	(Allan et al., 2021)

# Table 1. Scaffolding materials in Muscle cell culture and Cultured meat.

		Green-Onion	Human	Studied on human mesenchymal cell culture.	(Cheng et al., 2020)
		Apple, Carrot, and Celery		Studied on mice C2C12 cell culture.	(Contessi Negrini et al., 2020)
		Celery		Studied on mice C2C12 cell culture.	(Campuzano et al., 2020)
Fruits	Polysacc haride/Pr otein	Jackfruit		Artificial intelligence-based study showed that jackfruit scaffolds can grow pig myoblast cells. This method preserved the marbled cell appearance. The jackfruit scaffold also browns like meat when cooked.	(Ong et al., 2021)
Sea Weed		Agar/agarose	Mouse	Utilized effectively in many investigations to implant the mouse myoblast cell line.	(Cidonio et al., 2019; Garcia-Cruz et al., 2021)
				These polysaccharides can form stable and tasteless hydrogels but without any nutritional value.	(Delcour & Poutanen, 2013)
		Marine macroalgae	Mouse	The decellularization-recellularization technique was employed to construct scaffolds made from seaweed cellulose for the purpose of culturing C2C12 cells in mice.	(Bar-Shai et al., 2021)
animal	Protein	Collagen		Bio-engineered artificial muscles (BAM) found to grow successfully into collagen scaffolds and stand as the gold standard.	(Lanza et al., 2020; Leong et al., 2003; Liao et al., 2002; Lu et al., 2000; Taqvi & Roy, 2006; Yang et al., 2002)
		Collagen	Chicken	The utilization of collagen microcarriers was investigated in order to enhance the process of myogenesis and replicate the characteristics of muscle fibers resembling natural tissue.	(Yang et al., 2022)
		Gelatin	Cow and Rabbit	Gelatin, a natural component of meat generated vi a collagen denaturation during processing and coo king, has recently been employed to develop meat.	(MacQueen et al., 2019)
		Gelatin		The utilization of an edible gelatin microcarrier scaffold facilitated the development of myogenic microtissue from C2C12 or bovine satellite muscle cells.	(Norris et al., 2022)
		Gelatin	Pig, mouse	Bovine gelatin-coated microbeads hydrogel has potential for primary porcine myoblast and C2C12 cell adhesion	(Kong, Ong, et al., 2022)
		Fibrin	Cattle	Bovine myogenic cells were cultured on fibrin hydrogel to induce the development of a cellular arrangement that closely resembles the natural alignment observed in vivo.	(Takahashi et al., 2022)
		Collagen, Fibrin	Cattle	Aligned bovine myotubes cultivated on collagen/fibrin hydrogel scaffold with low microbial level below the detection limit, indicating sterile tissue unlike commercial meat.	(Furuhashi et al., 2021)

		Laminin, Gellan gum	Mouse	Laminin/gellan gum hydrogel scaffold facilitate mouse C2C12 skeletal muscle regeneration.	(Alheib et al., 2022)
		Salmon gelatin	Mouse	Salmon gelatin was incorporated into the scaffolds and films to promote cell adhesion. Moreover, suitable myogenic responses were observed.	(Enrione et al., 2017; Orellana et al., 2020)
		Fish gelatin	Mouse	Fish gelatin/agar matrix was optimized to coat the surface of textured vegetable protein (TVP), a plant-based cellular scaffold.	(Lee et al., 2022)
		Fibrinogen		Possess attractive nutritional values, cell adherence, and growth.	(Ng & Kurisawa, 2021)
		Whey		Low cost, sustainable but Need allergen labeling.	(Post et al., 2020)
Marine animals	Protein	Edible insects		They are developing recognition due to their elevated protein and fat content, as well as their more nutritional and long-lasting value.	(Verbeke et al., 2015)
		Chitosan		It has the requisite cytocompatibility, is edible, inexpensive in cost, and widely available. Chitosan is a biodegradable biomaterial from marine source. However, its animal origin may limit its acceptance.	(Levi et al., 2022)
		Chitosan, Collagen	Mouse, rabbit, sheep, cattle	The utilization of microcarriers composed of chitosan and collagen facilitated the adherence and swift proliferation of many cell types, including mouse skeletal C2C12 myoblasts, rabbit	(Zernov et al., 2022)
				smooth muscle cells, sheep fibroblasts, and bovine umbilical cord mesenchymal stem cells.	
Fungi	Polysacc haride	Enoki mushroom		Enoki mushroom is found to be edible polysaccharides and is promising as biomaterials to fabricate scaffolds.	(Hu et al., 2019; Wang et al., 2018; Zhang et al., 2012)
Improvised biomaterials	Protein	Sodium alginate and Gelatin gel coated with Tea polyphenols		The adhesion rate of cells on scaffolds with a coating was 1.5 times more than uncoated, along with increased cell proliferation. The Cultured meat obtained from rabbits had comparable visual and sensory attributes to that of freshly harvested meat.	(X. Chen et al., 2023)
Bakery	Polysacc haride	Bread		A compelling choice for future applications due to their ability to combine cost-effectiveness with simplicity, hence enabling scaled manufacturing.	(Holmes et al., 2022)

	Bio Ir	nk category	_ Cell origin	Research focus	Reference	
Chemical	Animal	Insect	Plant	6		
Alginate	Gelatin			El-16	Cultured meat	(Dutta et al., 2022)
RGD- modified alginate			Pea protein isolate (PPI), Soy protein isolate (SPI)		Cultured meat	(Ianovici et al., 2022)
Alginate	Bovine adipose tissue			E. M.	Cultured meat	(Zagury et al., 2022)
	Fibrin, Gelatin			E TH	Cultured meat	(Kang et al., 2021)
	Gelatin			EN	Cultured meat	(Jeong et al., 2022)
	Gelatin		Transglutaminase	(FAF	Cultured meat	(Liu et al., 2022)
Alginate	Gelatin			EN	Cultured meat	(Zanderigo, 2021)
	Gelatin			E	Cultured meat	(Garrett et al., 2021)
Alginate	Gelatin	Silk/Fibroin		A.P.	Cultured meat	(Y. Li et al., 2021)
			Soybean oil- based resin	000	Plant based meat	(Sealy et al., 2022)
Alginate	Gelatin				Cultured fish	(Xu et al., 2023)
Alginate	Collagen, Gelatin, Fibrin		Carrageenan	大	Biomedical cell culture	(Machour et al., 2022)
Carrageenan			Carrageenan	See a	Biomedical cell culture	(Marques et al., 2022)
Alginate	Gelatin			Je si	Biomedical cell culture	(Bolívar-Monsalve et al., 2021)
	Fibrin,			×	Biomedical cell culture	(Ahrens et al., 2022)
	Gelatin				con culture	2022)

# Table 2. Details on recent research on 3D bioprinting.

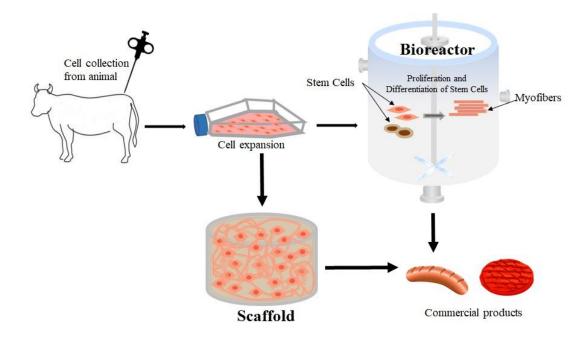


Figure 1. illustration of lab grown meat (Cultured meat). Self-drawn images.

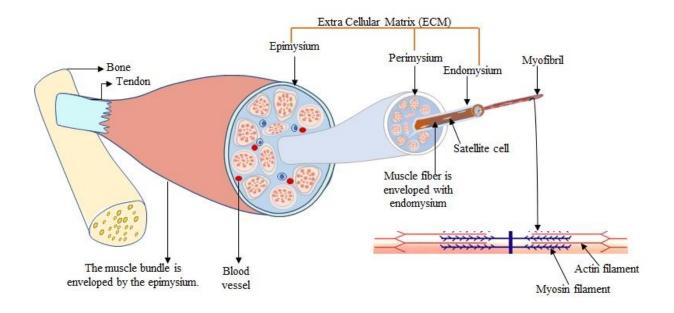


Figure 2. skeletal muscle structure with extracellular matrix (ECM). Self-drawn images.

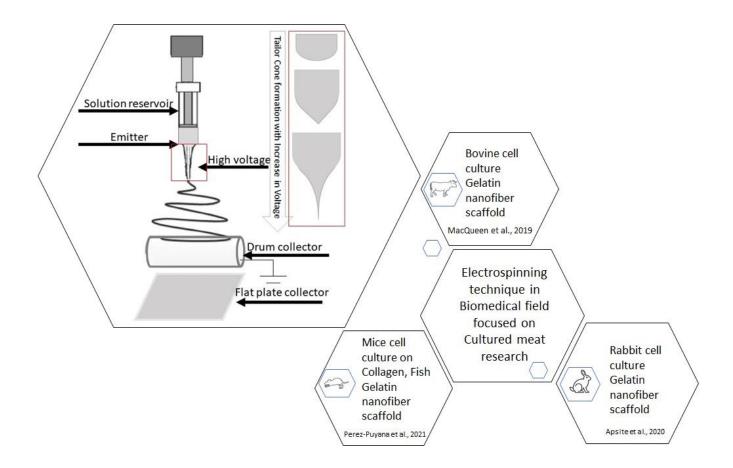


Figure 3. Electrospinning process and recent uses in cell culture (Apsite et al., 2020; MacQueen et al., 2019; Perez-Puyana et al., 2021). Self-drawn images.

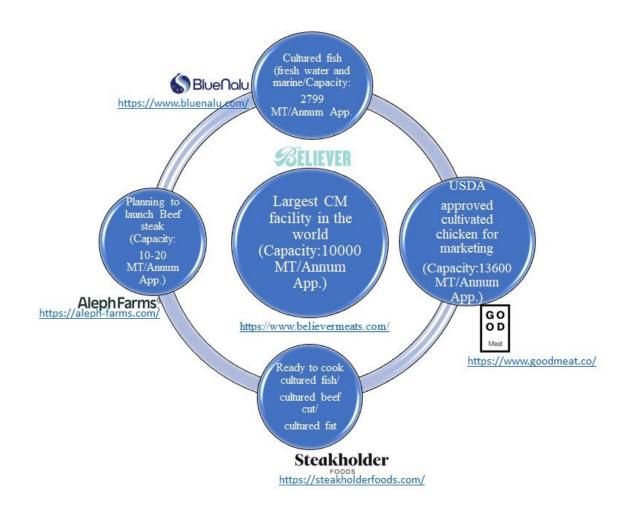


Figure 4. Top companies in 3D Cultured meat development (Self-drawn images).